



TESTING LABORATORY  
CERTIFICATE # 4297.01

ATC

## FCC PART 15.247 TEST REPORT

For

**Bolt Modus Corp**

Oficina N.33 Edificio Ofidepositos Central, Calidonia - Distrito Federal, Panama

**FCC ID: 2APW4HYDROG**

<b>Report Type:</b> Original Report	<b>Product Type:</b> HYDROGEL MACHINE
<b>Report Number:</b> <u>SZ1210818-35081E-RF-00A</u>	
<b>Report Date:</b> <u>2021-10-10</u>	
Candy Li <b>Reviewed By:</b> <u>RF Engineer</u>	<i>Candy . Li</i>
<b>Prepared By:</b> Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 <a href="http://www.atc-lab.com">Http://www.atc-lab.com</a>	

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “\*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION</b> .....	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION</b> .....	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS</b> .....	<b>8</b>
<b>TEST EQUIPMENT LIST</b> .....	<b>9</b>
<b>FCC §15.247 (i) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)</b> .....	<b>10</b>
<b>FCC §15.203 – ANTENNA REQUIREMENT</b> .....	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS</b> .....	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	13
TRANSD FACTOR & MARGIN CALCULATION .....	14
TEST DATA .....	14
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS</b> .....	<b>17</b>
APPLICABLE STANDARD .....	17
EUT SETUP .....	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	18
TEST PROCEDURE .....	18
FACTOR & MARGIN CALCULATION .....	18
TEST DATA .....	18
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST</b> .....	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST DATA .....	23
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH</b> .....	<b>24</b>
APPLICABLE STANDARD .....	24
TEST PROCEDURE .....	24
TEST DATA .....	25
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST</b> .....	<b>26</b>
APPLICABLE STANDARD .....	26

TEST PROCEDURE .....	26
TEST DATA .....	26
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST DATA .....	27
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>APPENDIX .....</b>	<b>30</b>
APPENDIX A: 20dB EMISSION BANDWIDTH.....	30
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	34
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	38
APPENDIX D: CARRIER FREQUENCY SEPARATION .....	42
APPENDIX E: TIME OF OCCUPANCY .....	44
APPENDIX F: NUMBER OF HOPPING CHANNELS .....	51
APPENDIX G: BAND EDGE MEASUREMENTS .....	52

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	HYDROGEL MACHINE
Tested Model	YEZZ HYDROGEL MACHINE
Multiple Model	HYDROW01
Model Differences	Refer to the DoS letter
Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: -4.54dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	0dBi (provided by the applicant)
Voltage Range	DC24V from adapter
Date of Test	2021-09-09 to 2021-09-27
Sample serial number	SZ1210818-35081E-RF-S1 for CE&RE SZ1210818-35081E-RF-S2 for RF conducted
Received date	2021-08-18
Sample/EUT Status	Good condition
Adapter information	Model: GM42-240175-D Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 24V, 1.75A

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation

## Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.73dB	
Unwanted Emission, conducted	1.6dB	
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature	1 °C	
Humidity	6%	
Supply voltages	0.4%	

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A-2.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

“rftesttool-v61” software was used to test, which provided by manufacturer.

The device was tested with the Power level is default\*.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
HONOR	Mobile phone	V10	Unknown
Kingston	U disk	SE9	Unknown

### External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielded detachable AC cable	1.5	adapter	LISN
Un-shielded un-detachable DC cable	1.5	EUT	adapter

## Block Diagram of Test Setup

For conducted emission:

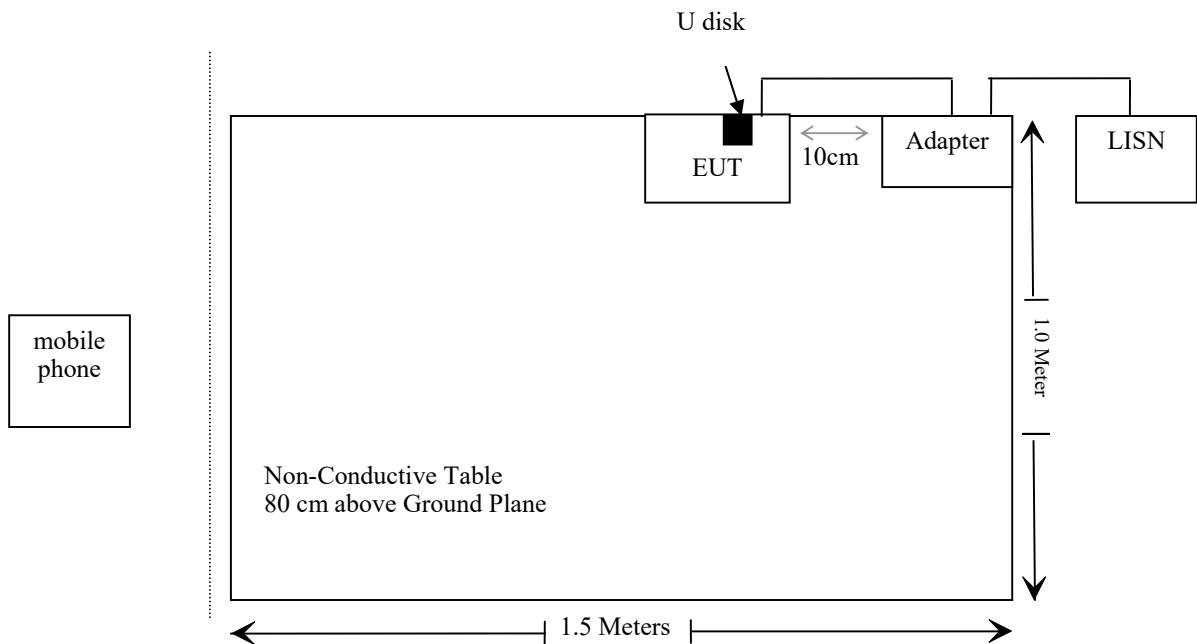

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i), §2.1091	Maximum Permissible Exposure(MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Rohde & Schwarz	Test Software	ES-K1	V1.71	NCR	NCR
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
OREGON SCIENTIFIC	Temperature & Humidity Meter	JB913R	GZ-WS004	2020/01/02	2023/01/01
Quinstar	Amplifier	QLW-1840553 6-J0	15964001002	2020/11/28	2021/11/27
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2020/12/25	2021/12/24
FARAD	Test Software	EZ_EMC	V 1.1.4.2	NCR	NCR
RF Conducted Test					
Spectrum Analyzer	Rohde & Schwarz	FSV-40	101495	2020/12/24	2021/12/23
Open Switch and Control Unit	Rohde & Schwarz	OSP120 + OSP-B157	101244 + 100866	2020/12/24	2021/12/23

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

### **Applicable Standard**

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

#### **Limits for General Population/Uncontrolled Exposure**

<b>Limits for General Population/Uncontrolled Exposure</b>				
<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (Minutes)</b>
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

### **Result**

#### **Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

For the worst case:

Mode	Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(mW)			
BT	2402-2480	0	1	-4	0.40	20	0.00008	1
BLE	2402-2480	0	1	-1.0	0.79	20	0.0002	1
Wi-Fi	2412-2462	0	1	16.0	39.81	20	0.0079	1

Note: The BT/BLE and Wi-Fi can transmit at the same time.

Simultaneous transmitting consideration:

The ratio=MPE<sub>BLE</sub>/limit+MPE<sub>Wi-Fi</sub>/limit =0.0002/1+0.0079/1=0.0081<1.0

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

## FCC §15.203 – ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Antenna Connector Construction

The EUT has one internal antenna which was permanently attached, and the maximum antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

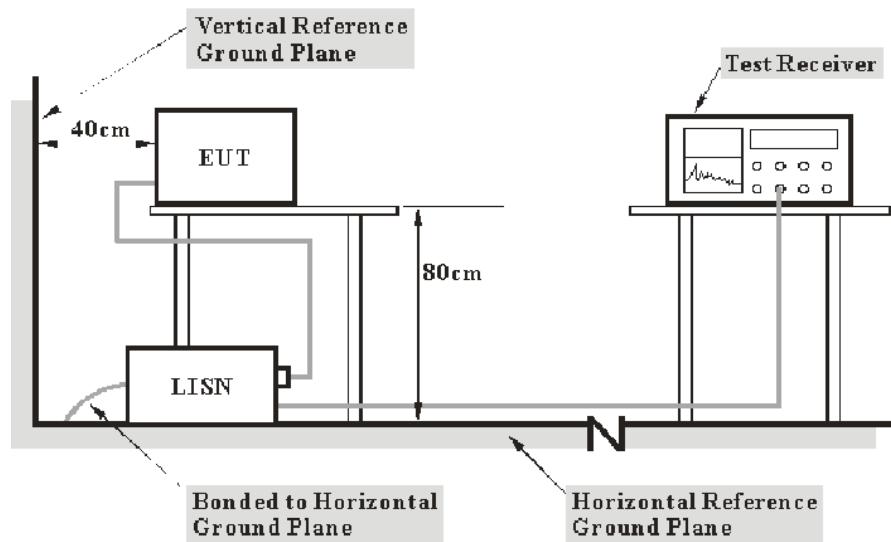

**Note:** 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{level}$$

$$\text{Level} = \text{reading level} + \text{Transd Factor}$$


## Test Data

### Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

*The testing was performed by Black.Ding on 2021-09-26.*

*EUT operation mode: Transmitting (the worst case is GFSK Mode, Middle channel)*

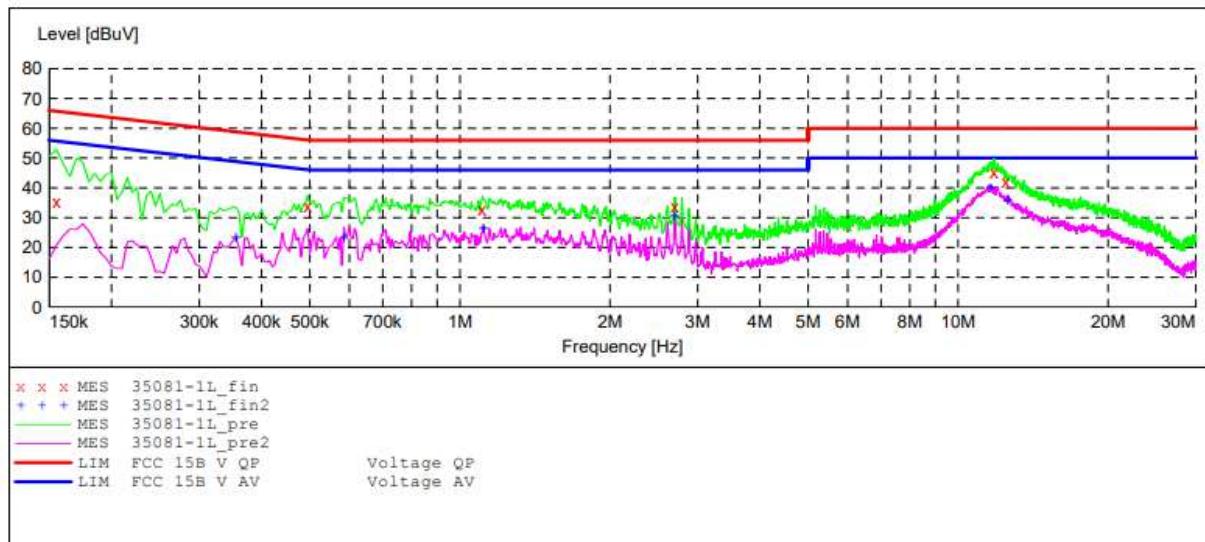**AC 120V/60 Hz, Line****MEASUREMENT RESULT: "35081-1L\_fin"**


2021-9-26 10:21

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	35.70	10.8	66	30.3	QP	L1	GND
0.495000	33.50	11.0	56	22.5	QP	L1	GND
1.110000	32.60	11.2	56	23.4	QP	L1	GND
2.700000	33.80	11.3	56	22.2	QP	L1	GND
11.800000	45.30	11.6	60	14.7	QP	L1	GND
12.475000	42.30	11.6	60	17.7	QP	L1	GND

**MEASUREMENT RESULT: "35081-1L\_fin2"**

2021-9-26 10:21

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.355000	23.40	10.9	49	25.6	AV	L1	GND
0.585000	23.40	11.0	46	22.6	AV	L1	GND
1.115000	26.40	11.2	46	19.6	AV	L1	GND
2.700000	30.70	11.3	46	15.3	AV	L1	GND
11.625000	39.80	11.6	50	10.2	AV	L1	GND
12.575000	36.00	11.6	50	14.0	AV	L1	GND

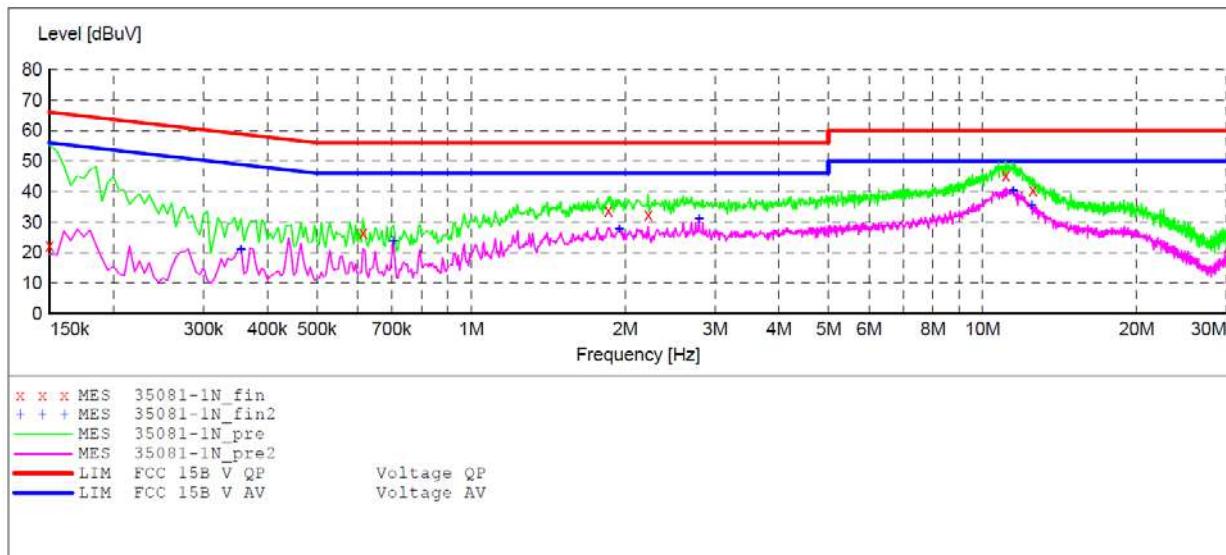**AC 120V/60 Hz, Neutral****MEASUREMENT RESULT: "35081-1N\_fin"**

2021-9-26 10:18

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	22.40	10.8	66	43.6	QP	N	GND
0.615000	26.70	11.0	56	29.3	QP	N	GND
1.855000	33.90	11.2	56	22.1	QP	N	GND
2.220000	32.40	11.3	56	23.6	QP	N	GND
11.100000	45.30	11.6	60	14.7	QP	N	GND
12.550000	40.60	11.6	60	19.4	QP	N	GND



**MEASUREMENT RESULT: "35081-1N\_fin2"**

2021-9-26 10:18

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.355000	21.10	10.9	49	27.9	AV	N	GND
0.705000	23.90	11.1	46	22.1	AV	N	GND
1.950000	27.70	11.3	46	18.3	AV	N	GND
2.790000	31.00	11.3	46	15.0	AV	N	GND
11.475000	40.30	11.6	50	9.7	AV	N	GND
12.475000	35.40	11.6	50	14.6	AV	N	GND

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

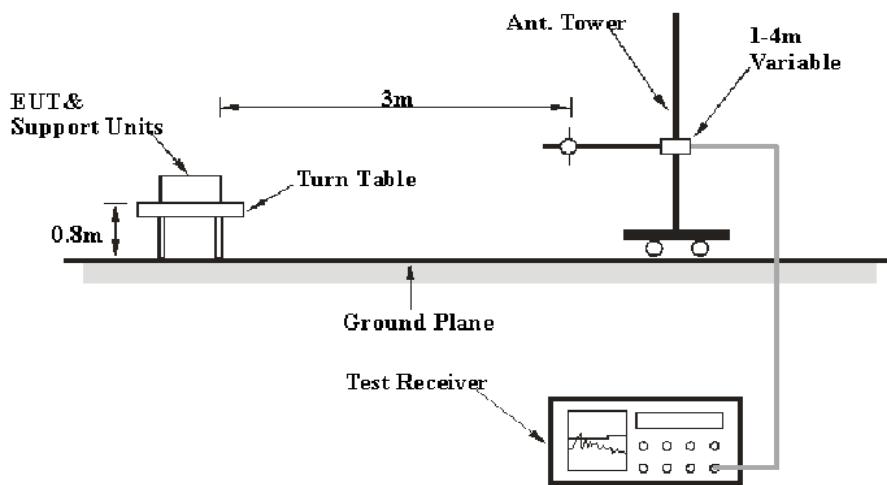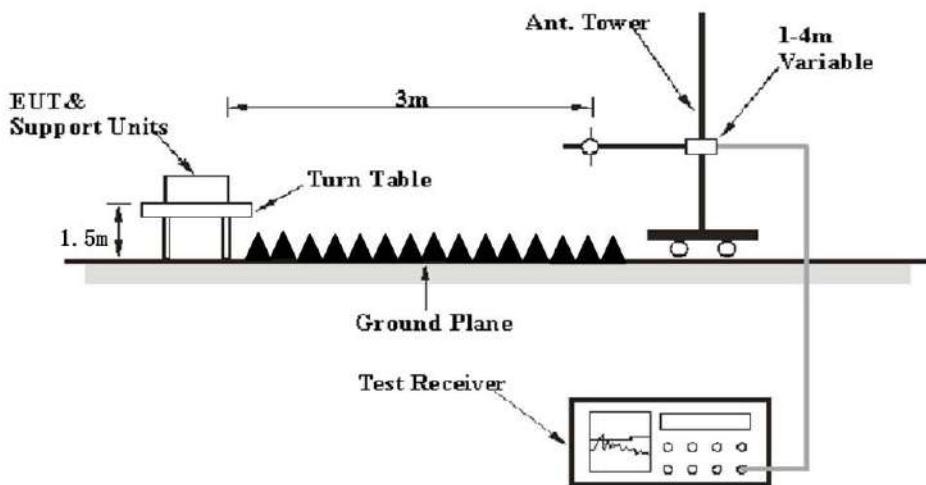**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Result-Limit}$$

$$\text{Result} = \text{Reading} + \text{Factor}$$

## Test Data

### Environmental Conditions

Temperature:	23~26.5 °C
Relative Humidity:	48~51 %
ATM Pressure:	101.0~101.2 kPa


The testing was performed by Paul on 2021-09-27.

EUT operation mode: Transmitting

(Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK mode, the worst case is 8DPSK Mode)


**30MHz-1GHz:** (worst case is 8DPSK Mode, Middle channel)

**Horizontal:**

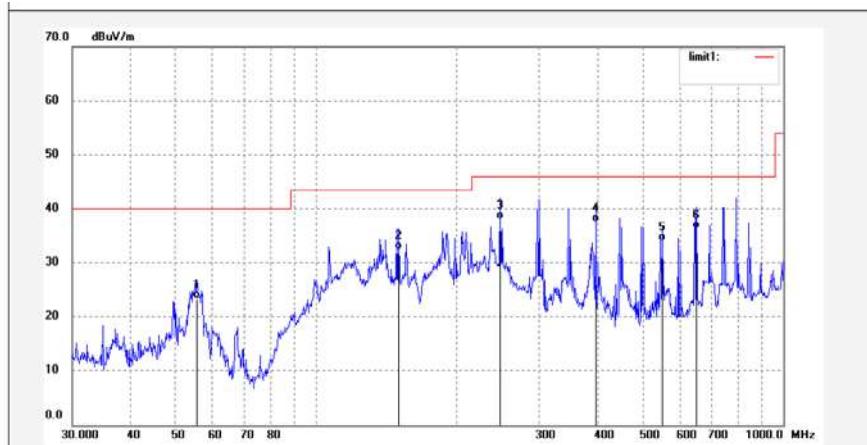

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4147	40.82	-17.51	23.31	40.00	-16.69	QP			
2	150.0108	52.45	-20.05	32.40	43.50	-11.10	QP			
3	247.6819	54.48	-16.44	38.04	46.00	-7.98	QP			
4	396.2415	50.18	-12.57	37.61	46.00	-8.39	QP			
5	550.9480	43.09	-9.02	34.07	46.00	-11.93	QP			
6	651.9417	44.32	-8.06	36.26	46.00	-9.74	QP			

**Vertical**

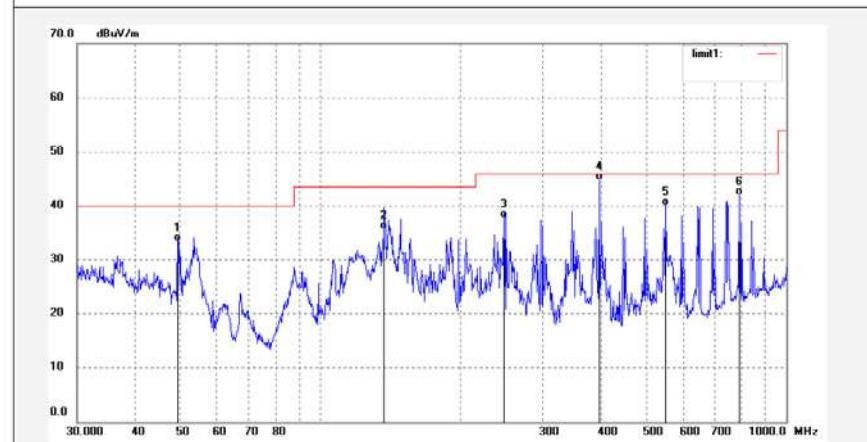

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	49.3594	50.57	-17.28	33.29	40.00	-6.71	QP			
2	136.9381	55.05	-19.44	35.61	43.50	-7.89	QP			
3	247.6819	54.07	-16.44	37.63	48.00	-8.37	QP			
4	396.2415	57.32	-12.57	44.75	46.00	-1.25	QP			
5	550.9480	49.00	-9.02	39.98	46.00	-6.02	QP			
6	793.3960	47.37	-5.54	41.83	46.00	-4.17	QP			

**Above 1GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310	53.52	PK	209	1.6	H	-6.84	46.68	74	-27.32
2310	52.58	PK	138	1.6	V	-6.84	45.74	74	-28.26
2390	53.99	PK	46	1.3	H	-6.44	47.55	74	-26.45
2390	52.76	PK	137	1.9	V	-6.44	46.32	74	-27.68
4804	47.59	PK	121	1.6	H	2.81	50.4	74	-23.6
4804	35.31	Ave	121	1.6	H	2.81	38.12	54	-15.88
4804	46.03	PK	270	2.0	V	2.81	48.84	74	-25.16
4804	33.57	Ave	84	1.7	V	2.81	36.38	54	-17.62
Middle Channel (2441 MHz)									
4882	47.67	PK	222	2.1	H	3.04	50.71	74	-23.29
4882	34.24	Ave	222	2.1	H	3.04	37.28	54	-16.72
4882	45.39	PK	306	1.7	V	3.04	48.43	74	-25.57
4882	33.27	Ave	306	1.7	V	3.04	36.31	54	-17.69
High Channel (2480 MHz)									
2483.5	54.6	PK	329	1.2	H	-5.96	48.64	74	-25.36
2483.5	53.42	PK	258	1.1	V	-5.96	47.46	74	-26.54
2500	54.55	PK	260	1.9	H	-5.88	48.67	74	-25.33
2500	53.17	PK	349	1.9	V	-5.88	47.29	74	-26.71
4960	47.8	PK	223	1.6	H	3.29	51.09	74	-22.91
4960	34.15	Ave	223	1.6	H	3.29	37.44	54	-16.56
4960	47.14	PK	223	1.1	V	3.29	50.43	74	-23.57
4960	32.85	Ave	223	1.1	V	3.29	36.14	54	-17.86

**Note:**



Corrected Factor = Antenna factor (RX) + Cable Loss - Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak value were recorded.

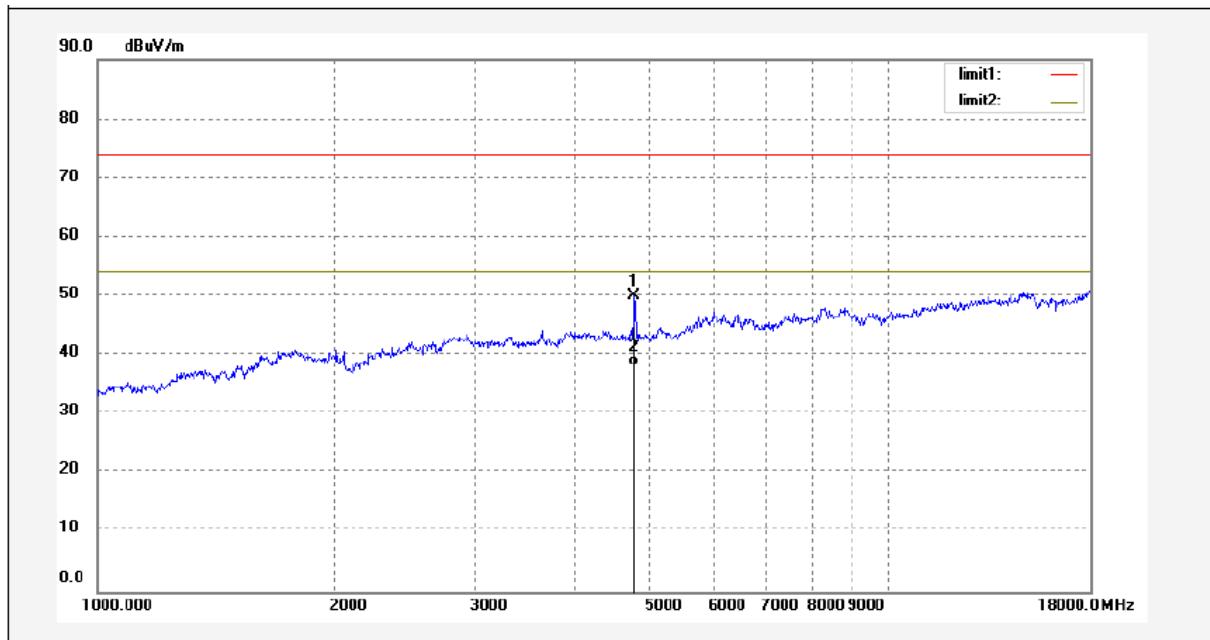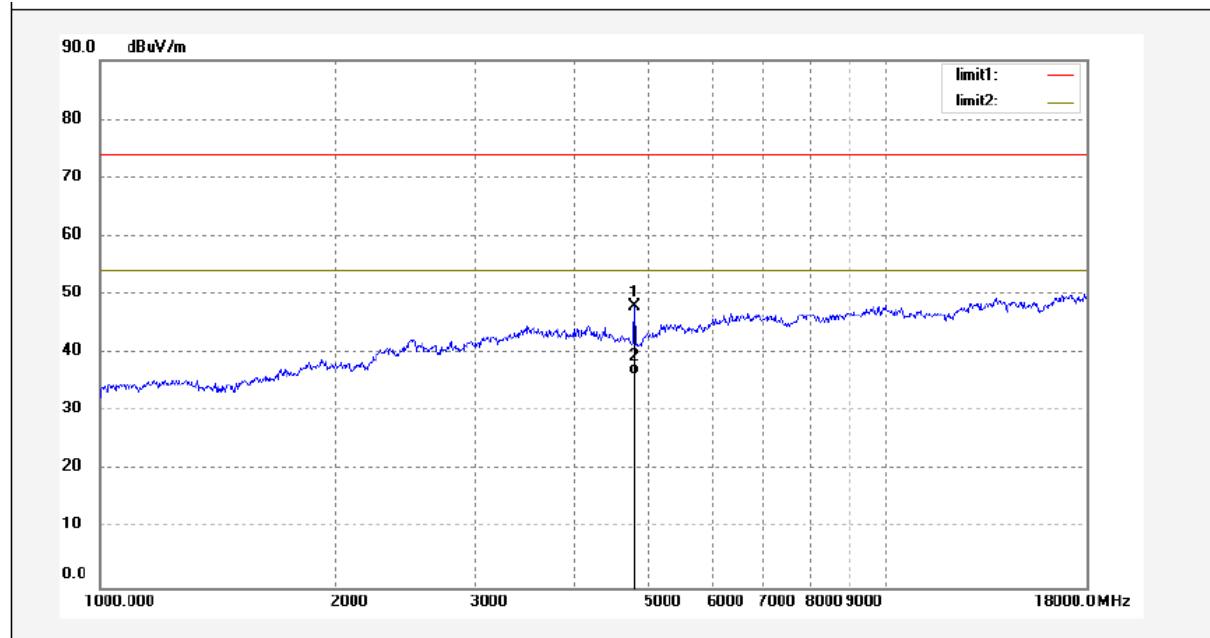**1-18GHz****Pre-scan for Peak****Low Channel****Horizontal:****Vertical:**

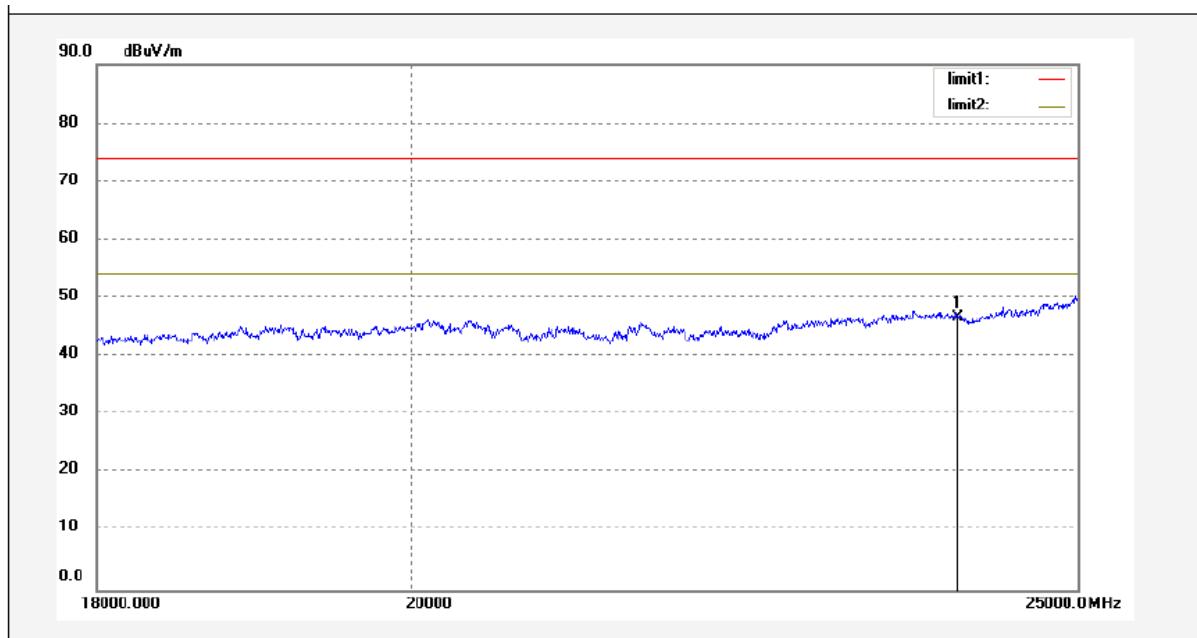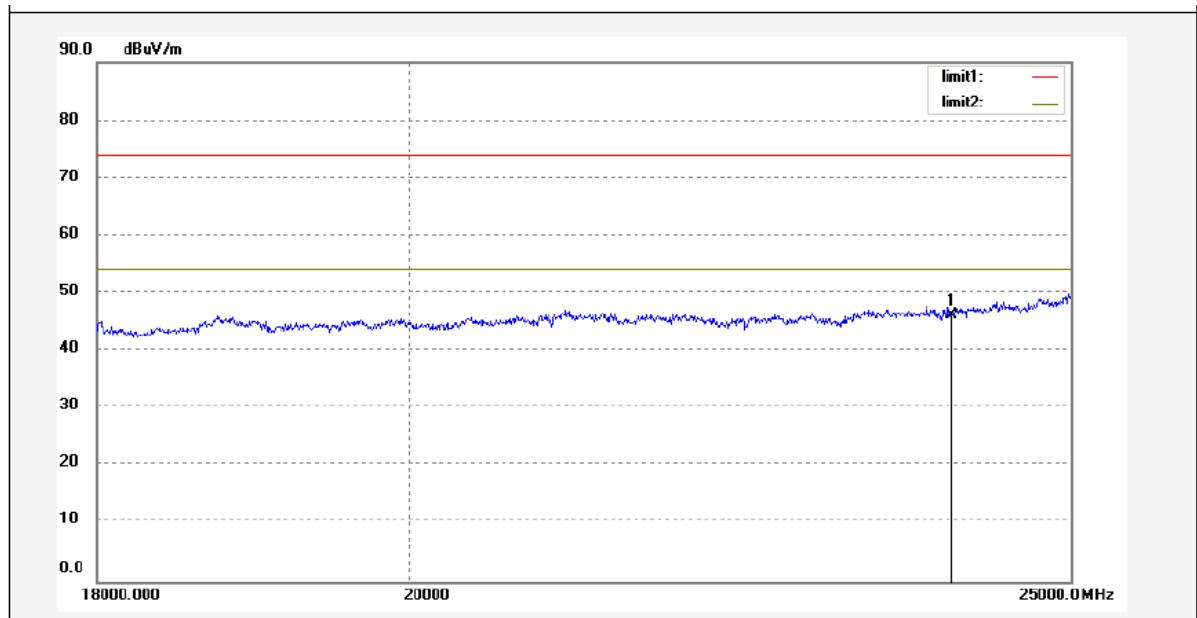**18-25GHz****Pre-scan for Peak****Low Channel****Horizontal:****Vertical:**

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	27 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

*The testing was performed by Black.Ding on 2021-09-09.*

*EUT operation mode: Transmitting*

*Test Result: Compliant. Please refer to the Appendix.*

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



## Test Data

### Environmental Conditions

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Black.Ding on 2021-09-09.*

*EUT operation mode: Transmitting*

*Test Result: Compliant. Please refer to the Appendix.*

## **FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**

### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Black.Ding on 2021-09-09.*

*EUT operation mode: Transmitting*

*Test Result: Compliant. Please refer to the Appendix.*

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

**Test Data****Environmental Conditions**

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Black.Ding on 2021-09-09.*

*EUT operation mode: Transmitting*

*Test Result: Compliant. Please refer to the Appendix.*

## **FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**

### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### **Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Black.Ding on 2021-09-09.*

*EUT operation mode: Transmitting*

*Test Result: Compliant. Please refer to the Appendix.*

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Black.Ding on 2021-09-09.*

*EUT operation mode: Transmitting*


*Test Result: Compliant. Please refer to the Appendix.*

## APPENDIX

### Appendix A: 20dB Emission Bandwidth Test Result


Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.897	---	PASS
		2441	0.894	---	PASS
		2480	0.894	---	PASS
2DH1	Ant1	2402	1.185	---	PASS
		2441	1.185	---	PASS
		2480	1.200	---	PASS
3DH1	Ant1	2402	1.218	---	PASS
		2441	1.221	---	PASS
		2480	1.221	---	PASS

### Test Graphs

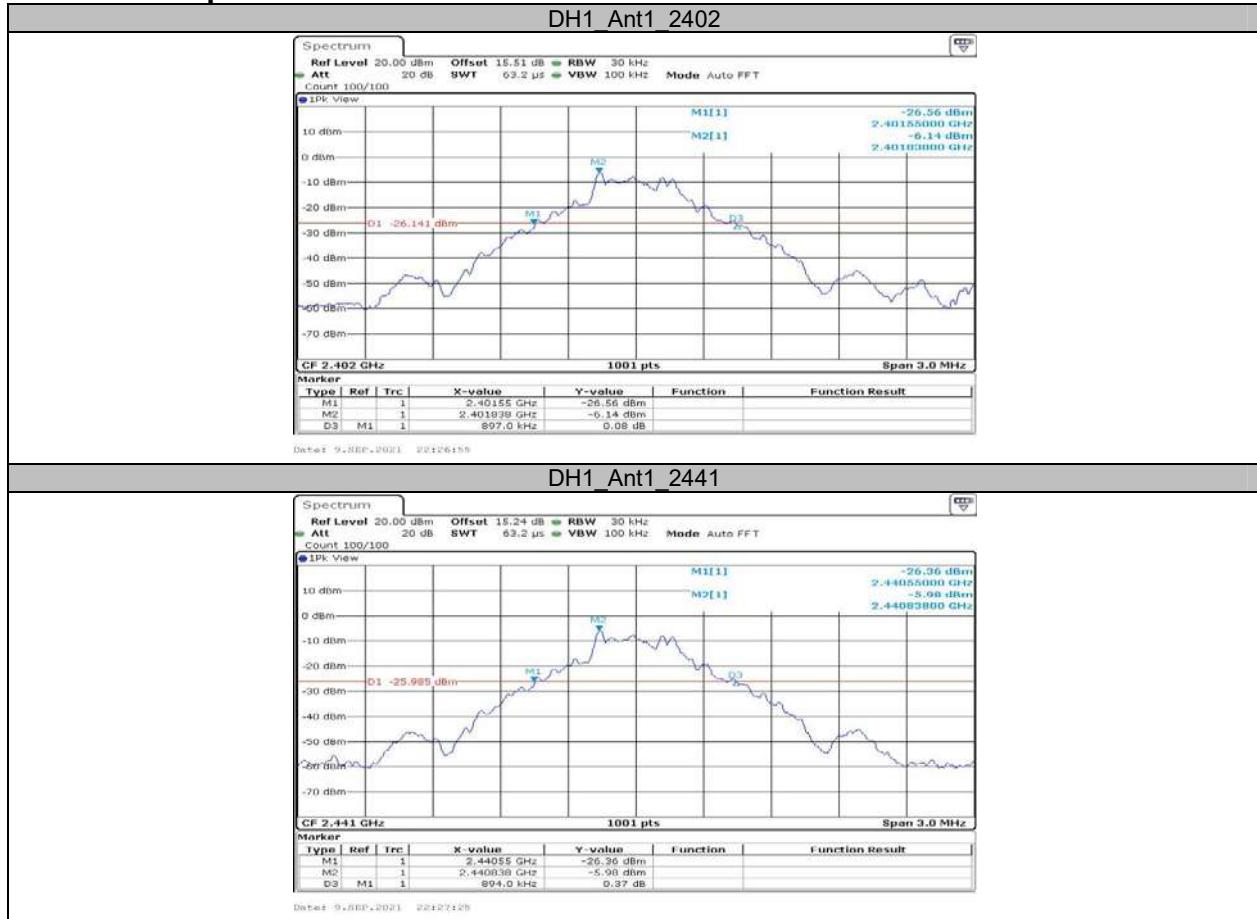






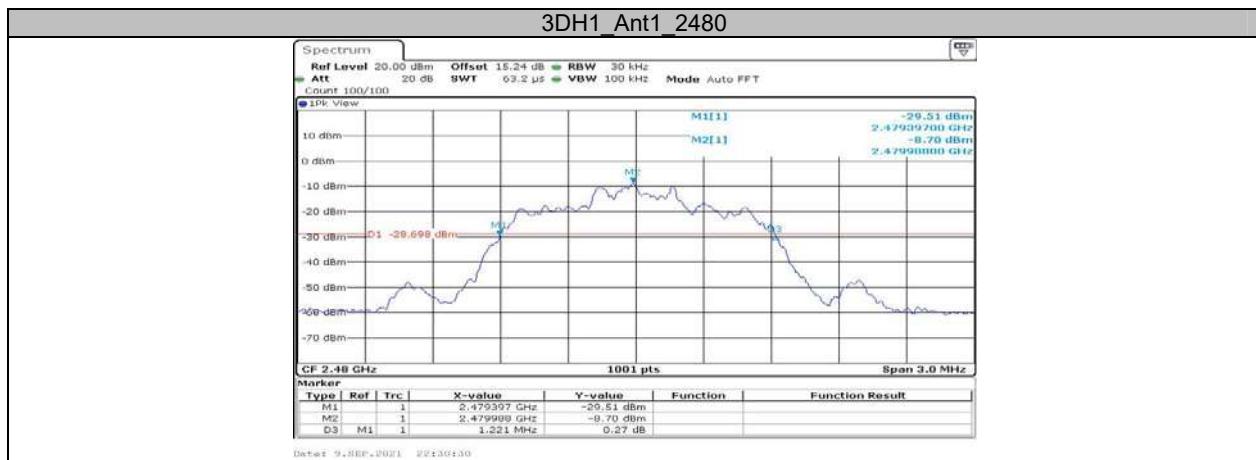


## Appendix B: Occupied Channel Bandwidth Test Result


Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.854	---	PASS
		2441	0.899	---	PASS
		2480	0.851	---	PASS
2DH1	Ant1	2402	1.130	---	PASS
		2441	1.124	---	PASS
		2480	1.127	---	PASS
3DH1	Ant1	2402	1.109	---	PASS
		2441	1.115	---	PASS
		2480	1.121	---	PASS

### Test Graphs

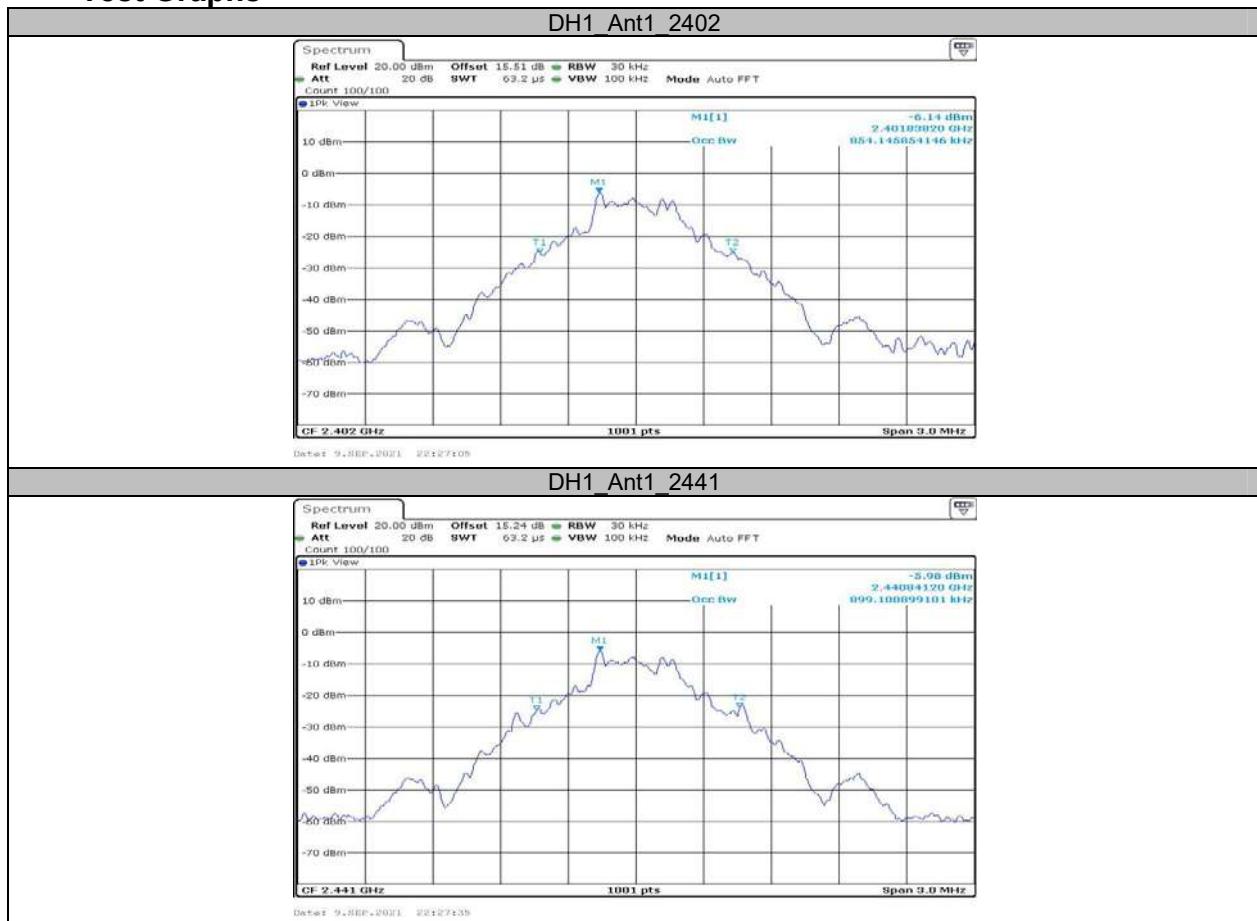

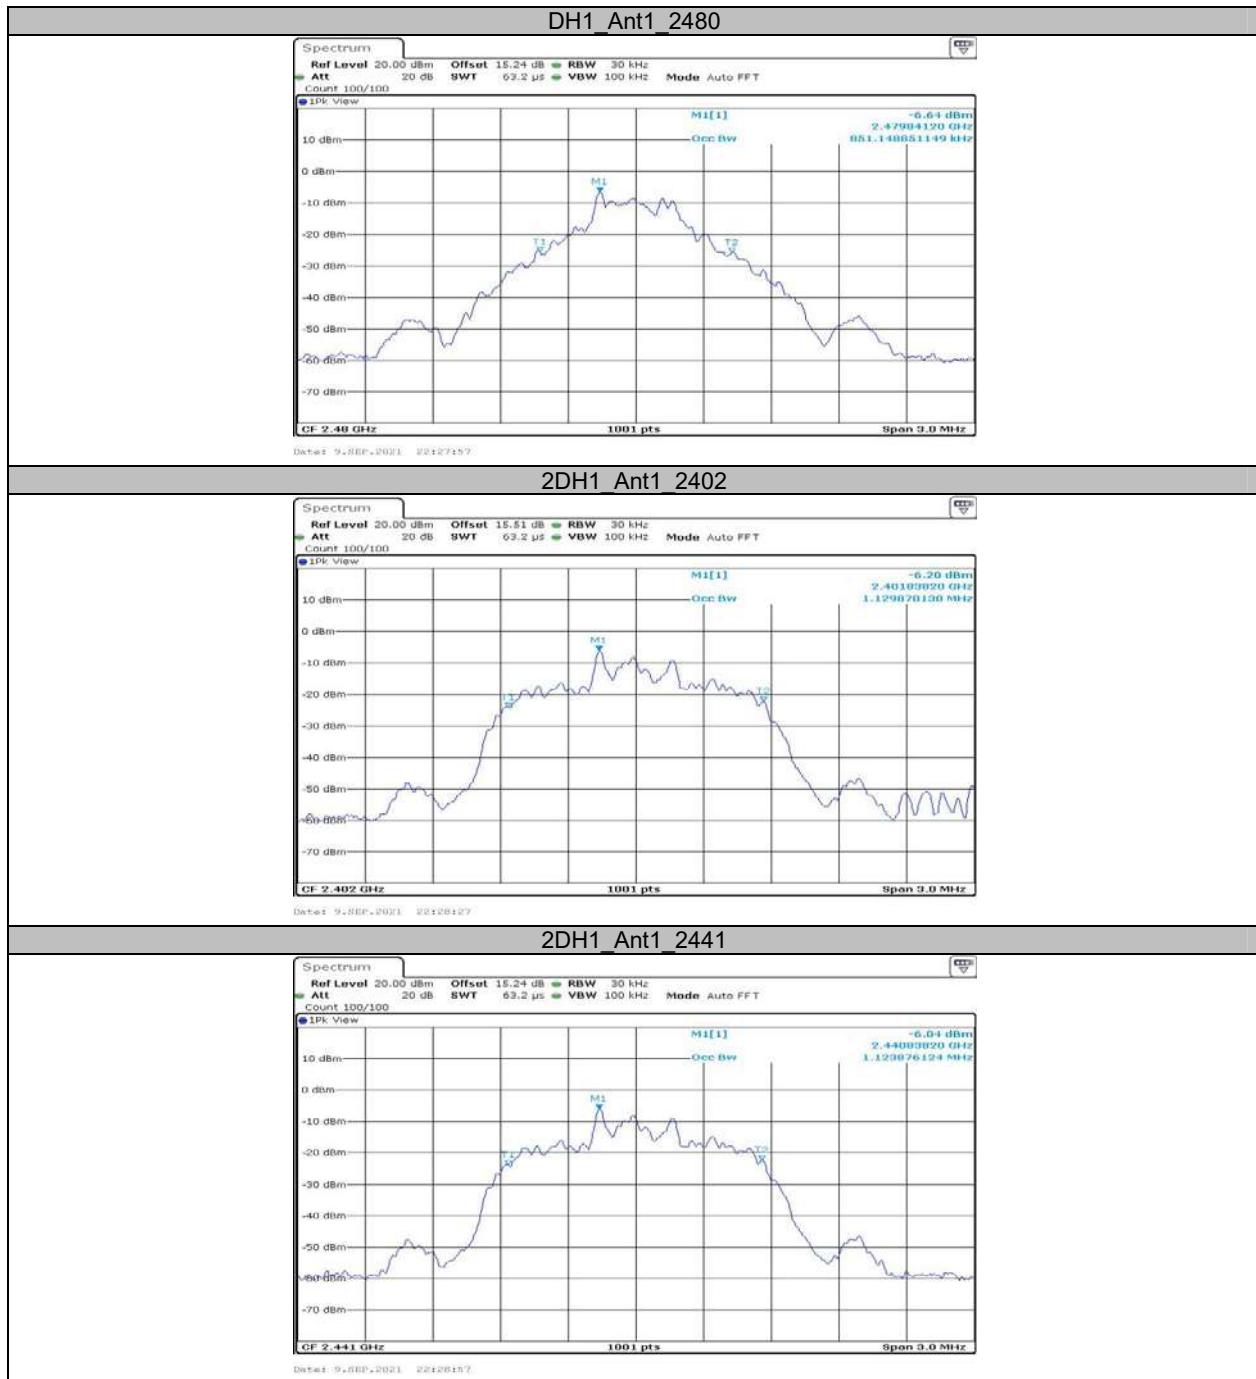




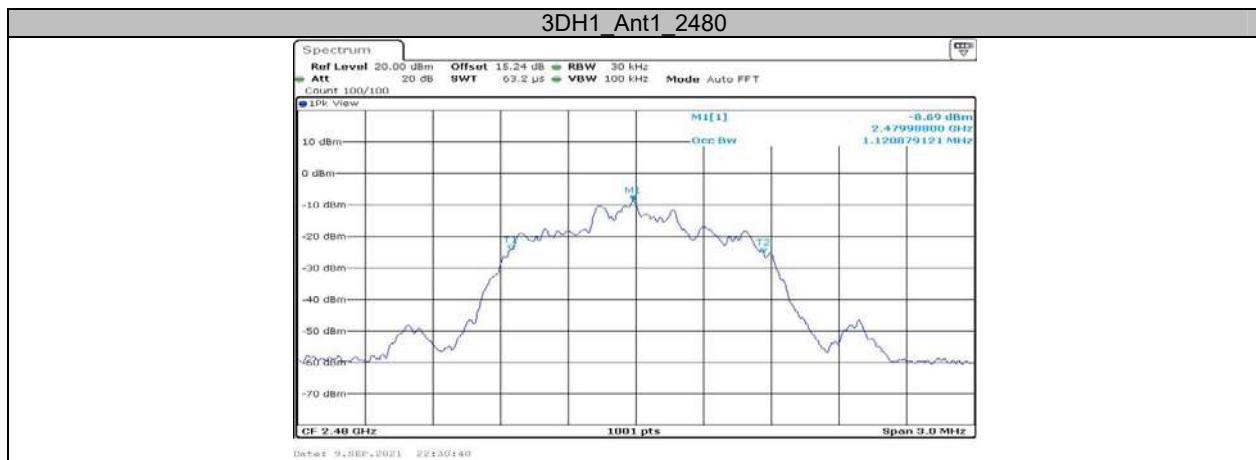


## Appendix C: Maximum conducted Peak output power Test Result


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	-4.70	≤20.97	PASS
		2441	-4.54	≤20.97	PASS
		2480	-5.17	≤20.97	PASS
2DH1	Ant1	2402	-4.98	≤20.97	PASS
		2441	-4.84	≤20.97	PASS
		2480	-5.47	≤20.97	PASS
3DH1	Ant1	2402	-4.85	≤20.97	PASS
		2441	-4.71	≤20.97	PASS
		2480	-5.36	≤20.97	PASS

### Test Graphs

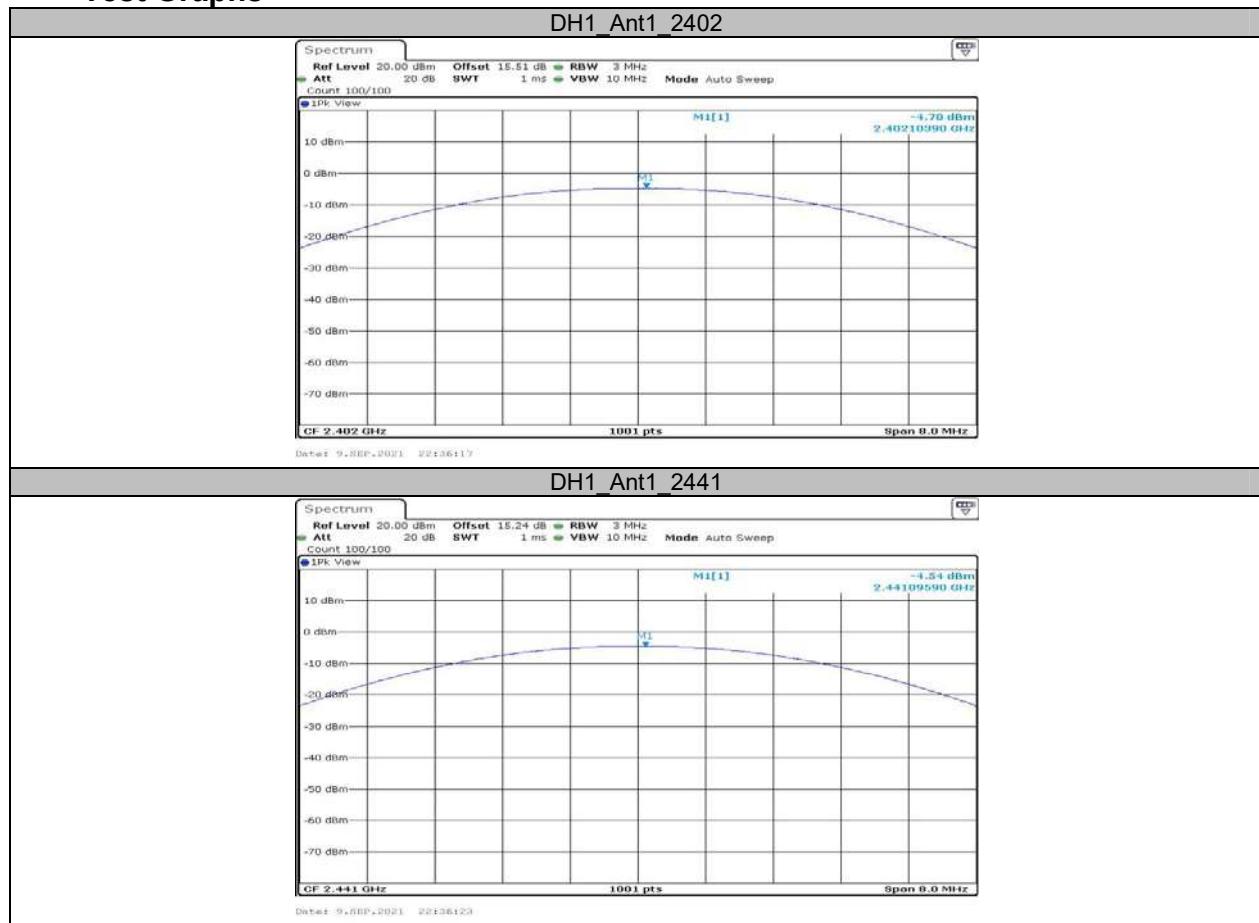

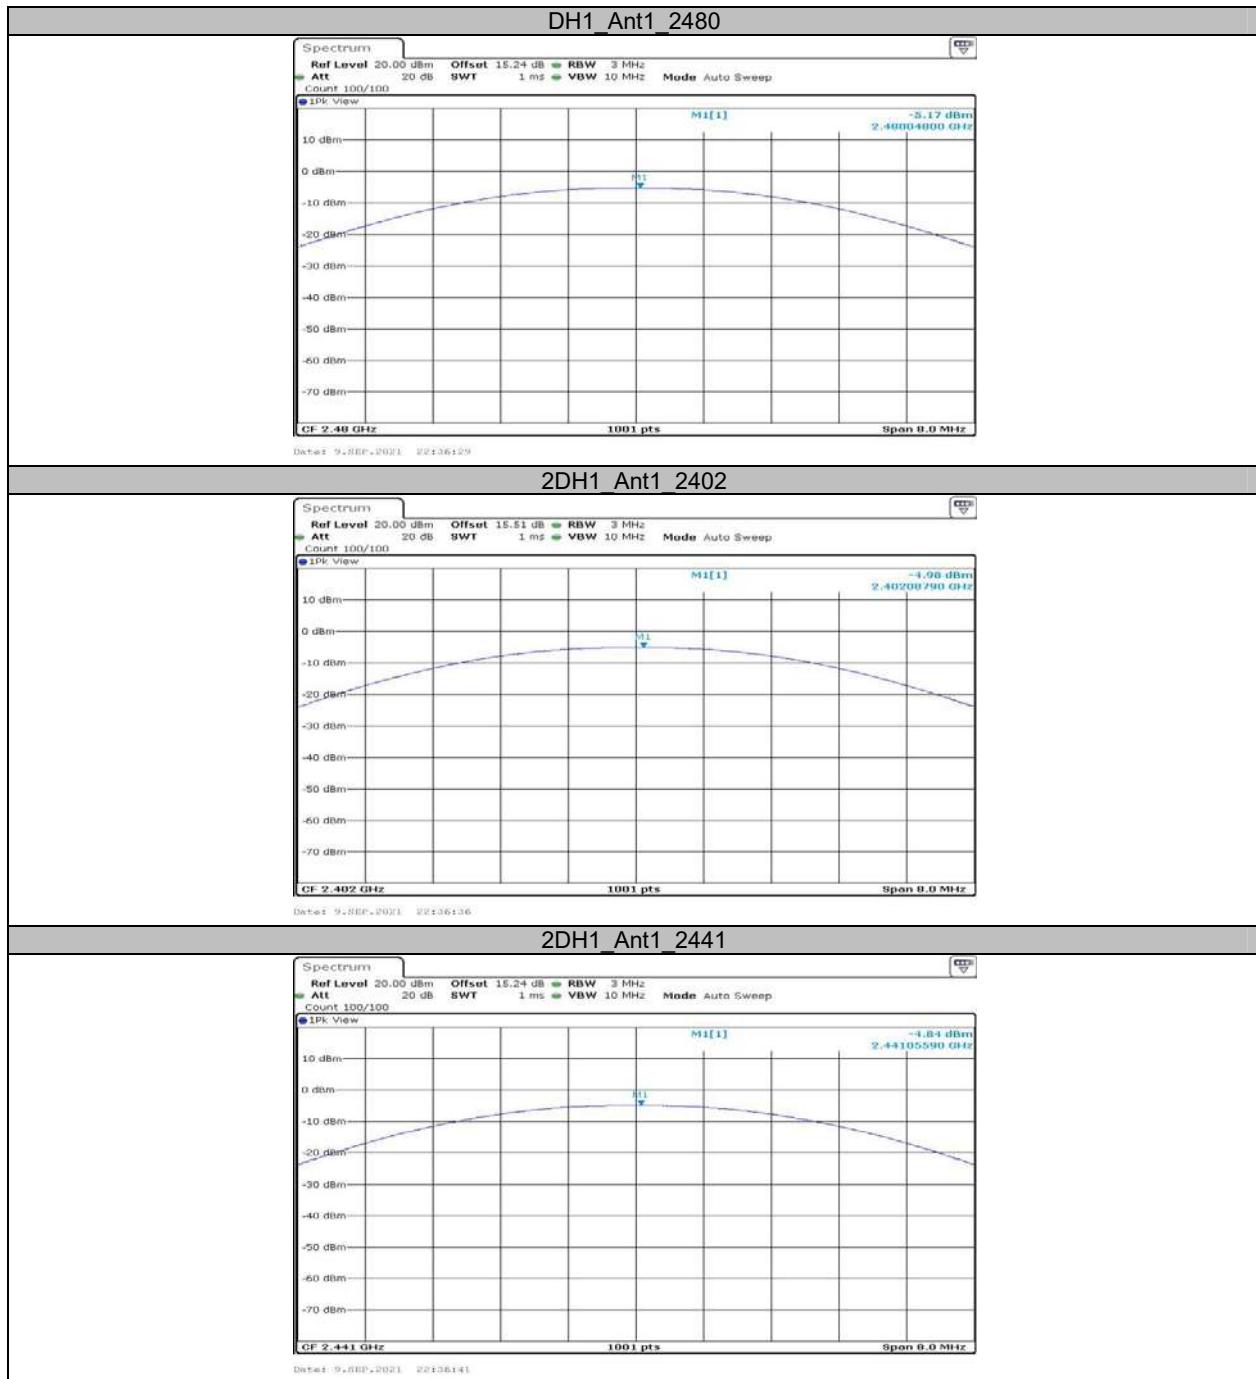




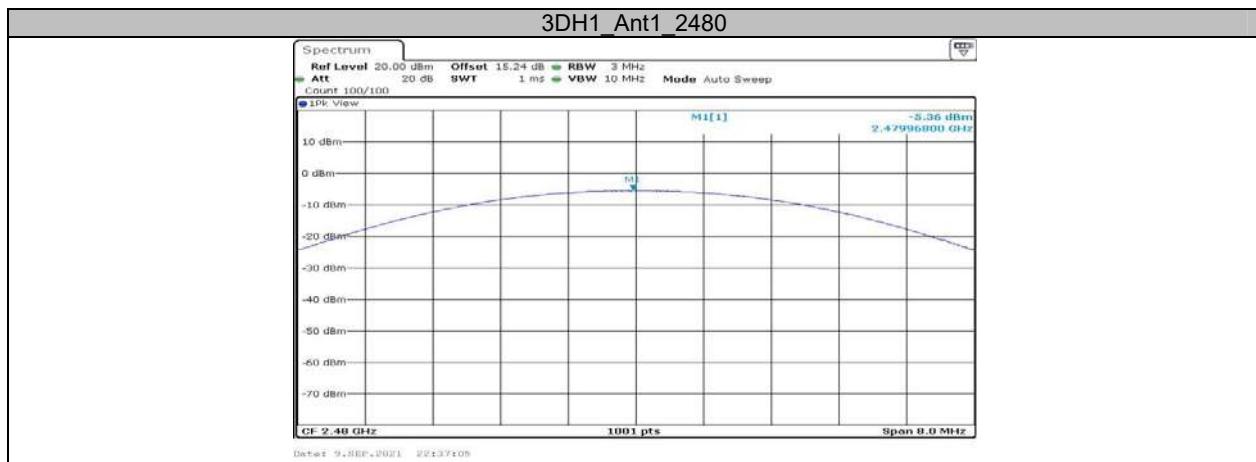


## Appendix D: Carrier frequency separation Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1	0.598	PASS
2DH1	Ant1	Hop	1	0.800	PASS
3DH1	Ant1	Hop	1.003	0.814	PASS

### Test Graphs

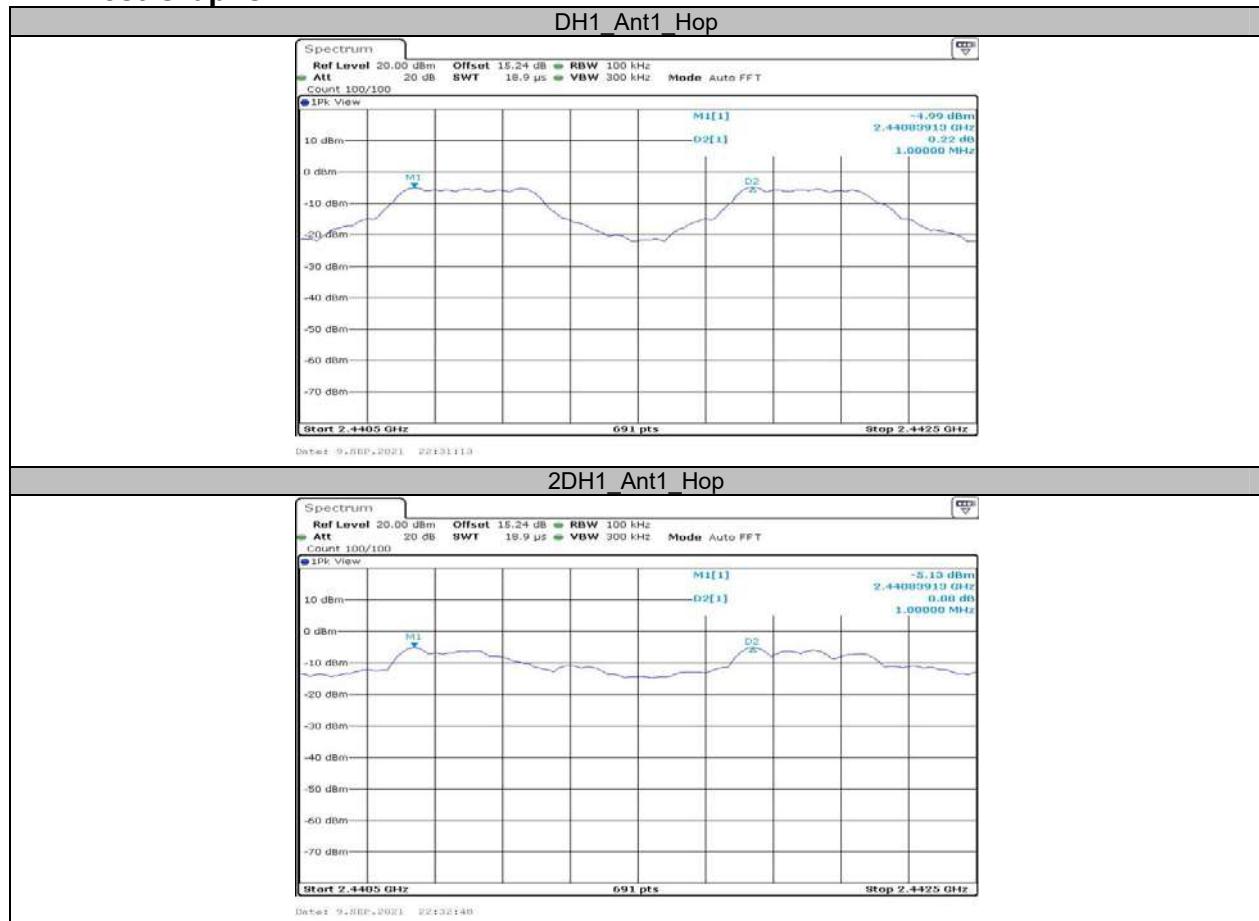

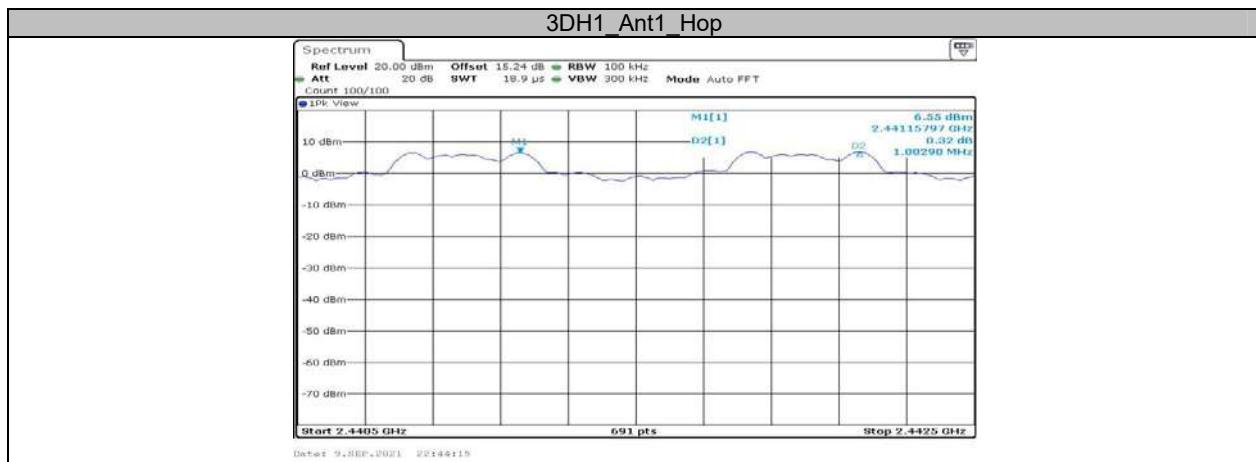

## Appendix E: Time of occupancy Test Result


Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.38	330	0.124	$\leq 0.4$	PASS
DH3	Ant1	Hop	1.62	120	0.195	$\leq 0.4$	PASS
DH5	Ant1	Hop	2.86	80	0.229	$\leq 0.4$	PASS
2DH1	Ant1	Hop	0.38	310	0.118	$\leq 0.4$	PASS
2DH3	Ant1	Hop	1.63	130	0.211	$\leq 0.4$	PASS
2DH5	Ant1	Hop	2.87	90	0.258	$\leq 0.4$	PASS
3DH1	Ant1	Hop	0.38	330	0.126	$\leq 0.4$	PASS
3DH3	Ant1	Hop	1.63	140	0.228	$\leq 0.4$	PASS
3DH5	Ant1	Hop	2.87	90	0.258	$\leq 0.4$	PASS


Note 1: A period time=0.4\*79=31.6(S), Result=BurstWidth\*Totalhops


Note 2: Totalhops=Hopping Number in 3.16s\*10


Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)


## Test Graphs

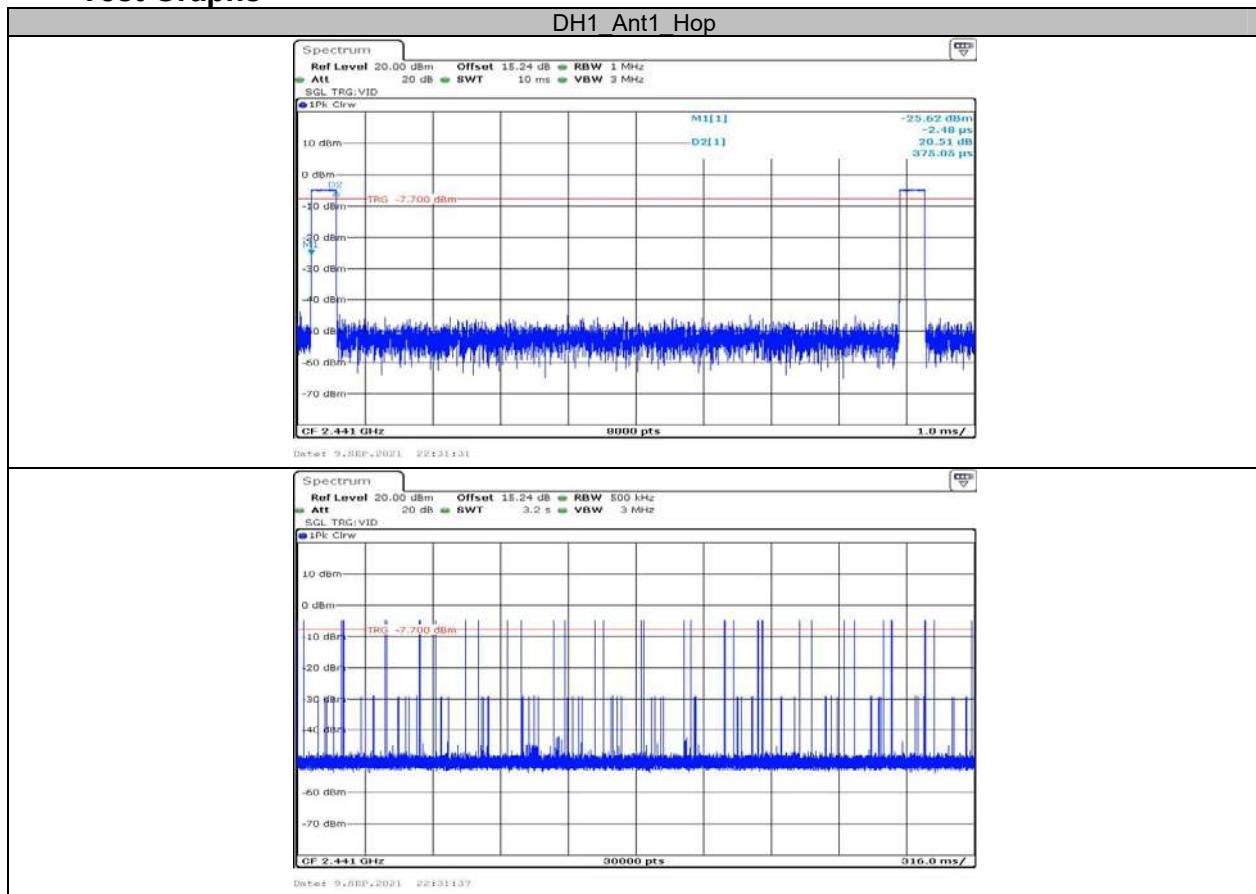


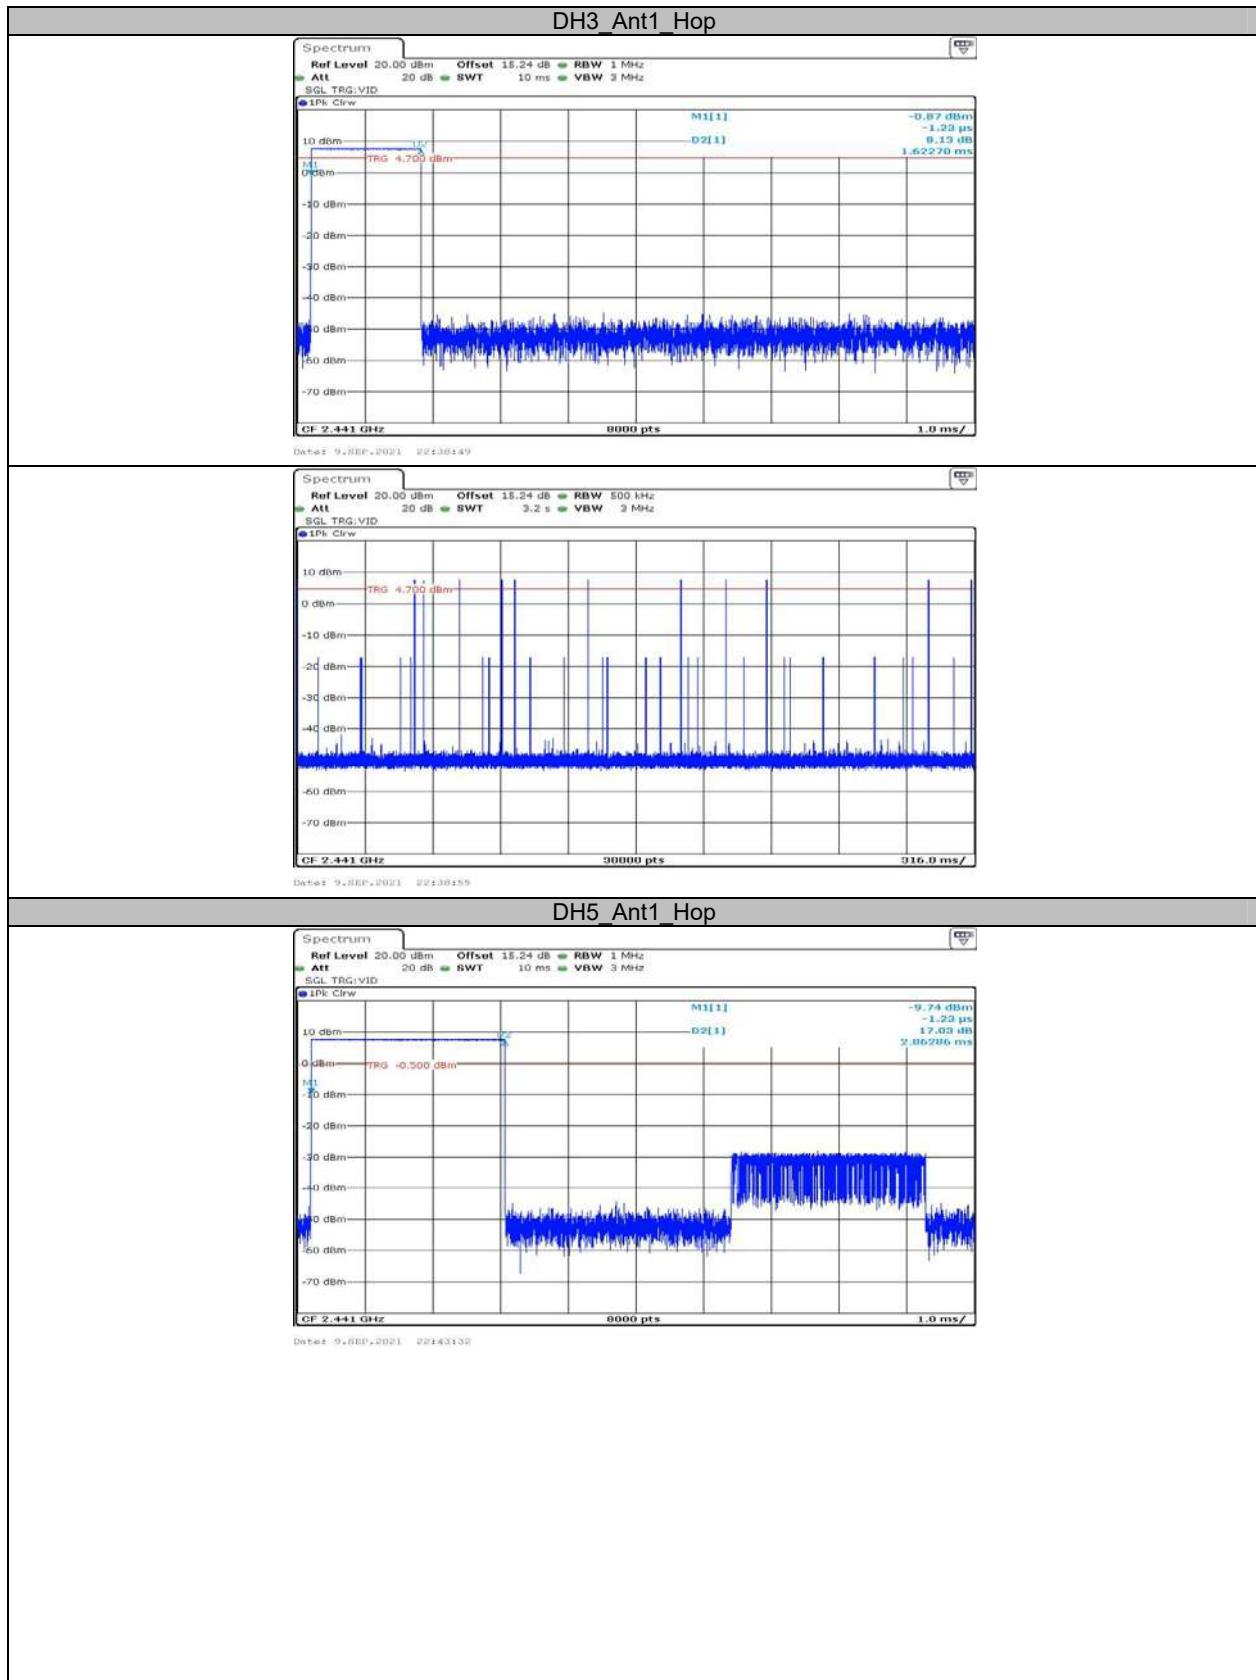


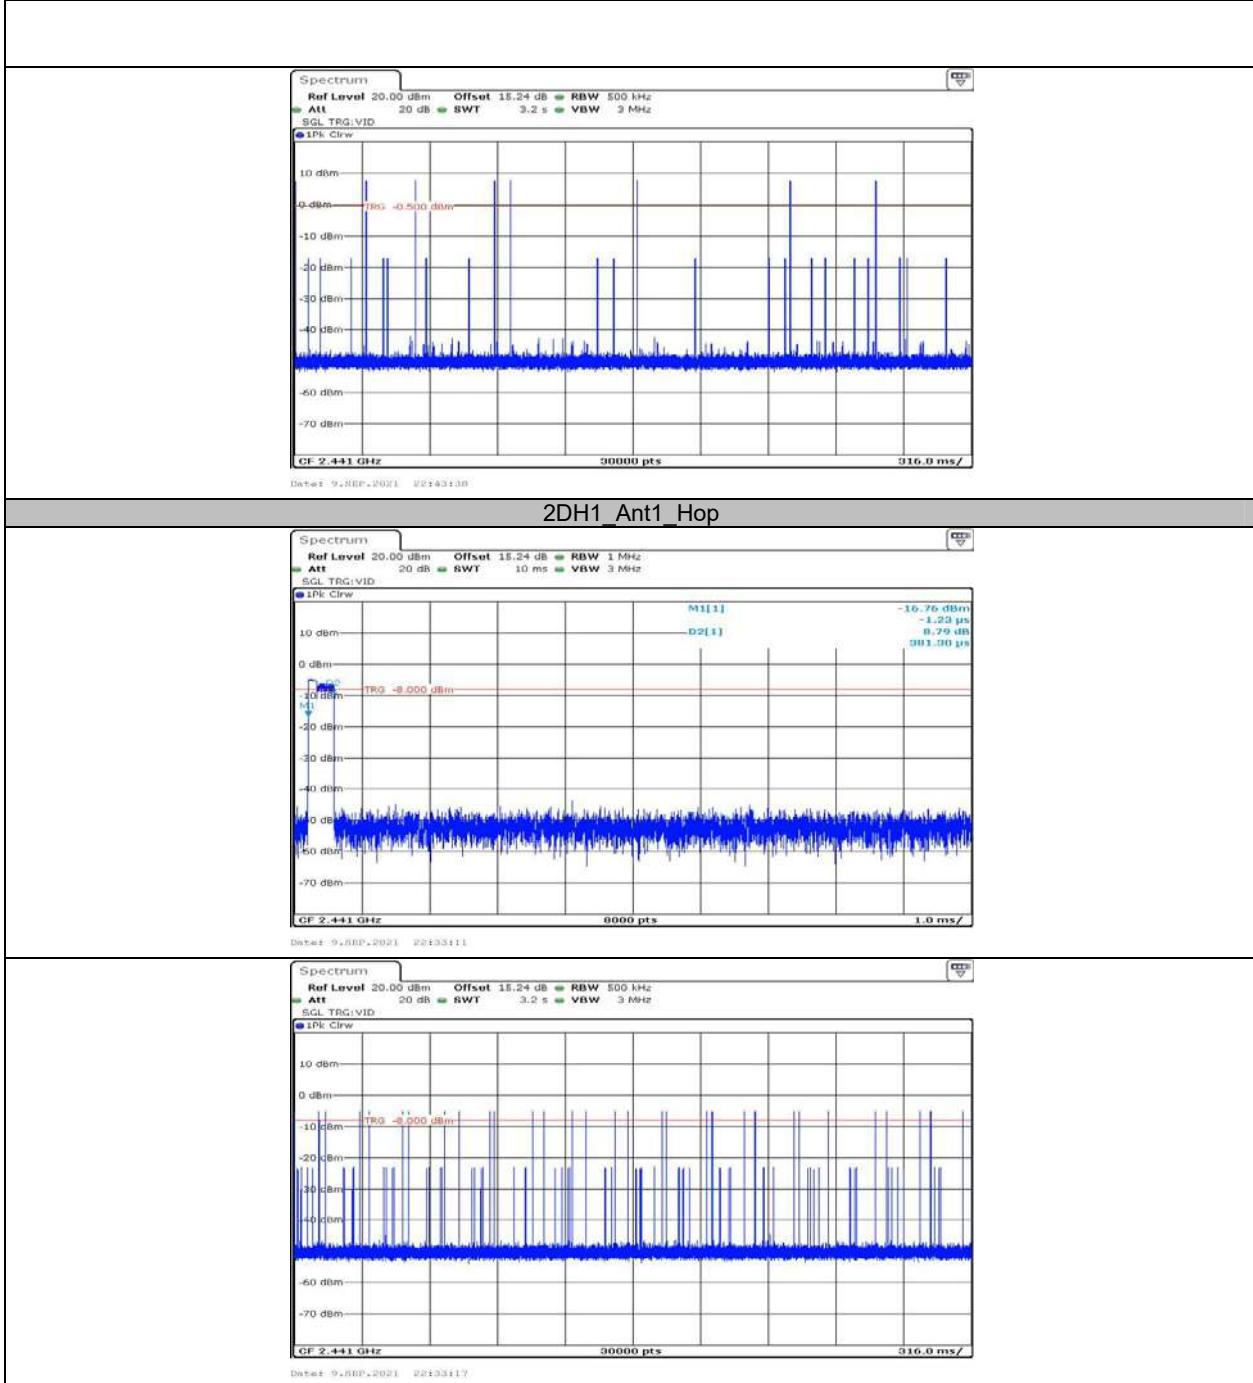

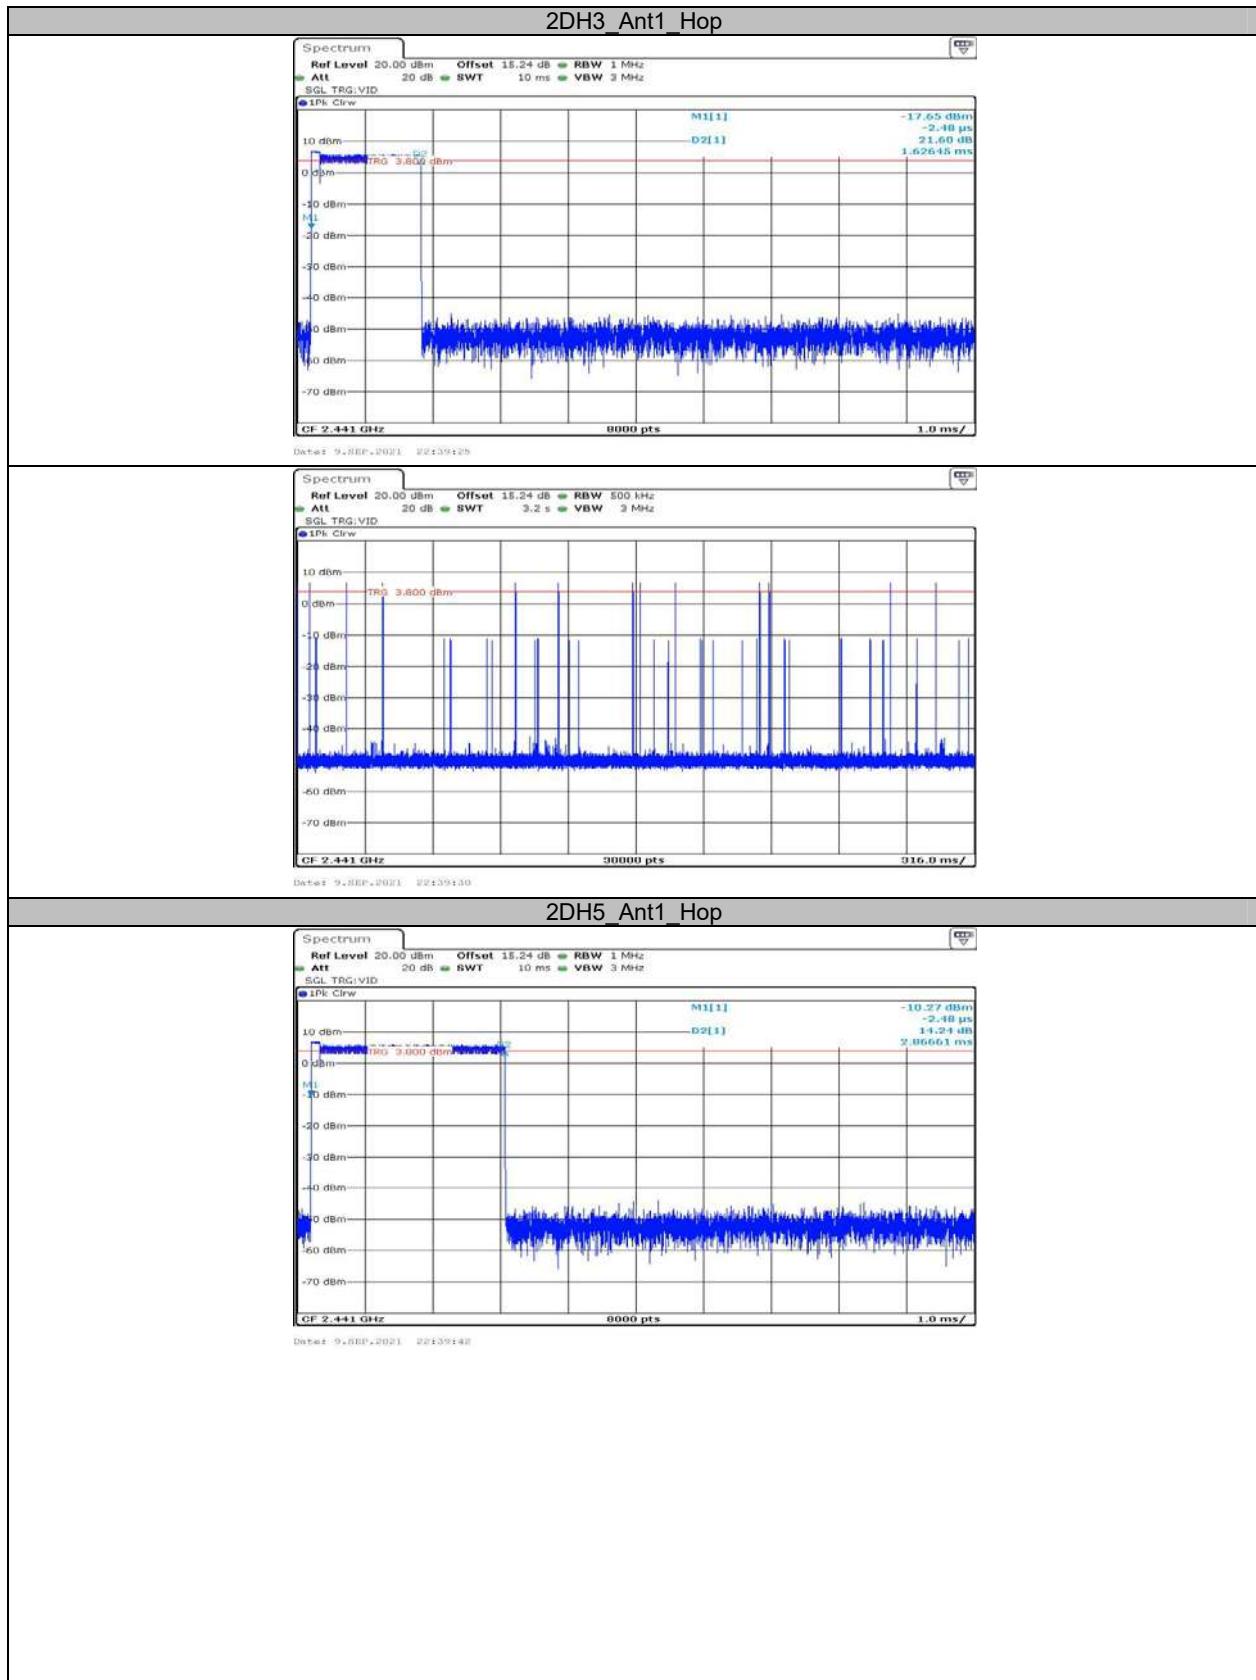

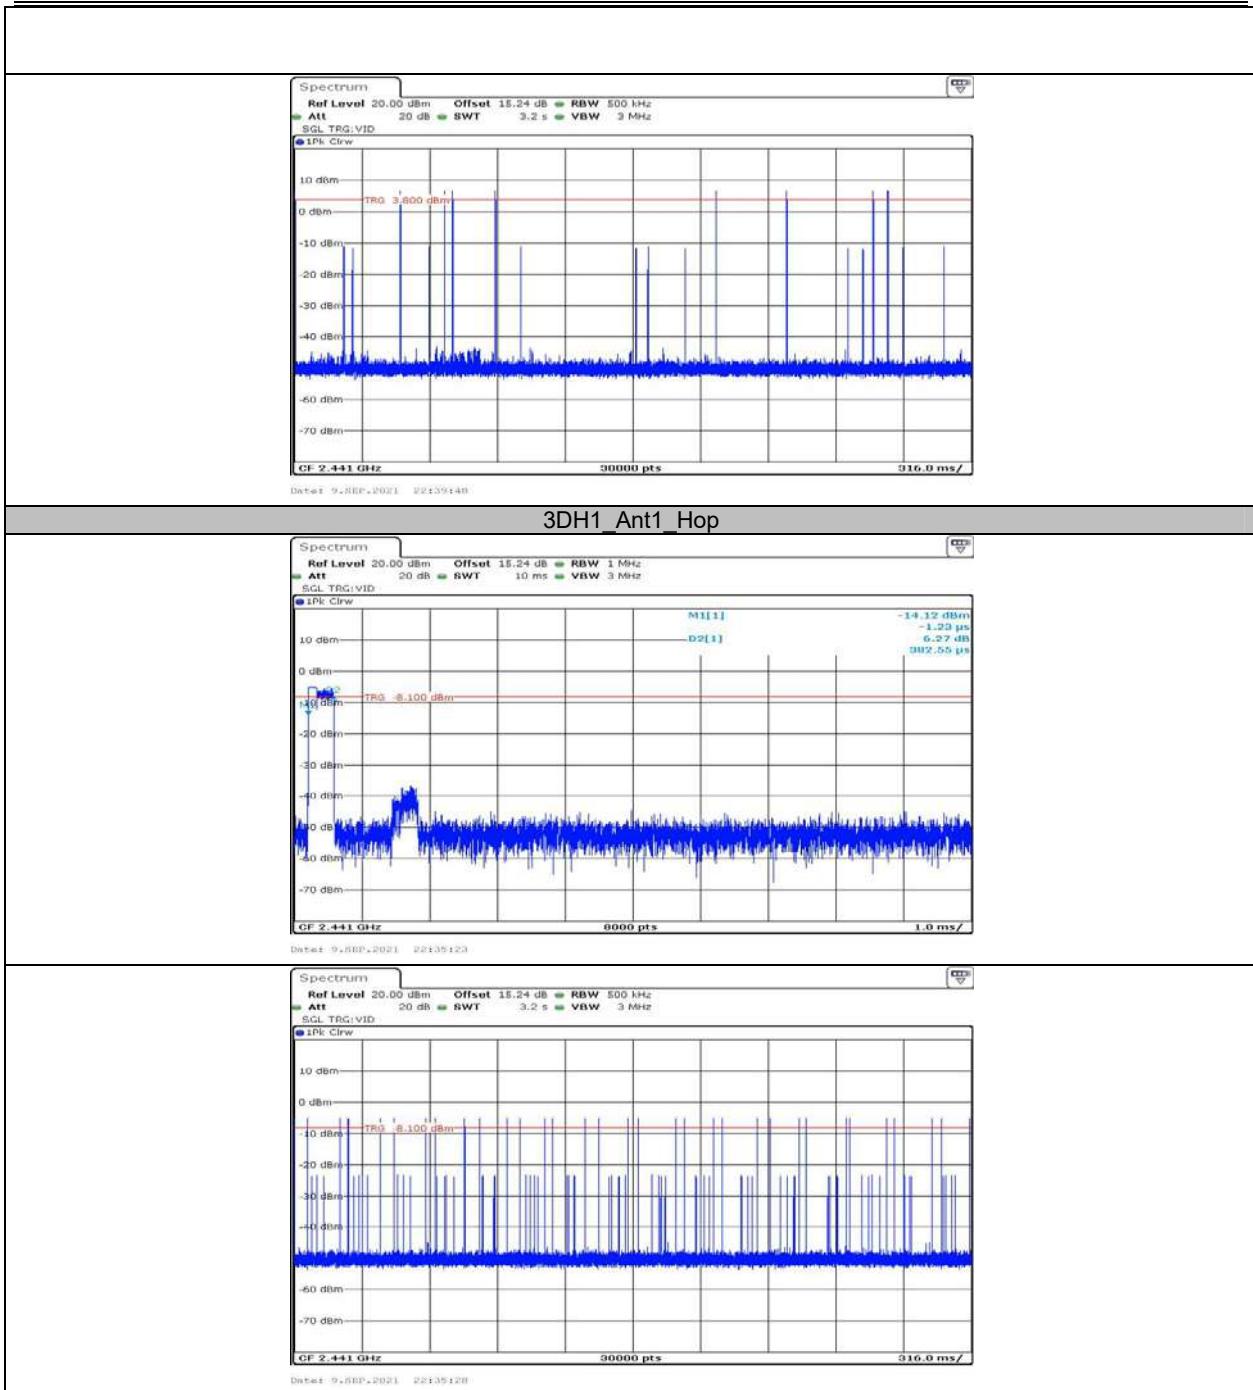

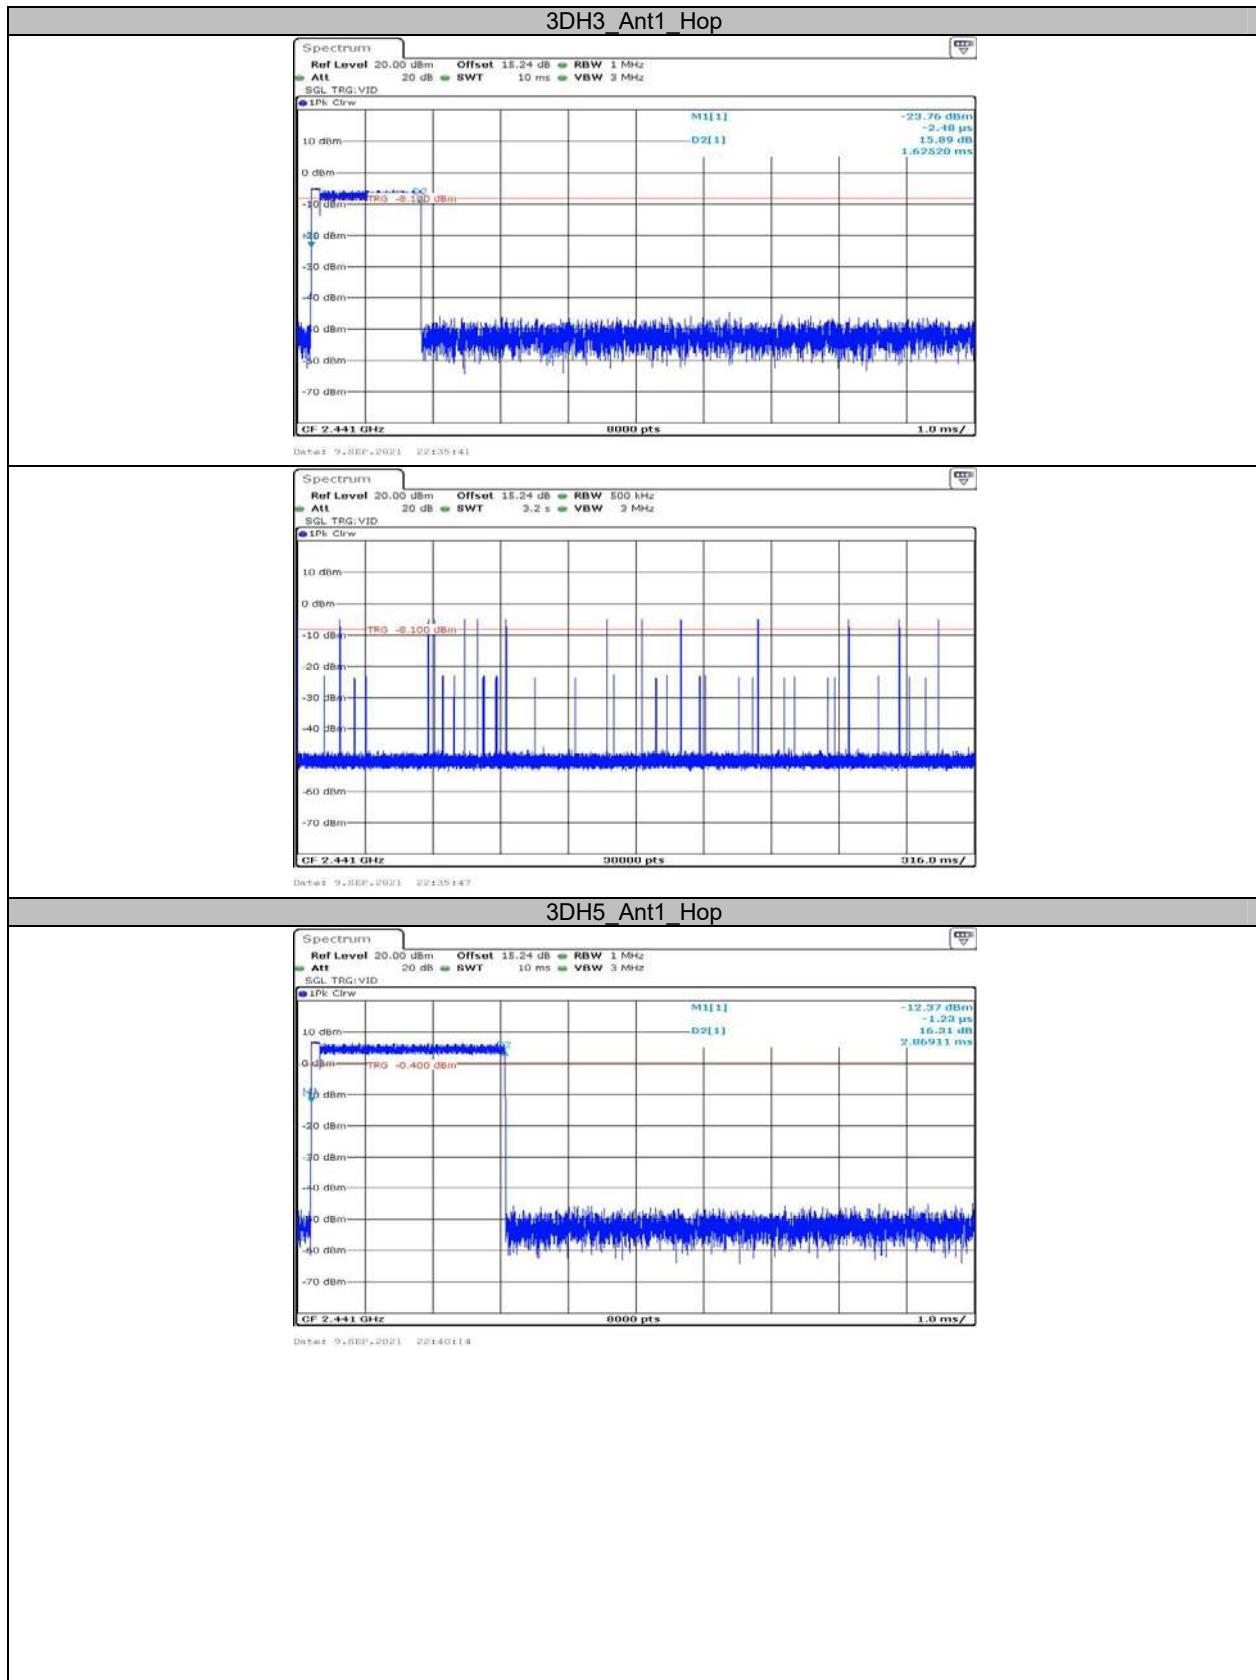

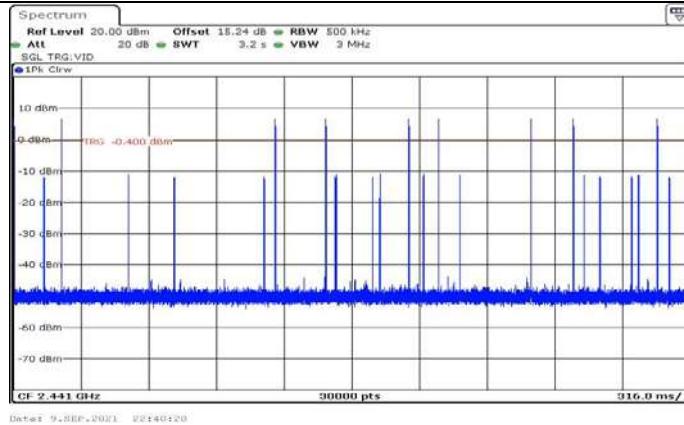

## Appendix F: Number of hopping channels

### Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS

### Test Graphs



## Appendix G: Band edge measurements

### Test Graphs









\*\*\*\*\* END OF REPORT \*\*\*\*\*