

FCC PART 15.247

TEST REPORT

For

KRIPTO MOBILE CORPORATION

7236 NW 31ST ST., MIAMI Florida United States

FCC ID: 2APX7K55H

Report Type: Original Report	Product Type: Mobile phone
Report Number: RSZ190917001-00C	
Report Date: 2019-10-14	
Reviewed By: Engineer	Jacob Kong 
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	8
EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	15
APPLICABLE STANDARD	15
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP.....	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	17
CORRECTED FACTOR & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	23
APPLICABLE STANDARD	23
EUT SETUP.....	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	24
TEST RESULTS SUMMARY	24
TEST DATA	25
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(e) - POWER SPECTRAL DENSITY	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST DATA	53

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Mobile phone
Tested Model	K55h
Voltage Range	DC 3.8V from battery or DC 5.0V from adapter
Frequency Range	Bluetooth LE: 2402~2480MHz Wi-Fi: 2412~2472MHz
Conducted Peak Power	Bluetooth LE: 4.71dBm Wi-Fi: 802.11b:12.09dBm 802.11G:15.62dBm 802.11N20: 15.43dBm 802.11N40:15.75dBm
Modulation Technique	Bluetooth LE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification	PIFA Antenna Bluetooth/Wi-Fi: 1.74dBi@2.4GHz
Date of Test	2019-09-26 to 2019-10-10
Sample serial number	19091700102 (Assigned by BACL, Shenzhen)
Received date	2019-09-17
Sample/EUT Status	Good condition
Adapter information	Model:C55h Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5V, 1.0A

Objective

This report is prepared on behalf of *KRIPTO MOBILE CORPORATION* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 22H /24E / 27 PCE and 15.407 NII submissions with FCC ID: 2APX7K55H.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 7 and 13

For 802.11n-HT40 mode, 9 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	8	2457
4	2437	9	2462
5	2442	/	/

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

BLE & Wi-Fi test in the engineer mode.


The device was tested with the worst case was performed as below:

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
802.11b	1 Mbps	14	13	14
802.11g	6 Mbps	11	11	12
802.11n-HT20	MCS0	11	11	11
802.11n-HT40	MCS0	11	11	11
BLE	/	Default	Default	Default

Pre-scan with all the data rates, the above data rate is the worst case for Wi-Fi test.


Duty cycle

802.11b mode

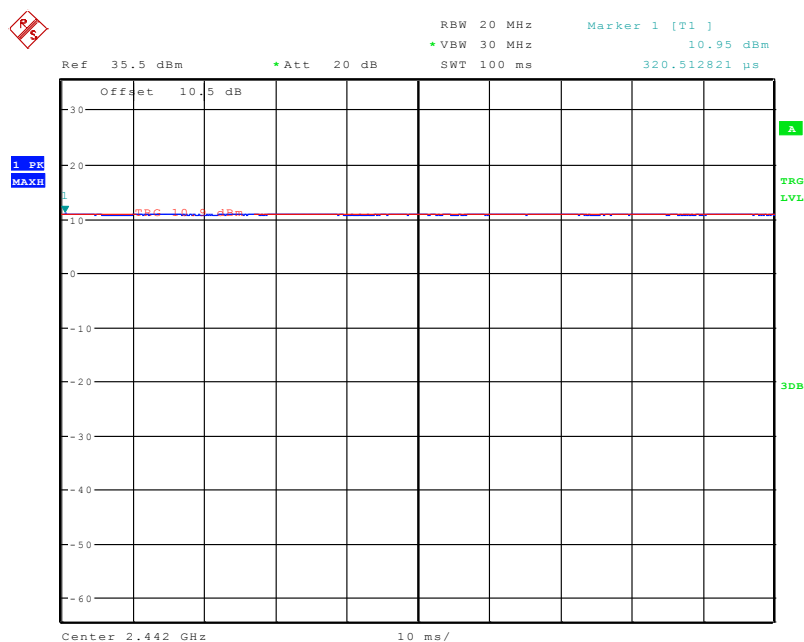


Date: 10.OCT.2019 10:08:00

802.11g mode

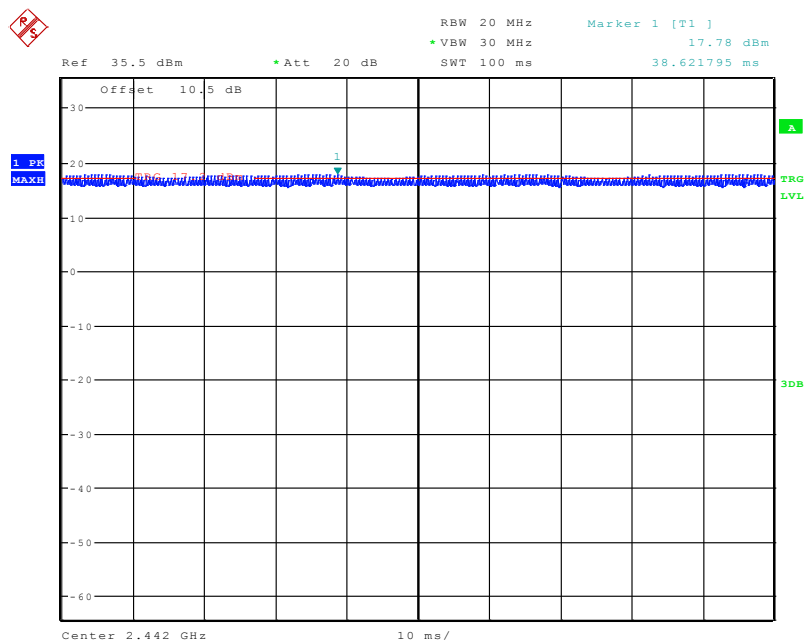


Date: 10.OCT.2019 10:05:50

802.11n-HT20 Mode

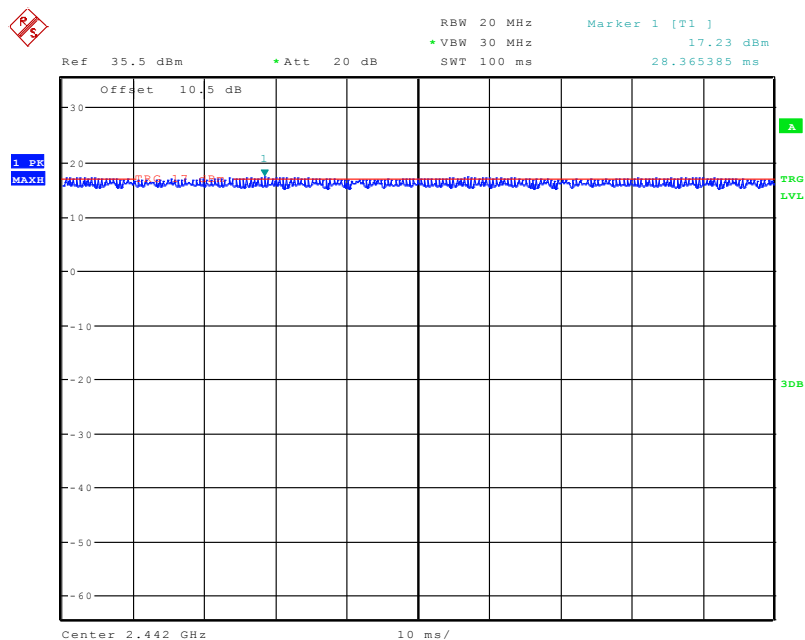


Date: 10.OCT.2019 10:05:09

802.11n-HT40 Mode

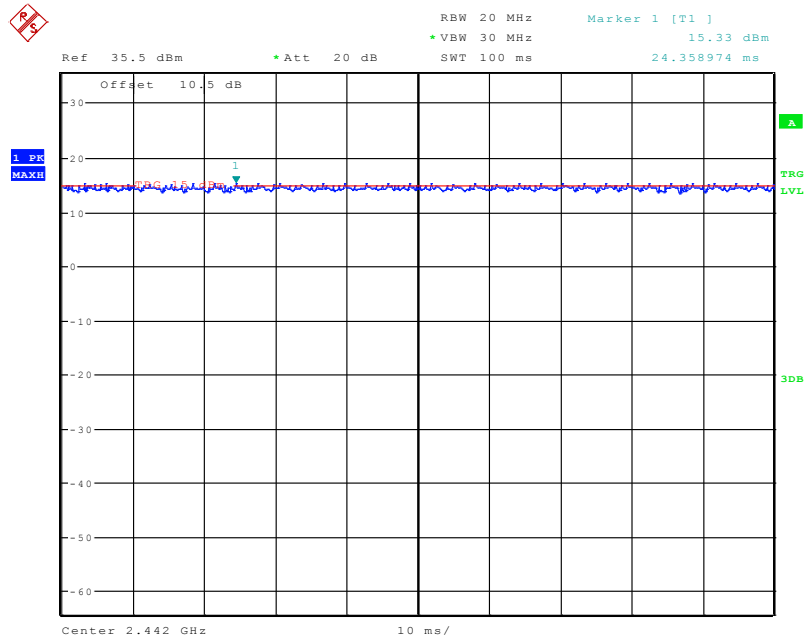

Date: 10.OCT.2019 10:03:44

BLE Mode

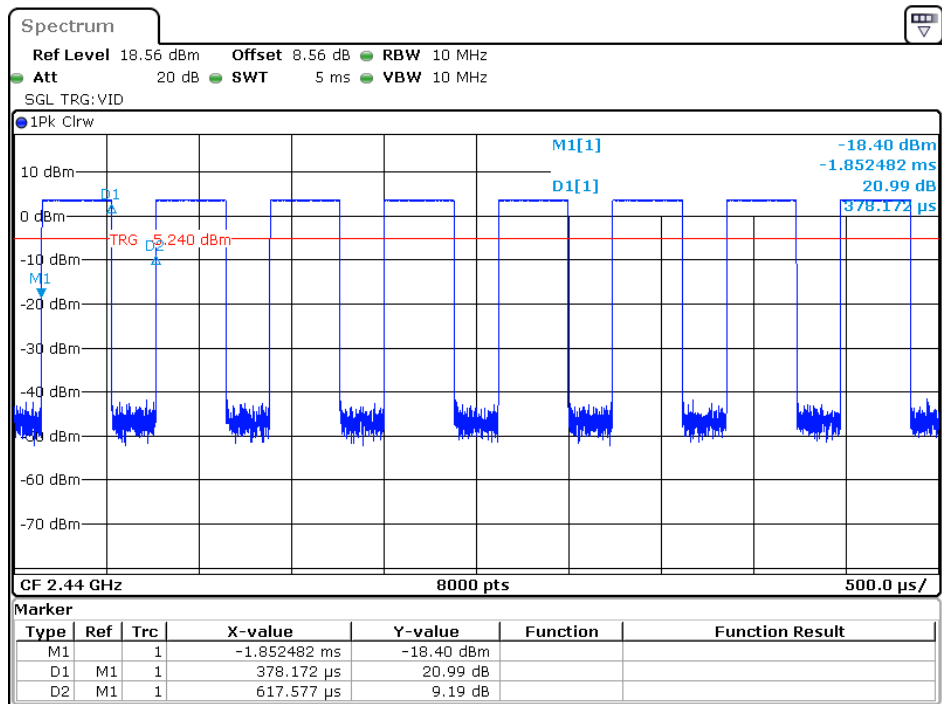

Date: 21.SEP.2019 18:33:53


Mode	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	10log(1/ Duty Cycle)
802.11b	100	-	-	10Hz	0
802.11g	100	-	-	1kHz	0
802.11n-HT20	100	-	-	1kHz	0
802.11n-HT40	100	-	-	1kHz	0
BLE	61.21	378	2.65	3kHz	2.13

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission

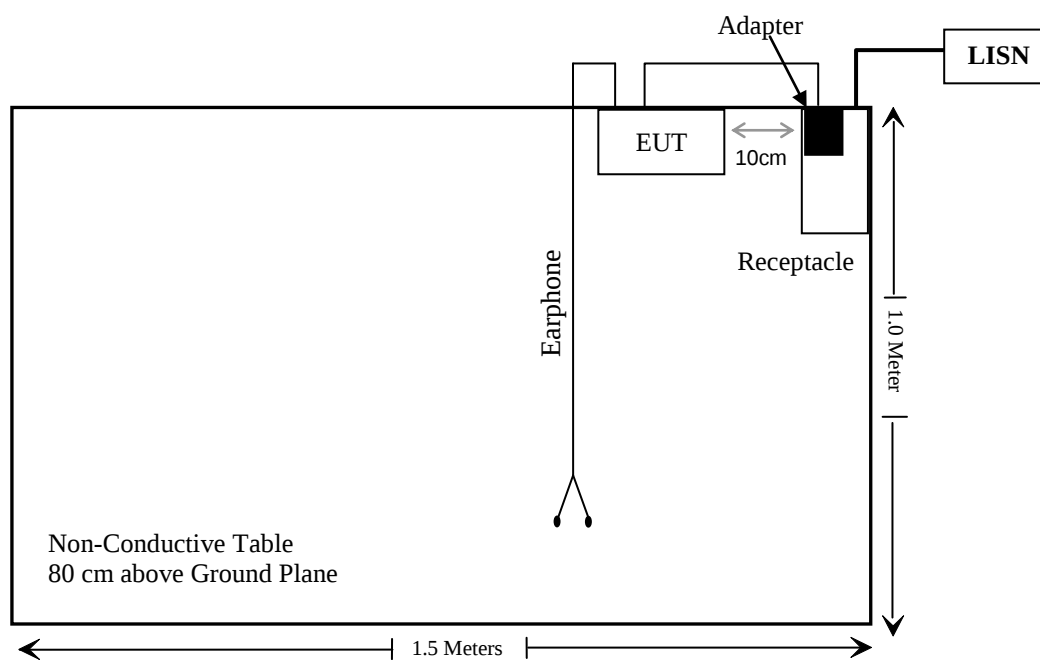

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2019-07-11	2020-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-01
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Unknown	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-11-12
Radiated Emission Test					
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019-07-22	2020-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
Ducommun technologies	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	RG-214	1	2019-05-21	2019-11-19
Ducommun technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
Sinoscite	Notch Filter	BSF2402-2480MN-0898-001	99632	2018-11-12	2019-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Agilent	USB wideband power meter	U2021XA	MY54250003	2019-07-10	2020-07-09
Tonscend Corporation	SRD/Bluetooth/Wi-Fi	JS0806-2	19D8060154	2019-07-10	2020-07-09
WEINSCHTEL	10dB Attenuator	5324	AU 3842	Each Time	
WEINSCHTEL	3dB Attenuator	6231	666	Each Time	
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2019-07-22	2020-07-22
Rohde Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
Ducommun technologies	RF Cable	RG-214	3	Each Time	

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max Tune-up Conducted Power (dBm)	Max Tune-up Conducted Power (mW)	Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE	2480	5.0	3.16	5	1.0	3.0	Yes
Wi-Fi	2472	9.7	8.91	5	2.90	3.0	Yes

Result: No SAR test is required

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an integrated antenna arrangement, which was permanently attached and the antenna gain is 1.74 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207

EUT Setup

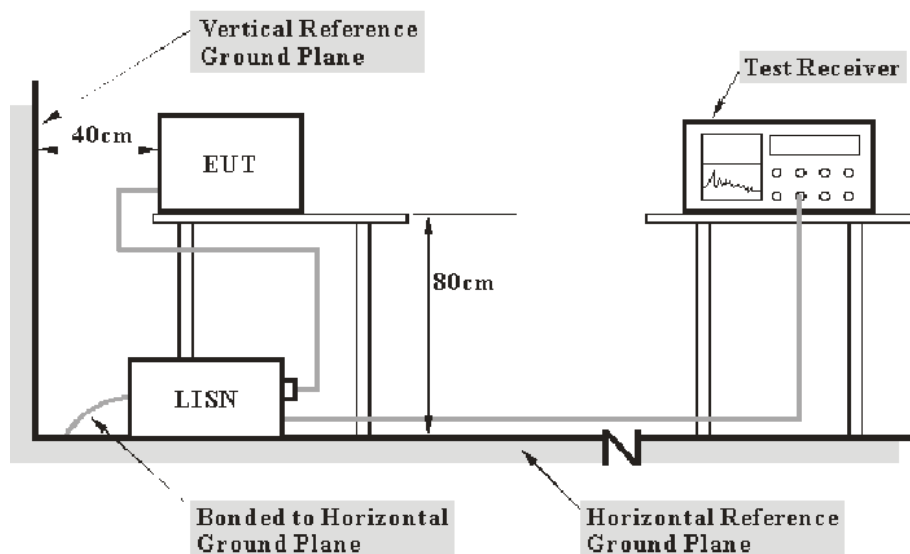

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Part 15.207,


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kiki Geng on 2019-09-27.


EUT operation mode: Transmitting

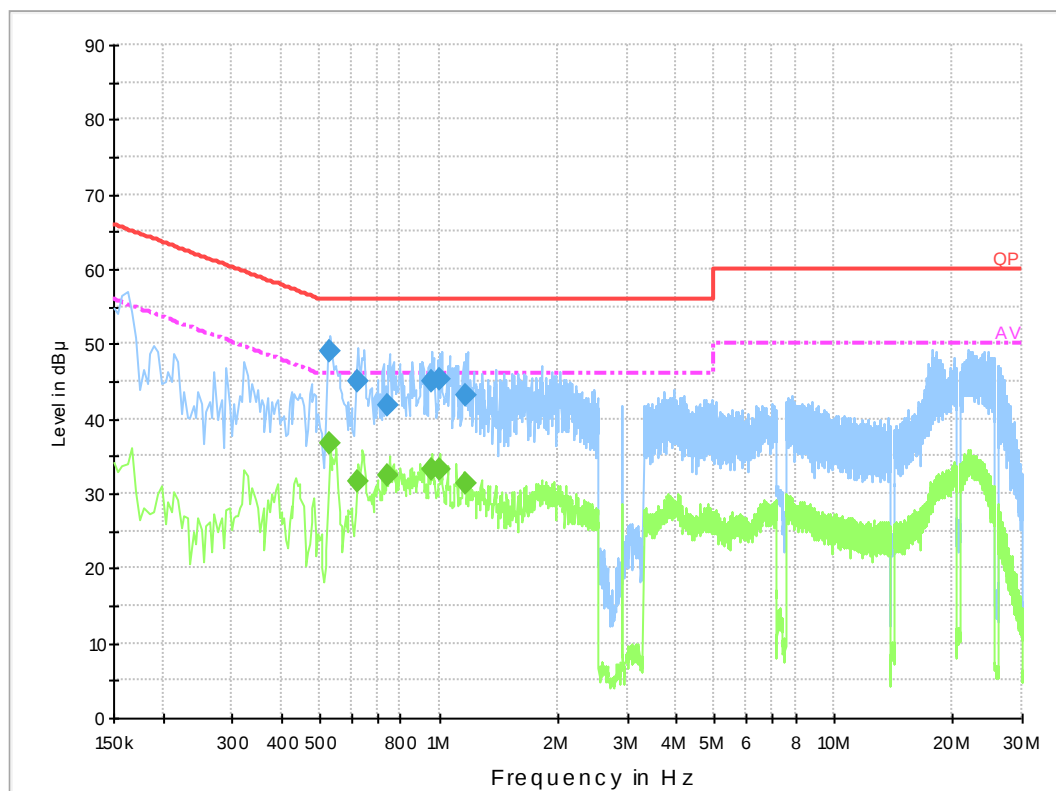BLE Mode: (Worst case at Low channel)**AC 120V/60 Hz, Line**


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.530050	49.0	19.8	56.0	7.0	QP
0.620610	44.9	19.8	56.0	11.1	QP
0.742750	41.7	19.8	56.0	14.3	QP
0.959630	45.0	19.8	56.0	11.0	QP
1.006730	45.4	19.9	56.0	10.6	QP
1.168330	43.0	19.8	56.0	13.0	QP
0.530050	36.7	19.8	46.0	9.3	Ave.
0.620610	31.6	19.8	46.0	14.4	Ave.
0.742750	32.5	19.8	46.0	13.5	Ave.
0.959630	33.1	19.8	46.0	12.9	Ave.
1.006730	33.3	19.9	46.0	12.7	Ave.
1.168330	31.2	19.8	46.0	14.8	Ave.

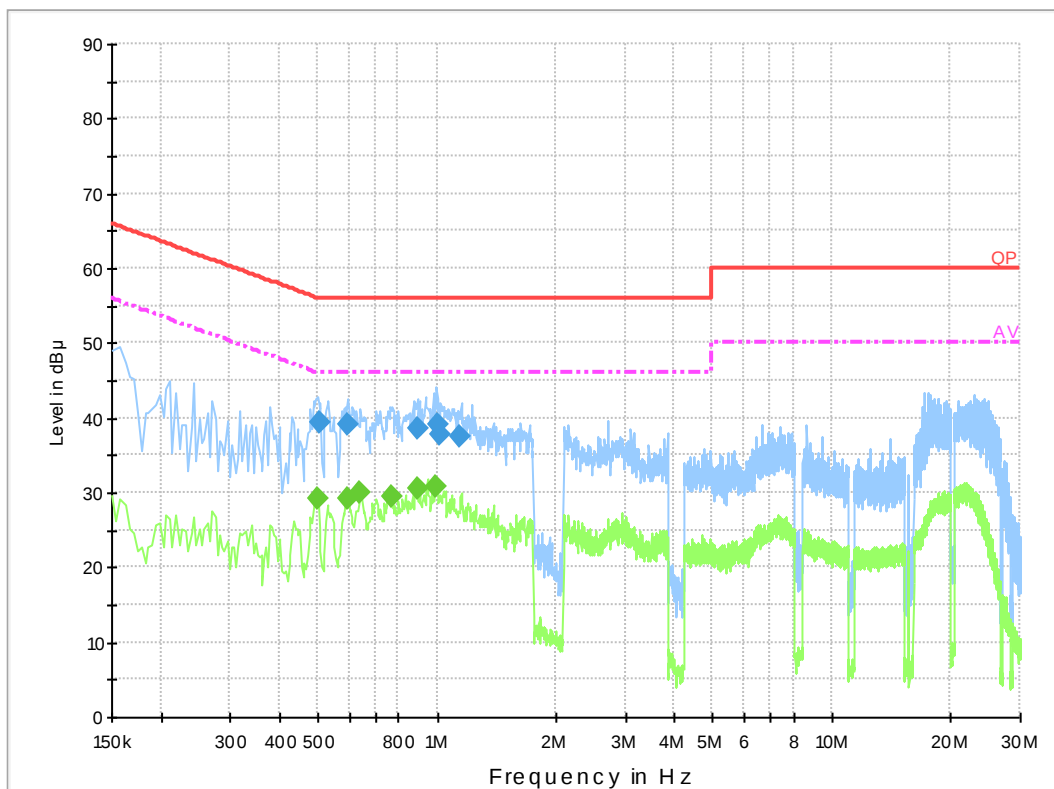AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.502530	39.3	19.8	56.0	16.7	QP
0.593090	39.1	19.8	56.0	16.9	QP
0.892650	38.5	19.7	56.0	17.5	QP
1.003030	39.1	19.8	56.0	16.9	QP
1.018670	37.8	19.8	56.0	18.2	QP
1.140750	37.4	19.8	56.0	18.6	QP
0.498000	29.2	19.8	46.0	16.8	Ave.
0.594000	29.3	19.8	46.0	16.7	Ave.
0.638000	30.0	19.8	46.0	16.0	Ave.
0.766000	29.4	19.8	46.0	16.6	Ave.
0.894000	30.4	19.7	46.0	15.6	Ave.
0.990000	30.8	19.8	46.0	15.2	Ave.

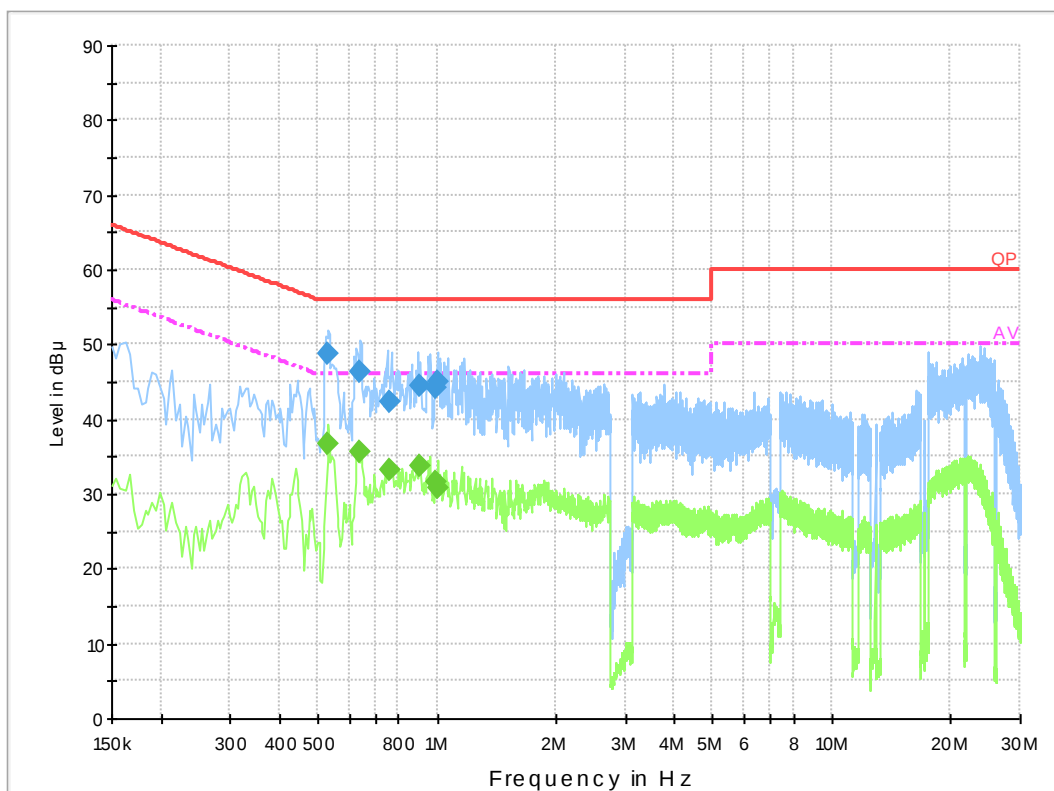Wi-Fi Mode: (Worst case at 802.11n40 mode, Middle channel)**AC 120 V/60 Hz, Line:**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.526050	48.6	19.8	56.0	7.4	QP
0.640430	46.3	19.8	56.0	9.7	QP
0.761250	42.4	19.8	56.0	13.6	QP
0.904590	44.4	19.8	56.0	11.6	QP
0.998970	44.2	19.9	56.0	11.8	QP
1.002790	45.1	19.9	56.0	10.9	QP
0.526050	36.7	19.8	46.0	9.3	Ave.
0.640430	35.6	19.8	46.0	10.4	Ave.
0.761250	33.3	19.8	46.0	12.7	Ave.
0.904590	33.7	19.8	46.0	12.3	Ave.
0.998970	31.5	19.9	46.0	14.5	Ave.
1.002790	30.8	19.9	46.0	15.2	Ave.

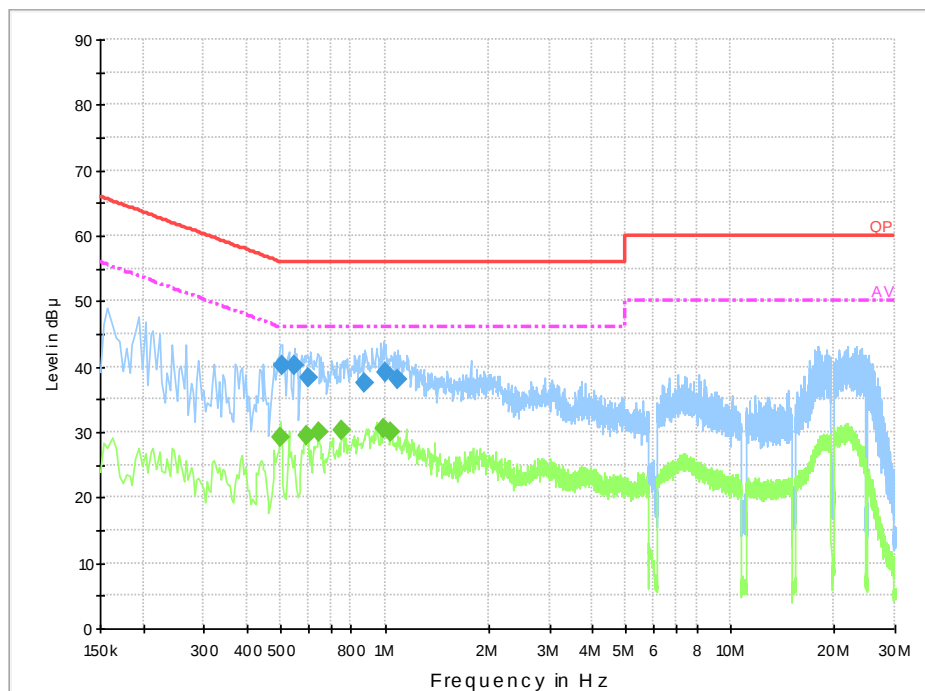AC 120V/ 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.502530	40.2	19.8	56.0	15.8	QP
0.549810	40.1	19.8	56.0	15.9	QP
0.600850	38.3	19.8	56.0	17.7	QP
0.868830	37.4	19.7	56.0	18.6	QP
1.003150	39.1	19.8	56.0	16.9	QP
1.093710	38.0	19.8	56.0	18.0	QP
0.498000	29.2	19.8	46.0	16.8	Ave.
0.594000	29.6	19.8	46.0	16.4	Ave.
0.642000	30.0	19.8	46.0	16.0	Ave.
0.754000	30.2	19.8	46.0	15.8	Ave.
0.990000	30.6	19.8	46.0	15.4	Ave.
1.042000	30.1	19.8	46.0	15.9	Ave.

Note:


- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

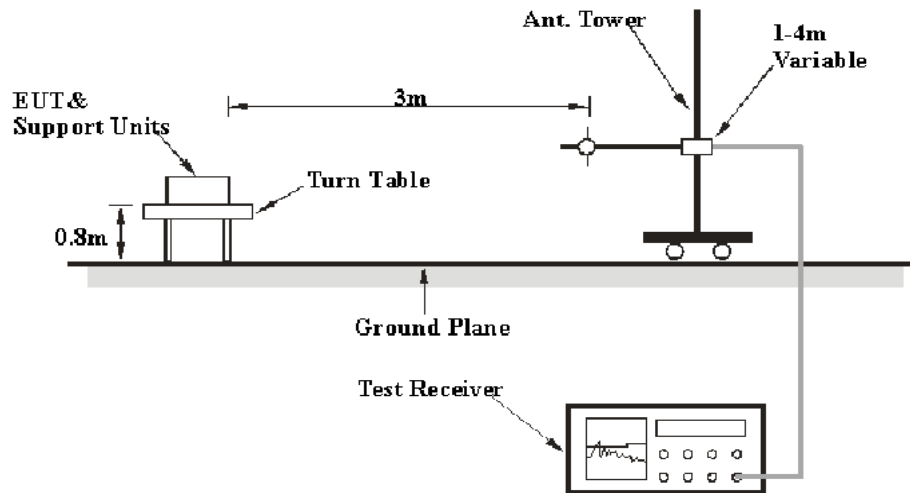

Above 1GHz:

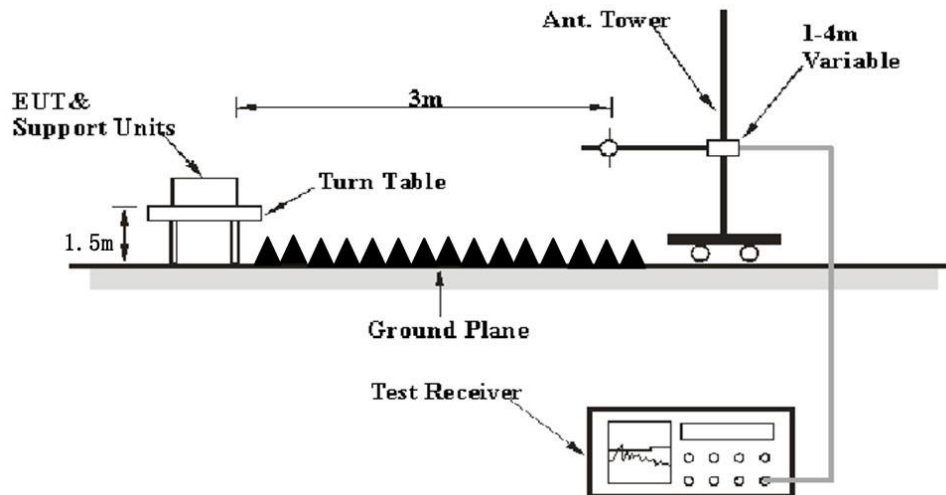

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary


According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Charlie Cha on 2019-10-10 for below 1G and Alan He on 2019-09-26 for above 1G.

EUT operation mode: Transmitting

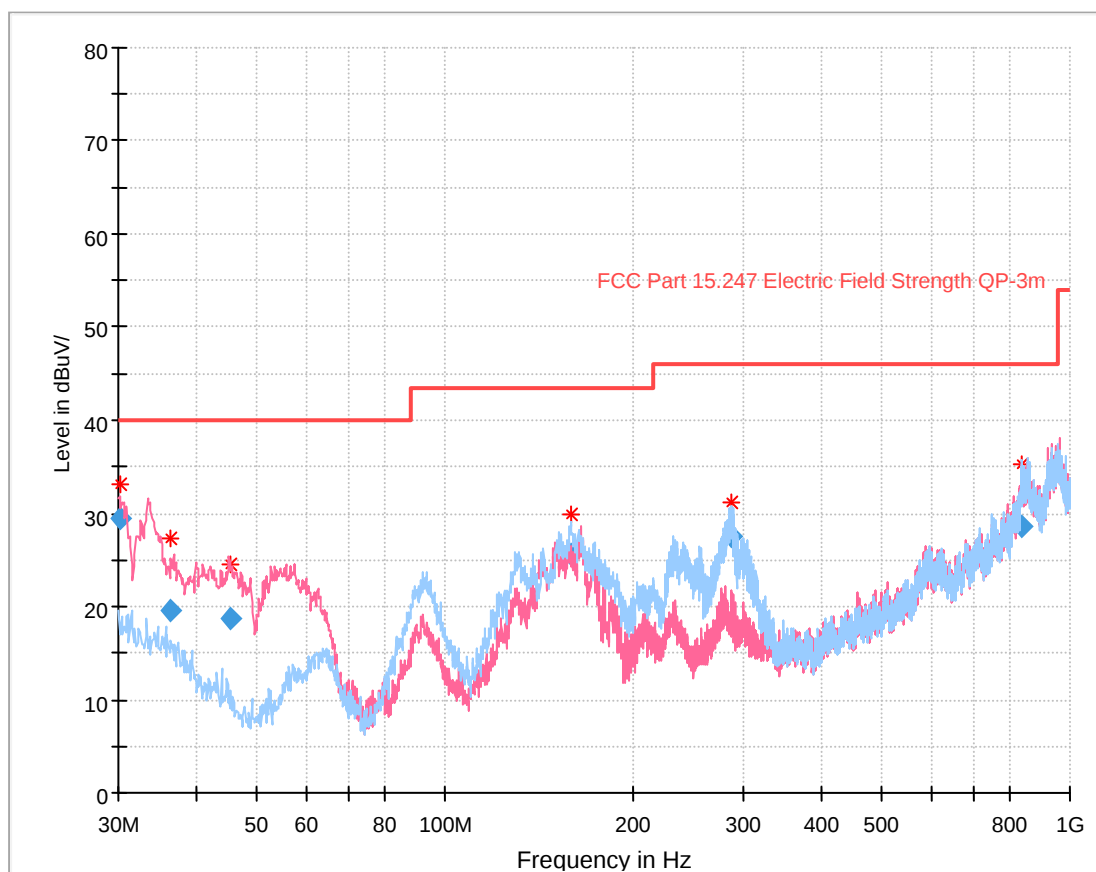30 MHz~1 GHz: (Worst case at 802.11n40 mode, Middle channel)

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
30.170067	29.40	102.0	V	85.0	-7.7	40.00	10.60
36.405875	19.56	127.0	V	0.0	-11.5	40.00	20.44
45.297375	18.68	102.0	V	79.0	-17.4	40.00	21.32
159.309125	25.63	231.0	H	251.0	-14.4	43.50	17.87
287.750250	27.42	108.0	H	153.0	-11.5	46.00	18.58
837.918375	28.53	236.0	V	0.0	5.7	46.00	17.47

1 GHz-25 GHz(BLE):

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2319.09	28.31	PK	18	2.3	H	31.64	59.95	74	14.05
2319.09	14.99	Ave.	18	2.3	H	31.64	46.63	54	7.37
2492.56	29.01	PK	357	1.4	H	32.13	61.14	74	12.86
2492.56	15.30	Ave.	357	1.4	H	32.13	47.43	54	6.57
4804.00	43.93	PK	168	1.1	H	6.28	50.21	74	23.79
4804.00	30.12	Ave.	168	1.1	H	6.28	36.40	54	17.60
Middle Channel (2440 MHz)									
4880.00	43.54	PK	233	1.9	H	6.76	50.30	74	23.70
4880.00	29.66	Ave.	233	1.9	H	6.76	36.42	54	17.58
High Channel (2480 MHz)									
2376.51	28.33	PK	335	1.7	H	31.87	60.20	74	13.80
2376.51	15.01	Ave.	335	1.7	H	31.87	46.88	54	7.12
2484.77	28.54	PK	15	1.9	H	32.13	60.67	74	13.33
2484.77	15.10	Ave.	15	1.9	H	32.13	47.23	54	6.77
4960.00	43.31	PK	37	1.4	H	6.80	50.11	74	23.89
4960.00	29.67	Ave.	37	1.4	H	6.80	36.47	54	17.53

**1 GHz-25 GHz:
802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2313.18	28.8	PK	148	1.8	H	31.64	60.44	74	13.56
2313.18	13.55	Ave.	148	1.8	H	31.64	45.19	54	8.81
2492.59	28.20	PK	239	1.9	H	32.13	60.33	74	13.67
2492.59	13.65	Ave.	239	1.9	H	32.13	45.78	54	8.22
4824.00	43.34	PK	330	2.0	H	5.40	48.74	74	25.26
4824.00	29.62	Ave.	330	2.0	H	5.40	35.02	54	18.98
Middle Channel (2442MHz)									
4884.00	43.88	PK	127	1.0	H	6.43	50.31	74	23.69
4884.00	28.96	Ave.	127	1.0	H	6.43	35.39	54	18.61
High Channel (2472 MHz)									
2326.50	27.84	PK	296	1.9	H	31.64	59.48	74	14.52
2326.50	13.64	Ave.	296	1.9	H	31.64	45.28	54	8.72
2483.89	28.61	PK	316	1.8	H	32.13	60.74	74	13.26
2483.89	13.92	Ave.	316	1.8	H	32.13	46.05	54	7.95
4944.00	43.98	PK	318	1.7	H	6.43	50.41	74	23.59
4944.00	29.00	Ave.	318	1.7	H	6.43	35.43	54	18.57

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2321.17	27.55	PK	34	1.5	H	31.64	59.19	74	14.81
2321.17	13.64	AV	34	1.5	H	31.64	45.28	54	8.72
2491.96	29.28	PK	180	1.8	H	32.13	61.41	74	12.59
2491.96	13.73	AV	180	1.8	H	32.13	45.86	54	8.14
4824.00	43.58	PK	318	1.2	H	5.40	48.98	74	25.02
4824.00	28.81	AV	318	1.2	H	5.40	34.21	54	19.79
Middle Channel (2442MHz)									
4884.00	42.90	PK	200	1.2	H	6.43	49.33	74	24.67
4884.00	28.64	AV	200	1.2	H	6.43	35.07	54	18.93
High Channel (2472 MHz)									
2372.81	28.67	PK	331	1.9	H	31.87	60.54	74	13.46
2372.81	13.66	AV	331	1.9	H	31.87	45.53	54	8.47
2483.67	33.26	PK	137	1.4	H	32.13	65.39	74	8.61
2483.67	16.64	AV	137	1.4	H	32.13	48.77	54	5.23
4944.00	44.02	PK	63	1.3	H	6.43	50.45	74	23.55
4944.00	29.06	AV	63	1.3	H	6.43	35.49	54	18.51

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2317.00	28.12	PK	80	1.1	H	31.64	59.76	74	14.24
2317.00	13.66	AV	80	1.1	H	31.64	45.30	54	8.70
2490.60	28.62	PK	37	2.5	H	32.13	60.75	74	13.25
2490.60	13.75	AV	37	2.5	H	32.13	45.88	54	8.12
4824.00	43.30	PK	264	2.5	H	5.40	48.70	74	25.30
4824.00	28.51	AV	264	2.5	H	5.40	33.91	54	20.09
Middle Channel (2442MHz)									
4884.00	43.04	PK	152	2.3	H	6.43	49.47	74	24.53
4884.00	28.48	AV	152	2.3	H	6.43	34.91	54	19.09
High Channel (2472 MHz)									
2371.65	28.12	PK	309	1.4	H	31.87	59.99	74	14.01
2371.65	13.64	AV	309	1.4	H	31.87	45.51	54	8.49
2484.09	31.76	PK	206	1.8	H	32.13	63.89	74	10.11
2484.09	14.86	AV	206	1.8	H	32.13	46.99	54	7.01
4944.00	43.89	PK	35	2.2	H	6.43	50.32	74	23.68
4944.00	28.87	AV	35	2.2	H	6.43	35.30	54	18.70

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2422 MHz)									
2350.81	28.01	PK	358	2.2	H	31.77	59.78	74	14.22
2350.81	13.64	AV	358	2.2	H	31.77	45.41	54	8.59
2491.87	28.67	PK	249	1.1	H	32.13	60.80	74	13.20
2491.87	13.72	AV	249	1.1	H	32.13	45.85	54	8.15
4844.00	42.95	PK	167	1.2	H	5.40	48.35	74	25.65
4844.00	28.46	AV	167	1.2	H	5.40	33.86	54	20.14
Middle Channel (2442MHz)									
4884.00	43.15	PK	174	1.3	H	6.43	49.58	74	24.42
4884.00	28.59	AV	174	1.3	H	6.43	35.02	54	18.98
High Channel (2462 MHz)									
2326.61	28.76	PK	289	1.0	H	31.64	60.40	74	13.60
2326.61	13.63	AV	289	1.0	H	31.64	45.27	54	8.73
2497.48	28.58	PK	23	1.8	H	32.13	60.71	74	13.29
2497.48	13.87	AV	23	1.8	H	32.13	46.00	54	8.00
4924.00	43.58	PK	225	1.2	H	6.43	50.01	74	23.99
4924.00	28.61	AV	225	1.2	H	6.43	35.04	54	18.96

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.


**Pre-scan with 802.11G Mode, High channel
Horizontal**

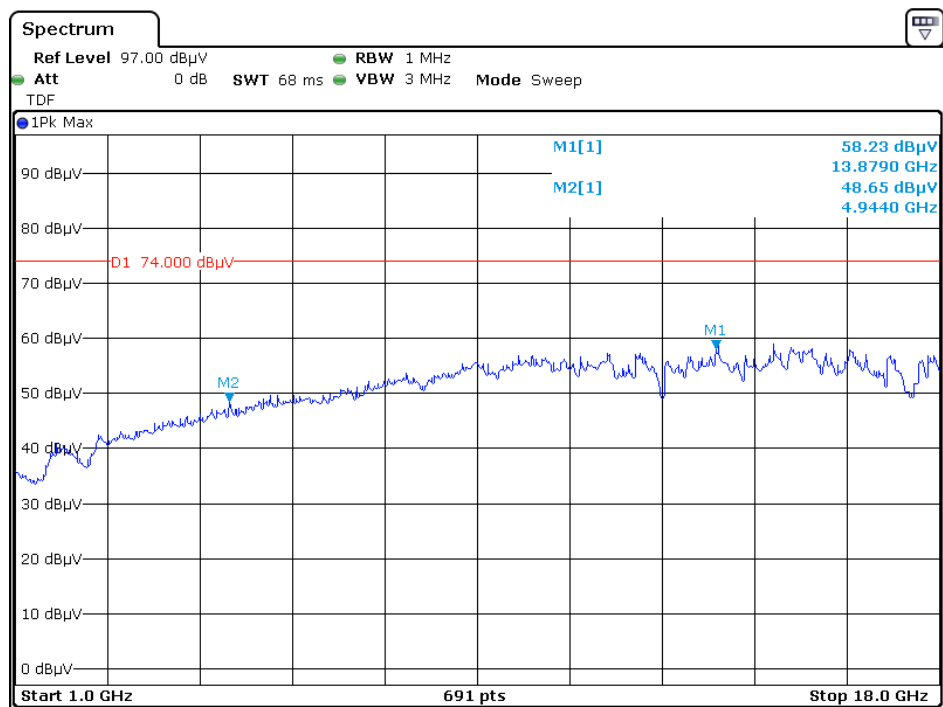


Date: 26.SEP.2019 08:22:46

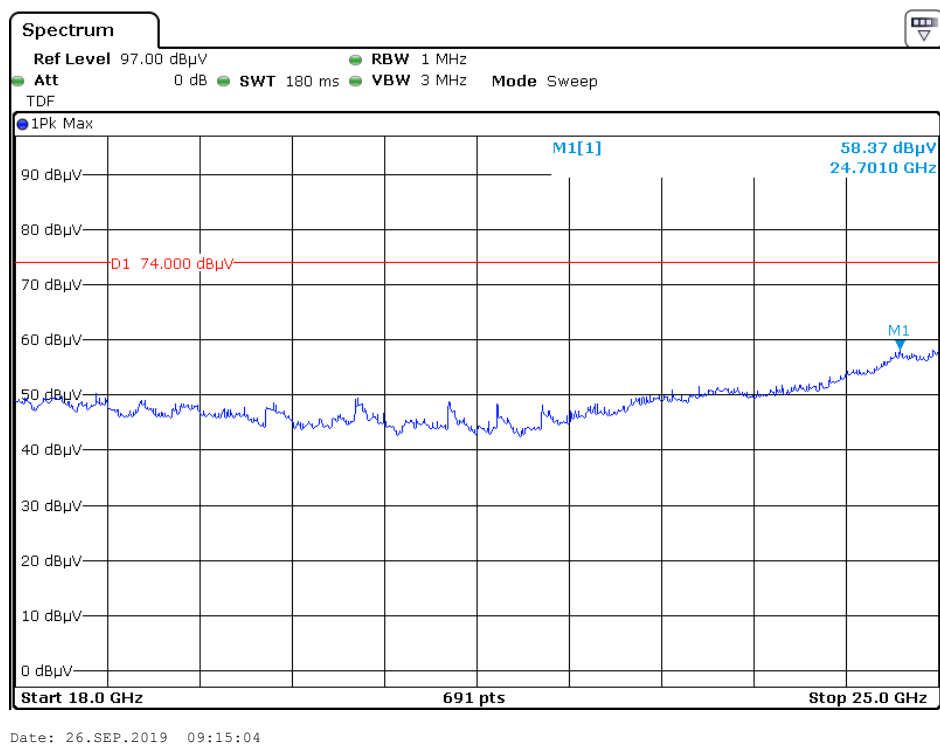


Vertical

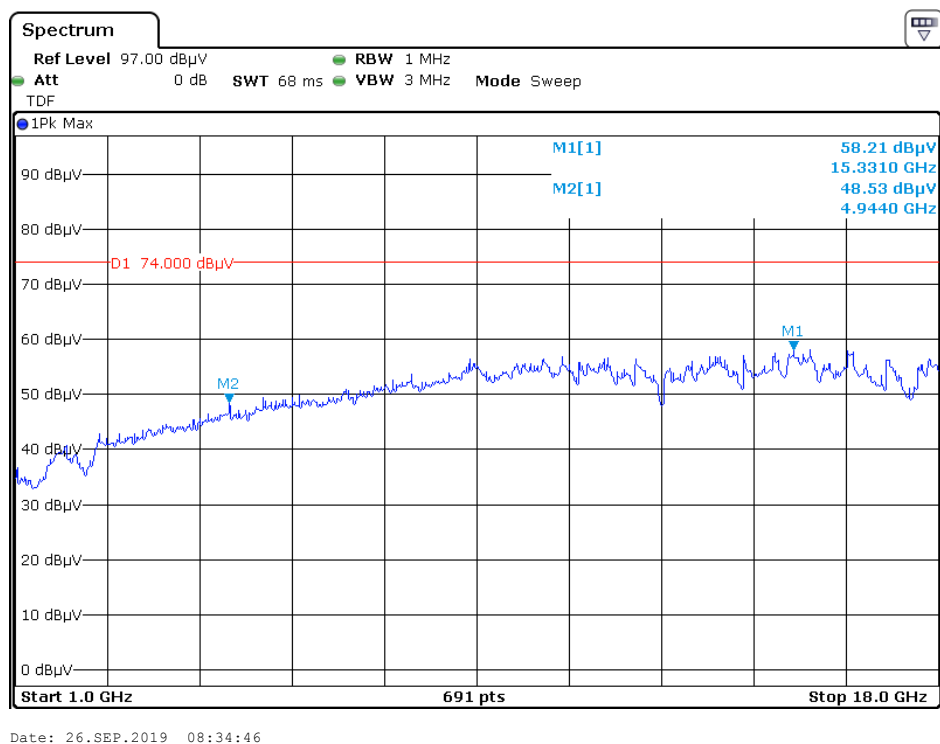

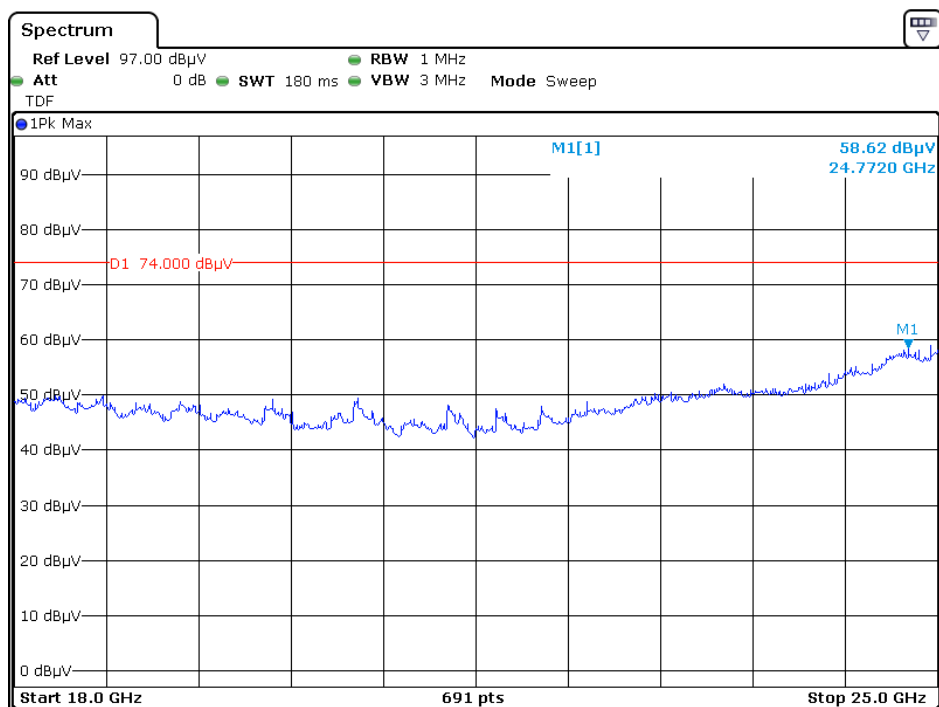


Date: 26.SEP.2019 09:26:51

Pre-scan for Average Horizontal

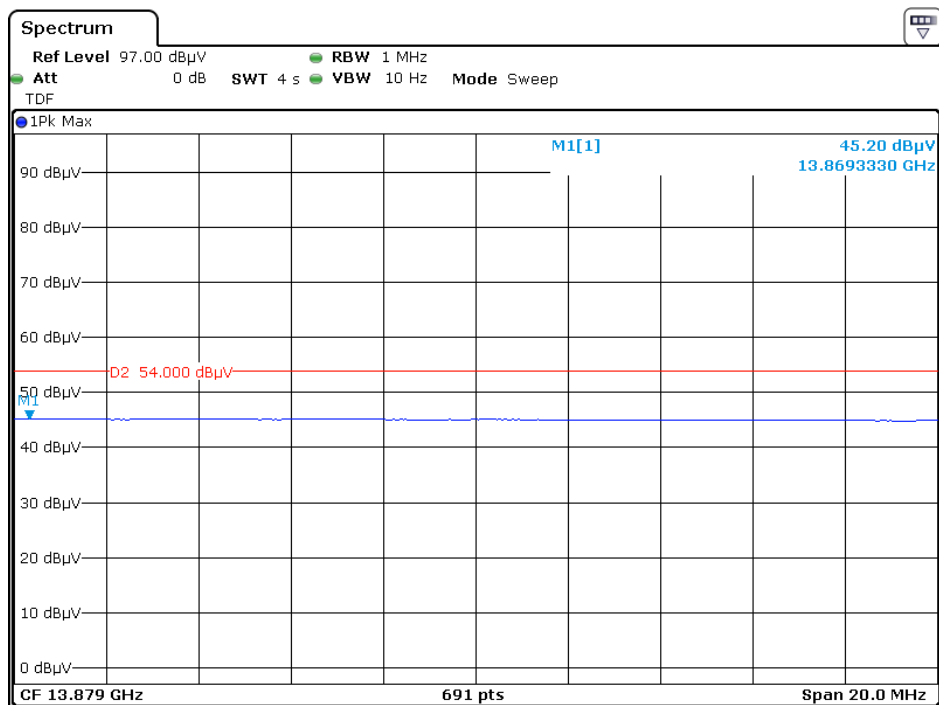


Date: 26.SEP.2019 08:28:07

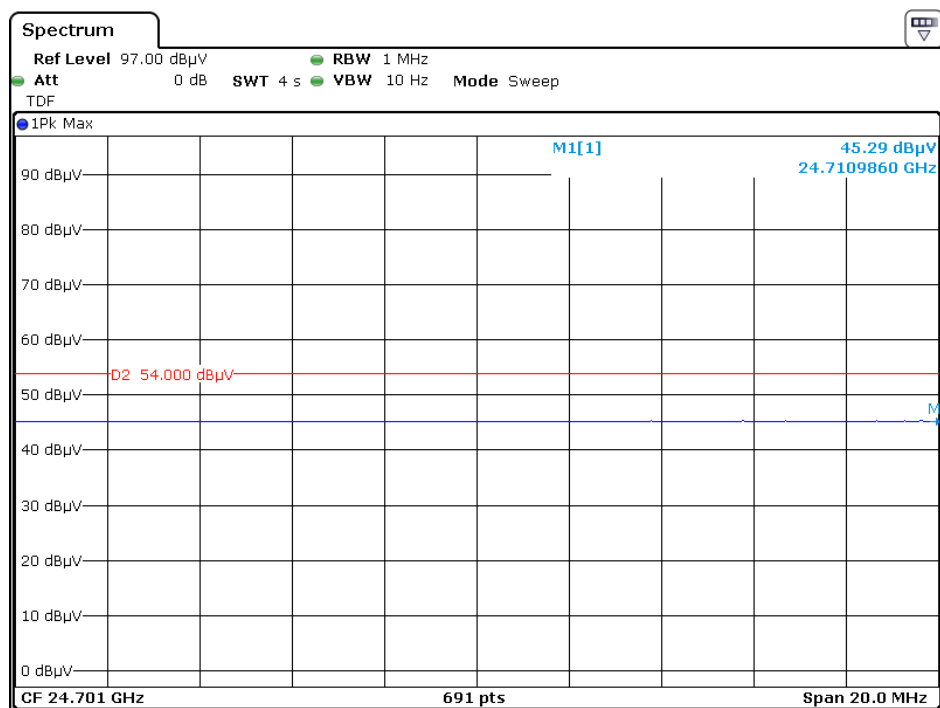


Date: 26.SEP.2019 09:20:41

Vertical

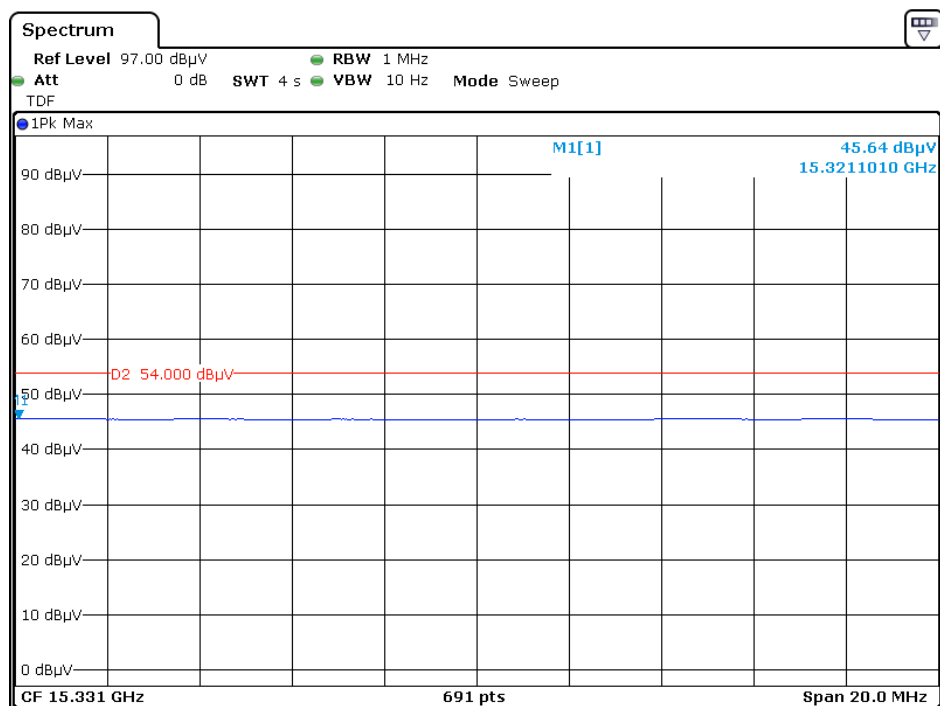

Date: 26.SEP.2019 08:41:38

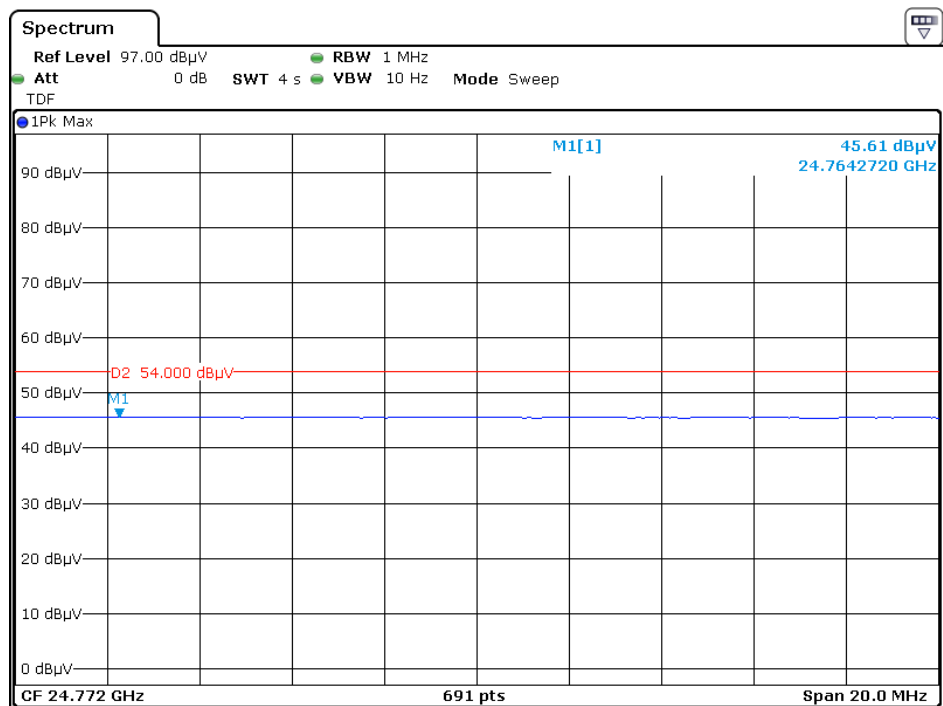

Date: 26.SEP.2019 09:32:29


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Gavin Guo from 2019-09-21 to 2019-10-10.

Test Result: Pass.

Please refer to the following table and plots.


EUT operation mode: Transmitting

6 dB Emission Bandwidth:

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	9.731	≥ 500
Middle	2442	9.667	≥ 500
High	2472	9.692	≥ 500
802.11g			
Low	2412	16.577	≥ 500
Middle	2442	16.577	≥ 500
High	2472	16.641	≥ 500
802.11n-HT20 mode			
Low	2412	17.808	≥ 500
Middle	2442	17.731	≥ 500
High	2472	17.795	≥ 500
802.11n-HT40 mode			
Low	2422	36.821	≥ 500
Middle	2442	36.103	≥ 500
High	2462	36.615	≥ 500


TestMode	Channel[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_BT4.0	2402	0.698	0.5	PASS
	2440	0.708	0.5	PASS
	2480	0.702	0.5	PASS

802.11b Low Channel

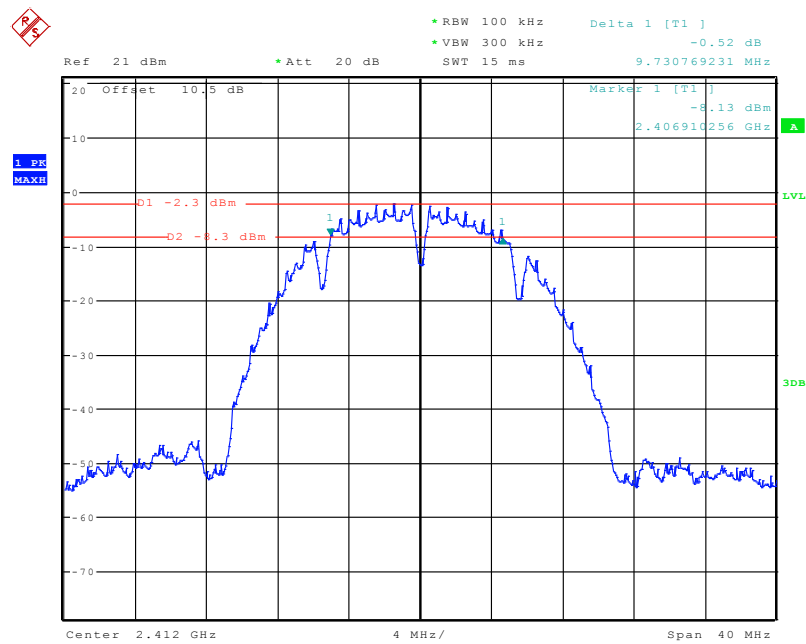


Date: 10.OCT.2019 09:44:47

802.11b Middle Channel

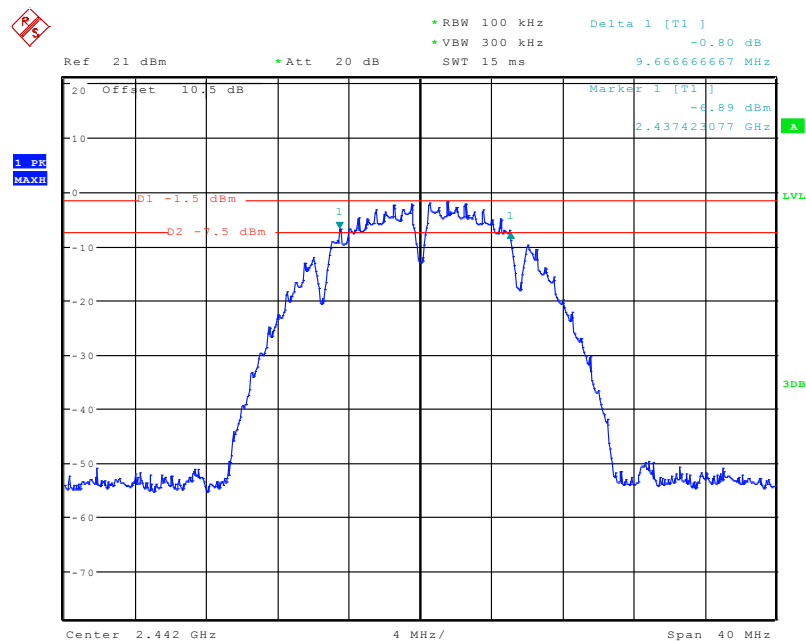


Date: 10.OCT.2019 09:46:16

802.11b High Channel

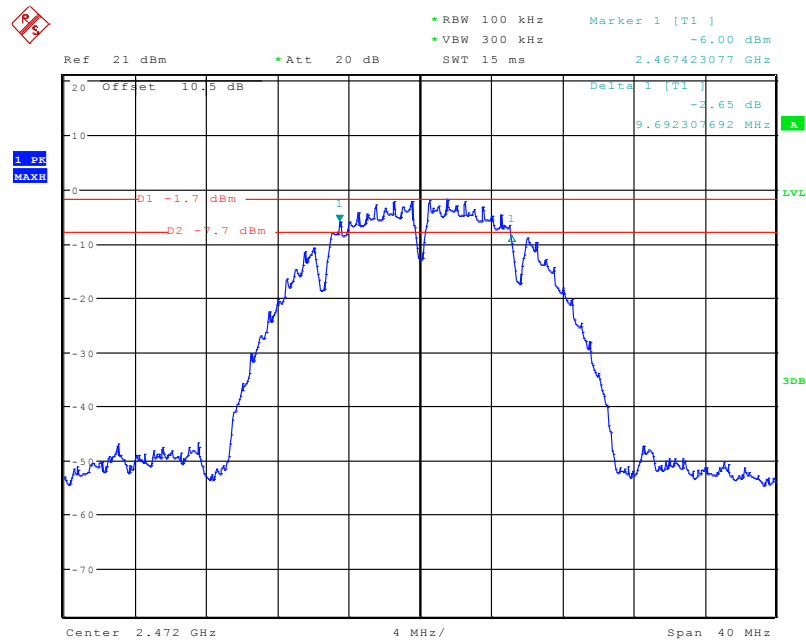


Date: 10.OCT.2019 09:48:17

802.11g Low Channel

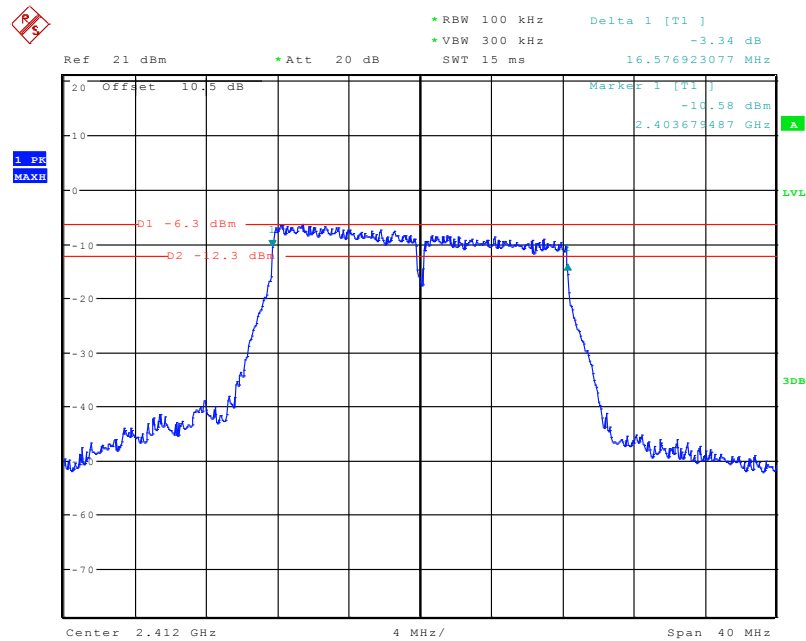


Date: 10.OCT.2019 09:41:26

802.11g Middle Channel

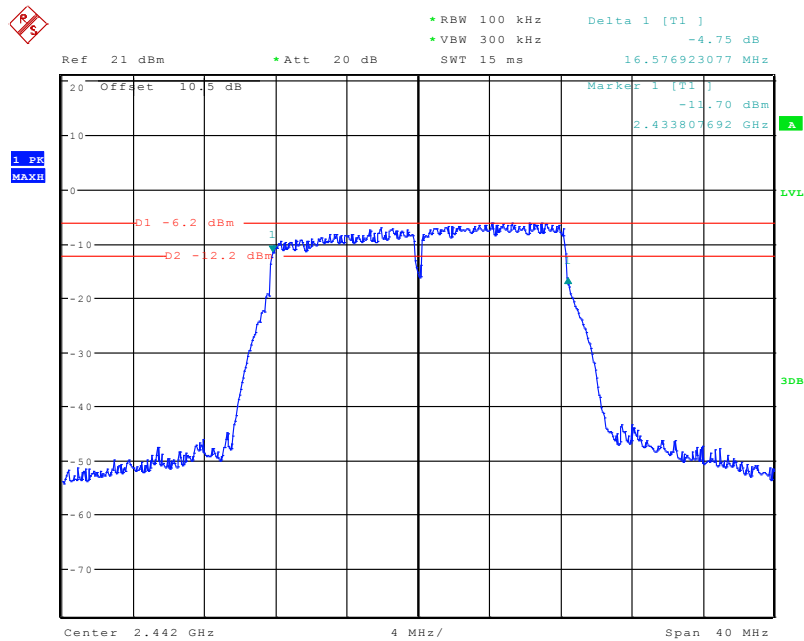


Date: 10.OCT.2019 09:42:28

802.11g High Channel

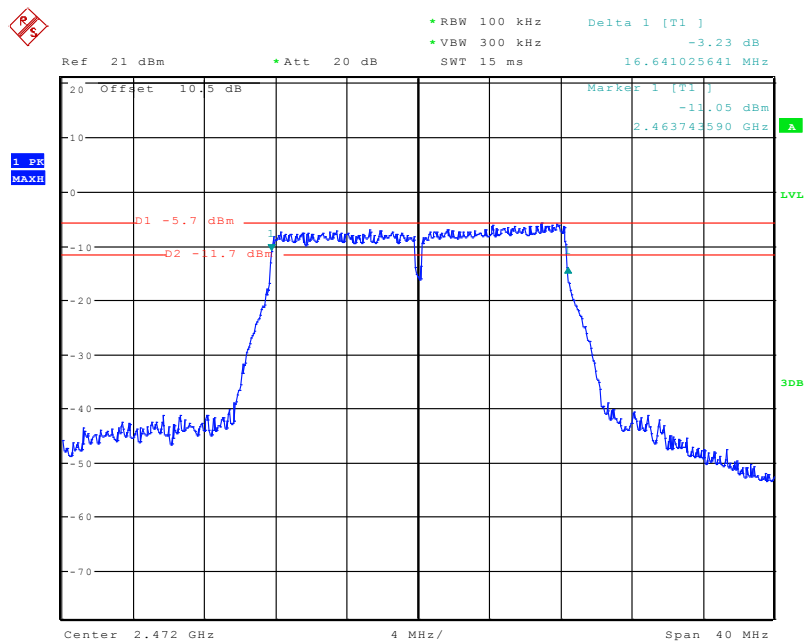


Date: 10.OCT.2019 09:43:26

802.11n-HT20 Low Channel

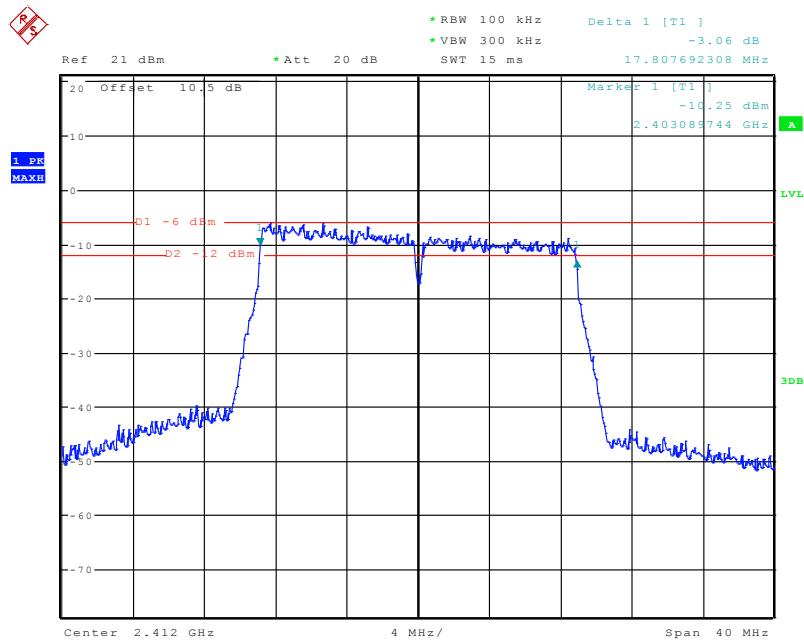


Date: 10.OCT.2019 09:37:06

802.11n-HT20 Middle Channel

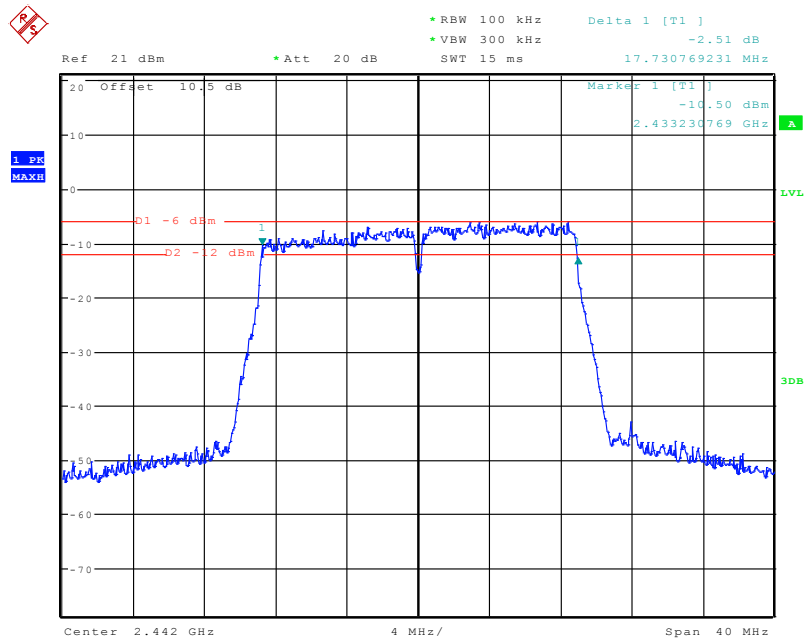


Date: 10.OCT.2019 09:38:38

802.11n-HT20 High Channel

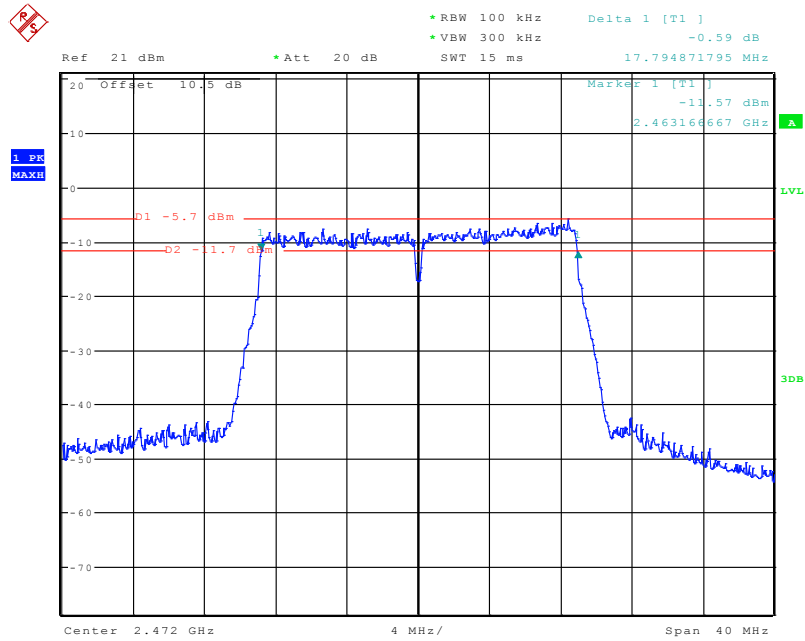


Date: 10.OCT.2019 09:39:49

802.11n-HT40 Low Channel

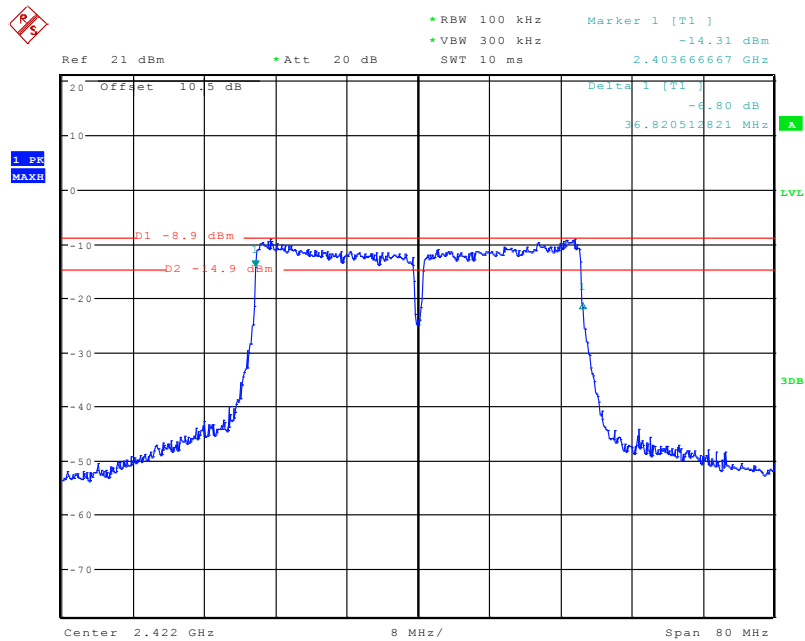


Date: 10.OCT.2019 09:35:19

802.11n-HT40 Middle Channel

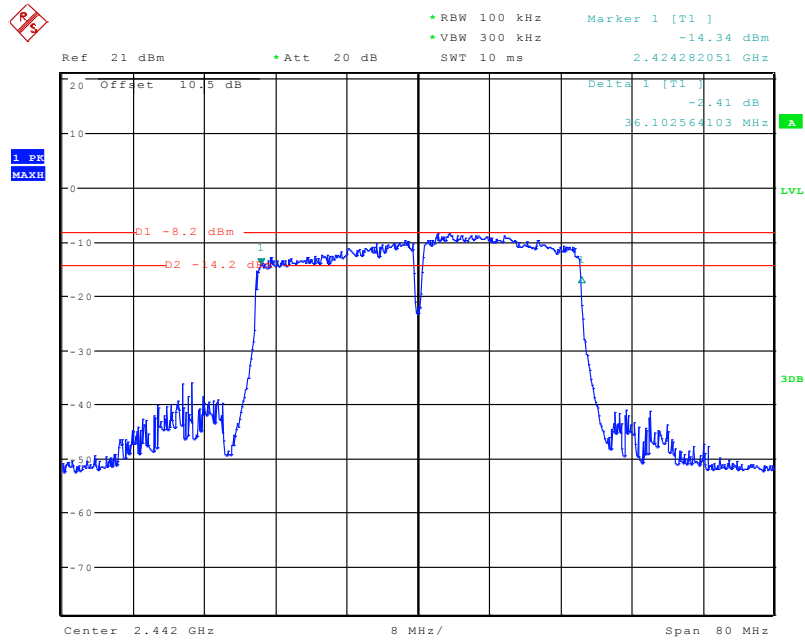


Date: 10.OCT.2019 09:32:09

802.11n-HT40 High Channel

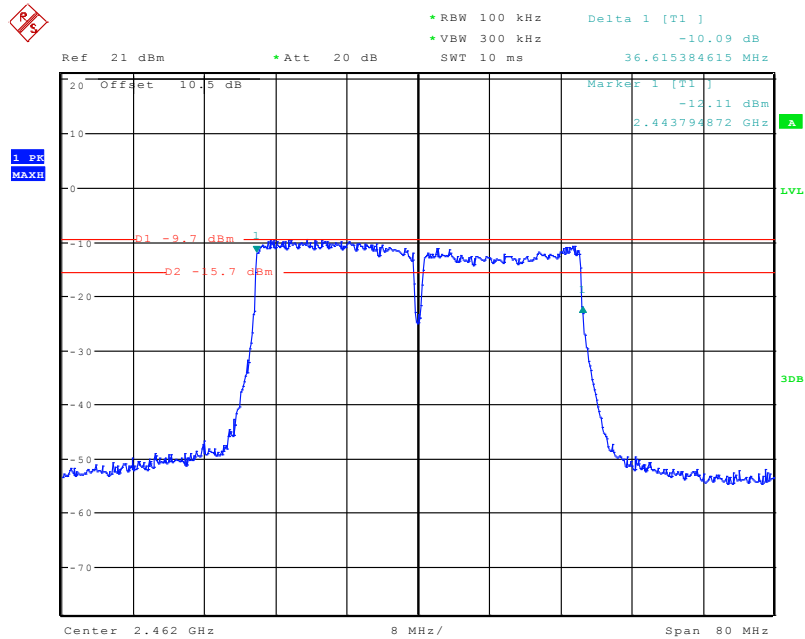


Date: 10.OCT.2019 09:29:08

BLE Low Channel

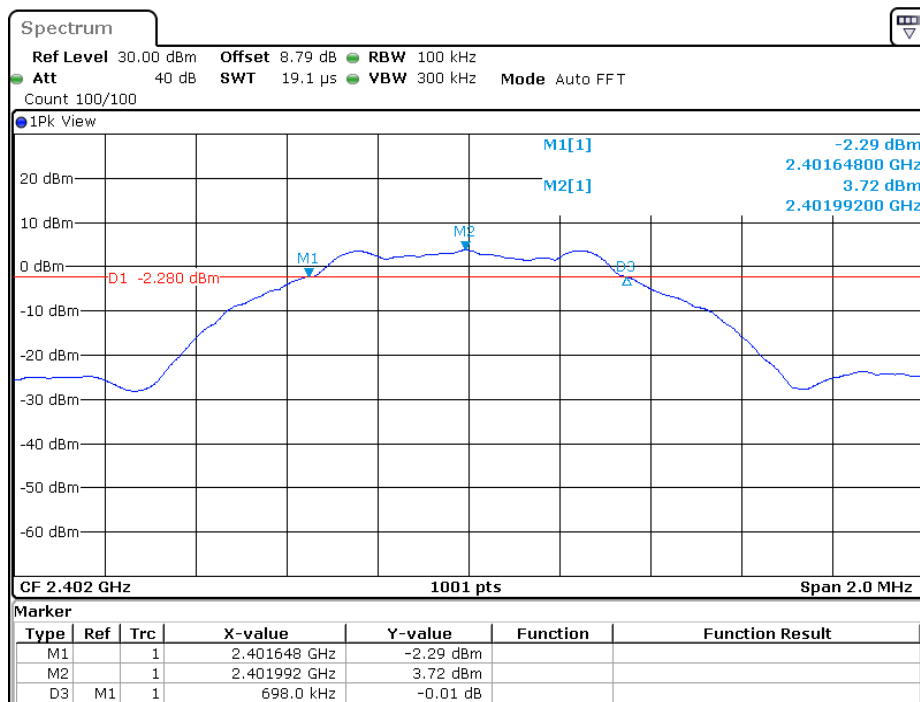


Date: 21.SEP.2019 18:31:56

BLE Middle Channel

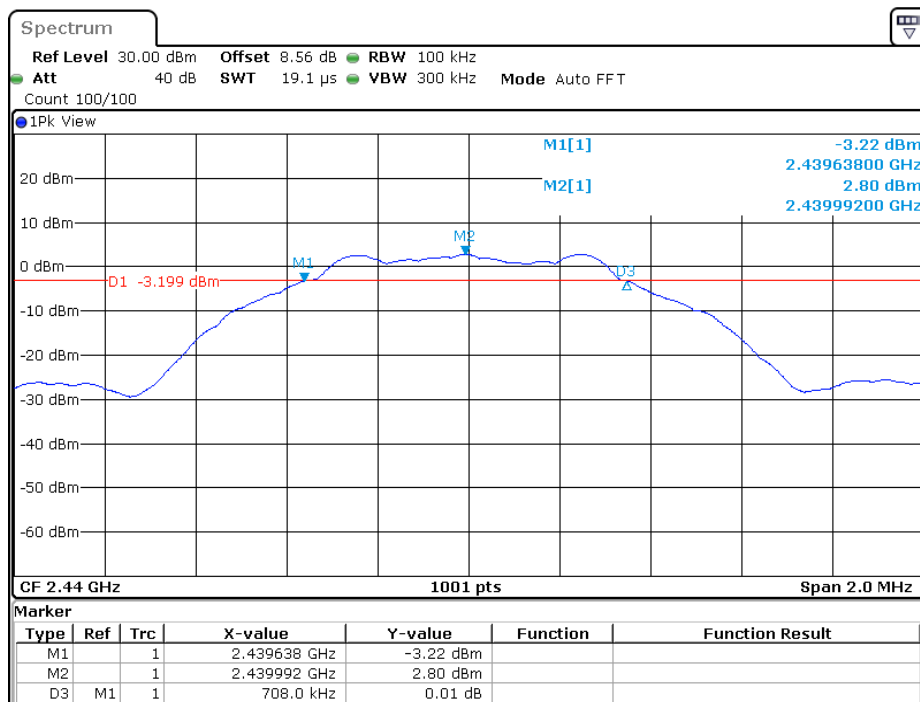

Date: 21.SEP.2019 18:34:21

BLE High Channel

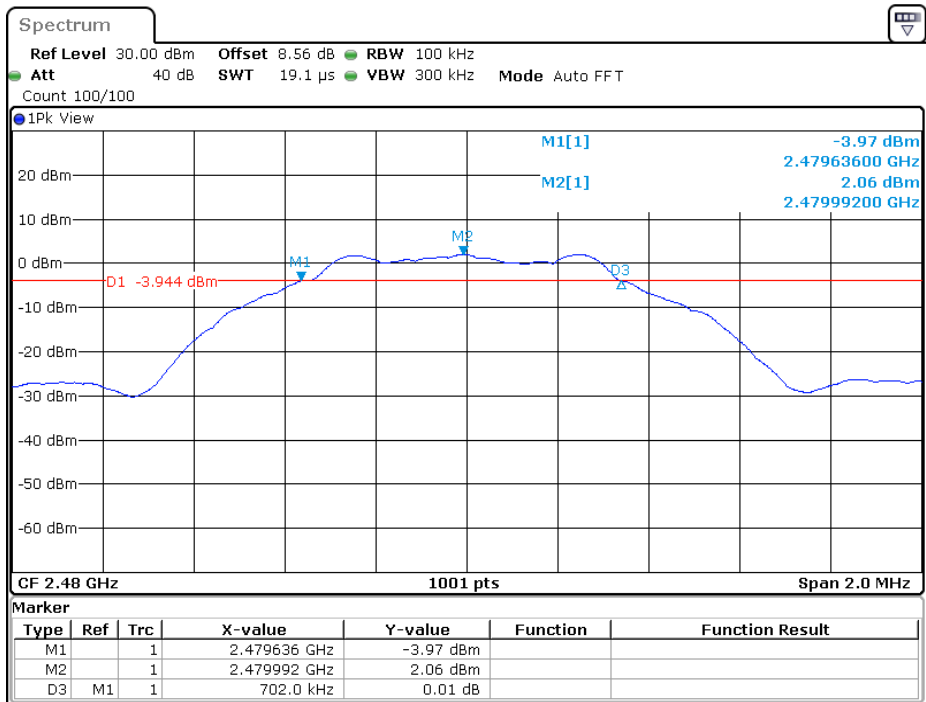

Date: 21.SEP.2019 18:37:10


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	52~55 %
ATM Pressure:	100.9~101.0 kPa

The testing was performed by Gavin Guo from 2019-09-21 to 2019-10-10.

EUT operation mode: Transmitting

Wi-Fi mode

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b				
Low	2412	11.87	9.42	30
Middle	2442	11.70	9.10	30
High	2472	12.01	9.46	30
802.11g				
Low	2412	14.69	9.18	30
Middle	2442	15.15	9.45	30
High	2472	15.22	9.49	30
802.11n HT20				
Low	2412	14.86	9.17	30
Middle	2442	15.23	9.38	30
High	2472	14.98	9.13	30
802.11n HT40				
Low	2422	15.14	9.40	30
Middle	2442	15.22	9.45	30
High	2462	15.15	9.39	30

BLE mode


TestMode	Channel[MHz]	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.0	2402	4.71	<=30	PASS
	2440	3.84	<=30	PASS
	2480	3.02	<=30	PASS

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Gavin Guo on 2019-09-21 to 2019-10-10.

EUT operation mode: Transmitting

Test Result: Compliance


Please refer to the following plots.

802.11b: Band Edge, Left Side

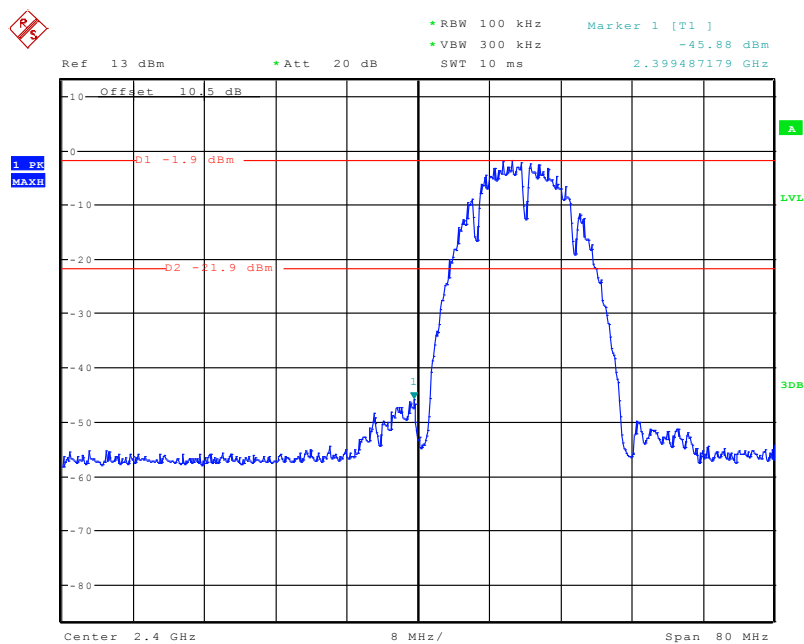


Date: 10.OCT.2019 10:38:39

802.11b: Band Edge, Right Side

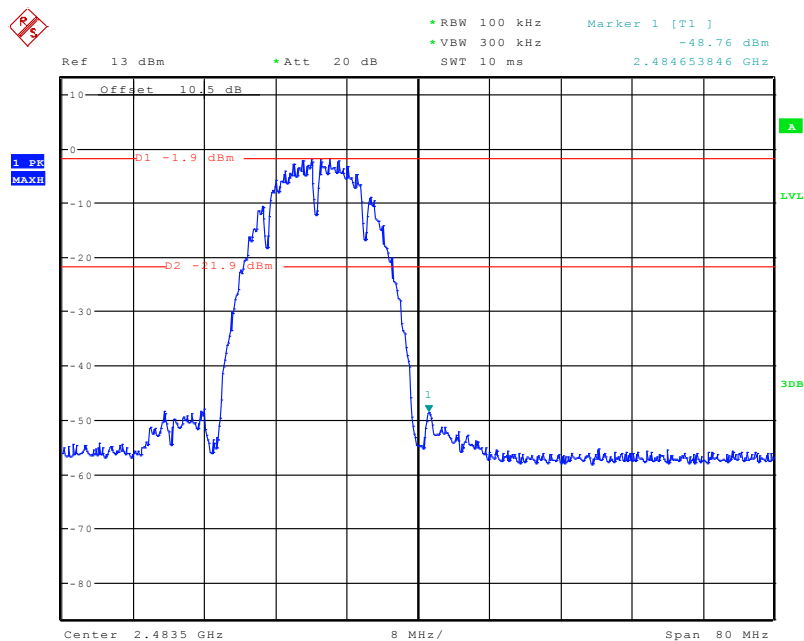


Date: 10.OCT.2019 10:39:17

802.11g: Band Edge, Left Side

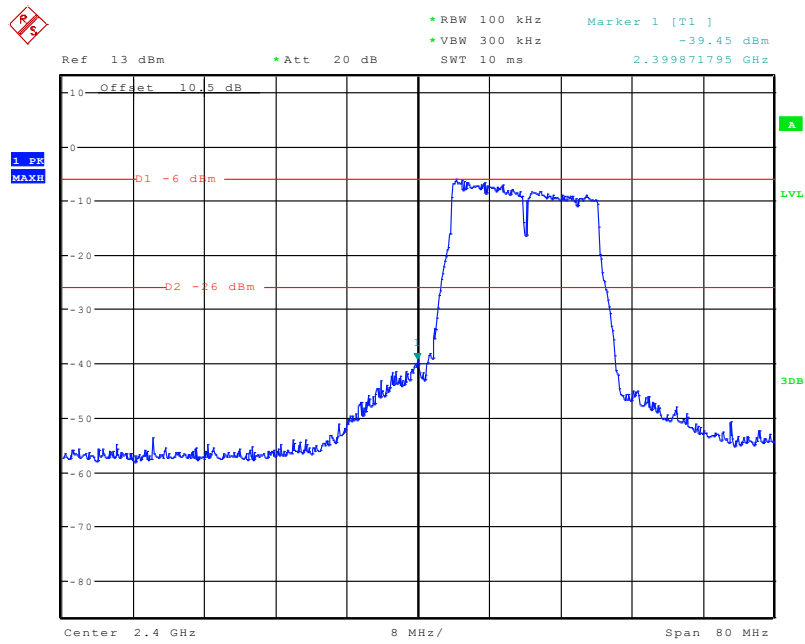


Date: 10.OCT.2019 10:37:50

802.11g: Band Edge, Right Side

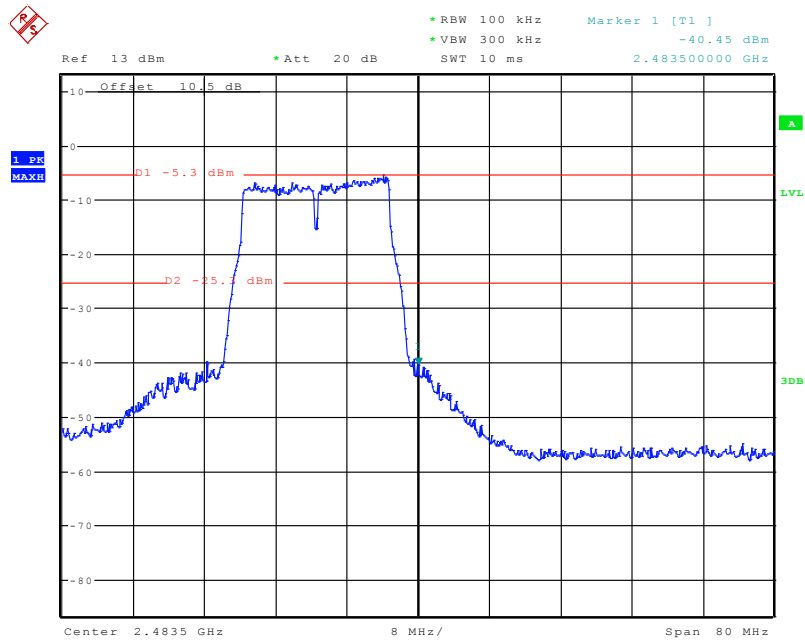


Date: 10.OCT.2019 10:36:52

802.11n-HT20: Band Edge, Left Side

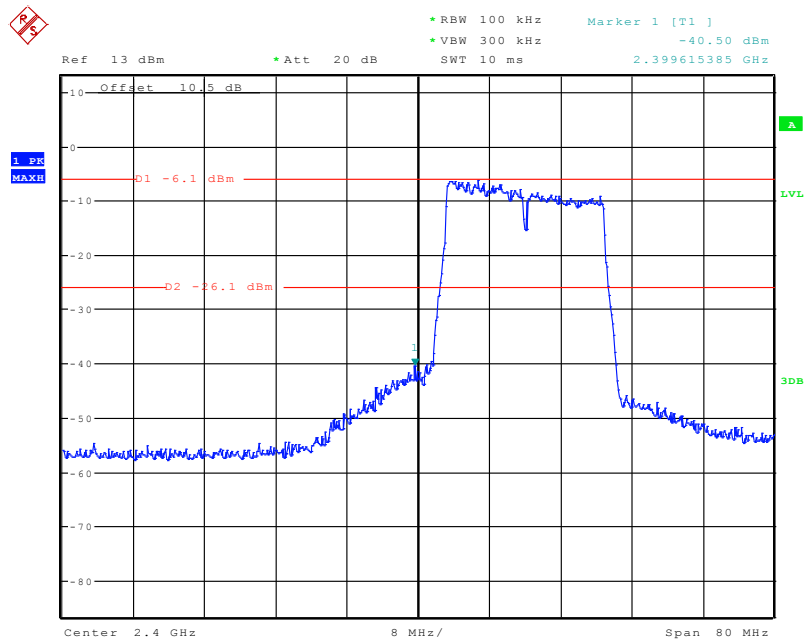


Date: 10.OCT.2019 10:34:48

802.11n-HT20: Band Edge, Right Side

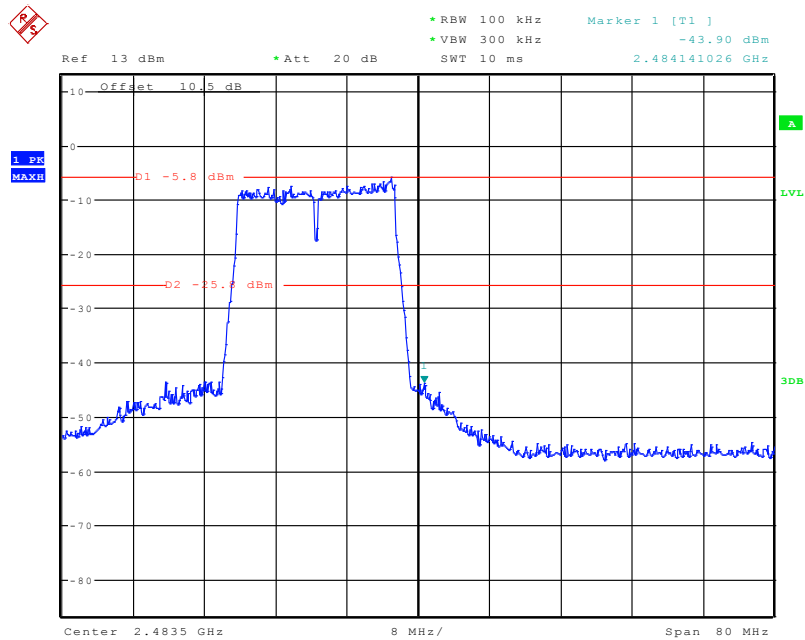


Date: 10.OCT.2019 10:35:53

802.11n-HT40: Band Edge, Left Side

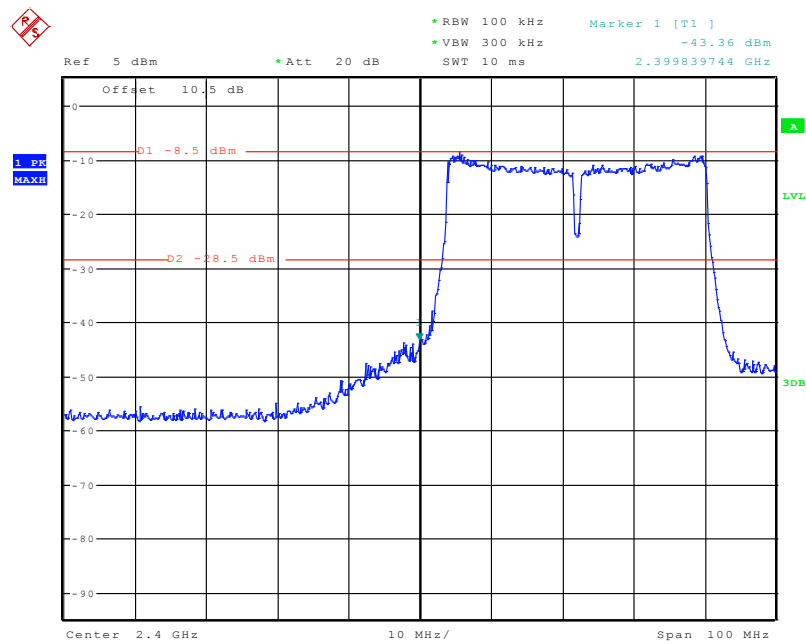


Date: 10.OCT.2019 10:33:29

802.11n-HT40: Band Edge, Right Side

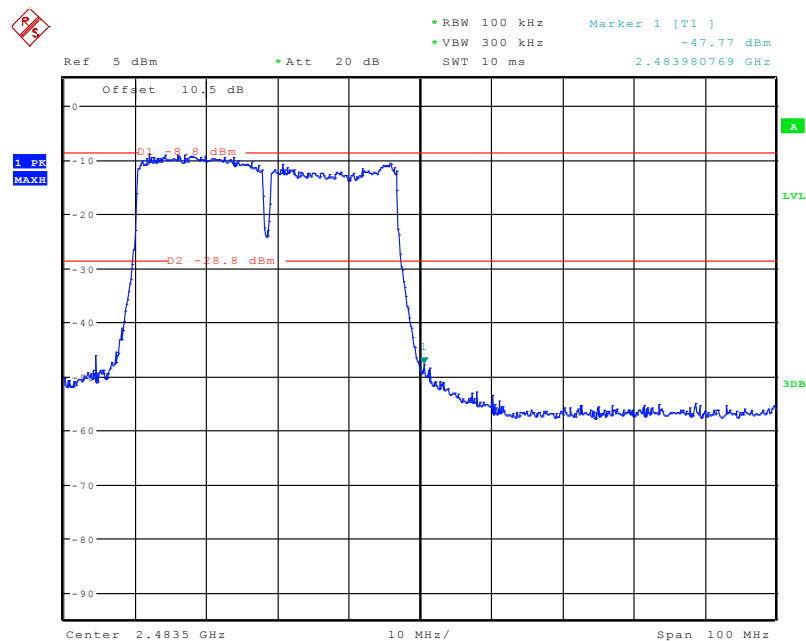


Date: 10.OCT.2019 10:32:20

BLE: Band Edge, Left Side

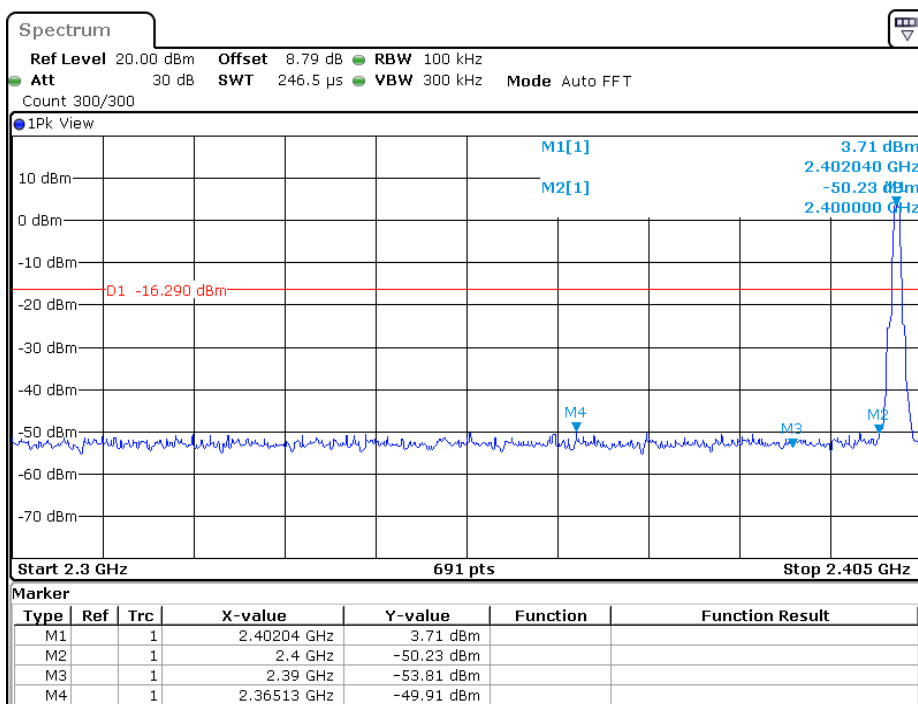

Date: 21.SEP.2019 18:33:03

BLE: Band Edge, Right Side

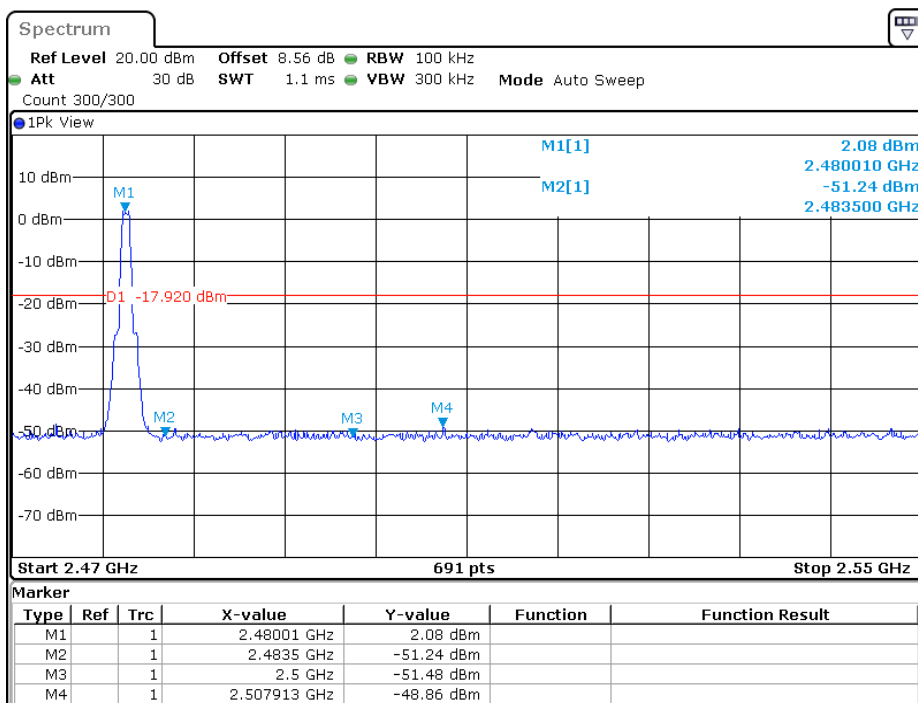

Date: 21.SEP.2019 18:38:15


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	52~55 %
ATM Pressure:	100.9~101.0 kPa

The testing was performed by Gavin Guo from 2019-09-21 to 2019-10-10.

EUT operation mode: Transmitting

Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-20.11	≤ 8
Middle	2442	-20.51	≤ 8
High	2472	-20.14	≤ 8
802.11g mode			
Low	2412	-20.05	≤ 8
Middle	2442	-20.00	≤ 8
High	2472	-19.94	≤ 8
802.11n-HT20 mode			
Low	2412	-19.97	≤ 8
Middle	2442	-19.28	≤ 8
High	2472	-20.19	≤ 8
802.11n-HT40 mode			
Low	2422	-22.54	≤ 8
Middle	2442	-22.09	≤ 8
High	2462	-22.34	≤ 8
BLE mode			
Low	2402	-10.08	≤ 8
Middle	2440	-11.63	≤ 8
High	2480	-12.47	≤ 8

The screenshot displays a spectrum analyzer interface. The main plot shows a signal spectrum with a prominent dip at 2.41227074 GHz. The y-axis represents power in dBm, ranging from -90 to 0. The x-axis represents frequency in GHz, ranging from 2.411 to 2.413. A green arrow points to the dip, labeled '1'. The signal level is approximately -20 dBm. The dip reaches approximately -30 dBm. The plot is titled '1 PR MAXII'. The frequency is 2.412 GHz. The span is 21.923 MHz. The center frequency is 2.1923 MHz. The reference level is 5 dBm. The attenuation is 20 dB. The resolution bandwidth (RBW) is 3 kHz. The video bandwidth (VBW) is 10 kHz. The sweep time (SWT) is 2.45 s. The marker frequency is 2.411227074 GHz. The marker level is -20.11 dBm.

Date: 10.OCT.2019 10:18:13

Ref 5 dBm * Att 20 dB * RBW 3 kHz * VBW 10 kHz SWT 2.4 s Marker 1 [T1] -20.51 dBm 2.442749234 GHz


Offset 10.5 dB

1 PR
MAX

Center 2.442 GHz 2.1251 MHz/ Span 21.251 MHz


Date: 10.OCT.2019 10:16:28

Power Spectral Density, 802.11b High Channel

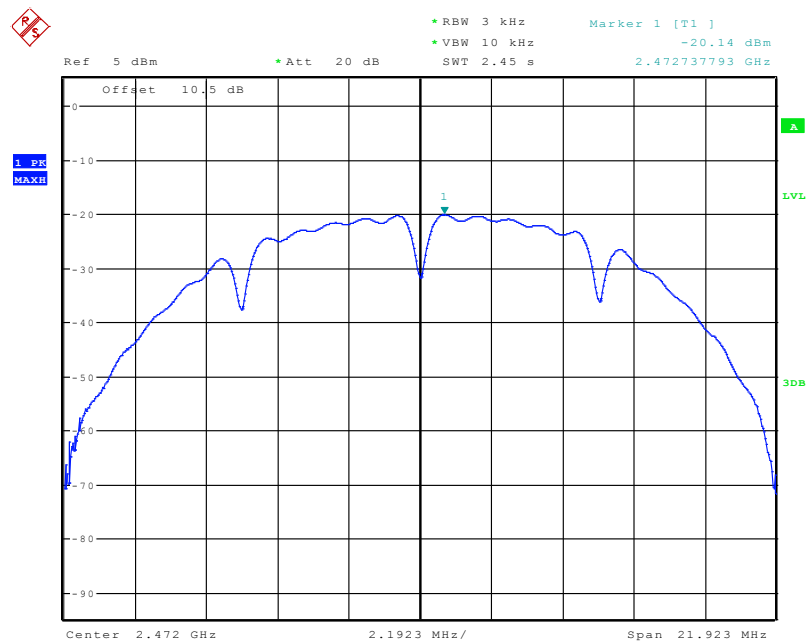


Date: 10.OCT.2019 10:19:06


Power Spectral Density, 802.11g Low Channel

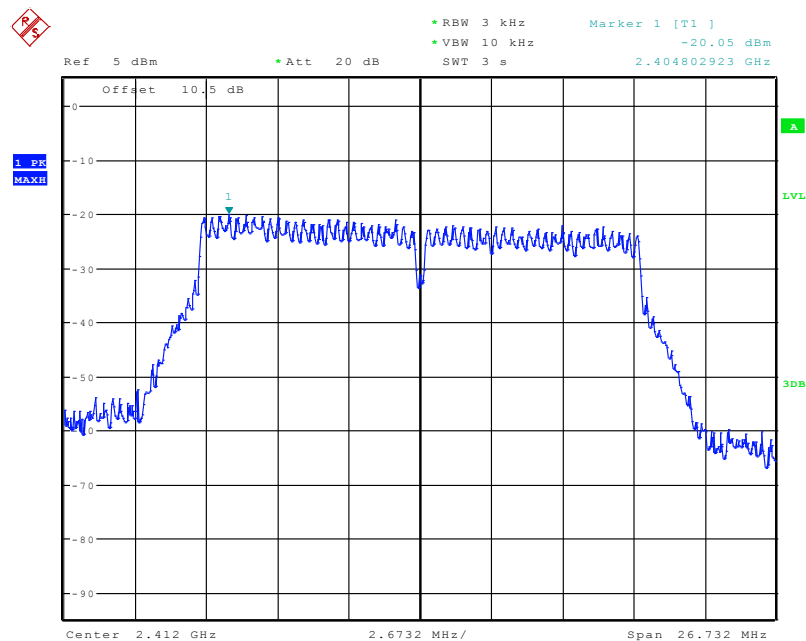

Date: 10.OCT.2019 10:20:13

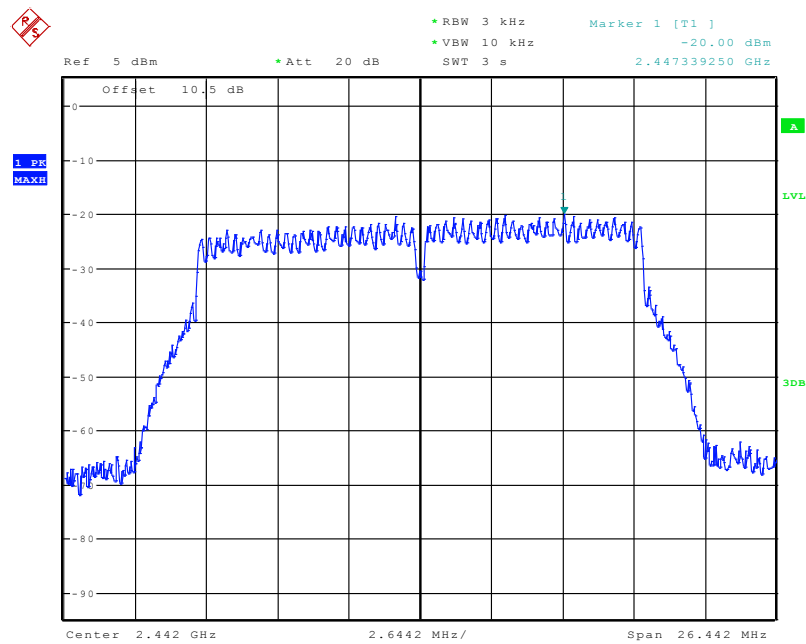
Power Spectral Density, 802.11g Middle Channel

Date: 10.OCT.2019 10:21:33

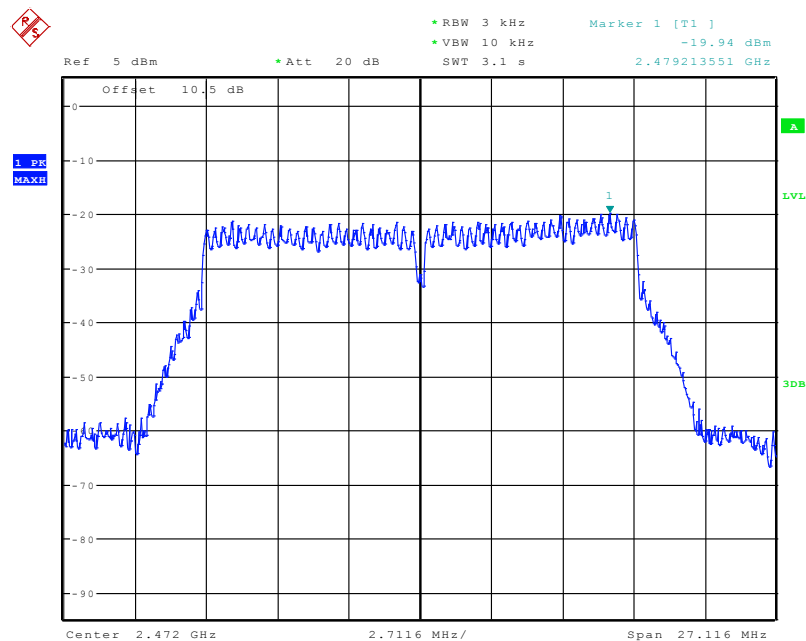Power Spectral Density, 802.11g High Channel


Date: 10.OCT.2019 10:22:48

Power Spectral Density, 802.11n-HT20 Low Channel

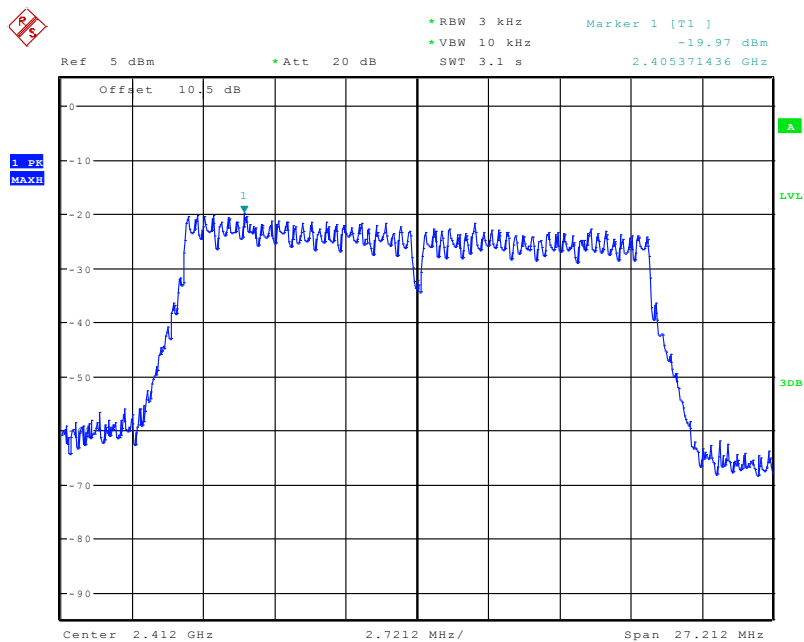


Date: 10.OCT.2019 10:23:46

Power Spectral Density, 802.11n-HT20 Middle Channel

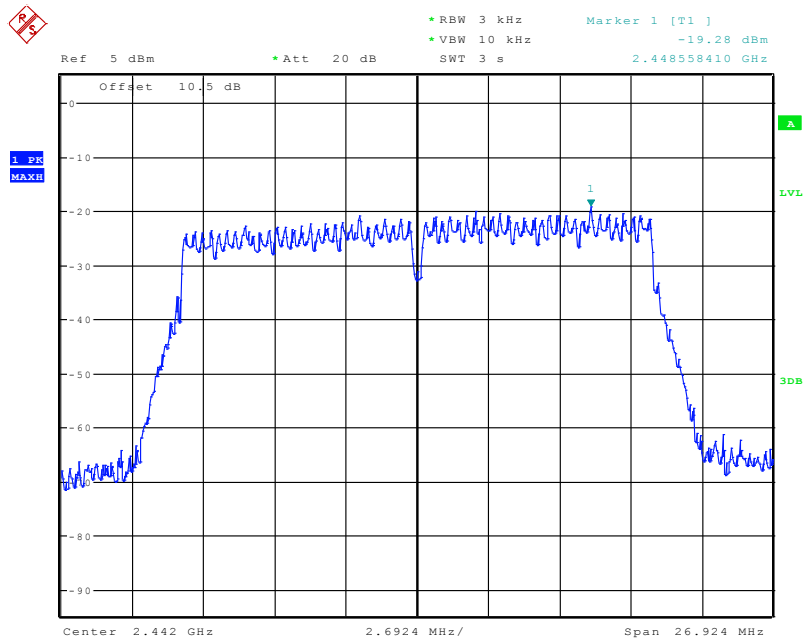


Date: 10.OCT.2019 10:24:43

Power Spectral Density, 802.11n-HT20 High Channel

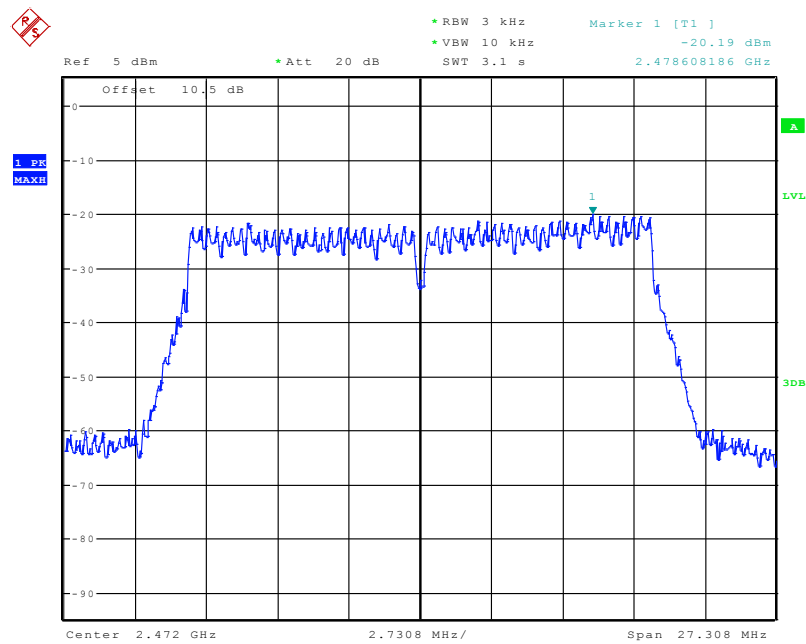


Date: 10.OCT.2019 10:26:40

Power Spectral Density, 802.11n-HT40 Low Channel

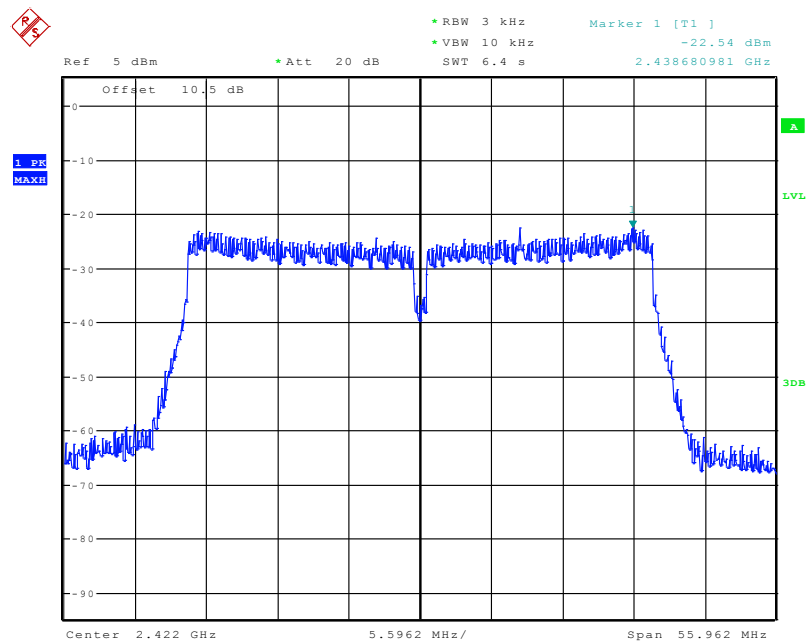


Date: 10.OCT.2019 10:27:43

Power Spectral Density, 802.11n-HT40 Middle Channel

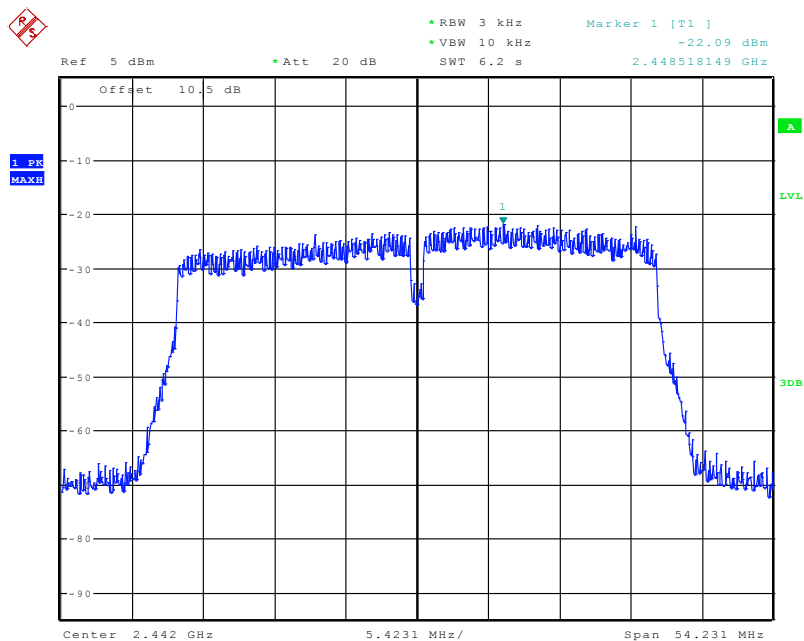


Date: 10.OCT.2019 10:28:49

Power Spectral Density, 802.11n-HT40 High Channel

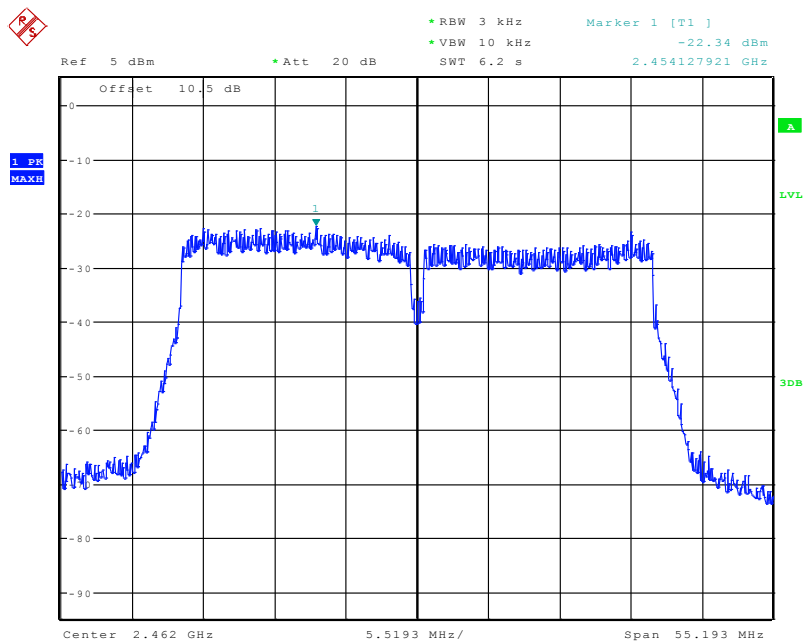


Date: 10.OCT.2019 10:29:48

Power Spectral Density, BLE Low Channel

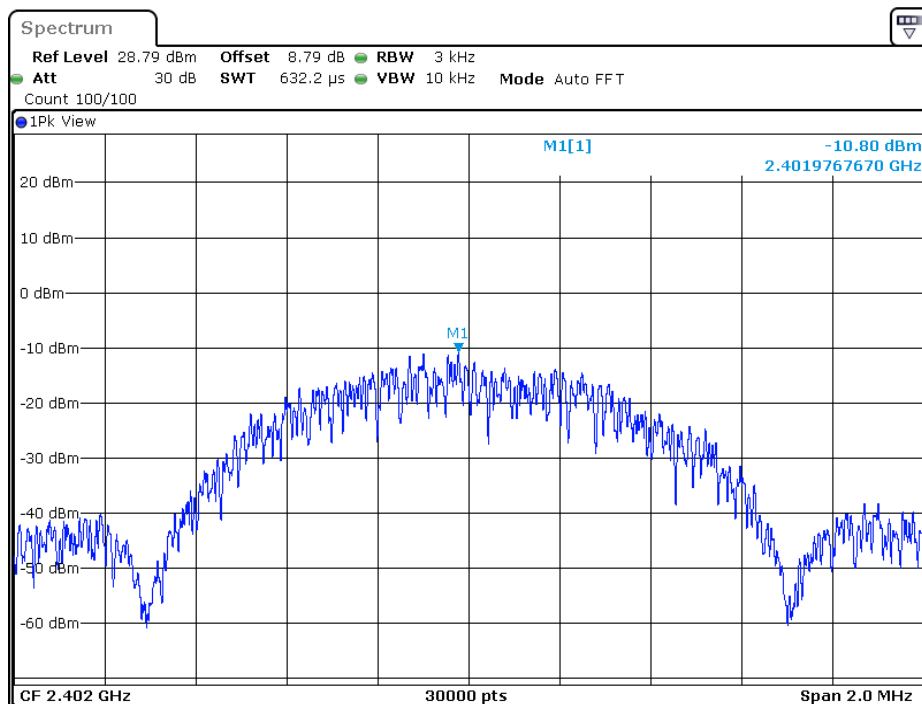


Date: 21.SEP.2019 18:32:46

Power Spectral Density, BLE Middle Channel

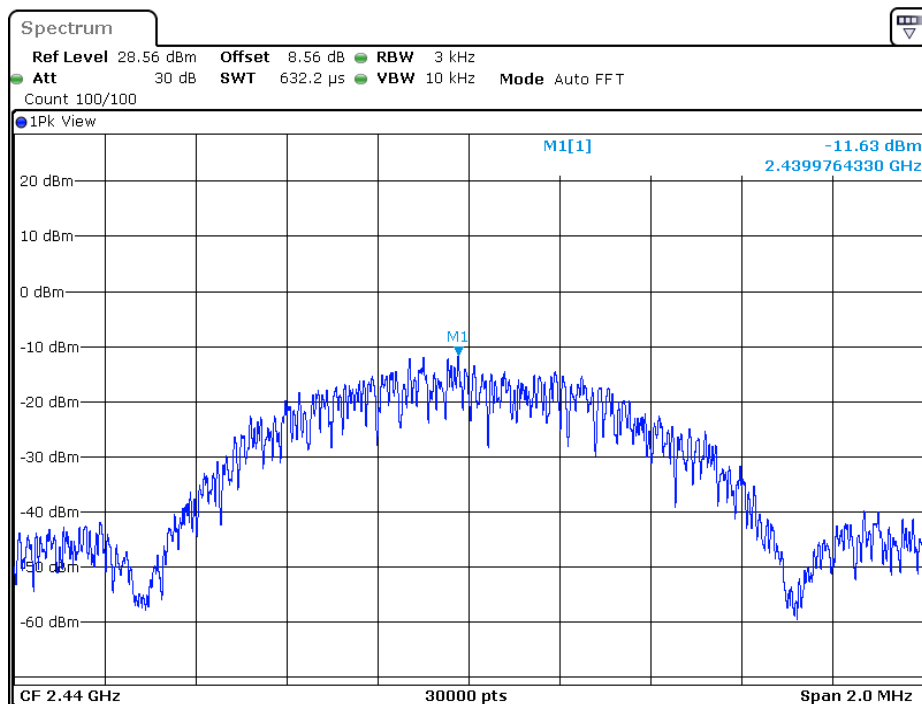

Date: 21.SEP.2019 18:35:09

Power Spectral Density, BLE High Channel

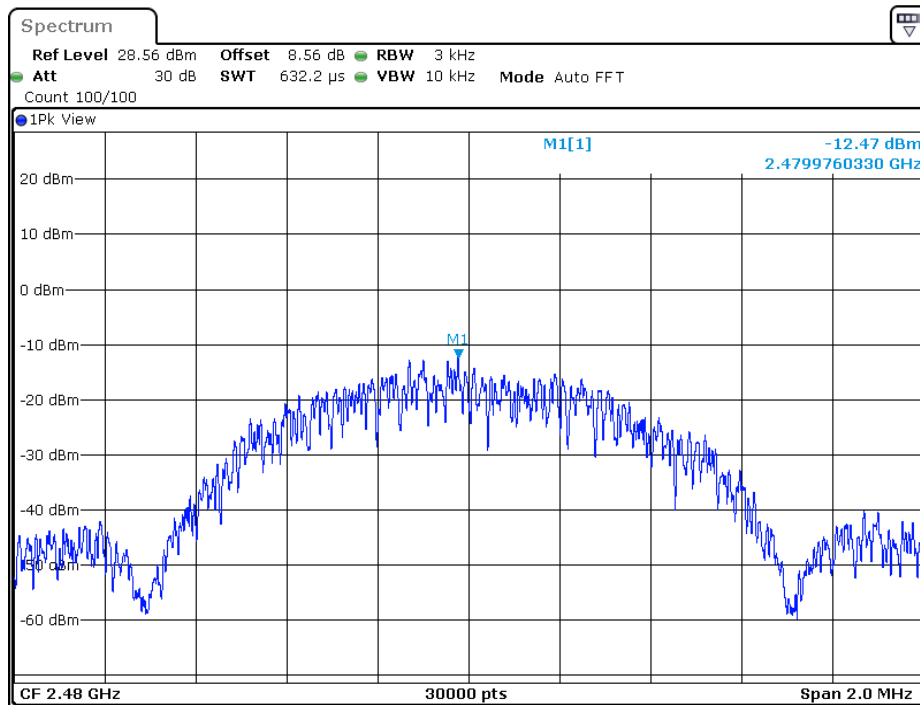

Date: 21.SEP.2019 18:37:58

***** END OF REPORT *****