



BUREAU
VERITAS

Test Report No.:RF 190311N003



Certificate # 2951.01

TEST REPORT

Applicant	Huabo Smart Living Technology Co.,Ltd
Address	Chenghua Industrial Zone,Wenguan Road,Chenghai District,Shantou City,Guangdong China.

Manufacturer or Supplier	Huabo Smart Living Technology Co.,Ltd
Address	Chenghua Industrial Zone,Wenguan Road,Chenghai District,Shantou City,Guangdong China.
Product	Toy RC Monster Spinning Car
Brand Name	Sharper Image
Model	HB2019A
Additional Model & Model Difference:	1007913、1010668、1010669
Date of tests	Mar. 28 to Apr. 09, 2019

the tests have been carried out according to the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.227

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Evans He Project Engineer / EMC Department	Approved by David Huang Supervisor / EMC Department
<i>Evans He</i>	<i>David Huang</i>

Date: Apr. 10, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
2 MEASUREMENT UNCERTAINTY.....	4
3 GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 DESCRIPTION OF TEST MODES.....	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.4 DESCRIPTION OF SUPPORT UNITS	6
4 TEST TYPES AND RESULTS	7
4.1 RADIATED EMISSION MEASUREMENT	7
4.1.1 <i>LIMITS OF RADIATED EMISSION MEASUREMENT</i>	7
4.1.2 <i>TEST INSTRUMENTS</i>	8
4.1.3 <i>TEST PROCEDURES</i>	9
4.1.4 <i>DEVIATION FROM TEST STANDARD</i>	9
4.1.5 <i>TEST SETUP</i>	10
4.1.6 <i>EUT OPERATING CONDITIONS</i>	11
4.1.7 <i>TEST RESULTS</i>	11
4.2 BANDWIDTH MEASUREMENT.....	16
4.2.1 LIMITS OF BANDWIDTH MEASUREMENT	16
4.2.2 TEST INSTRUMENTS	16
4.2.3 TEST PROCEDURE.....	17
4.2.4 DEVIATION FROM TEST STANDARD.....	17
4.2.5 TEST SETUP	17
4.2.6 EUT OPERATING CONDITIONS.....	17
4.2.7 TEST RESULTS	18
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	19
6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	20



Test Report No.:RF 190311N003

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF 190311N003	Original release	Apr. 10, 2019



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C , SECTION 15.227(2015-10)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.207 (a)	AC Power Conducted Emission	N/A	EUT is powered by battery
§15.209 §15.227	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant
§15.203	Antenna Requirement	N/A	No antenna connector is used

NOTE: Test Lab Information:

Lab: Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

Test Lab Address: Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District Shenzhen, Guangdong, 518108, People's Republic of China

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	3.11dB
	30MHz ~ 1GHz	5.12dB
	1GHz ~ 18GHz	5.34dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



BUREAU
VERITAS

Test Report No.:RF 190311N003

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Toy RC Monster Spinning Car
MODEL NO.	HB2019A
ADDITIONAL MODEL	1007913、1010668、1010669
FCC ID	2APYEHB2019A27
NOMINAL VOLTAGE	DC 9V From Battery
MODULATION TYPE	AM
OPERATING FREQUENCY	27.145MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Spring Antenna with 0dBi gain
I/O PORTS	Refer to user's manual

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 190311N003) for detailed product photos.
4. Additional models (see about table) are identical with the test model HB2019A except the appearance、trade name and model no. for trading purpose.



3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on Y axis for radiated emission. The EUT was tested under the following mode.

FREQUENCY	TEST MODES
27.145 MHz	Transmitting

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, 15.227

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit without any other necessary accessories or support units.



BUREAU
VERITAS

Test Report No.:RF 190311N003

4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.227(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [μ V/m]	Field Strength of Fundamental Emission [Average] [μ V/m]
26.96 – 27.28	100,000 (100 dB μ V/m)	10,000 (80 dB μ V/m)

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



BUREAU
VERITAS

Test Report No.:RF 190311N003

4.1.2 TEST INSTRUMENTS

9KHz-30MHz

Instrument	Model	Serial #	Cal Date	Cal Due
EMI Test Receiver	ESL6	1300.5001K06-100262-eQ	Jan. 05, 19	Jan. 04, 20
Active Antenna	AL-130	121031	Feb. 08, 19	Feb. 07, 20
3m Semi-anechoic Chamber	9m*6m*6m	N/A	Oct. 19,18	Oct. 18,21
Test Software	ICP-03A1	N/A	N/A	N/A

30MHz-1GHz

Instrument	Model	Serial #	Cal Date	Cal Due
EMI Test Receiver	ESL6	1300.5001K06-100262-eQ	Jan. 05, 19	Jan. 04, 20
Bilog Antenna	JB6	A110712	Feb. 08, 19	Feb. 07, 20
Signal Amplifier	8447E	443008	Jan. 25,19	Jan. 24,20
3m Semi-anechoic Chamber	9m*6m*6m	N/A	Oct. 19,18	Oct. 18,21
Test Software	ICP-03A1	N/A	N/A	N/A

NOTE:

1. The test was performed in 966 Chamber (a 3m Semi-anechoic chamber).
2. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



4.1.3 TEST PROCEDURES

The basic test procedure was in accordance with ANSI C63.10 (section 6).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. (Below 1000MHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10m chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. (Below 30MHz)
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position Y, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level.
- h. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. Margin value = Emission level – Limit value.
5. Fundamental AV value =PK Emission +AV Factor.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.




BUREAU
VERITAS


Test Report No.:RF 190311N003

4.1.5 TEST SETUP

Below 30MHz

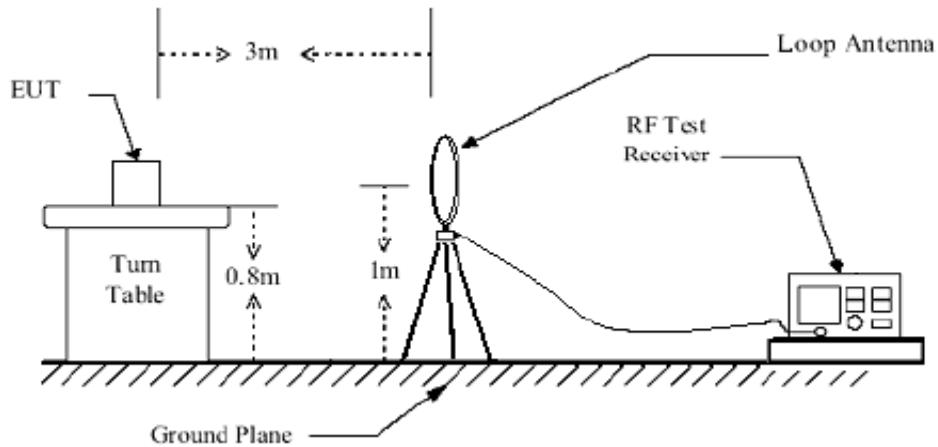

30MHz~1GHz

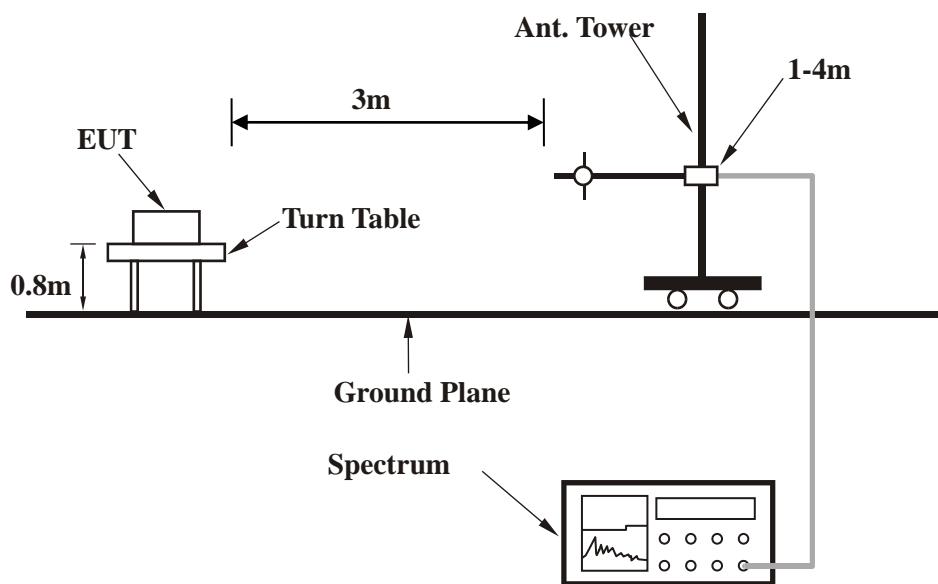

For the actual test configuration, please refer to the attached file (Test Setup Photo).



4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of equipment.
- b. Hold down the TX of button, then the EUT was operating.
- c. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

4.1.7 TEST RESULTS

FIELD STRENGTH OF FUNDAMENTAL

ANTENNA POLARITY: 0°

No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*	27.145(PK)	-11.75	57.03	45.28	100	-54.72
*	27.145(AV)	-5.56	-	39.72	80	-40.28

ANTENNA POLARITY: 90°

No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*	27.145(PK)	-11.75	55.43	43.68	100	-56.32
*	27.145(AV)	-5.56	-	38.12	80	-41.88

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. Margin value = Emission level – Limit value.
4. “*”: Fundamental frequency.
5. The average value of fundamental frequency is: Average value = Peak value + AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (52.73%) = -5.56 dB, Please see page 12~13 for plotted duty.



BUREAU
VERITAS

Test Report No.:RF 190311N003


Duty Cycle:

$$Tp = 70.72\text{ms}$$

$$Ton = Ton1 * Number + Ton2 * Number = 4 * 1.479 + 64 * 0.4902 = 37.2888\text{ms}$$

$$\text{Duty Cycle} = Ton / Tp * 100\% = 37.2888 / 70.72 = 52.73\%$$

Tp=70.72ms

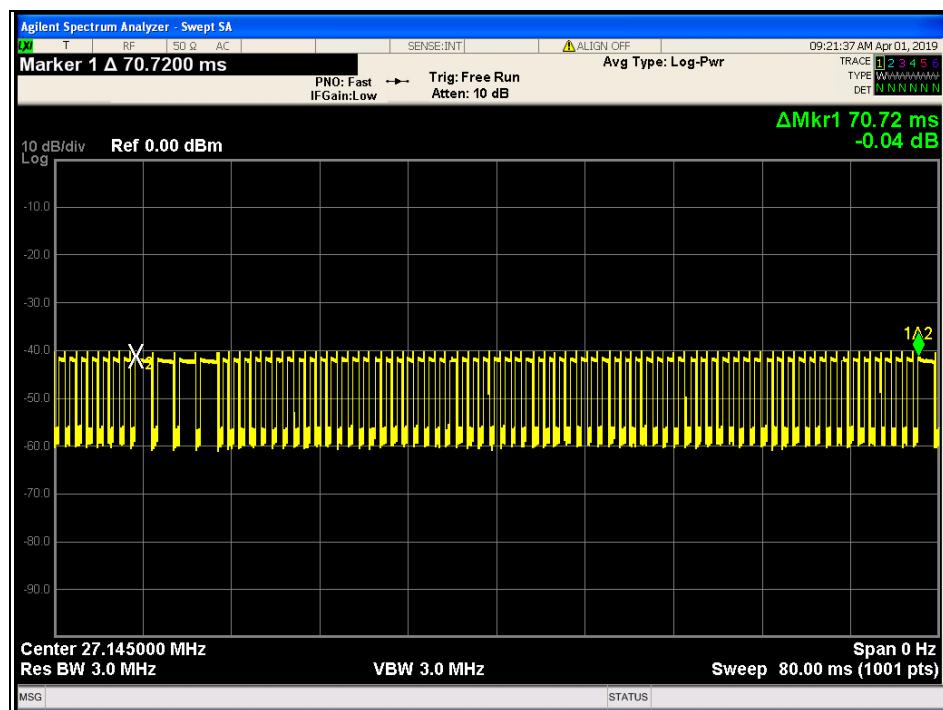





BUREAU
VERITAS

Test Report No.:RF 190311N003

Ton1=1.479ms

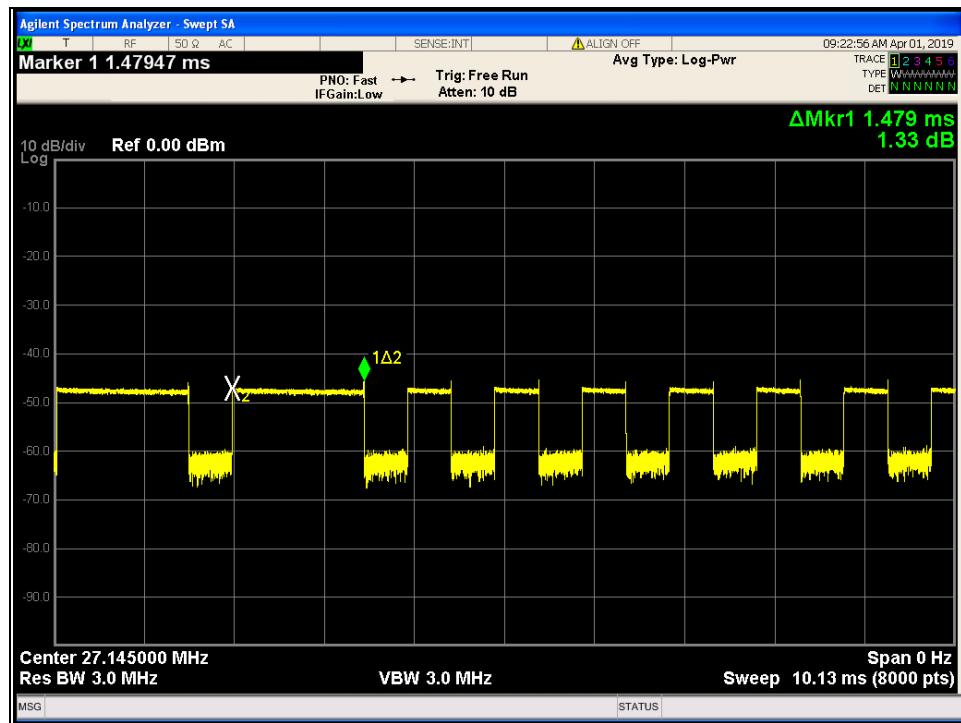

Ton2= 0.4902ms

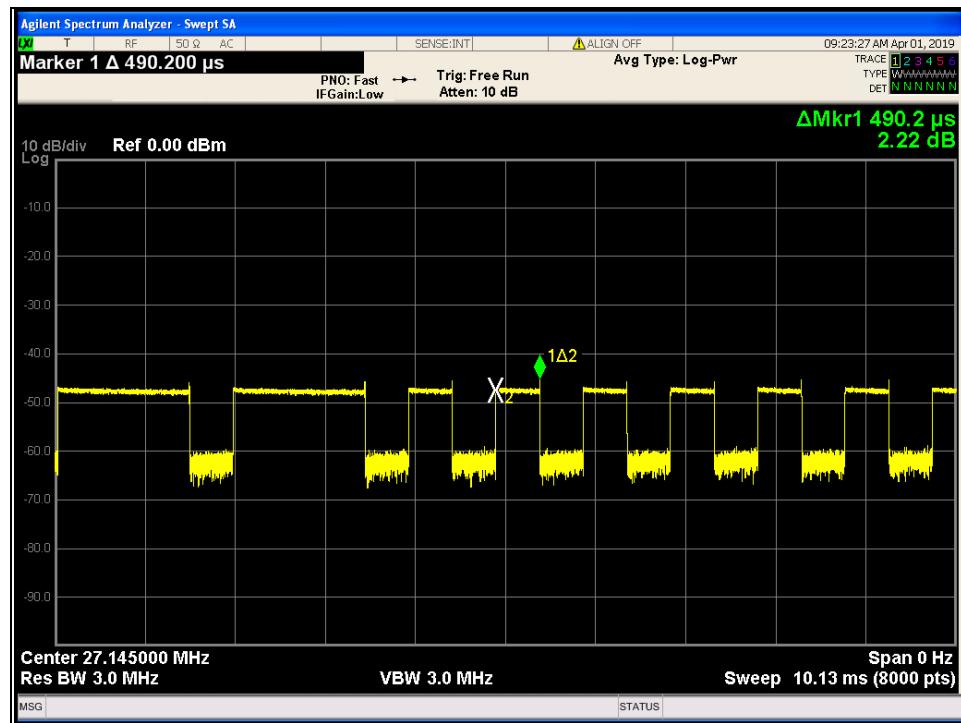



BUREAU
VERITAS


Test Report No.:RF 190311N003

FREQUENCY RANGE	9KHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
-----------------	-------------	-------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree
1	790.6188	28.77	21.29	21.17	2.94	31.83	46.00	-14.17	100	257
2	393.4724	27.51	15.56	22.03	2.01	23.05	46.00	-22.95	100	250
3	287.9904	25.80	13.07	22.29	1.77	18.35	46.00	-27.65	100	254
4	119.8556	27.31	13.87	22.36	1.16	19.98	43.50	-23.52	100	150
5	99.8777	29.29	10.37	22.32	1.12	18.46	43.50	-25.04	100	33
6	37.1550	27.66	15.98	22.26	0.77	22.15	40.00	-17.85	100	293

REMARKS:

1. Result (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Ant_F (dB/m) + Cab_L (dB) - PA_G (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Result level – Limit value

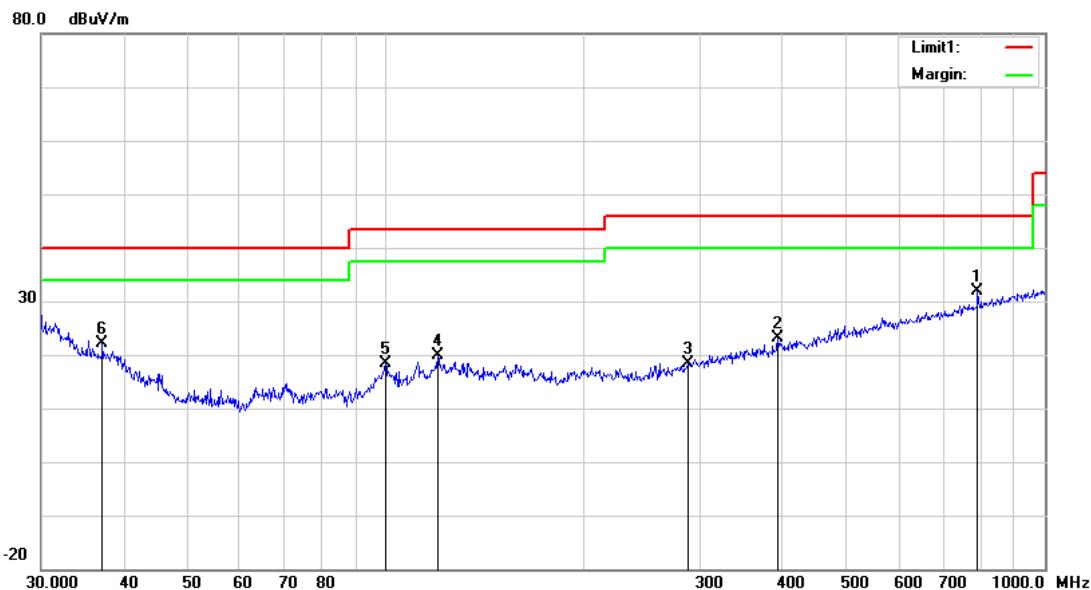



BUREAU
VERITAS


Test Report No.:RF 190311N003

FREQUENCY RANGE	9KHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
-----------------	-------------	-------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m										
No.	Frequency	Reading	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
	(MHz)	(dBuV/m)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	881.4067	28.05	22.30	20.93	3.00	32.42	46.00	-13.58	100	281
2	307.8313	26.34	13.76	22.27	1.83	19.66	46.00	-26.34	100	39
3	119.0180	27.40	13.73	22.36	1.16	19.93	43.50	-23.57	100	222
4	64.6594	31.94	7.53	22.40	0.87	17.94	40.00	-22.06	100	344
5	54.2610	45.16	7.93	22.39	0.78	31.48	40.00	-8.52	100	74
6	31.0706	26.57	20.58	22.27	0.65	25.53	40.00	-14.47	100	251

REMARKS:

1. Result (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Ant_F (dB/m) + Cab_L (dB) - PA_G (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Result level – Limit value

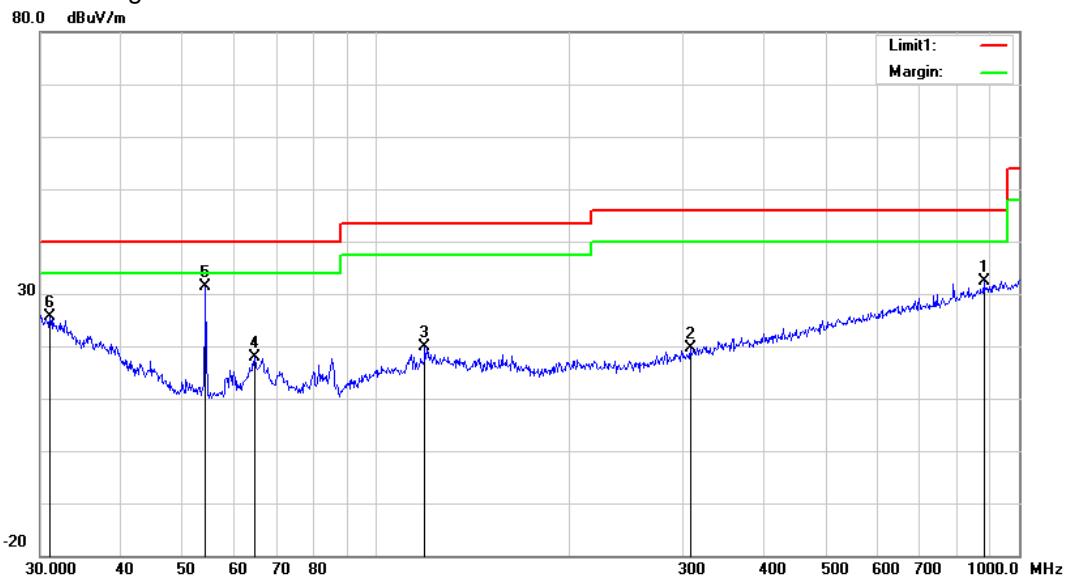



4.2 BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF BANDWIDTH MEASUREMENT

The field strength of any emissions appearing between the band edges and out of band shall be attenuated at least 20 dB below the level of the unmodulated carrier or to the general limits in Section 15.209.

FREQUENCY (MHz)	Limits
	[MHz]
27.145	within 26.96-27.28

4.2.2 TEST INSTRUMENTS

Instrument	Model	Serial #	Cal Date	Cal Due
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	Feb 11, 19	Feb. 10, 20
EMI test receiver	ESL6	1300.5001K06-100262-eQ	Jan, 05, 19	Jan. 04, 20
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	Jan, 05, 19	Jan. 04, 20
Active Antenna	AL-130	121031	Feb. 08, 19	Feb. 07, 20
MXA signal analyzer	N9020A	MY49100060	Jan. 05, 19	Jan. 04, 20
Bilog Antenna (30MHz~6GHz)	JB6	A110712	Feb 08, 19	Feb. 07, 20
Bilog Antenna (30MHz~2GHz)	JB1	A112017	Jan 26, 19	Jan. 25, 20
OPT 010 AMPLIFIER (0.1~1300MHz)	8447E	2727A02430	Dec. 09, 18	Dec. 08, 19
Test Software	EZ-EMC	ver.lcp-03A1	N/A	N/A

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.




4.2.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

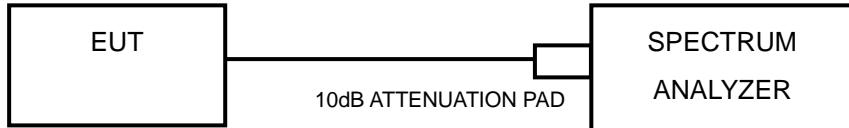

4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6




BUREAU
VERITAS

Test Report No.:RF 190311N003

4.2.7 TEST RESULTS

Lower & Upper Test Frequency Point (MHz)	Test Frequency (MHz)	P/F
Lower	27.1096	PASS
Upper	27.1696	PASS

Test Data:

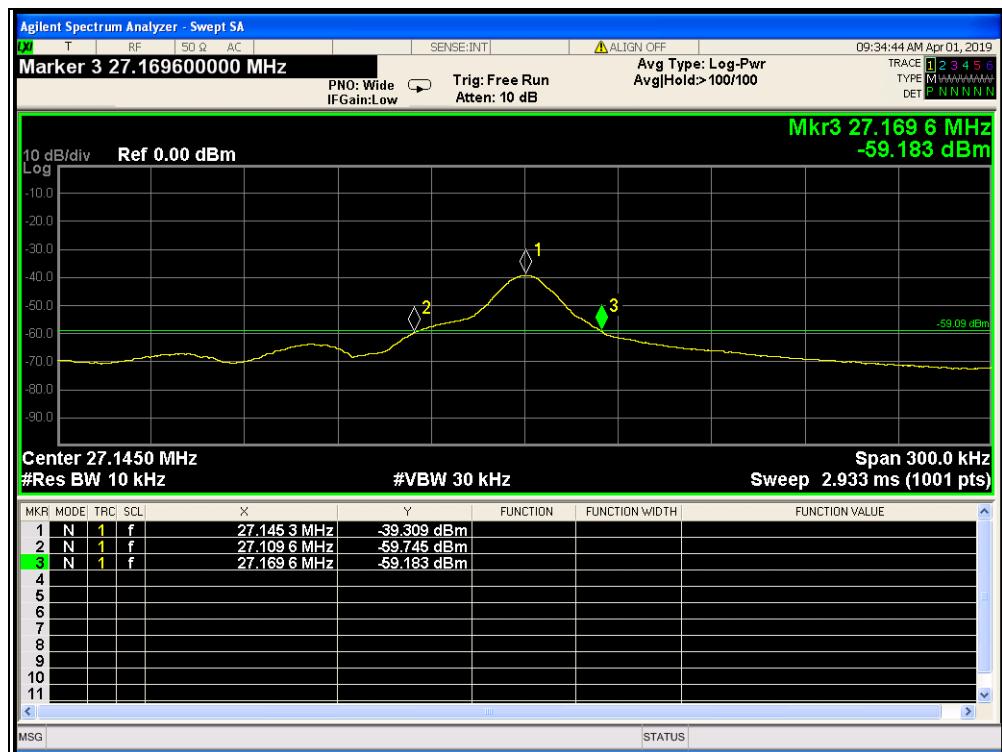



Test Report No.:RF 190311N003

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.:RF 190311N003

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---