



TEST REPORT

FCC PART 15 SUBPART C

Test report

On Behalf of

DONGGUAN COHESION LEATHER GOODS CO., LTD

For

A5 conference folder with 4.000 mah powerbank

Model No.: SIEM-0000-2933

FCC ID: 2AQ2TSIEM-0000-2933

Prepared for : DONGGUAN COHESION LEATHER GOODS CO., LTD
TAOYUAN ROAD, NANSHE DISTRICT, CHASHAN TOWN, DONGGUAN,
GUANGDONG, CHINA

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping
Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Jan. 16, 2019 to Jan. 22, 2019
Date of Report: Jan. 22, 2019
Report Number: HK1901230217E



TEST RESULT CERTIFICATION

Applicant's name : DONGGUAN COHESION LEATHER GOODS CO., LTD
Address : TAOYUAN ROAD, NANSHE DISTRICT, CHASHAN TOWN,
DONGGUAN, GUANGDONG, CHINA
Manufacture's Name : DONGGUAN COHESION LEATHER GOODS CO., LTD
Address : TAOYUAN ROAD, NANSHE DISTRICT, CHASHAN TOWN,
DONGGUAN, GUANGDONG, CHINA
Factory's Name : DONGGUAN COHESION LEATHER GOODS CO., LTD
Address : TAOYUAN ROAD, NANSHE DISTRICT, CHASHAN TOWN,
DONGGUAN, GUANGDONG, CHINA

Product description

Trade Mark: N/A
Product name : A5 conference folder with 4.000 mah powerbank
Model and/or type reference : SIEM-0000-2933
Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.207,
15.209, 15.203
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :

Date (s) of performance of tests : Jan. 16, 2019 to Jan. 22, 2019

Date of Issue : Jan. 22, 2019


Test Result : **Pass**

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

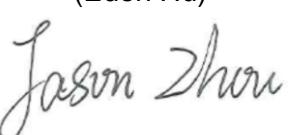Authorized Signatory : 

(Jason Zhou)



Table of Contents	Page
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	6
2.4 MEASUREMENT INSTRUMENTS LIST	7
3. RADIATED EMISSION	8
3.1 TEST LIMIT	8
3.2. MEASUREMENT PROCEDURE	9
3.3. TEST SETUP	10
3.4. TEST RESULT	11
4. BANDWIDTH	14
4.1. MEASUREMENT PROCEDURE	14
4.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
4.3. MEASUREMENT RESULTS	15
5. LINE CONDUCTED EMISSION TEST	16
5.1. LIMITS OF LINE CONDUCTED EMISSION TEST	16
5.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	16
5.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	17
5.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	17
5.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	18
6. PHOTOGRAPH OF TEST	20
7. PHOTOGRAPHS OF EUT	22



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

RULES	DESCRIPTION OF TEST	RESULT
FCC §15.203	Antenna Requirement	Compliant
FCC §15.209	Radiated Emission	Compliant
FCC §15.215	Bandwidth	Compliant
FCC §15.207	Conducted Emission	Compliant

1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road,
Heping Community, Fuhai Street, Bao'an District, Shenzhen,
Guangdong, China

IC Registration No.: 21210

FCC Registration No.: CN1229

Test Firm Registration Number : 616276

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Operation Frequency	137.6kHz
Maximum field strength	54.25dBuV/m(Peak)@3m
Number of channels	1
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Hardware Version	V1.0
Software Version	V1.0
Power Supply	DC 3.7V by battery or DC 5V by adapter



2.2 OPERATION OF EUT DURING TESTING


NO.	TEST MODE DESCRIPTION
1	Wireless charging Mode(Full load)
2	Wireless charging Mode(half load)
3	Wireless charging Mode(Null load)

Note:

1. The mode 1 was the worst case and only the data of the worst case record in this report.

2.3 DESCRIPTION OF TEST SETUP

Configure :

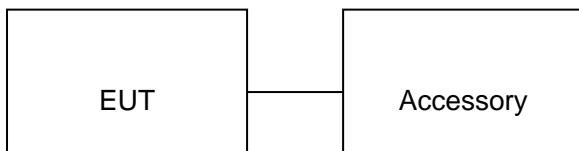

Item	Equipment	Model No.	ID or Specification	Remark
1	Adapter	RP-PC007	DC 5V3A or DC 9V/2A	Accessory
2	Wireless Load	N/A	5W	Support



2.4 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 27, 2018	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2018	1 Year
3.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	1 Year
4.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 27, 2018	1 Year
5.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 27, 2018	1 Year
6.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 27, 2018	1 Year
7.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 27, 2018	1 Year
8.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 27, 2018	N/A
9.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 27, 2018	3 Year



3. RADIATED EMISSION

3.1 TEST LIMIT

Standard FCC 15.209 and RSS-GEN

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		µV/m	dB(µV)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



3.2. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

3.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

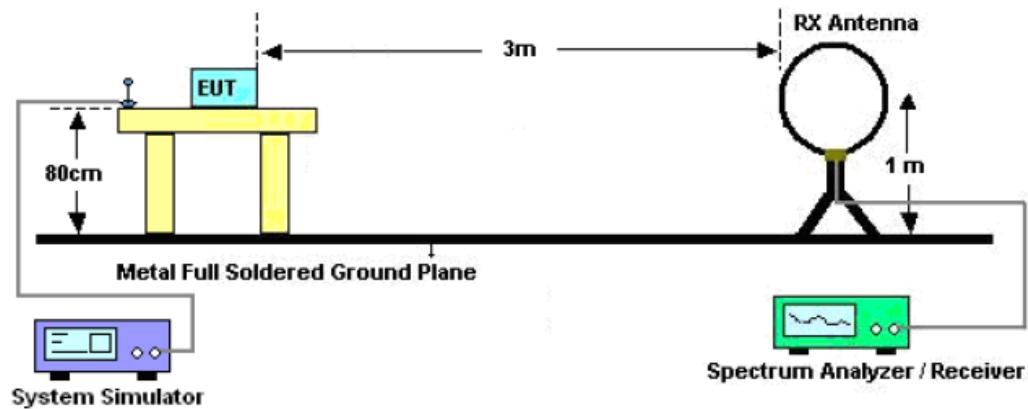

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

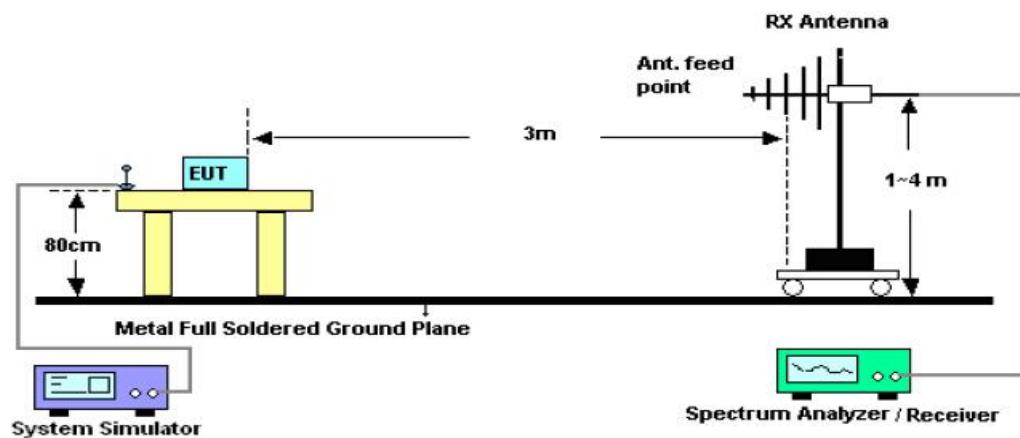



3.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) Peak	Limit dB(uV/m) Average	Margin dB	Pass/Fail
0.1376	Face	43.85	10.4	54.25	104.89	50.64	Pass
0.1376	Side	36.71	10.4	47.11	104.89	57.78	Pass

Note: No other emissions found between lowest internal used/generated frequencies to 30MHz. The peak level of the emission is less than the average limit, so the average level shall be less than the limit without test.



RADIATED EMISSION 30MHz- 1GHZ


EUT :	A5 conference folder with 4.000 mah powerbank	Model Name. :	SIEM-0000-2933
Temperature :	20 °C	Relative Humidity:	48%
Pressure :	1010 hPa	Test Voltage :	Normal
Test Mode :	Mode 1	Polarization :	Horizontal



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
1		78.5000	15.00	15.27	30.27	40.00	-9.73	peak			
2		177.1167	16.06	17.43	33.49	43.50	-10.01	peak			
3		602.3000	5.76	26.88	32.64	46.00	-13.36	peak			
4		709.0000	7.86	28.35	36.21	46.00	-9.79	peak			
5		810.8500	5.41	30.55	35.96	46.00	-10.04	peak			
6	*	941.8000	5.93	32.06	37.99	46.00	-8.01	peak			

RESULT: PASS

EUT :	A5 conference folder with 4.000 mah powerbank	Model Name. :	SIEM-0000-2933
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	Normal
Test Mode :	Mode 1	Polarization :	Vertical

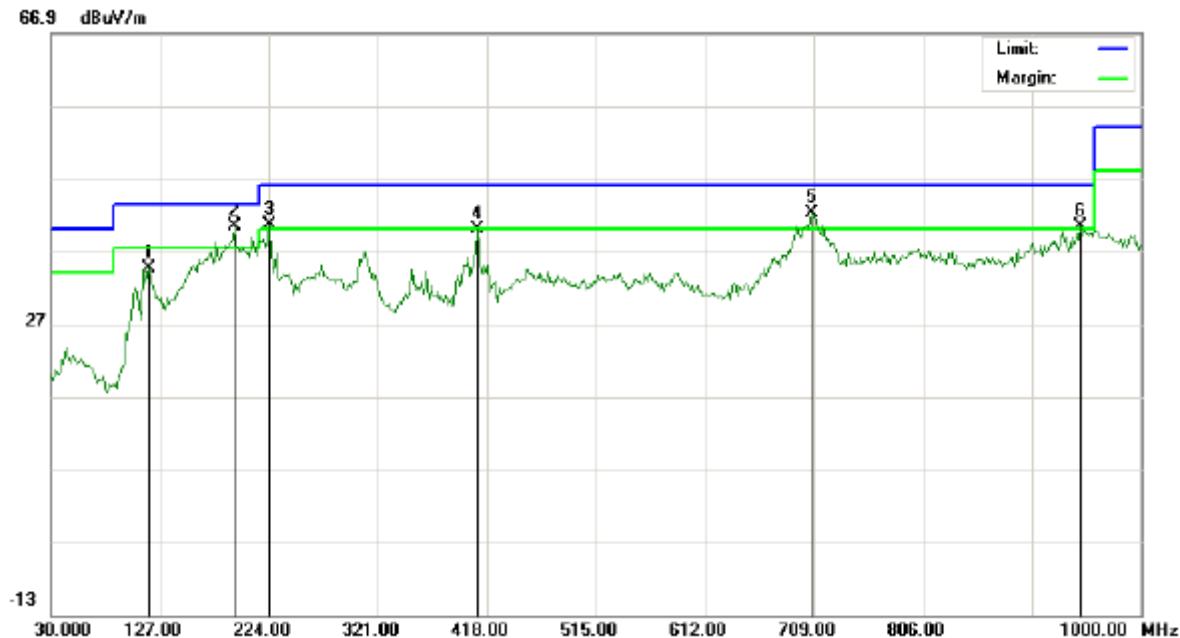

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
1		117.3000	16.85	17.71	34.56	43.50	-8.94	peak			
2	*	193.2833	23.94	16.42	40.36	43.50	-3.14	peak			
3	!	224.0000	23.01	17.52	40.53	46.00	-5.47	peak			
4		409.9167	16.81	23.18	39.99	46.00	-6.01	peak			
5	!	707.3833	13.80	28.32	42.12	46.00	-3.88	peak			
6	!	946.6500	8.27	32.10	40.37	46.00	-5.63	peak			

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


The mode 1 which operate with maximum output power was the worst case and only the data of the worst case record in this report.

4. BANDWIDTH

4.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Set the EUT Work on operation frequency.
3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a channel
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

4.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

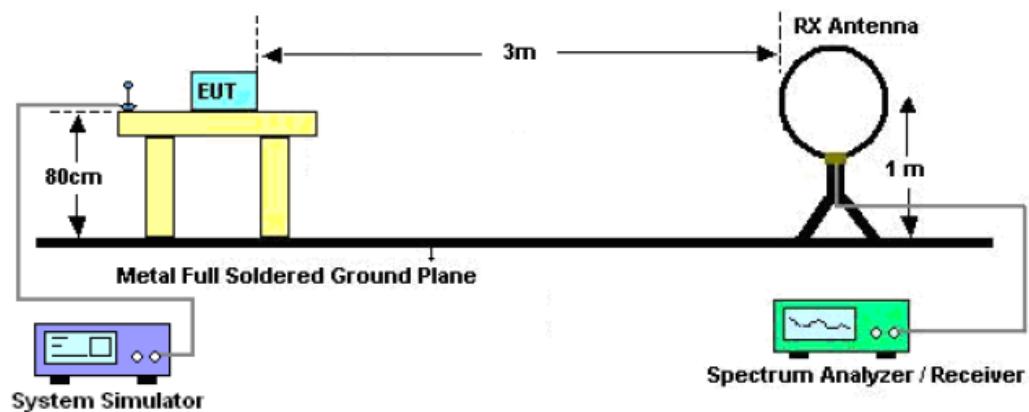



4.3. MEASUREMENT RESULTS

TEST ITEM	BANDWIDTH
TEST MODULATION	FSK

Frequency (KHz)	Test Data (Hz) -20dB Bandwidth	Criteria
136.7	821	PASS

TEST PLOT OF BANDWIDTH



5. LINE CONDUCTED EMISSION TEST


5.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

5.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

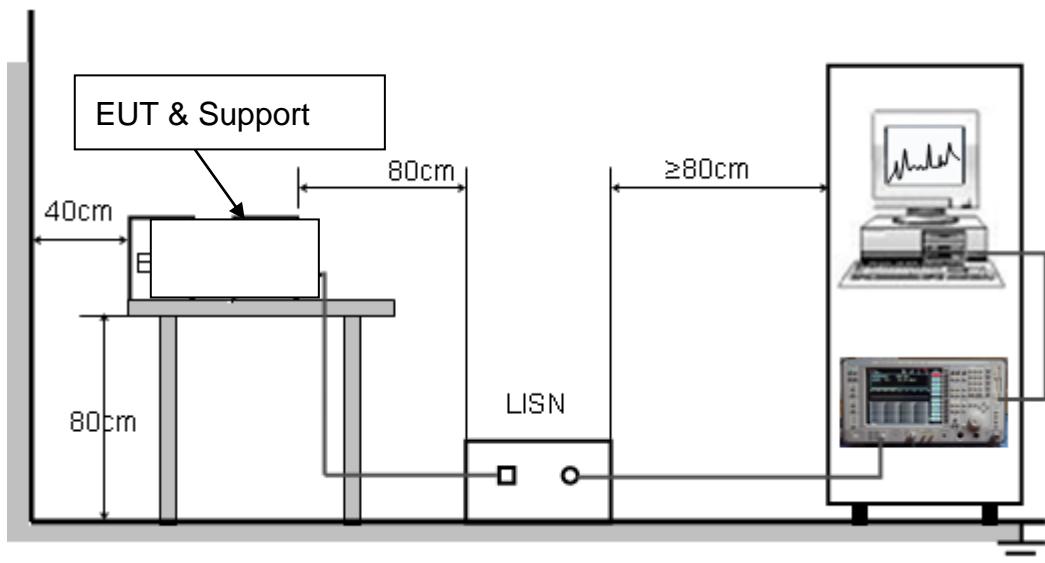



5.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received charging voltage by adapter which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

5.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

5.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

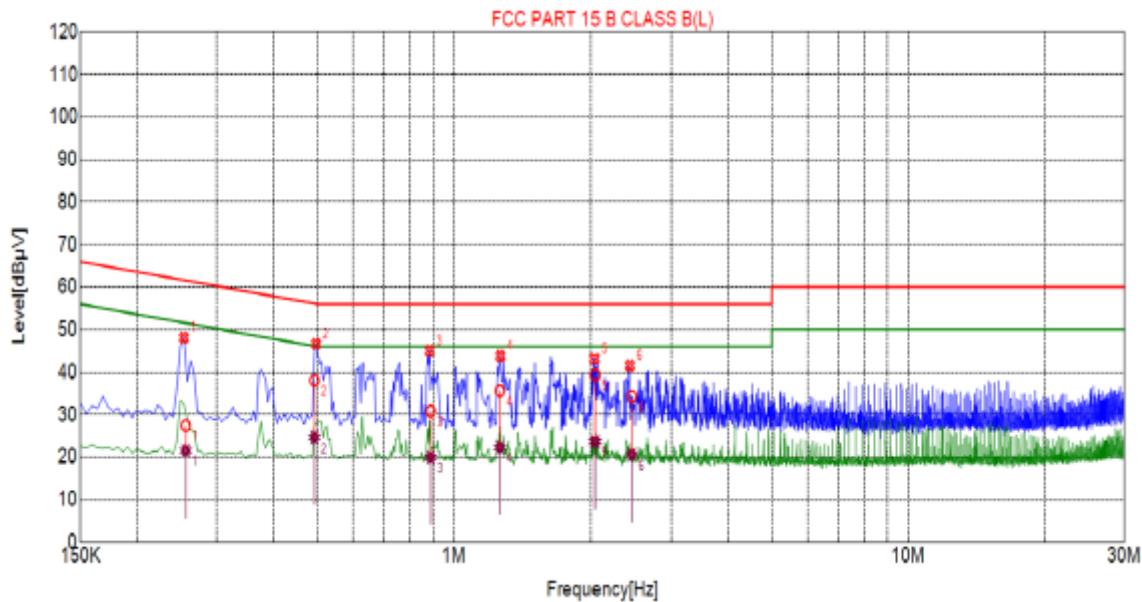

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.2535	48.15	10.04	61.64	13.49	PK
2	0.4965	46.63	10.04	56.06	9.43	PK
3	0.8835	45.01	10.06	56.00	10.99	PK
4	1.2660	43.83	10.09	56.00	12.17	PK
5	2.0355	43.17	10.15	56.00	12.83	PK
6	2.4315	41.56	10.18	56.00	14.44	PK


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dB μ V]	QP Limit [dB μ V]	QP Margin [dB]	AV Value [dB μ V]	AV Limit [dB μ V]	AV Margin [dB]
1	0.2559	10.04	27.45	61.56	34.11	21.59	51.55	29.97
2	0.4921	10.04	38.09	56.13	18.04	24.71	46.13	21.42
3	0.8863	10.06	30.87	56.00	25.13	20.02	46.00	25.98
4	1.2624	10.09	35.61	56.00	20.39	22.35	46.00	23.65
5	2.0428	10.15	39.38	56.00	16.62	23.73	46.00	22.27
6	2.4554	10.19	34.31	56.00	21.69	20.65	46.00	25.35

RESULT: PASS



LINE CONDUCTED EMISSION TEST-N

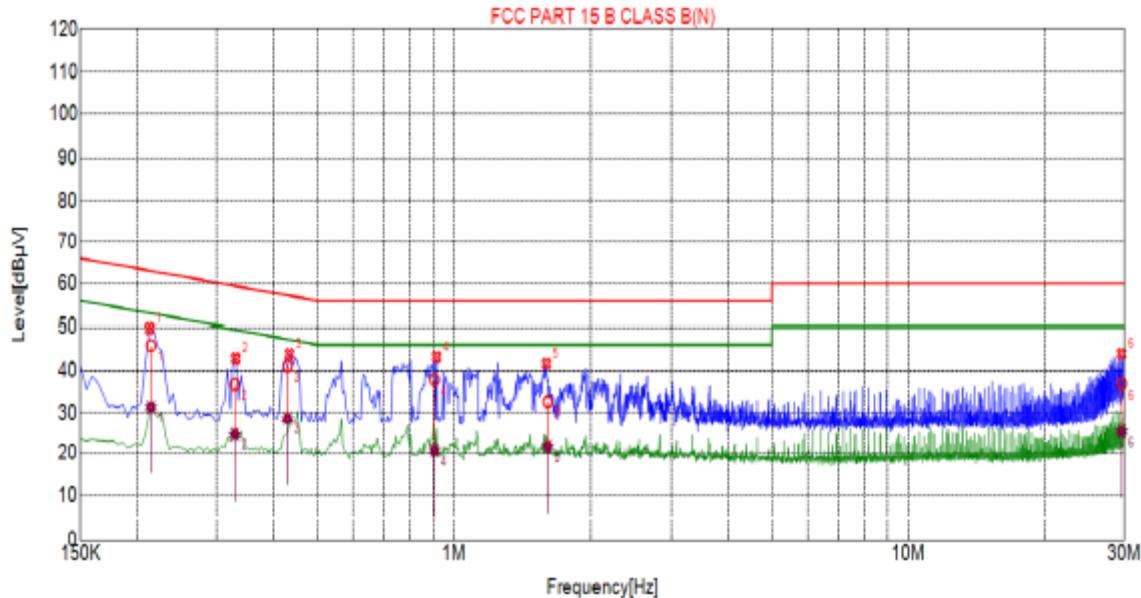

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.2130	49.60	10.05	63.09	13.49	PK
2	0.3300	42.79	10.04	59.45	16.66	PK
3	0.4335	43.84	10.05	57.19	13.35	PK
4	0.9150	43.14	10.06	56.00	12.86	PK
5	1.5990	41.59	10.11	56.00	14.41	PK
6	29.5530	43.90	10.26	60.00	16.10	PK

Final Data List


NO.	Freq. [MHz]	Factor [dB]	QP Value [dB μ V]	QP Limit [dB μ V]	QP Margin [dB]	AV Value [dB μ V]	AV Limit [dB μ V]	AV Margin [dB]
1	0.2144	10.05	45.82	63.03	17.21	31.31	53.03	21.72
2	0.3283	10.04	36.73	59.49	22.76	24.53	49.49	24.96
3	0.4292	10.05	41.07	57.27	16.20	28.52	47.27	18.75
4	0.9059	10.06	37.83	56.00	18.17	20.72	46.00	25.28
5	1.6090	10.11	32.66	56.00	23.34	21.65	46.00	24.35
6	29.5872	10.26	36.89	60.00	23.11	25.24	50.00	24.76

RESULT: PASS


Note: The mode 1 which operate with maximum output power was the worst case and only the data of the worst case record in this report.

6. PHOTOGRAPH OF TEST

Radiated Emission

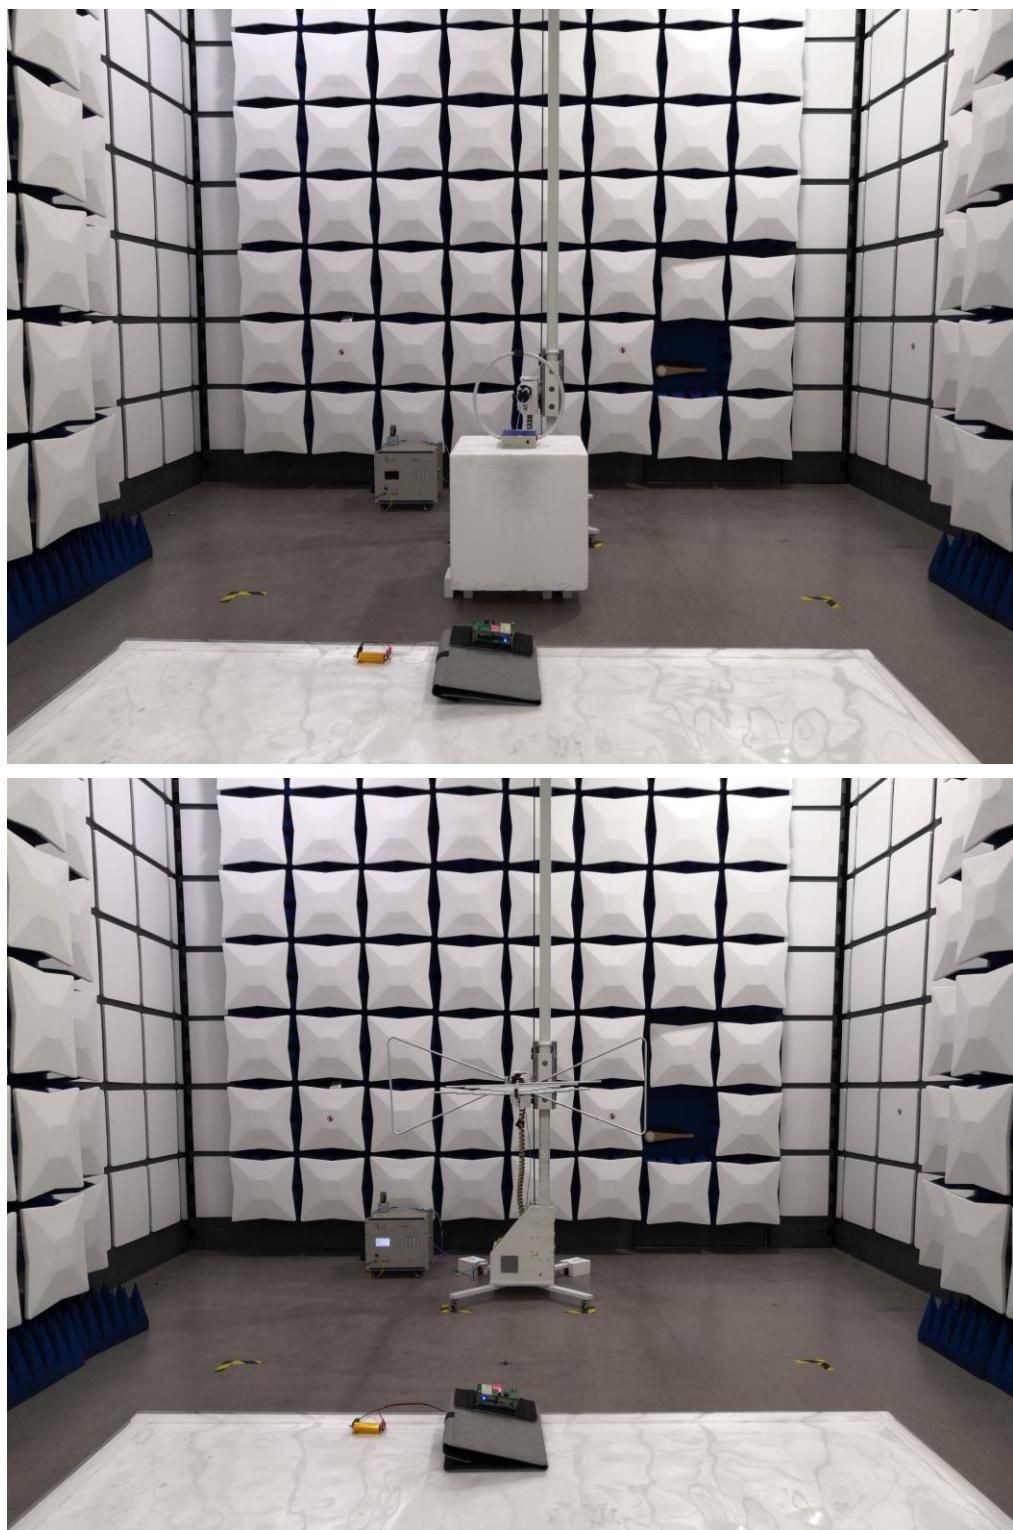

Conducted Emission

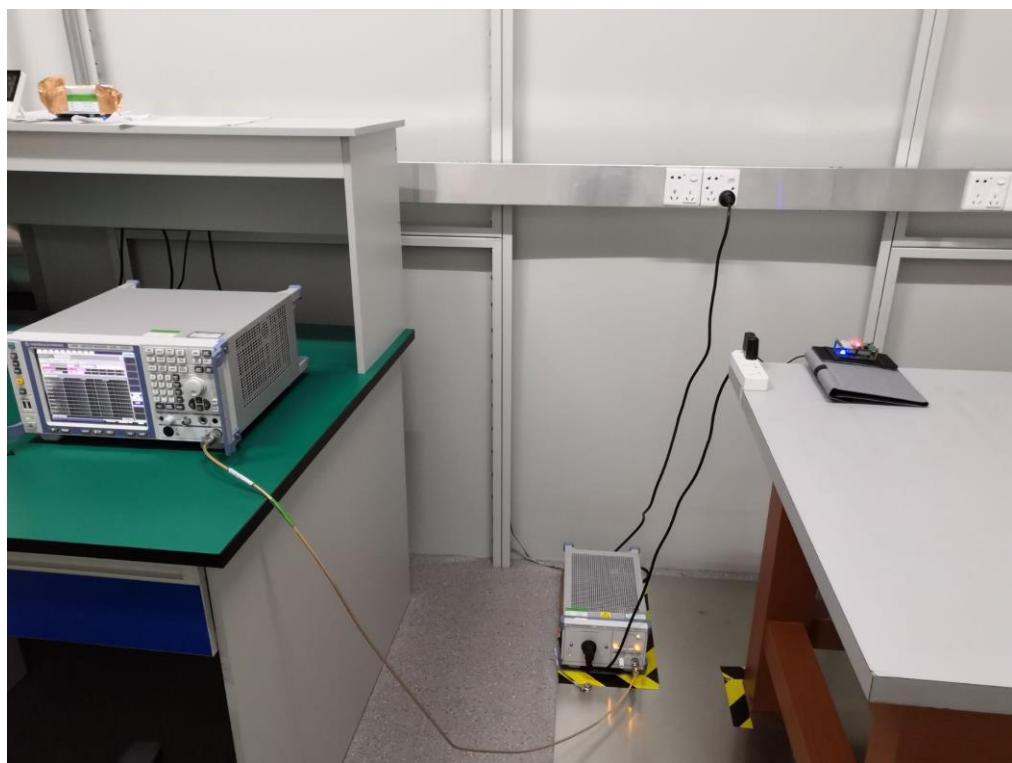

7. PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT






FRONT VIEW OF EUT




BACK VIEW OF EUT

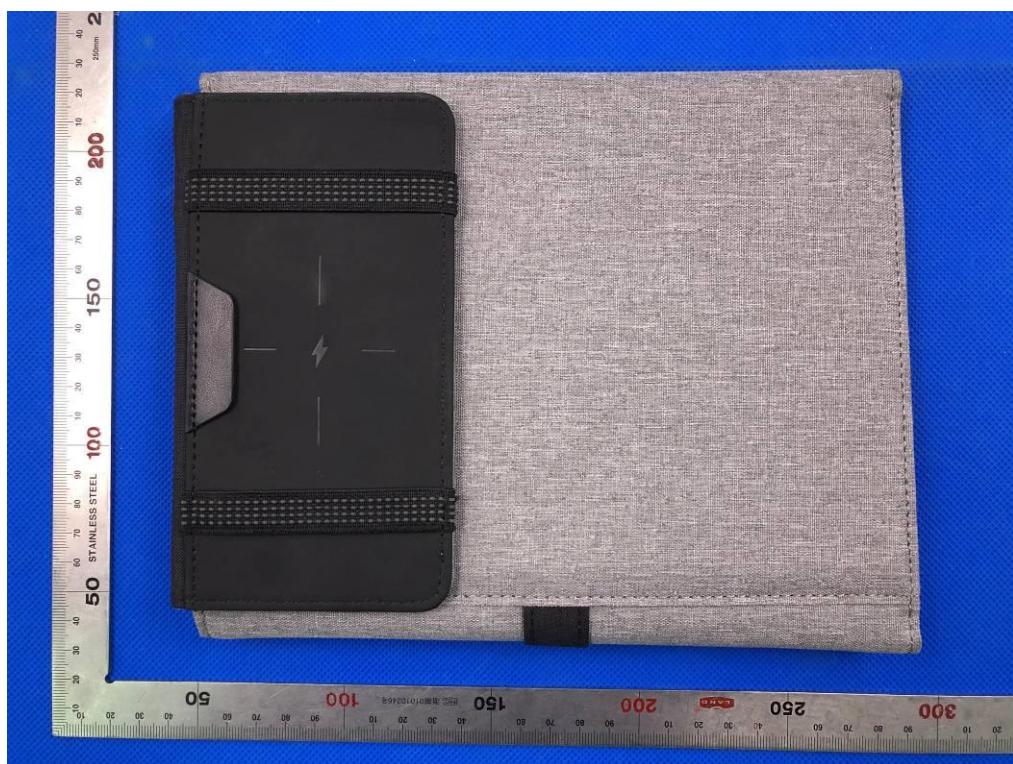




LEFT VIEW OF EUT

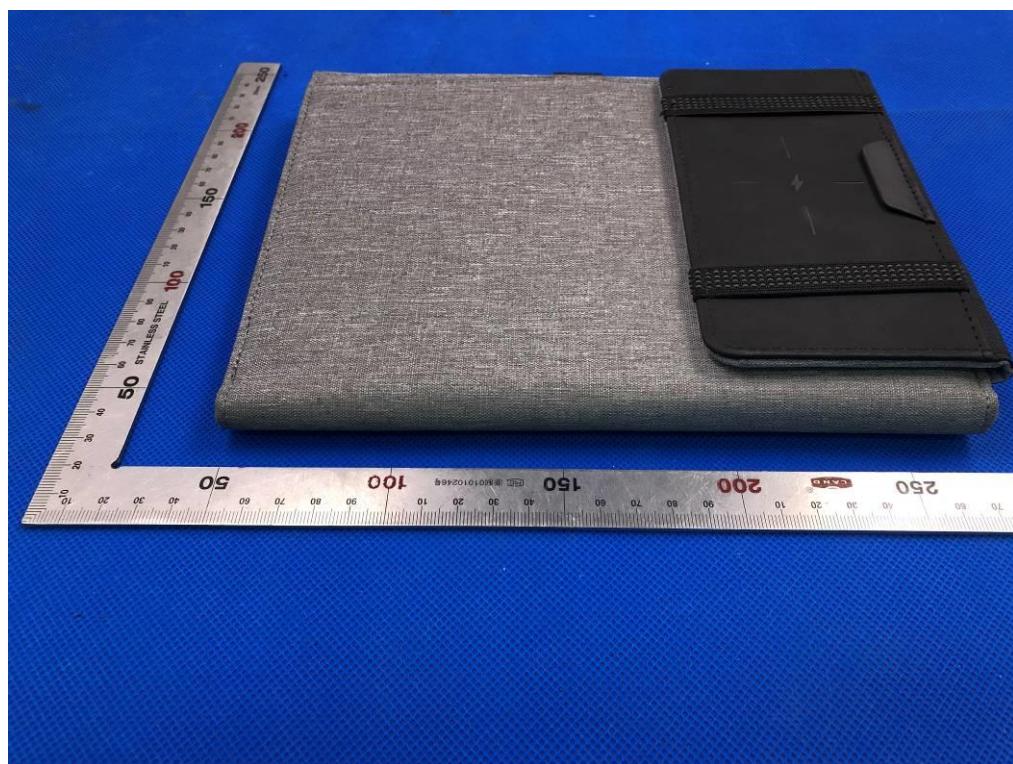


RIGHT VIEW OF EUT

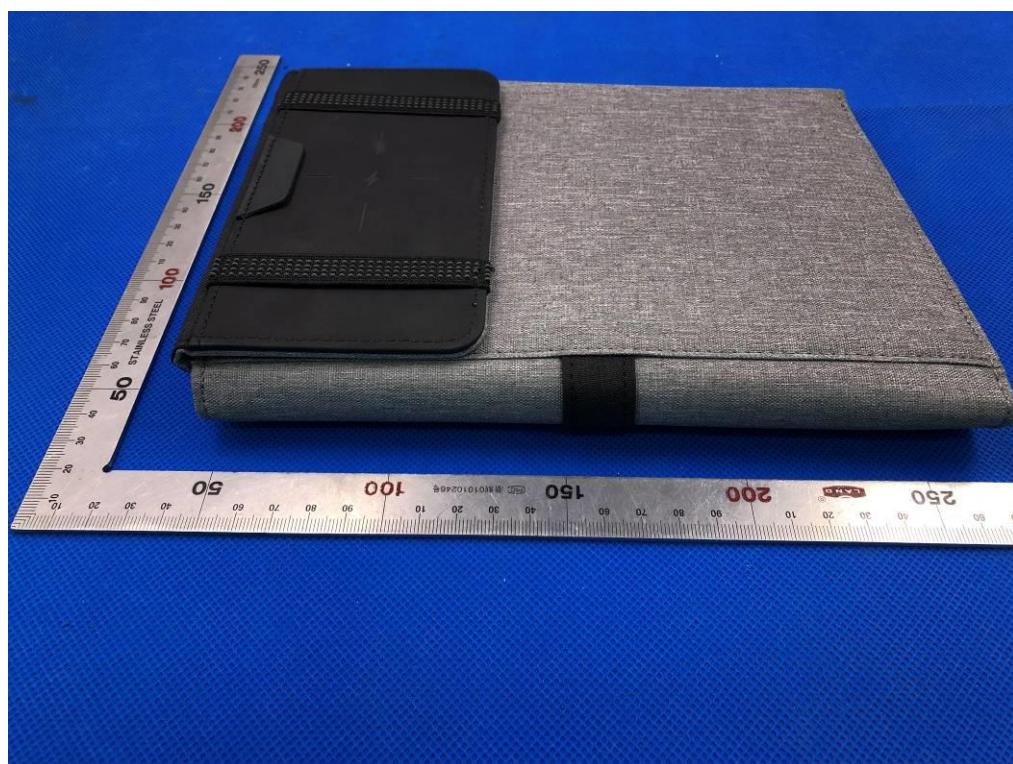


OPEN VIEW-1 OF EUT




OPEN VIEW-2 OF EUT

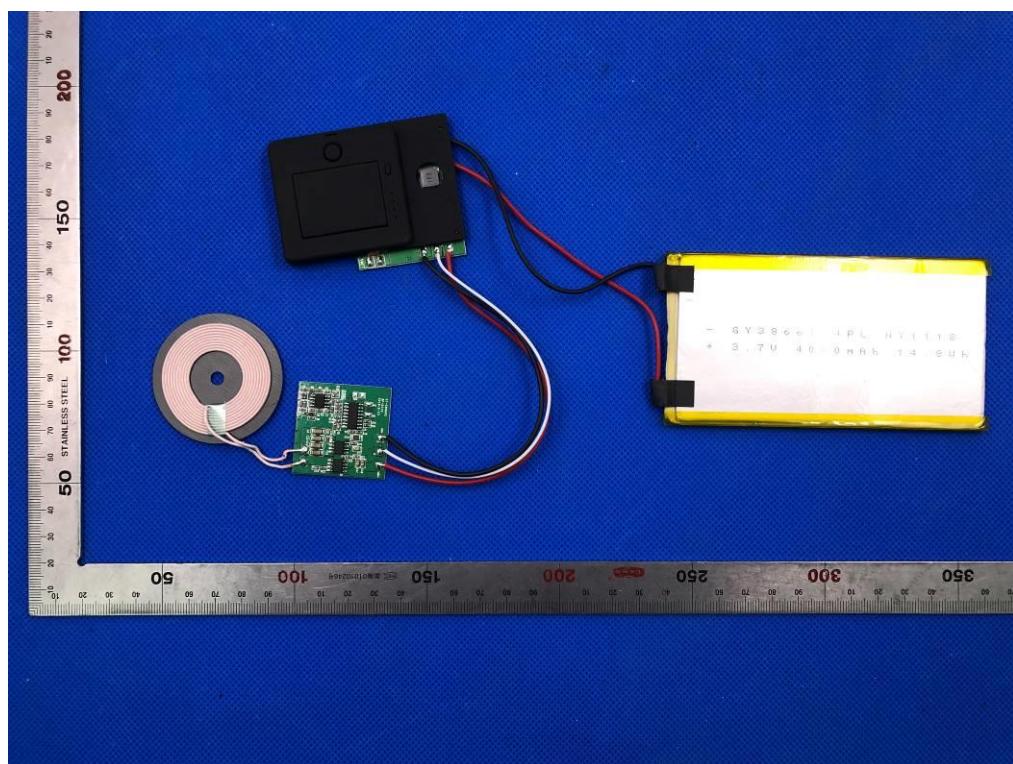

INTERNAL VIEW-1 OF EUT

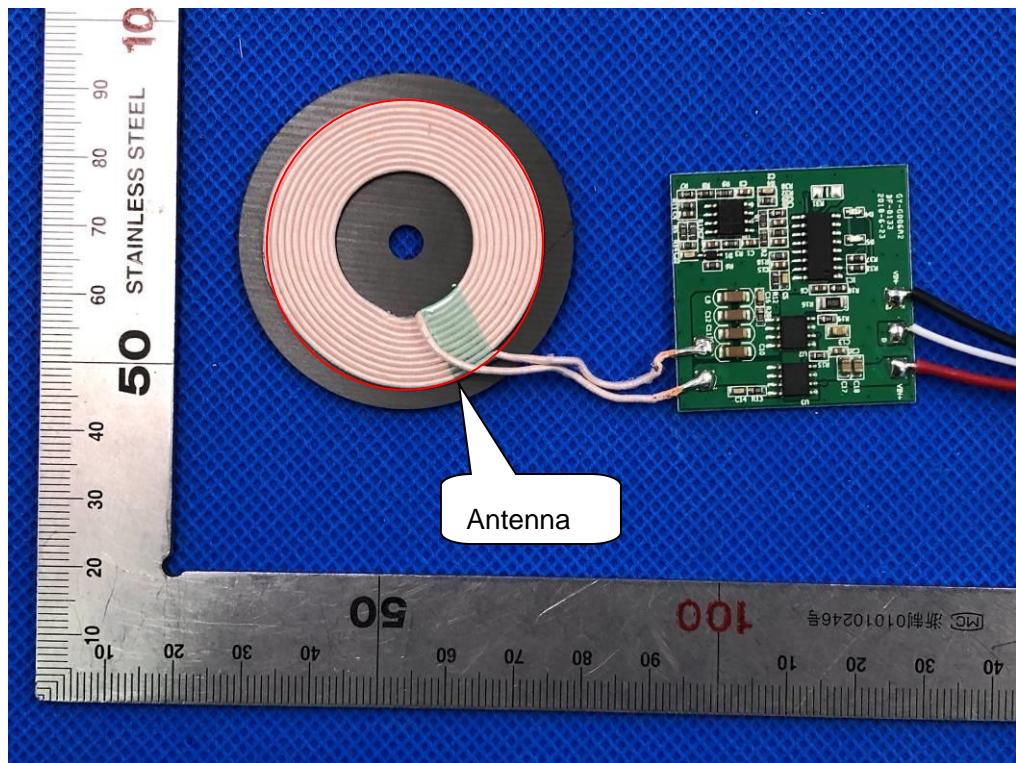


INTERNAL VIEW-2 OF EUT

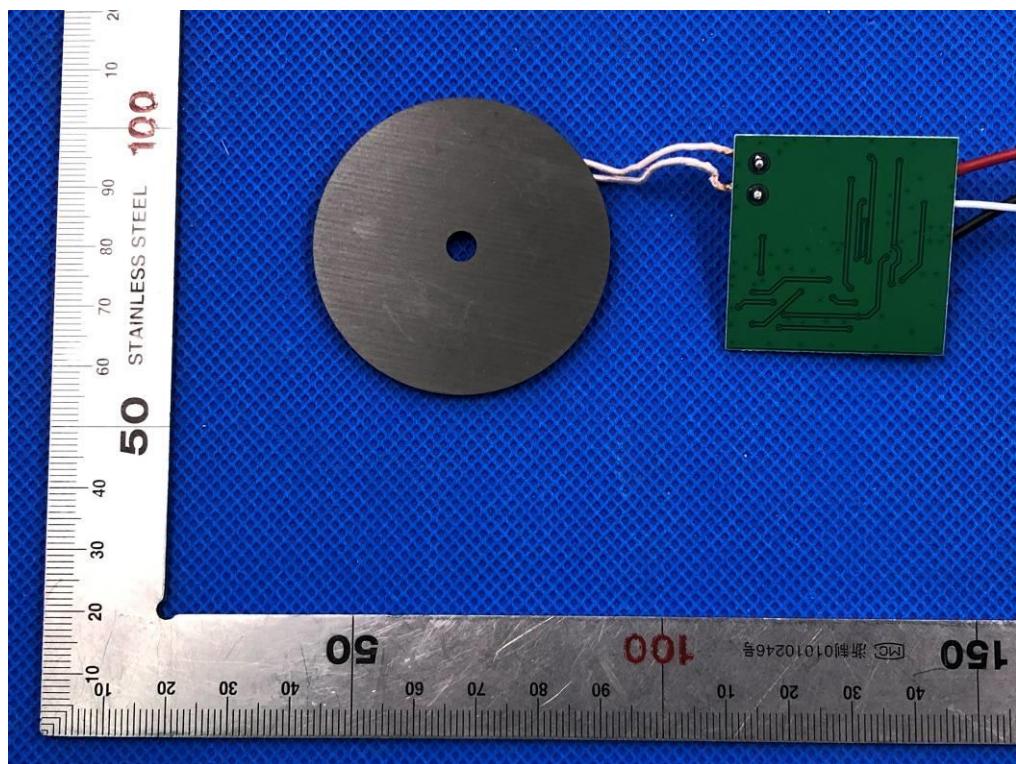




INTERNAL VIEW-3 OF EUT

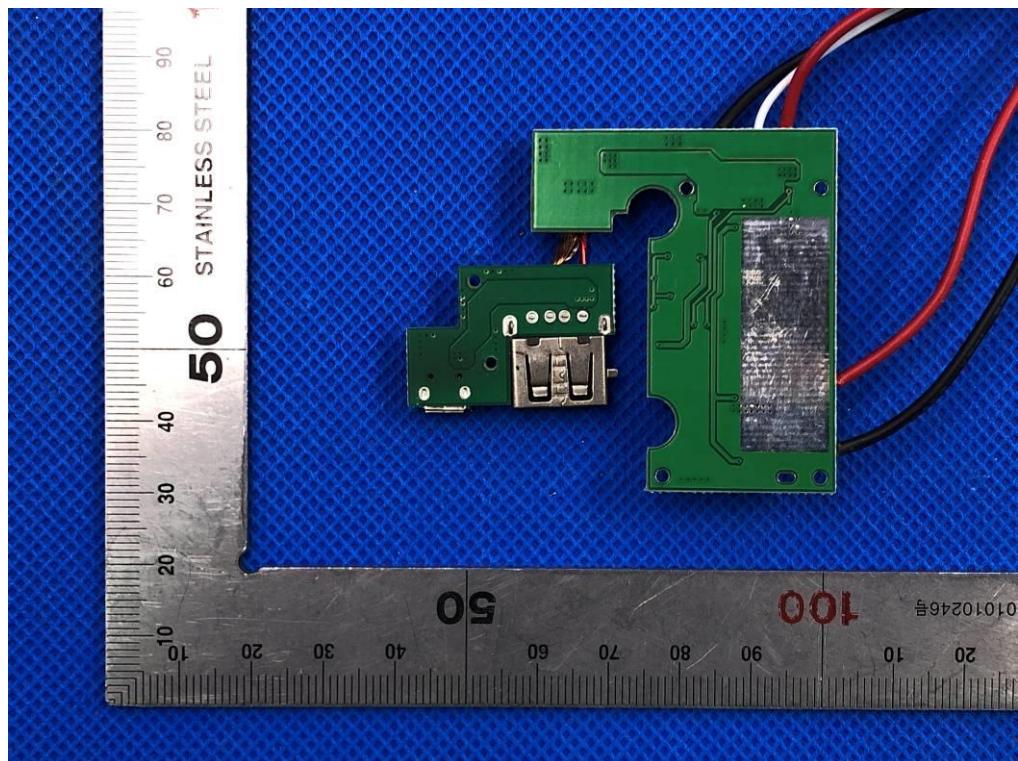

INTERNAL VIEW-4 OF EUT

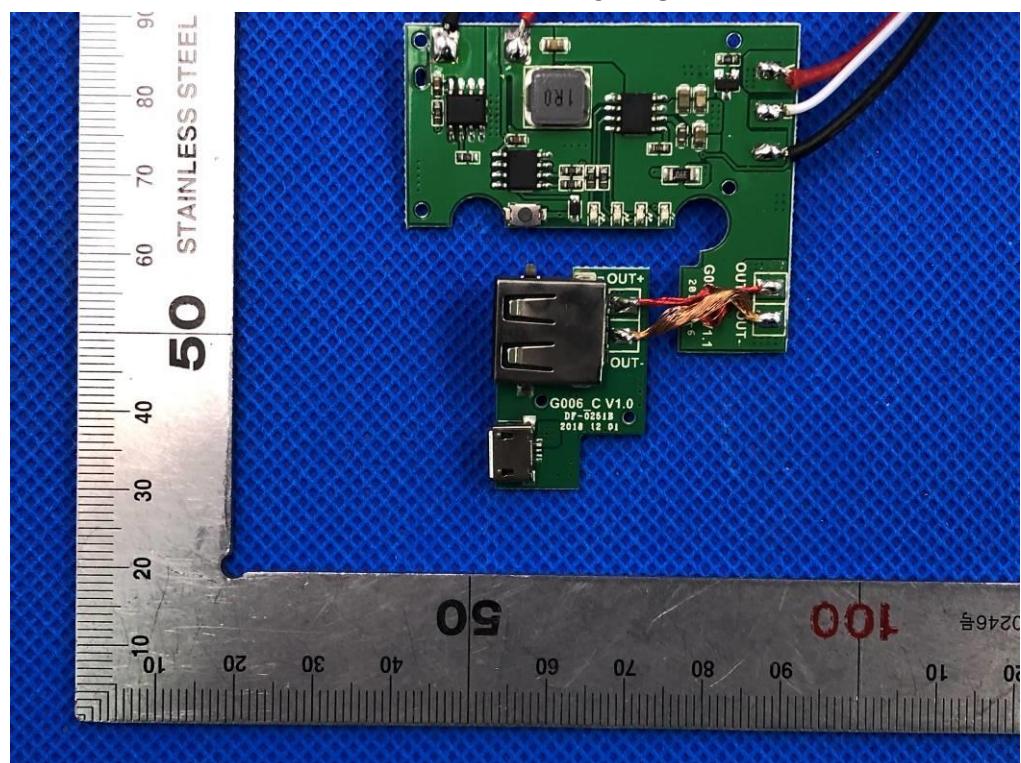

----END OF REPORT----