



FCC PART 15.247 TEST REPORT

For

Shenzhen VanTop Technology & Innovation Co., Ltd.

502, 5th Flr. BLDG 4, MinQi Technology Park, No. 65 Lishan Road, Taoyuan Street, Nanshan District, Shenzhen, China

FCC ID: 2AQ3A-S7

Report Type: Original Report	Product Type: Tablet
Report Number: RSZ191023810-00	
Report Date: 2019-12-13	
Nancy Wang 	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION	11
APPLICABLE STANDARD	11
TEST RESULT	11
FCC §15.203 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST RESULTS SUMMARY	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(e) - POWER SPECTRAL DENSITY	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Tablet
Tested Model	S7
Multiple Models	S8, S8 Pro, S10, S20, S21, S30, P31, E7, E8, E10, E11, Z1, Z4, Z4 Pro, Z10, S7 Kids, S8 Kids, Z1 Kids, SZ1 Kids, SS7 Kids, SS8 Kids
Frequency Range	Wi-Fi: 2412~2472MHz
Maximum conducted output power	Wi-Fi: 802.11b: 10.97 dBm 802.11g: 20.55 dBm 802.11n-HT20: 19.23 dBm
Modulation Technique	Wi-Fi: DSSS, OFDM
Antenna Specification	1.6dBi
Voltage Range	Powered: DC 3.7V by internal battery Recharged: DC 5V by adapter
Date of Test	2019/11/04~2019/11/23
Sample serial number	RSZ191023810-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2019/10/23
Sample/EUT Status	Good condition

Notes: This series products model: S8, S8 Pro, S10, S20, S21, S30, P31, E7, E8, E10, E11, Z1, Z4, Z4 Pro, Z10, S7 Kids, S8 Kids, Z1 Kids, SZ1 Kids, SS7 Kids, SS8 Kids and S7 are electrically identical, model S7 was selected for fully testing, the detailed information can be referred to the attached declaration which was stated and guaranteed by the applicant.

Objective

This report is prepared on behalf of *Shenzhen VanTop Technology & Innovation Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 7 and 13

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Wi-Fi test in the engineer mode.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
802.11b	1 Mbps	10	10	10
802.11g	6 Mbps	20	20	20
802.11n-HT20	MCS0	20	20	20

Duty cycle

Test Result: Compliant. Please refer to the test data and test plots in Appendix E of Annex A.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
ARCHOS	Adapter	KA23-0502000DEU	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

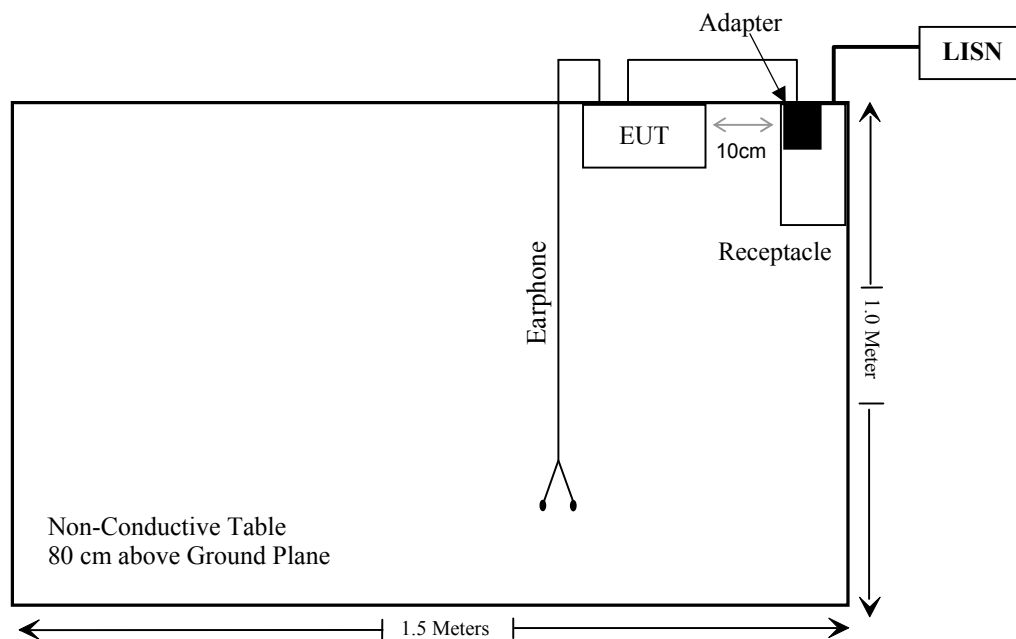

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ191125811-20A.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2019-07-11	2020-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-24
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-01
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Unknown	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-11-12
Radiated Emission Test (Below 1GHz)					
Sonoma Instrument	Amplifier	310 N	186238	2019-04-20	2020-04-20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
Ducommun technologies	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Above 1GHz)					
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019-07-22	2020-07-21
COM-POWER	Pre-amplifier	PA-122	181919	2019-04-20	2020-04-20
Ducommun technologies	RF Cable	RG-214	1	2019-11-12	2020-11-12
Ducommun technologies	RF Cable	RG-214	2	2019-11-12	2020-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2019-11-12	2020-11-12
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	99632	2019-11-12	2020-11-12
RF Conducted Test					
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2019-07-22	2020-07-21
Tonscend Corporation	RF Control Unit	JS0806-2	19D8060154	2019-07-10	2020-07-09
Ducommun technologies	RF Cable	RG-214	3	Each Time	
TIMESMICROWAVE SYSTEMS	RF Cable	SFT205-NMSWSM-1.50M	454575-0008	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ191125811-20A.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 1.6 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

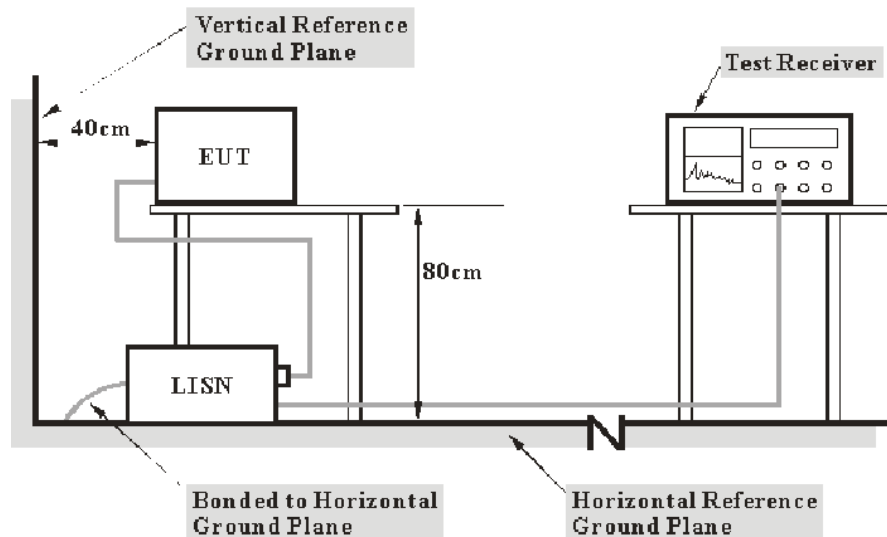

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, EUT complied with the FCC Part 15.207.


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2019-11-09.


EUT operation mode: Charging & Transmitting (worst case at 802.11g Mode, High channel)

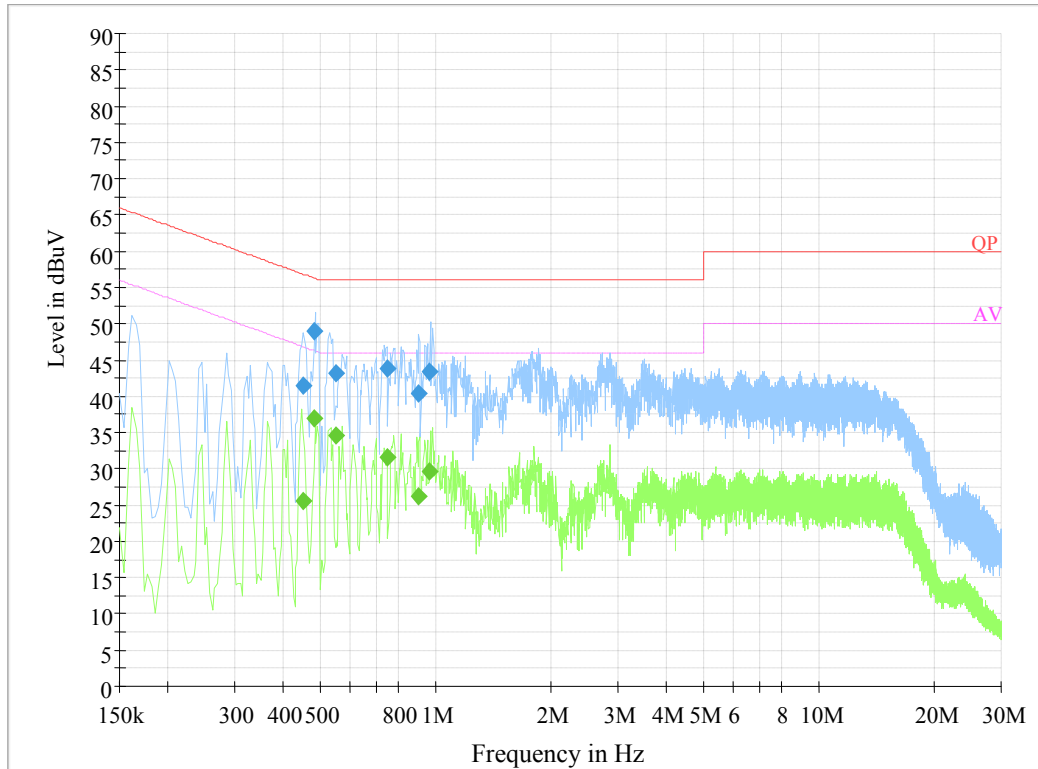Model S7:**AC 120V/60 Hz, Line**


Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK/Ave./QP)
0.451190	41.6	19.8	56.9	15.3	QP
0.482710	48.9	19.8	56.3	7.4	QP
0.550130	43.1	19.8	56.0	12.9	QP
0.749070	43.8	19.8	56.0	12.2	QP
0.908410	40.3	19.8	56.0	15.7	QP
0.967390	43.4	19.8	56.0	12.6	QP
0.451190	25.5	19.8	46.9	21.4	Ave.
0.482710	36.9	19.8	46.3	9.4	Ave.
0.550130	34.6	19.8	46.0	11.4	Ave.
0.749070	31.6	19.8	46.0	14.4	Ave.
0.908410	26.2	19.8	46.0	19.8	Ave.
0.967390	29.6	19.8	46.0	16.4	Ave.

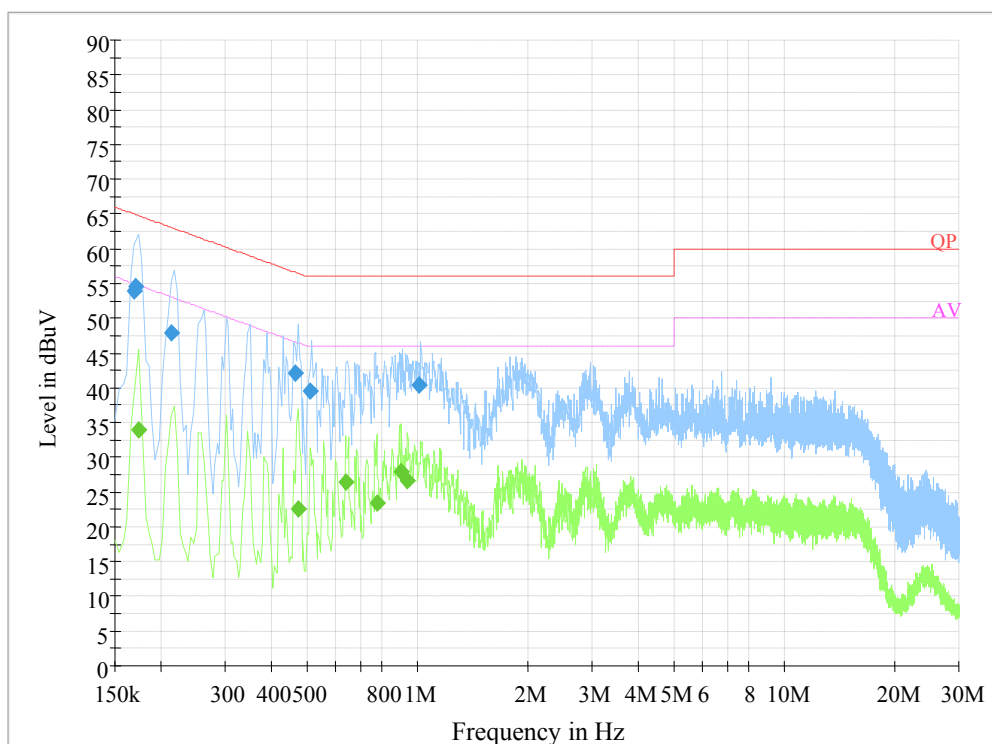AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.169500	54.0	19.8	65.0	11.0	QP
0.170501	54.5	19.8	64.9	10.4	QP
0.213500	47.9	19.8	63.1	15.2	QP
0.466890	42.2	19.8	56.6	14.4	QP
0.510230	39.5	19.8	56.0	16.5	QP
1.010610	40.4	19.8	56.0	15.6	QP
0.174000	34.0	19.8	54.8	20.8	Ave.
0.474000	22.5	19.8	46.4	23.9	Ave.
0.638000	26.4	19.8	46.0	19.6	Ave.
0.778000	23.5	19.8	46.0	22.5	Ave.
0.906000	27.9	19.7	46.0	18.1	Ave.
0.942000	26.7	19.8	46.0	19.3	Ave.

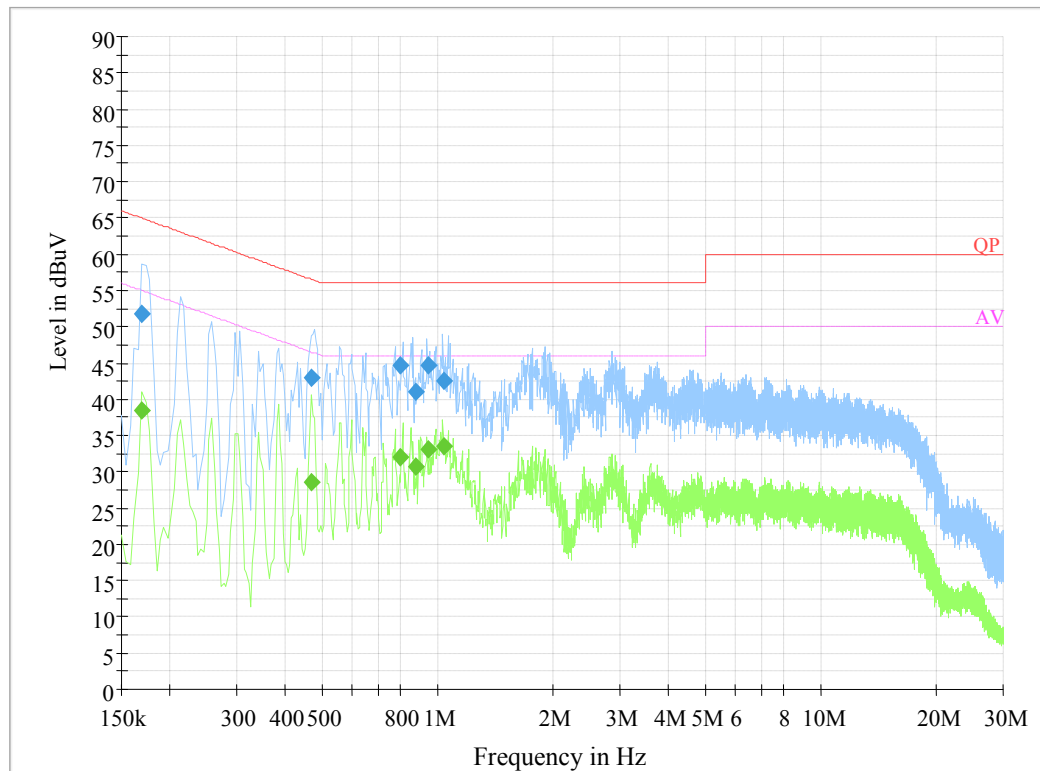Model S8:**AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.474830	43.2	19.8	56.4	13.2	QP
0.478770	42.7	19.8	56.4	13.7	QP
0.888770	38.3	19.7	56.0	17.8	QP
1.014970	40.2	19.8	56.0	15.8	QP
1.085950	40.1	19.8	56.0	15.9	QP
1.814550	37.1	19.8	56.0	18.9	QP
0.438000	32.1	19.8	47.1	15.0	Ave.
0.526000	30.1	19.8	46.0	15.9	Ave.
0.718000	26.5	19.8	46.0	19.5	Ave.
0.878000	26.3	19.7	46.0	19.7	Ave.
0.994000	32.7	19.8	46.0	13.3	Ave.
1.038000	32.9	19.8	46.0	13.1	Ave.

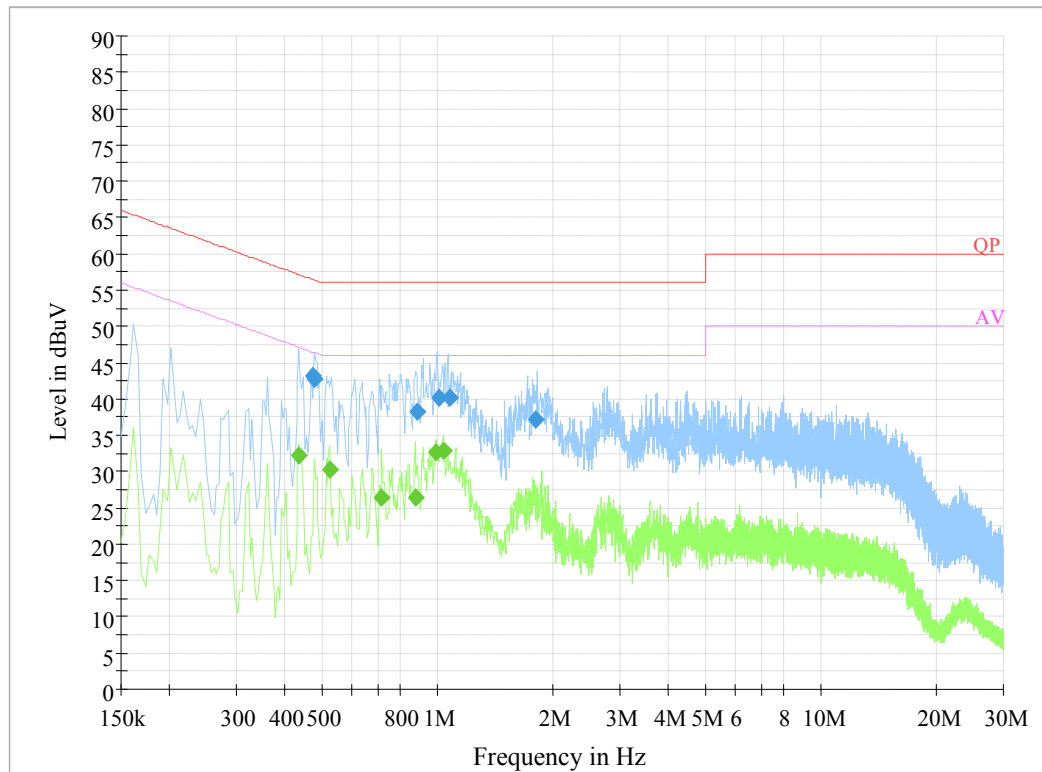AC 120V/60 Hz, Neutral



Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.169500	54.0	19.8	65.0	11.0	QP
0.170501	54.5	19.8	64.9	10.4	QP
0.213500	47.9	19.8	63.1	15.2	QP
0.466890	42.2	19.8	56.6	14.4	QP
0.510230	39.5	19.8	56.0	16.5	QP
1.010610	40.4	19.8	56.0	15.6	QP
0.174000	34.0	19.8	54.8	20.8	Ave.
0.474000	22.5	19.8	46.4	23.9	Ave.
0.638000	26.4	19.8	46.0	19.6	Ave.
0.778000	23.5	19.8	46.0	22.5	Ave.
0.906000	27.9	19.7	46.0	18.1	Ave.
0.942000	26.7	19.8	46.0	19.3	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

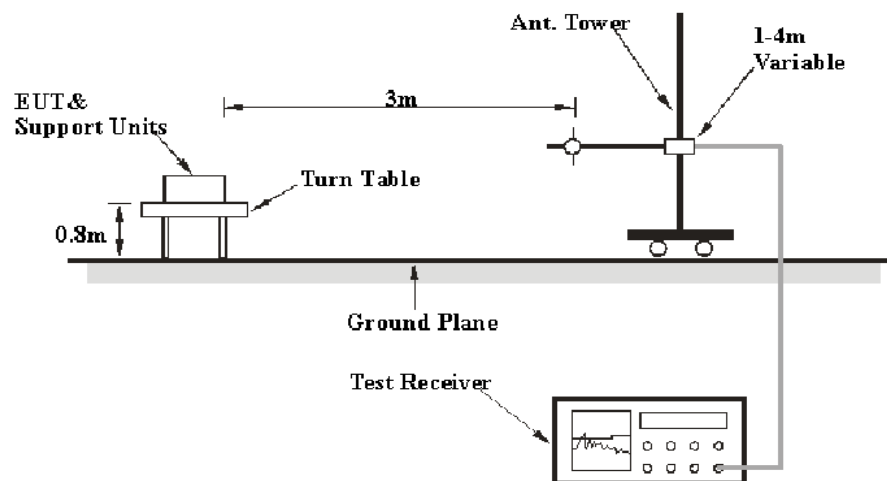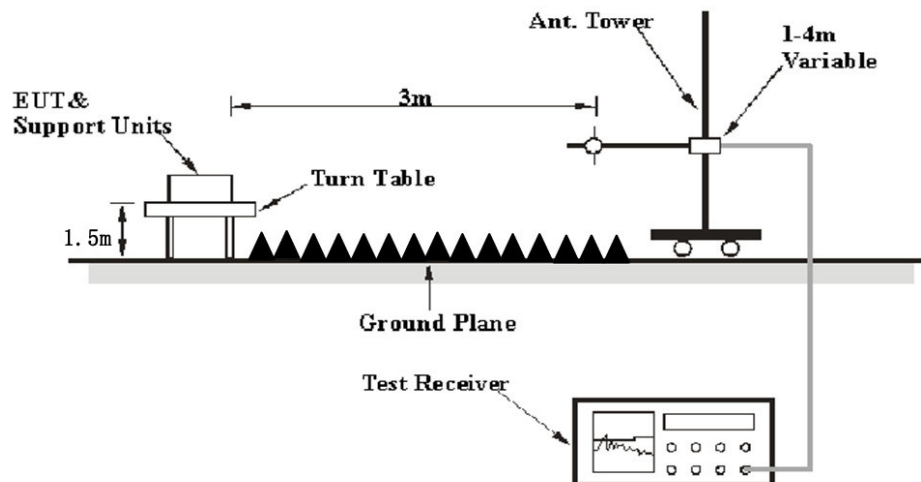EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions


Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Steve Lan on 2019-11-08 for below 1G and Charlie Cha on 2019-11-13 for above 1G.

EUT operation mode: Transmitting

30 MHz~1 GHz: (worst case at 802.11g Mode, High channel)


Model S7:

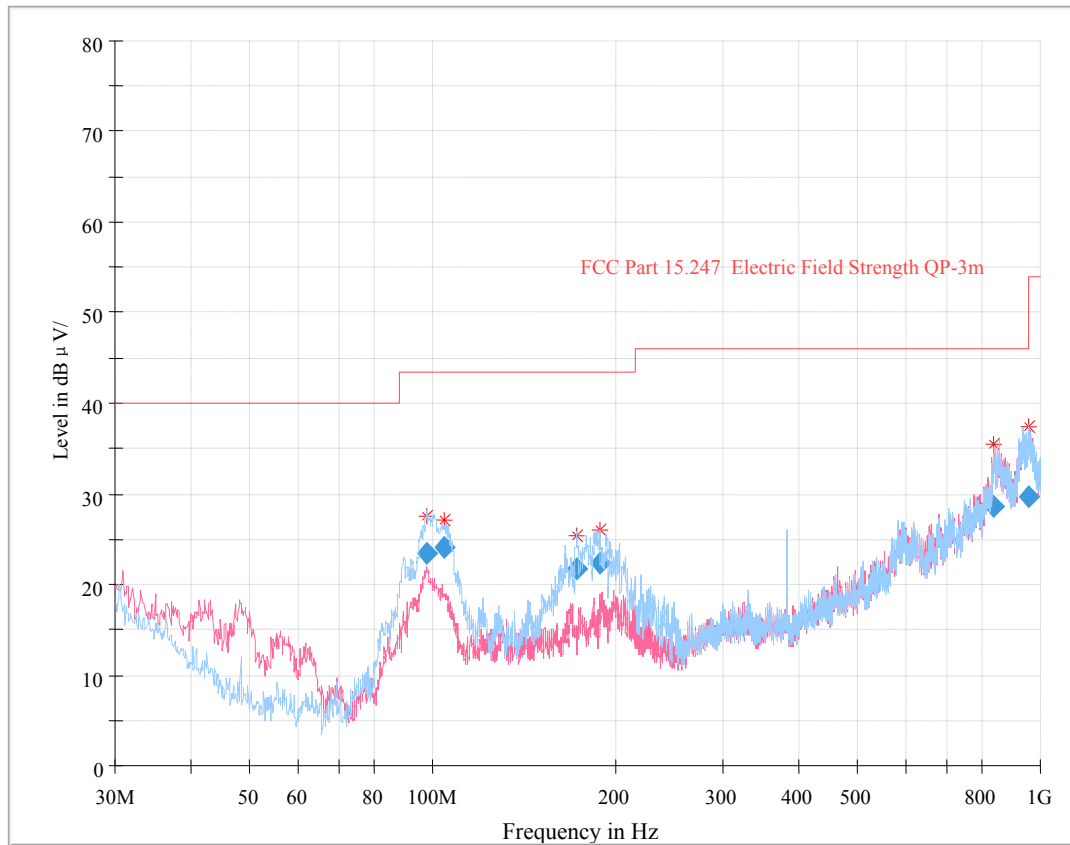

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
97.502750	23.45	205.0	H	255.0	-17.7	43.50	20.05
104.481625	24.04	261.0	H	257.0	-16.4	43.50	19.46
172.659000	21.63	138.0	H	255.0	-15.0	43.50	21.87
189.073875	22.46	109.0	H	243.0	-15.2	43.50	21.04
839.444250	28.52	226.0	V	181.0	5.9	46.00	17.48
954.749000	29.77	362.0	V	203.0	9.6	46.00	16.23

30 MHz~1 GHz: (worst case at 802.11g Mode, High channel)

Model S8:

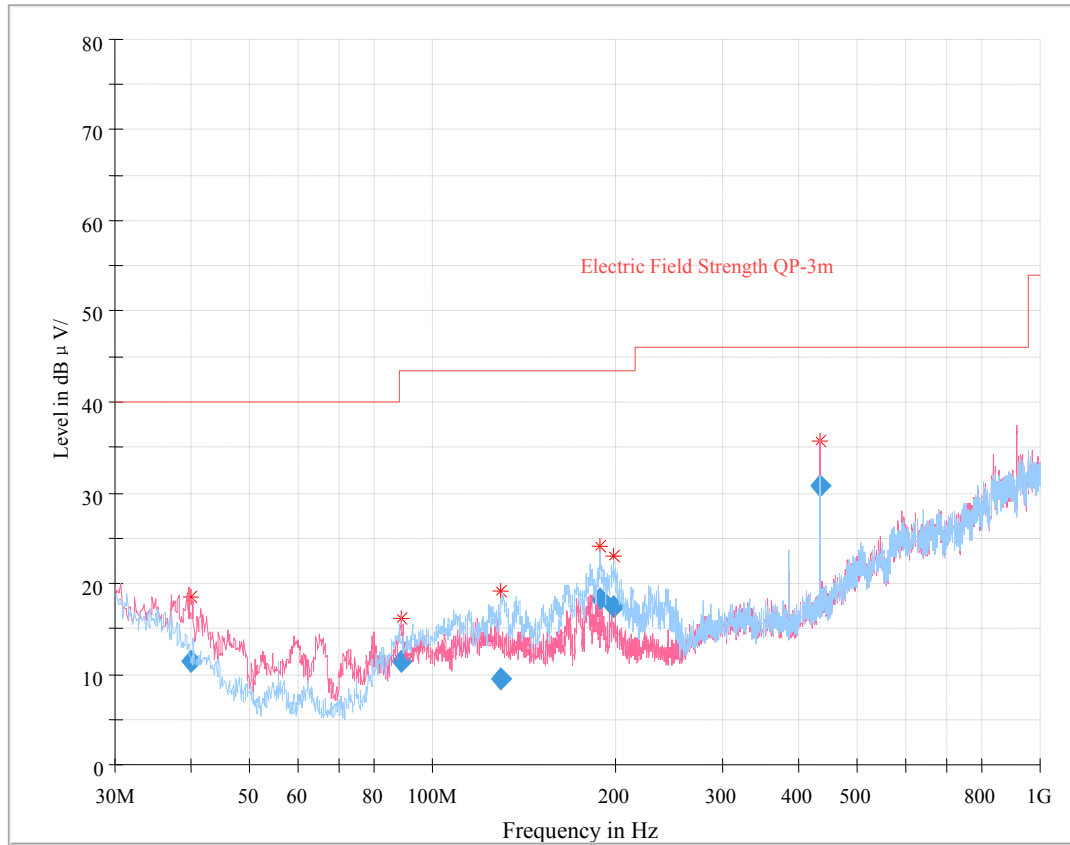

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
40.032375	11.46	116.0	V	182.0	-13.8	40.00	28.54
88.546750	11.38	110.0	V	163.0	-19.2	43.50	32.12
129.664125	9.36	360.0	H	105.0	-13.6	43.50	34.14
188.299250	18.27	126.0	H	245.0	-15.2	43.50	25.23
198.700875	17.40	146.0	H	263.0	-14.0	43.50	26.10
433.411500	30.79	322.0	V	34.0	-8.9	46.00	15.21

1 GHz-25 GHz:**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2332.42	28.26	PK	73	1.3	H	31.64	59.90	74	14.10
2332.42	13.98	Ave.	73	1.3	H	31.64	45.62	54	8.38
2483.79	28.69	PK	137	1.0	H	32.13	60.82	74	13.18
2483.79	14.09	Ave.	137	1.0	H	32.13	46.22	54	7.78
4824.00	49.73	PK	270	1.9	H	5.40	55.13	74	18.87
4824.00	44.57	Ave.	270	1.9	H	5.40	49.97	54	4.03
Middle Channel (2442MHz)									
4884.00	47.83	PK	251	2.2	H	6.43	54.26	74	19.74
4884.00	41.79	Ave.	251	2.2	H	6.43	48.22	54	5.78
High Channel (2472 MHz)									
2345.63	28.65	PK	125	1.4	H	31.64	60.29	74	13.71
2345.63	13.82	Ave.	125	1.4	H	31.64	45.46	54	8.54
2488.69	28.96	PK	7	2.2	H	32.13	61.09	74	12.91
2488.69	14.06	Ave.	7	2.2	H	32.13	46.19	54	7.81
4944.00	45.23	PK	277	1.6	H	6.43	51.66	74	22.34
4944.00	35.01	Ave.	277	1.6	H	6.43	41.44	54	12.56

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2334.93	29.13	PK	251	1.4	H	31.64	60.77	74	13.23
2334.93	14.21	Ave.	251	1.4	H	31.64	45.85	54	8.15
2488.55	29.64	PK	196	2.1	H	32.13	61.77	74	12.23
2488.55	14.31	Ave.	196	2.1	H	32.13	46.44	54	7.56
4824.00	56.40	PK	288	1.6	H	5.40	61.80	74	12.20
4824.00	44.47	Ave.	288	1.6	H	5.40	49.87	54	4.13
Middle Channel (2442MHz)									
4884.00	57.16	PK	153	2.2	H	6.43	63.59	74	10.41
4884.00	44.41	Ave.	153	2.2	H	6.43	50.84	54	3.16
High Channel (2472 MHz)									
2349.63	28.95	PK	313	1.6	H	31.64	60.59	74	13.41
2349.63	14.03	Ave.	313	1.6	H	31.64	45.67	54	8.33
2484.06	32.24	PK	94	1.3	H	32.13	64.37	74	9.63
2484.06	17.96	Ave.	94	1.3	H	32.13	50.09	54	3.91
4944.00	57.17	PK	294	1.7	H	6.43	63.60	74	10.40
4944.00	44.23	Ave.	294	1.7	H	6.43	50.66	54	3.34

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2345.31	28.63	PK	344	1.0	H	31.64	60.27	74	13.73
2345.31	13.89	Ave.	344	1.0	H	31.64	45.53	54	8.47
2498.77	28.98	PK	179	1.6	H	32.13	61.11	74	12.89
2498.77	13.95	Ave.	179	1.6	H	32.13	46.08	54	7.92
4824.00	56.80	PK	142	1.4	H	5.40	62.20	74	11.80
4824.00	42.31	Ave.	212	1.7	H	5.40	47.71	54	6.29
Middle Channel (2442MHz)									
4884.00	56.98	PK	33	2.0	H	6.43	63.41	74	10.59
4884.00	42.27	Ave.	33	2.0	H	6.43	48.70	54	5.30
High Channel (2472 MHz)									
2365.45	29.46	PK	202	1.4	H	31.87	61.33	74	12.67
2365.45	14.33	Ave.	202	1.4	H	31.87	46.20	54	7.80
2483.21	32.85	PK	309	1.1	H	32.13	64.98	74	9.02
2483.21	17.93	Ave.	309	1.1	H	32.13	50.06	54	3.94
4944.00	57.05	PK	74	2.2	H	6.43	63.48	74	10.52
4944.00	41.20	Ave.	74	2.2	H	6.43	47.63	54	6.37

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

**Pre-scan with 802.11g Mode, High channel
Horizontal**

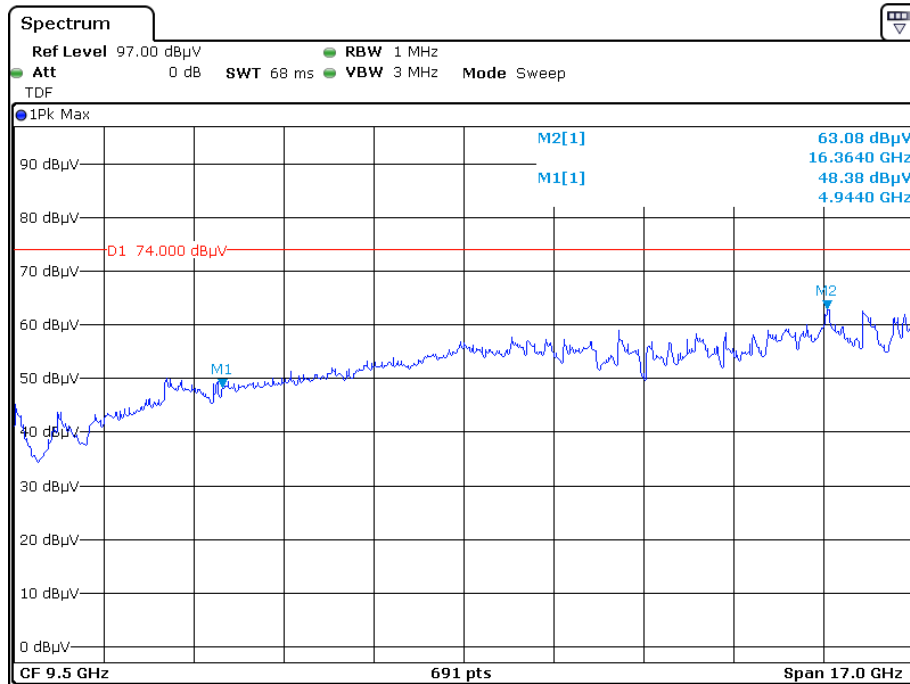


Date: 13.NOV.2019 08:01:36

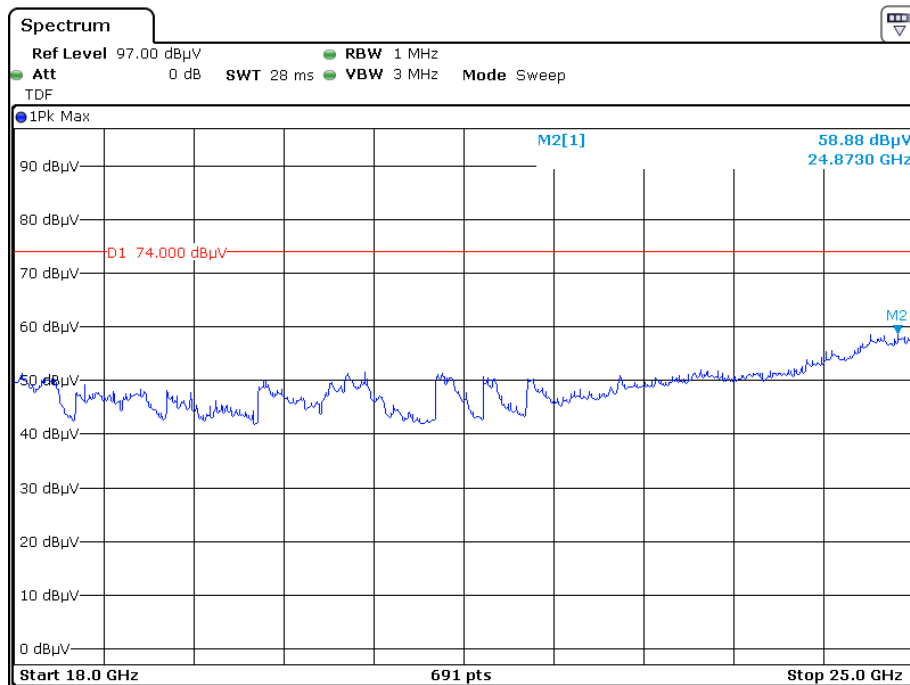


Date: 13.NOV.2019 08:51:43

Vertical

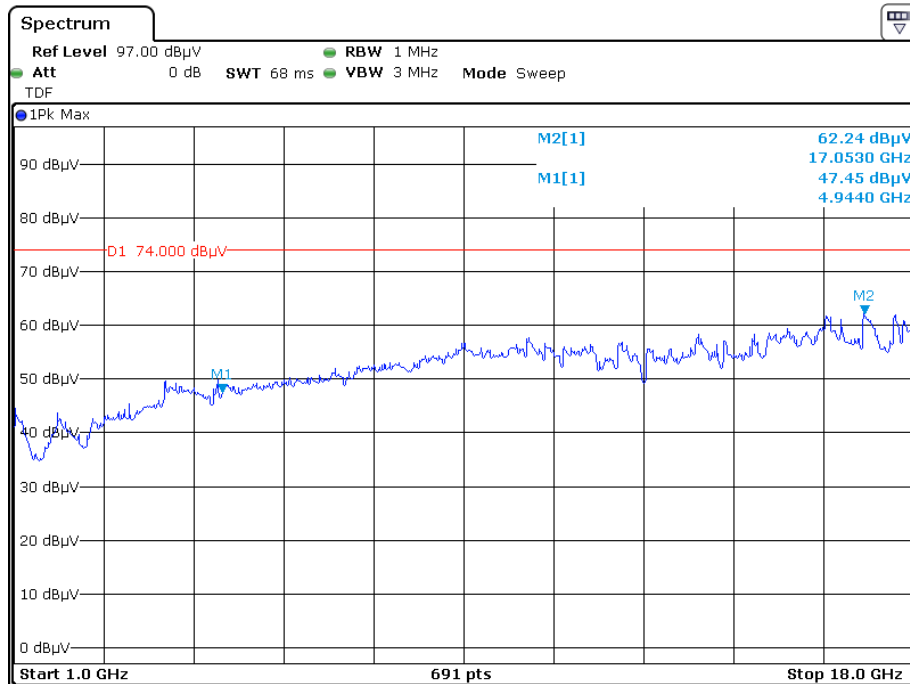


Date: 13.NOV.2019 08:08:39

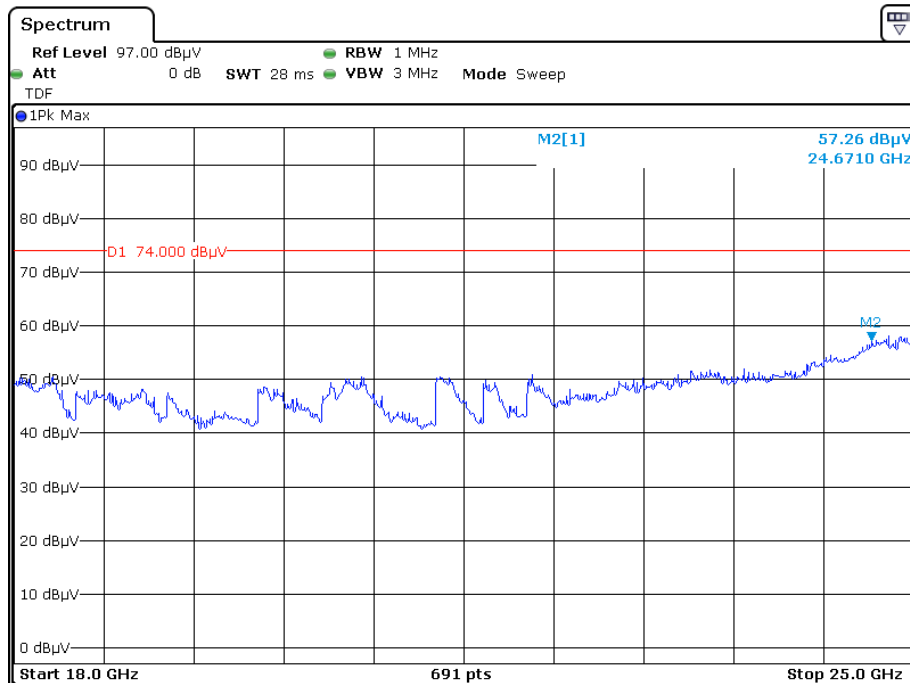


Date: 13.NOV.2019 08:59:23

Pre-scan for Average Horizontal

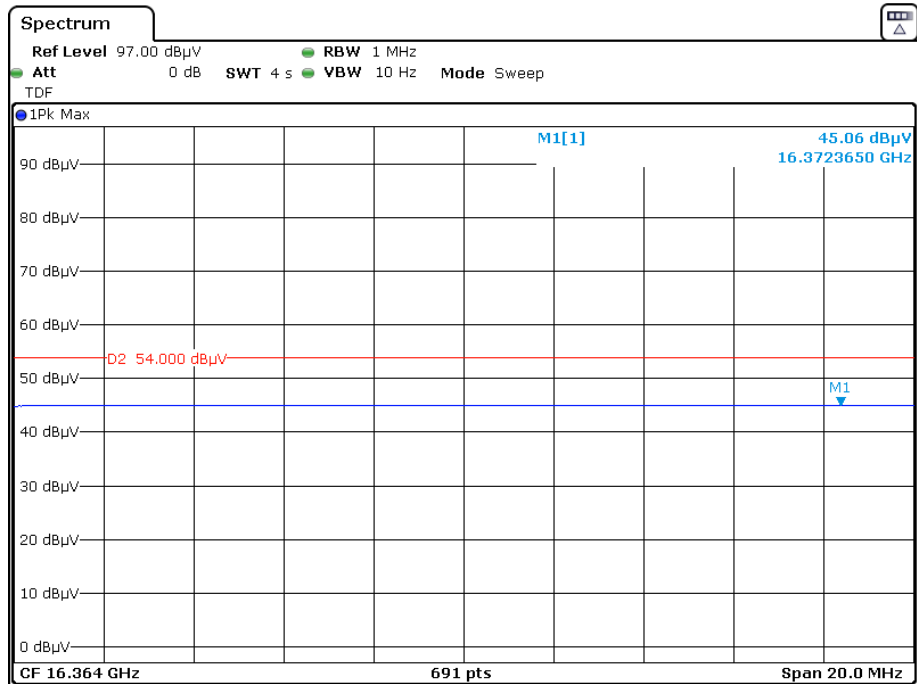


Date: 13.NOV.2019 08:05:30

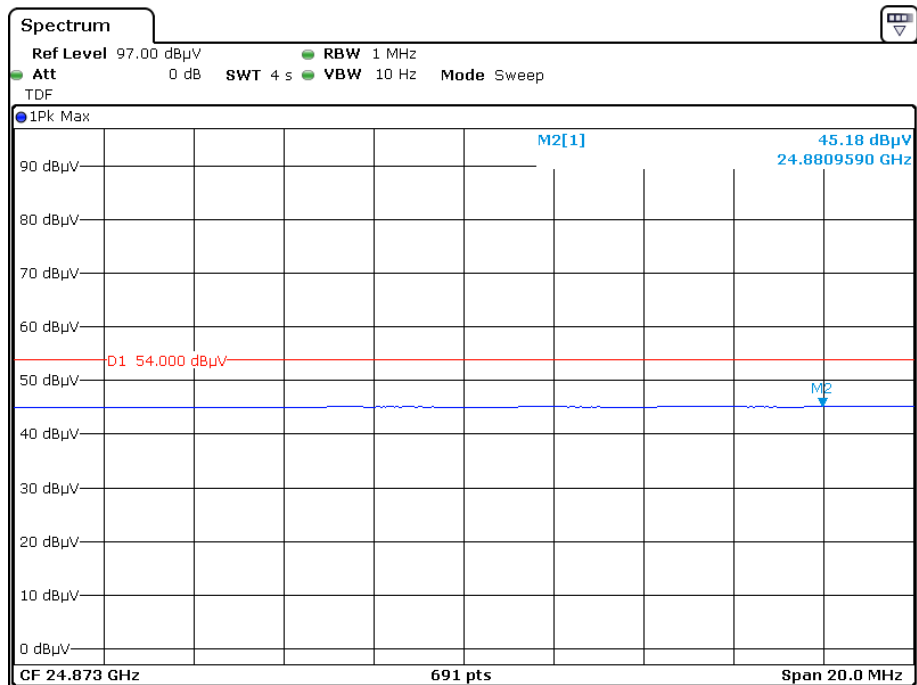


Date: 13.NOV.2019 08:56:31

Vertical

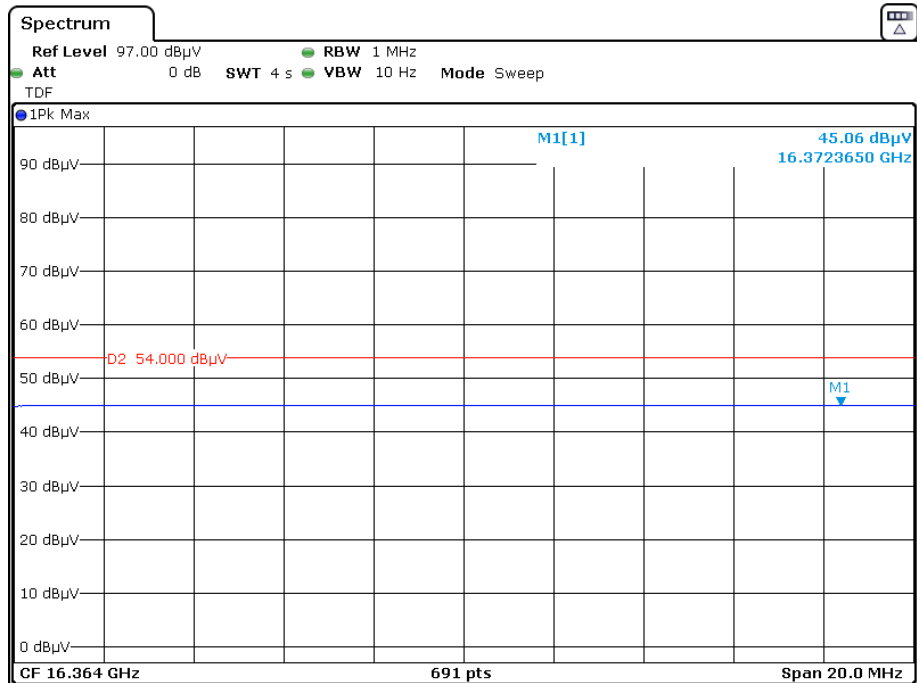

Date: 13.NOV.2019 08:05:30

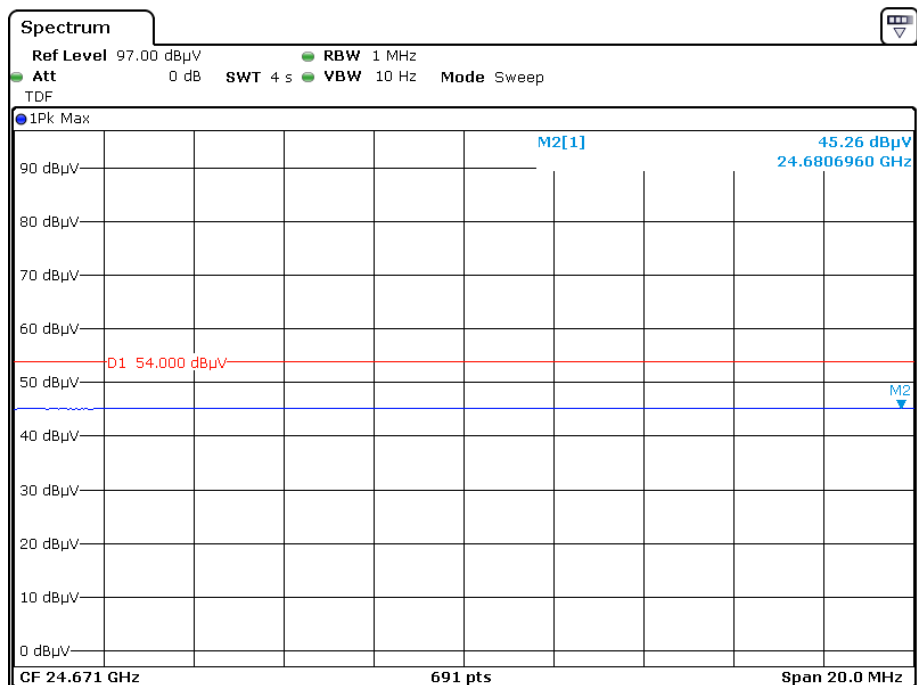

Date: 13.NOV.2019 09:04:25


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-11-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the test data and test plots in Appendix A of Annex A.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-11-23.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the test data and test plots in Appendix B of Annex A.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-11-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the test plots in Appendix D of Annex A.


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-11-23.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the test data and test plots in Appendix C of Annex A.

***** **END OF REPORT** *****