

FCC TEST REPORT

Product Name: WIFI Module
Trade Mark: Prowise
Model No.: PW.2.12004.0001
Report Number: 180907005RFC-3
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: 2AQ5RWIFIHS2B56
Test Result: PASS
Date of Issue: March 5, 2019

Prepared for:

Shenzhen KTC Commercial Display Technology CO.,LTD.
No.4023,Northern Wuhe Road,Bantian Street,Longgang
District,Shenzhen City,Guangdong Province,P.R.China

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park,
Qingxiang Road No.1, Longhua New District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Tested by: _____

Henry Lu
Project Engineer

Reviewed by: _____

Kevin Liang
Assistant Manager

Approved by: _____

Billy Li
Technical Director

Date: March 5, 2019

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

Version

Version No.	Date	Description
V1.0	March 5, 2019	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	4
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	5
1.7 TEST FACILITY	5
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT	9
4.2 TEST CHANNELS	9
4.3 EUT TEST STATUS	10
4.4 PRE-SCAN	10
4.4.1 PRE-SCAN UNDER ALL RATES	10
4.4.2 WORST-CASE DATA RATES	10
4.5 TEST SETUP	11
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	11
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	12
4.5.3 FOR CONDUCTED RF TEST SETUP	13
4.6 SYSTEM TEST CONFIGURATION	13
4.7 DUTY CYCLE	14
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	16
5.1 REFERENCE DOCUMENTS FOR TESTING	16
5.2 ANTENNA REQUIREMENT	16
5.3 CONDUCTED PEAK OUTPUT POWER	17
5.4 6 dB BANDWIDTH	18
5.5 POWER SPECTRAL DENSITY	22
5.6 CONDUCTED OUT OF BAND EMISSION	26
5.7 RADIATED SPURIOUS EMISSIONS	39
5.8 BAND EDGE MEASUREMENTS (RADIATED)	45
5.9 CONDUCTED EMISSION	52
APPENDIX 1 PHOTOS OF TEST SETUP	55
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	55

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Shenzhen KTC Commercial Display Technology CO.,LTD.
Address of Applicant:	No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China
Manufacturer:	Shenzhen KTC Commercial Display Technology CO.,LTD.
Address of Manufacturer:	No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	WIFI Module		
Model No.:	PW.2.12004.0001		
Trade Mark:	Prowise		
DUT Stage:	Identical Prototype		
EUT Supports Function:	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V4.1	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
Sample Received Date:	September 7, 2018		
Sample Tested Date:	September 7, 2018 to March 1, 2019		

1.2.2 Description of Accessories

None.

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz		
Frequency Range:	2412 MHz to 2462 MHz		
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20		
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK)		
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS15		
Number of Channels:	IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20: 11		
Channel Separation:	5 MHz		
Antenna Type:	Chain 0	Diple Antenna	
	Chain 1	Diple Antenna	
Antenna Gain:	Chain 0	2 dBi	
	Chain 1	2 dBi	
Directional gain:	5.01 dBi		
Maximum Peak Power:	CDD_ Chain 0+1	IEEE 802.11b: 15.31 dBm IEEE 802.11g: 16.24 dBm IEEE 802.11n-HT20: 16.31 dBm	
Normal Test Voltage:	3.3 Vdc		

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
Note: f is the operating frequency (MHz); k is the operating channel.	

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Keyboard	DELL	KB212-B	CN-0N291F-715	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust
PC	DELL	XPS8900	2015AP3055	UnionTrust
Monitor	DELL	P2416Db	CN-0NDY73-74261-SC9-0LVS	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013 Clause 11.8.1	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.13	PASS

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 20, 2015	Dec. 19, 2018
☒	Receiver	R&S	ESIB26	100114	Dec. 10, 2017	Dec. 10, 2018
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	Dec. 22, 2017	Dec. 22, 2018
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec. 17, 2017	Dec. 17, 2018
☒	Preamplifier	HP	8447F	2805A02960	Dec. 10, 2017	Dec. 10, 2018
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 22, 2018	May 22, 2019
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Dec. 17, 2017	Dec. 17, 2018
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Band Rejection Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G248	June 06, 2018	June 06, 2019
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2018	Nov. 24, 2019
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 24, 2018	Nov. 24, 2019
☒	LISN	R&S	ESH2-Z5	860014/024	Nov. 24, 2018	Nov. 24, 2019
☒	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 24, 2018	Nov. 24, 2019
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Dec.10, 2017	Dec. 10, 2018
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Dec. 10, 2017	Dec. 10, 2018
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Dec. 10, 2017	Dec. 10, 2018

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	3.3	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
Conducted Peak Output Power	23.4	51	99.8	Terence Chen
6dB Bandwidth	23.4	51	99.8	Terence Chen
Power Spectral Density	23.4	51	99.8	Terence Chen
Conducted Out of Band Emission	23.4	51	99.8	Terence Chen
Radiated Spurious Emissions	25.8	46	99.8	Tony Kang
Band Edge Measurements (Radiated)	25.8	46	99.8	Tony Kang
AC Power Line Conducted Emission	22.4	45	99.8	Gemini Huang

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz

4.3 EUT TEST STATUS

Mode	Tx Function	Description
IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20	2Tx	1. Keep the EUT in continuously transmitting with modulation test single.

Power Setting	
	Channel 1 -11
IEEE 802.11b	37
IEEE 802.11g	20
IEEE 802.11n-HT20	20

Test Software
Test software name: MTTOOL

4.4 PRE-SCAN

4.4.1 Pre-scan under all rates



Mode and Frequency	Maximum Conducted Average Power (dBm)_Chain 0							
	1		2		5.5		11	
IEEE 802.11b 2437 MHz	7.28		7.25		7.15		7.02	
IEEE 802.11g 2437 MHz	6	9	12	18	24	36	48	54
	4.53	3.89	3.85	3.86	3.84	3.87	3.83	3.81
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	4.74	4.59	4.45	4.36	4.21	3.97	3.83	3.81
IEEE 802.11n-HT20 2437 MHz	MCS8	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
	3.79	3.75	3.66	3.64	3.61	3.58	3.55	3.51


4.4.2 Worst-case data rates

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS0


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

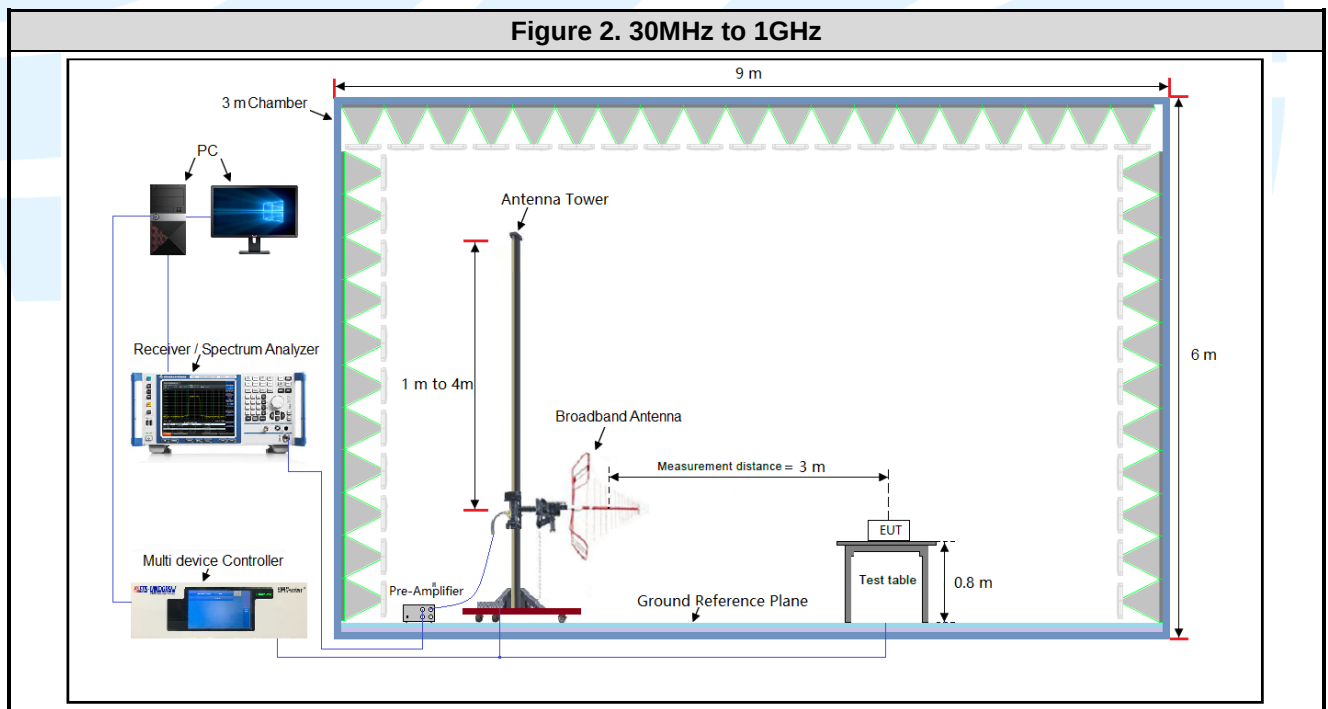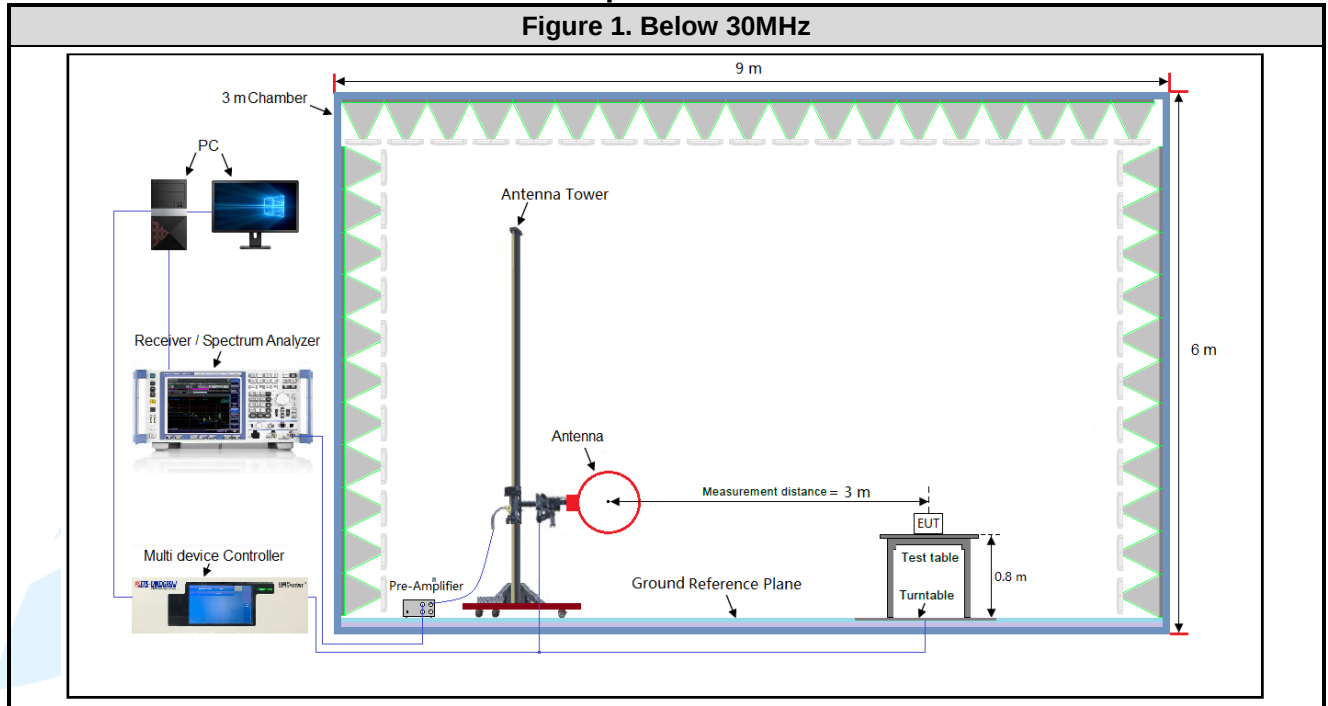


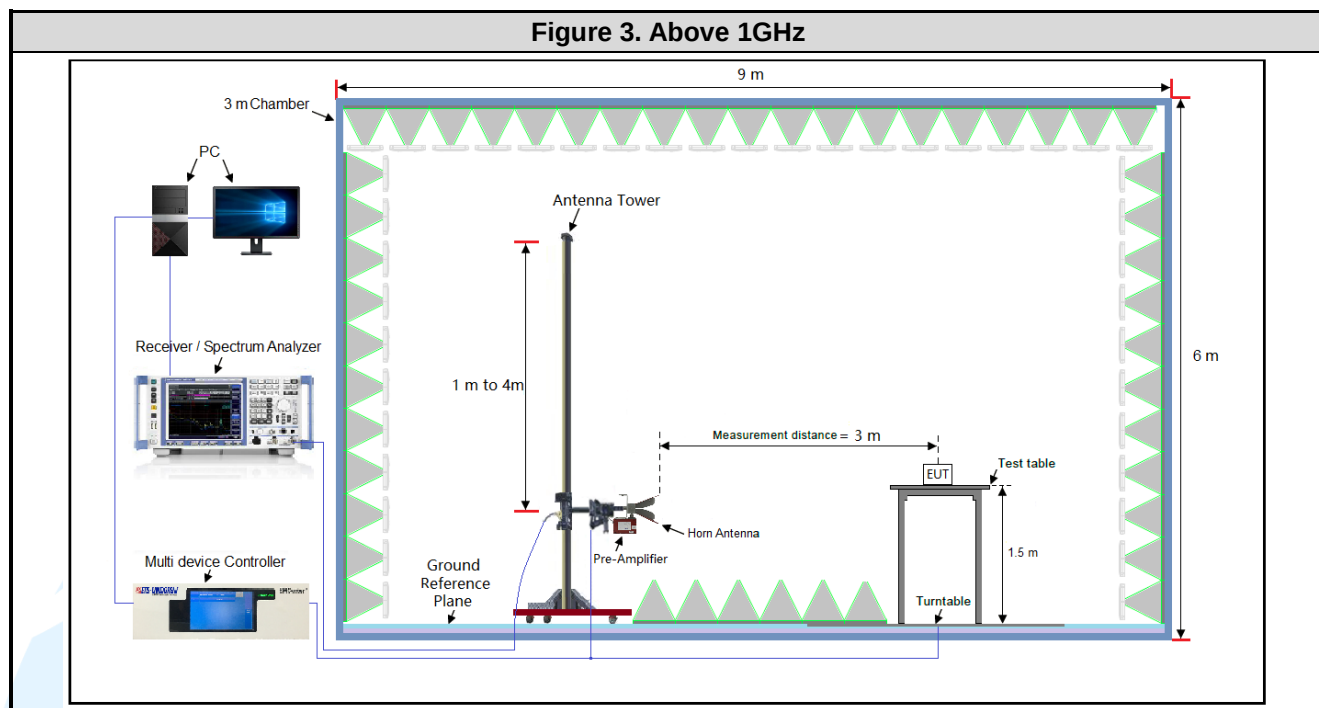

4.5.2 For Conducted Emissions test setup

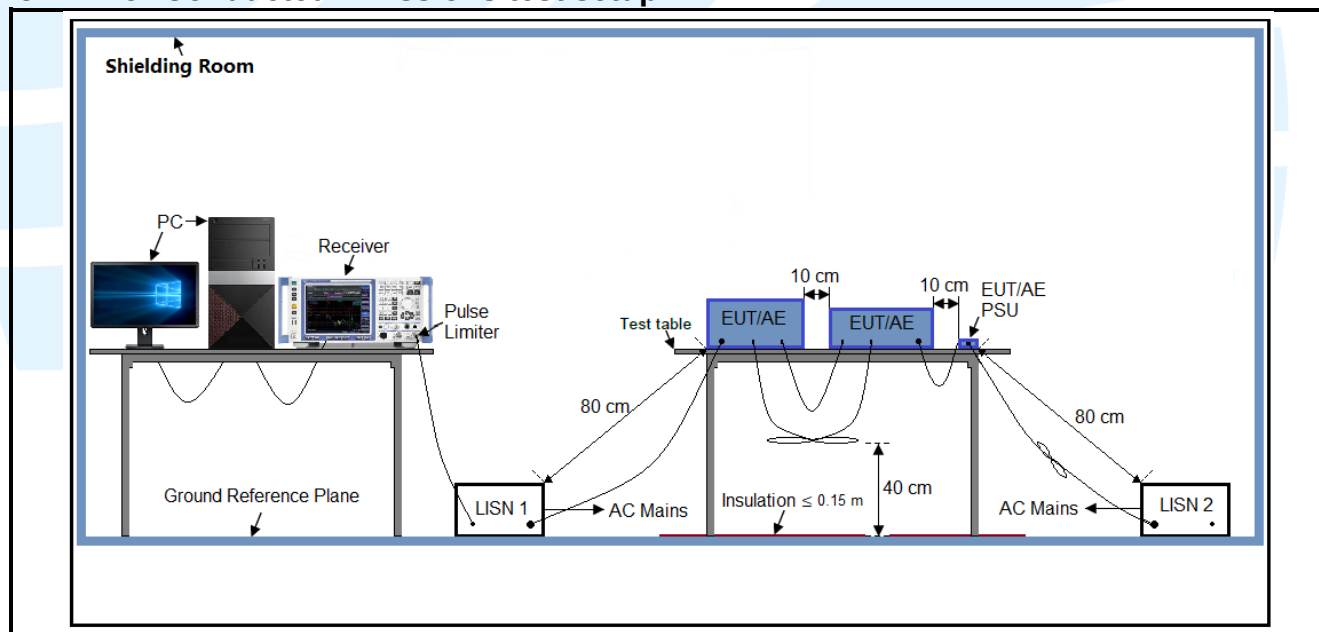

4.5.3 For Conducted RF test setup

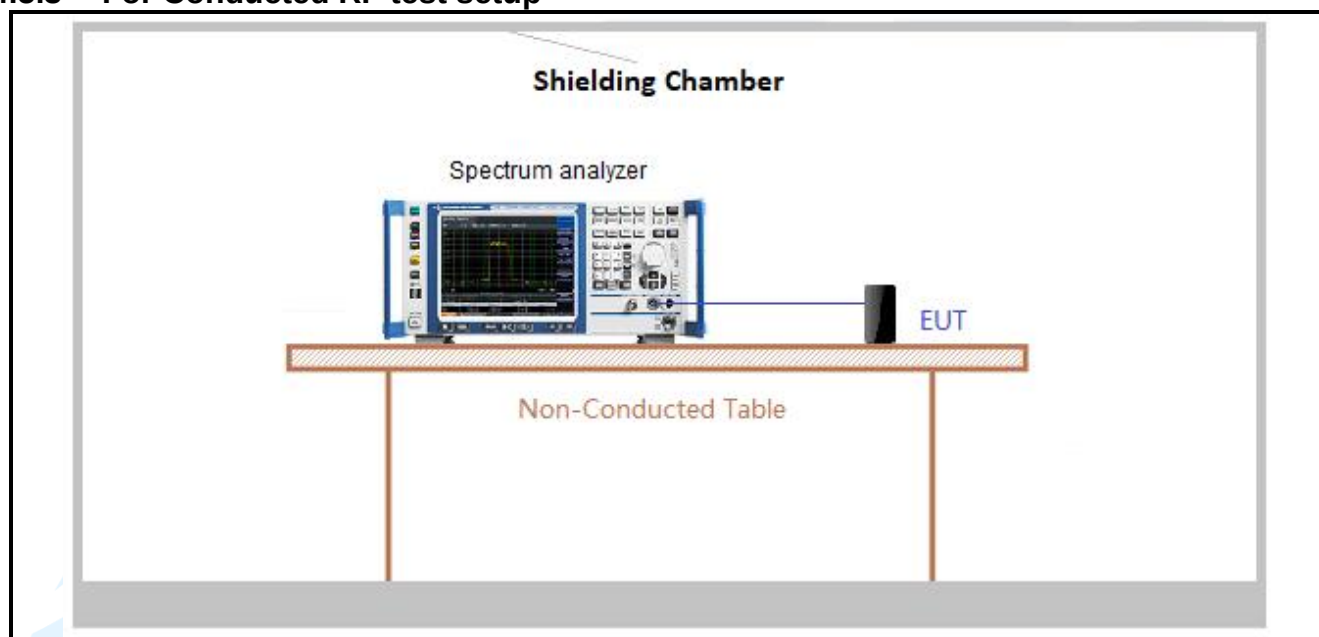

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.3V circuit board. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	2TX	Chain 0+1	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results



Mode	Data rates (Mbps)	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	12.37	13.05	0.95	94.79	0.23	0.08	-0.46
IEEE 802.11g	6	2.06	2.17	0.95	94.93	0.23	0.49	-0.45
IEEE 802.11n-HT20	MCS0	1.92	2.02	0.95	95.05	0.22	0.52	-0.44

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plots as follows

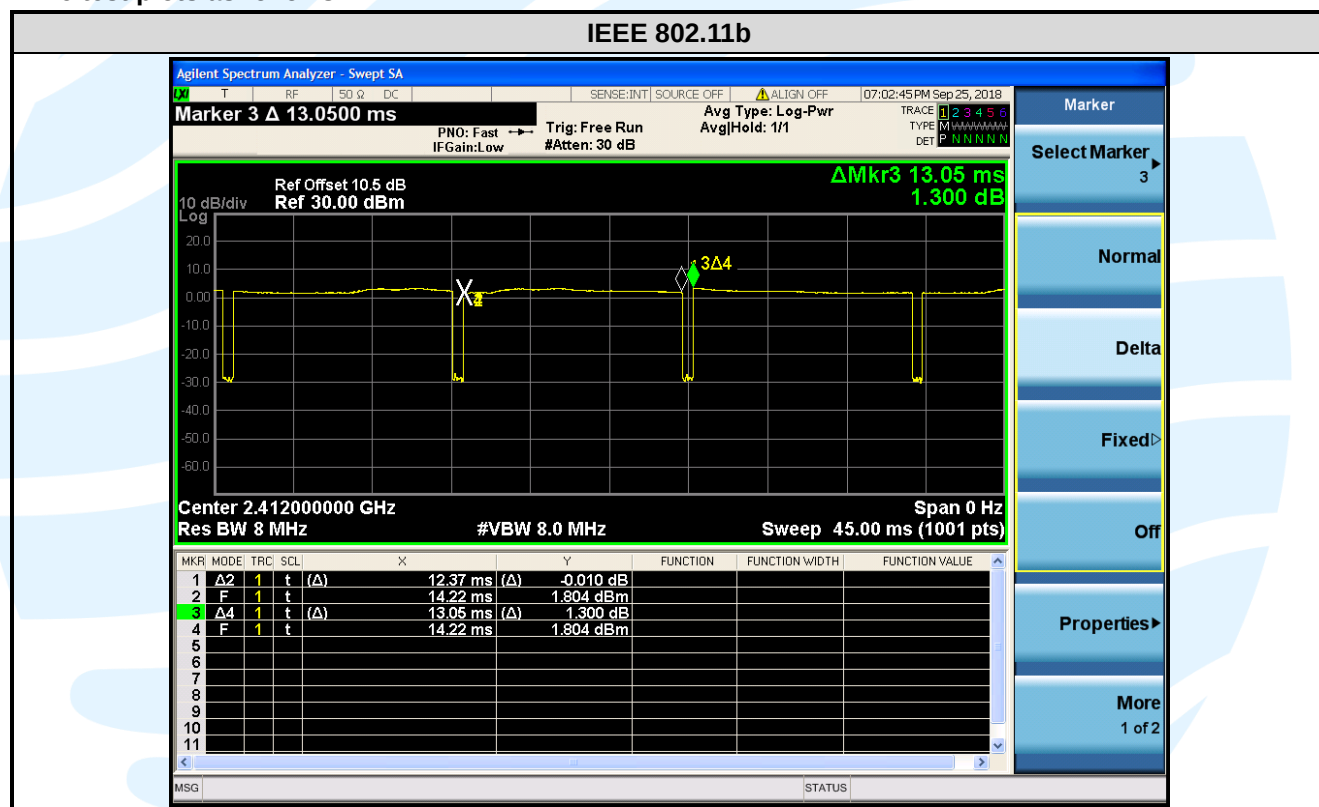

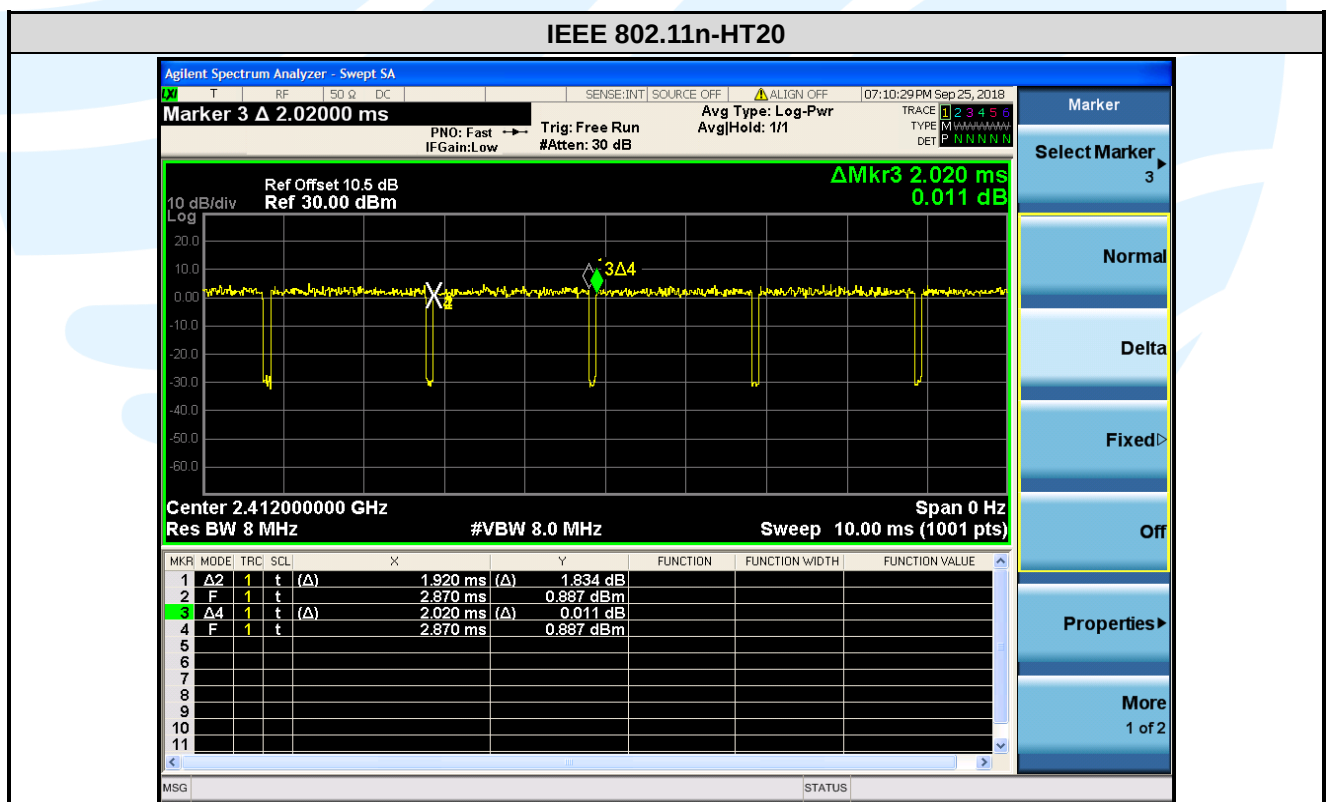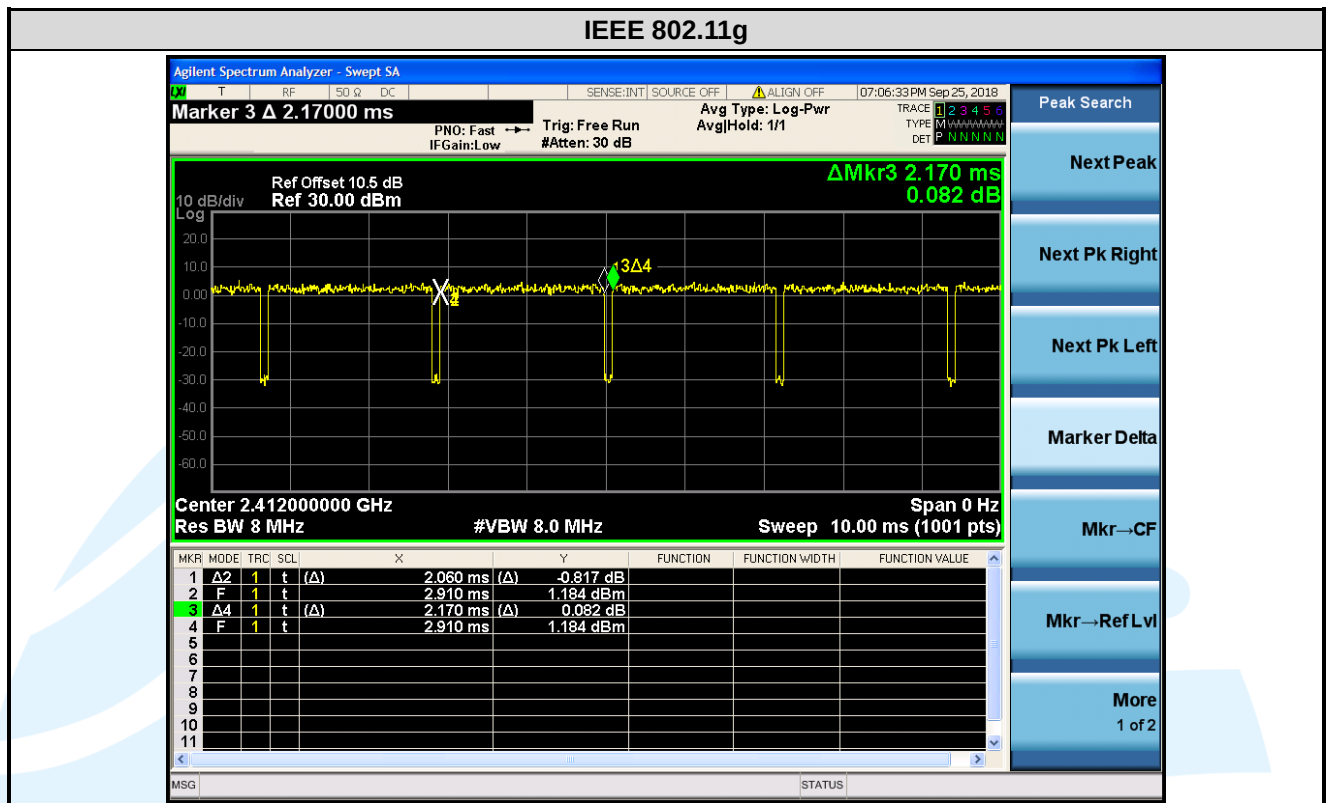

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules
5	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: Antenna connectors is RP-SMA. The transmit signals are correlated with each other and the antenna gain of both chains is completely consistent, the best case directional gain of the antenna is 5.01 dBi (See section 5.3).

5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)

Test Method: ANSI C63.10-2013 Clause 11.9.1.3

Limit: For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

Mode	Channel/ Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)				Pass / Fail
		Chain 0	Chain 1	Total Power CDD_Chain 0+1	Limit (dBm)	
IEEE 802.11b	1(2412)	11.22	13.16	15.31	30	Pass
	6(2437)	11.19	12.88	15.13	30	Pass
	11(2462)	11.12	12.78	15.04	30	Pass
IEEE 802.11g	1(2412)	12.04	14.17	16.24	30	Pass
	6(2437)	12.10	13.48	15.85	30	Pass
	11(2462)	12.00	13.97	16.11	30	Pass
IEEE 802.11n-HT20	1(2412)	11.99	14.04	16.15	30	Pass
	6(2437)	12.14	14.21	16.31	30	Pass
	11(2462)	12.05	14.08	16.19	30	Pass

Remark:

1. Power with Duty Factor = Measured Power + Duty Cycle Factor
2. Total (Chain 0+1) = $10 \cdot \log[10^{\text{Chain 0}/10} + 10^{\text{Chain 1}/10}]$
3. Directional gain and the maximum conducted output power limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	2.00	2.00	5.01	30.00
Basic methodology with N_{ANT} transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by N_{ANT} transmitter outputs of equal power. Directional gain is to be computed as follows:				
If any transmit signals are <i>correlated</i> with each other,				
Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi				

5.46 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)

Test Method: ANSI C63.10-2013 Clause 11.8.1

Limit: For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:
a) Set RBW = 100 kHz.
b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
c) Detector = Peak.
d) Trace mode = max hold.
e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.5.3 for details.


Instruments Used: Refer to section 3 for details


Test Results:

Mode	Channel/ Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limit	Pass / Fail
Chain 0					
IEEE 802.11b	1(2412)	8.567	11.836	> 500 kHz	Pass
	6(2437)	8.613	11.863	> 500 kHz	Pass
	11(2462)	8.134	11.816	> 500 kHz	Pass
IEEE 802.11g	1(2412)	16.390	17.322	> 500 kHz	Pass
	6(2437)	16.410	17.201	> 500 kHz	Pass
	11(2462)	16.420	16.594	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	17.620	17.752	> 500 kHz	Pass
	6(2437)	17.620	17.785	> 500 kHz	Pass
	11(2462)	17.620	17.764	> 500 kHz	Pass
Chain 1					
IEEE 802.11b	1(2412)	9.098	11.554	> 500 kHz	Pass
	6(2437)	9.077	11.609	> 500 kHz	Pass
	11(2462)	9.093	11.566	> 500 kHz	Pass
IEEE 802.11g	1(2412)	16.430	16.574	> 500 kHz	Pass
	6(2437)	16.430	16.580	> 500 kHz	Pass
	11(2462)	16.410	16.574	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	17.660	17.749	> 500 kHz	Pass
	6(2437)	17.660	17.763	> 500 kHz	Pass
	11(2462)	17.640	17.782	> 500 kHz	Pass

The test plots as follows:

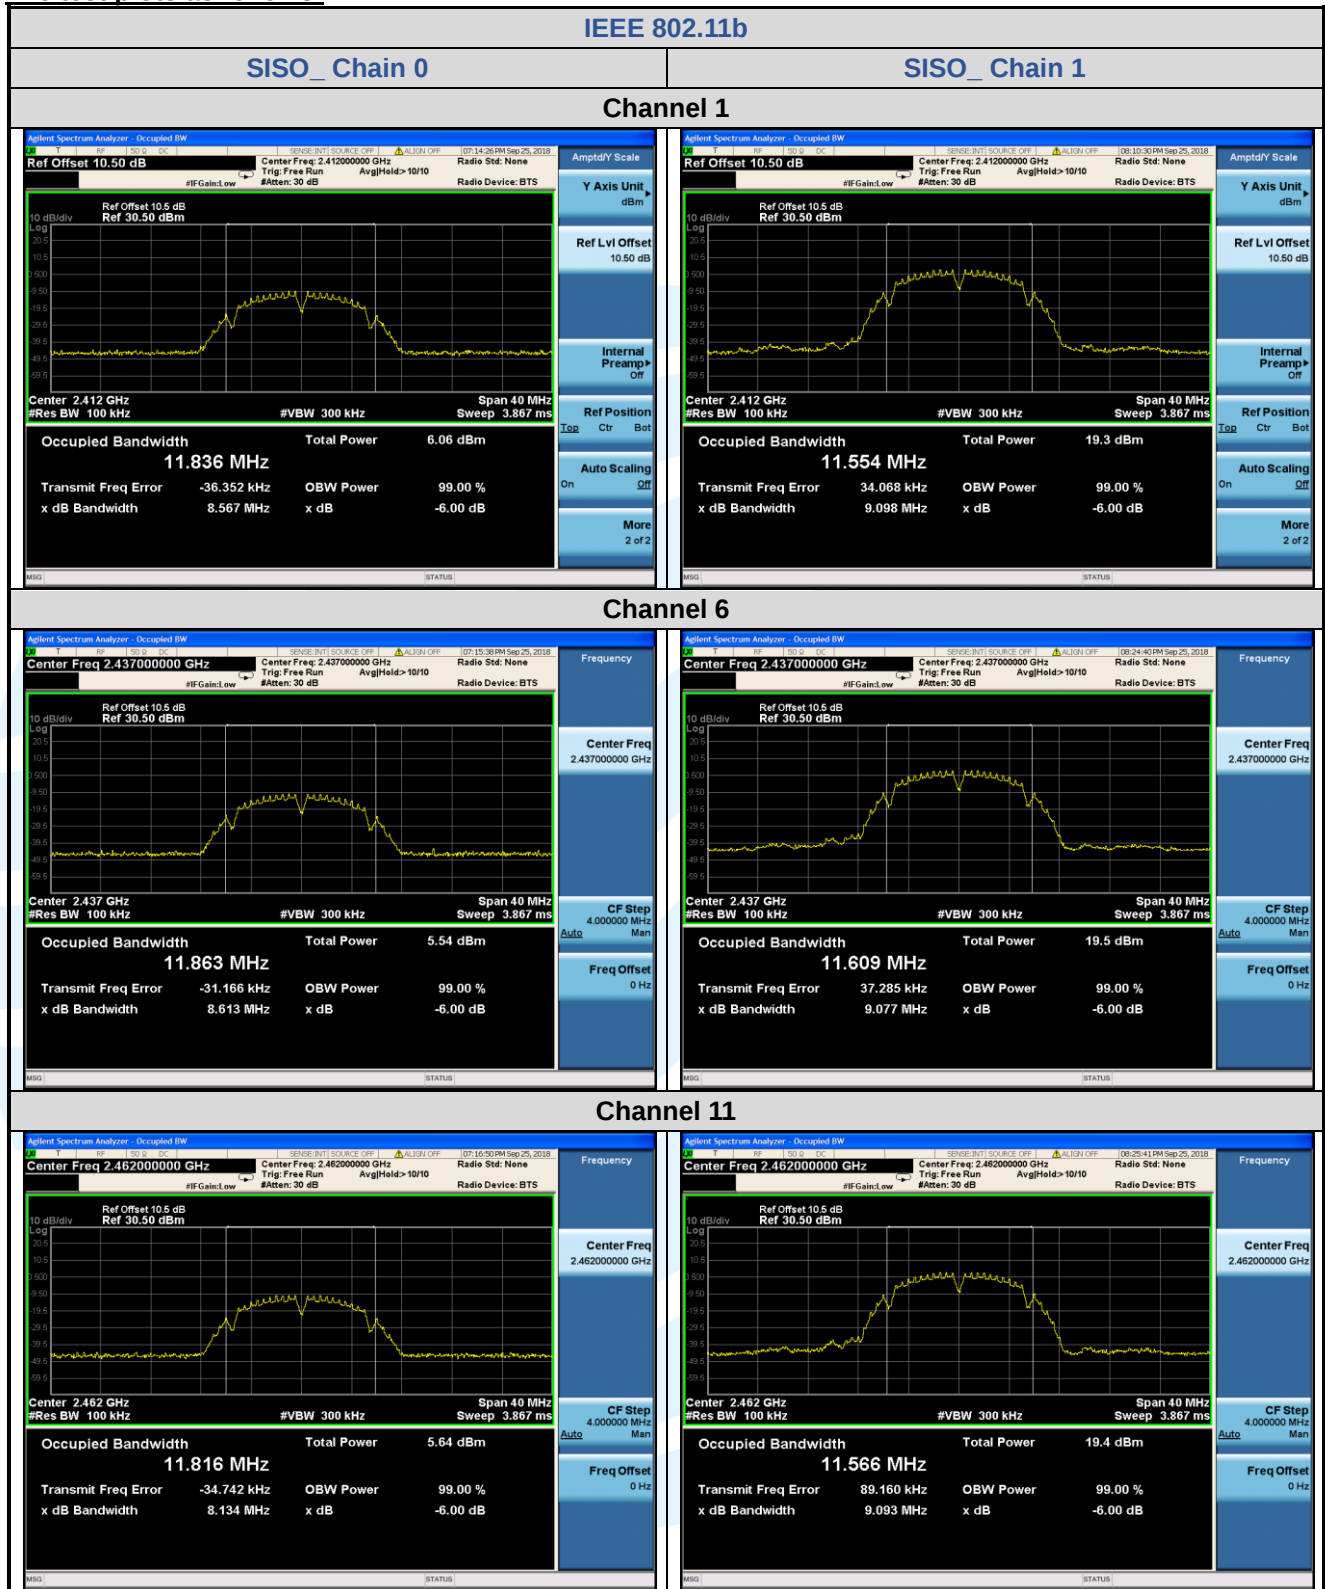

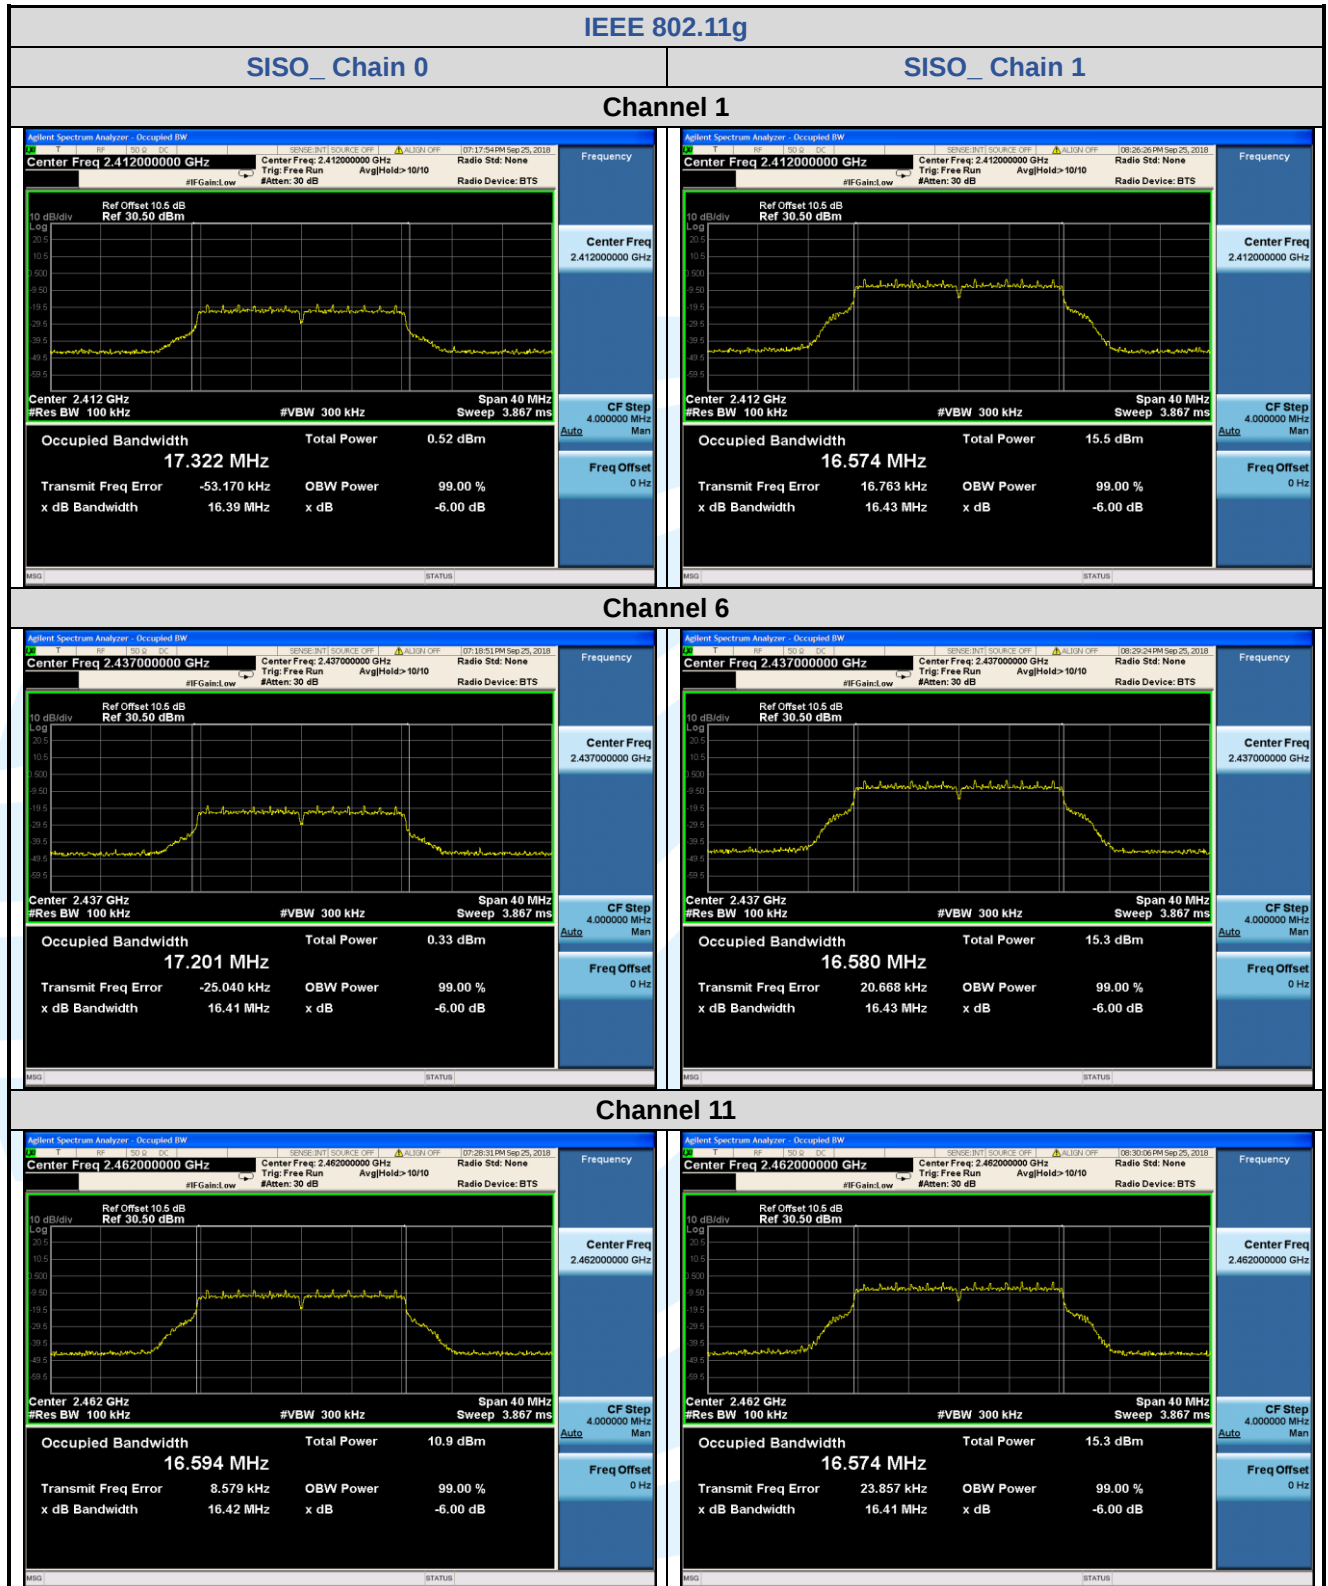

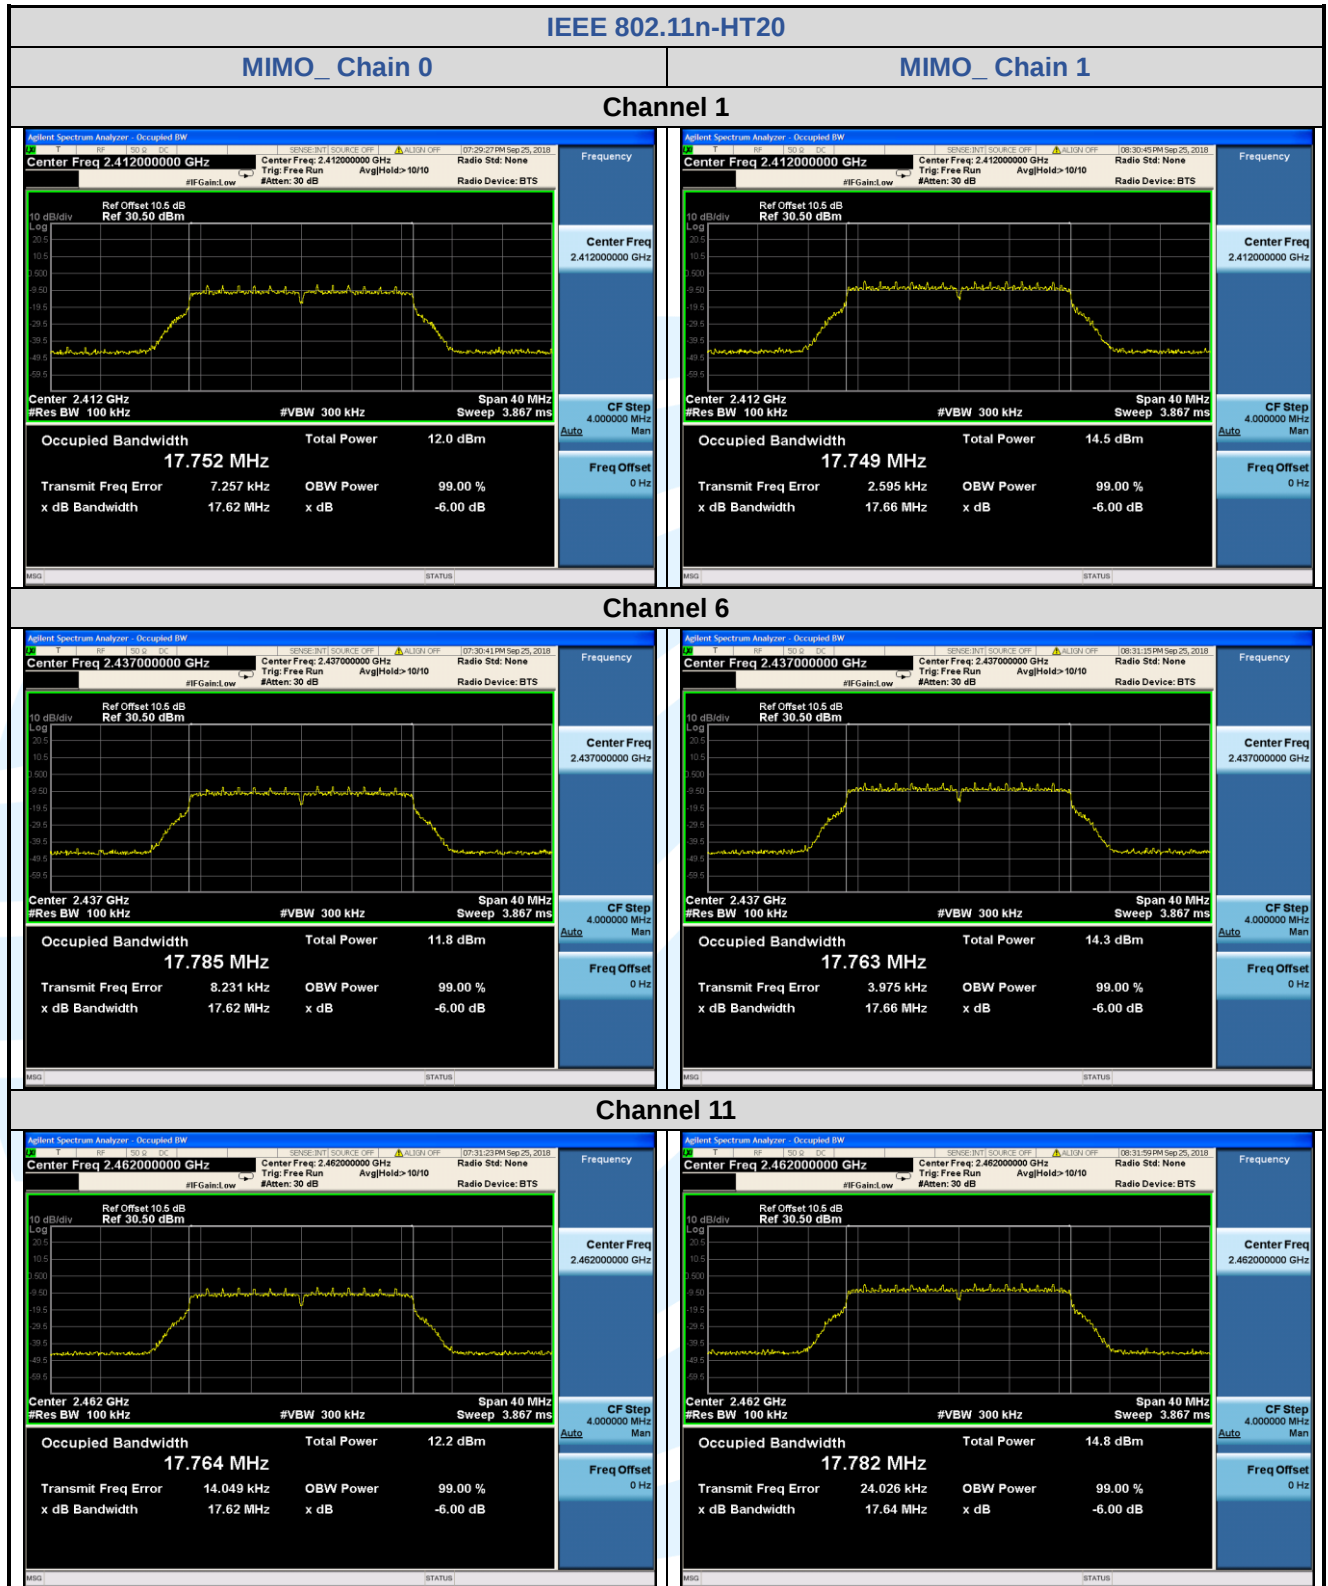

5.5 POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (e)

Test Method: ANSI C63.10-2013 Clause 11.10.2

Limit: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results:


Mode	Channel/ Frequency (MHz)	Power spectral density (dBm/3kHz)				Pass / Fail
		Chain 0	Chain 1	Total Power CDD_Chain 0+1	Limit @3kHz (dBm)	
IEEE 802.11b	1(2412)	-10.85	-10.23	-7.52	8	Pass
	6(2437)	-11.93	-10.81	-8.32	8	Pass
	11(2462)	-11.30	-10.96	-8.11	8	Pass
IEEE 802.11g	1(2412)	-18.41	-17.63	-14.99	8	Pass
	6(2437)	-18.70	-17.73	-15.18	8	Pass
	11(2462)	-19.00	-17.61	-15.24	8	Pass
IEEE 802.11n-HT20	1(2412)	-19.40	-18.20	-15.75	8	Pass
	6(2437)	-19.97	-17.23	-15.37	8	Pass
	11(2462)	-20.19	-18.38	-16.18	8	Pass


Remark:


- Total (Chain 0+1) = $10 \cdot \log[(10^{\text{Chain 0}/10}) + (10^{\text{Chain 1}/10})]$
- Directional gain and the maximum conducted power spectral density limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	2.00	2.00	5.01	8.00
Basic methodology with N_{ANT} transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by N_{ANT} transmitter outputs of equal power. Directional gain is to be computed as follows:				
If any transmit signals are <i>correlated</i> with each other,				
Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi				

The test plots as follows:

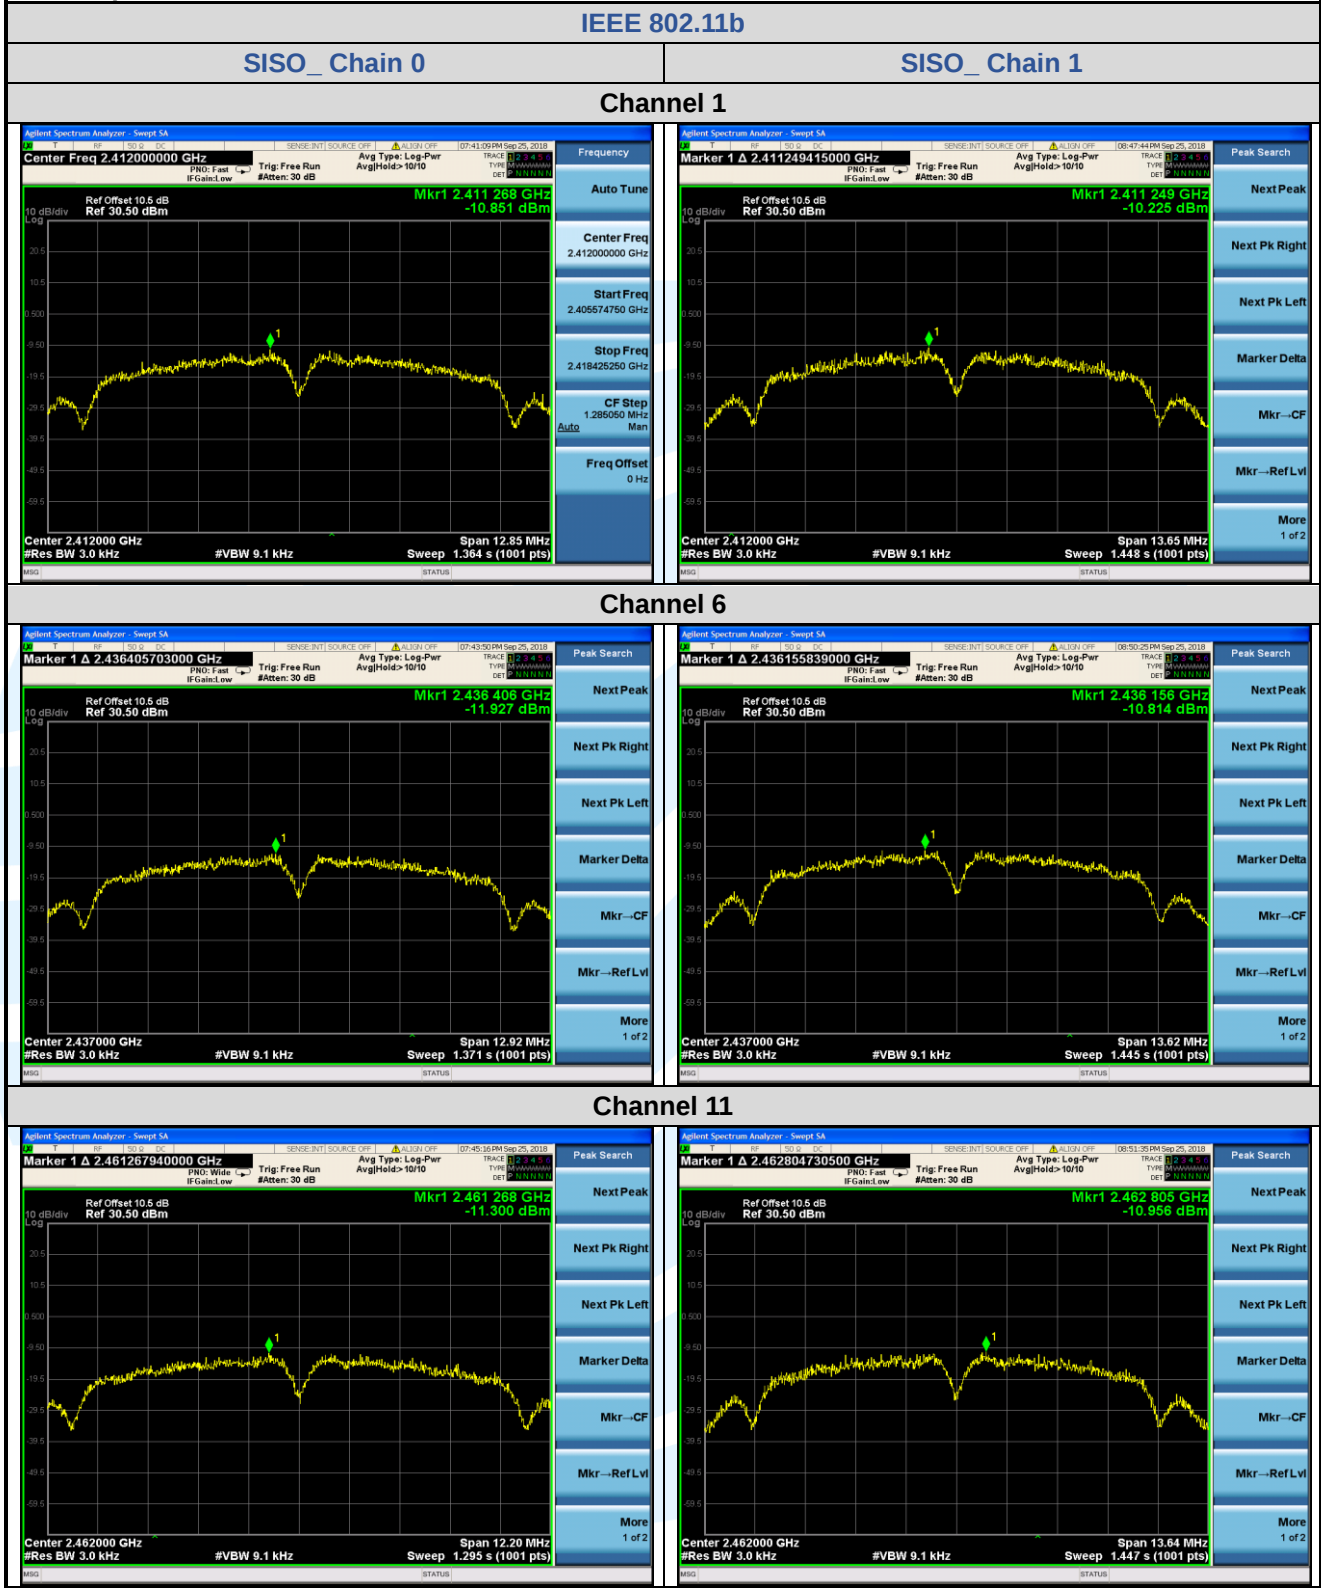

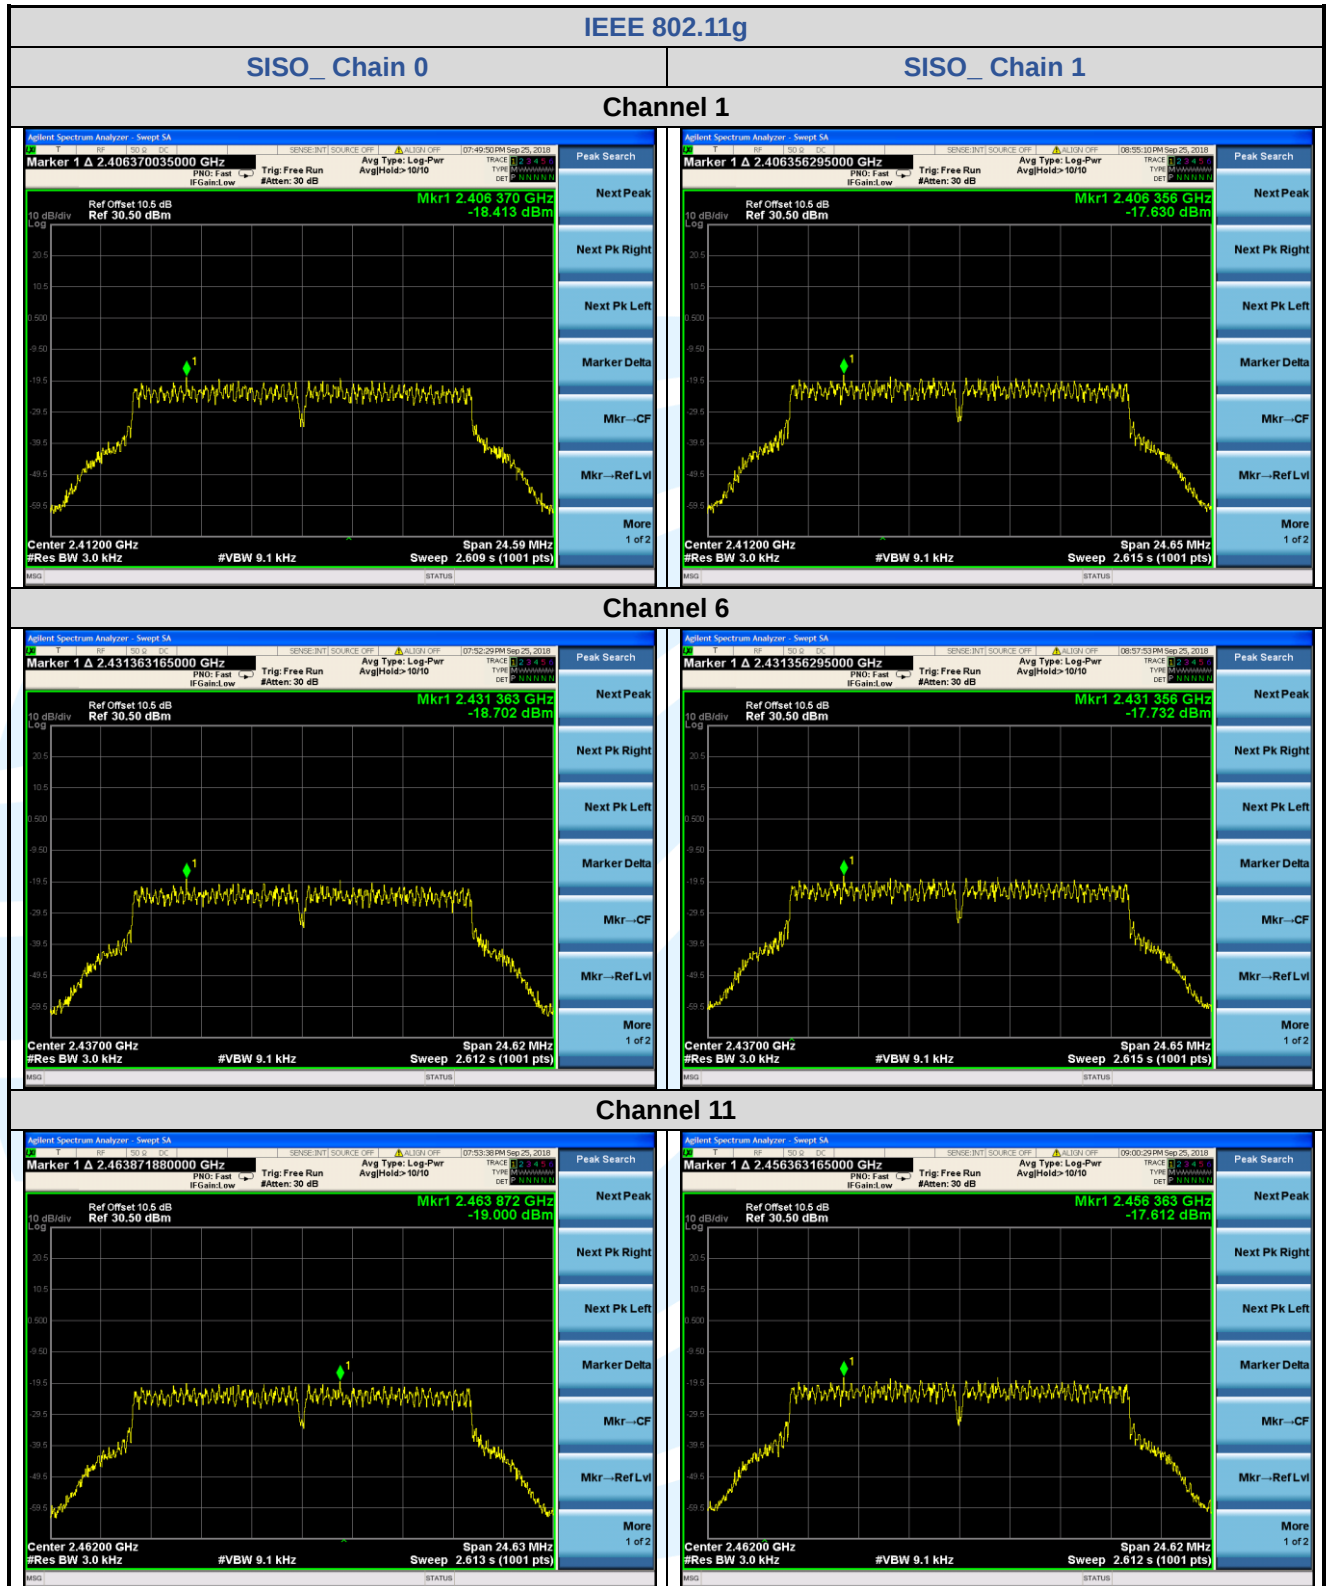

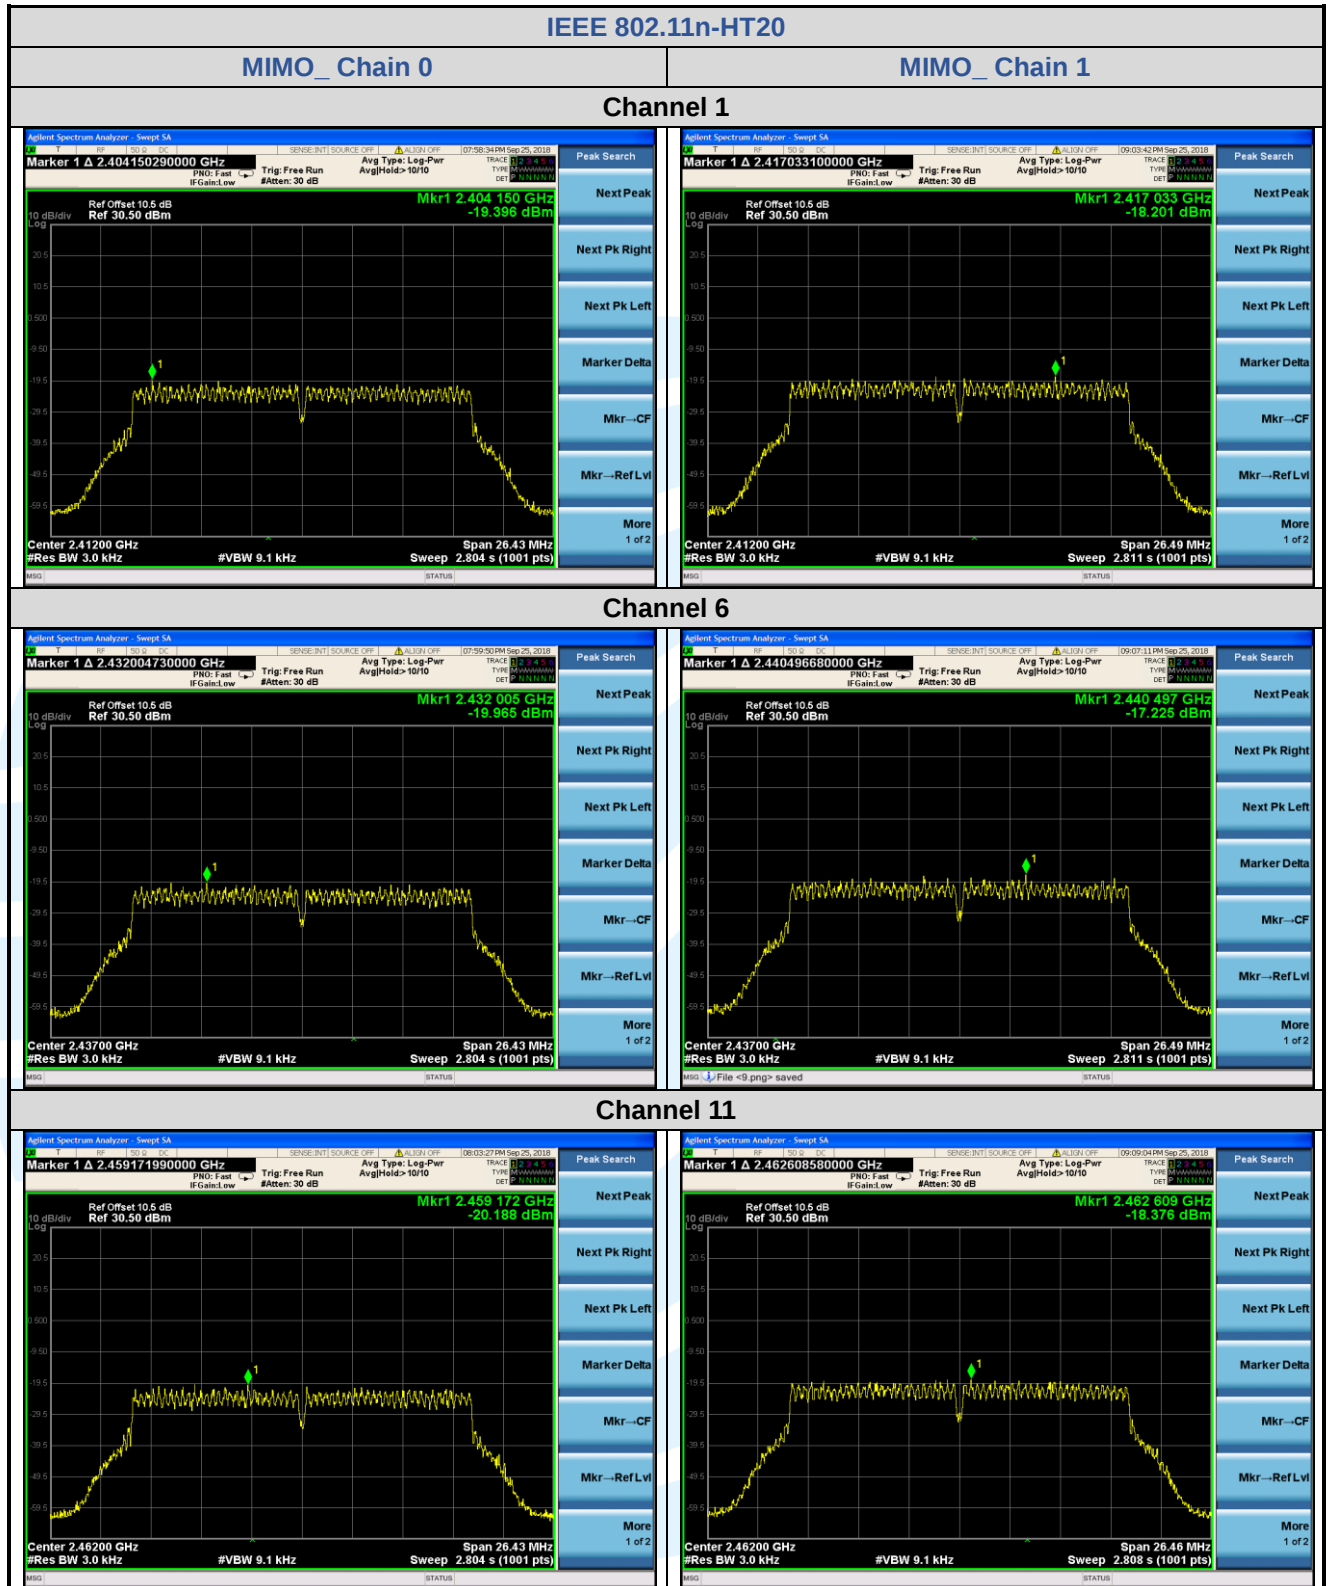

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(d)
Test Method:	ANSI C63.10-2013 Clause 11.11
Limit:	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: Step 1: Measurement Procedure REF - Set instrument center frequency to DTS channel center frequency. - Set the span to ≥ 1.5 times the DTS bandwidth. - Set the RBW = 100 kHz. - Set the VBW $\geq 3 \times$ RBW. - Detector = peak. - Sweep time = auto couple. - Trace mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum PSD level. - Note that the channel found to contain the maximum PSD level can be used to establish the reference level. Step 2: Measurement Procedure OOB - Set RBW = 100 kHz. - Set VBW ≥ 300 kHz. - Detector = peak. - Sweep = auto couple. - Trace Mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

The test plots as follows:

