



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Taxi Butler

Address: Keizersgracht 169, Amsterdam, Netherlands 1016 DP

FCC ID: 2AQJV-PRO

Product Name: TAXIBUTLER

Standard(s): FCC Part 15B
ANSI C63.4-2014

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230850073-00A

Date Of Issue: 2023/9/18

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION	6
1.2.1 EUT Operation Condition:.....	6
1.2.2 Support Equipment List and Details	6
1.2.3 Support Cable List and Details	6
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 AC LINE CONDUCTED EMISSIONS	10
3.1.1 EUT Setup.....	10
3.1.2 EMI Test Receiver Setup	10
3.1.3 Test Procedure	11
3.1.4 Corrected Amplitude & Margin Calculation.....	11
3.2 RADIATED EMISSIONS	12
3.2.1 EUT Setup.....	12
3.2.2 EMI Test Receiver Setup	13
3.2.3 Test Procedure	13
3.2.4 Corrected Amplitude & Margin Calculation.....	13
4. TEST DATA AND RESULTS.....	14
4.1 AC LINE CONDUCTED EMISSIONS	14
4.2 RADIATED EMISSIONS	17
5. EUT PHOTOGRAPHS	22
6. TEST SETUP PHOTOGRAPHS	23

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230850073-00A	Original Report	2023/9/18

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	TAXIBUTLER
EUT Model:	PRO
Highest Operation Frequency:	2480 MHz
Rated Input Voltage:	DC 5V from Adapter
Serial Number:	2AHS-1
EUT Received Date:	2023/9/1
EUT Received Status:	Good

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	Unknown	MKS-0502000DHU

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode: Operating
Equipment Modifications:	No
EUT Exercise Software:	No

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.5	Adapter	EUT

1.2.4 Block Diagram of Test Setup

Conducted emissions:



Radiated emissions:

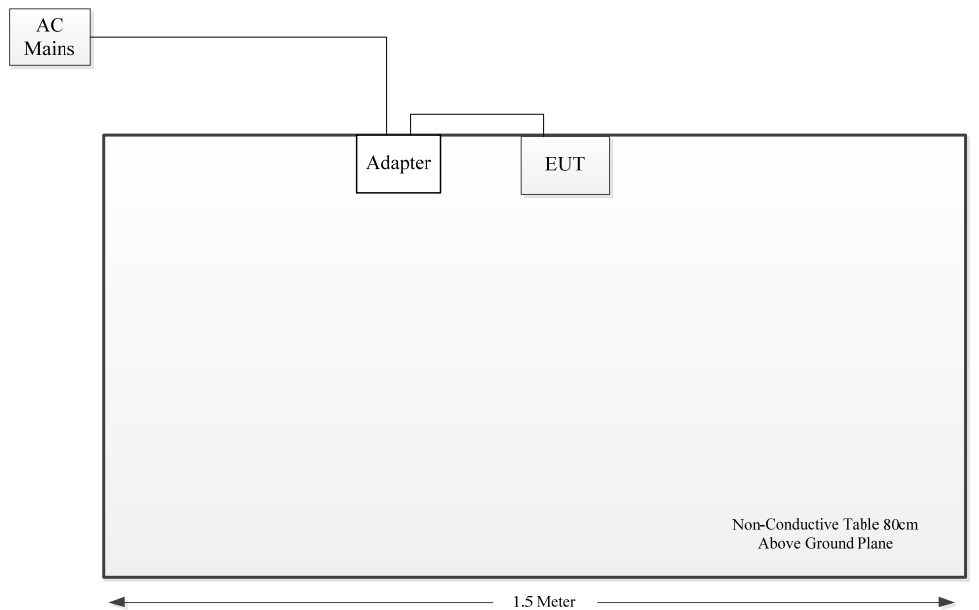

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)


2. SUMMARY OF TEST RESULTS

Standard(s) Section	Description of Test	Result
§15.107	Conducted emissions	Compliant
§15.109	Radiated emissions	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup

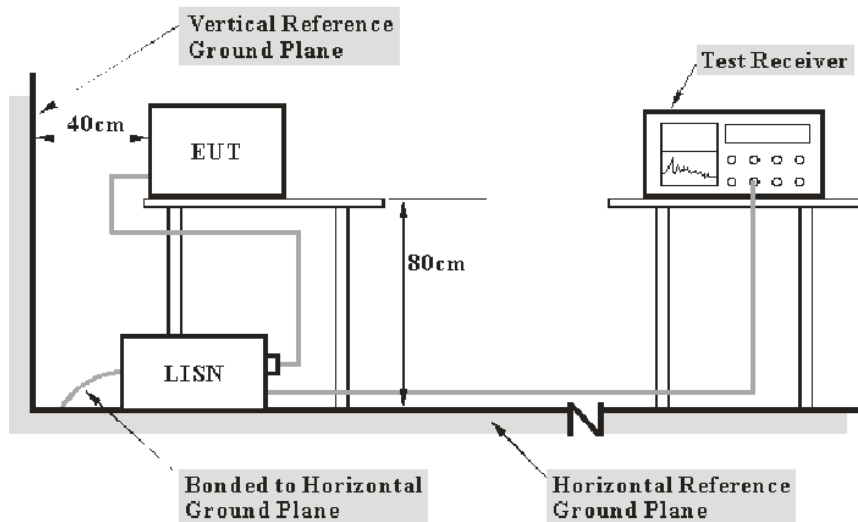

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Radiated Emissions

3.2.1 EUT Setup

Below 1GHz:

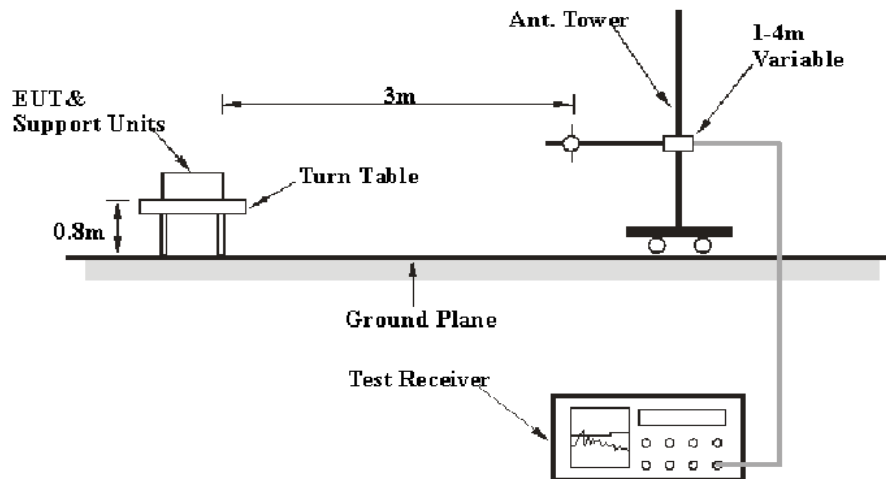

Above 1GHz:

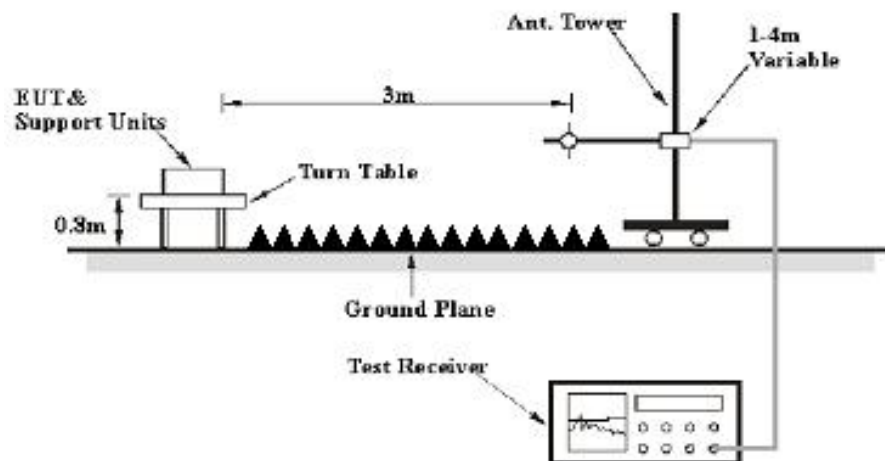

The radiated emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2AHS-1	Test Date:	2023/9/12
Test Site:	CE	Test Mode:	Operating
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.5	Relative Humidity: (%)	55	ATM Pressure: (kPa)	99.9
----------------------	------	---------------------------	----	------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Project No.: CR230850073-RF

Tester: David Huang

Port: Line

Note:

Date: 2023-09-12

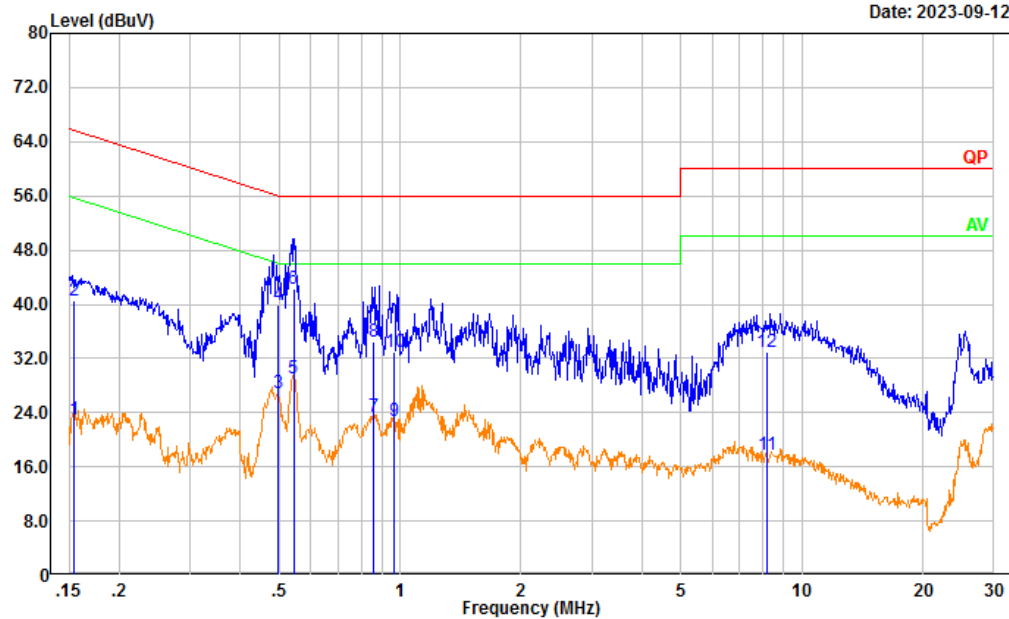


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.155	13.39	9.61	23.00	55.75	32.75	Average
2	0.155	30.98	9.61	40.59	65.75	25.16	QP
3	0.496	17.21	9.61	26.82	46.07	19.25	Average
4	0.496	30.26	9.61	39.87	56.07	16.20	QP
5	0.543	19.47	9.61	29.08	46.00	16.92	Average
6	0.543	32.70	9.61	42.31	56.00	13.69	QP
7	0.858	13.69	9.62	23.31	46.00	22.69	Average
8	0.858	24.87	9.62	34.49	56.00	21.51	QP
9	0.964	13.05	9.62	22.67	46.00	23.33	Average
10	0.964	23.41	9.62	33.03	56.00	22.97	QP
11	8.154	8.12	9.67	17.79	50.00	32.21	Average
12	8.154	23.31	9.67	32.98	60.00	27.02	QP

Project No.: CR230850073-RF

Tester: David Huang

Port: neutral

Note:

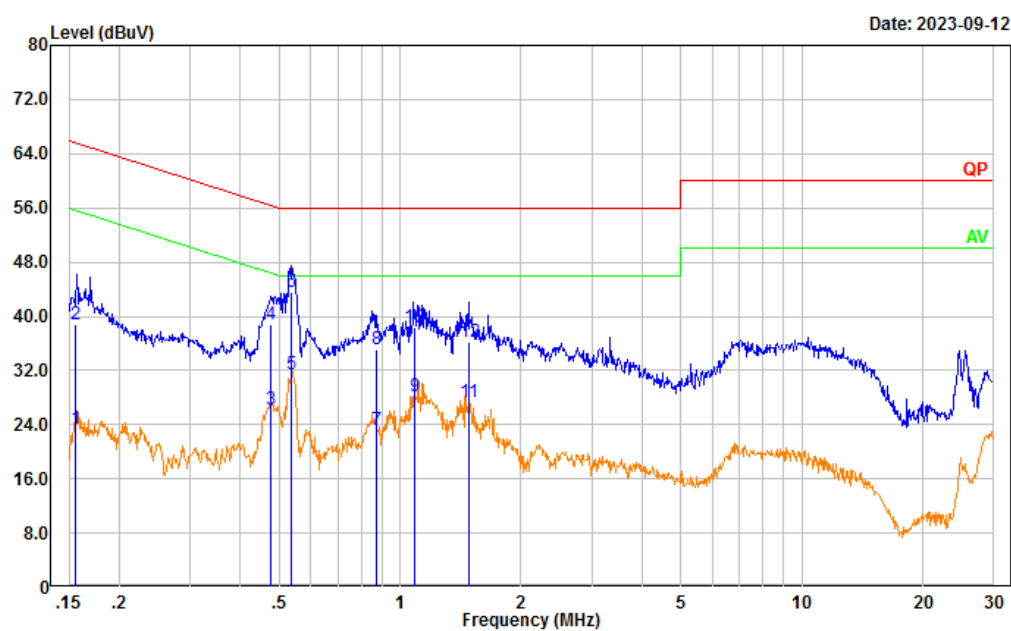

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.156	13.70	9.61	23.31	55.66	32.35	Average
2	0.156	29.29	9.61	38.90	65.66	26.76	QP
3	0.475	16.66	9.61	26.27	46.42	20.15	Average
4	0.475	29.20	9.61	38.81	56.42	17.61	QP
5	0.537	21.78	9.61	31.39	46.00	14.61	Average
6	0.537	33.91	9.61	43.52	56.00	12.48	QP
7	0.872	13.57	9.62	23.19	46.00	22.81	Average
8	0.872	25.51	9.62	35.13	56.00	20.87	QP
9	1.083	18.49	9.62	28.11	46.00	17.89	Average
10	1.083	28.69	9.62	38.31	56.00	17.69	QP
11	1.481	17.69	9.62	27.31	46.00	18.69	Average
12	1.481	26.55	9.62	36.17	56.00	19.83	QP

4.2 Radiated Emissions

Serial Number:	2AHS-1	Test Date:	2023/9/7
Test Site:	966-2,966-1	Test Mode:	Operating
Tester:	Hugo Huo, Mack Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1~26.1	Relative Humidity: (%)	63~65	ATM Pressure: (kPa)	100
----------------------	-----------	------------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
Audix	Test Software	E3	201021 (V9)	N/A	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.


1) 30MHz-1GHz:

Project No.: CR230850073-RF
Tester: Hugo Huo
Polarization: horizontal
Note:

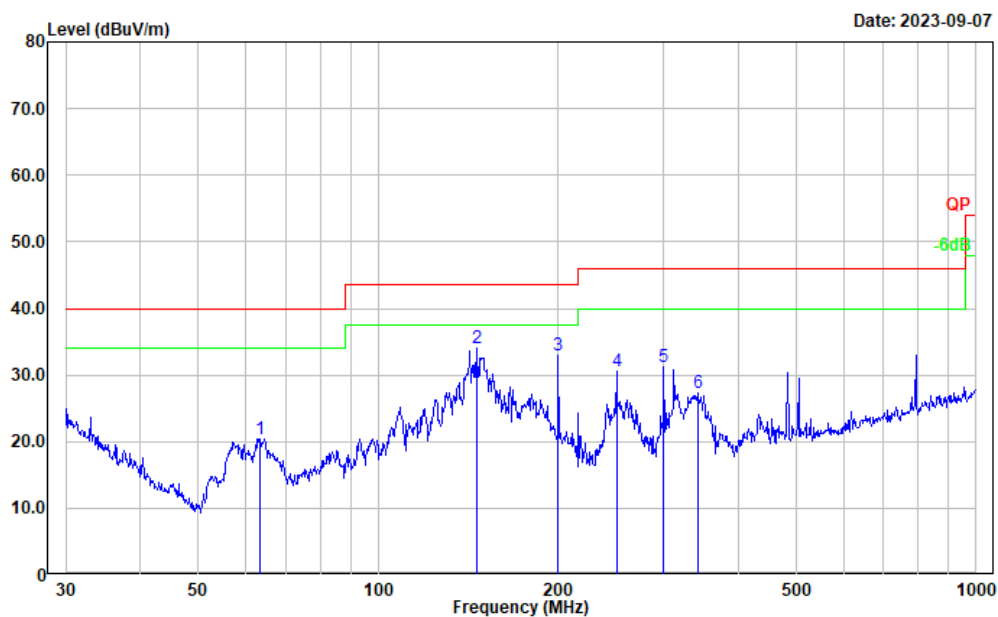

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	63.536	37.50	-17.06	20.44	40.00	19.56	Peak
2	145.861	45.98	-11.97	34.01	43.50	9.49	Peak
3	199.986	45.23	-12.21	33.02	43.50	10.48	Peak
4	250.301	43.64	-13.08	30.56	46.00	15.44	Peak
5	300.367	41.86	-10.63	31.23	46.00	14.77	Peak
6	341.979	37.34	-10.05	27.29	46.00	18.71	Peak

Project No.: CR230850073-RF
Tester: Hugo Huo
Polarization: vertical
Note:

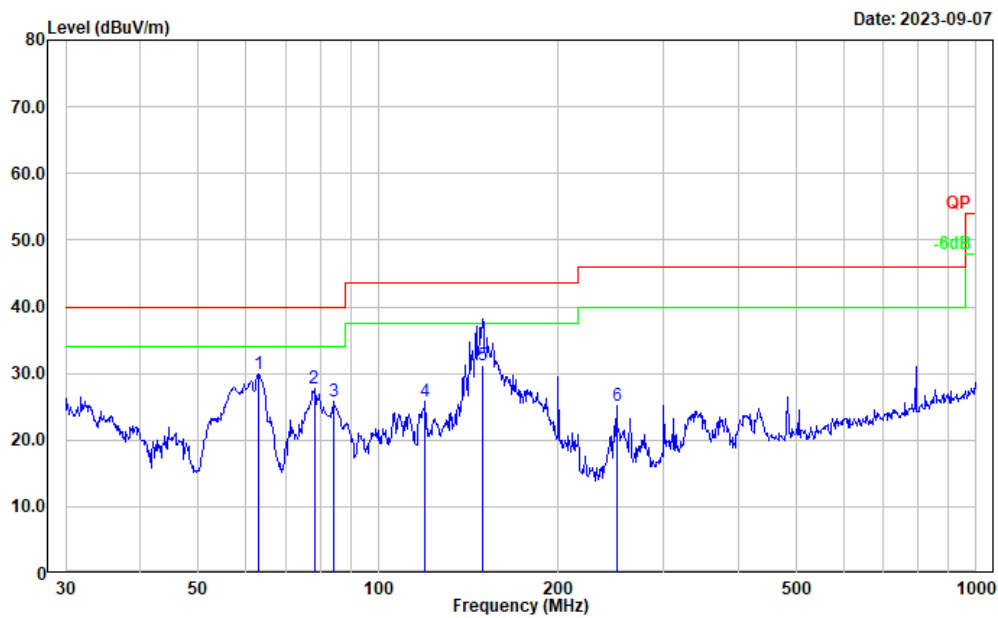


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	63.092	46.92	-17.10	29.82	40.00	10.18	Peak
2	78.139	45.07	-17.27	27.80	40.00	12.20	Peak
3	84.110	43.01	-17.23	25.78	40.00	14.22	Peak
4	119.856	37.32	-11.45	25.87	43.50	17.63	Peak
5	149.611	43.18	-12.00	31.18	43.50	12.32	QP
6	250.301	38.30	-13.08	25.22	46.00	20.78	Peak

2) Above 1GHz:


Project No.: CR230850073-RF
Tester: Mack Huang
Polarization: horizontal
Note:

Date: 2023-09-07

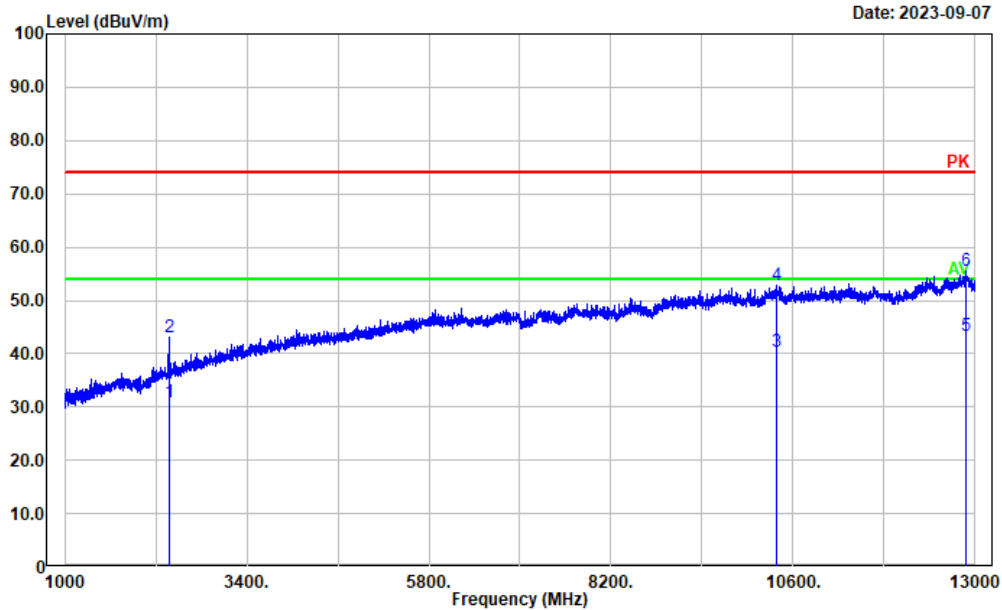

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2382.677	27.56	3.46	31.02	54.00	22.98	Average
2	2382.677	39.58	3.46	43.04	74.00	30.96	Peak
3	10385.880	21.32	19.16	40.48	54.00	13.52	Average
4	10385.880	33.81	19.16	52.97	74.00	21.03	Peak
5	12882.380	21.05	22.23	43.28	54.00	10.72	Average
6	12882.380	33.32	22.23	55.55	74.00	18.45	Peak

Project No.: CR230850073-RF
Tester: Mack Huang
Polarization: vertical
Note:

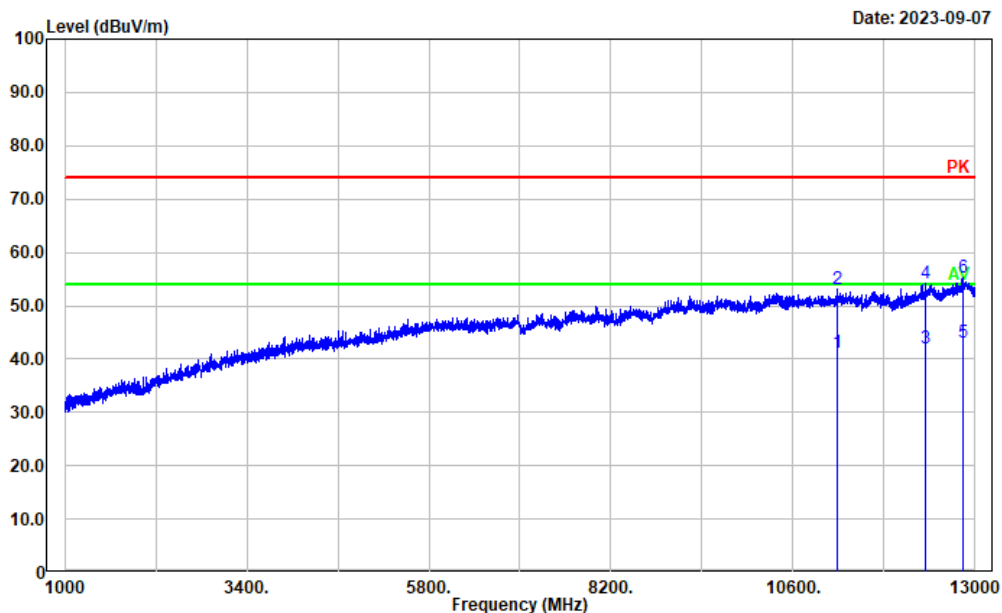

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11190.040	21.12	19.99	41.11	54.00	12.89	Average
2	11190.040	33.23	19.99	53.22	74.00	20.78	Peak
3	12347.070	20.60	21.52	42.12	54.00	11.88	Average
4	12347.070	32.72	21.52	54.24	74.00	19.76	Peak
5	12843.970	21.12	22.07	43.19	54.00	10.81	Average
6	12843.970	33.30	22.07	55.37	74.00	18.63	Peak

5. EUT PHOTOGRAPHS

Please refer to the attachment CR230850073-EXP EUT EXTERNAL PHOTOGRAPHS and CR230850073-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230850073-00A-TSP TEST SETUP PHOTOGRAPHS.

=====END OF REPORT=====