

FCC/IC REPORT

(WCDMA)

Applicant: AceAge Inc.
Address of Applicant: 26 Ontario Street, Suite 109 Guelph, Ontario, Canada N1E7K1

Equipment Under Test (EUT)

Product Name: Karie Connectivity Module

Model No.: AceAge1A

Trade mark: AceAge

FCC ID: 2AQKR-P001R1

Canada IC: 24087-P001R1

Applicable standards:

FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart L
RSS-Gen Issue 4, November 2014
RSS-132 Issue 3, January 2013
RSS-133 Issue 6, January 2013
RSS-139 Issue 3, July 2015

Date of sample receipt: 05 Jul., 2018

Date of Test: 05 Jul., to 25 Jul., 2018

Date of report issued: 21 Aug., 2018

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	25 Jul., 2018	Original
01	21 Aug., 2018	Update information on page 18 and page 21.

Tested by:

Mike.ou

Date:

21 Aug., 2018

Test Engineer

Reviewed by:

Wimer Zhang

Date:

21 Aug., 2018

Project Engineer

3. Contents

Page

1.	COVER PAGE	1
2.	VERSION	2
3.	CONTENTS	3
4.	TEST SUMMARY	4
5.	GENERAL INFORMATION	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF E.U.T	5
5.3	TEST MODES	7
5.4	DESCRIPTION OF SUPPORT UNITS	7
5.5	MEASUREMENT UNCERTAINTY	7
5.6	LABORATORY FACILITY	8
5.7	LABORATORY LOCATION	8
5.8	TEST INSTRUMENTS LIST	8
6.	TEST RESULTS	9
6.1	CONDUCTED OUTPUT POWER	9
6.2	OCCUPY BANDWIDTH	11
6.3	PEAK-TO-AVERAGE POWER RATIO	15
6.4	MODULATION CHARACTERISTIC	17
6.5	OUT OF BAND EMISSION AT ANTENNA TERMINALS	17
6.6	ERP, EIRP MEASUREMENT	23
6.7	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	25
6.8	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	29
6.9	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	31
7	TEST SETUP PHOTO	33
8	EUT CONSTRUCTIONAL DETAILS	34

4. Test Summary

Test Item	Section		Result
	FCC	IC	
RF Exposure (SAR)	Oet65b	RSS 102	Pass (Please refer to MPE Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c) Part 27.50 (d)(4)	RSS Gen Section 6.12 RSS 132 Section 5.4 RSS 133 Section 6.4 RSS 139 section 6.5	Pass
Peak-to-Average Power Ratio	Part 24.232 (d) Part 27.50(d)(5)	RSS 132 Section 5.4 RSS 133 Section 6.4 RSS 139 section 6.5	Pass
Modulation Characteristics	Part 2.1047	RSS 132 Section 5.2 RSS 133 Section 6.2 RSS 139 section 6.2	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53(h)	RSS Gen Section 6.6	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	RSS Gen Section 6.13 RSS 132 Section 5.5 RSS 133 Section 6.5 RSS 139 section 6.6	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	RSS Gen Section 6.13 RSS 132 Section 5.5 RSS 133 Section 6.5 RSS 139 section 6.6	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	RSS Gen Section 6.13 RSS 132 Section 5.5 RSS 133 Section 6.5 RSS 139 section 6.6	Pass
Frequency stability vs. temperature	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(a)(1)(b)	RSS Gen Section 6.11 RSS 132 Section 5.3 RSS 133 Section 6.3 RSS 139 section 6.4	Pass
Frequency stability vs. voltage	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(d)(1)	RSS Gen Section 6.11 RSS 132 Section 5.3 RSS 133 Section 6.3 RSS 139 section 6.4	Pass
Pass: The EUT complies with the essential requirements in the standard.			

5. General Information

5.1 Client Information

Applicant:	AceAge Inc.
Address:	26 Ontario Street, Suite 109 Guelph, Ontario, Canada N1E7K1
Manufacturer	AceAge Inc.
Address:	26 Ontario Street, Suite 109 Guelph, Ontario, Canada N1E7K1

5.2 General Description of E.U.T.

Product Name:	Karie Connectivity Module
Model No.:	AceAge1A
Operation Frequency range:	WCDMA Band V: 826.4MHz-846.6MHz WCDMA Band II: 1852.4 MHz -1907.6 MHz WCDMA Band IV: 1712.4 MHz-1752.6 MHz
Modulation type:	UMTS: QPSK
Antenna type:	Internal Antenna
Antenna gain:	WCDMA Band V: 0.64 dBi WCDMA Band II: 0.64 dBi WCDMA Band IV: 0.64 dBi
Power supply:	DC 4.2V

Operation Frequency List:

WCDMA Band V		WCDMA Band II	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....			
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...	...	...	...
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60
WCDMA Band IV			
Channel	Frequency (MHz)		
1312	1712.40		
1313	1712.60		
....			
1412	1732.40		
1413	1732.60		
1414	1732.80		
...	...		
1512	1752.40		
1513	1752.60		

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

WCDMA Band V			WCDMA Band II		
Channel		Frequency(MHz)	Channel		Frequency(MHz)
Lowest channel	4132	826.40	Lowest channel	9262	1852.40
Middle channel	4183	836.60	Middle channel	9400	1880.00
Highest channel	4233	846.60	Highest channel	9538	1907.60
WCDMA Band IV					
Channel		Frequency(MHz)			
Lowest channel	1312	1712.40			
Middle channel	1413	1732.60			
Highest channel	1513	1752.60			

5.3 Test modes

Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 4.2Vdc, Extreme: Low 3.57Vdc, High 4.83Vdc
Test mode:	
RMC mode	Keep the EUT communication with simulated station in RMC mode
HSDPA	Keep the EUT communication with simulated station in HSDPA mode
HSUPA	Keep the EUT communication with simulated station in HSUPA mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes with power adaptor, earphone and Data cable. Just the worst case position (H mode) shown in report.	

5.4 Description of Support Units

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Radiated Emission (9kHz ~ 30MHz)	±2.76 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.28 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.72 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±2.88 dB (k=2)

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366


Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.8 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-16-2018	03-15-2019
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-16-2018	03-15-2019
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
EMI Test Software	AUDIX	E3	6.110919b	N/A	N/A
Pre-amplifier	HP	8447D	2944A09358	03-07-2018	03-06-2019
Pre-amplifier	CD	PAP-1G18	11804	03-07-2018	03-06-2019
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-07-2018	03-06-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-07-2018	03-06-2019
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-10-2017	11-09-2018
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-07-2018	03-06-2019
Signal Generator	R&S	SMR20	1008100050	03-07-2018	03-06-2019
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2018	03-06-2019
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2018	03-06-2019
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2018	03-06-2019
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	10-31-2017	10-30-2018
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	09-24-2017	09-23-2018
Simulated Station	Rohde & Schwarz	CMW500	140493	06-24-2017	06-23-2018

6. Test results


6.1 Conducted Output Power

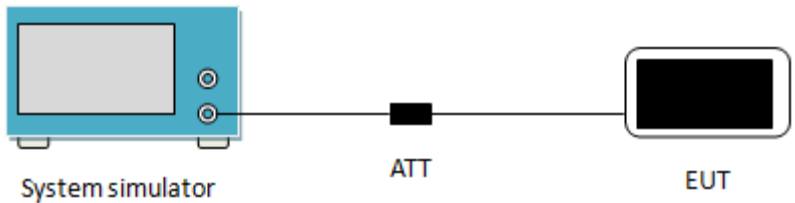Test Requirement:	FCC part 22.913(a)(2) and FCC part 24.232(c), FCC part 27.50(d)(4) RSS 132 section 5.4 and RSS 133 section 6.4, RSS 139 section 6.5
Test Method:	ANSI/TIA-603-D 2010 RSS Gen section 6.12 and ANSI C63.26-2015
Limit:	FCC: WCDMA Band V: 7W, WCDMA Band II: 2W, WCDMA Band IV: 1W IC: WCDMA Band V: 11.5W, WCDMA Band II: 2W, WCDMA Band IV: 1W
Test setup:	 The diagram illustrates the test setup. On the left is a blue box labeled 'System simulator'. A line connects it to a small black rectangle labeled 'ATT' (attenuator). Another line connects the 'ATT' to a black rectangle labeled 'EUT' (Equipment Under Test).
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

EUT Mode		Burst Average power (dBm)			Limit(dBm)	
		4132	4183	4233		
		826.40MHz	836.60MHz	846.60MHz	FCC	IC
UMTS 850 HSDPA	Subtest 1	21.73	21.65	21.64	38.45	40.61
	Subtest 2	21.28	21.33	21.22		
	Subtest 3	19.78	19.77	19.60		
	Subtest 4	19.76	19.95	19.76		
UMTS 850 HSUPA	Subtest 1	21.62	21.56	21.52		
	Subtest 2	21.60	21.60	21.59		
	Subtest 3	19.72	19.72	19.72		
	Subtest 4	21.59	21.61	21.61		
	Subtest 5	20.76	20.76	20.65		
UMTS 850 RMC	12.2kbps	22.65	22.67	22.73		
UMTS 850 AMR	12.2kbps	22.64	22.65	22.71		
EUT Mode		Burst Average power (dBm)			Limit(dBm)	
		9262	9400	9538		
		1852.40MHz	1880.00MHz	1907.60MHz	FCC	IC
UMTS 1900 HSDPA	Subtest 1	20.90	20.72	20.73	33.00	33.00
	Subtest 2	20.53	20.26	20.36		
	Subtest 3	19.00	18.81	18.78		
	Subtest 4	19.02	18.85	18.72		
UMTS 1900 HSUPA	Subtest 1	20.84	20.60	20.66		
	Subtest 2	20.85	20.63	20.71		
	Subtest 3	18.96	18.80	18.83		
	Subtest 4	20.93	20.68	20.81		
	Subtest 5	19.94	19.68	19.76		
UMTS 1900 RMC	12.2kbps	21.83	21.66	21.78		
UMTS 1900 AMR	12.2kbps	21.82	21.64	21.78		
EUT Mode		Burst Average power (dBm)			Limit(dBm)	
		1312	1412	1513		
		1712.40MHz	1732.40MHz	1752.60MHz	FCC	IC
UMTS 1700 HSDPA	Subtest 1	21.75	21.74	21.64	33.00	33.00
	Subtest 2	21.36	21.49	21.24		
	Subtest 3	19.92	19.91	19.67		
	Subtest 4	19.81	19.77	19.81		
UMTS 1700 HSUPA	Subtest 1	21.73	21.63	21.55		
	Subtest 2	21.65	21.66	21.61		
	Subtest 3	19.74	19.79	19.78		
	Subtest 4	21.72	21.72	21.62		
	Subtest 5	20.88	20.83	20.70		
UMTS 1700 RMC	12.2kbps	22.79	22.80	22.68		
UMTS 1700 AMR	12.2kbps	22.75	22.75	22.66		


6.2 Occupy Bandwidth

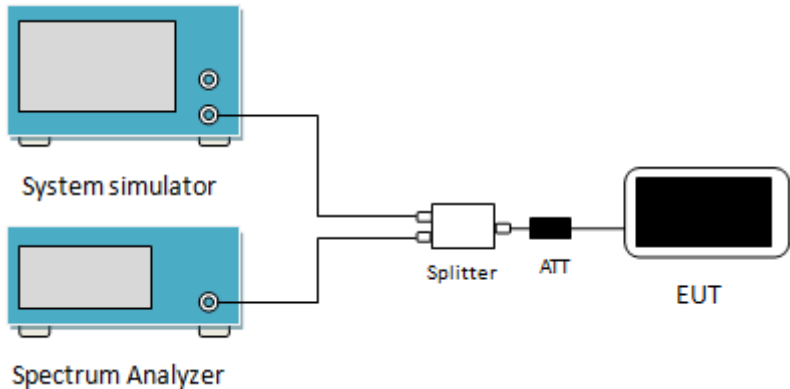Test Requirement:	FCC part 22.917(b), FCC part 24.238(b) , FCC Part 27.53(h) RSS Gen section 6.6
Test Method:	ANSI/TIA-603-D 2010 RSS Gen section 6.6 and ANSI C63.26-2015
Test setup:	 The diagram illustrates the test setup. A System simulator and a Spectrum Analyzer are connected to a Splitter. The Splitter is connected to an ATT (Attenuator), which is then connected to the EUT (Equipment Under Test).
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
UMTS 850 12.2k RMC	4132	826.4	4180	4860
	4183	836.6	4220	4920
	4233	846.6	4220	4880
UMTS 1900 12.2k RMC	9262	1852.4	4220	4880
	9400	1880.0	4200	4900
	9538	1907.6	4220	4920
UMTS 1700 12.2k RMC	1312	1712.40	4220	4860
	1413	1732.60	4180	4860
	1513	1752.60	4220	4900

Test plot as follows:

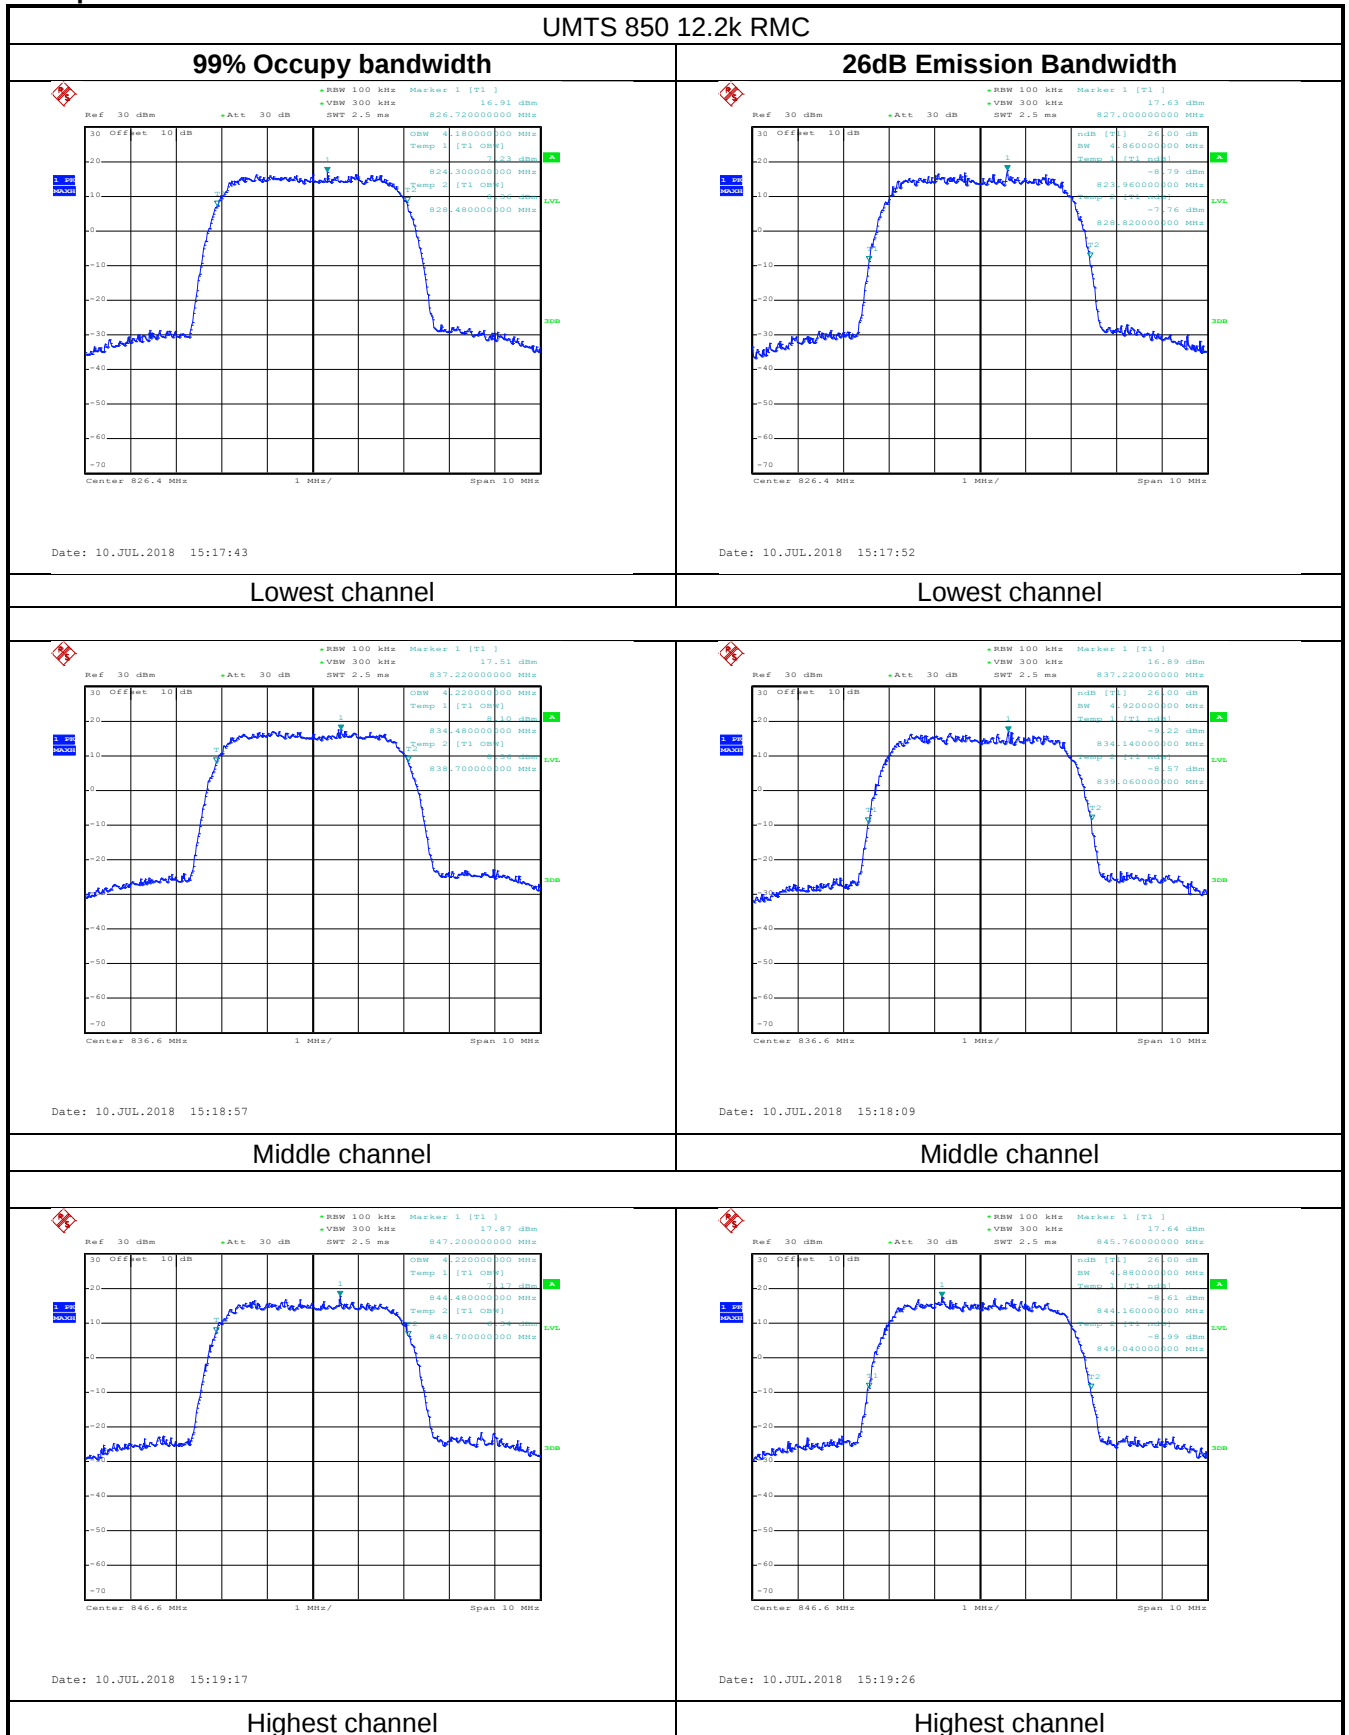


UMTS 1900 12.2k RMC

99% Occupy bandwidth

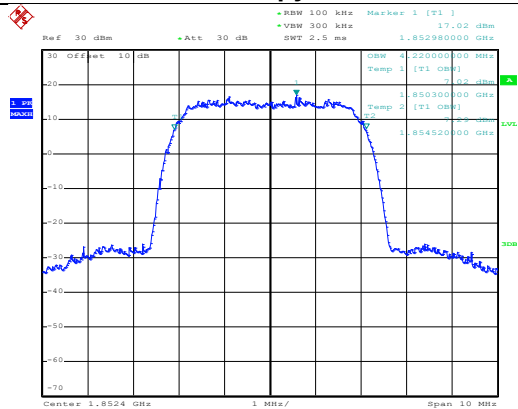


Date: 10.JUL.2018 15:13:59

26dB Emission Bandwidth

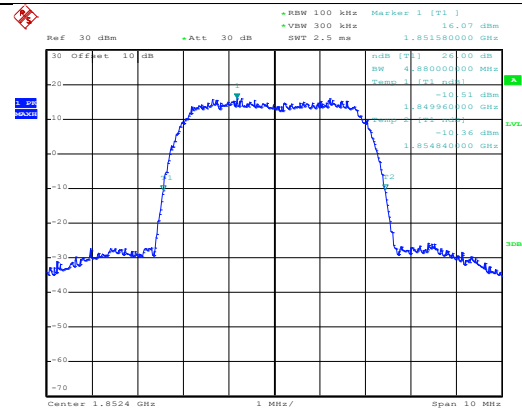


Date: 10.JUL.2018 15:14:10

Lowest channel

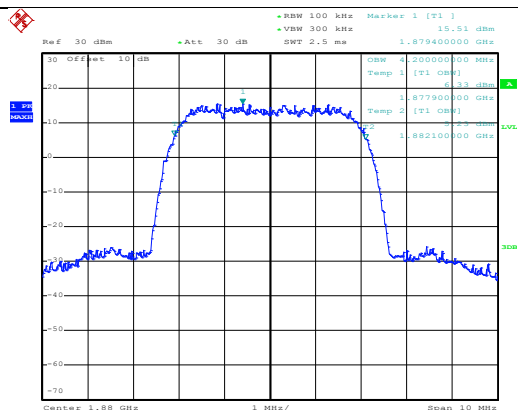


Date: 10.JUL.2018 15:14:46

Lowest channel

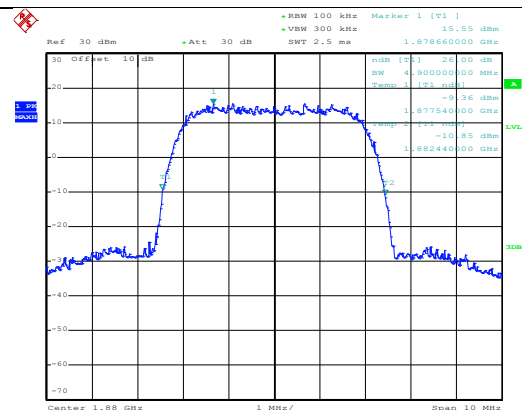


Date: 10.JUL.2018 15:14:36

Middle channel

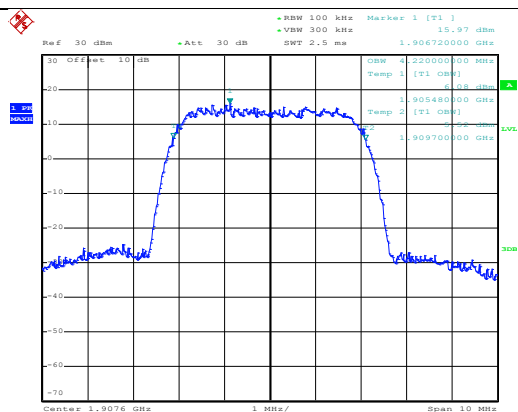

Date: 10.JUL.2018 15:15:04

Middle channel

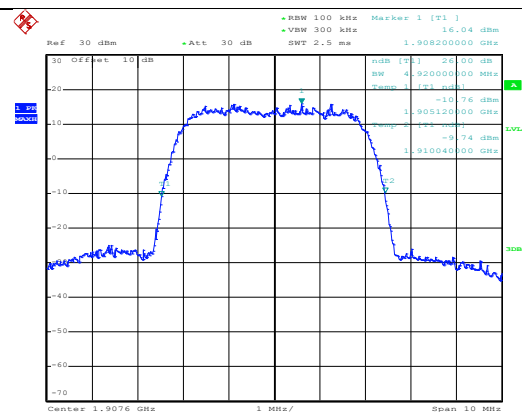


Date: 10.JUL.2018 15:15:15

Highest channel


Highest channel

UMTS 1700 12.2k RMC


99% Occupy bandwidth

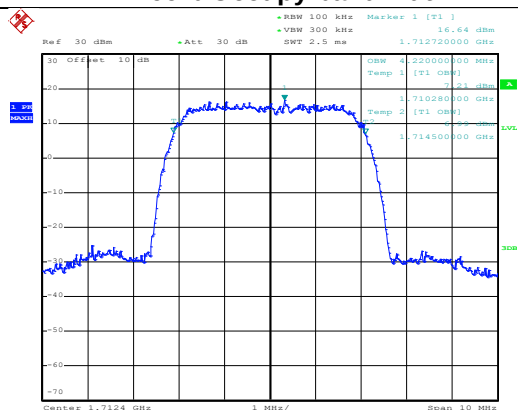


26dB Emission Bandwidth

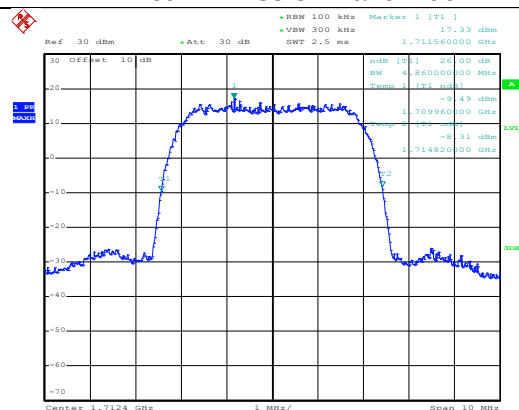


Lowest channel

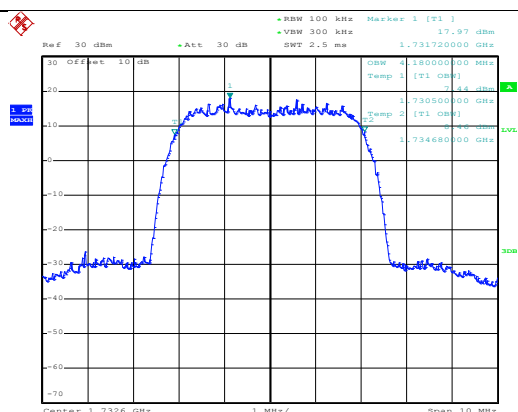


Lowest channel

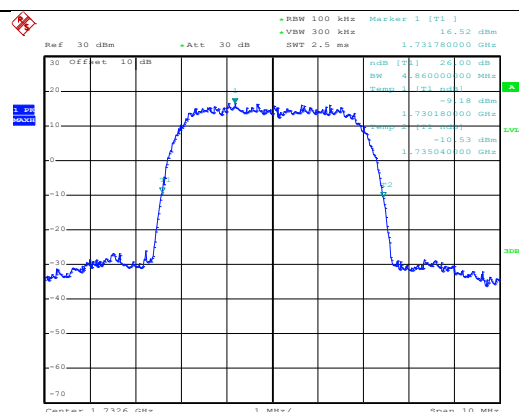

Middle channel

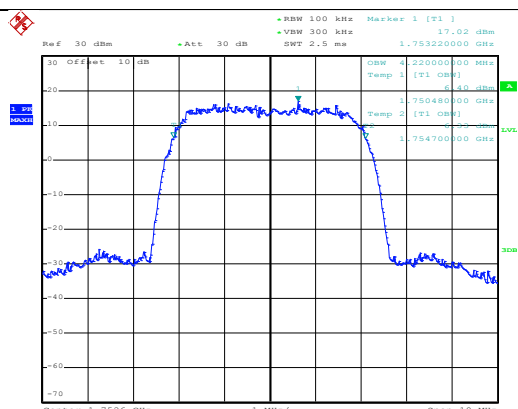


Middle channel

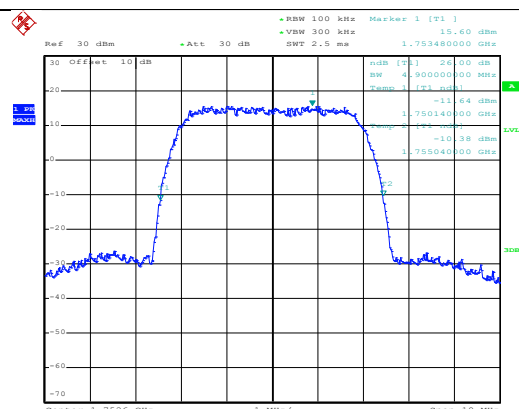

Highest channel

Highest channel




6.3 Peak-to-Average Power Ratio

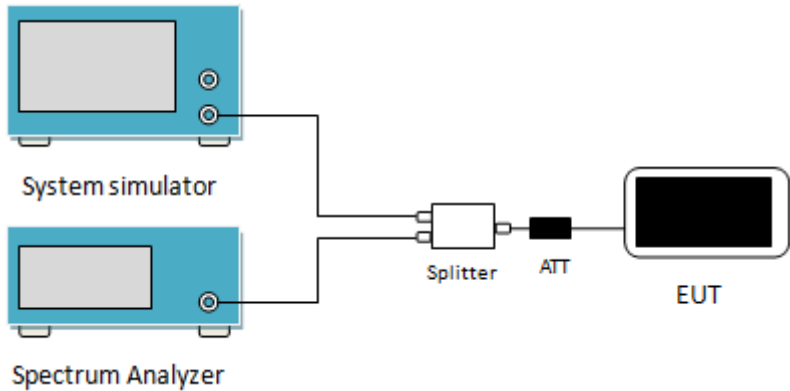Test Requirement:	FCC part 24.232(d) , FCC part 27.50(d)(5) RSS 132 section 5.4 and RSS 133 section 6.4, RSS 139 section 6.5
Test Method	ANSI/TIA-603-D 2010 ANSI C63.26-2015
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	 The diagram shows a test setup for measuring the Peak-to-Average Power Ratio (PAR). It includes a System simulator, a Spectrum Analyzer, a Splitter, an ATT (Attenuator), and the EUT (Equipment Under Test). The System simulator and Spectrum Analyzer are connected to the Splitter. The Splitter is connected to the ATT, which is then connected to the EUT.
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, $RBW \geq OBW$, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Modulation	Test channel	PAPR
UMTS 850 RMC	4183	2.60
UMTS 1900 RMC	9400	2.88
UMTS 1700 RMC	1413	2.84


Test plots as below:

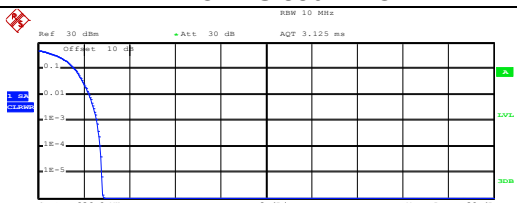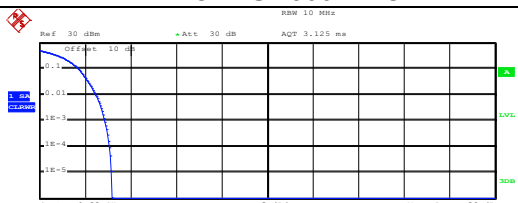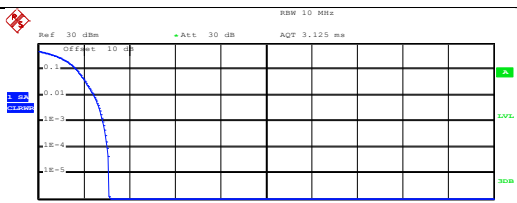Middle channel	Middle channel
UMTS 850 RMC	UMTS 1900 RMC
 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.22 dBm Peak 25.06 dBm Crest 2.84 dB 10 % 1.60 dB 1 % 2.24 dB .1 % 2.60 dB .01 % 2.72 dB Date: 10.JUL.2018 15:28:56	 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 20.69 dBm Peak 23.86 dBm Crest 3.17 dB 10 % 1.72 dB 1 % 2.48 dB .1 % 2.88 dB .01 % 3.08 dB Date: 10.JUL.2018 15:27:35
Middle channel	Middle channel
UMTS 1700 RMC  Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 21.81 dBm Peak 24.92 dBm Crest 3.11 dB 10 % 1.68 dB 1 % 2.44 dB .1 % 2.84 dB .01 % 3.04 dB Date: 10.JUL.2018 15:28:07	
Middle channel	

6.4 Modulation Characteristic


According to FCC § 2.1047(d), Part 22H & 24E& 27L, RSS 132, RSS 133, RSS 139 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


6.5 Out of band emission at antenna terminals

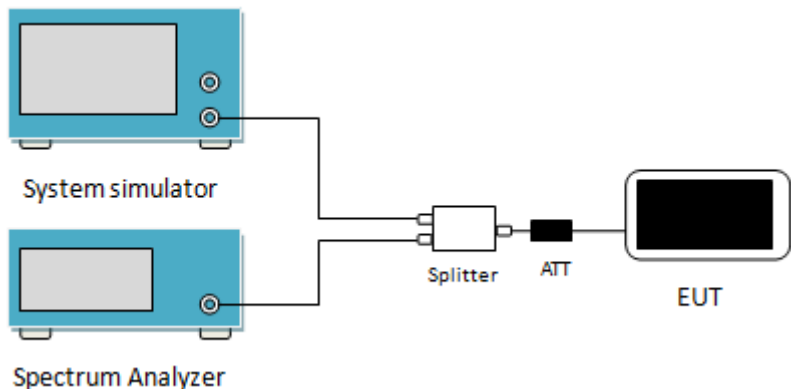Test Requirement:	FCC part 22.917(a), FCC part 24.238(a) , FCC Part 27.53 (h) RSS 132 section 5.5 and RSS 133 section 6.5 and RSS 139 section 6.6
Test Method:	ANSI/TIA-603-D 2010 RSS Gen section 6.13 and ANSI C63.26-2015
Limit:	-13dBm
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single output port. These two ports are connected to a single input port of a white rectangular unit labeled 'Splitter'. The 'Splitter' has two output ports. One output port is connected to a black rectangular unit labeled 'ATT' (Attenuator). The other output port of the 'Splitter' is connected to the input port of a black rectangular unit labeled 'EUT' (Equipment Under Test).
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follows:


Spurious emission:

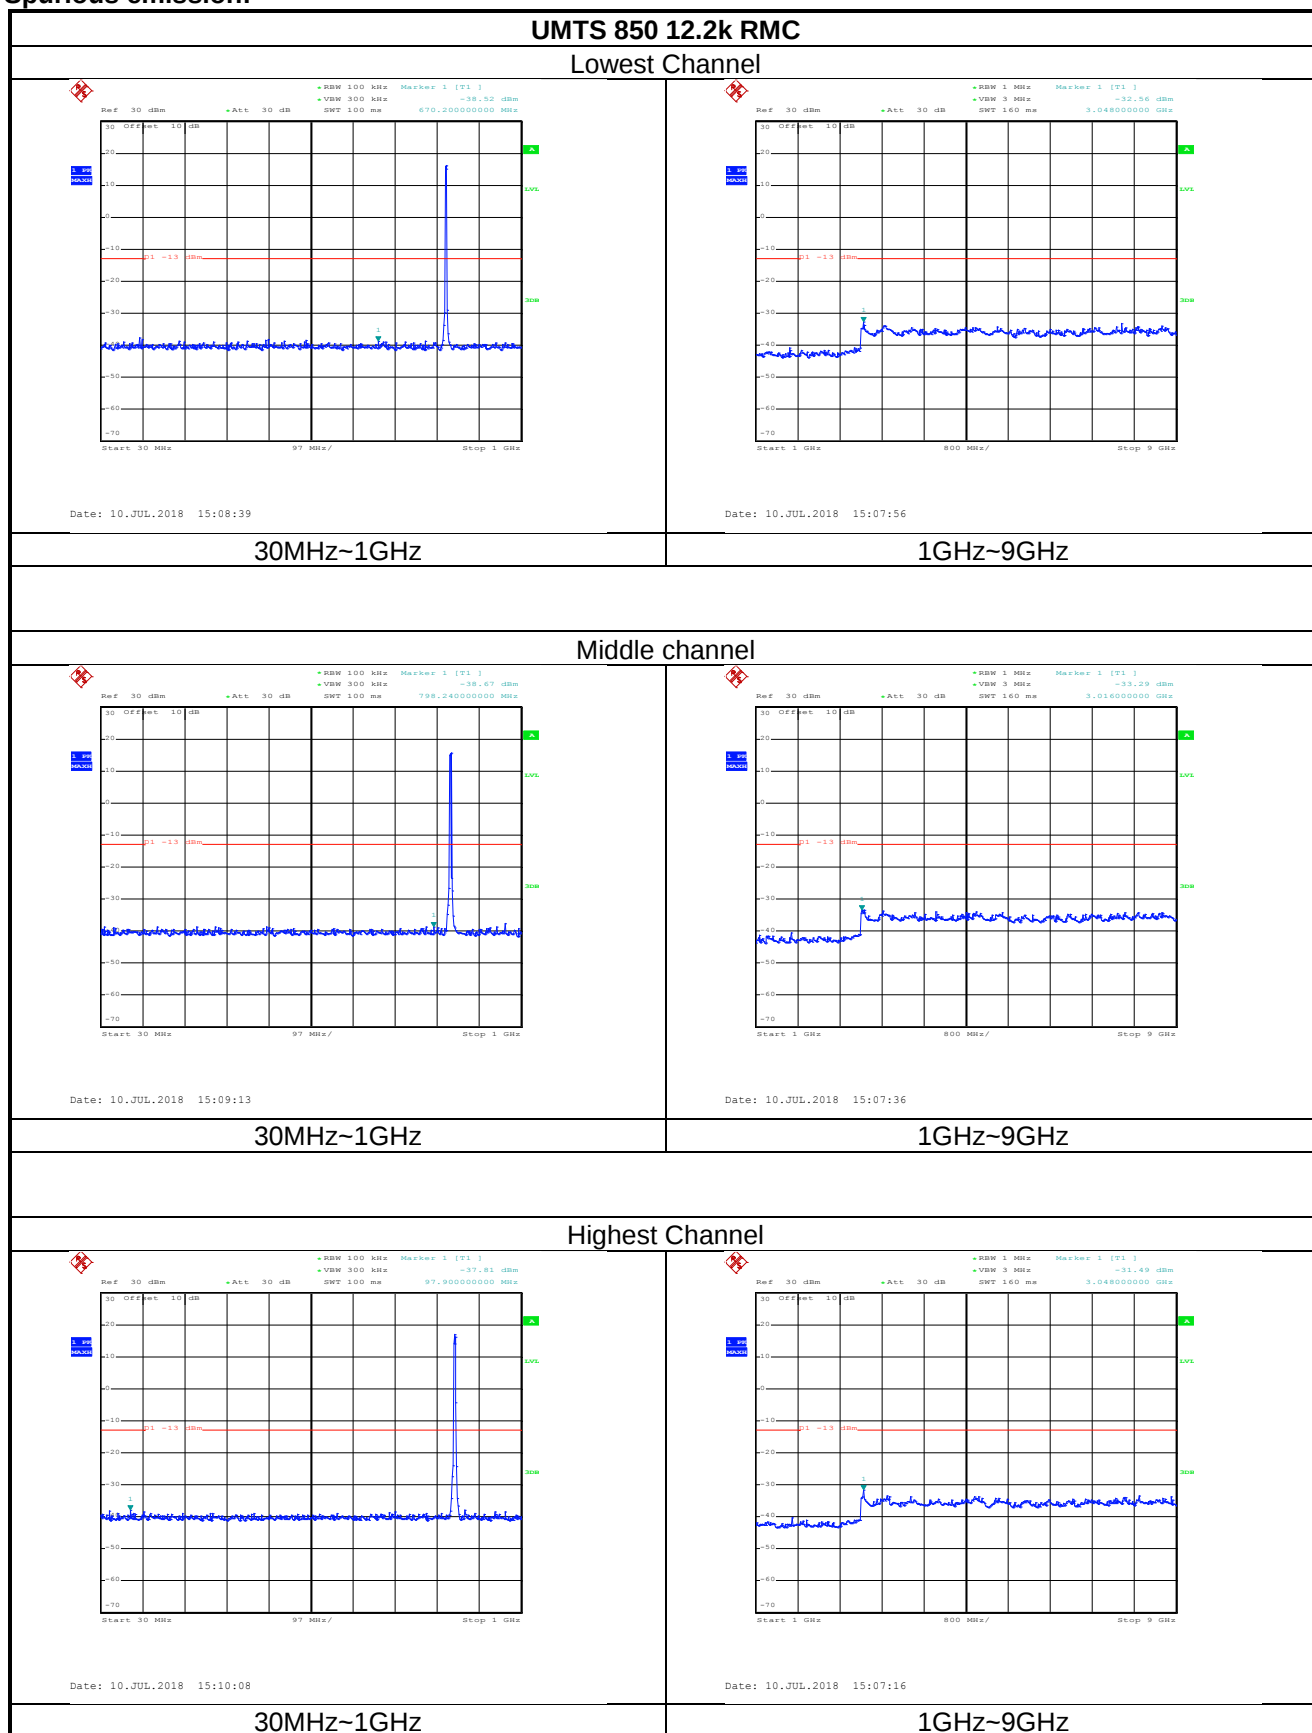

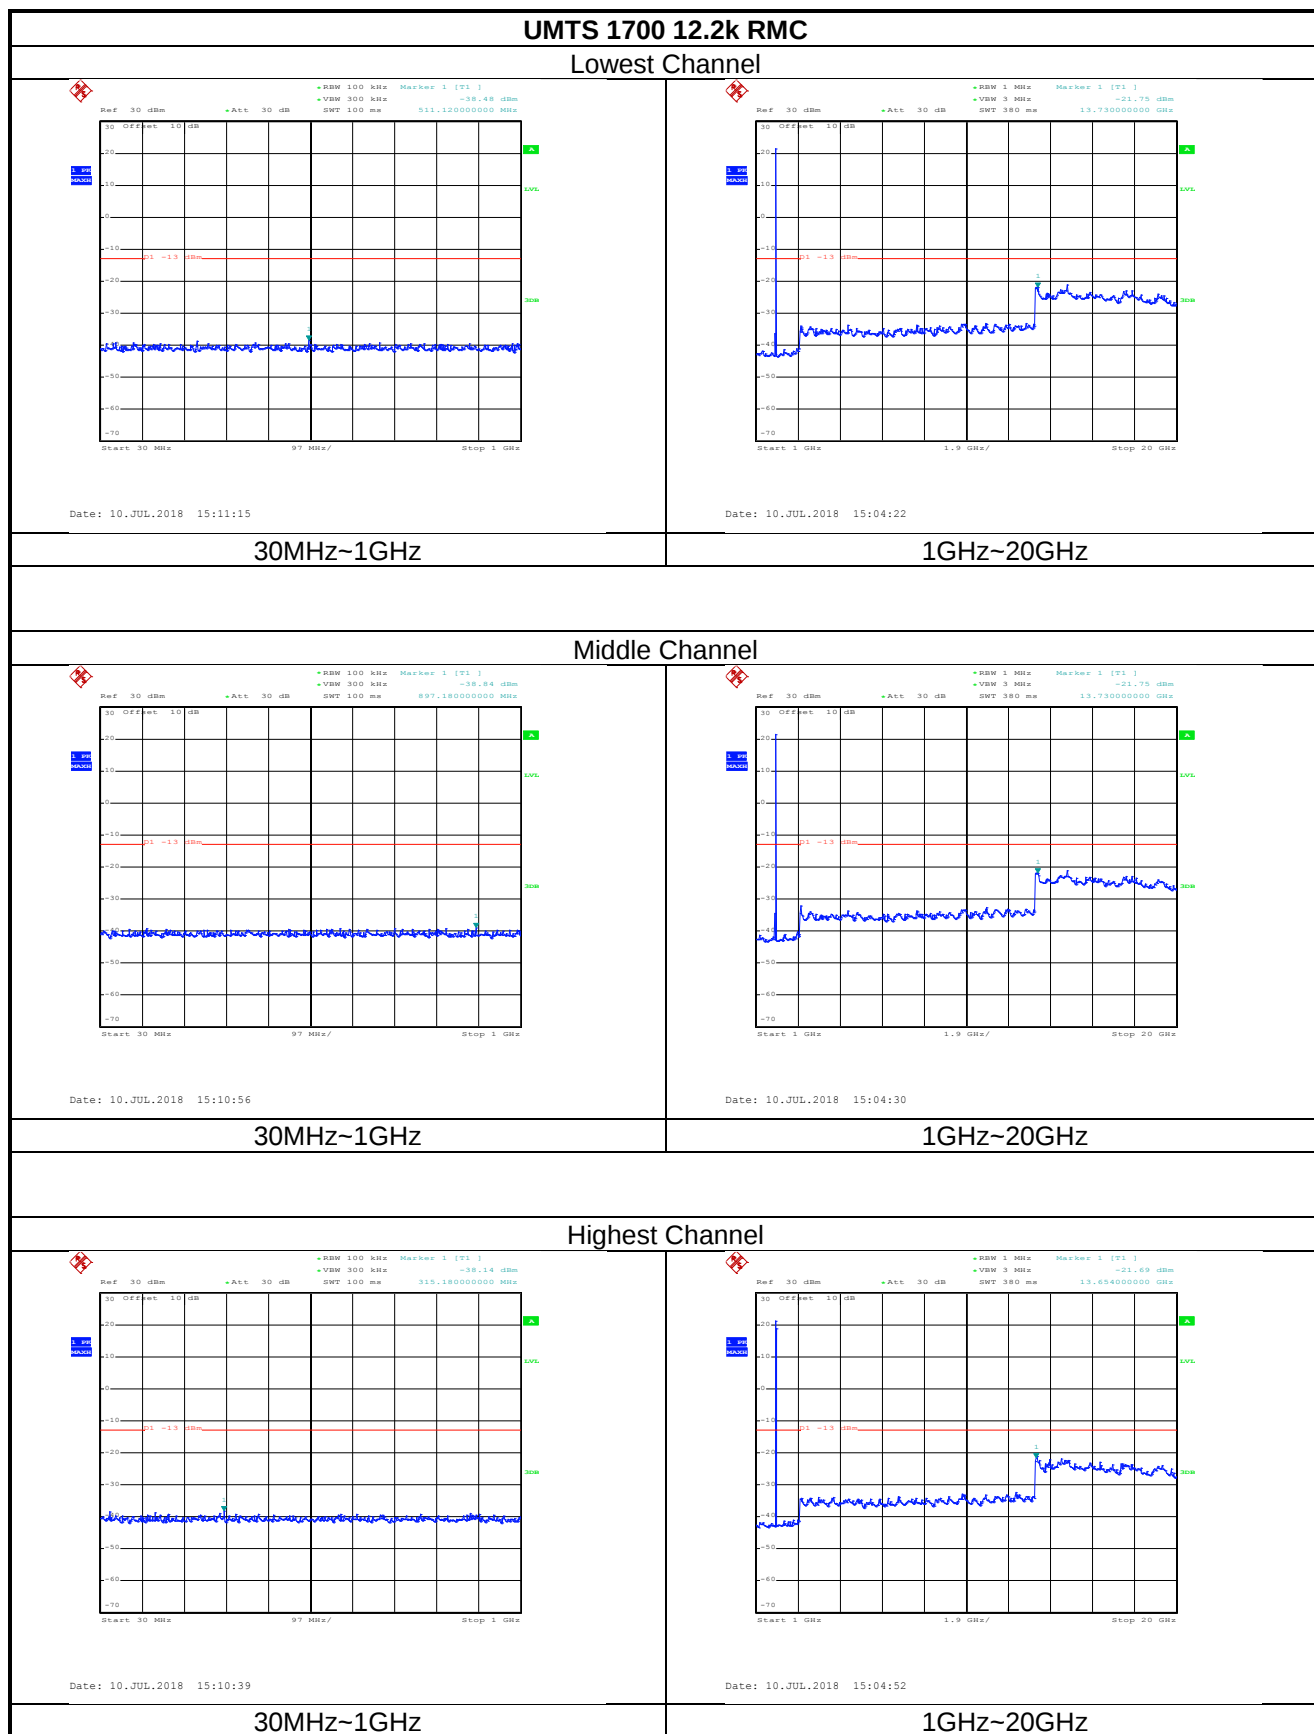


UMTS 1900 12.2k RMC

Lowest Channel

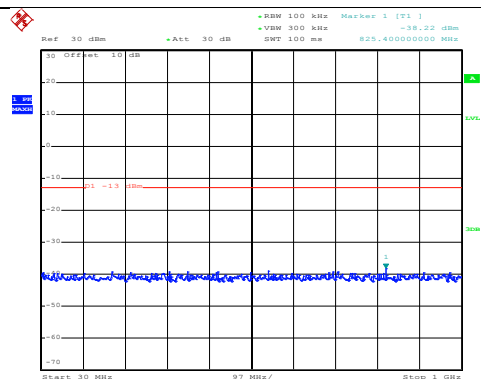

Date: 10.JUL.2018 15:12:17


30MHz~1GHz

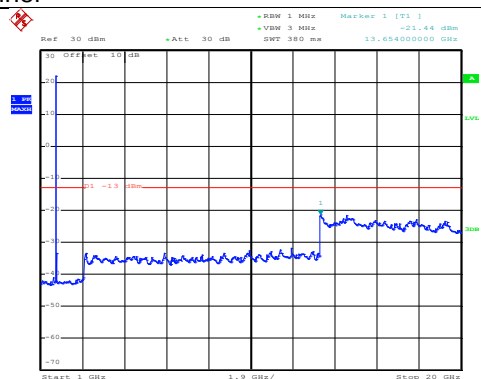

Date: 10.JUL.2018 15:05:33


1GHz~20GHz

Middle Channel

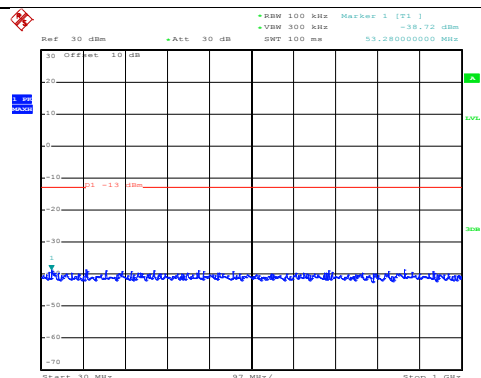

Date: 10.JUL.2018 15:12:00


30MHz~1GHz

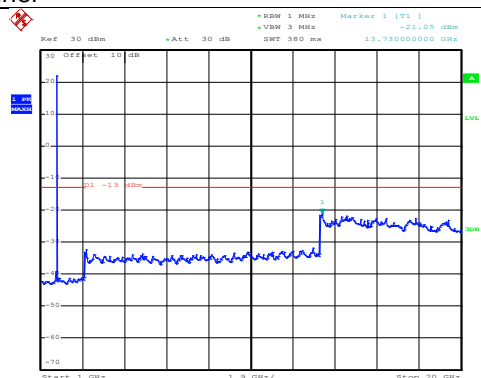

Date: 10.JUL.2018 15:06:06


1GHz~20GHz

Highest Channel

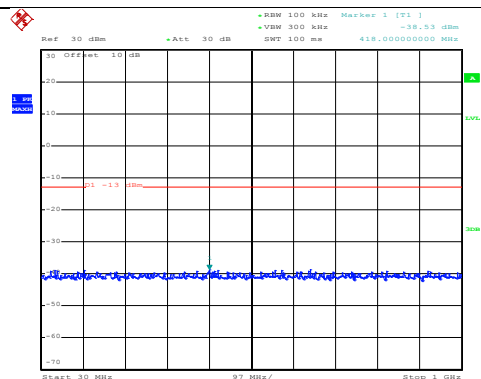

Date: 10.JUL.2018 15:11:41


30MHz~1GHz

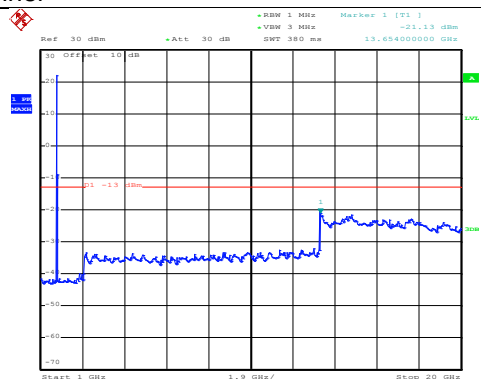


Date: 10.JUL.2018 15:06:37



1GHz~20GHz

Band edge emission:

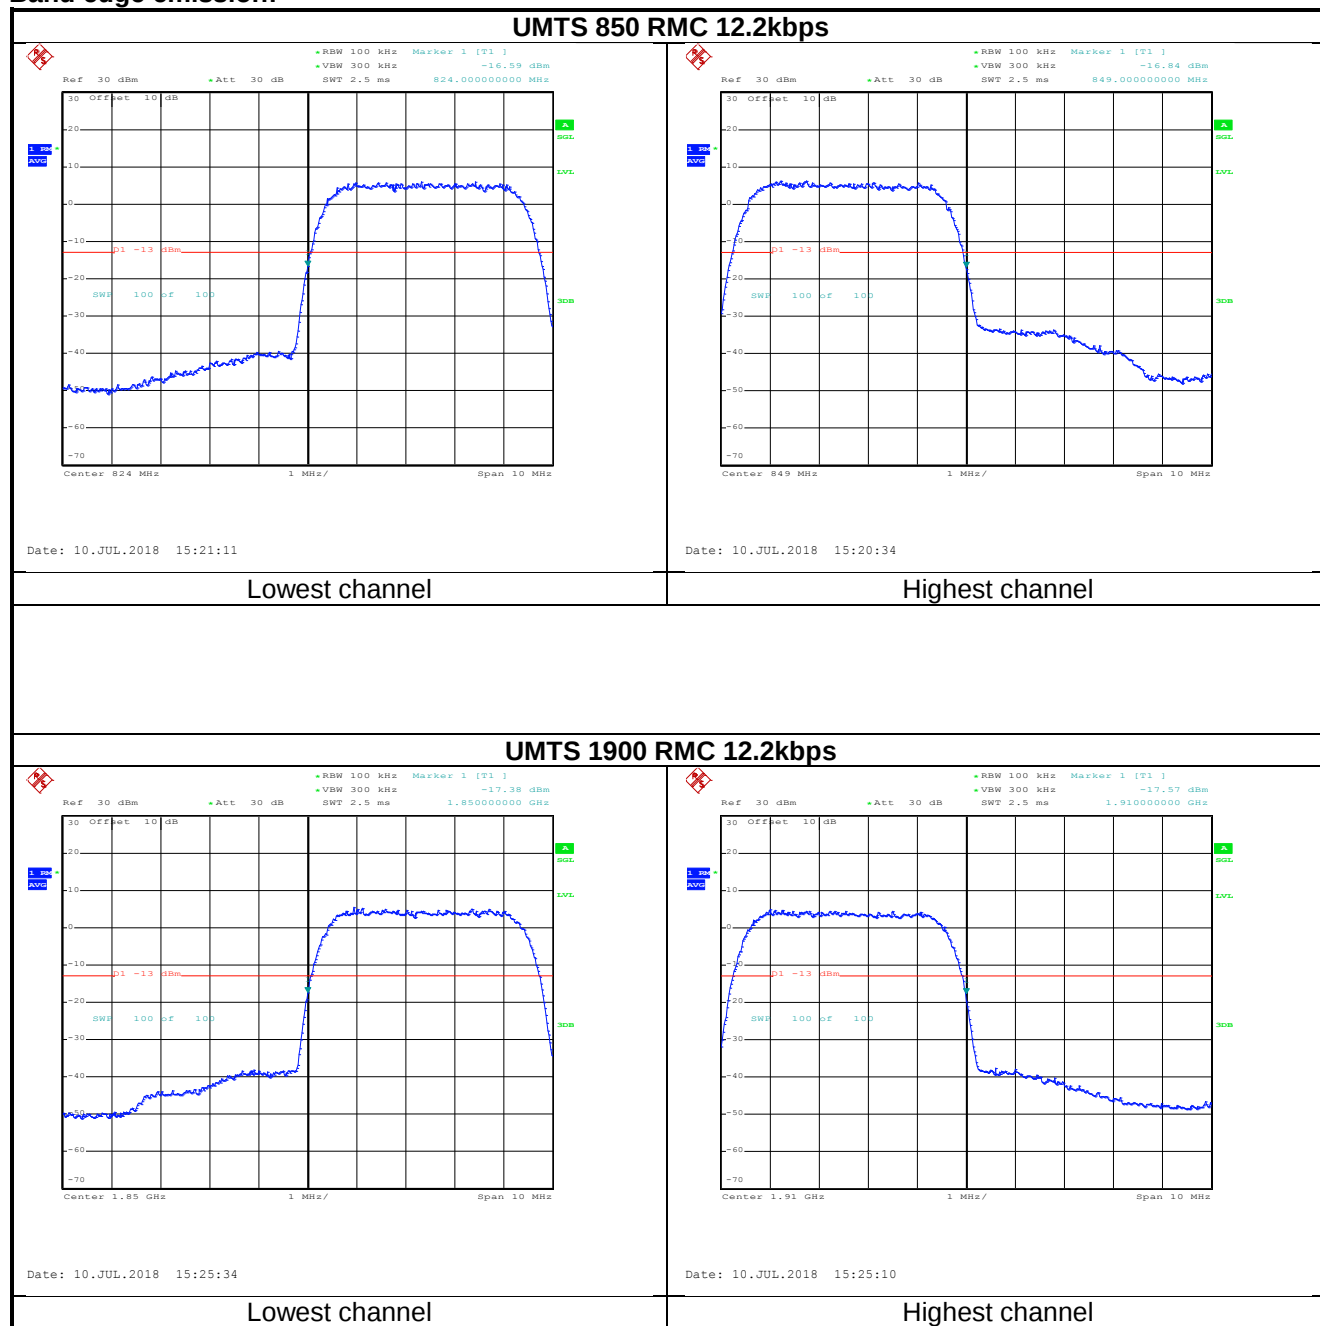

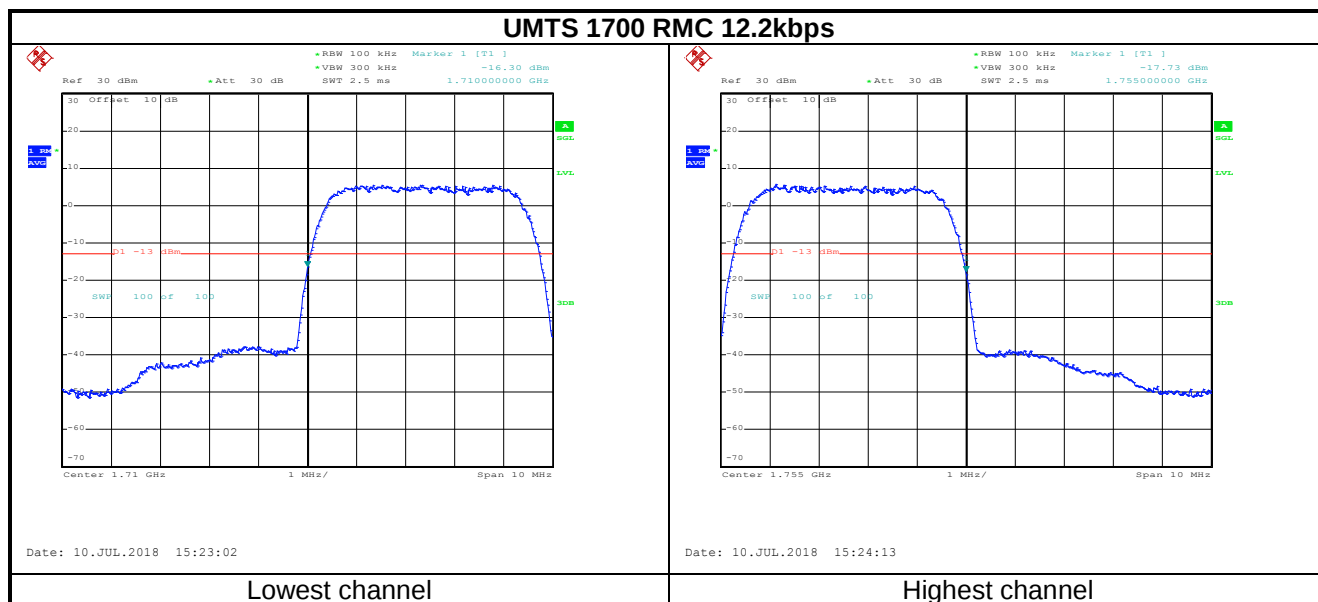

6.6 ERP, EIRP Measurement

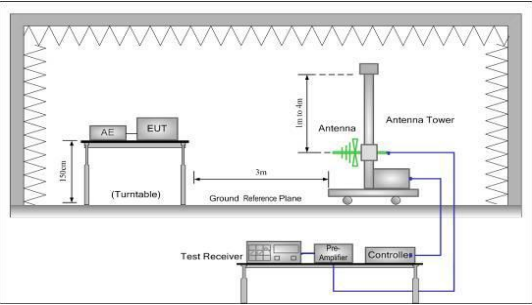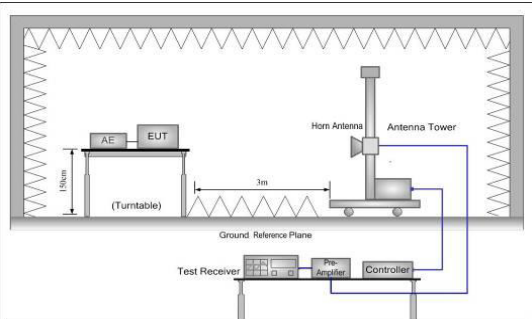Test Requirement:	FCC part 22.913(a)(2), FCC part 24.232(c) , FCC part 27.50(d)(4) RSS 132 section 5.4 and RSS 133 section 6.4, RSS 139 section 6.5
Test Method:	ANSI/TIA-603-D 2010 RSS Gen section 6.12 and ANSI C63.26-2015
Limit:	FCC: WCDMA Band V: 7W ERP, WCDMA Band II: 2W EIRP, UMTS1700: 1W EIRP IC: WCDMA Band V: 11.5W ERP, WCDMA Band II: 2W EIRP, UMTS1700: 1W EIRP
Test setup:	Below 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $ERP = S.G. \text{ output (dBm) + Antenna Gain (dBd) – Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $EIRP = S.G. \text{ output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)}$ 5. The worse case was relating to the conducted output power.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed



Measurement Data (worst case):

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)		Result
					FCC	IC	
UMTS 850 12.2k RMC	4233	H	V	12.92	38.45	40.61	Pass
			H	19.04			

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)		Result
					FCC	IC	
UMTS 1900 12.2k RMC	1312	H	V	16.2	33.00	33.00	Pass
			H	18.21			

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)		Result
					FCC	IC	
UMTS 1700 12.2k RMC	9262	H	V	16.53	33.00	33.00	Pass
			H	18.07			

6.7 Field strength of spurious radiation measurement

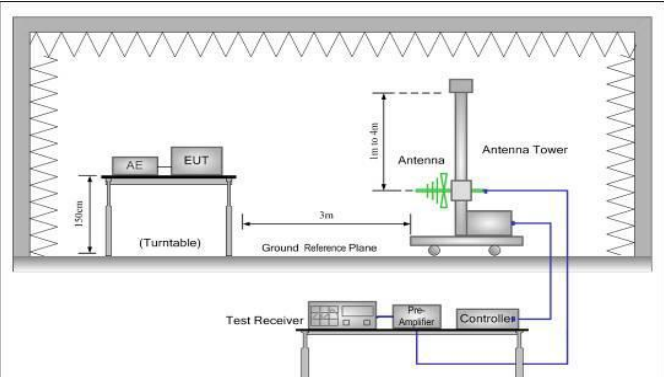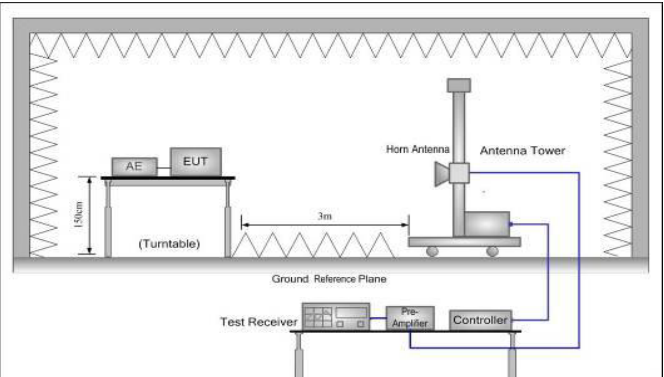Test Requirement:	FCC part 22.917(a), FCC part 24.238(a) , FCC part 27.53(h) RSS 132 section 5.5 and RSS 133 section 6.5, RSS 139 section 6.6
Test Method:	ANSI/TIA-603-D 2010 RSS Gen section 6.13 and ANSI C63.26-2015
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $ERP / EIRP = S.G. \text{ output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Passed


Measurement Data (worst case):

Test mode:	WCDMA BAND V 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-45.87	-13.00	Pass
2479.20	V	-53.73		
3305.60	V	-51.02		
1652.80	Horizontal	-44.88	-13.00	Pass
2479.20	H	-52.59		
3305.60	H	-50.93		
Test mode:	WCDMA BAND V 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-55.30	-13.00	Pass
2509.80	V	-55.13		
3346.40	V	-51.33		
1673.20	Horizontal	-53.65	-13.00	Pass
2509.80	H	-55.42		
3346.40	H	-50.38		
Test mode:	WCDMA BAND V 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-56.89	-13.00	Pass
2539.80	V	-55.08		
3386.40	V	-51.77		
1693.20	Horizontal	-56.13	-13.00	Pass
2539.80	H	-54.05		
3386.40	H	-50.30		
Remark:				
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.				

Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-47.42	-13.00	Pass
5557.20	V	-42.33		
3704.80	Horizontal	-47.54		
5557.20	H	-42.22		
Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-45.53	-13.00	Pass
5640.00	V	-43.47		
3760.00	Horizontal	-45.16		
5640.00	H	-42.77		
Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-45.02	-13.00	Pass
5722.80	V	-42.13		
3815.20	Horizontal	-46.74		
5722.80	H	-43.68		
Remark:				
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.				

WCDMA Band IV 12.2k RMC				
Lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3424.40	Vertical	-39.35	-13.00	Pass
5136.60	V	-42.54		
3424.40	Horizontal	-44.82	-13.00	Pass
5136.60	H	-42.96		
Middle channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3464.80	Vertical	-45.82	-13.00	Pass
5197.20	V	-44.5		
3464.80	Horizontal	-49.89	-13.00	Pass
5197.20	H	-43.64		
Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3505.20	Vertical	-48.94	-13.00	Pass
5257.80	V	-45.75		
3505.20	Horizontal	-47.18	-13.00	Pass
5257.80	H	-46.41		
Remark:				
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.				

6.8 Frequency stability V.S. Temperature measurement

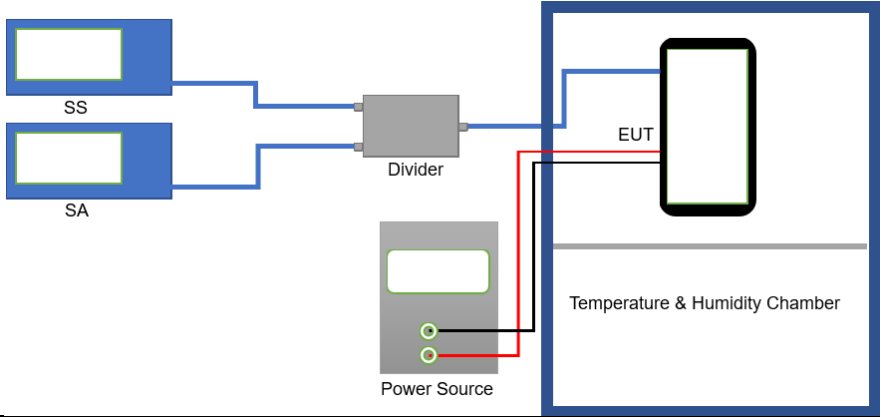
Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(a)(1)(b) , FCC Part 27.54, RSS 132 section 5.3 and RSS 133 section 6.3, RSS 139 section 6.4
Test Method:	ANSI/TIA-6-3-D 2010 RSS Gen section 6.11 and ANSI C63.26-2015
Limit:	±2.5 ppm
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular blocks labeled 'SS' (Signal Source) and 'SA' (Spectrum Analyzer). They are connected via blue lines to a central grey block labeled 'Divider'. From the 'Divider', a blue line connects to a black rectangular block labeled 'EUT' (Equipment Under Test) inside a larger blue-bordered box labeled 'Temperature & Humidity Chamber'. Below the 'Divider' is a grey block labeled 'Power Source' with two green circular terminals. Red lines connect these terminals to the 'EUT' inside the chamber.
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel):

Reference Frequency: WCDMA BAND V 12.2k RMC Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	173	0.206789	±2.5	Pass
	-20	146	0.174516		
	-10	141	0.168539		
	0	128	0.153000		
	10	110	0.131485		
	20	165	0.197227		
	30	154	0.184078		
	40	138	0.164953		
	50	151	0.180492		
Reference Frequency: WCDMA BAND II 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	190	0.101064	±2.5	Pass
	-20	152	0.080851		
	-10	143	0.076064		
	0	166	0.088298		
	10	145	0.077128		
	20	122	0.064894		
	30	144	0.076596		
	40	132	0.070213		
	50	154	0.081915		

Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	174	0.100427	±2.5	Pass
	-20	144	0.083112		
	-10	145	0.083689		
	0	128	0.073877		
	10	110	0.063488		
	20	146	0.084266		
	30	170	0.098118		
	40	160	0.092347		
	50	131	0.075609		
Note: Only the worst case shown in the report.					

6.9 Frequency stability V.S. Voltage measurement

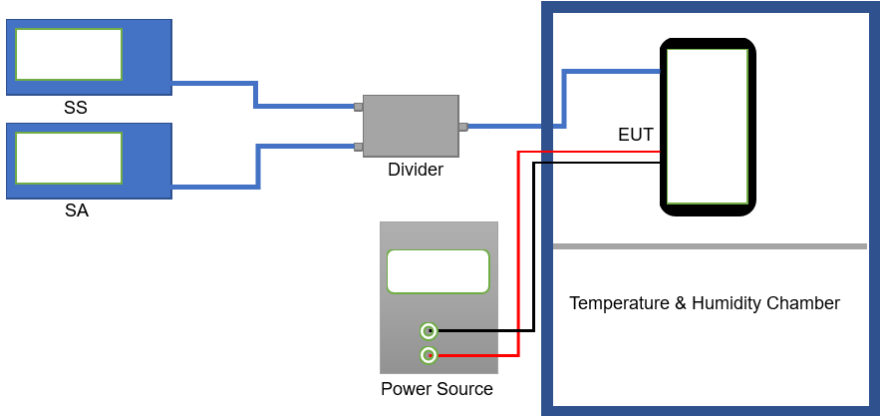Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(d)(1), FCC Part 27.54, RSS 132 section 5.3 and RSS 133 section 6.3, RSS 139 section 6.4
Test Method:	ANSI/TIA-603-D 2010 RSS Gen section 6.11 and ANSI C63.26-2015
Limit:	$\pm 2.5\text{ppm}$
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue boxes labeled 'SS' (Signal Source) and 'SA' (Spectrum Analyzer). Both are connected to a central grey box labeled 'Divider'. The output of the 'Divider' is connected to a black box labeled 'EUT' (Equipment Under Test) inside a larger blue box labeled 'Temperature & Humidity Chamber'. Below the chamber, there is a grey box labeled 'Power Source' with two green terminals. Red and black wires connect the 'Power Source' to the 'EUT'.
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel):

Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.20	88	0.105188	±2.5	Pass
	3.80	94	0.112360		
	3.50	66	0.078891		
Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.20	78	0.041489	±2.5	Pass
	3.80	82	0.043617		
	3.50	69	0.036702		
Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.35	92	0.053099	2.5	Pass
	3.80	86	0.049636		
	3.55	59	0.034053		
Note: Only the worst case shown in the report.					