



FCC CFR47 Part 15 Subpart C

ISED RSS-210

Certification Test Report

For the

Product	: SMART DIGITAL DOOR LOCK
Model	: PDS-100
FCC ID	: 2AQMR-PDS100
IC	: 24126-PDS100
Applicant	: PHILIA TECHNOLOGY Co., Ltd.
FCC Rule	: CFR 47 Part 15 Subpart C
ISED Rule	: RSS-210 Issue 9

We hereby certify that the above product has been tested by us with the listed rules and found in compliance with the regulation. The test data and results are issued on the test report no. TR-W1808-004

Signature



Choi, Yeong-min / Technical Manager

Date: 2018-08-06

Test Laboratory: ENG Co., Ltd.

It shall not be reproduced except in full, without the written approval of the ENG Co., Ltd. This document may be altered or revised by the ENG Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Report No.: TR-W1808-004

ENG Co., Ltd. 135-60 Gyeongchung-daero, Gonjiam-eup, Gwangju-si, Gyeonggi-do, Korea 464-942

Report Form_01 (Rev.0)

FCC/ISED CERTIFICATION TEST REPORT

Project Number : EA1806C-107
Test Report Number : TR-W1808-004
Type of Equipment : SMART DIGITAL DOOR LOCK
Model Name : PDS-100
FCC ID : 2AQMR-PDS100
ISED Cert. Number : 24126-PDS100
Multiple Model Name : N/A
Applicant : PHILIA TECHNOLOGY Co., Ltd.
Address : A-904 Digital Empire, #387, Simin-daero, Dongan-gu, Anyang-si, Gyeonggi-do, KOREA
Manufacturer : PHILIA TECHNOLOGY Co., Ltd.
Address : A-904 Digital Empire, #387, Simin-daero, Dongan-gu, Anyang-si, Gyeonggi-do, KOREA
Regulation : FCC Part 15 Subpart C Section 15.225, ISED RSS-210 Issue9
Total page of Report : 18 Pages
Date of Receipt : 2018-06-19
Date of Issue : 2018-08-06
Test Result : PASS


This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by Song, In-young / Senior Engineer  2018-08-06

Signature

Date

Reviewed by Choi, Yeong-min / Technical Manager  2018-08-06

Signature

Date

CONTENTS

	Page
1. TEST SUMMARY	4
2. EUT (EQUIPMENT UNDER TEST) INFORMATION	6
3. TEST CONDITION	7
4. ANTENNA REQUIREMENT	9
4.1 CONCLUSION	9
5. TEST RESULT	10
5.1 RADIATED EMISSIONS	10
5.2 20 DB BANDWIDTH	15
5.3 99% POWER BANDWIDTH	16
5.4 FREQUENCY TOLERANCE OF CARRIER SIGNAL	17
APPENDIX I – TEST INSTRUMENTATION	18

Release Control Record

Issue Report No.	Issued Date	Details/Revisions
TR-W1808-004	2018-08-06	Initial Release
-	-	-

1. TEST SUMMARY

1.1 Regulations and results

The sample submitted for evaluation (Referred to below as the EUT) has been tested in accordance with the following regulations or standards.

FCC Reference Section	ISED Reference Section	Description	P	F	N.T.	Note
15.205, 15.209(a) & 15.225(d)	RSS-210 B.6	Radiated Spurious Emissions	P			
15.207	RSS GEN 8.8	AC Power-line Conducted Emissions			N.T.	Note 1
15.225(a)	RSS-210 B.6	Field strength within the band (13.553-13.567) MHz	P			
15.225(b) & 15.225(c)	RSS-210 B.6	Field strength within the band (13.410-13.553) MHz and (13.567-13.710) MHz, (13.110-13.410) MHz and (13.710-14.010) MHz	P			
15.225(e)	RSS-210 B.6	Frequency Tolerance of Carrier Signal	P			
15.215	RSS GEN 6.6	20 dB Bandwidth, 99 % Bandwidth	P			

Remark:
P means Passed F means Failed N.T. means Not Tested

Note1. The EUT shall be operated by battery only. (used manganese dry cell as type AA)

1.2 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC Part 15 Subpart C Section 15.225, RGG-Gen and RSS-210

1.3 Test Methodology

The tests mentioned in clause 1.1 in this test report were performed according to FCC CFR 47 Part 2, CFR 47 Part 15, ANSI C63.10-2013, and RSS-Gen.

1.3 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

1.4 Test Facility

The measurement facilities are located at 135-60 Gyeongchung-daero, Gonjiam-eup, Gwangju-si, Gyeonggi-do 12813, Korea. Description details of test facilities were submitted to the FCC and IC, designated by the RRA (Radio Research Agency), and accredited by Korea and accredited by KOLAS (Korea Laboratory Accreditation Scheme) in Korea according to the requirement of ISO 17025.

Agency Name	Registration No.	Mark
FCC	KR0160	
ISED(Canada)	IC 12721A	
RRA	KR0160	
Korean Agency for Technology and Standards	KT733	 

2. EUT (Equipment Under Test) INFORMATION

2.1 General Description

The PHILIA TECHNOLOGY Co., Ltd., Model PDS-100 (referred to as the EUT in this report) is a SMART DIGITAL DOOR LOCK. The EUT is a device for transferring RFID (13.56 MHz) signal to an RFID TAG through wireless communication. The product specification described herein was obtained from product data sheet or user's manual.

Operating Frequency	13.56 MHz
KIND OF CLASS	DXT- Part 15 Low Power Transceiver, Rx Verified
Modulation Types	ASK
Generated or used Freq. in EUT	32.768 kHz, 13.56 MHz, 16 MHz, 32 MHz
Type of Antenna	<input checked="" type="checkbox"/> Integrated Type <input type="checkbox"/> Dedicated Type PCB Pattern Antenna (20x 60 mm, 5 turns)
Operating Temperature	-25 °C ~ + 50 °C
Normal Test Voltage	DC 6.0 V
Electrical Rating	DC 6.0 V
External Port(s)	N/A
Test SW Version	N/A
Software Version	1.0
Hardware Version	1.0

2.2 Additional Model

None

3. TEST CONDITION

3.1 Equipment Used During Test

The following peripheral devices and/or interface cables were connected during the measurement:

Description	Model No.	Serial No.	Manufacturer.
SMART DIGITAL DOOR LOCK (EUT)	PDS-100	N/A	PHILIA TECHNOLOGY Co., Ltd.

3.2 Mode of operation during the test

For continuous transmitting modulation signal, press the password registration button on EUT and then insert AA battery acc. to the manufacturer's guidance. The used modulation type for the testing is ASK (13.56 MHz)

For continuous transmitting un-modulated signal, just insert AA battery in EUT acc. to the manufacturer's guidance.

3.3 Preliminary Testing for Worst case configuration


For finding worst case configuration and operating mode, preliminary testing was performed and radiated emission and conducted emission tests were performed with the EUT set to transmit and receive at the channel with the highest output power as worst case scenario. Since the EUT is a fixed type device, all spurious emission tests were performed in one axis direction.

3.3.1 Test Channel and Frequency


Test Channel	Channel	Frequency
Center Channel	-	13.56 MHz

3.4 Test Setup Drawing


(Radiated Test below 30 MHz)

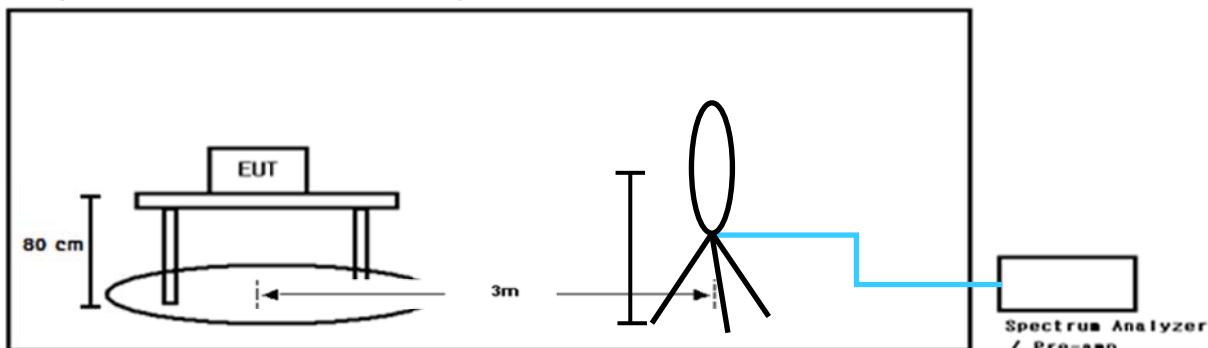

(Radiated Test below 1 GHz)

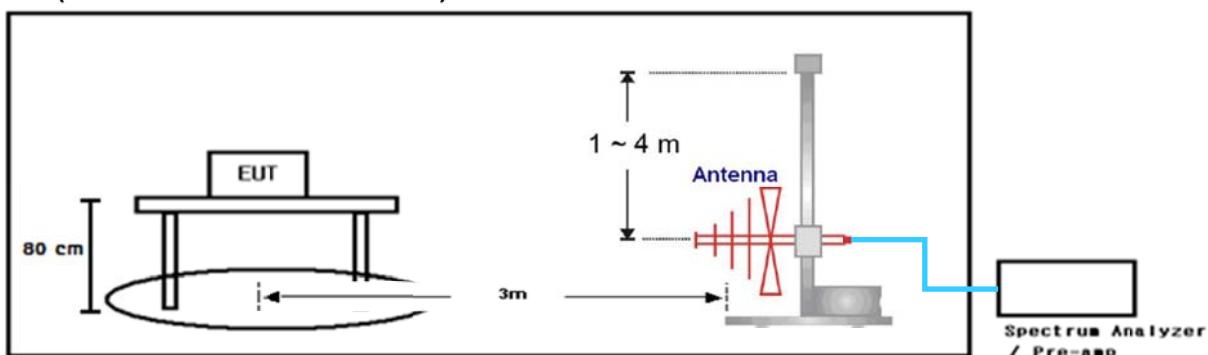

(Frequency Tolerance of Carrier Signal Test)

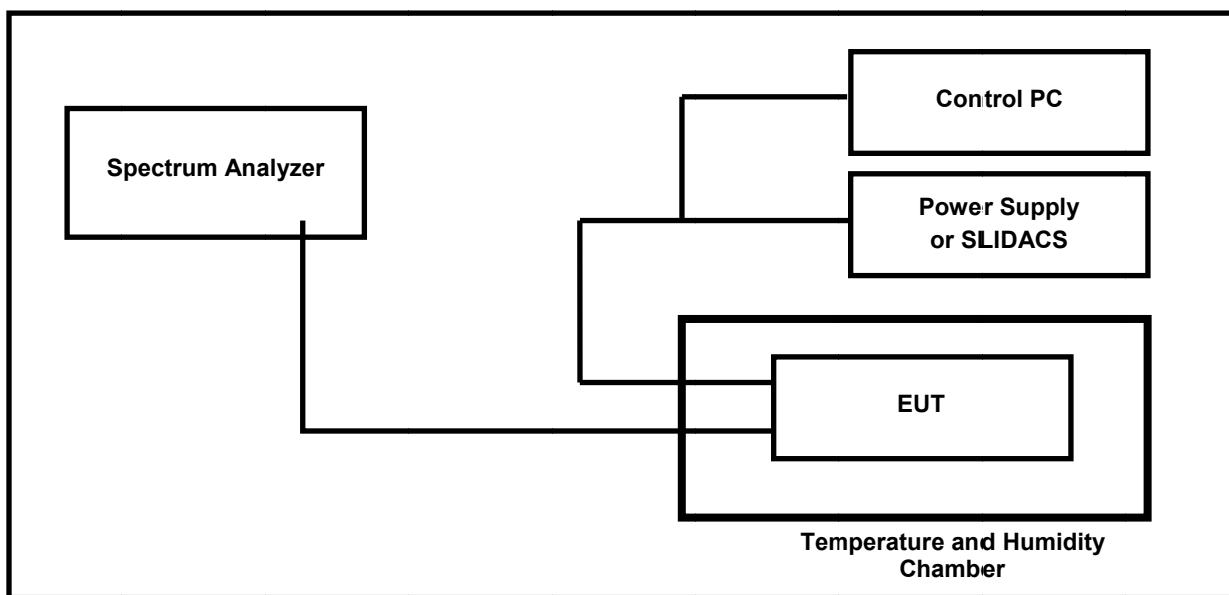

3.5 EUT Modifications

- No EMC Relevant Modifications were performed by this test laboratory.

4. ANTENNA REQUIREMENT

According to FCC CFR 47 Part 15 section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provision of this section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4.1 Conclusion

The EUT has an integral PCB loop antenna, so there is no consideration of replacement by the user.

5. TEST RESULT

5.1 Radiated emissions

5.1.1 Regulation

Acc. To section 15.225, 15.209 and RSS-210 Annex B.6, following table shall be applied.

Frequency (MHz)	Field strength limit (μ V/m) @ 30 m	Field strength limit (dB μ V/m) @ 30 m	Field strength limit (dB μ V/m) @ 3 m
13.110 – 13.410	106	40.5	80.5
13.410 – 13.553	334	50.5	90.5
13.553 – 13.567	15,848	84.0	124.0
13.567 – 13.710	334	50.5	90.5
13.710 – 14.010	106	40.5	80.5

Frequency (MHz)	Field strength limit (μ V/m)	Field strength limit (dB μ V/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F$ (kHz) = 266.7 – 4.9	48.5 – 13.8	300
0.490 – 1.705	$24000/F$ (kHz) = 49.0 – 14.1	33.8 - 23.0	30
1.705 – 30.0	30	29.5	30
30 – 88	100	40.0	3
88 - 216	150	43.5	3
216 - 960	200	46.0	3
Above 960	500	54.0	3

Note: The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector. For the frequency bands (9 – 90) kHz, (110 – 490) kHz and above 1000 MHz, the radiated emission limits are based on measurements employing an average detector.

5.1.2 Method of Measurement

The preliminary radiated emission test was performed using the procedure in ANSI C63.10 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber

Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)

For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. The measuring antenna is an electrically screened loop antenna. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

Radiated Emissions Test, below 1 000 MHz

The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna. The EUT is situated in three orthogonal planes(if appropriate)

5.1.3 Test Site Requirement for KDB 937606

Acc. to KDB 937606, Semi Anechoic Chamber (SAC) shall be verified test results below 30 MHz with Open Area Test Site (OATS), so we compared test results between the measurements from our SAC and an OATS and found test results almost same, so we **declare test result for below 30 MHz from our SAC is valid and met the requirement acc. to KDB 937606.**

5.1.4 Measurement Uncertainty

Measurement uncertainties were not taken into account and following uncertainty levels have been estimated for tests performed on the apparatus. The measurement uncertainties are given with at least 95 % confidence.

Frequency Range	Uncertainty	Frequency Range	Uncertainty
9 kHz ~ 30 MHz	± 2.1 dB	30 MHz ~ 1 GHz	± 4.7 dB

5.1.5 Sample Calculated Example

At 80 MHz

Limit = 40.0 dBuV/m

Result = Receiver reading value + Antenna Factor + Cable Loss – Pre-amplifier gain = 30 dBuV/m


Margin = Limit – Result = 40 – 30 = 10

so the EUT has 10.0 dB margin at 80 MHz

5.1.6 Test Data


Date of Test	2018-07-20	Temperature	(22.6 ± 2.7) °C			
		Relative humidity	(50.4 ± 5.9) % R.H.			
Measurement Frequency Range		9 kHz ~ 1 GHz				
Test Result		PASS	Tested By		Do-heon Kim 	
Frequency range	Detector Mode	Resolution BW	Video BW	Video Filtering	Measurement distance	
Below 30 MHz	Peak or Q.P.	9 kHz	30 kHz	-	3 m	
30 MHz ~ 1 000 MHz	Peak or Q.P.	100 kHz	300 kHz	-	3 m	

5.1.6.1 Test Data below 30 MHz

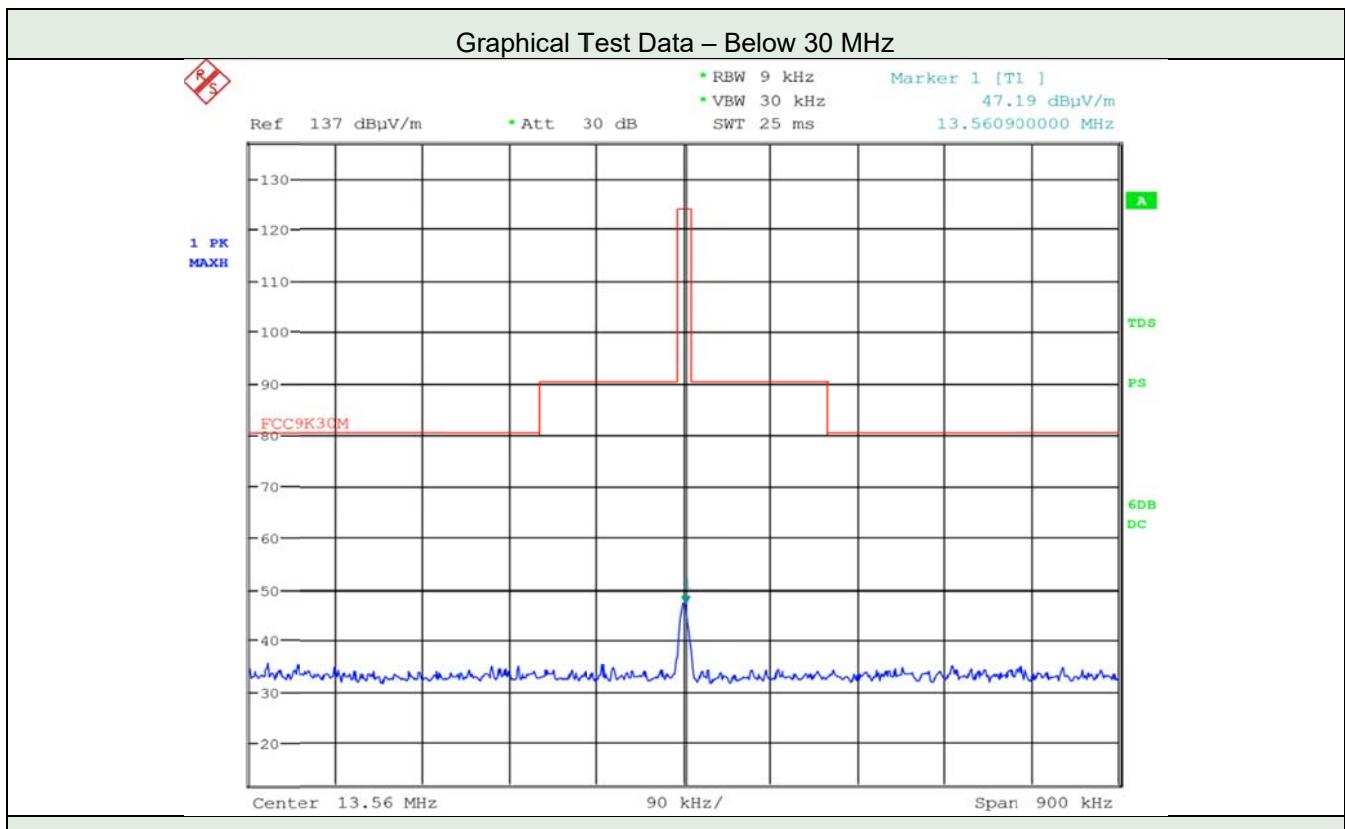

Tabulated Test Data under 15.225(a), (b)&(c)							
Frequency (MHz)	Detector Mode	Pol.	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
13.56	Peak	H	47.19	124.00	76.81	0	359

Graphical Test Data – Below 30 MHz

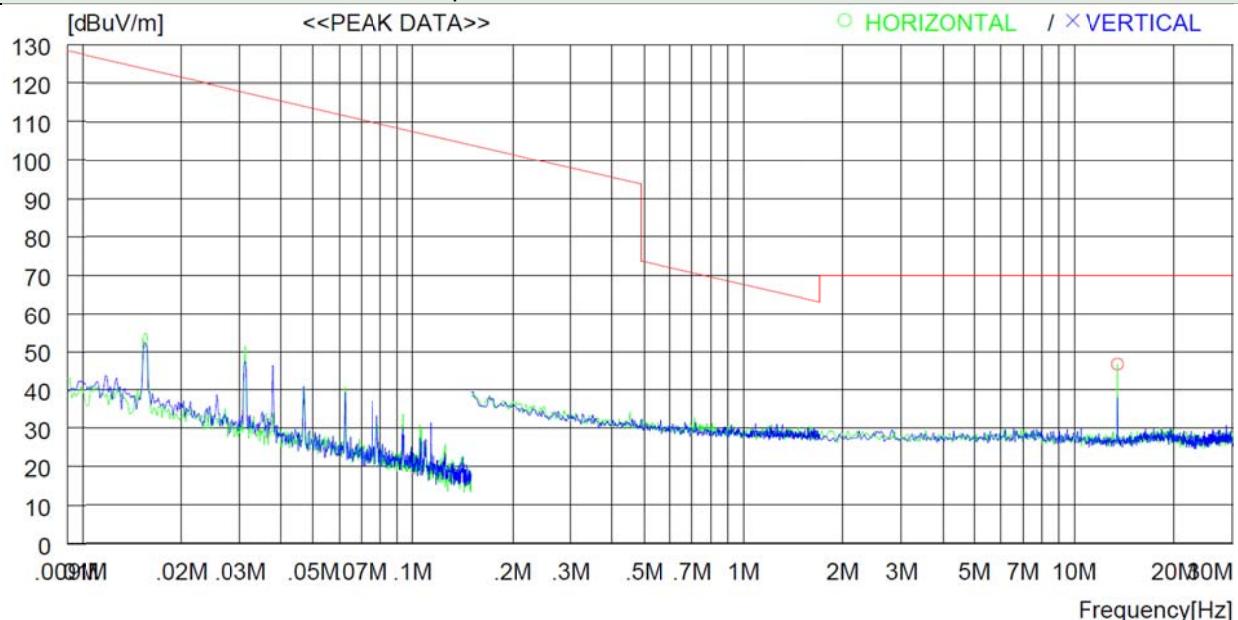

Tabulated Test Data under 15.225(d), 15.209

Frequency (MHz)	Receiver Reading (dBuV)	Detector Mode	Pol.	Ant. Factor (dB/m)	Corr. Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
-----------------	-------------------------	---------------	------	--------------------	------------------	-----------------	----------------	-------------	-------------	------------------


* Spurious emissions that 20 dB below the limits didn't be recorded

Note: Result(dBuV/m)= Receiver Reading(dBuV) + Antenna Factor(dB/m) - Corr. Factor(dB)

Corr. Factor(dB)= Pre-amplifier(dB) – Cable loss(dB)

Margin(dB)= Limit(dBuV/m) – Result(dBuV/m)

5.1.6.2 Test Data from 30 MHz to 1 GHz

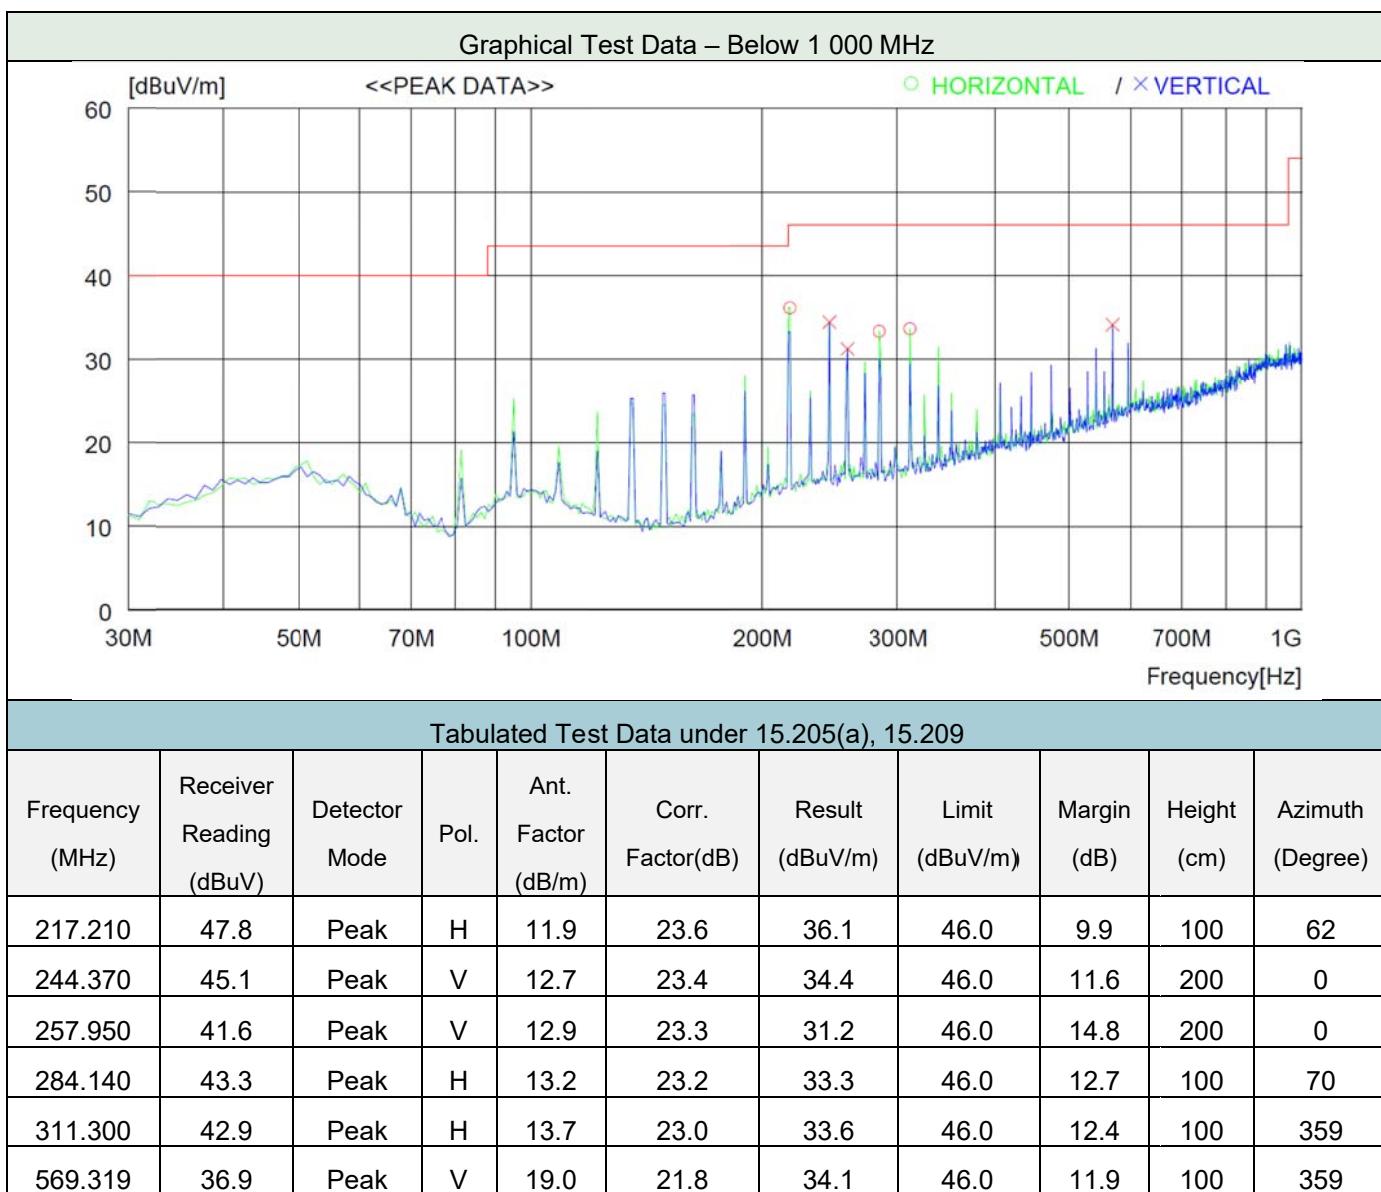

Note: "H" means Horizontal polarity, "V" means Vertical polarity

Result(dBuV/m)= Receiver Reading(dBuV) + Antenna Factor(dB/m) - Corr. Factor(dB)

Corr. Factor(dB)= Pre-amplifier(dB) – Cable loss(dB)


Margin(dB)= Limit(dBuV/m) – Result(dBuV/m)

5.2 20 dB bandwidth


5.2.1 Method of Measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution is set to 30 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

5.2.2 Test Data

Date of Test	2018-07-10	Temperature	(24.0 ± 1.0) °C
		Relative humidity	(63.3 ± 3.0) % R.H.
Test Result	PASS	Tested by	Do-heon Kim 
Operating Frequency (MHz)	Measured Value (MHz)		Limit
13.56	13.522	$F_L > 13.110$ MHz	
	13.598		$F_H < 14.010$ MHz

20 dB bandwidth measurement plot

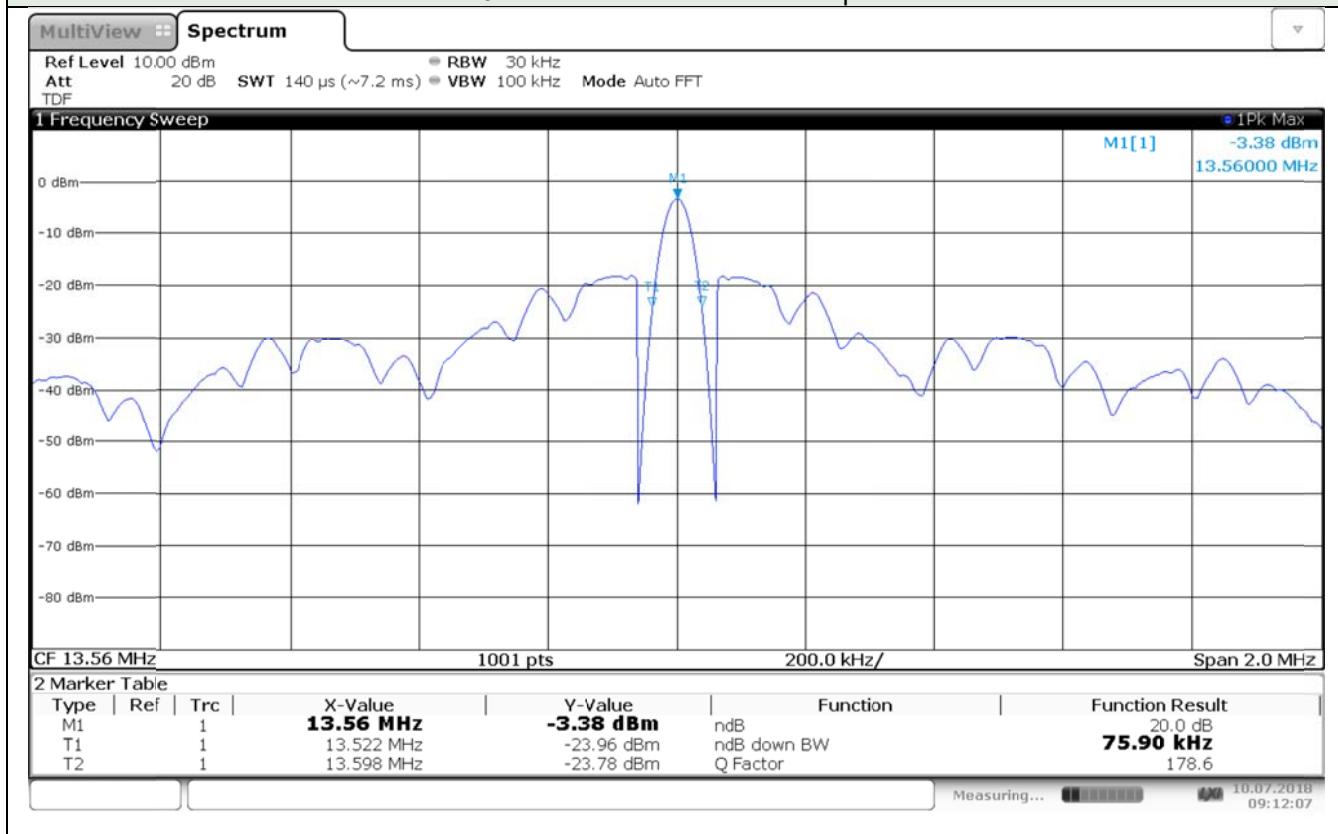

Note: F_L : Lowest frequency at 20 dB bandwidth


F_H : Highest frequency at 20 dB bandwidth


5.3 99% Power bandwidth

5.3.1 Method of Measurement

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.

5.3.2 Test Data

Date of Test	2018-07-10	Temperature	$(24.0 \pm 1.0) ^\circ\text{C}$
		Relative humidity	$(63.3 \pm 3.0) \% \text{ R.H.}$
Test Result	PASS	Tested by	Do-heon Kim 
Operating Frequency (MHz)	Measured Value (MHz)		Limit
13.56	1.11		-

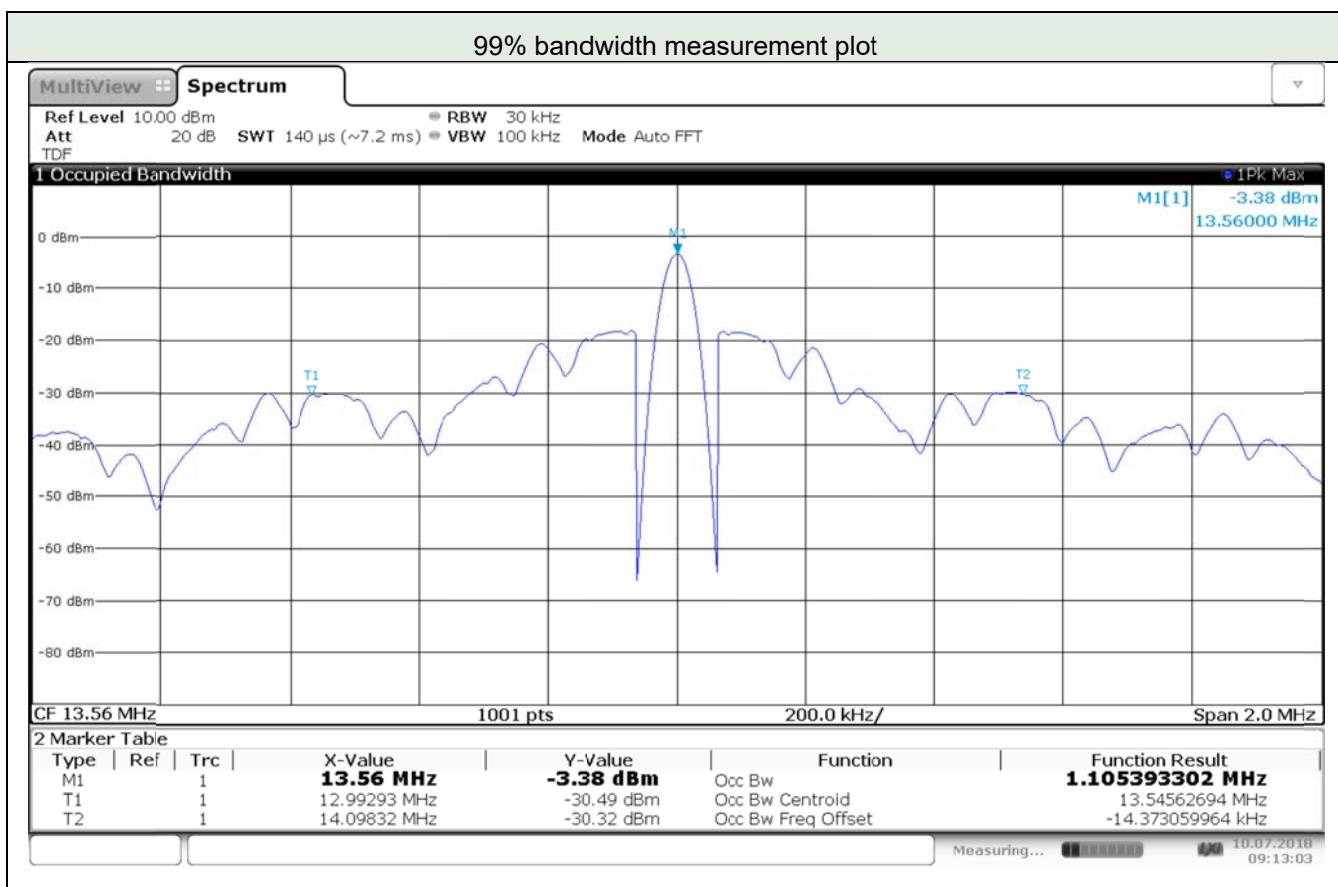

5.4 Frequency tolerance of carrier signal

5.3.1 Regulation

FCC 47CFR15-15.225(e) and RSS-210 Annex B.6


The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery-operated equipment, the equipment tests shall be performed using a new battery.

5.3.2 Method of Measurement

The EUT output was connected to the spectrum analyzer through an attenuator. Turn EUT off and set chamber temperature to -20 °C and then allow sufficient time (approximately 20 to 30 minutes after chamber reach the assigned temperature) for EUT to stabilize. Turn on EUT and measured EUT operating frequency and turn off the EUT after the measurement. The temperature was raised 10 °C step from -20 °C to +50 °C. Repeat above method for frequency measurement every 10 °C step and then record all measured frequencies on each temperature step.

An external DC power supply was connected to the input of the EUT. The voltage of EUT set to 115 % of the nominal value and then was reduced to 85 % of nominal voltage. The output frequency was recorded at each step.

5.3.3 Test Data

Date of Test	2018-07-10				Temperature	(24.0 ± 1.0) °C			
					Relative humidity	(63.3 ± 3.0) % R.H.			
Test Result	PASS				Tested by	Do-heon Kim 			
Reference Frequency: 13.560 000 MHz, LIMIT: within ±1 356 Hz									
Environment	Carrier Frequency Measured with Time Elapsed								
	Start Up		2 minutes		5 minutes		10 minutes		
Temperature (°C)	(MHz)	Err (Hz)	(MHz)	Err (Hz)	(MHz)	Err (Hz)	(MHz)		
+50	13.559 979	-21	13.559 968	-32	13.559 964	-36	13.559 961		
+40	13.560 014	14	13.560 006	6	13.560 003	3	13.560 000		
+30	13.560 062	62	13.560 049	49	13.560 047	47	13.560 045		
+20	13.560 114	114	13.560 101	101	13.560 099	99	13.560 095		
+10	13.560 144	144	13.560 136	136	13.560 134	134	13.560 134		
0	13.560 170	170	13.560 166	166	13.560 164	164	13.560 163		
-10	13.560 175	175	13.560 174	174	13.560 173	173	13.560 173		
-20	13.560 159	159	13.560 158	158	13.560 157	157	13.560 155		

Appendix I – Test Instrumentation

Description	Model No.	Serial No.	Manufacturer.	Due for Cal Date
Signal & Spectrum Analyzer	FSW 43	100578	Rohde & Schwarz	2019-04-26
Attenuator	56-10	58769	WEINSCHEL	2019-01-22
Temperature & Humidity Chamber	SM-1.0-3800	38025	THERMOTRON	2019-07-03
Test Receiver	ESU 26	100303	Rohde & Schwarz	2019-01-18
Loop Antenna	HFH2-Z2	100341	Rohde & Schwarz	2019-04-21
TRILOG Broadband Antenna	VULB9163	9163.799	Schwarzbeck	2019-09-14
Notch Filter	BRM50702	G318	MICRO-TRONICS	2018-11-08
Attenuator	6dB	272.4110.50	Rohde & Schwarz	2019-01-18
Pre-Amplifier	310N	344015	Sonoma Instrument	2019-01-18
Turn Table	DT3000-3t	1310814	INNCO SYSTEM	N/A
Antenna Master	MA4000-EP	4600814	INNCO SYSTEM	N/A
Antenna Master	MA4000-XP-ET	-	INNCO SYSTEM	N/A
Camera Controller	HDCon4102	6531445048	PONTIS	N/A
CO3000 Controller	Co3000-4Port	CO3000/806/ 34130814/L	INNCO SYSTEM	N/A
CO3000 Controller	Co3000-4Port	CO3000/807/ 34130814/L	INNCO SYSTEM	N/A

The measuring equipment utilized to perform the tests documented in this test report has been calibrated in accordance with manufacturer's recommendations, and is traceable to recognized national standards.