

TEST REPORT

Applicant: HUACAI KEYI INDUSTRY COMMERCE CO.,LTD.

Address of Applicant: The North of the Middle Section of Guangyi Road, Chenghai, Shantou, China

Manufacturer: HUACAI KEYI INDUSTRY COMMERCE CO.,LTD.

Address of Manufacturer: The North of the Middle Section of Guangyi Road, Chenghai, Shantou, China

Equipment Under Test (EUT)

Product Name: RC DRONE

Model No.: See section 5.1

FCC ID: 2AQMU-HC752

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: June 12, 2023

Date of Test: June 13-21, 2023

Date of report issued: June 21, 2023

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	June 21, 2023	Original

Prepared By:




Date:

June 21, 2023

Project Engineer

Check By:



Date:

June 21, 2023

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 RADIATED EMISSION METHOD	11
7.2.1 Field Strength of The Fundamental Signal	13
7.2.2 Spurious emissions	14
7.2.3 Bandedge emissions	26
7.3 20dB OCCUPY BANDWIDTH	30
8 TEST SETUP PHOTO	32
9 EUT CONSTRUCTIONAL DETAILS	32

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remarks:

1. Test according to ANSI C63.10:2013.
2. Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	RC DRONE
Model No.:	SMPTC-90033, SMPTC-90041, 6182-2BGA, 6182-2BGAA, 6182-4RF, HC612, HC613, HC615, HC616, HC617, HC622, HC623, HC631, HC632, HC632W, HC635, HC650, HC653, HC657, HC657S, HC658, HC670, HC671, HC672, HC673, HC675, HC676, HC676W, HC676S, HC677, HC690, HC691, HC692, HC693, HC695, HC696, HC697, HC698, HC699, HC700, HC701, HC702, HC706, HC707, HC708, HC709, HC710, HC711, HC715, HC720, HC721, HC722, HC723, HC725, HC726, HC727, HC728, HC729, HC730, HC819, HC733, HC735, HC752, HC753, HC755, HC758, HC759, HC760, HC762, HC763, HC765, HC766, HC767, HC768, HC769, HC770, HC771, HC772, HC773, HC765, HC766, HC767, HC768, HC769, HC770, HC771, HC772, HC773, HC779, HC780, HC781, HC782, HC783, HC785, HC786, HC787, HC788, HC789, HC790
Test Model No.:	HC752
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Serial No.:	658531601137
Test sample(s) ID:	GTS2023060245-1
Sample(s) Status	Engineered sample
Operation Frequency:	2410MHz~2470MHz
Channel numbers:	61
Modulation type:	GFSK
Antenna Type:	Integral antenna
Antenna gain:	0.17dBi(Declared by applicant)
Power supply:	DC 4.5V (3*1.5V Size "AAA" Battery)

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2410	17	2426	33	2442	49	2458
2	2411	18	2427	34	2443	50	2459
3	2412	19	2428	35	2444	51	2460
4	2413	20	2429	36	2445	52	2461
5	2414	21	2430	37	2446	53	2462
6	2415	22	2431	38	2447	54	2463
7	2416	23	2432	39	2448	55	2464
8	2417	24	2433	40	2449	56	2465
9	2418	25	2434	41	2450	57	2466
10	2419	26	2435	42	2451	58	2467
11	2420	27	2436	43	2452	59	2468
12	2421	28	2437	44	2453	60	2469
13	2422	29	2438	45	2454	61	2470
14	2423	30	2439	46	2455		
15	2424	31	2440	47	2456		
16	2425	32	2441	48	2457		

The test frequencies are below:

Channel	Frequency
The lowest channel	2410MHz
The middle channel	2440MHz
The Highest channel	2470MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: New battery is used during all test.	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	80.29	81.74	79.17

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 23, 2021	June 22, 2024
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 14, 2023	April 13, 2024
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Coaxial Cable	GTS	N/A	GTS213	April 21, 2023	April 20, 2024
8	Coaxial Cable	GTS	N/A	GTS211	April 21, 2023	April 20, 2024
9	Coaxial cable	GTS	N/A	GTS210	April 21, 2023	April 20, 2024
10	Coaxial Cable	GTS	N/A	GTS212	April 21, 2023	April 20, 2024
11	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 14, 2023	April 13, 2024
12	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
13	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 14, 2023	April 13, 2024
14	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 14, 2023	April 13, 2024
15	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 30, 2022	Oct. 29, 2023
16	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 30, 2022	Oct. 29, 2023
17	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 13, 2023	March 12, 2024
18	Amplifier	/	LNA-1000-30S	GTS650	April 14, 2023	April 13, 2024
19	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS668	Dec. 20, 2022	Dec.19, 2023

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 14, 2023	April 13, 2024
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	April 14, 2023	April 13, 2024
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 14, 2023	April 13, 2024
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 14, 2023	April 13, 2024
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 14, 2023	April 13, 2024
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 14, 2023	April 13, 2024
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 14, 2023	April 13, 2024


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	April 24, 2023	April 23, 2024
2	Barometer	KUMAO	SF132	GTS647	July 26, 2022	July 25, 2023



7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is integral antenna, reference to the appendix II for details.	

7.2 Radiated Emission Method

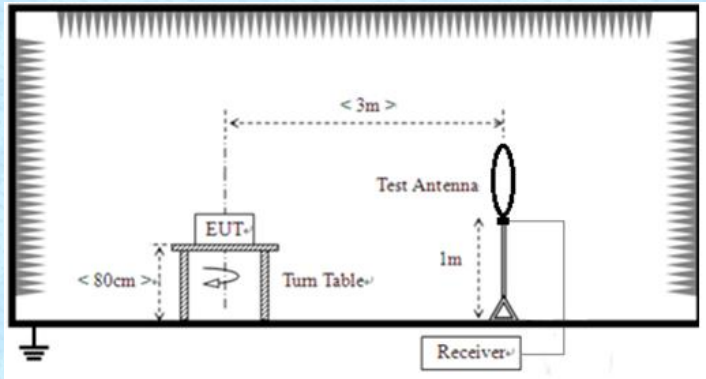Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
5000 @3m			Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to1GHz				

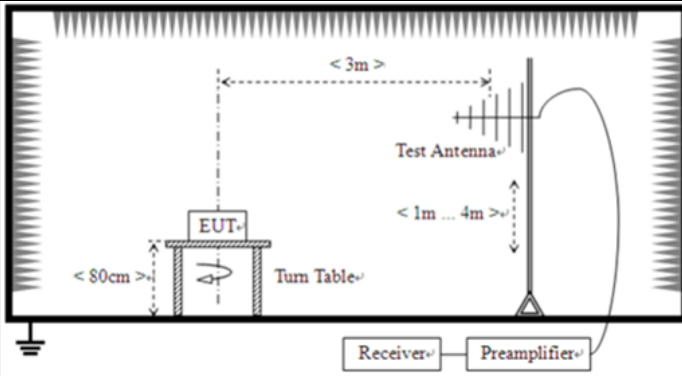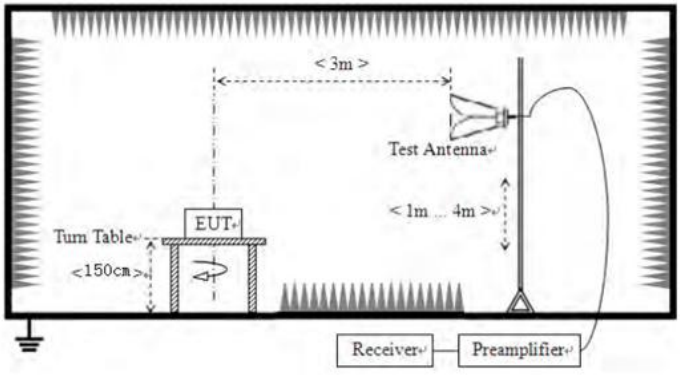	 For radiated emissions above 1GHz 	
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test environment:	Temp.: 25 °C	Humid.: 52%
	Press.: 1012mbar	
Test voltage:	DC 4.5V	
Test results:	Pass	

Measurement data:

7.2.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2410.00	88.35	27.43	2.93	38.88	79.83	114.00	-34.17	Vertical
2410.00	87.47	27.43	2.93	38.88	78.95	114.00	-35.05	Horizontal
2440.00	88.40	27.55	2.96	38.98	79.93	114.00	-34.07	Vertical
2440.00	90.21	27.55	2.96	38.98	81.74	114.00	-32.26	Horizontal
2470.00	87.12	27.64	2.99	39.05	78.70	114.00	-35.30	Vertical
2470.00	89.58	27.64	2.99	39.05	81.16	114.00	-32.84	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2410.00	78.02	27.43	2.93	38.88	69.50	94.00	-24.50	Vertical
2410.00	77.98	27.43	2.93	38.88	69.46	94.00	-24.54	Horizontal
2440.00	78.35	27.55	2.96	38.98	69.88	94.00	-24.12	Vertical
2440.00	79.85	27.55	2.96	38.98	71.38	94.00	-22.62	Horizontal
2470.00	77.50	27.64	2.99	39.05	69.08	94.00	-24.92	Vertical
2470.00	79.94	27.64	2.99	39.05	71.52	94.00	-22.48	Horizontal

Note: RBW>20dB BW, VBW> RBW, PK detector is for PK value, AV detector is for AV value .


7.2.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

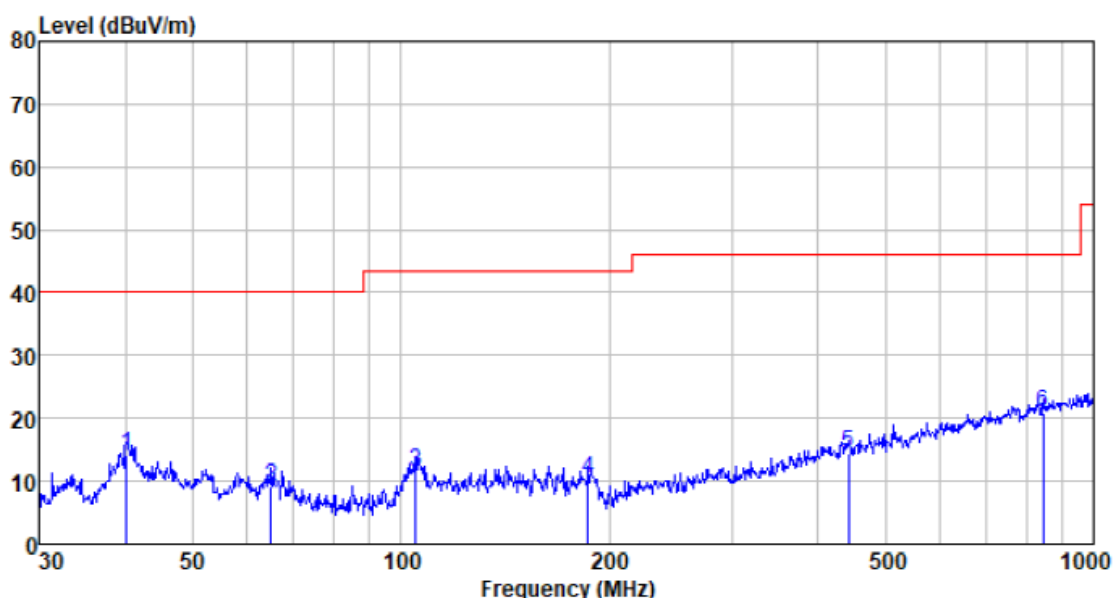


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
40.135	30.07	13.50	0.66	30.00	14.23	40.00	-25.77	QP
64.887	26.78	11.53	0.90	30.00	9.21	40.00	-30.79	QP
104.903	30.30	10.09	1.23	30.00	11.62	43.50	-31.88	QP
186.441	28.66	9.93	1.77	30.00	10.36	43.50	-33.14	QP
443.294	24.75	16.58	3.06	30.00	14.39	46.00	-31.61	QP
845.088	23.14	23.26	4.63	30.00	21.03	46.00	-24.97	QP

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

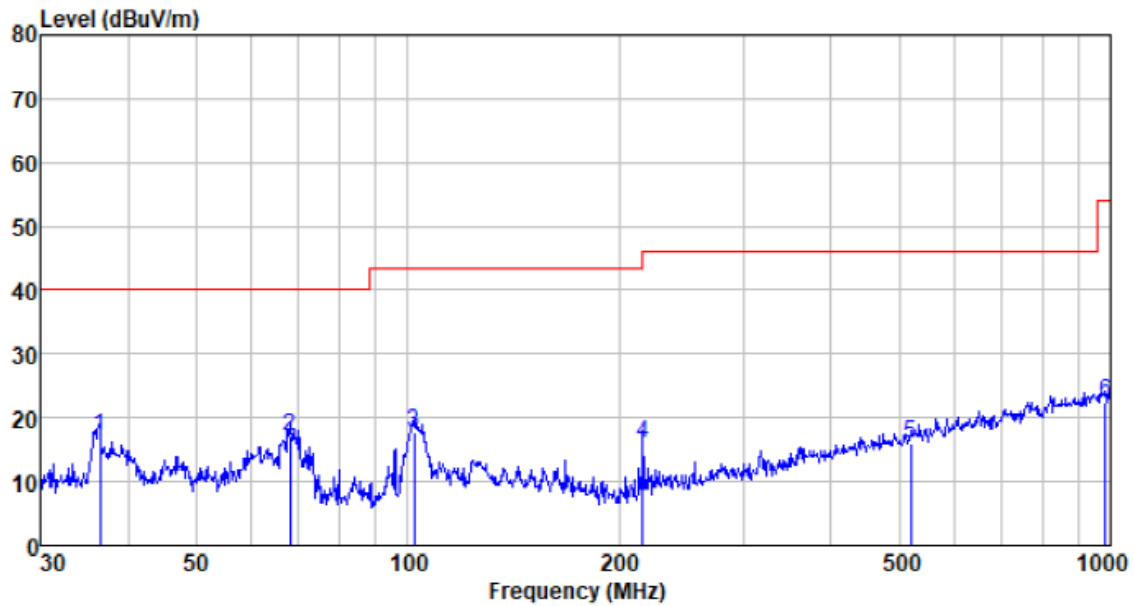


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.509	33.51	12.95	0.62	30.00	17.08	40.00	-22.92	QP
67.913	35.33	10.91	0.92	30.00	17.16	40.00	-22.84	QP
102.001	36.69	9.86	1.21	30.00	17.76	43.50	-25.74	QP
216.024	33.95	10.09	1.93	30.00	15.97	46.00	-30.03	QP
519.065	24.75	17.95	3.39	30.00	16.09	46.00	-29.91	QP
982.620	22.56	24.57	5.16	30.00	22.29	54.00	-31.71	QP

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

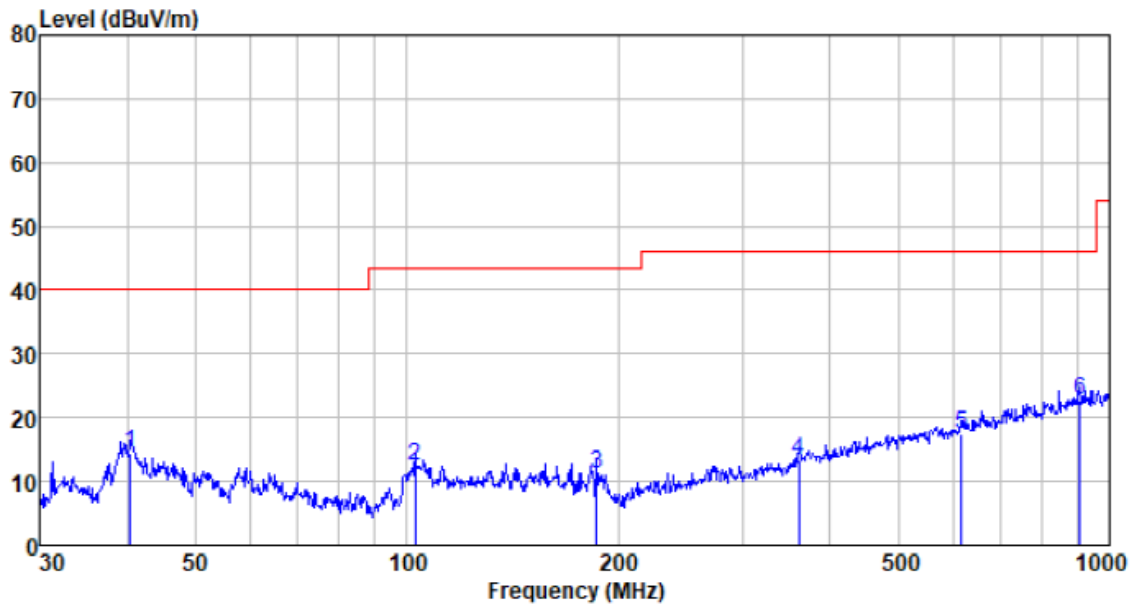


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
40.417	30.31	13.49	0.66	30.00	14.46	40.00	-25.54	QP
102.719	31.23	9.92	1.22	30.00	12.37	43.50	-31.13	QP
186.441	29.47	9.93	1.77	30.00	11.17	43.50	-32.33	QP
361.714	26.01	14.55	2.68	30.00	13.24	46.00	-32.76	QP
616.372	24.05	19.56	3.79	30.00	17.40	46.00	-28.60	QP
906.482	23.84	23.95	4.88	30.00	22.67	46.00	-23.33	QP

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

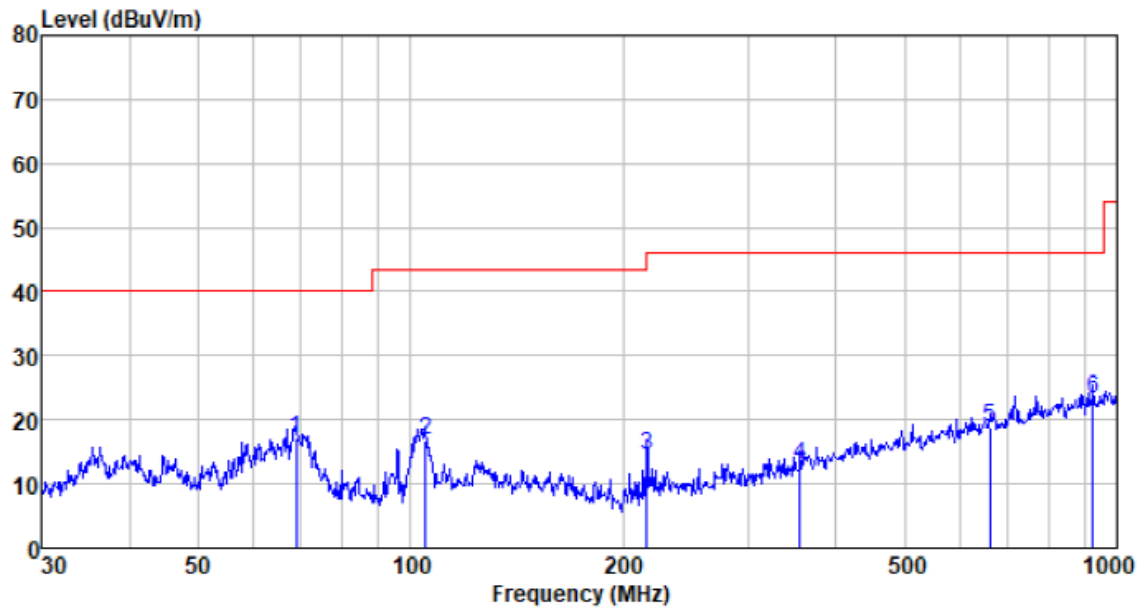


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
68.872	35.34	10.72	0.93	30.00	16.99	40.00	-23.01	QP
104.903	35.62	10.09	1.23	30.00	16.94	43.50	-26.56	QP
216.024	32.40	10.09	1.93	30.00	14.42	46.00	-31.58	QP
355.427	26.12	14.34	2.64	30.00	13.10	46.00	-32.90	QP
661.151	24.70	20.24	3.95	30.00	18.89	46.00	-27.11	QP
925.756	24.25	24.11	4.95	30.00	23.31	46.00	-22.69	QP

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

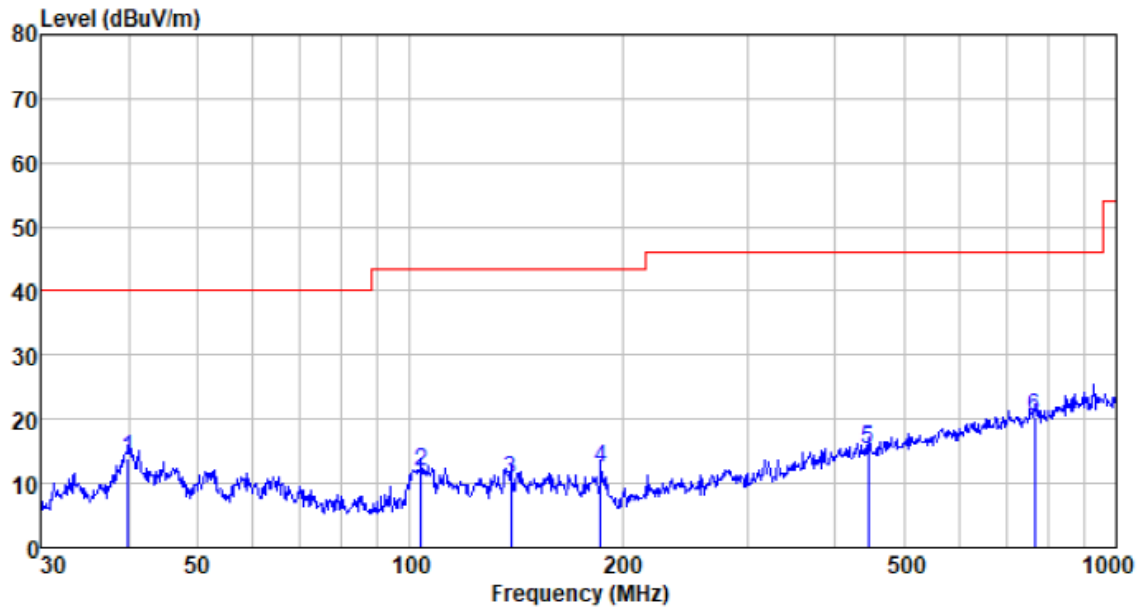

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.854	29.66	13.48	0.66	30.00	13.80	40.00	-26.20	QP
103.806	30.56	10.01	1.22	30.00	11.79	43.50	-31.71	QP
138.874	26.81	12.34	1.50	30.00	10.65	43.50	-32.85	QP
186.441	30.75	9.93	1.77	30.00	12.45	43.50	-31.05	QP
444.851	25.57	16.60	3.07	30.00	15.24	46.00	-30.76	QP
766.057	24.01	22.08	4.33	30.00	20.42	46.00	-25.58	QP


Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

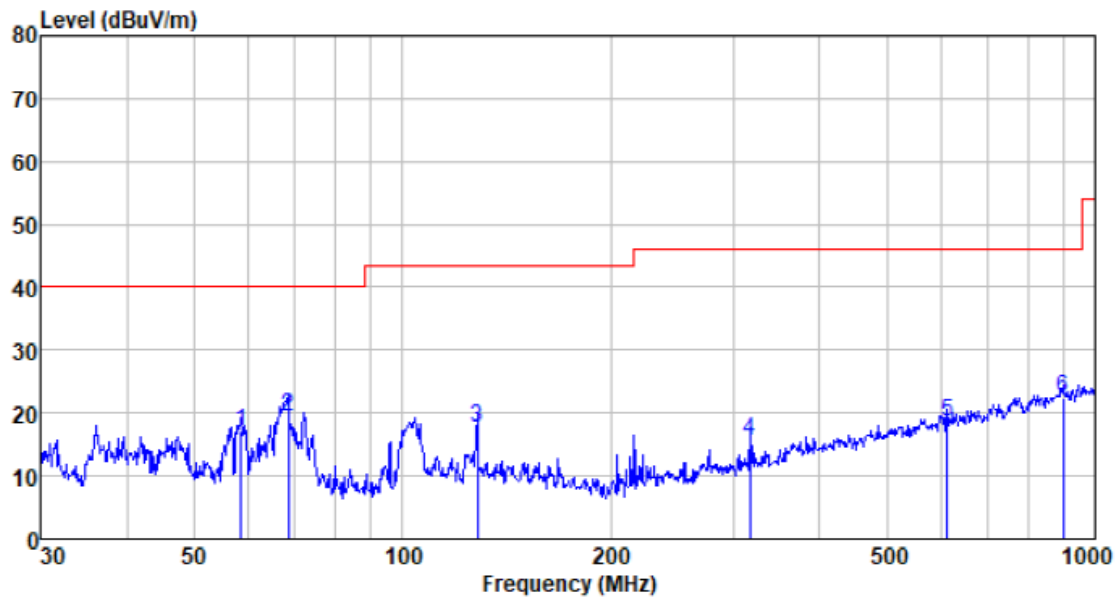

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
58.407	33.52	12.69	0.85	30.00	17.06	40.00	-22.94	QP
68.391	37.86	10.82	0.93	30.00	19.61	40.00	-20.39	QP
128.113	34.66	11.71	1.42	30.00	17.79	43.50	-25.71	QP
317.701	30.06	13.06	2.45	30.00	15.57	46.00	-30.43	QP
612.064	25.34	19.49	3.76	30.00	18.59	46.00	-27.41	QP
900.147	23.83	23.90	4.85	30.00	22.58	46.00	-23.42	QP


■ Above 1GHz

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

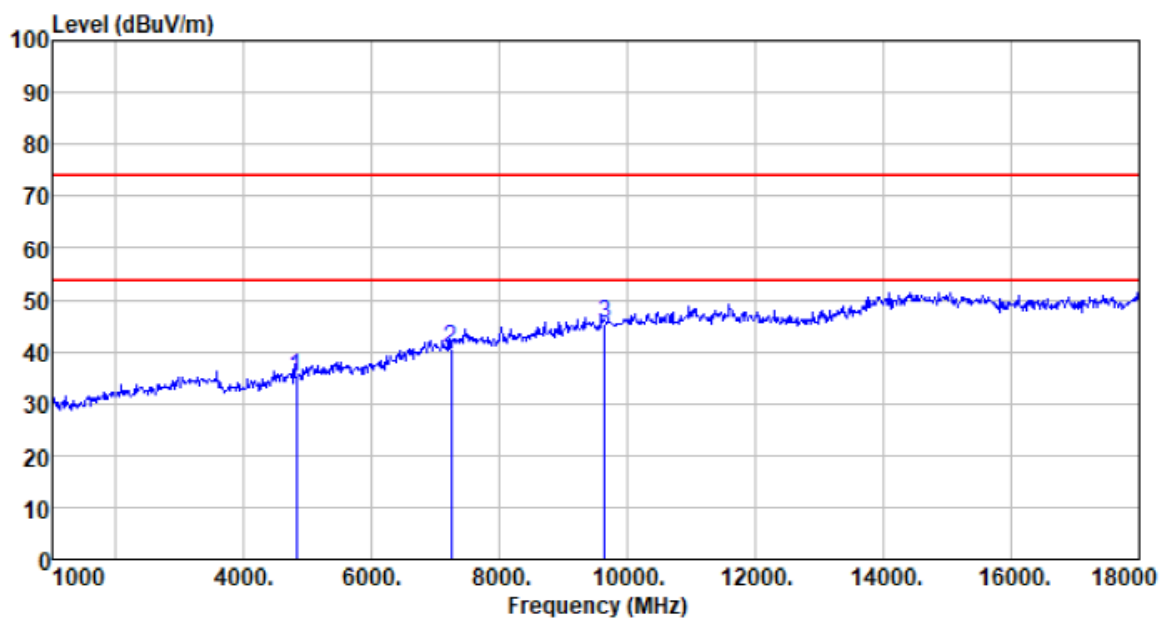


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4820.000	37.86	31.10	4.63	38.36	35.23	74.00	-38.77	Peak
7230.000	37.05	35.96	6.50	38.97	40.54	74.00	-33.46	Peak
9640.000	39.24	37.94	7.98	39.69	45.47	74.00	-28.53	Peak

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

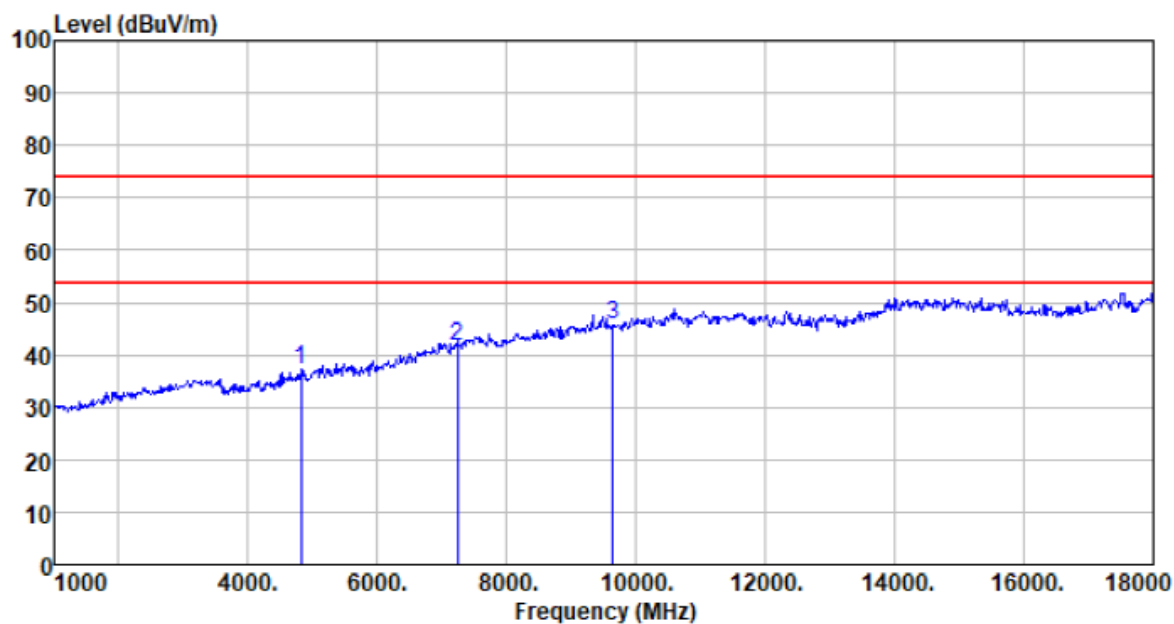


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4820.000	39.82	31.10	4.63	38.36	37.19	74.00	-36.81	Peak
7230.000	38.25	35.96	6.50	38.97	41.74	74.00	-32.26	Peak
9640.000	39.56	37.94	7.98	39.69	45.79	74.00	-28.21	Peak

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

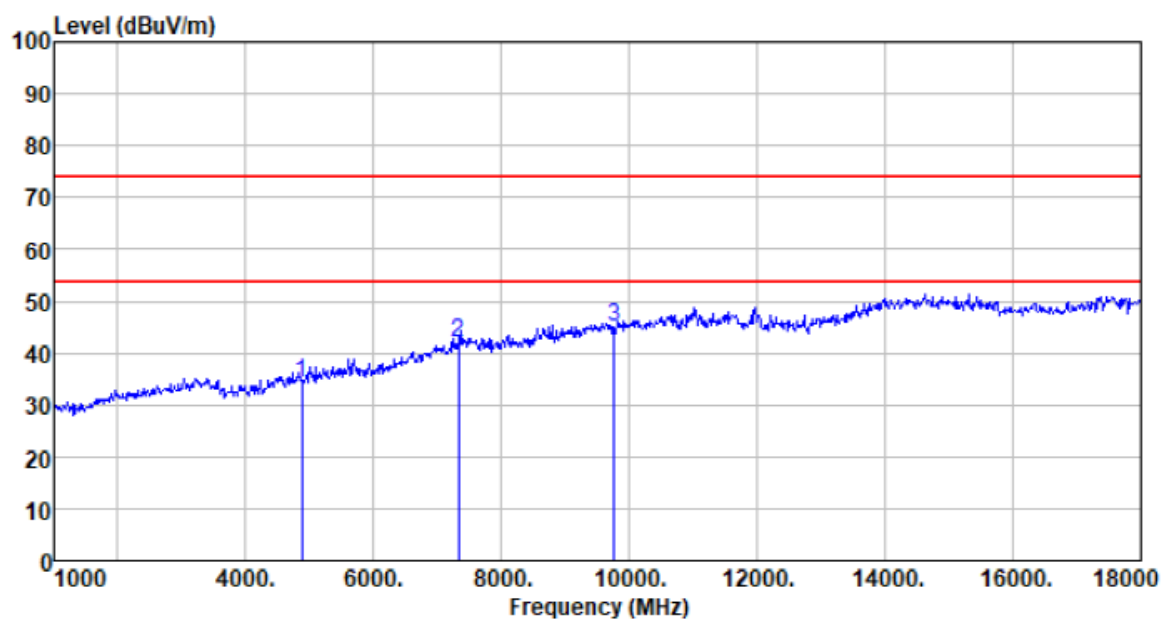


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	36.82	31.26	4.69	38.38	34.39	74.00	-39.61	Peak
7320.000	38.43	36.14	6.63	39.00	42.20	74.00	-31.80	Peak
9760.000	38.55	38.06	8.03	39.73	44.91	74.00	-29.09	Peak

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

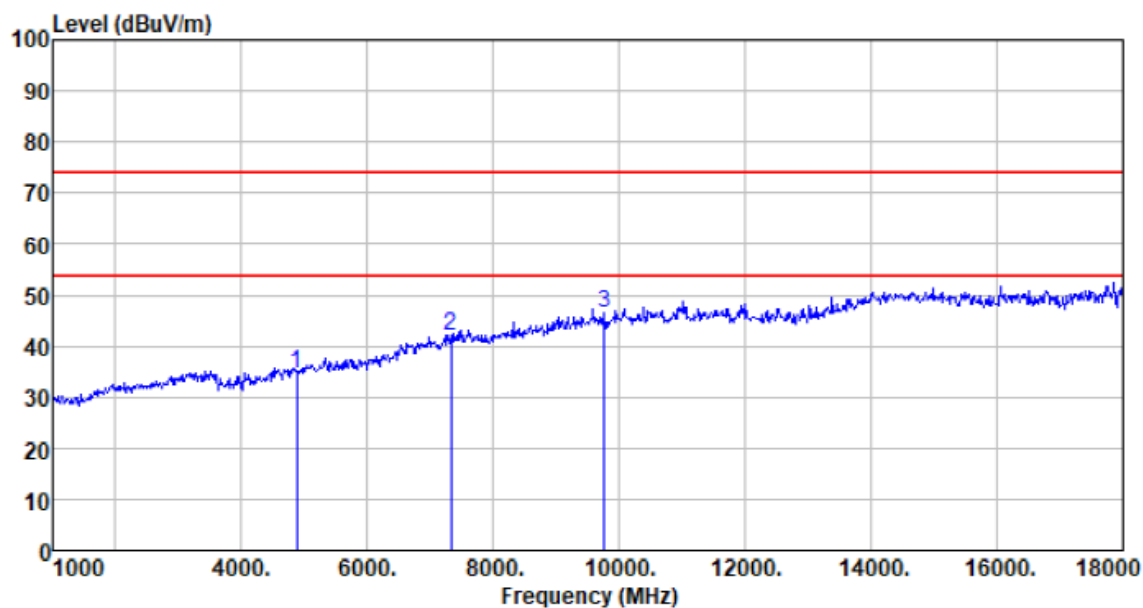


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	37.06	31.26	4.69	38.38	34.63	74.00	-39.37	Peak
7320.000	38.47	36.14	6.63	39.00	42.24	74.00	-31.76	Peak
9760.000	40.24	38.06	8.03	39.73	46.60	74.00	-27.40	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

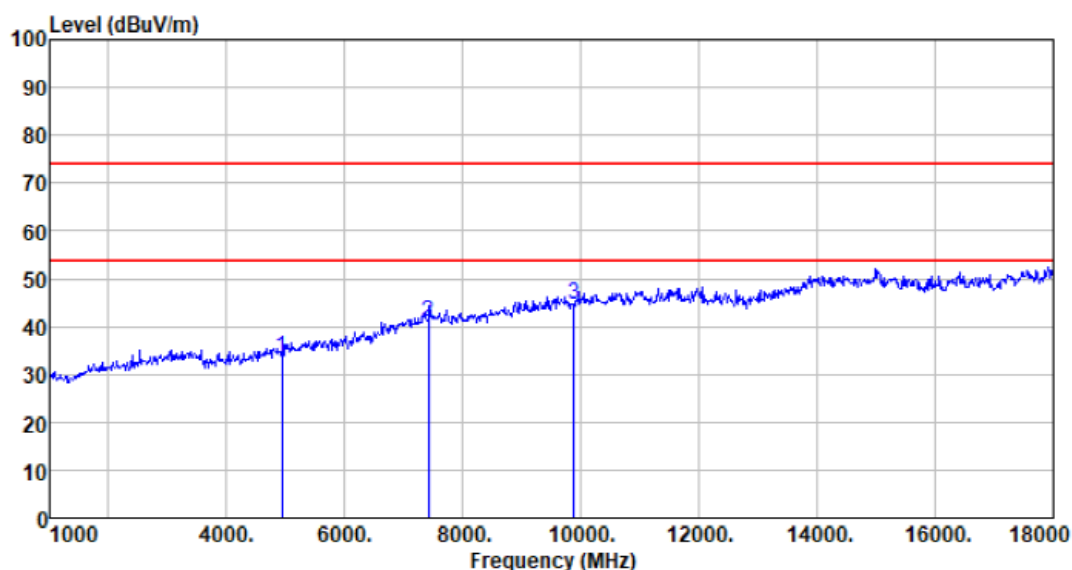

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4940.000	35.71	31.43	4.77	38.39	33.52	74.00	-40.48	Peak
7410.000	36.92	36.32	6.73	39.02	40.95	74.00	-33.05	Peak
9880.000	38.23	38.18	8.07	39.76	44.72	74.00	-29.28	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

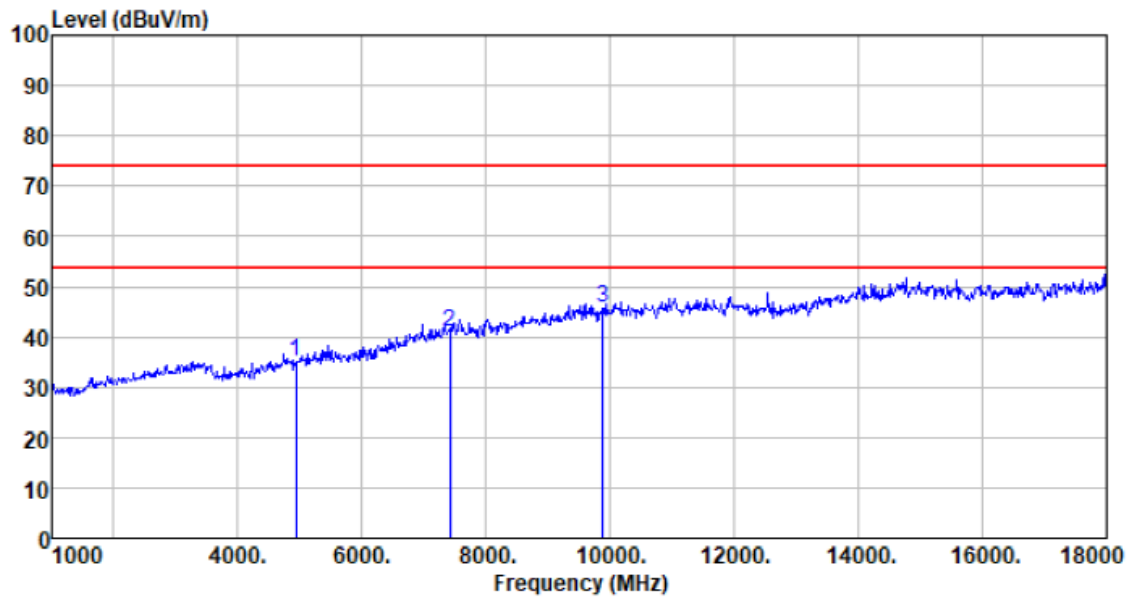

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4940.000	37.23	31.43	4.77	38.39	35.04	74.00	-38.96	Peak
7410.000	37.00	36.32	6.73	39.02	41.03	74.00	-32.97	Peak
9880.000	39.17	38.18	8.07	39.76	45.66	74.00	-28.34	Peak


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamp factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. For above 18GHz, no emission found.

7.2.3 Bandedge emissions


All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

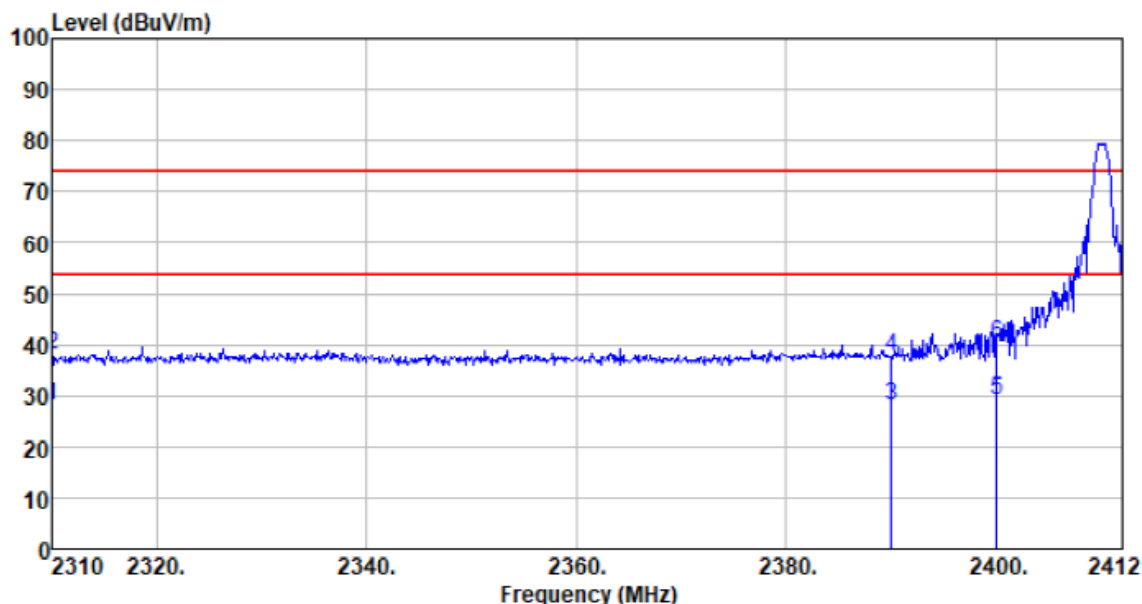


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	36.56	27.17	2.81	38.52	28.02	54.00	-25.98	Average
2310.000	46.45	27.17	2.81	38.52	37.91	74.00	-36.09	Peak
2390.000	36.43	27.27	2.91	38.56	28.05	54.00	-25.95	Average
2390.000	46.10	27.27	2.91	38.56	37.72	74.00	-36.28	Peak
2400.000	37.38	27.28	2.91	38.56	29.01	54.00	-24.99	Average
2400.000	48.68	27.28	2.91	38.56	40.31	74.00	-33.69	Peak

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

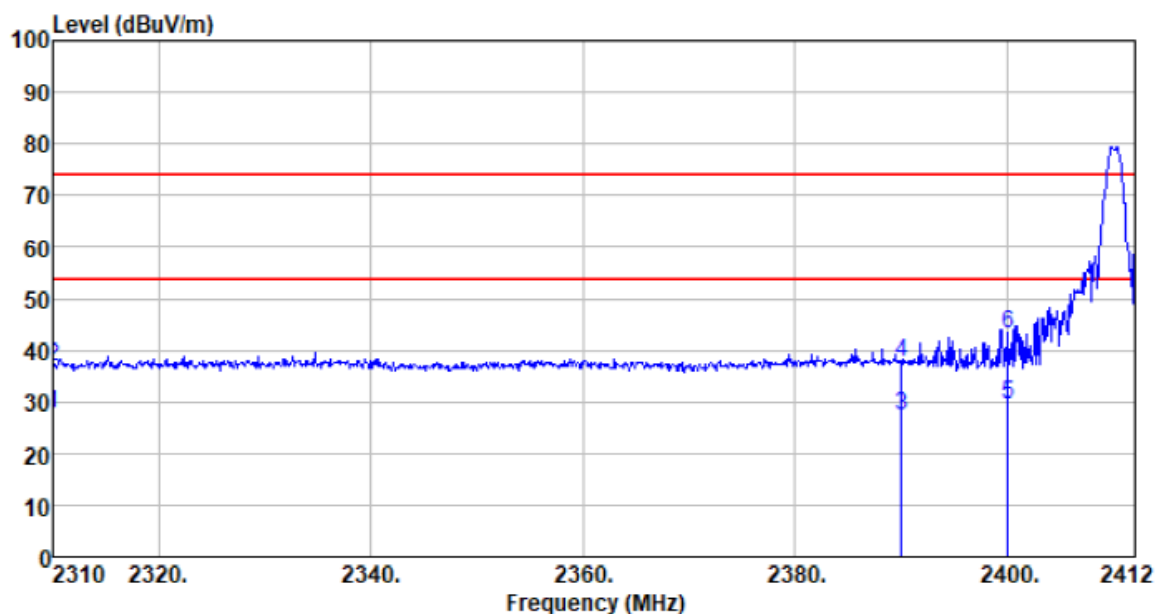


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	36.12	27.17	2.81	38.52	27.58	54.00	-26.42	Average
2310.000	45.31	27.17	2.81	38.52	36.77	74.00	-37.23	Peak
2390.000	35.66	27.27	2.91	38.56	27.28	54.00	-26.72	Average
2390.000	45.90	27.27	2.91	38.56	37.52	74.00	-36.48	Peak
2400.000	38.04	27.28	2.91	38.56	29.67	54.00	-24.33	Average
2400.000	51.53	27.28	2.91	38.56	43.16	74.00	-30.84	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

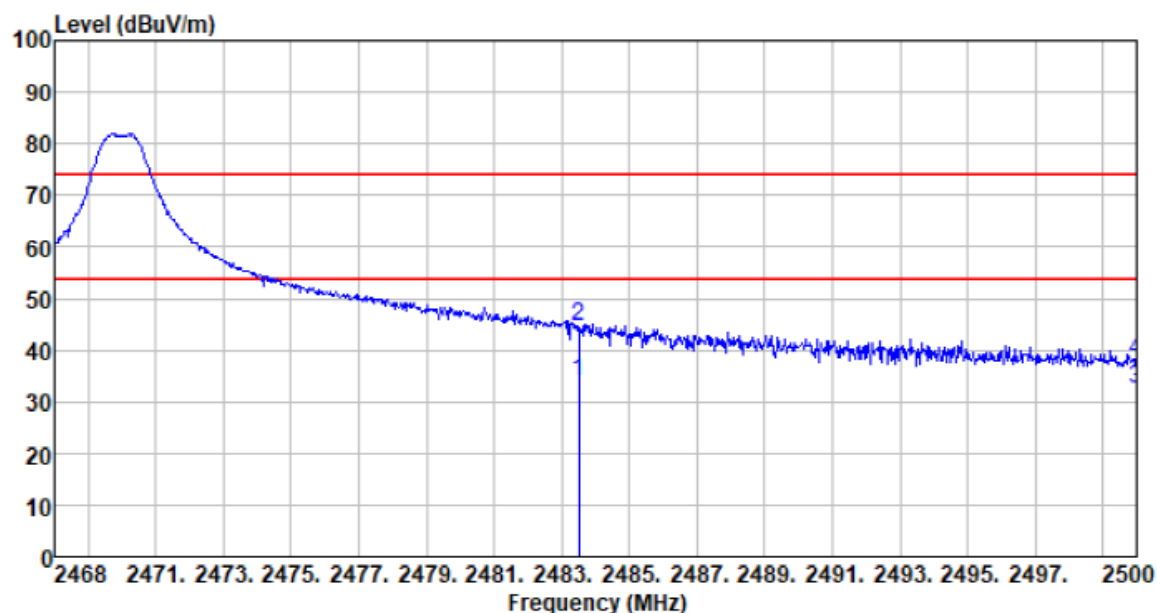

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	42.15	27.38	2.99	38.59	33.93	54.00	-20.07	Average
2483.500	52.89	27.38	2.99	38.59	44.67	74.00	-29.33	Peak
2500.000	40.52	27.40	3.01	38.60	32.33	54.00	-21.67	Average
2500.000	46.35	27.40	3.01	38.60	38.16	74.00	-35.84	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

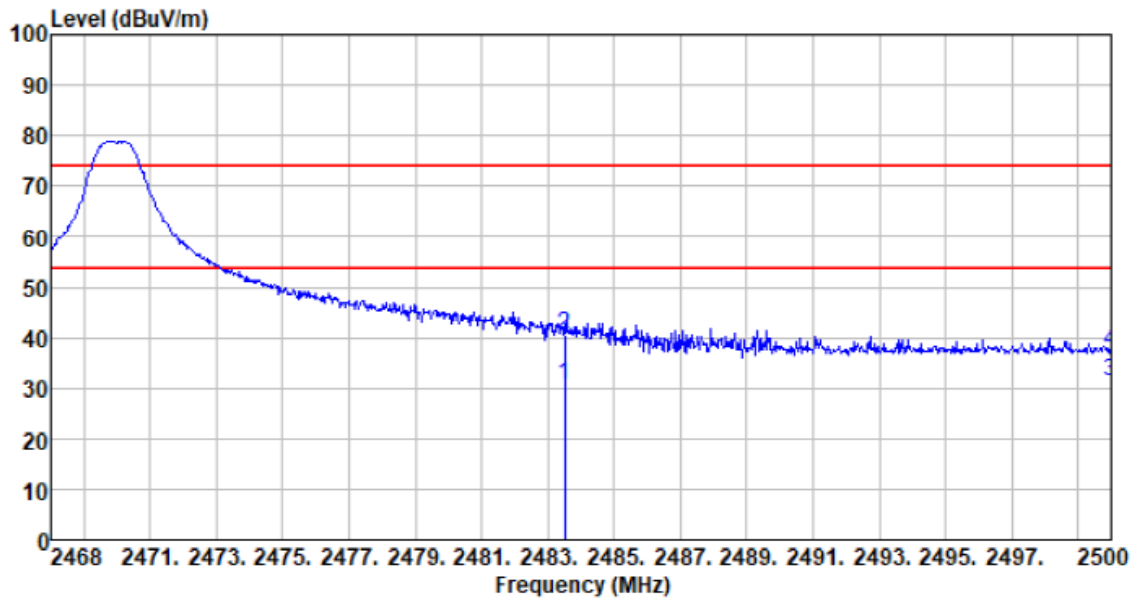


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	38.79	27.38	2.99	38.59	30.57	54.00	-23.43	Average
2483.500	48.89	27.38	2.99	38.59	40.67	74.00	-33.33	Peak
2500.000	39.41	27.40	3.01	38.60	31.22	54.00	-22.78	Average
2500.000	45.54	27.40	3.01	38.60	37.35	74.00	-36.65	Peak

Remark:

1. $Final\ Level = Receiver\ Read\ level + Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$


7.3 20dB Occupy Bandwidth

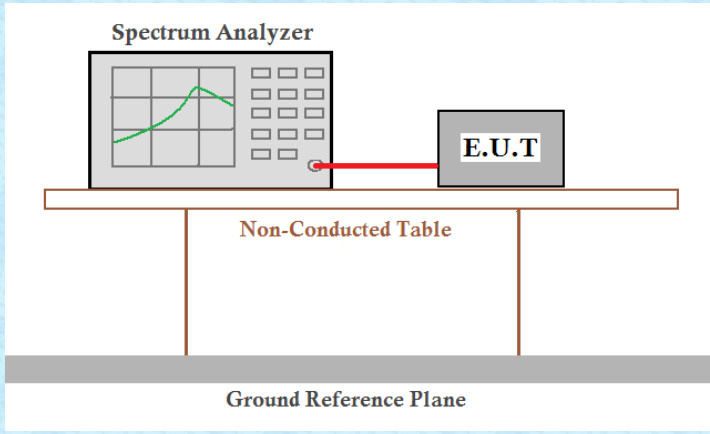Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	1.122	Pass
Middle	1.191	Pass
Highest	1.220	Pass

Test plot as follows:

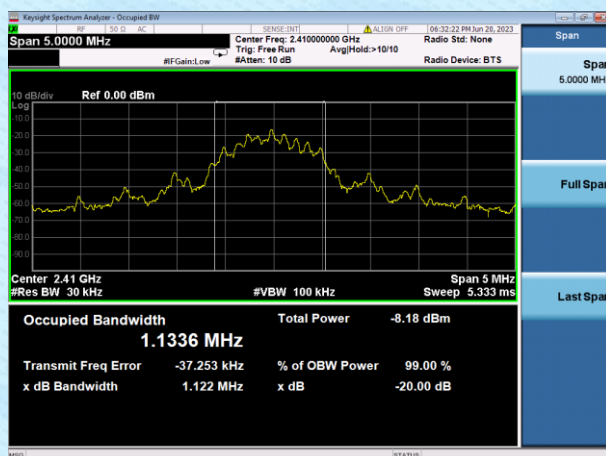

Lowest channel

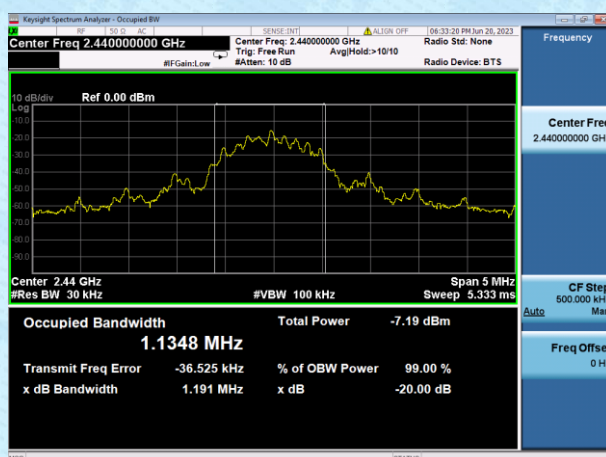

Middle channel



Highest channel

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----