

[illegible]

B.1.01.L.1282 Specification

1. Explanation of part number :

B.1 : 01 : L : 1282
(1) (2) (3) (4)

(1) Product Type : Wireless Antenna

(2) Material : FPC

(3) State : DVT

(4) Serial number:1282

2. Electrical Specification :

2-1. Frequency Band:

Frequency Band	MHz
GPS,WIFI	1575.42Mhz , 2400-2500Mhz,5150-5850Mhz

2-2. Impedance

50 ohm nominal

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=± HOLEDIA=±

NHAIT 浙江海通通讯电子股份有限公司
海通通讯

SCALE:

UNIT: mm

DRAWN BY: 张有远

CHECKED BY: 郑由强

DESIGNED BY: 郑由强

APPROVED BY: 周振邦

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: _____ Specification

DOCUMENT
NO.

PAGE REV.
A0

2-3. S11 ,Efficiency , and Active Data :

2-3.1 S11:

Frequency Band	1575.42	2400	2500		
2-3-1. Typical Value:	-13.6	-13.5	-14.1		
2-3-2Measuring Method	1. A 50 Ω coaxial cable is connected to the fpcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.				
2-3-3Picture					

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=± HOLEDIA=±

SCALE:

UNIT: mm

DRAWN BY: 张有远

CHECKED BY: 郑由强

DESIGNED BY: 郑由强

APPROVED BY: 周振邦

TITLE: _____ Specification

NHAIT 浙江海通通讯电子股份有限公司
海通通讯

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.


PAGE REV.
A0

2-4. Measure and Chamber

2-4-1 Measure method

- 1. Using a low loss coaxial cable to link a standard handset jig
- 2. Fixed this handset jig on chamber's rotator plane
- 3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
- 4. Using another standard gain horn antenna to calibrated those data

2-4-2 Chamber definition

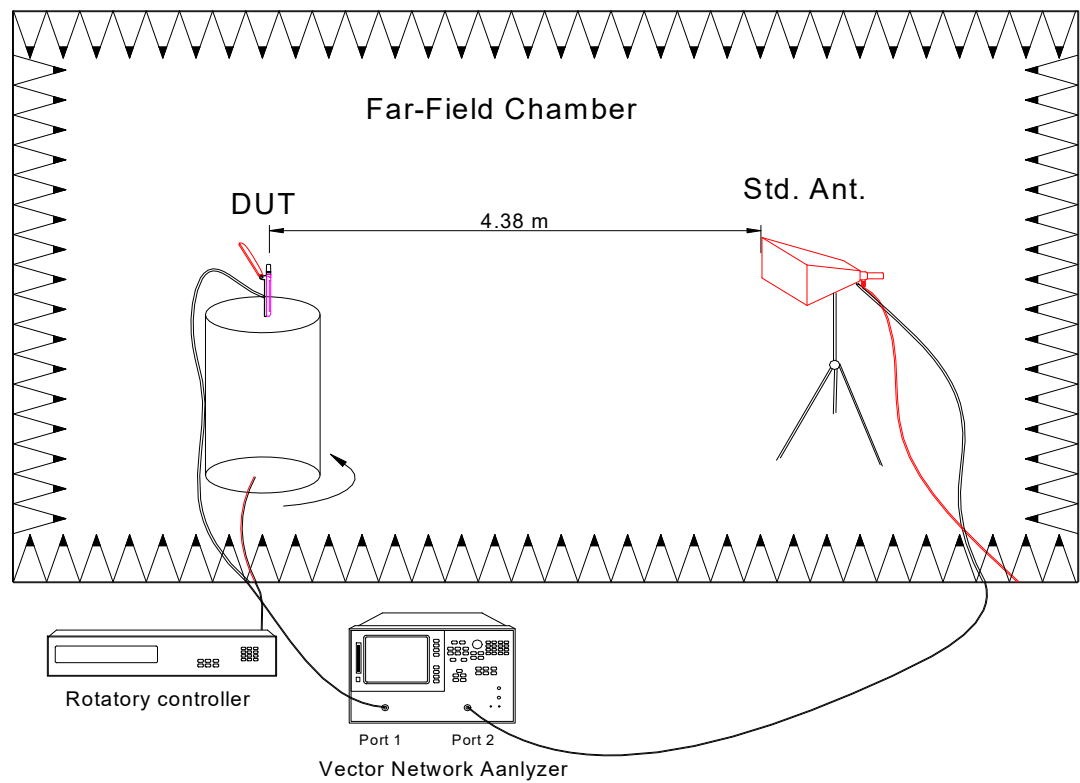

- 1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
- 2. The quite room region is 40cmx40cmx40cm at the center of rotator
- 3. The distance between DUT and standard antenna is 4.38 m
- 4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)


UNLESS OTHER SPECIFIED TOLERANCES ON: X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±		NHAIT 浙江海通通讯电子股份有限公司 海通通讯	
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 张有远	CHECKED BY: 郑由强		
DESIGNED BY: 郑由强	APPROVED BY: 周振邦		
TITLE: Specification		DOCUMENT NO.	PAGE REV. A0

2-4-3 Antenna Efficiency

Frequency	Efficiency	Efficiency(dB)	Gain(dBi)
1550	41%	-3.8	2.0
1555	41%	-3.8	2.0
1560	42%	-3.8	2.1
1565	42%	-3.8	2.0
1570	42%	-3.7	2.0
1575	42%	-3.8	1.9
1580	42%	-3.8	1.8
1585	41%	-3.8	1.8
1590	41%	-3.9	1.7
1595	40%	-3.9	1.8
1600	39%	-4.1	1.7
2400	44%	-3.6	1.0
2410	45%	-3.5	1.2
2420	47%	-3.3	1.3
2430	47%	-3.3	1.3
2440	47%	-3.3	1.3
2450	47%	-3.3	1.2
2460	48%	-3.2	1.4
2470	48%	-3.2	1.4
2480	47%	-3.2	1.5
2490	47%	-3.3	1.3
2500	48%	-3.2	1.4


UNLESS OTHER SPECIFIED TOLERANCES ON: X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±		NHAIT 浙江海通通讯电子股份有限公司 海通通讯	
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 张有远	CHECKED BY: 郑由强		
DESIGNED BY: 郑由强	APPROVED BY: 周振邦		
TITLE: _____ Specification		DOCUMENT NO.	PAGE REV. A0

3. Antenna Dimensions:

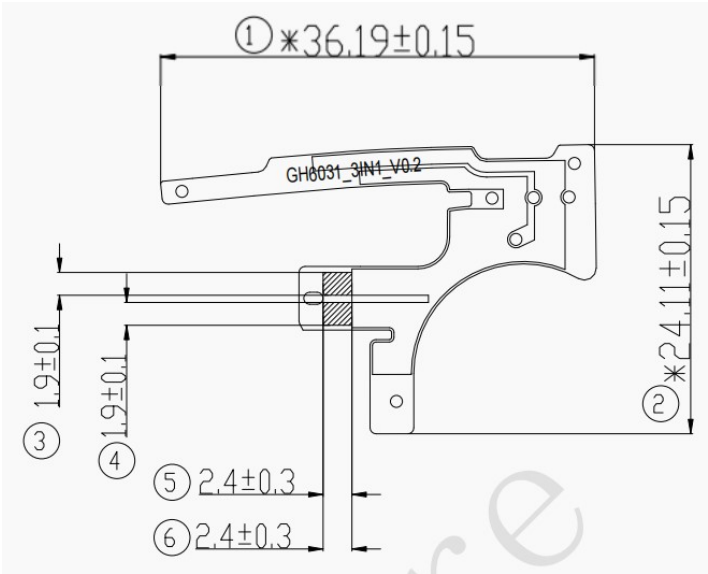


4. Testing Environment

Passive Test

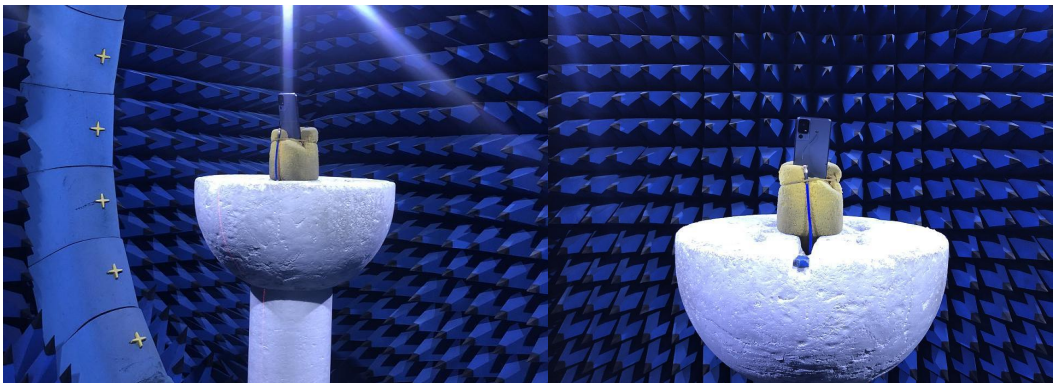


Active Test

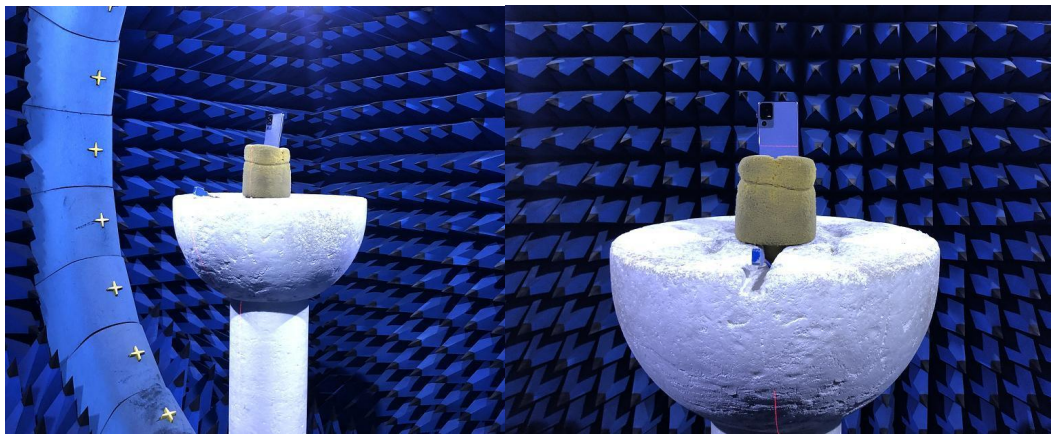


UNLESS OTHER SPECIFIED TOLERANCES ON: X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±		NHAIT 浙江海通通讯电子股份有限公司 海通通讯	
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 张有远	CHECKED BY: 郑由强		
DESIGNED BY: 郑由强	APPROVED BY: 周振邦		
TITLE: Specification		DOCUMENT NO.	PAGE REV. A0

5. 3D Radiation Pattern
GPS [1575MHz]

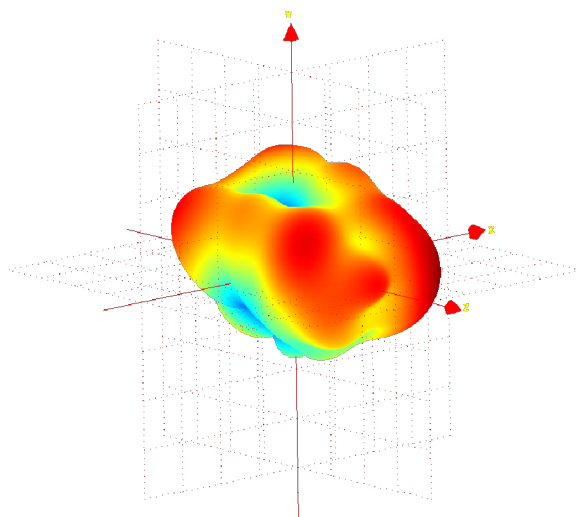


BT/WiFi 2.4GHz [2400MHz]

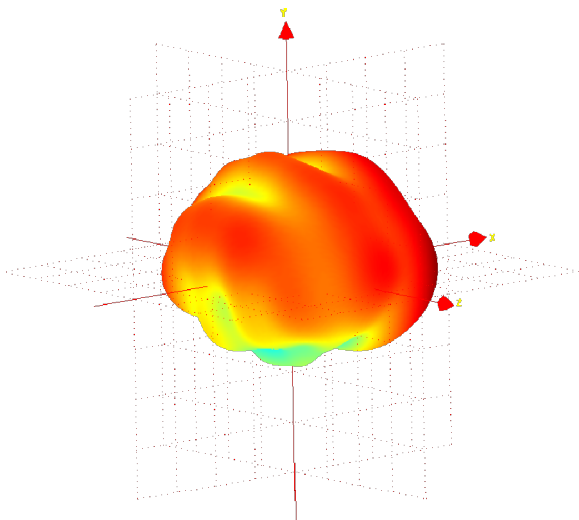

UNLESS OTHER SPECIFIED TOLERANCES ON: X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±		NHAIT 浙江海通通讯电子股份有限公司 海通通讯	
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 张有远	CHECKED BY: 郑由强		
DESIGNED BY: 郑由强	APPROVED BY: 周振邦		
TITLE: _____ Specification		DOCUMENT NO.	PAGE REV. A0

BT/WiFi 2.4GHz [2500MHz]

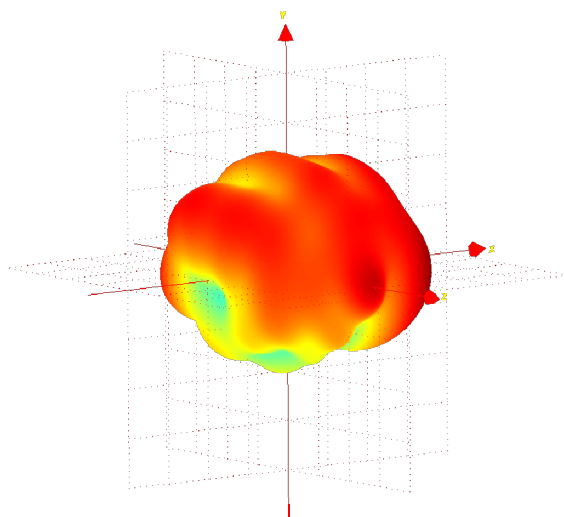

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=± HOLEDIA=±

NHAIT 浙江海通通讯电子股份有限公司
海通通讯

SCALE:

UNIT: mm

DRAWN BY: 张有远

CHECKED BY: 郑由强

DESIGNED BY: 郑由强

APPROVED BY: 周振邦

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: _____ Specification

DOCUMENT
NO.

PAGE REV.

A0