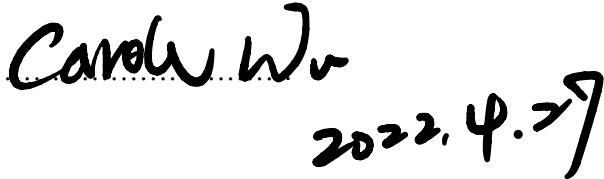


## KDB 680106 for WPT exclusion requirements

FCC ID: 2AQUNQM133BD3

KDB 680106 D01 Section 5.b Requirements	Product Specification	Result
(1) Power transfer frequency is less than 1 MHz.	0.110MHz to 0.145MHz	Complied
(2) Output power from each primary coil is less than or equal to 15 watts.	15 watts.	Complied
(3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	The MWTC1013 is WPC-1.2 compliant, MP-A11 coil configuration. MP-A11 coil is single coil configuration.	Complied
(4) Client device is placed directly in contact with the transmitter.	Client device is placed directly in contact with the transmitter.	Complied
(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Mobile exposure conditions only	Complied
(6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Please refer to the test result of RF exposure report that are demonstrated to be less than 50% of the MPE limit.	Complied

Name: Carole Wu

Signature: 

2022.4.27