

RF Test Report

For

Globe Electric Company Inc.

Test Standards:	Part 15C Subpart C §15.247 <u>RSS 247 Issue 2</u>
Product Description:	<u>Wi-Fi Smart Outdoor Power Adapter</u>
Tested Model:	<u>50333</u>
Brand Name:	<u>Globe</u>
FCC ID:	<u>2AQUQGE50333</u>
IC:	<u>8290A-GE50333</u>
Classification	<u>Digital Spread Spectrum (DSS)</u>
Report No.:	<u>EC2109022RF03</u>
Tested Date:	<u>2021-09-16 to 2021-12-02</u>
Issued Date:	<u>2021-12-02</u>
Prepared By:	<u>Jack Liu.</u> Jack Liu / Engineer
Approved By:	<u>Tiny Yang</u> Tiny Yang / RF Manager

Hunan Ecloud Testing Technology Co., Ltd.
Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and
Technological Development Zone, Hunan, P.R.C
Tel.: +86-731-89634887 Fax.: +86-731-89634887
www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2021.12.02	Valid	Update the PCB board based on the original report EC2011039RF03, replace non-RF components for verification test

TABLE OF CONTENTS

1	TEST LABORATORY	5
1.1	Test facility	5
2	GENERAL DESCRIPTION.....	6
2.1	Applicant	6
2.2	Manufacturer	6
2.3	General Description Of EUT	6
2.4	Modification of EUT	7
2.5	Applicable Standards	7
3	TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
3.1	Descriptions of Test Mode	8
3.2	Test Mode	8
3.3	Support Equipment	9
3.4	Test Setup	9
3.5	Measurement Results Explanation Example	13
4	TEST RESULT	14
4.1	Conducted Band Edges Measurement	14
4.2	Conducted Spurious Emission Measurement	15
4.3	Radiated Band Edges and Spurious Emission Measurement	16
4.4	AC Conducted Emission Measurement	20
5	LIST OF MEASURING EQUIPMENT.....	23
6	UNCERTAINTY OF EVALUATION.....	25
	Appendix G: Band edge measurements	26
	Appendix H: Conducted Spurious Emission	33
	Appendix I. Setup Photographs	48

Summary of Test Result

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
15.247(d)	RSS-247 5.5	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.72 dB at 59.232 MHz
15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 5.63 dB at 0.437 MHz

1 Test Laboratory

1.1 Test facility

CNAS (accreditation number:L11138)

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number:CN1244 , Test Firm Registration

Number:793308)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

ISED(CAB identifier: CN0012, ISED# :24347)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

A2LA (Certificate Number:4895.01)

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

2 General Description

2.1 Applicant

Globe Electric Company Inc.
150 Oneida, Montreal, Quebec, Canada, H9R 1A8

2.2 Manufacturer

Globe Electric Company Inc.
150 Oneida, Montreal, Quebec, Canada, H9R 1A8

2.3 General Description Of EUT

Product	Wi-Fi Smart Outdoor Power Adapter
Model No.	50333
Brand Name	Globe
Additional NO.	N/A
Difference Description	N/A
FCC ID	2AQUQGE50333
IC	8290A-GE50333
Power Supply*	125Vac
Modulation Technology	FHSS
Modulation Type	GFSK, 8DPSK, $\pi/4$ DQPSK
Operating Frequency	2402MHz~2480MHz
Number Of Channel	79
Antenna Type	PCB Antenna type with -1dBi gain
HW Version	V0.2
SW Version	smart_plug 1.0-alpha
I/O Ports	Refer to user's manual
Cable Supplied	Refer to user's manual

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. *: Pre-test AC120V and AC125V, only the worst AC125V test data is recorded in the report

2.4 Modification of EUT

No modifications are made to the EUT during all test items.

2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B&ICES-003, recorded in a separate test report.

3 Test Configuration of Equipment Under Test

3.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Mode	Channel	Frequency	Bluetooth RF Output Power
GFSK	Ch00	2402MHz	7.81
	Ch39	2441MHz	8.19
	Ch78	2480MHz	8.54
4 π -DQPSK	Ch00	2402MHz	9.74
	Ch39	2441MHz	10.31
	Ch78	2480MHz	10.7
8DPSK	Ch00	2402MHz	10.4
	Ch39	2441MHz	10.86
	Ch78	2480MHz	11.27

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.

3.2 Test Mode

3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz

3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.
2. Following channel(s) was (were) selected for the final test as listed above

3.2.3 Power Line Conducted Emission Test:


AC Conducted Emission	Mode 1 : BT Linking + Switching On + Lighting
-----------------------------	---

3.3 Support Equipment


Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGEAR	R7800	PY315100319	N/A	shielded, 1.8 m
2.	Notebook	Lenovo	E470C	FCC sDoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable1.2 m
3.	WiFi Smart Bulb	Globe	34202*	2AQUQGB34202	N/A	N/A

3.4 Test Setup


The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

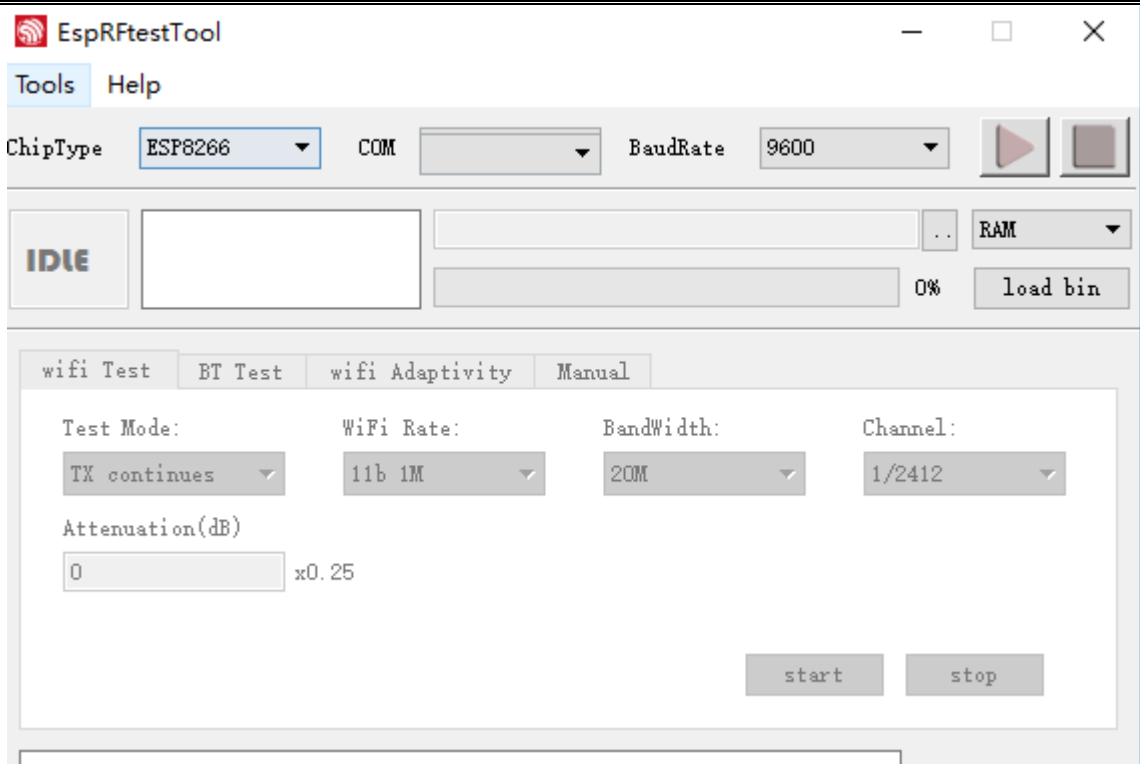


Setup diagram for Conducted Test

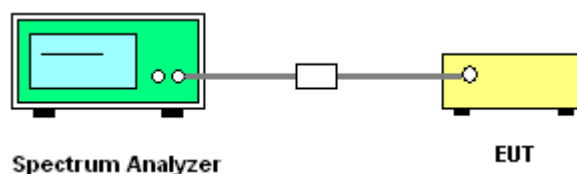


Setup diagram for Radiation(9KHz~30MHz) Test

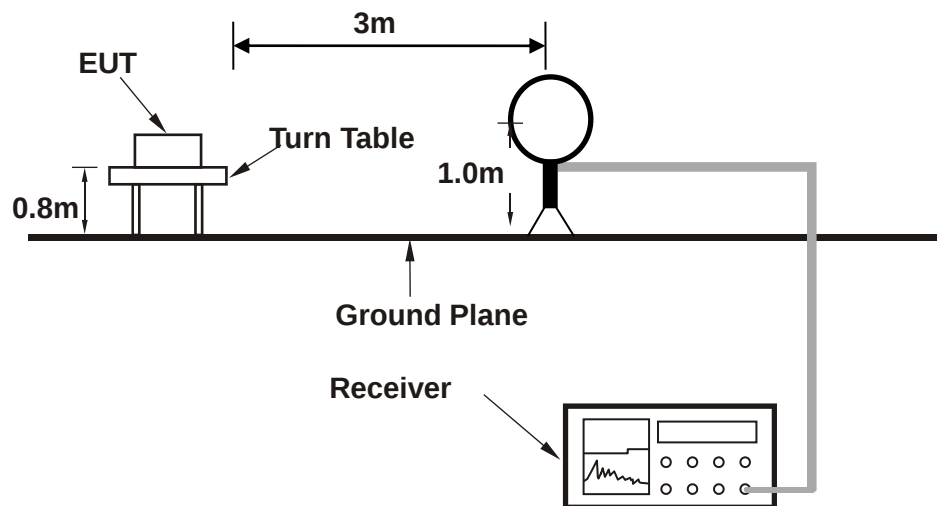


Setup diagram for Radiation(Below 1G) Test

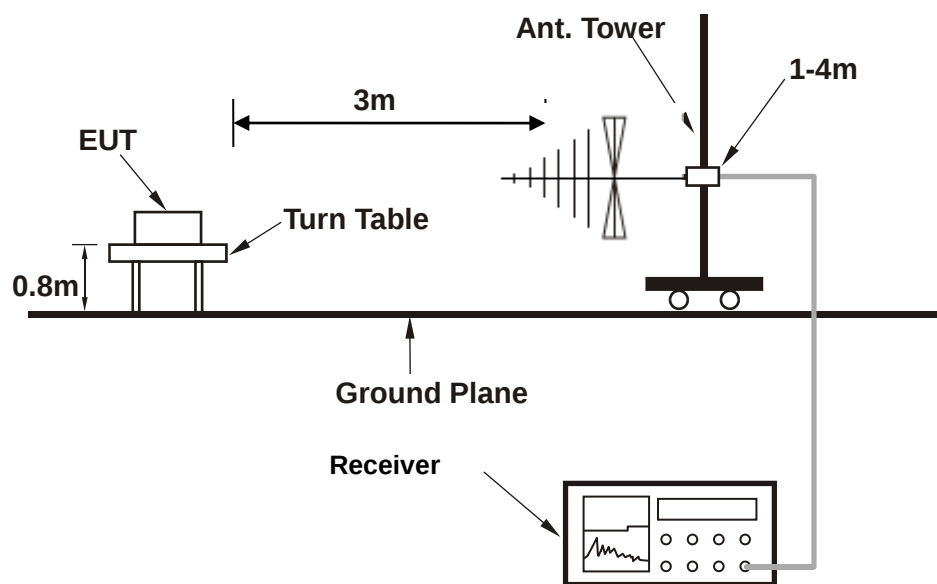

Setup diagram for Radiation (Above1G) Test

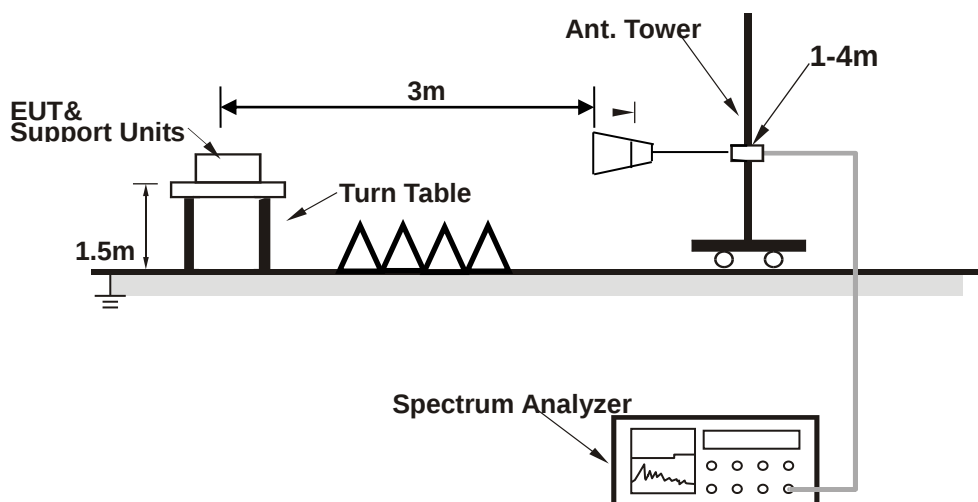

Setup diagram for AC Conducted Emission Test

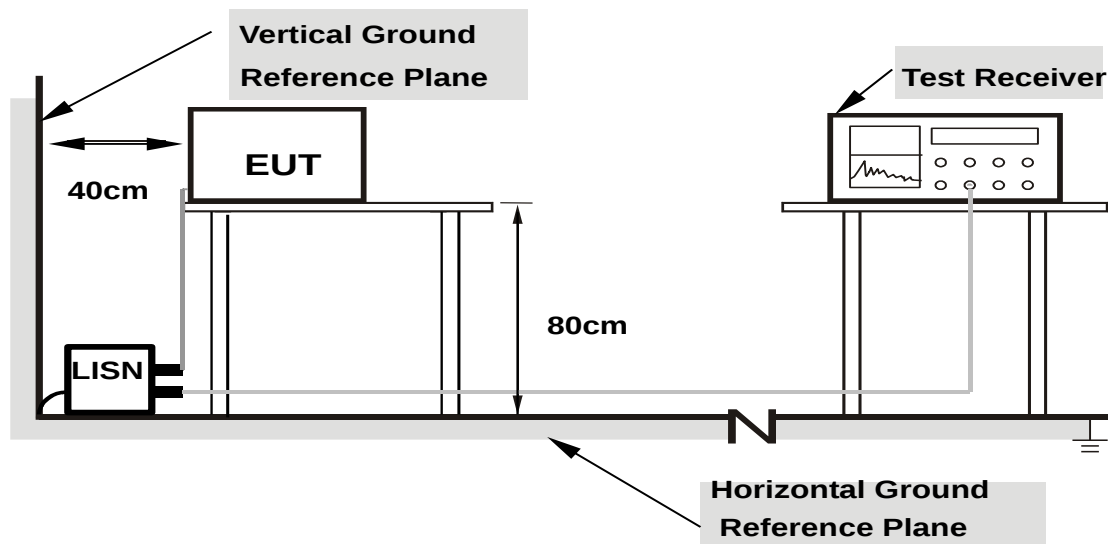

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB μ V/m) = Level(dB μ V/m) - Limit Level (dB μ V/m)

4 Test Result

4.1 Conducted Band Edges Measurement

4.1.1 Limit of Band Edges

FCC §15.247(d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 1~3.

4.1.3 Test Result of Conducted Band Edges

Refer to Appendix G of this test report.

4.2 Conducted Spurious Emission Measurement

4.2.1 Limit of Spurious Emission Measurement

FCC §15.247(d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

4.2.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

4.2.3 Test Result of Conducted Spurious Emission

Refer to Appendix H of this test report.

4.3 Radiated Band Edges and Spurious Emission Measurement

4.3.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The frequency range from 9KHz to 10th harmonic (25GHz) are checked, and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.


4.3.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW=3RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
VBW = 10 Hz, when duty cycle is no less than 98 percent.
VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
5. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
6. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20 \log d + 104.8$$
Where:
 - E is the electric field strength in dB μ V/m
 - EIRP is the equivalent isotropically radiated power in dBm
 - d is the specified measurement distance in m
 - $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ m.
7. Compare the resultant electric field strength level with the applicable regulatory limit.

4.3.3 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Horizontal


Data: 7

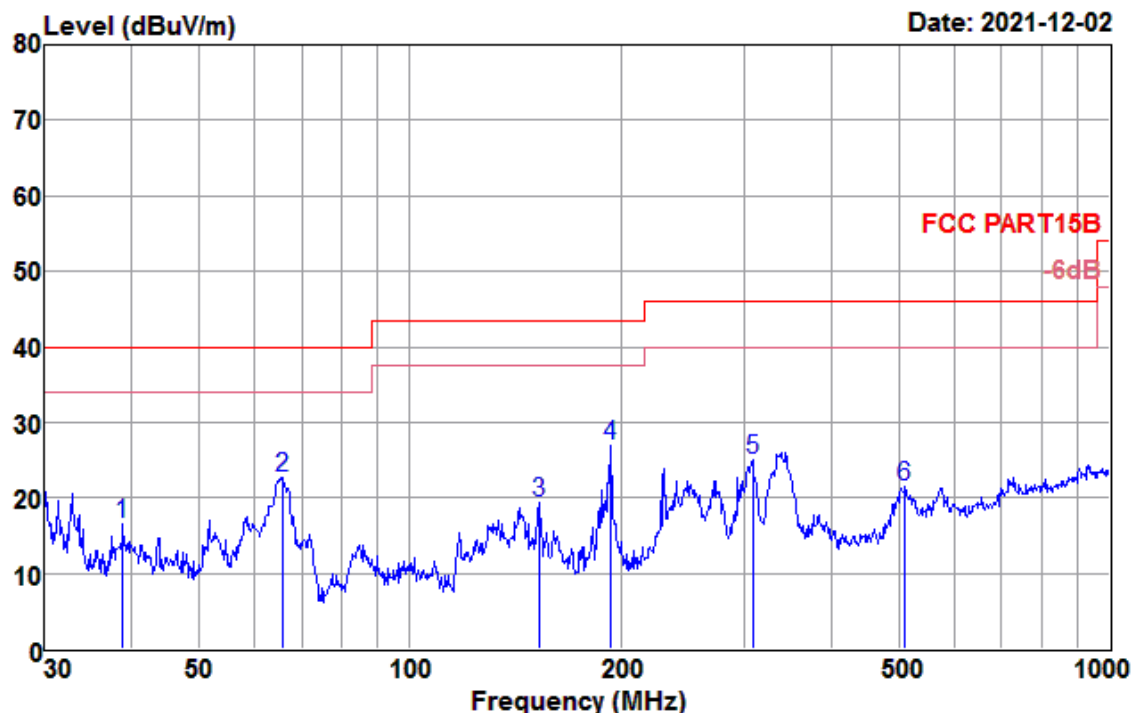

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
38.888	33.94	14.29	0.99	32.60	16.62	40.00	-23.38	QP
65.803	40.61	13.26	1.34	32.57	22.64	40.00	-17.36	QP
152.664	35.68	14.21	2.12	32.55	19.46	43.50	-24.04	QP
193.095	46.32	10.70	2.39	32.59	26.82	43.50	-16.68	QP
308.913	41.24	13.24	3.09	32.61	24.96	46.00	-21.04	QP
510.044	33.23	17.03	4.06	32.79	21.53	46.00	-24.47	QP

Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Vertical

Data: 8

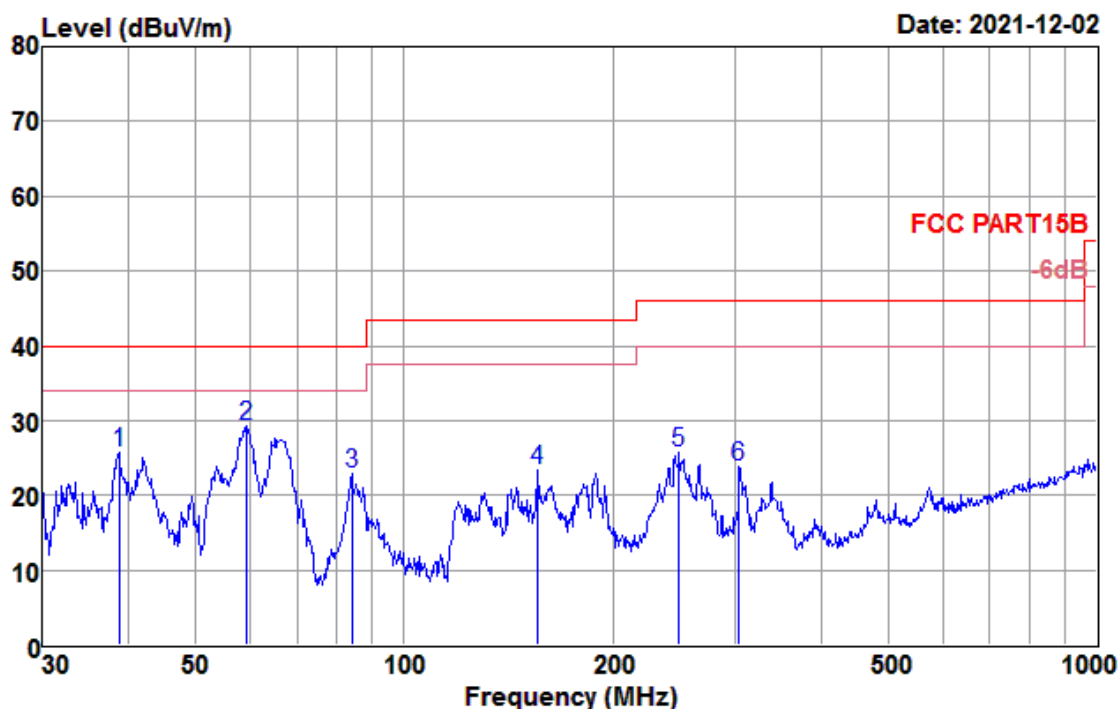

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
38.752	43.02	14.28	0.99	32.60	25.69	40.00	-14.31	QP
59.232	45.71	14.87	1.28	32.58	29.28	40.00	-10.72	QP
84.110	45.05	8.92	1.51	32.53	22.95	40.00	-17.05	QP
155.364	39.71	14.13	2.14	32.56	23.42	43.50	-20.08	QP
249.425	43.92	11.56	2.74	32.60	25.62	46.00	-20.38	QP
304.610	40.18	13.18	3.08	32.60	23.84	46.00	-22.16	QP

4.4 AC Conducted Emission Measurement

4.4.1 Limit of AC Conducted Emission

FCC §15.207

IC RSS-GEN 8.8

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


*Decreases with the logarithm of the frequency.

4.4.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


4.4.3 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20°C
Test Engineer :	Jack Liu	Relative Humidity :	64%
Test Voltage :	125Vac / 60Hz	Phase :	Line
Function Type :	BT Linking + Switching On + Lighting		

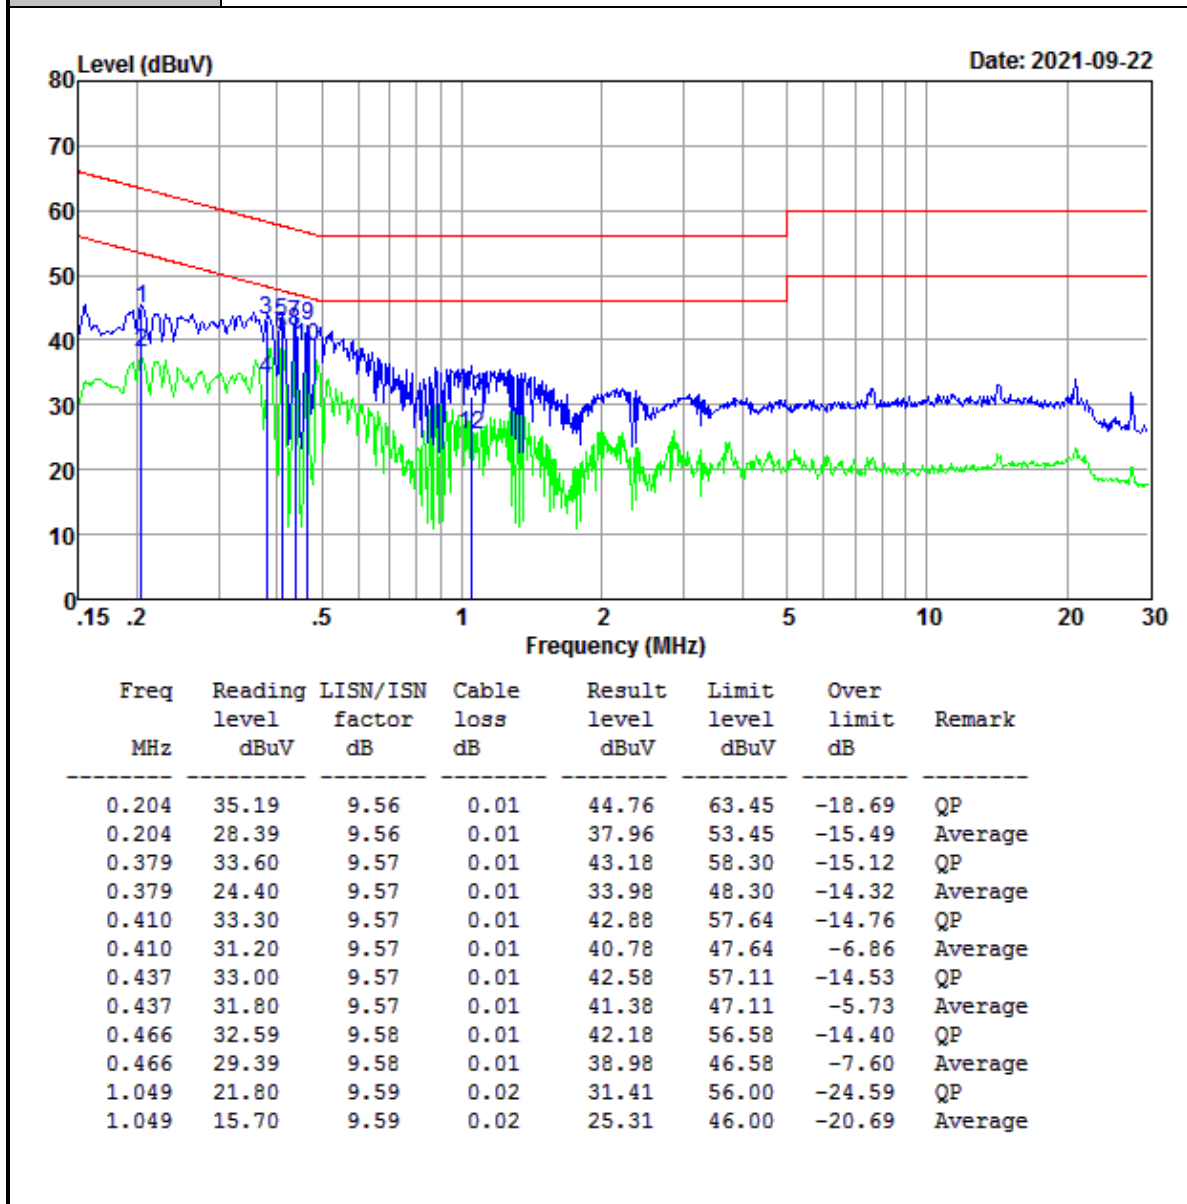

Result Level= Reading Level + LISN Factor + Cable Loss

Test Mode :	Mode 1	Temperature :	20°C
Test Engineer :	Jack Liu	Relative Humidity :	64%
Test Voltage :	125Vac / 60Hz	Phase :	Neutral
Function Type :	BT Linking + Switching On + Lighting		

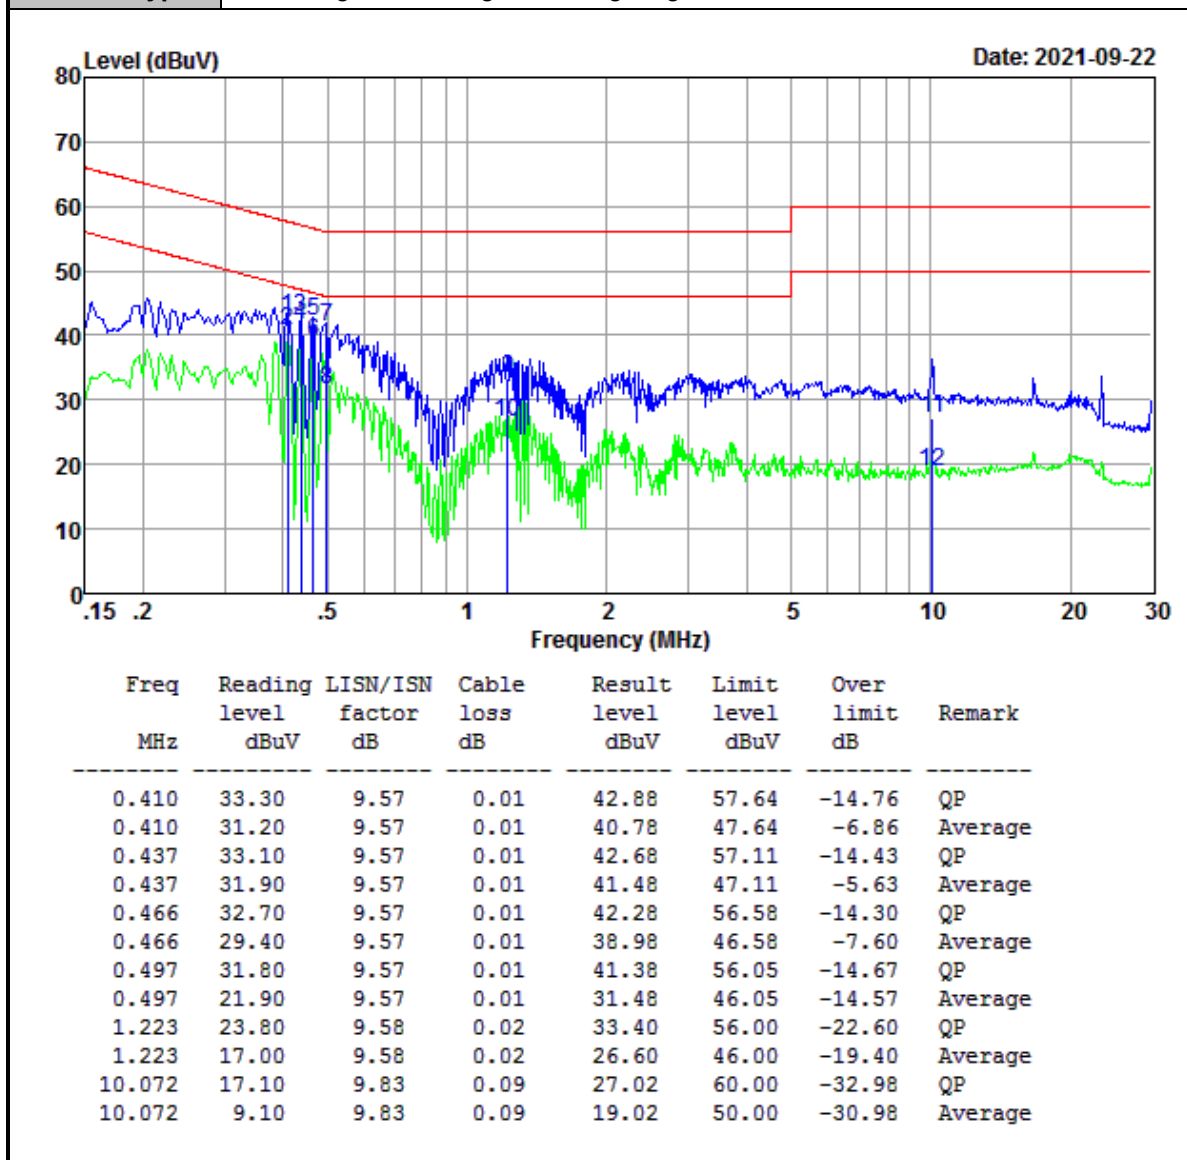

Result Level= Reading Level + LISN Factor + Cable Loss

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2021-01-05	2022-01-04	Conducted
Thermal Chamber	Howkin	UHL-34	19111801	2021-04-21	2022-04-20	Conducted
Base Station	R&S	CMW 270	101231	2021-01-05	2022-01-04	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2021-01-05	2022-01-04	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2021-01-05	2022-01-04	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2021-01-05	2022-01-04	Radiation
Amplifier	Sonoma	310	363917	2021-01-06	2022-01-05	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2021-01-06	2022-01-05	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2021-11-27	2024-11-26	Radiation
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	2020-02-14	2023-02-13	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2020-09-27	2023-09-26	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2020-02-14	2023-02-13	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2021-06-05	2024-06-04	Radiation
Test Software	Audix	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
LISN	R&S	ENV216	102125	2021-01-05	2022-01-04	Conducted
LISN	R&S	ENV432	101327	2021-01-06	2022-01-05	Conducted
EMI Test Receiver	R&S	ESR3	102143	2021-01-06	2022-01-05	Conducted
EMI Test Software	Audix	E3	N/A	N/A	N/A	Conducted

N/A: No Calibration Required

6 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	$\pm 196.4\text{Hz}$
RF output power, conducted	$\pm 2.31\text{dB}$
Power density, conducted	$\pm 2.31\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


Appendix G: Band edge measurements

Test Result


TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	2.42	-35.53	≤ -17.58	PASS
		High	2480	5.92	-47.07	≤ -14.08	PASS
		Low	Hop_2402	8.03	-47.71	≤ -11.98	PASS
		High	Hop_2480	8.61	-47.51	≤ -11.4	PASS
2DH5	Ant1	Low	2402	2.12	-35.78	≤ -17.88	PASS
		High	2480	6.00	-46.78	≤ -14	PASS
		Low	Hop_2402	6.91	-47.54	≤ -13.09	PASS
		High	Hop_2480	9.20	-47.18	≤ -10.8	PASS
3DH5	Ant1	Low	2402	2.17	-35	≤ -17.83	PASS
		High	2480	4.25	-46.74	≤ -15.75	PASS
		Low	Hop_2402	6.37	-47.21	≤ -13.64	PASS
		High	Hop_2480	8.54	-47.12	≤ -11.46	PASS

Test Graphs


DH5_Ant1_Low_2402

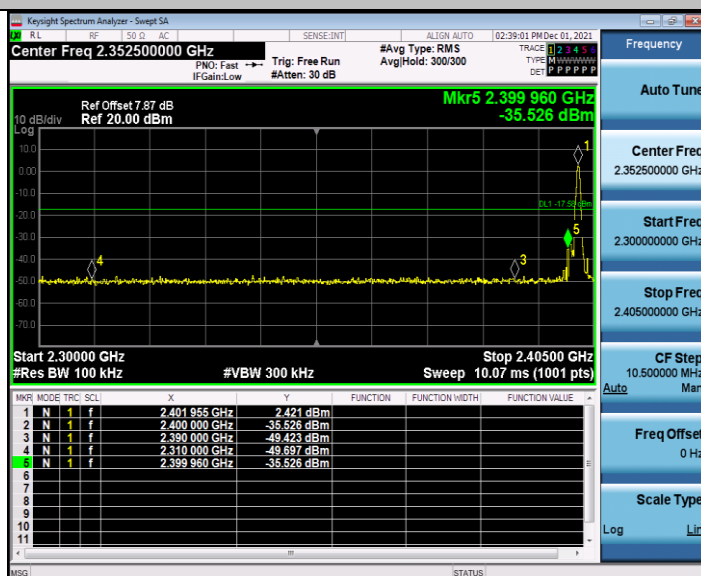


DH5_Ant1_High_2480

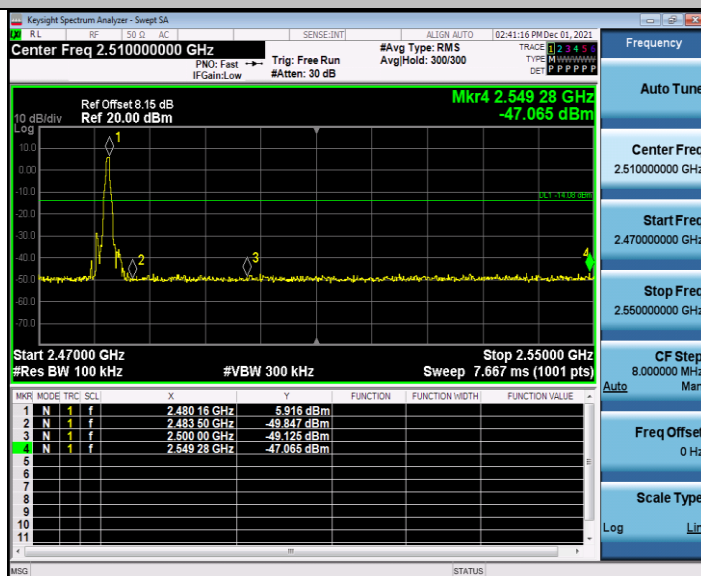


DH5_Ant1_Low_Hop_2402

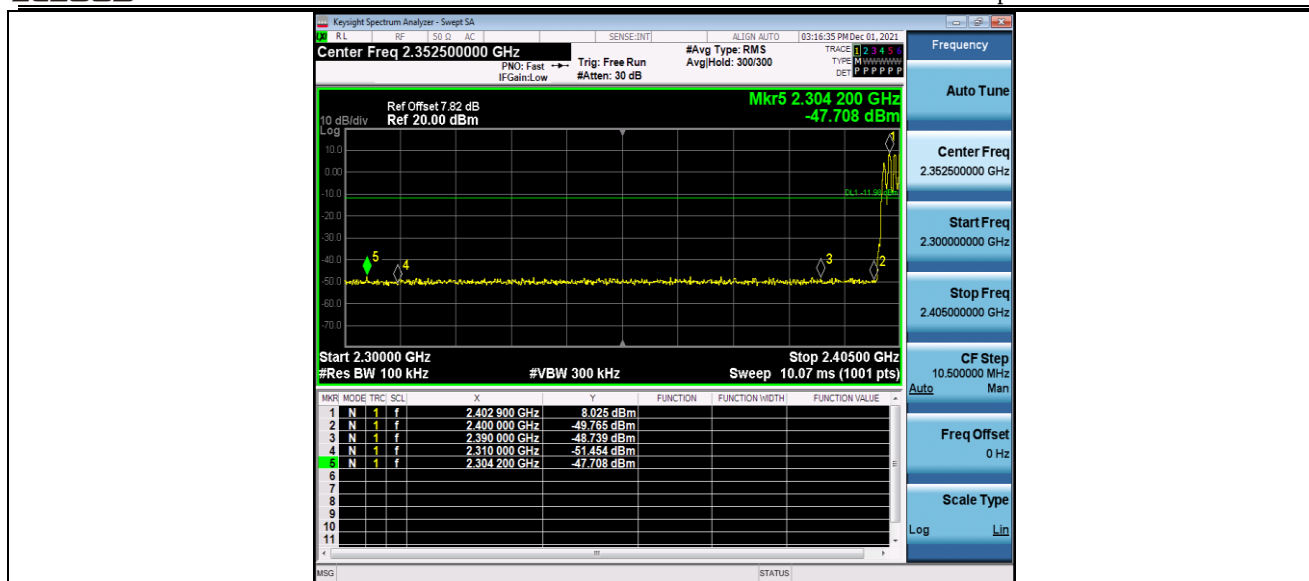


DH5_Ant1_High_Hop_2480

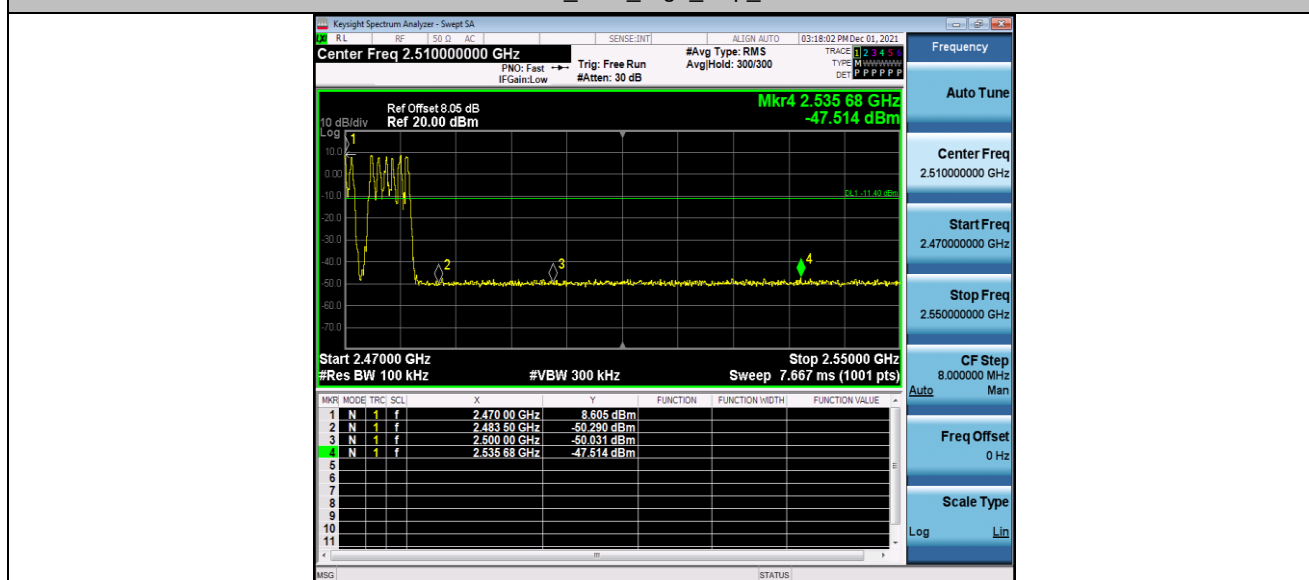


2DH5_Ant1_Low_2402

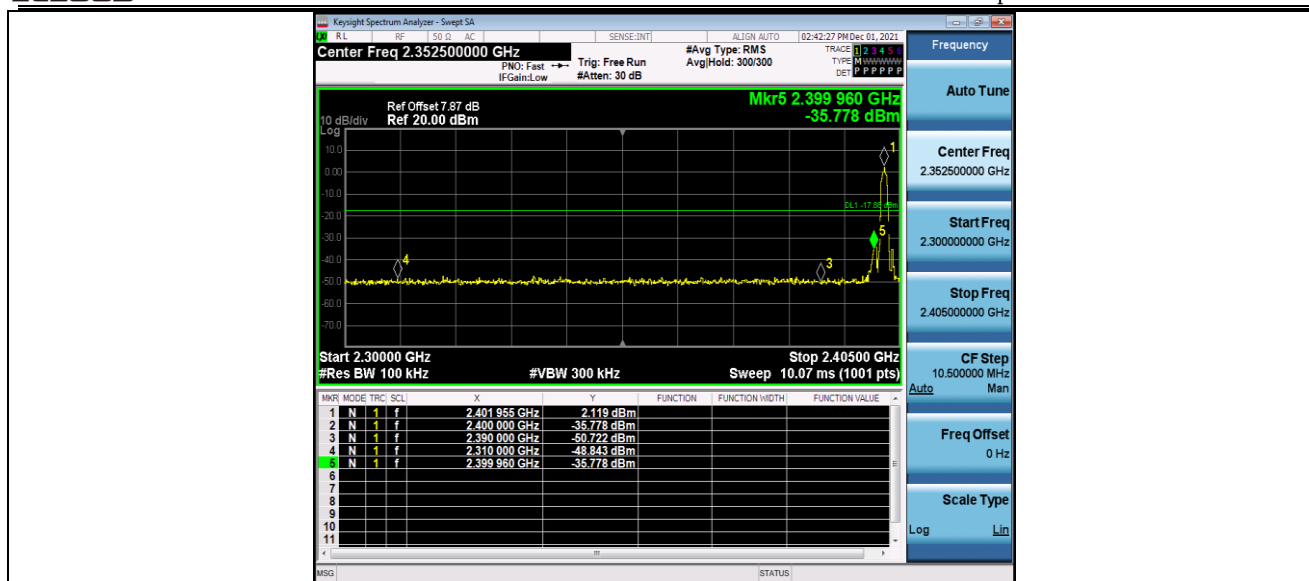


2DH5_Ant1_High_2480

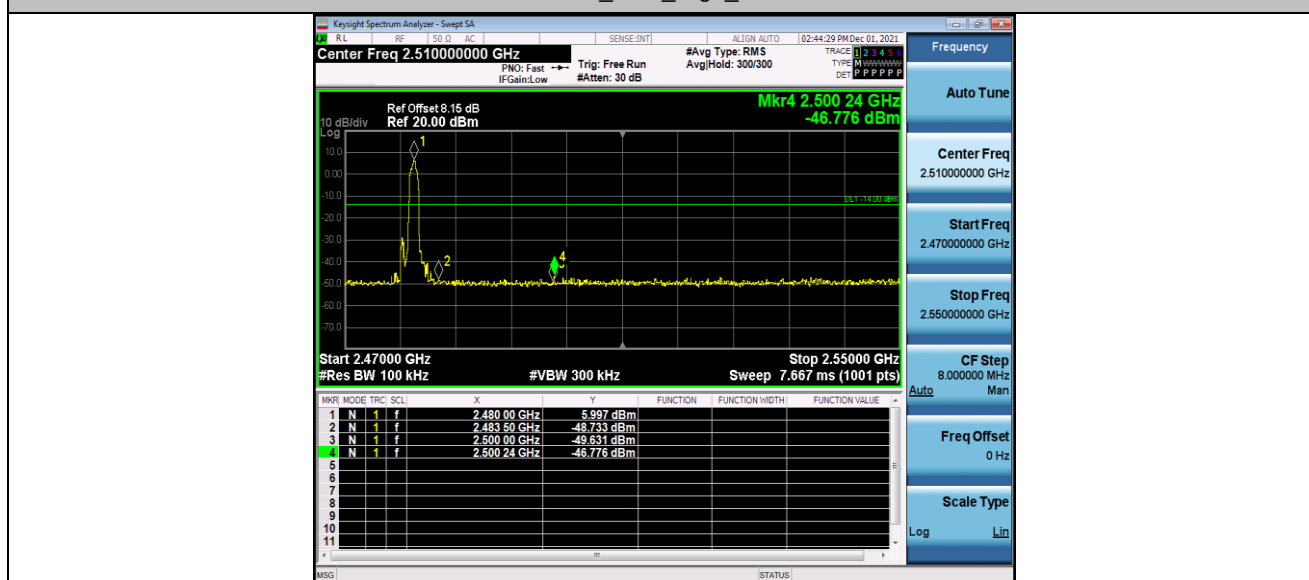


2DH5_Ant1_Low_Hop_2402

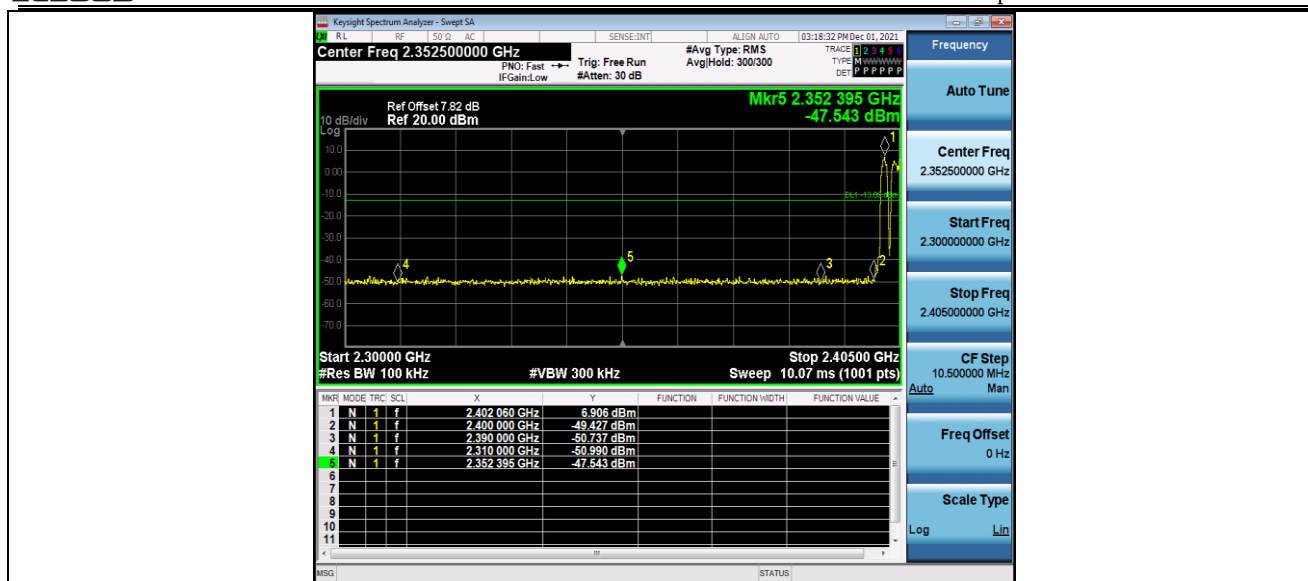


2DH5_Ant1_High_Hop_2480

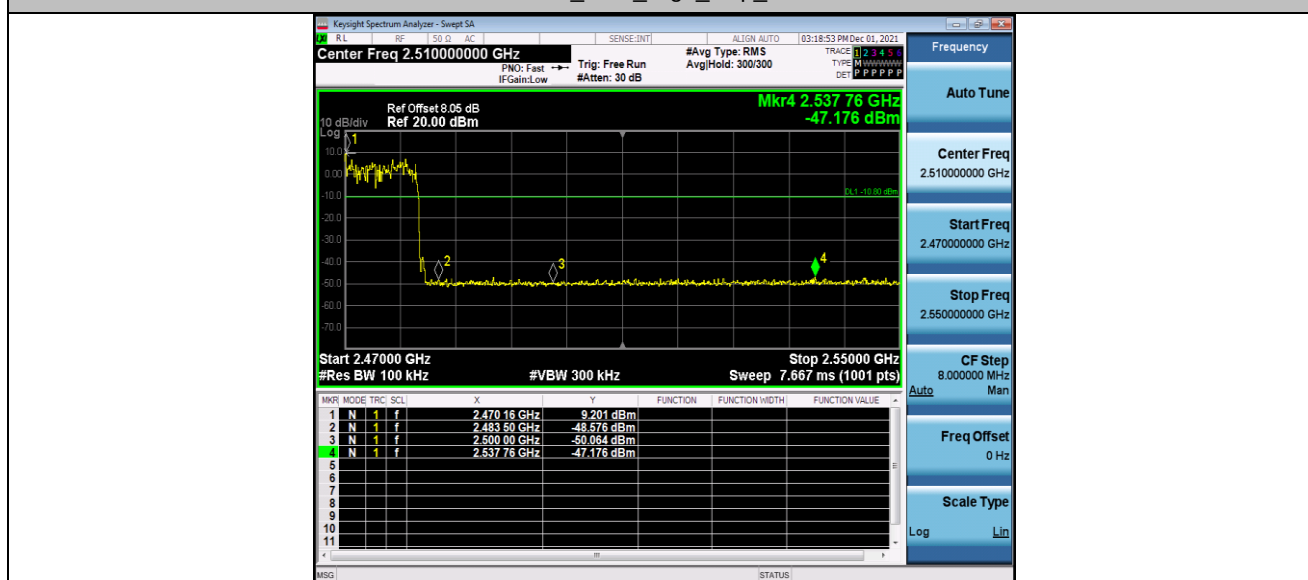


3DH5_Ant1_Low_2402

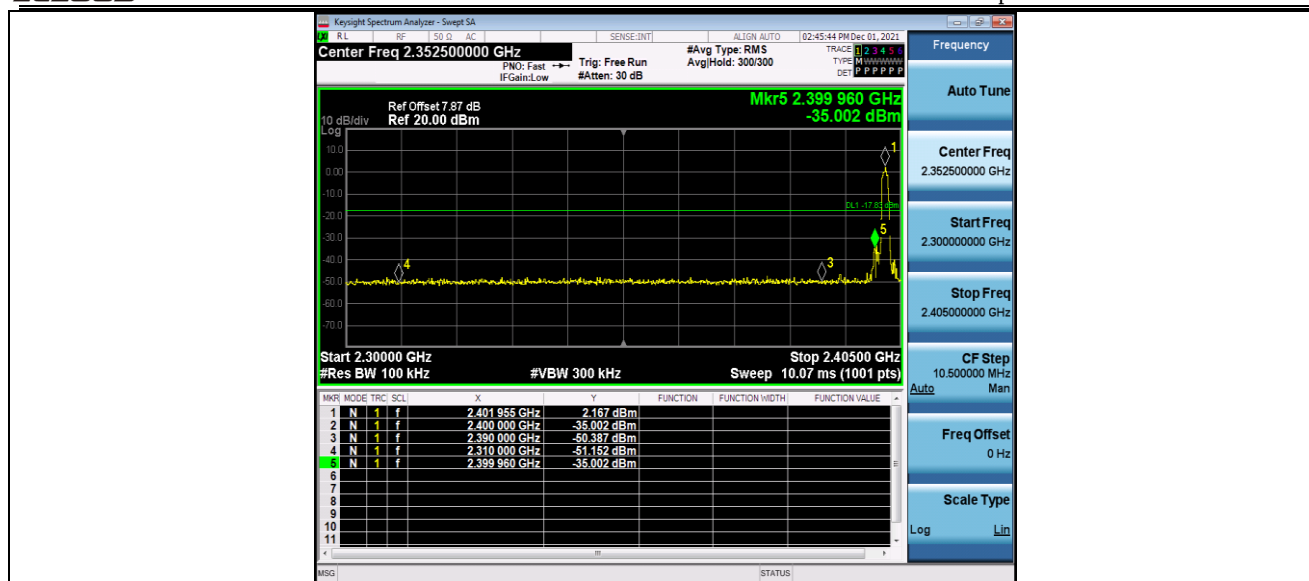


3DH5_Ant1_High_2480

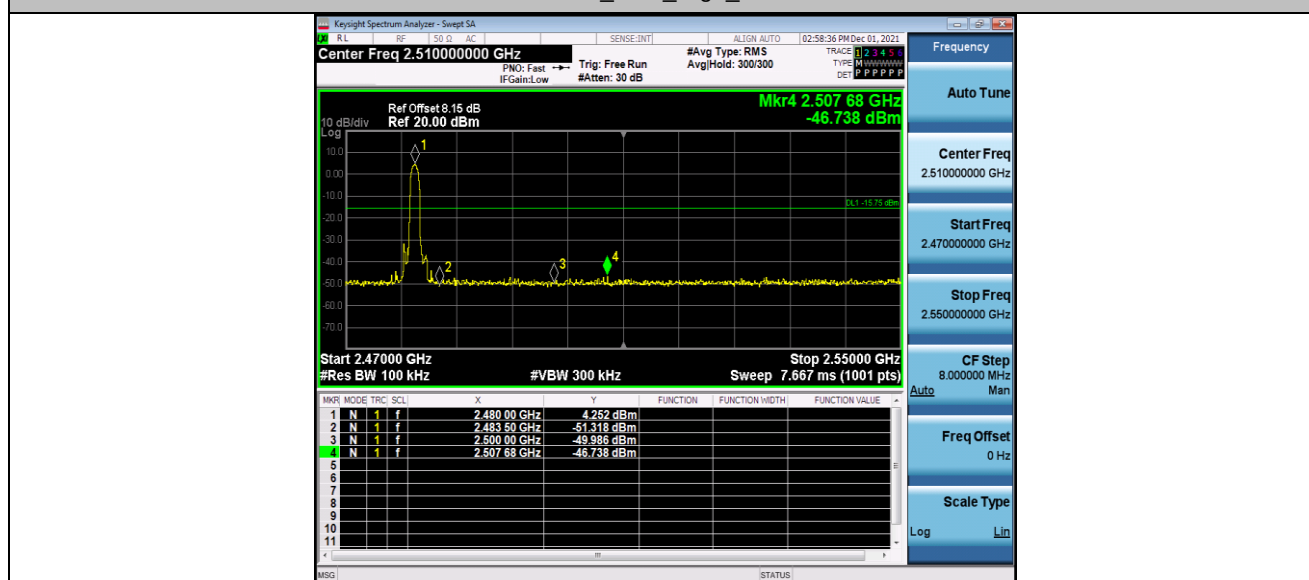

3DH5_Ant1_Low_Hop_2402

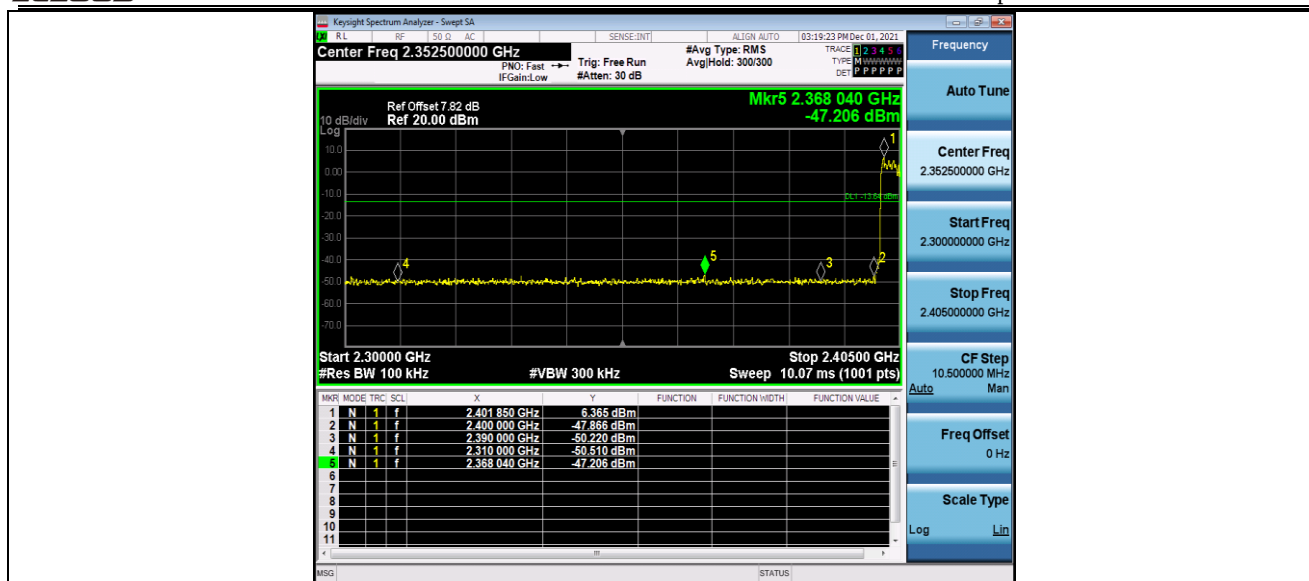

3DH5_Ant1_High_Hop_2480

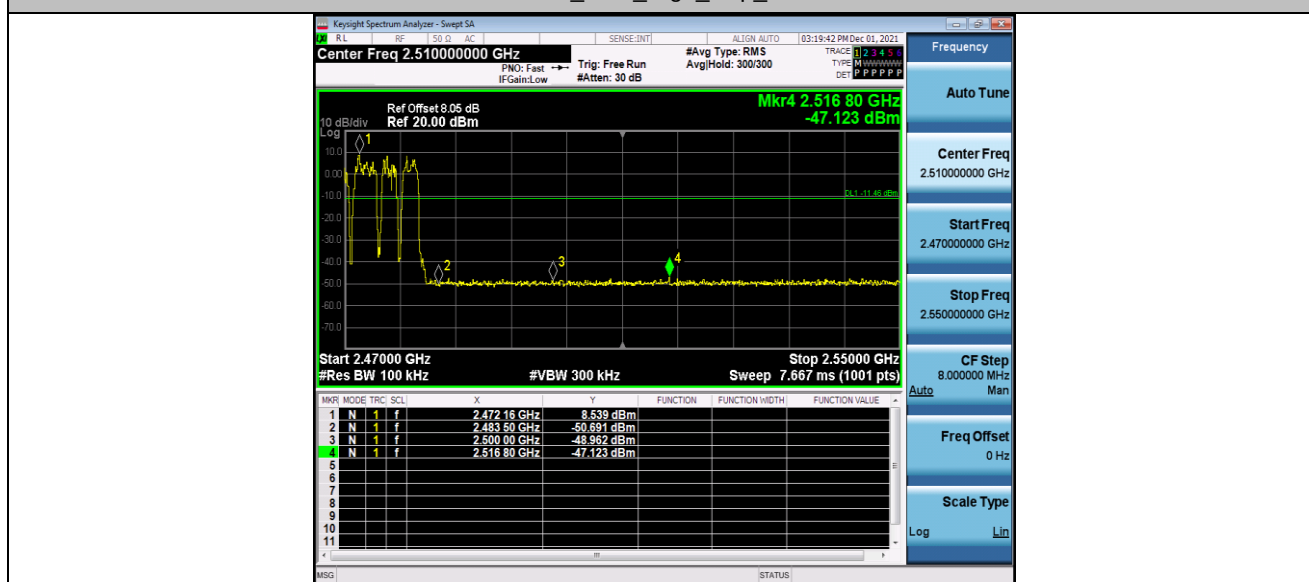


Appendix H: Conducted Spurious Emission

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	1.81	1.81	---	PASS
			30~1000	1.81	-58.66	≤-18.19	PASS
			1000~26500	1.81	-38.73	≤-18.19	PASS
		2441	Reference	1.41	1.41	---	PASS
			30~1000	1.41	-58.03	≤-18.59	PASS
			1000~26500	1.41	-38.47	≤-18.59	PASS
		2480	Reference	5.28	5.28	---	PASS
			30~1000	5.28	-54.01	≤-14.73	PASS
			1000~26500	5.28	-38.26	≤-14.73	PASS
2DH5	Ant1	2402	Reference	1.43	1.43	---	PASS
			30~1000	1.43	-58.27	≤-18.57	PASS
			1000~26500	1.43	-38.73	≤-18.57	PASS
		2441	Reference	2.41	2.41	---	PASS
			30~1000	2.41	-58.54	≤-17.59	PASS
			1000~26500	2.41	-38.63	≤-17.59	PASS
		2480	Reference	2.52	2.52	---	PASS
			30~1000	2.52	-56.96	≤-17.48	PASS
			1000~26500	2.52	-38.38	≤-17.48	PASS
3DH5	Ant1	2402	Reference	0.10	0.10	---	PASS
			30~1000	0.10	-58.92	≤-19.9	PASS
			1000~26500	0.10	-39.02	≤-19.9	PASS
		2441	Reference	0.13	0.13	---	PASS
			30~1000	0.13	-57.66	≤-19.87	PASS
			1000~26500	0.13	-38	≤-19.87	PASS
		2480	Reference	3.84	3.84	---	PASS
			30~1000	3.84	-55.98	≤-16.16	PASS
			1000~26500	3.84	-38.57	≤-16.16	PASS

Test Graphs


DH5_Ant1_2402_0~Reference

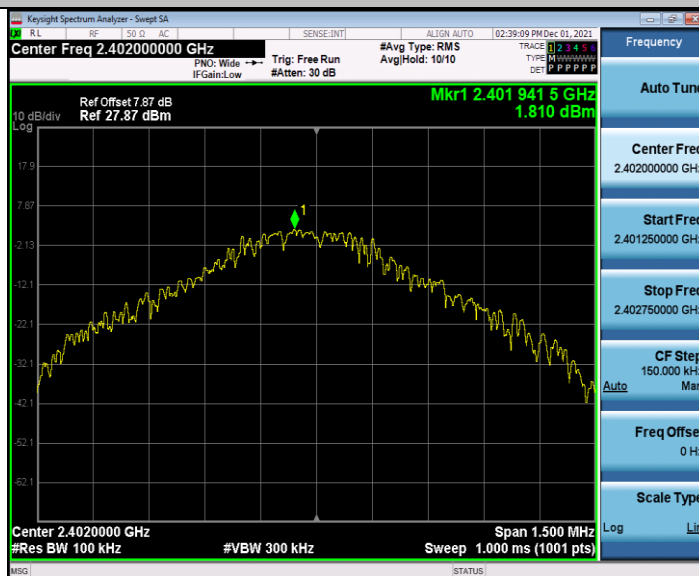


DH5_Ant1_2402_30~1000

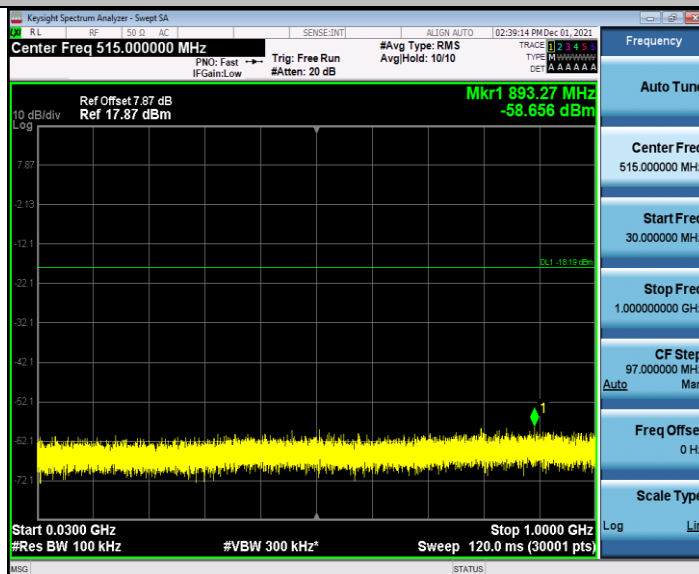


DH5_Ant1_2402_1000~26500

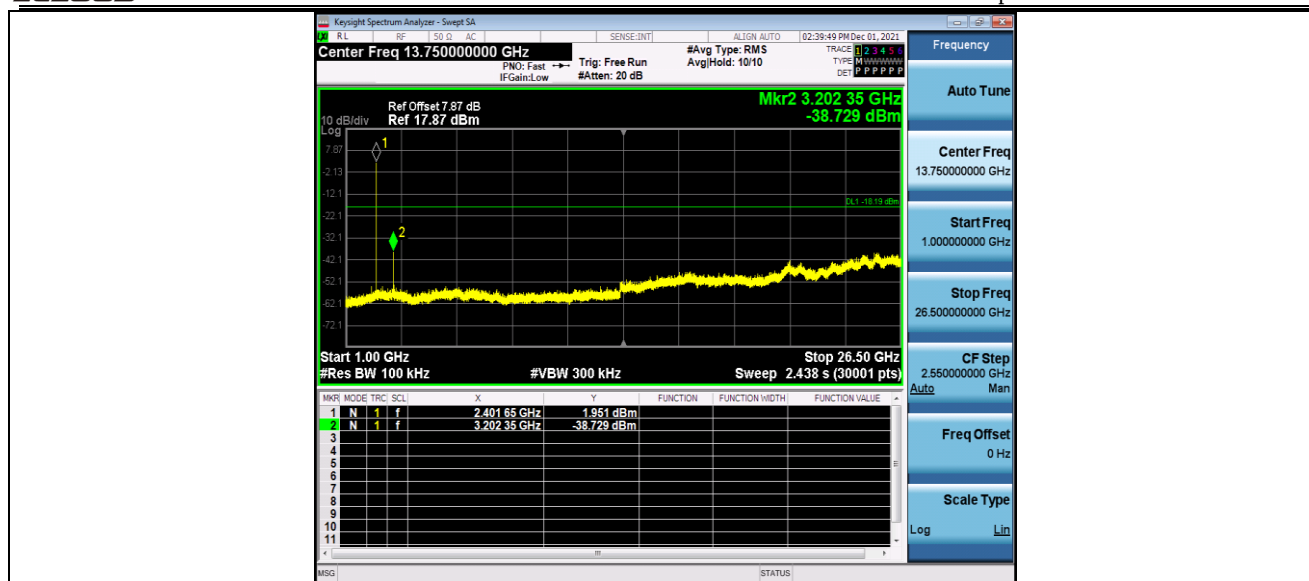

DH5_Ant1_2441_0~Reference

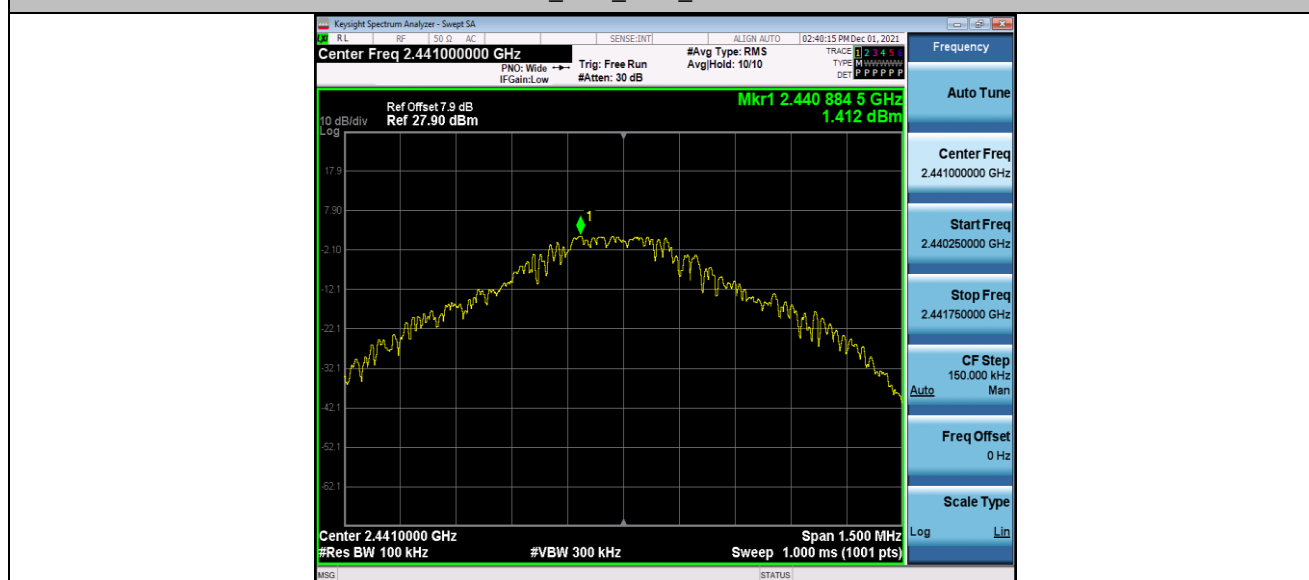

DH5_Ant1_2441_30~1000

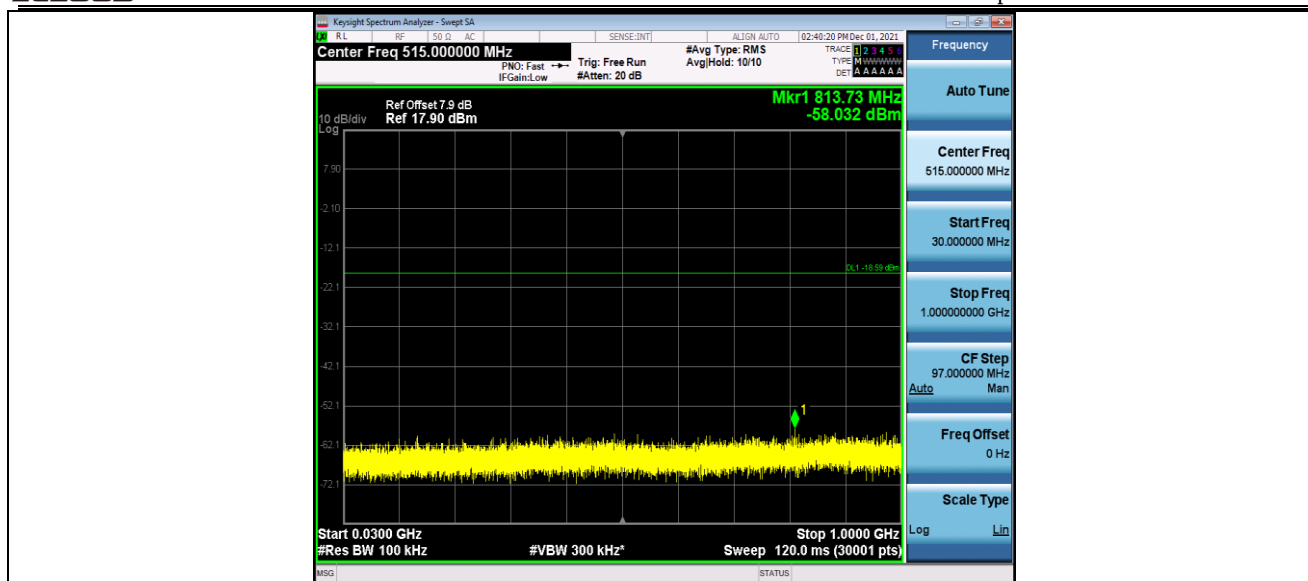


DH5_Ant1_2441_1000~26500




DH5_Ant1_2480_0~Reference




DH5_Ant1_2480_30~1000

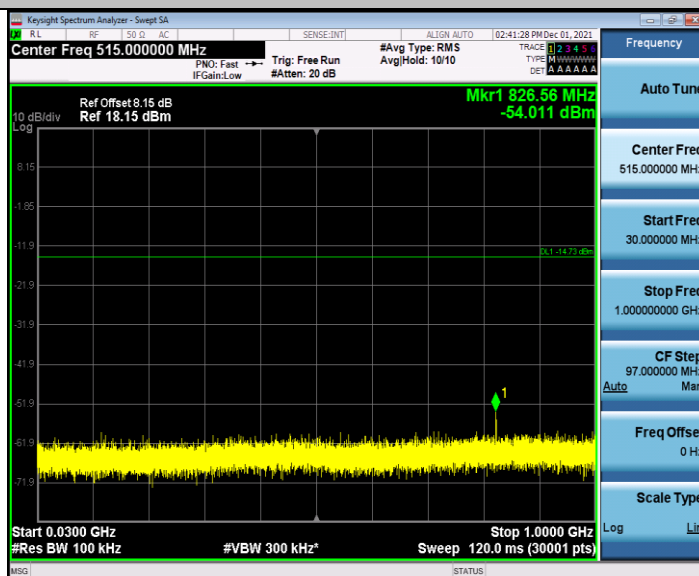


DH5_Ant1_2480_1000~26500

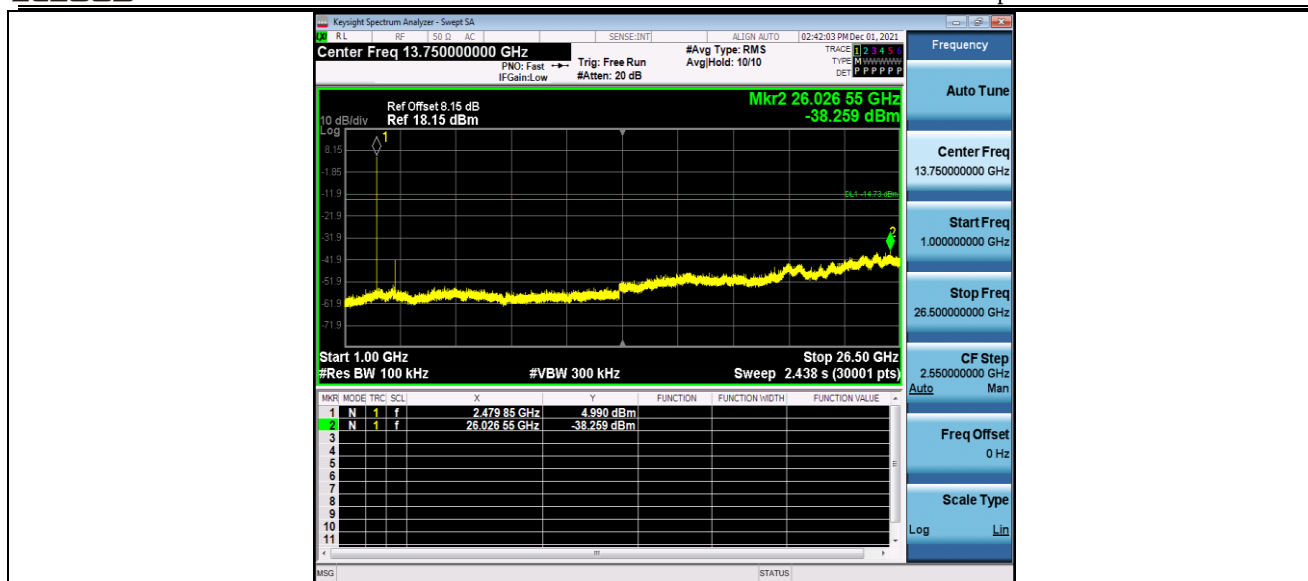

2DH5_Ant1_2402_0-Reference

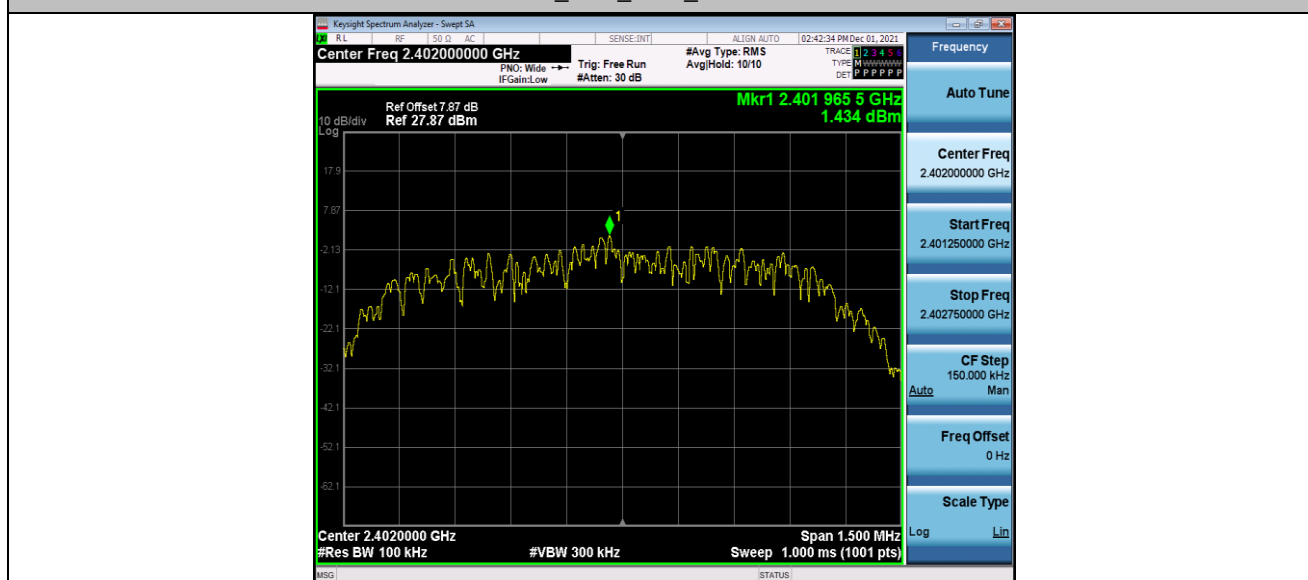

2DH5_Ant1_2402_30~1000

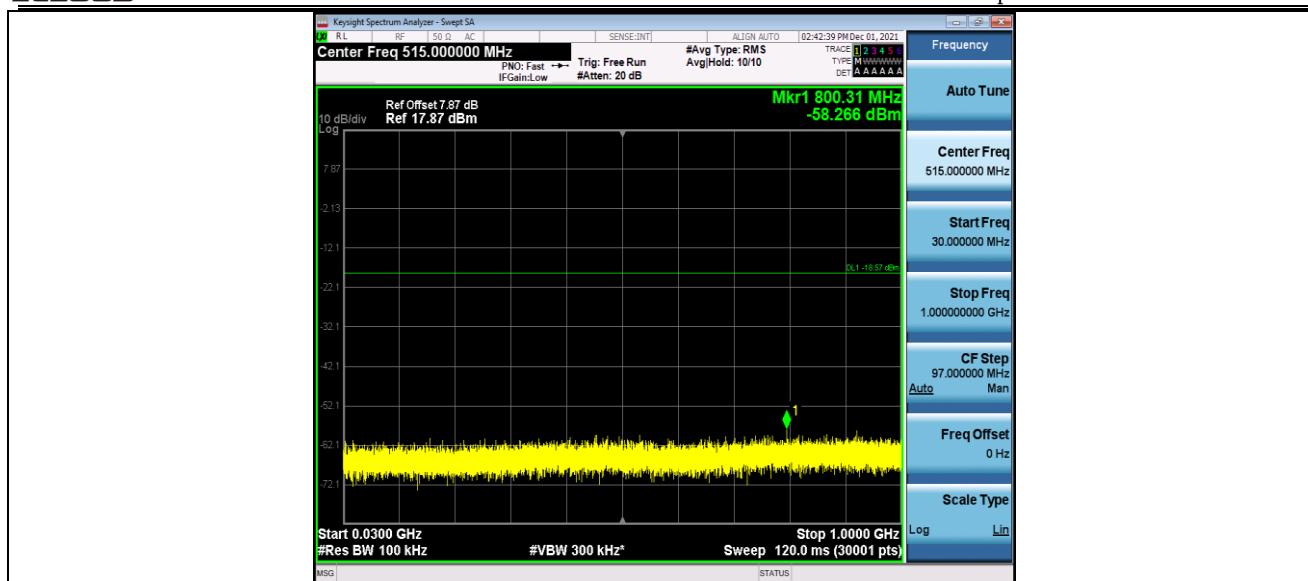


2DH5_Ant1_2402_1000~26500




2DH5_Ant1_2441_0~Reference




2DH5_Ant1_2441_30~1000

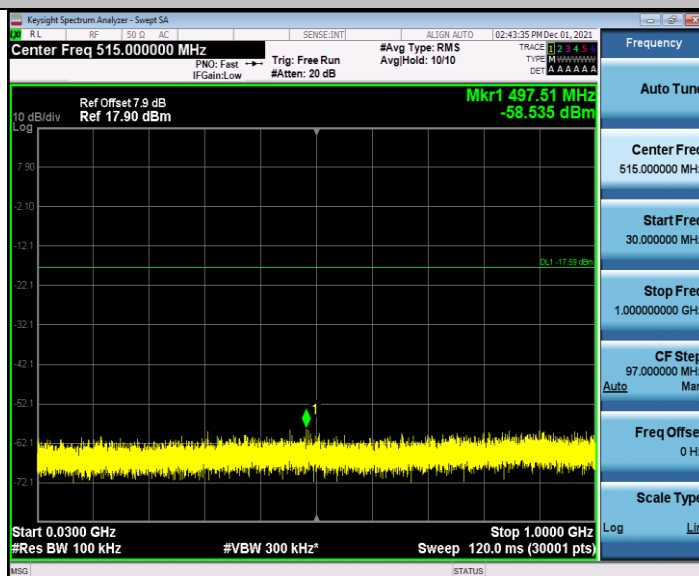


2DH5_Ant1_2441_1000~26500

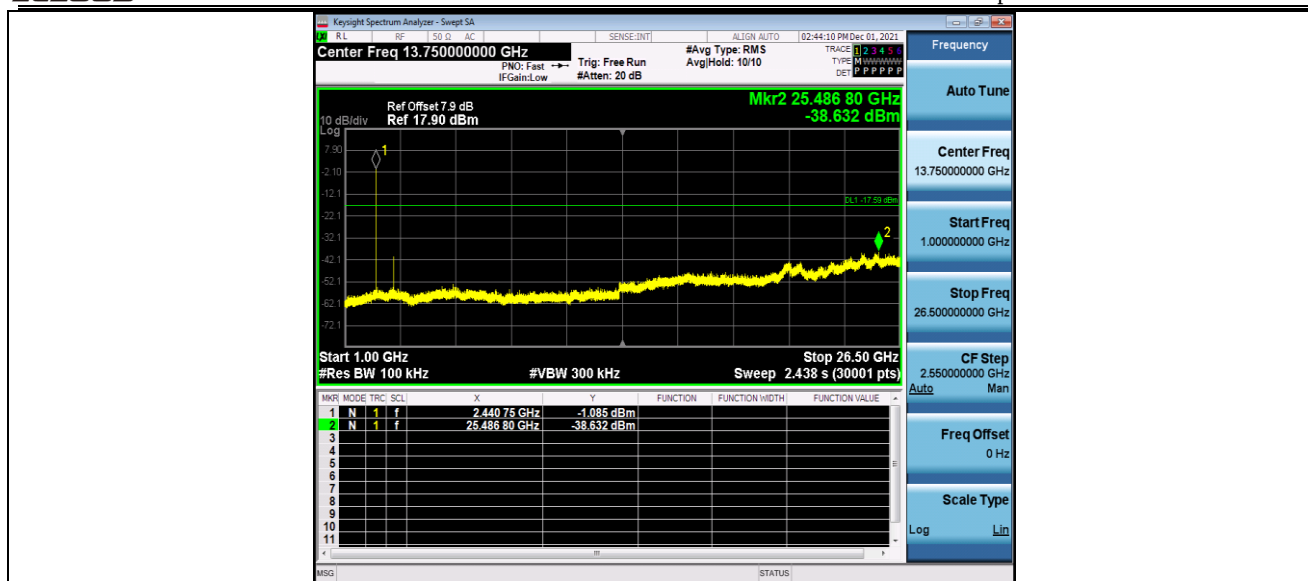


2DH5_Ant1_2480_0-Reference

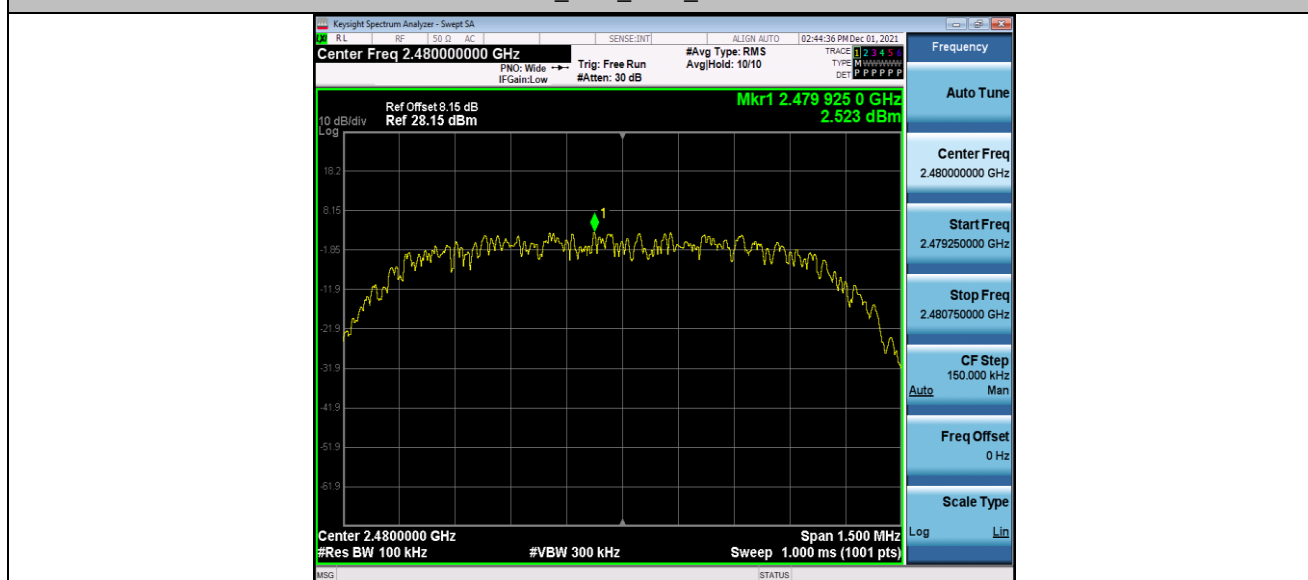


2DH5_Ant1_2480_30~1000

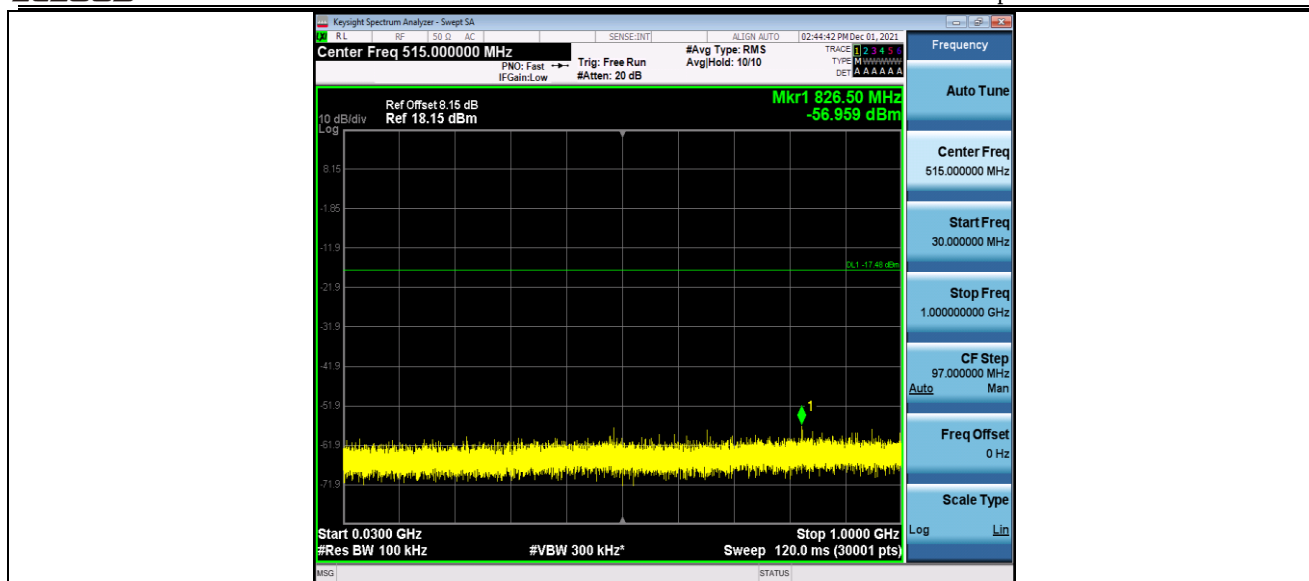


2DH5_Ant1_2480_1000~26500

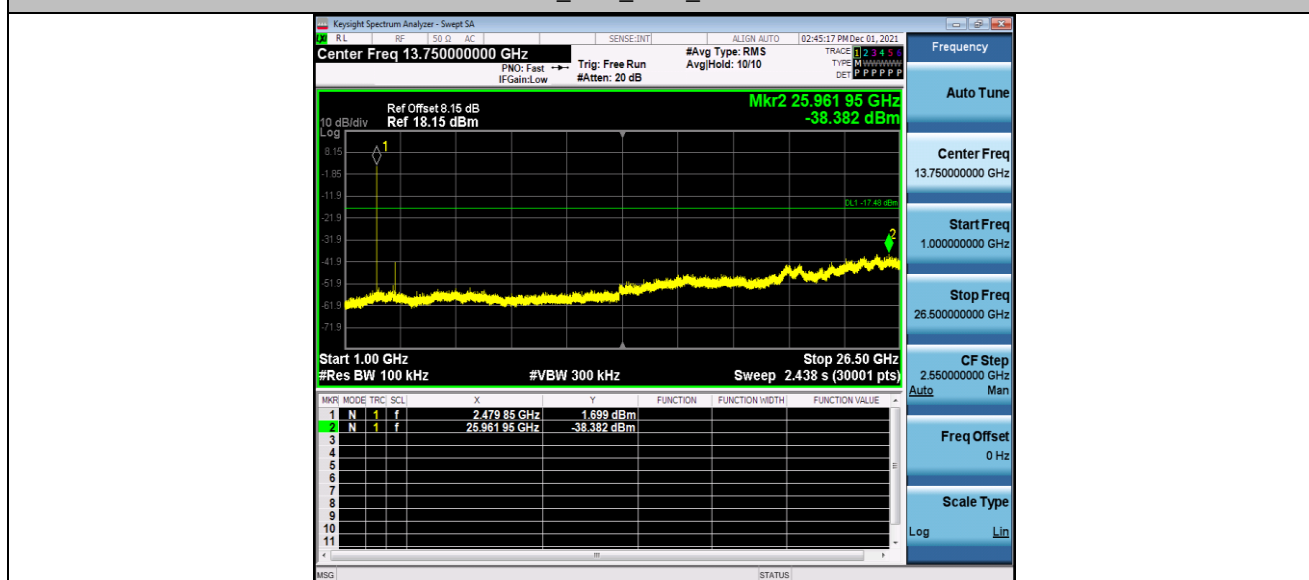


3DH5_Ant1_2402_0~Reference

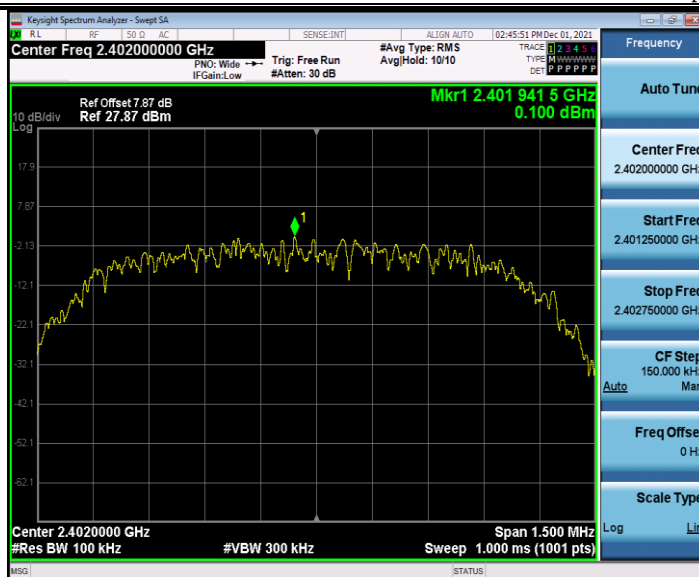


3DH5_Ant1_2402_30~1000

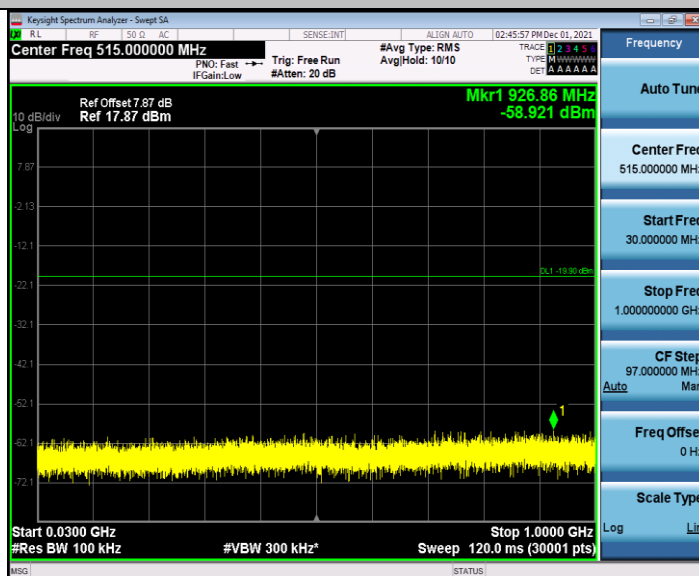

3DH5_Ant1_2402_1000~26500

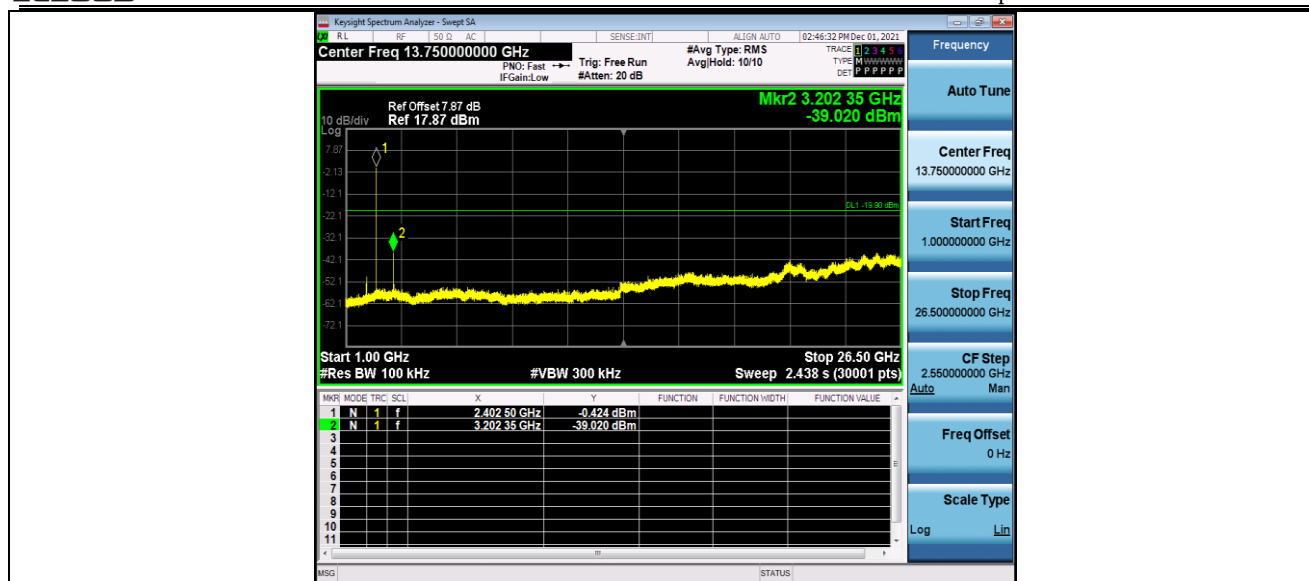

3DH5_Ant1_2441_0~Reference

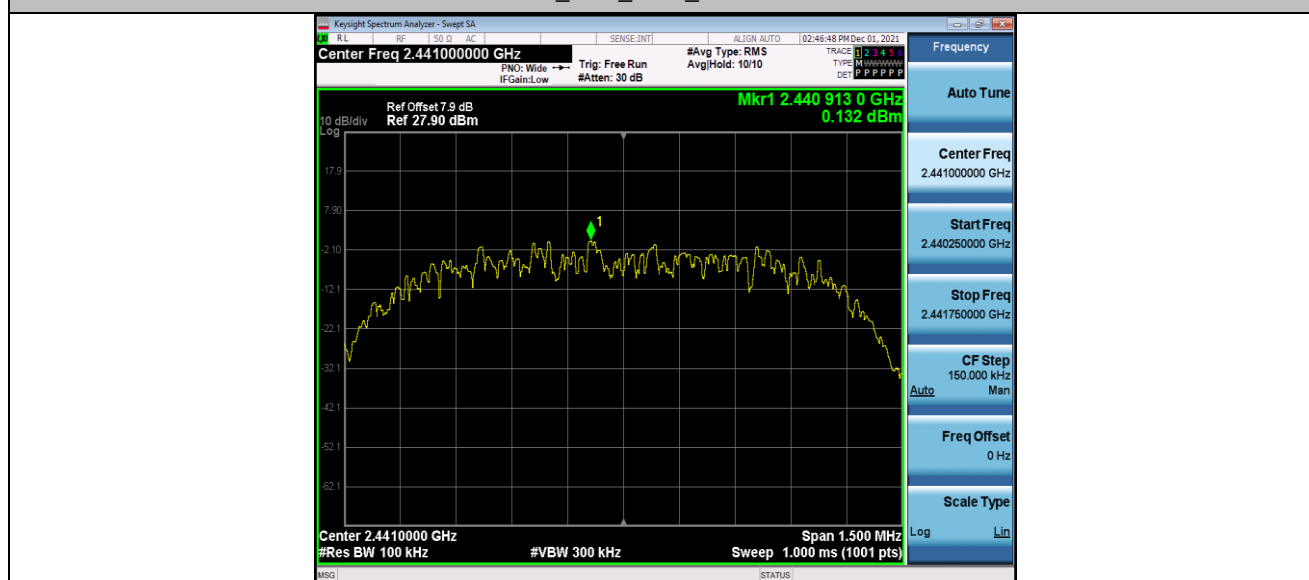


3DH5_Ant1_2441_30~1000




3DH5_Ant1_2441_1000-26500




3DH5_Ant1_2480_0-Reference

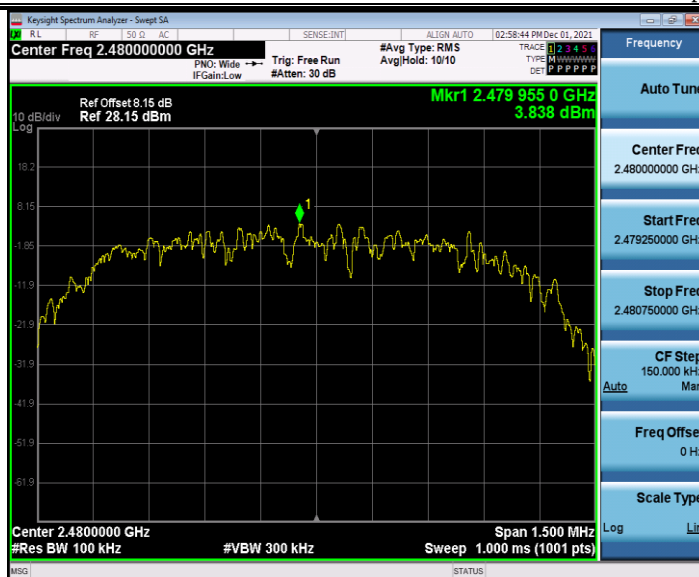

3DH5_Ant1_2480_30~1000

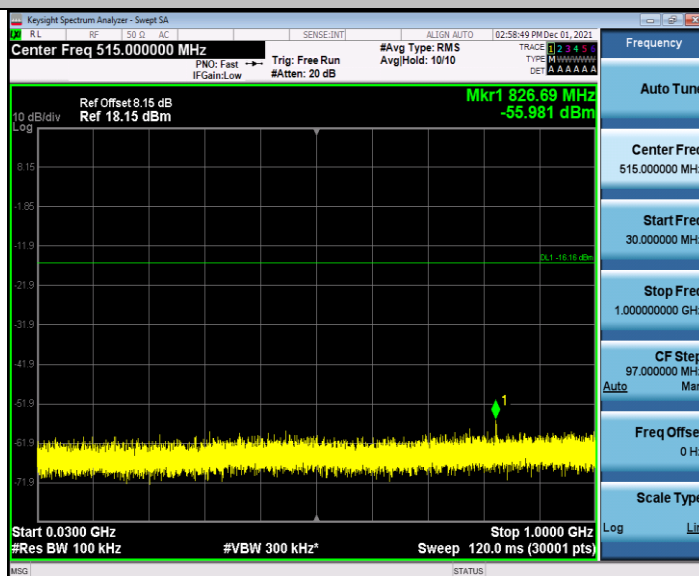

3DH5_Ant1_2480_1000~26500

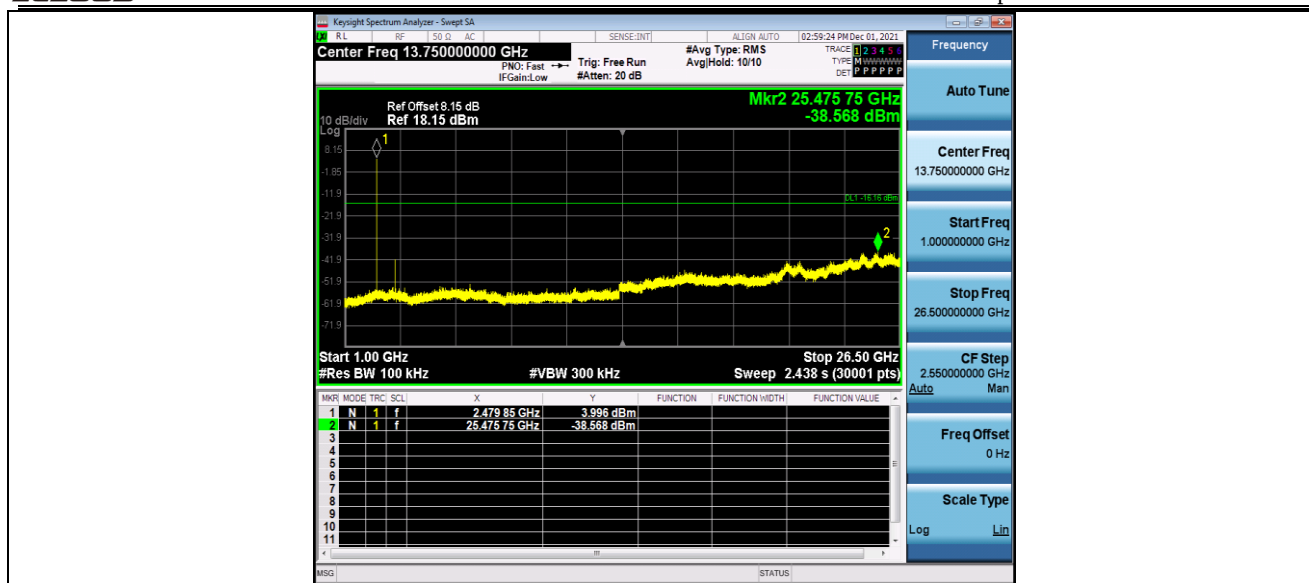

Appendix I. Setup Photographs



Fig. 1 Radiated emission setup photo(30MHz-1GHz)

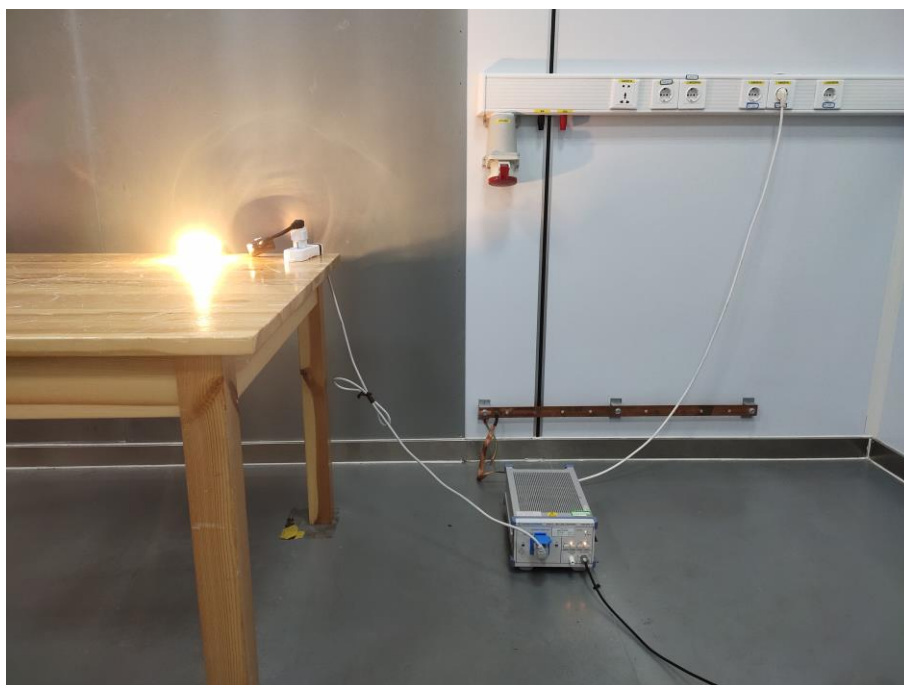


Fig. 2 Power line conducted emission setup photo

-----End of the report-----