

# Test Report

**Applicant** : Globe Electric Company Inc.  
**Address** : 150 Oneida, Montreal, Quebec, Canada, H9R 1A8  
**Product Name** : Smart power strip  
**Brand Mark** : GLOBE  
**Model** : 50334\*  
**Series model** : N/A  
**FCC ID** : 2AQUQGE50334A  
**Report Number** : BLA-EMC-202507-A0101  
**Date of Receipt** : Jul. 01, 2025  
**Date of Test** : Jul. 01, 2025 to Jul. 11, 2025  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Compiled by: *Mark Chen* Review by: *Xavier*



**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**

Address: Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,  
Shenzhen, Guangdong Province, China

*The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.*



## Table of Contents

<b>1 General information .....</b>	<b>5</b>
1.1 General information .....	5
1.2 General description of EUT .....	5
<b>2 Test summary .....</b>	<b>6</b>
<b>3 Test Configuration .....</b>	<b>7</b>
3.1 Test mode .....	7
3.2 Operation Frequency each of channel .....	7
3.3 Test channel .....	8
3.4 Auxiliary equipment .....	8
3.5 Test environment .....	8
<b>4 Laboratory information .....</b>	<b>9</b>
4.1 Laboratory and accreditations .....	9
4.2 Measurement uncertainty .....	9
<b>5 Test equipment .....</b>	<b>10</b>
<b>6 Test result .....</b>	<b>13</b>
6.1 Antenna requirement .....	13
6.2 Conducted emissions at AC power line (150 kHz-30 MHz) .....	14
6.3 Conducted peak output Power .....	18
6.4 Minimum 6dB bandwidth .....	20
6.5 Power spectrum density .....	21
6.6 Conducted Band Edges Measurement .....	22
6.7 Conducted spurious emissions .....	23
6.8 Radiated spurious emissions .....	24
6.9 Radiated emissions which fall in the restricted bands .....	35
<b>7 Appendix A .....</b>	<b>54</b>
7.1 Maximum Conducted Output Power .....	54
7.2 -6dB Bandwidth .....	55
7.3 Occupied Channel Bandwidth .....	62
7.4 Maximum Power Spectral Density Level .....	69
7.5 Band Edge .....	76

**BlueAsia** *of Technical Services (Shenzhen) Co.,Ltd.*

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

7.6 Conducted RF Spurious Emission .....	85
<b>Appendix B: photographs of test setup .....</b>	<b>98</b>
<b>Appendix C: photographs of EUT .....</b>	<b>100</b>

blueAsia

## Revise Record

Version No.	Date	Description
01	Jul. 14, 2025	Original

BlueAsia

## 1 General information

### 1.1 General information

Applicant	Globe Electric Company Inc.
Address	150 Oneida, Montreal, Quebec, Canada, H9R 1A8
Manufacturer	Globe Electric Company Inc.
Address	150 Oneida, Montreal, Quebec, Canada, H9R 1A8
Factory	Globe Electric Company Inc.
Address	150 Oneida, Montreal, Quebec, Canada, H9R 1A8

### 1.2 General description of EUT

Product Name	Smart power strip
Model No.	50334*
Operation Frequency	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type	802.11b: DSSS(CCK/QPSK/BPSK) 802.11g: OFDM(BPSK/QPSK/16QAM/64QAM) 802.11n (HT20 and HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing	5MHz
Number of Channels	802.11b/g/n(HT20):11 802.11n(HT40):7
Antenna Type	PCB antenna
Antenna Gain	-0.74dBi (Provided by customer)
Power supply	AC 120V
Hardware Version	N/A
Software Version	N/A

*Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.*

## 2 Test summary

No.	Test item	FCC standard	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2013 Clause 6.2	Pass
3	Conducted Peak Output Power	§15.247 (b)(3)	ANSI C63.10-2013, Clause 11.9.1.3	Pass
4	Minimum 6dB Bandwidth	§15.247 (a)(2)	ANSI C63.10-2013, Clause 11.8.1	Pass
5	Power Spectrum Density	§15.247 (e)	ANSI C63.10-2013, Clause 11.10.2	Pass
6	Conducted Band Edges Measurement	§15.247(d)	ANSI C63.10-2013, Clause 11.13.3.2	Pass
7	Conducted Spurious Emissions	§15.247(d)	ANSI C63.10-2013, Clause 11.11	Pass
8	Radiated Spurious Emissions	§15.247 (d) §15.209	ANSI C63.10-2013 Clause 6.4&6.5&6.6	Pass
9	Radiated Emissions which fall in the restricted bands	§15.247 (d) §15.205	ANSI C63.10-2013 Clause 6.10.5	Pass

### 3 Test Configuration

#### 3.1 Test mode

Test Mode <sup>Note 1</sup>	Description
TX	Keep the EUT in continuously transmitting mode with modulation. (Duty cycle>98%)
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

*Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use; the EUT was operated in the engineering mode <sup>Note 2</sup> to fix the TX or Rx frequency that was for the purpose of the measurements.*

*Note 2: Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.*

Power level setup in software				
Test Software Name		EspRFTTestTool		
Mode		Channel	Frequency (MHz)	Soft Set
802.11b/g/n(HT20)/n(HT40)	1	2412		TX level : Default
	6	2437		
	11	2462		
	3	2422		
	9	2452		

#### 3.2 Operation Frequency each of channel

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz	--	--
2	2417MHz	6	2437MHz	10	2457MHz	--	--
3	2422MHz	7	2442MHz	11	2462MHz	--	--
4	2427MHz	8	2447MHz	--	--	--	--

Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz	--	--	--	--
4	2427MHz	8	2447MHz	--	--	--	--
5	2432MHz	9	2452MHz	--	--	--	--
6	2437MHz	--	--	--	--	--	--

### 3.3 Test channel

For 802.11b/g/n (HT20), the lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz); 802.11n HT40, the lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

### 3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	Lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)
<b>Note:</b>				
"--" mean no any auxiliary device during testing.				

### 3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	AC 120V

## 4 Laboratory information

### 4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

### 4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %

## 5 Test equipment

### Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

### Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2024/08/08	2025/08/07
BLA-EMC-012	Broadband antenna	VULB9168	Schwarzbeck	00836 P:00227	2022/10/12	2025/10/11
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA201804 3003	2024/08/08	2025/08/07
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2025/06/09	2026/06/08
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2025/06/09	2026/06/08
BLA-EMC-066	Amplifier	LNPA_30M01 G-30	SKET	SK202106 0801	2025/06/09	2026/06/08
BLA-EMC-086	Amplifier	LNPA_18G40 G-50dB	SKET	SK202207 1301	2025/06/09	2026/06/08
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

**Conducted Emissions**

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-001	Shield room	8*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-011	LISN	ENV216	R&S	101372	2024/08/08	2025/08/07
BLA-EMC-033	Impedance transformer	DC-2GHz	DFXP	N/A	2025/06/09	2026/06/08
BLA-EMC-041	LISN	AT166-2	ATTEN	AKK1806000003	2024/08/08	2025/08/07
BLA-EMC-045	Impedance stable network	ISNT8-cat6	TESEQ	53580	2024/08/08	2025/08/07
BLA-EMC-095	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01045	2025/06/09	2026/06/08
BLA-EMC-096	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01075	2025/06/09	2026/06/08
BLA-XC-05	Coaxial Cable	N/A	BlueAsia	V05	N/A	N/A

**RF conducted**

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2025/06/09	2026/06/08
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2024/08/08	2025/08/07
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889SN042	2024/08/08	2025/08/07
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2024/08/08	2025/08/07
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2025/06/09	2026/06/08
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2024/08/08	2025/08/07
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS141094	2025/06/09	2026/06/08

**Test software**

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE(Below 1GHz)
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE(Above 1GHz)
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

## 6 Test result

### 6.1 Antenna requirement


Test Standard	47 CFR Part 15, Subpart C 15.203
Test Method	N/A

#### 6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### EUT antenna:

The antenna is PCB antenna. The best case gain of the antenna is -0.74dBi.

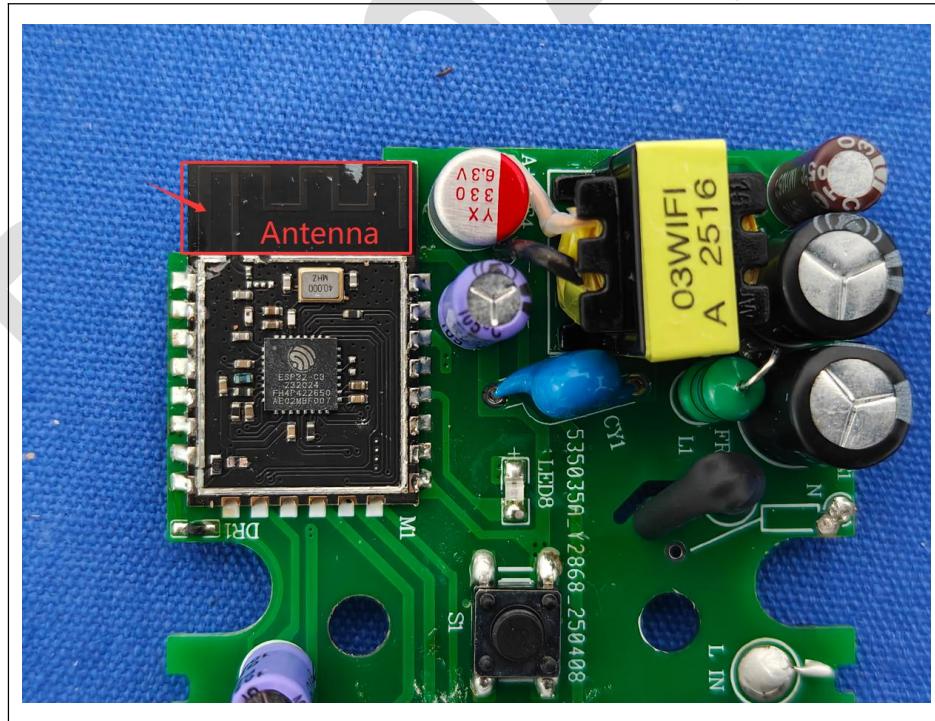

## 6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.207
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 6.2.2 Test setup

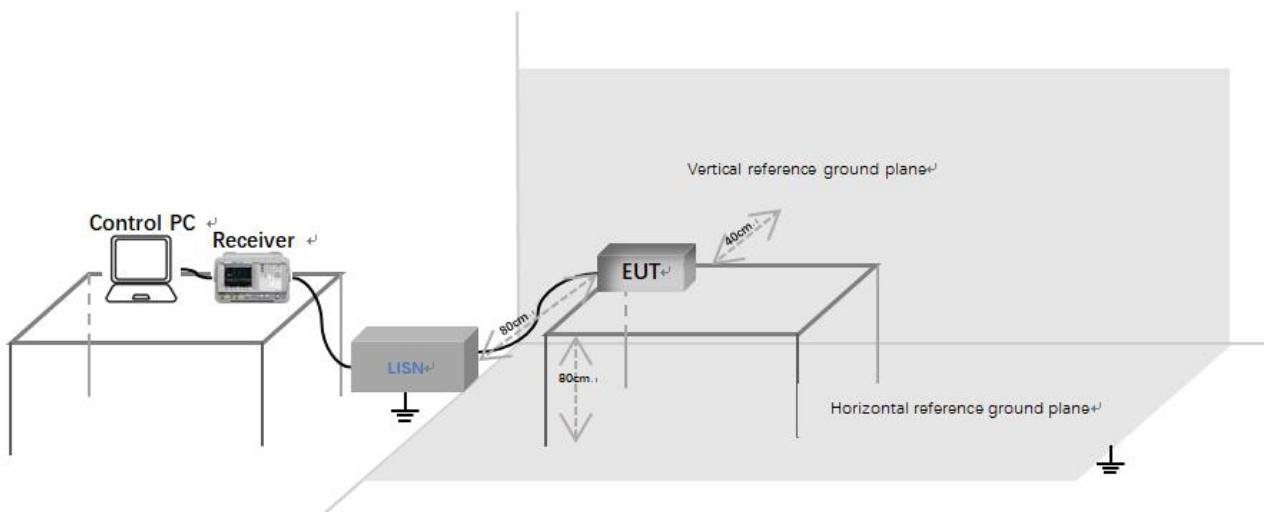

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2


### 6.2.3 Procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor

### 6.2.4 Test data

[Test mode: TX]; [Line: Line];[Power:AC120V/60Hz]

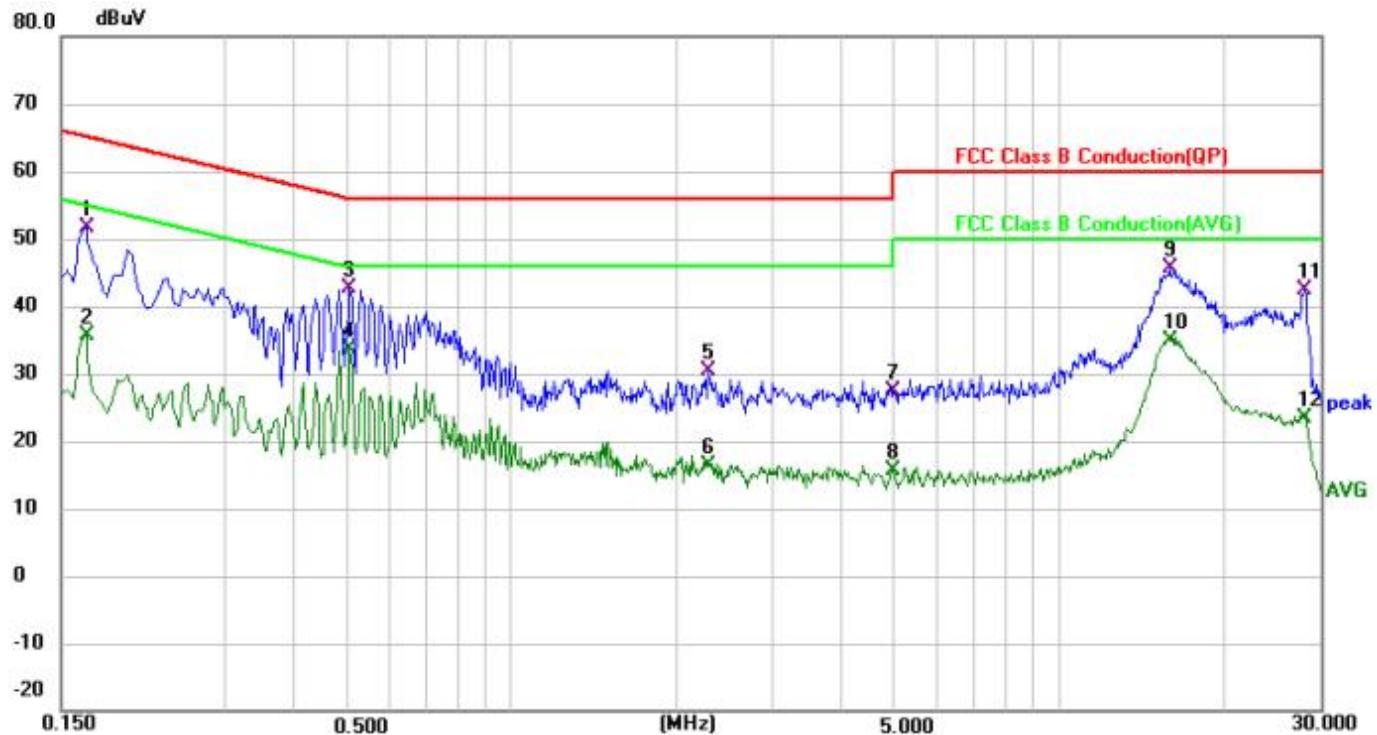

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1660	41.37	10.18	51.55	65.16	-13.61	QP
2		0.1660	25.37	10.18	35.55	55.16	-19.61	AVG
3		0.5060	32.88	9.79	42.67	56.00	-13.33	QP
4	*	0.5060	23.80	9.79	33.59	46.00	-12.41	AVG
5		2.2940	20.48	9.80	30.28	56.00	-25.72	QP
6		2.2940	6.61	9.80	16.41	46.00	-29.59	AVG
7		4.9940	17.74	9.72	27.46	56.00	-28.54	QP
8		4.9940	5.91	9.72	15.63	46.00	-30.37	AVG
9		15.9260	35.59	10.00	45.59	60.00	-14.41	QP
10		15.9260	24.85	10.00	34.85	50.00	-15.15	AVG
11		28.1300	32.27	10.13	42.40	60.00	-17.60	QP
12		28.1300	13.15	10.13	23.28	50.00	-26.72	AVG


**Test Result: Pass**

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

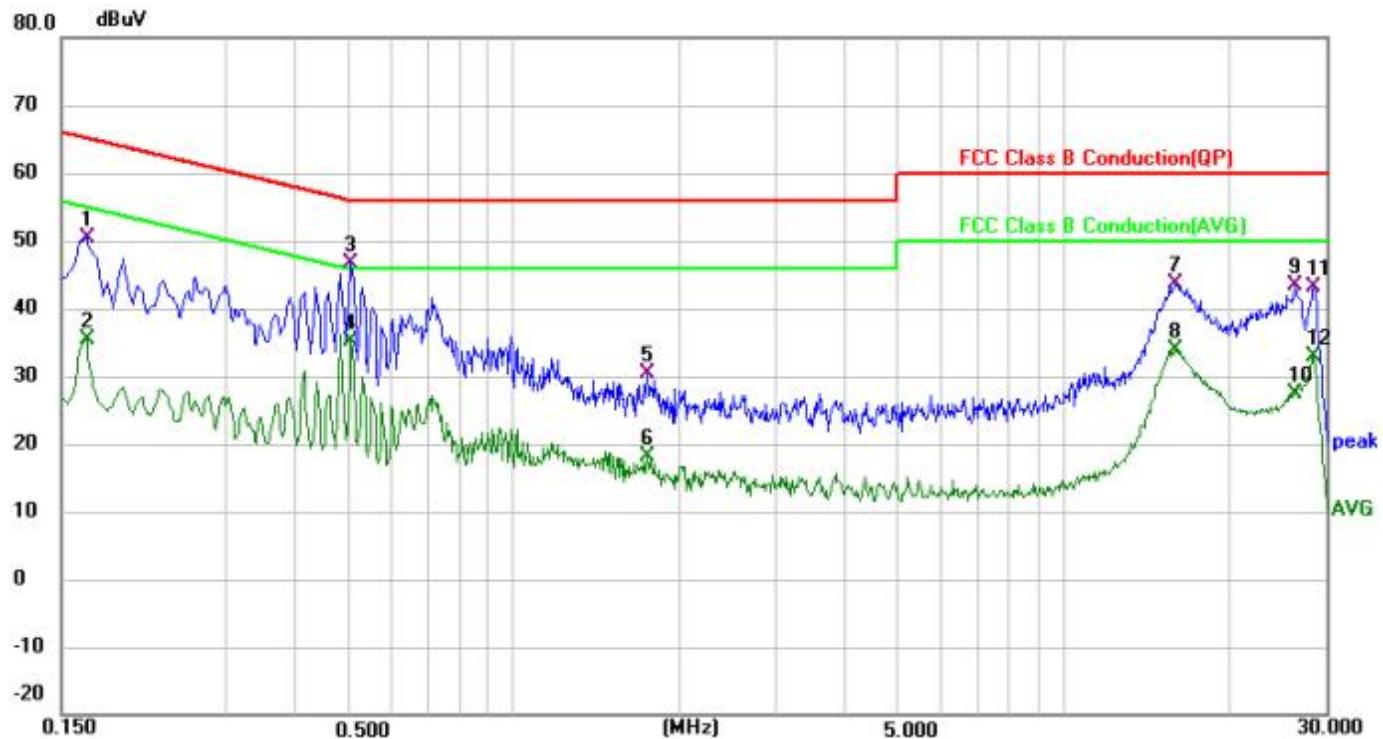[**Test mode: TX**]; [**Line: Neutral**]; [**Power: AC120V/60Hz**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level				
		MHz	dBuV	dB	dBuV	dB	Detector
1		0.1660	40.11	10.18	50.29	65.16	-14.87 QP
2		0.1660	25.14	10.18	35.32	55.16	-19.84 AVG
3	*	0.5060	36.80	9.79	46.59	56.00	-9.41 QP
4		0.5060	25.25	9.79	35.04	46.00	-10.96 AVG
5		1.7500	20.61	9.76	30.37	56.00	-25.63 QP
6		1.7500	8.33	9.76	18.09	46.00	-27.91 AVG
7		15.9100	33.74	9.95	43.69	60.00	-16.31 QP
8		15.9100	23.82	9.95	33.77	50.00	-16.23 AVG
9		26.3820	33.23	10.16	43.39	60.00	-16.61 QP
10		26.3820	17.24	10.16	27.40	50.00	-22.60 AVG
11		28.4660	33.06	10.16	43.22	60.00	-16.78 QP
12		28.4660	22.83	10.16	32.99	50.00	-17.01 AVG

**Test Result: Pass**
**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2


## 6.3 Conducted peak output Power

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247(b)(3)
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.9.1.3
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.3.1 Limit

<b>Frequency range(MHz)</b>	<b>Output power of the intentional radiator(watt)</b>
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 6.3.2 Test setup

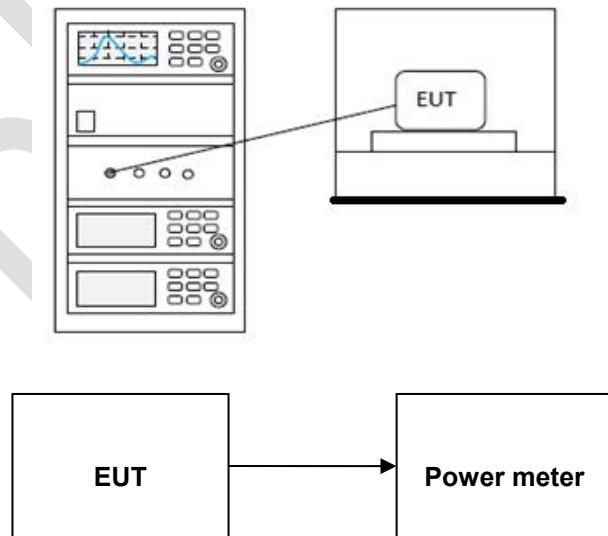

### 6.3.3 Test data

Pass: Please refer to appendix A for details

BlueAsia


## 6.4 Minimum 6dB bandwidth

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247(a)(2)
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.8.1
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.4.1 Limit

≥500 kHz

### 6.4.2 Test setup

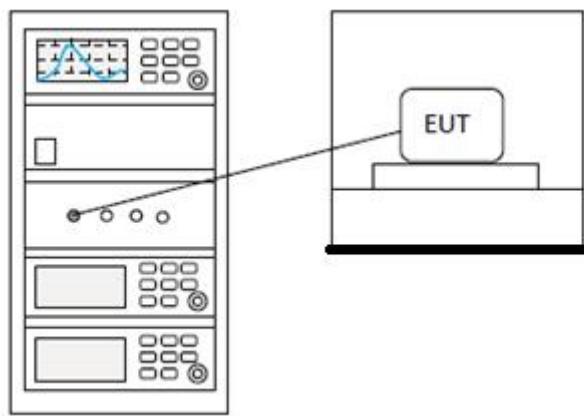

### 6.4.3 Test data

Pass: Please refer to appendix A for details


## 6.5 Power spectrum density

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247(e)
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.10.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.5.1 Limit

≤8dBm in any 3 kHz band during any time interval of continuous transmission

### 6.5.2 Test setup

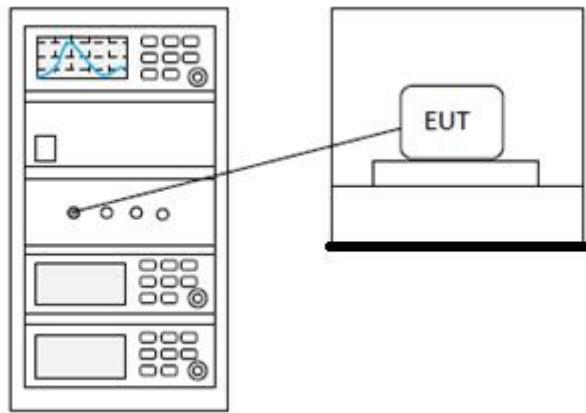

### 6.5.3 Test data

Pass: Please refer to appendix A for details

## 6.6 Conducted Band Edges Measurement

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247(d)
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.13
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.6.2 Test setup

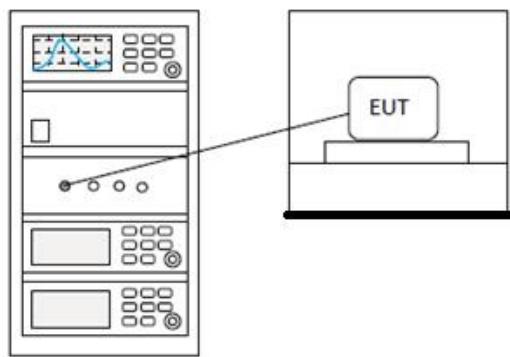

### 6.6.3 Test data

Pass: Please refer to appendix A for details

**BlueAsia** *of Technical Services (Shenzhen) Co.,Ltd.*

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

## 6.7 Conducted spurious emissions

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247(d)
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.11
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.7.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.7.2 Test setup

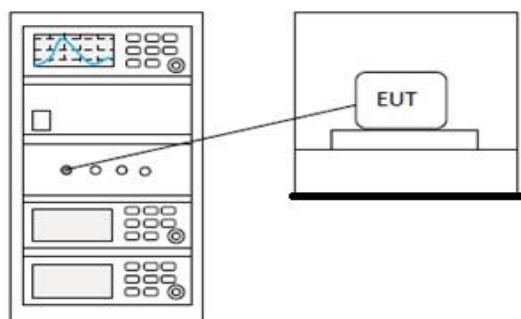

### 6.7.3 Test data

Pass: Please refer to appendix A for details

**BlueAsia** *of Technical Services (Shenzhen) Co.,Ltd.*

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

## 6.8 Radiated spurious emissions

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247(d)
<b>Test Method</b>	ANSI C63.10 (2013) Section11.11
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX


### 6.8.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


*Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.*

### 6.8.2 Test setup


Below 1GHz:

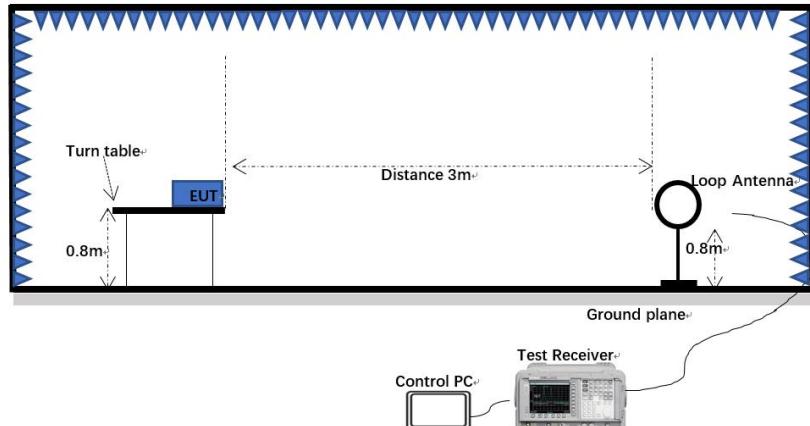

30MHz-1GHz:

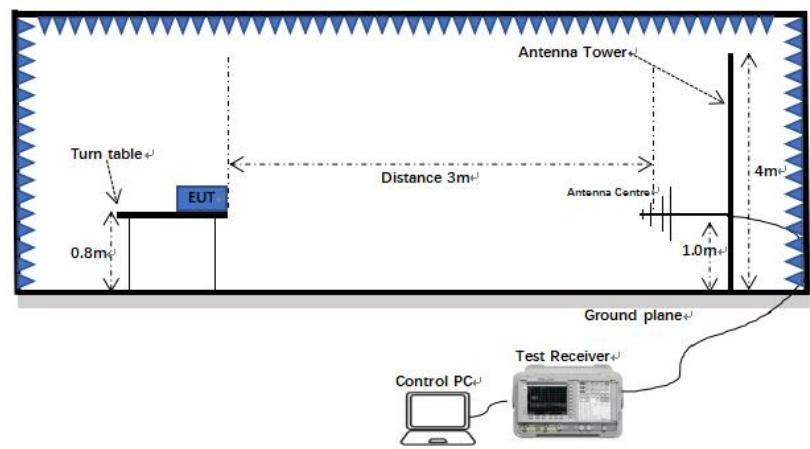

Above 1GHz:

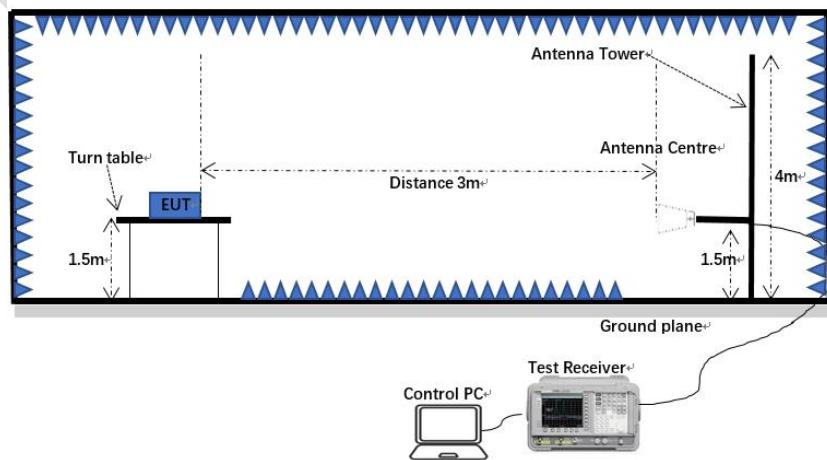

### 6.8.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

*Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.*

*Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.*

*Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:*

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

#### 6.8.4 Test data

*Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11b mode which is worse case, only the worse case lowest channel of 1Mbps for 802.11b was recorded in the report.*

Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.6584	0.68	19.60	20.28	40.00	-19.72	QP
2	67.2021	0.10	17.45	17.55	40.00	-22.45	QP
3	161.4740	0.19	20.37	20.56	43.50	-22.94	QP
4	351.7079	0.06	21.39	21.45	46.00	-24.55	QP
5	537.5891	1.36	25.65	27.01	46.00	-18.99	QP
6 *	866.0879	1.41	30.43	31.84	46.00	-14.16	QP

**Test Result: Pass**

[**Test mode: TX**]; [**Polarity: Vertical**]


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	35.0048	15.38	18.73	34.11	40.00	-5.89	QP
2	69.1140	3.67	16.84	20.51	40.00	-19.49	QP
3	86.2000	-0.89	15.59	14.70	40.00	-25.30	QP
4	159.7844	-0.17	20.41	20.24	43.50	-23.26	QP
5	417.6409	0.32	23.16	23.48	46.00	-22.52	QP
6	779.6067	0.68	29.50	30.18	46.00	-15.82	QP

**Test Result: Pass**

Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11b mode which it is worse case, only the worse case for 802.11b was recorded in the report.

Above 1GHz:

[TestMode: TX 802.11b low channel]; [Polarity: Horizontal]



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		5277.000	39.78	7.53	47.31	74.00	-26.69 peak
2		6522.500	38.98	8.45	47.43	74.00	-26.57 peak
3		8026.500	39.58	11.65	51.23	74.00	-22.77 peak
4		8449.500	39.34	11.50	50.84	74.00	-23.16 peak
5	*	9765.500	37.66	13.76	51.42	74.00	-22.58 peak
6		10635.00	37.79	13.32	51.11	74.00	-22.89 peak

**Test Result: Pass**

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

[**Test mode: TX 802.11b low channel**]; [**Polarity: Vertical**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		5241.750	39.61	7.41	47.02	74.00	-26.98	peak
2		5841.000	39.90	8.89	48.79	74.00	-25.21	peak
3		7098.250	39.14	10.36	49.50	74.00	-24.50	peak
4		8038.250	39.09	11.68	50.77	74.00	-23.23	peak
5		8907.750	38.30	12.57	50.87	74.00	-23.13	peak
6	*	9565.750	38.16	13.12	51.28	74.00	-22.72	peak


**Test Result: Pass**
**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2


[TestMethod: TX 802.11b mid channel]; [Polarity: Horizontal]

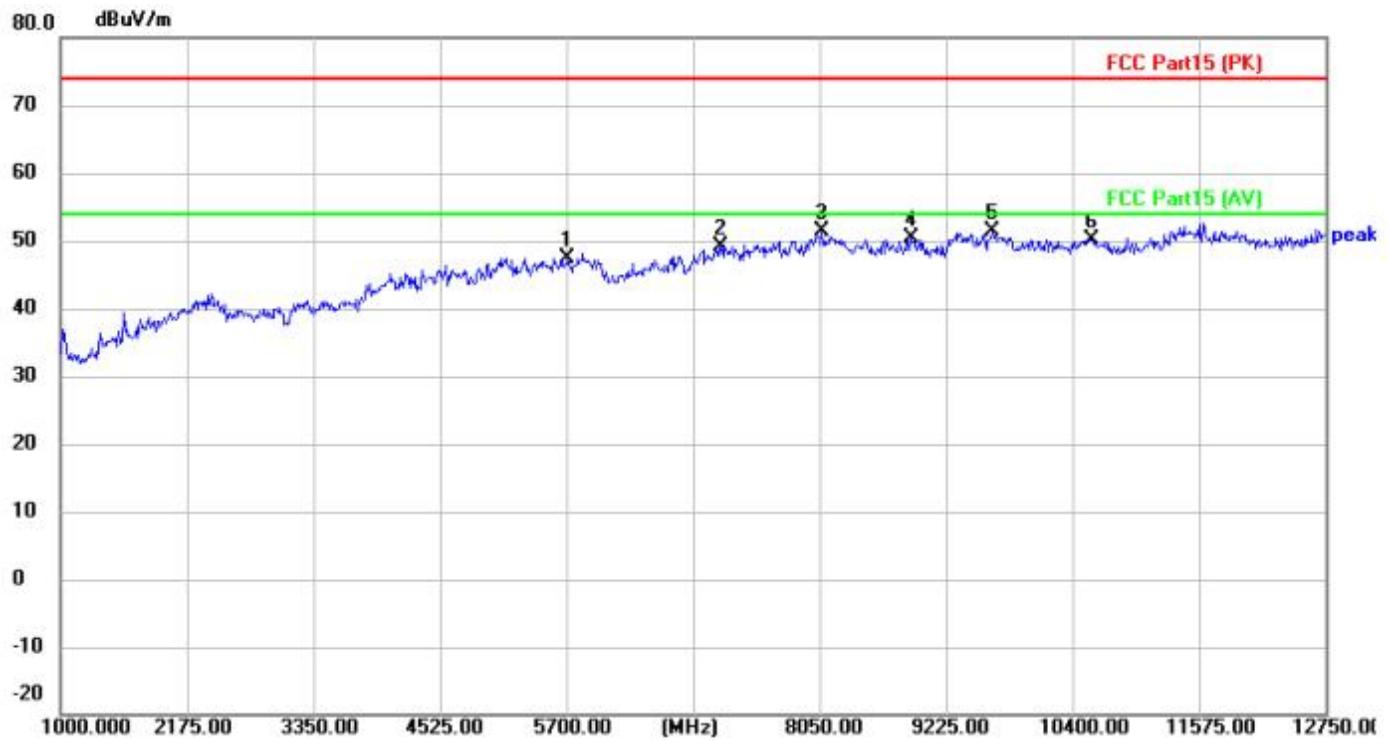

No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over	
			Level		ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		5711.750	38.72	8.74	47.46	74.00	-26.54	peak
2		7133.500	38.59	10.57	49.16	74.00	-24.84	peak
3		8073.500	39.55	11.75	51.30	74.00	-22.70	peak
4		8907.750	37.78	12.57	50.35	74.00	-23.65	peak
5	*	9659.750	37.79	13.52	51.31	74.00	-22.69	peak
6		10576.25	36.58	13.63	50.21	74.00	-23.79	peak

Test Result: Pass

[TestMethod: TX 802.11b mid channel]; [Polarity: Vertical]

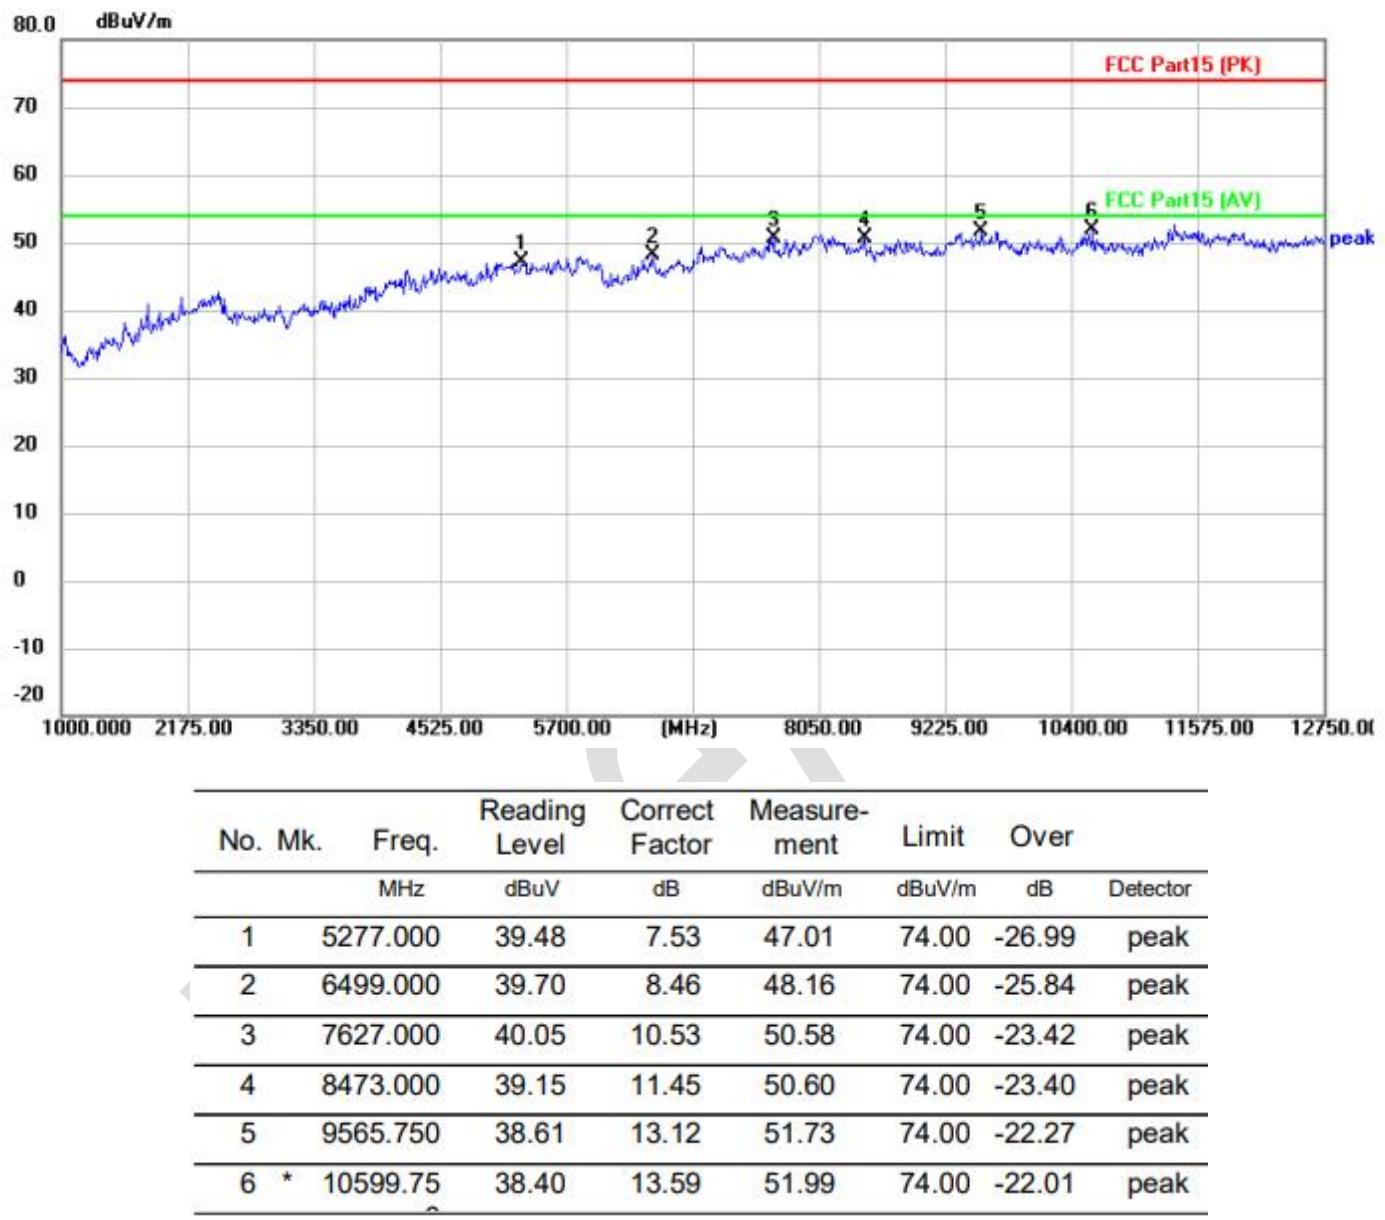

Test Result: Pass

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)


Version:v1.2

[**Test mode: TX 802.11b High channel**]; [**Polarity: Horizontal**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4560.250	40.43	6.09	46.52	74.00	-27.48	peak
2		5888.000	39.36	9.05	48.41	74.00	-25.59	peak
3		7168.750	39.43	10.57	50.00	74.00	-24.00	peak
4		7979.500	39.41	11.47	50.88	74.00	-23.12	peak
5	*	9448.250	38.29	13.10	51.39	74.00	-22.61	peak
6		10517.50	37.48	13.72	51.20	74.00	-22.80	peak

**Test Result: Pass**

[Test mode: TX 802.11b High channel]; [Polarity: Vertical]

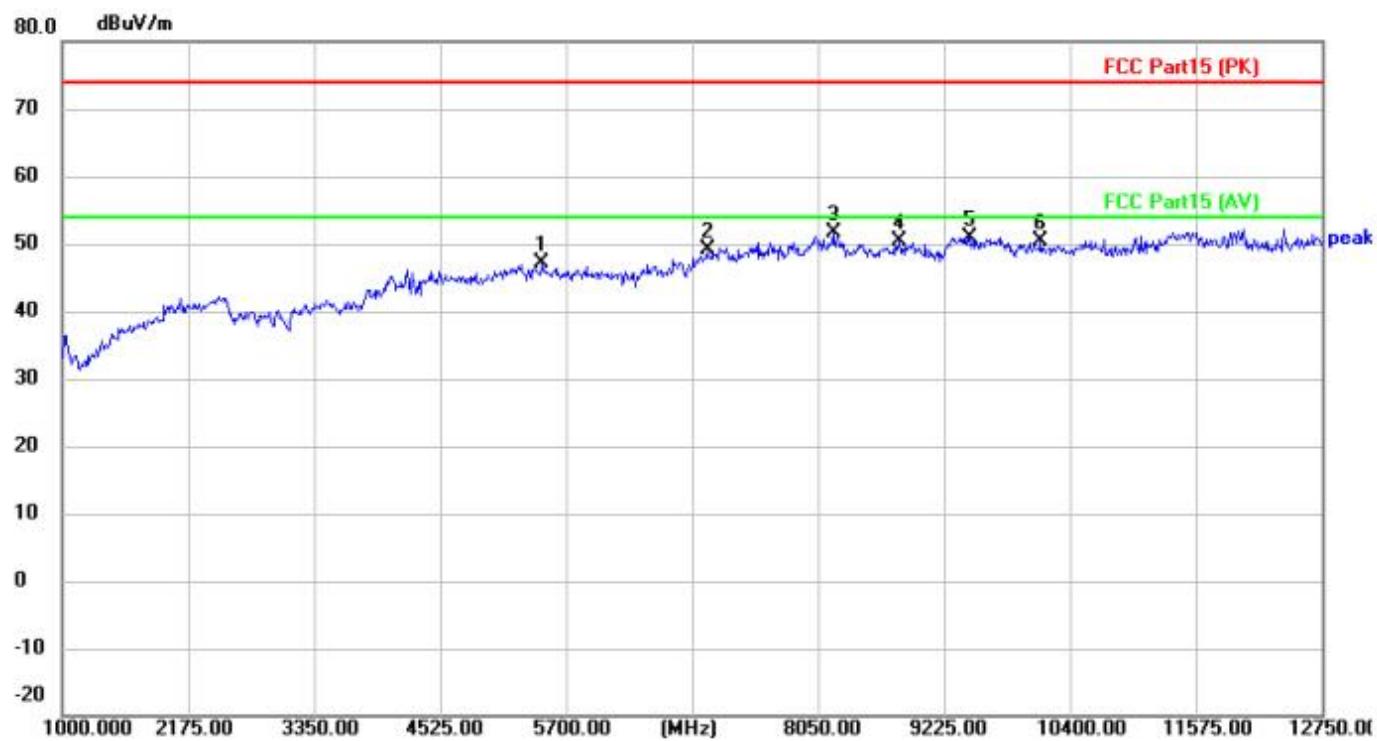

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		5476.750	38.67	8.38	47.05	74.00	-26.95	peak
2		7016.000	39.39	9.72	49.11	74.00	-24.89	peak
3	*	8191.000	40.12	11.50	51.62	74.00	-22.38	peak
4		8813.750	38.31	12.15	50.46	74.00	-23.54	peak
5		9471.750	38.14	12.81	50.95	74.00	-23.05	peak
6		10129.75	37.01	13.26	50.27	74.00	-23.73	peak

**Test Result: Pass**

## 6.9 Radiated emissions which fall in the restricted bands

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247(d)
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.12
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX


### 6.9.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


*Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.*

### 6.9.2 Test setup


Below 1GHz:

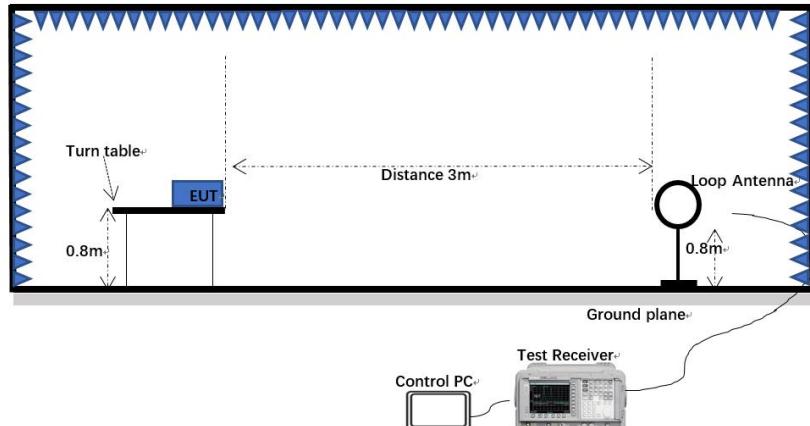

30MHz-1GHz:

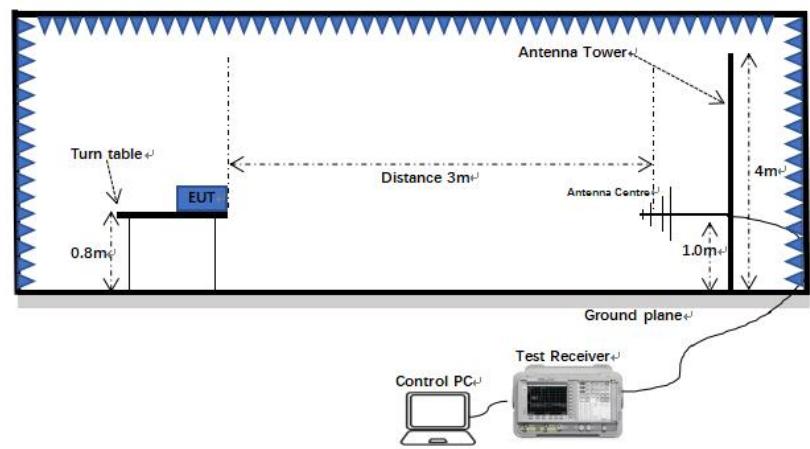

Above 1GHz:

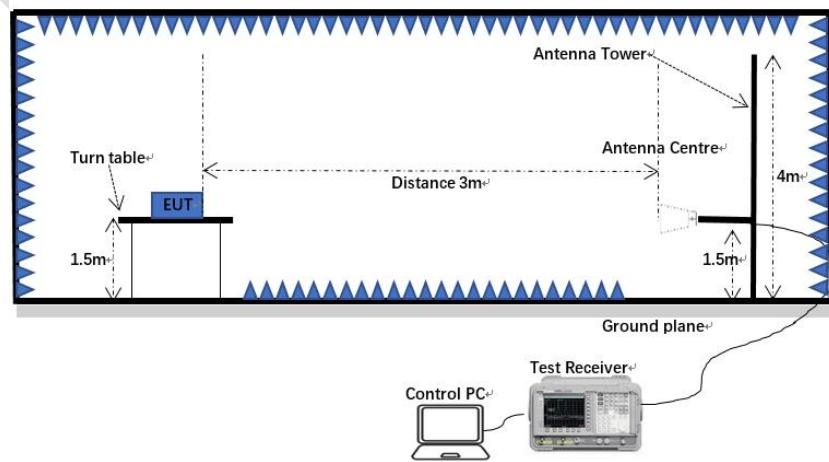

### 6.9.3 Procedure


- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


#### 6.9.4 Test data

[Test mode: TX 802.11b low channel]; [Polarity: Horizontal]

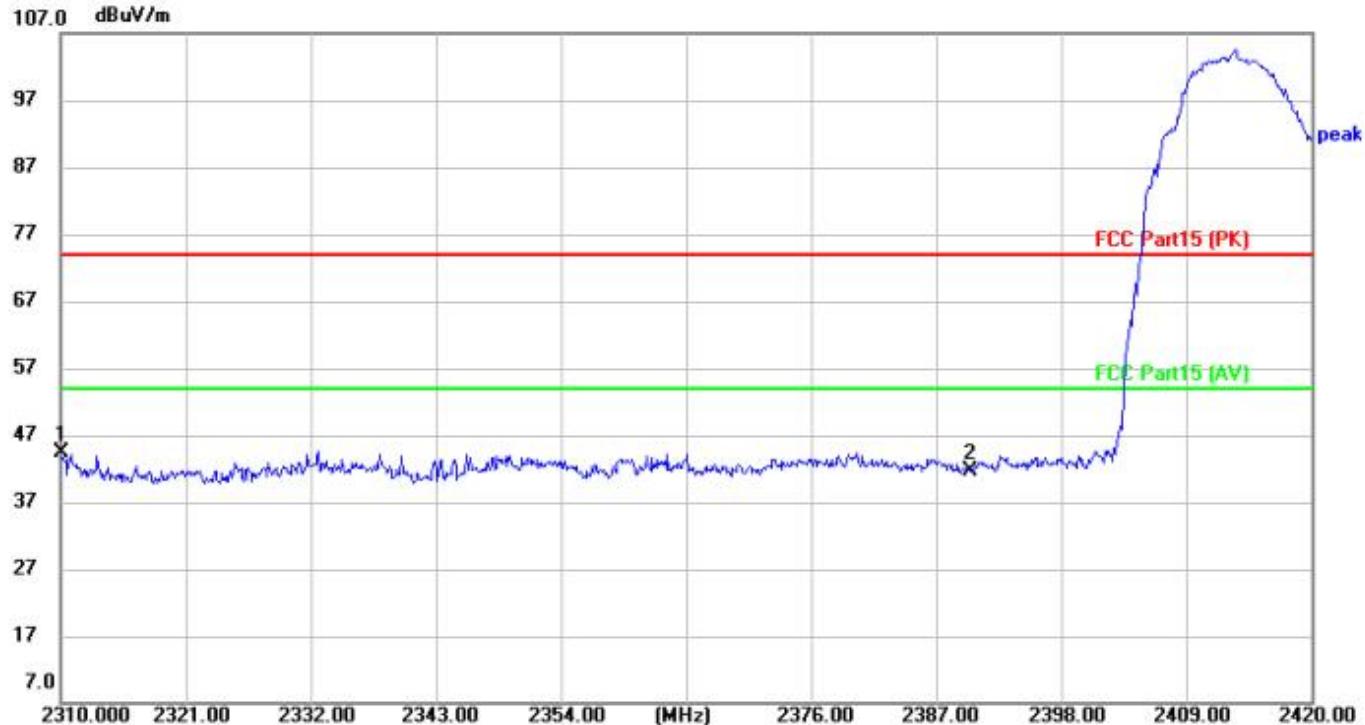

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	*	2310.000	47.37	-2.87	44.50	74.00	-29.50
	2	2390.000	44.19	-2.44	41.75	74.00	-32.25

**Test Result: Pass**

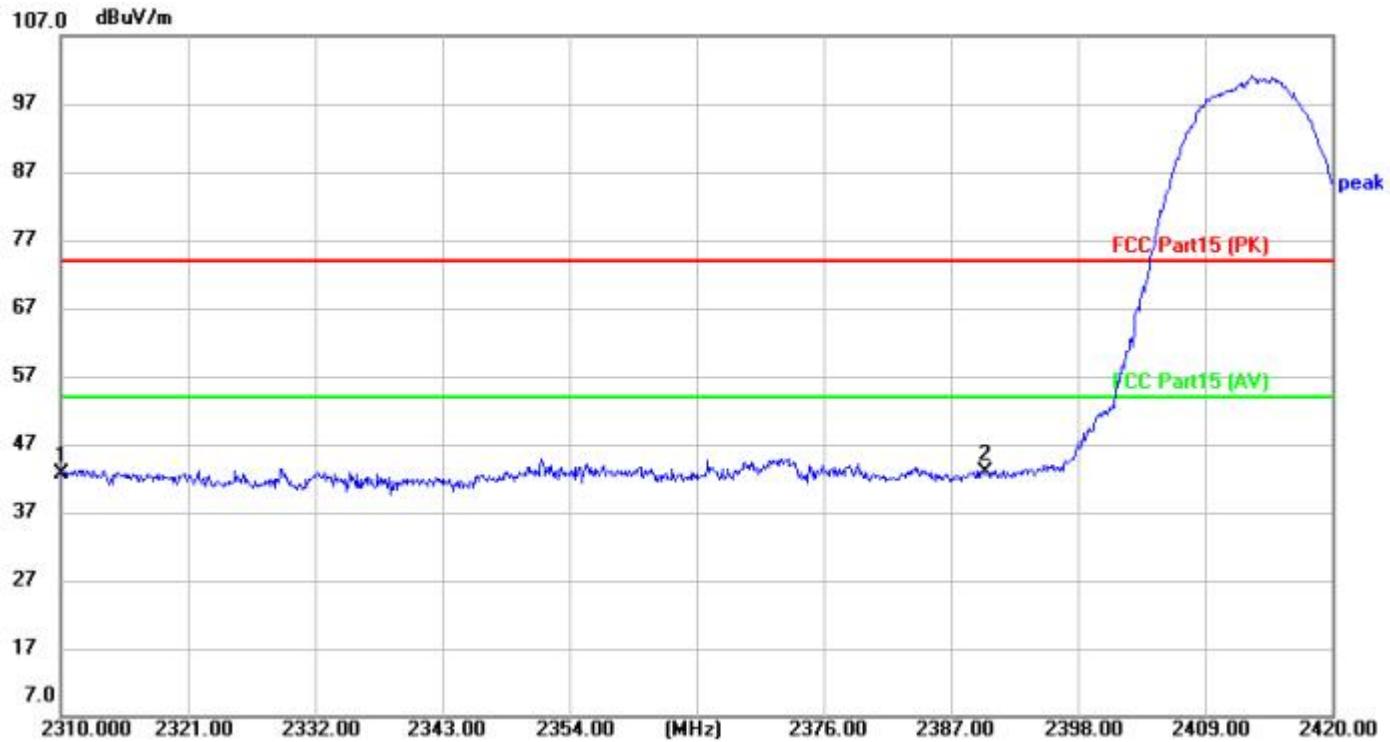[**Test mode:TX 802.11b low channel**]; [**Polarity: Vertical**]


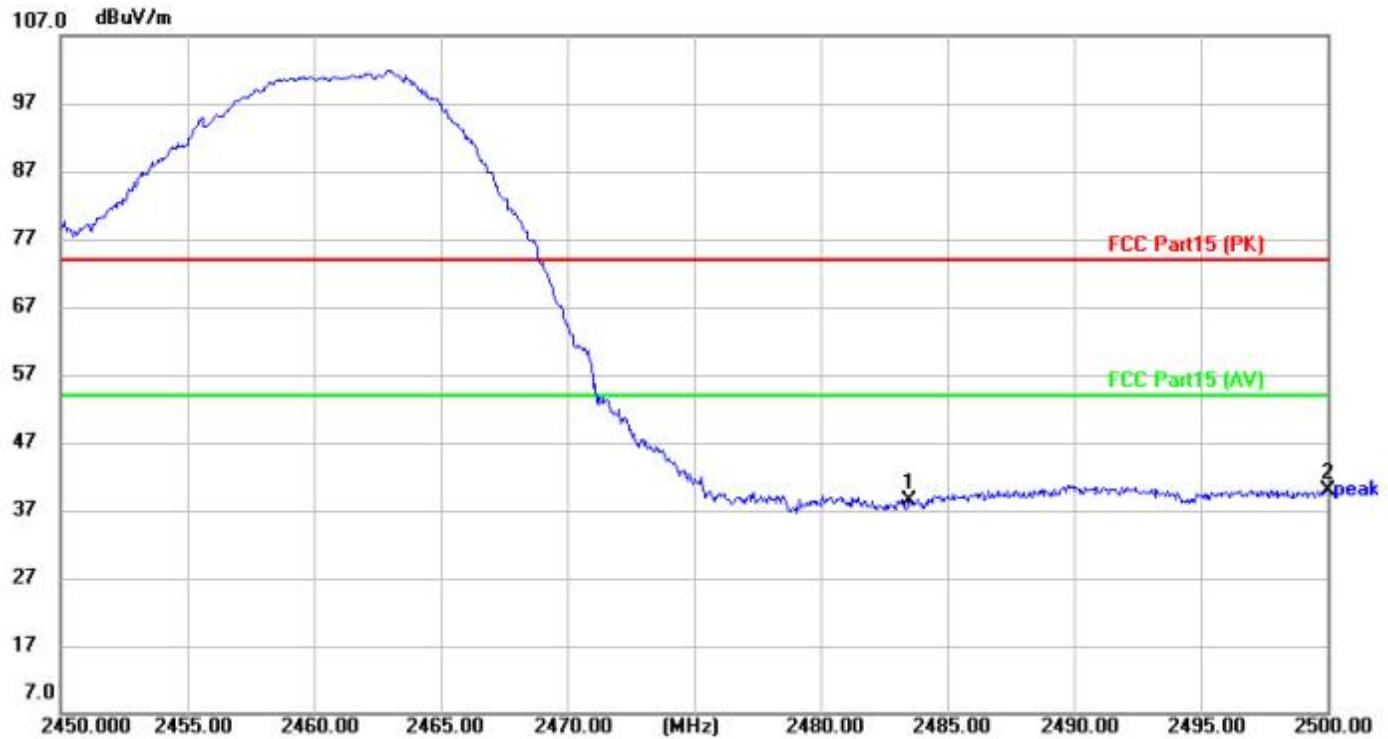
No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		2310.000	45.60	-2.87	42.73	74.00	-31.27 peak
2	*	2390.000	45.25	-2.44	42.81	74.00	-31.19 peak

**Test Result: Pass**
**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)


Version:v1.2

[**Test mode: TX 802.11b High channel**]; [**Polarity: Horizontal**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	41.25	-2.91	38.34	74.00	-35.66	peak
2	*	2500.000	43.00	-3.00	40.00	74.00	-34.00	peak

**Test Result: Pass**

[Test mode:TX 802.11b High channel]; [Polarity: Vertical]

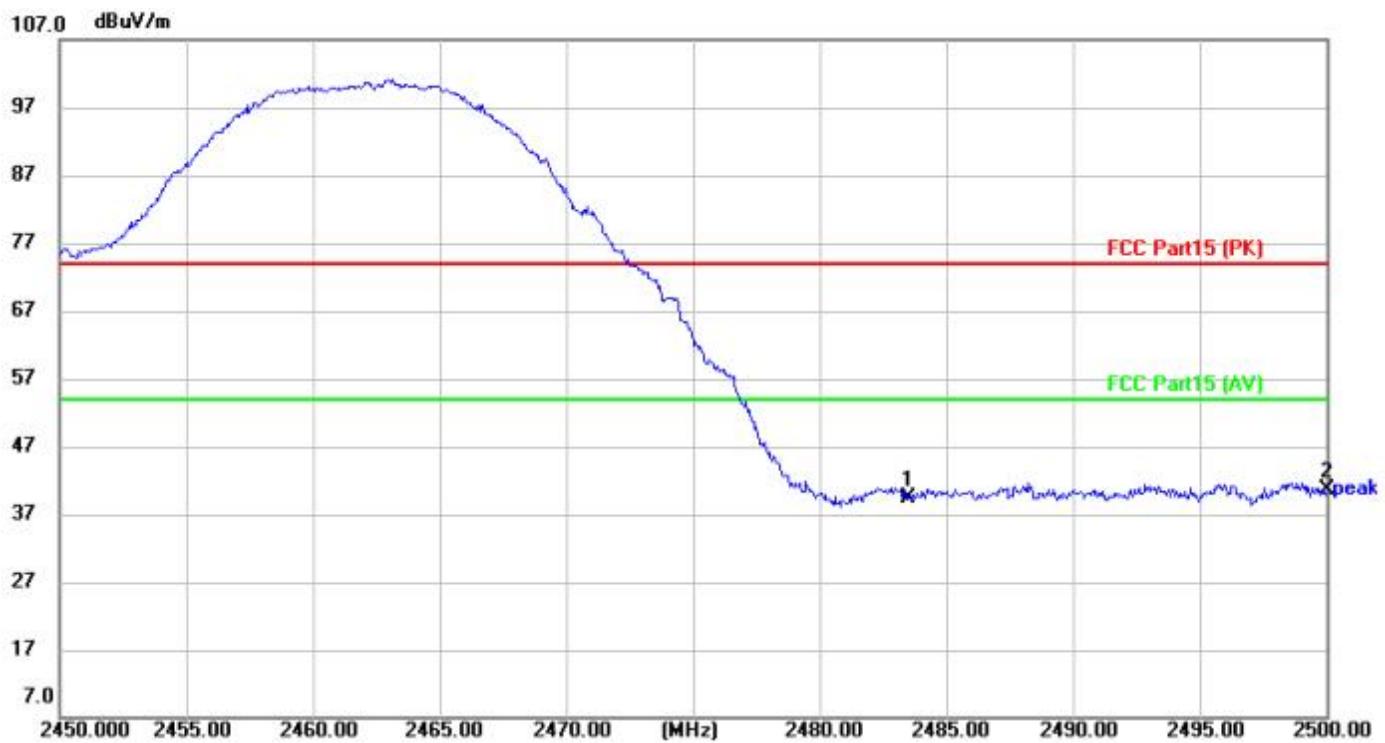

No.	Mk.	Freq.	Reading	Correct Factor	Measure- ment	Limit	Over	
			Level					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	42.36	-2.91	39.45	74.00	-34.55	peak
2	*	2500.000	43.74	-3.00	40.74	74.00	-33.26	peak


Test Result: Pass

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481


Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

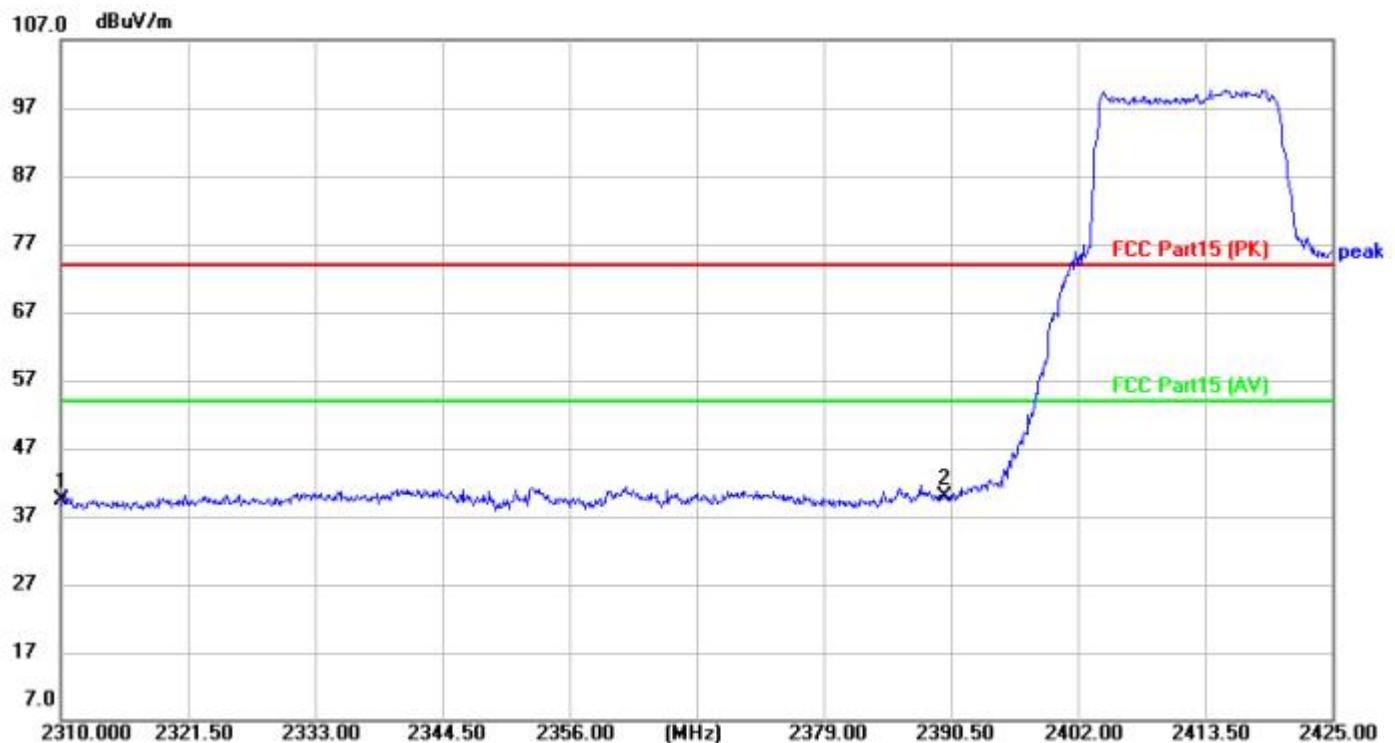[**Test mode: TX 802.11g low channel**]; [**Polarity: Horizontal**]


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	42.20	-2.87	39.33	74.00	-34.67	peak
2	*	2390.000	42.40	-2.44	39.96	74.00	-34.04	peak

**Test Result: Pass**

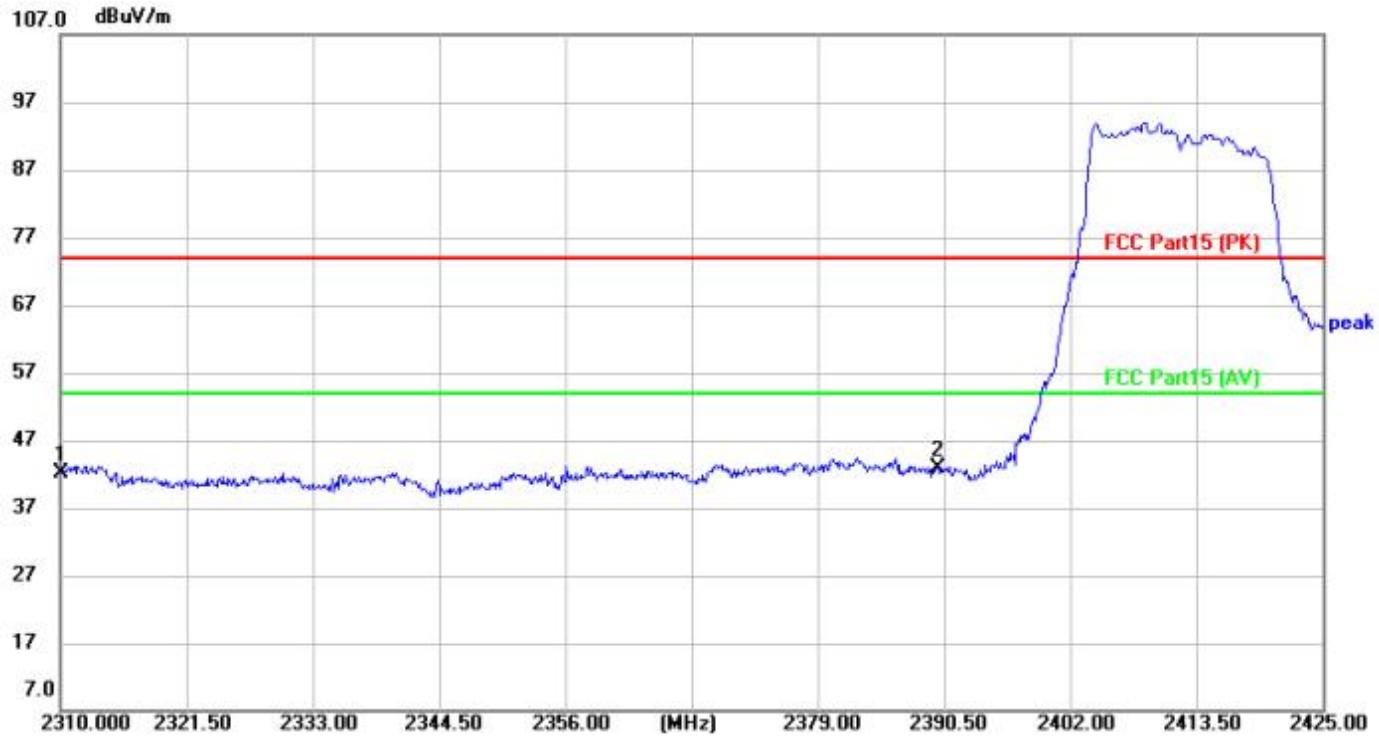[**Test mode:TX 802.11g low channel**]; [**Polarity: Vertical**]


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	44.90	-2.87	42.03	74.00	-31.97	peak
2	*	2390.000	45.34	-2.44	42.90	74.00	-31.10	peak

**Test Result: Pass**
**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

[Test mode: TX 802.11g High channel]; [Polarity: Horizontal]



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	42.94	-2.91	40.03	74.00	-33.97	peak
2	*	2500.000	43.77	-3.00	40.77	74.00	-33.23	peak

Test Result: Pass

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)


Version:v1.2

[Test mode:TX 802.11g High channel]; [Polarity: Vertical]



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	44.65	-2.91	41.74	74.00	-32.26	peak
	2	2500.000	44.41	-3.00	41.41	74.00	-32.59	peak

Test Result: Pass

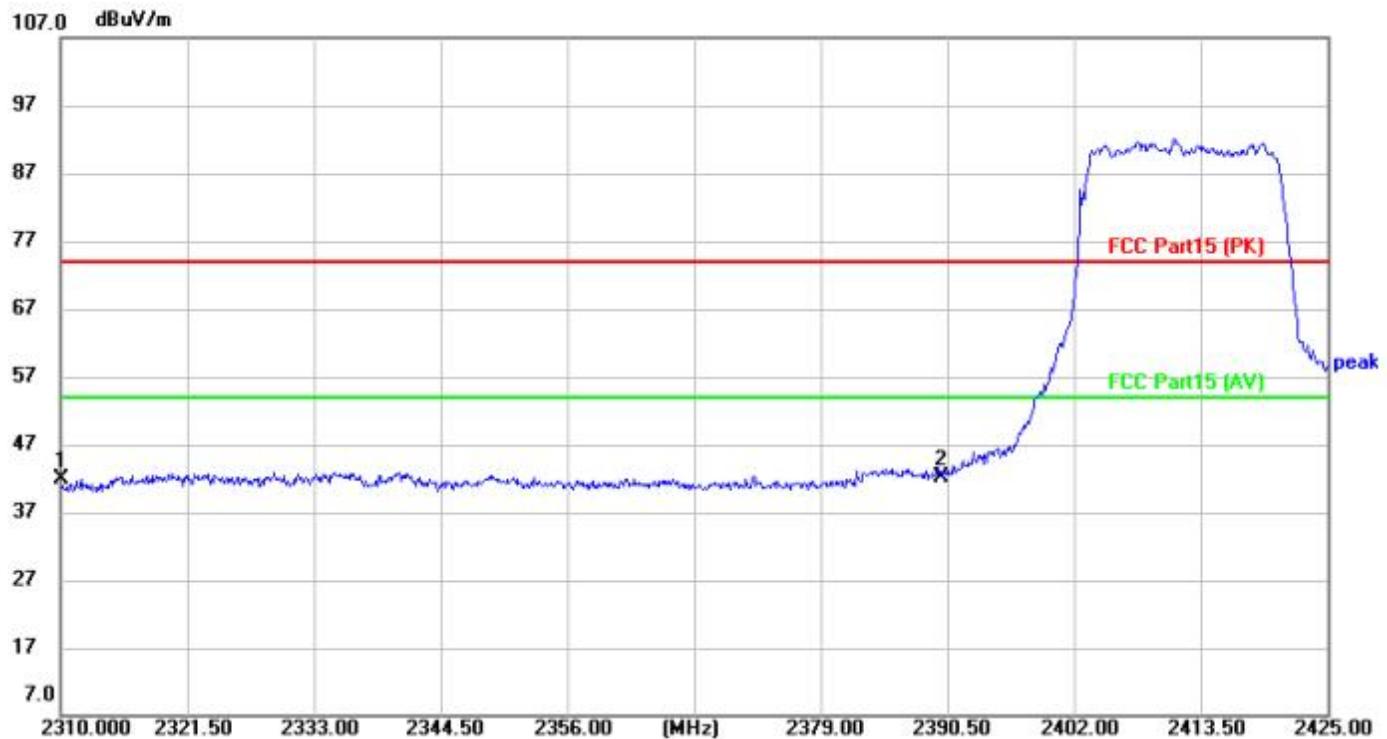[**Test mode: TX 802.11n20 low channel**]; [**Polarity: Horizontal**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	44.67	-2.87	41.80	74.00	-32.20	peak
2	*	2390.000	44.68	-2.44	42.24	74.00	-31.76	peak


**Test Result: Pass**

[Test mode:TX 802.11n20 low channel]; [Polarity: Vertical]



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	44.19	-2.87	41.32	74.00	-32.68	peak
2	*	2390.000	44.07	-2.44	41.63	74.00	-32.37	peak

**Test Result: Pass**

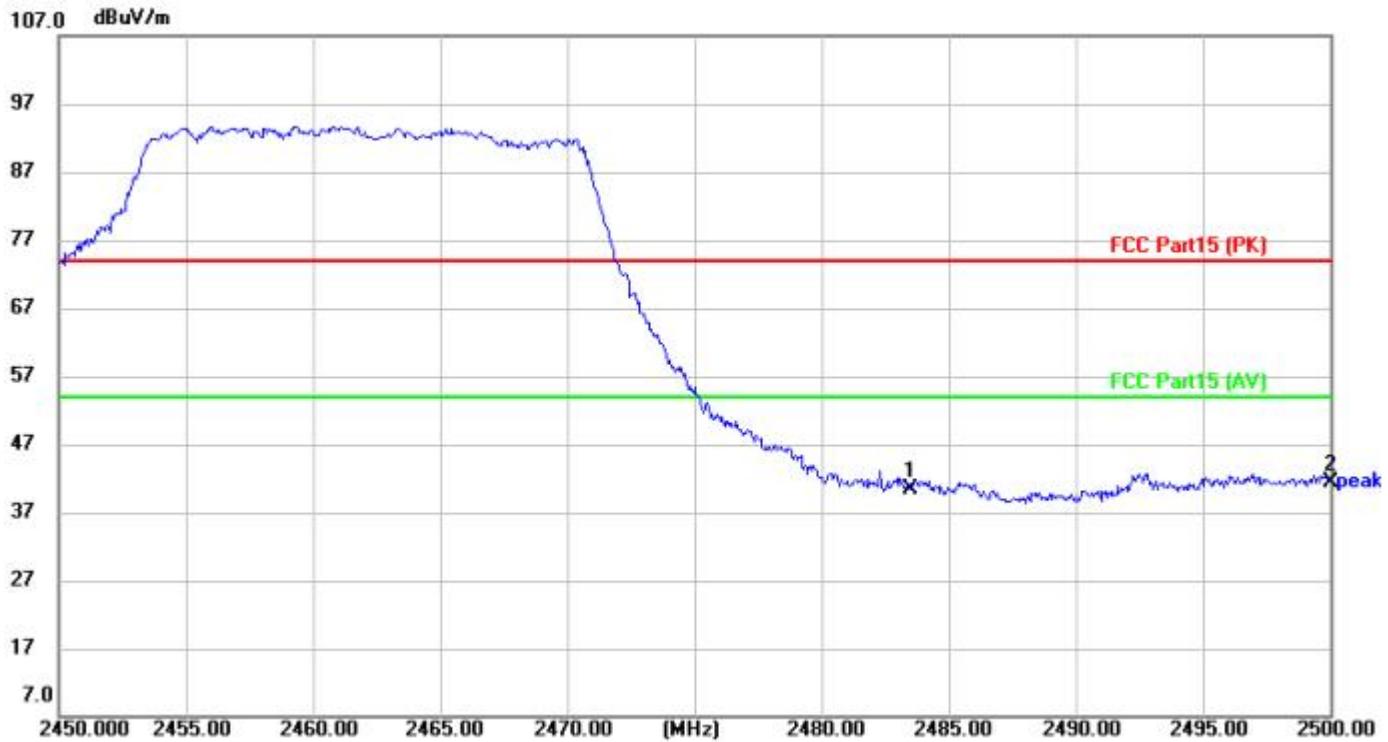[**Test mode: TX 802.11n20 High channel**]; [**Polarity: Horizontal**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	43.36	-2.91	40.45	74.00	-33.55	peak
2	*	2500.000	44.45	-3.00	41.45	74.00	-32.55	peak


**Test Result: Pass**

[**Test mode:TX 802.11n20 High channel**]; [**Polarity: Vertical**]


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1	*	2483.500	44.42	-2.91	41.51	74.00	-32.49 peak
2		2500.000	44.44	-3.00	41.44	74.00	-32.56 peak

**Test Result: Pass**


[Test mode: TX 802.11n40 low channel]; [Polarity: Horizontal]

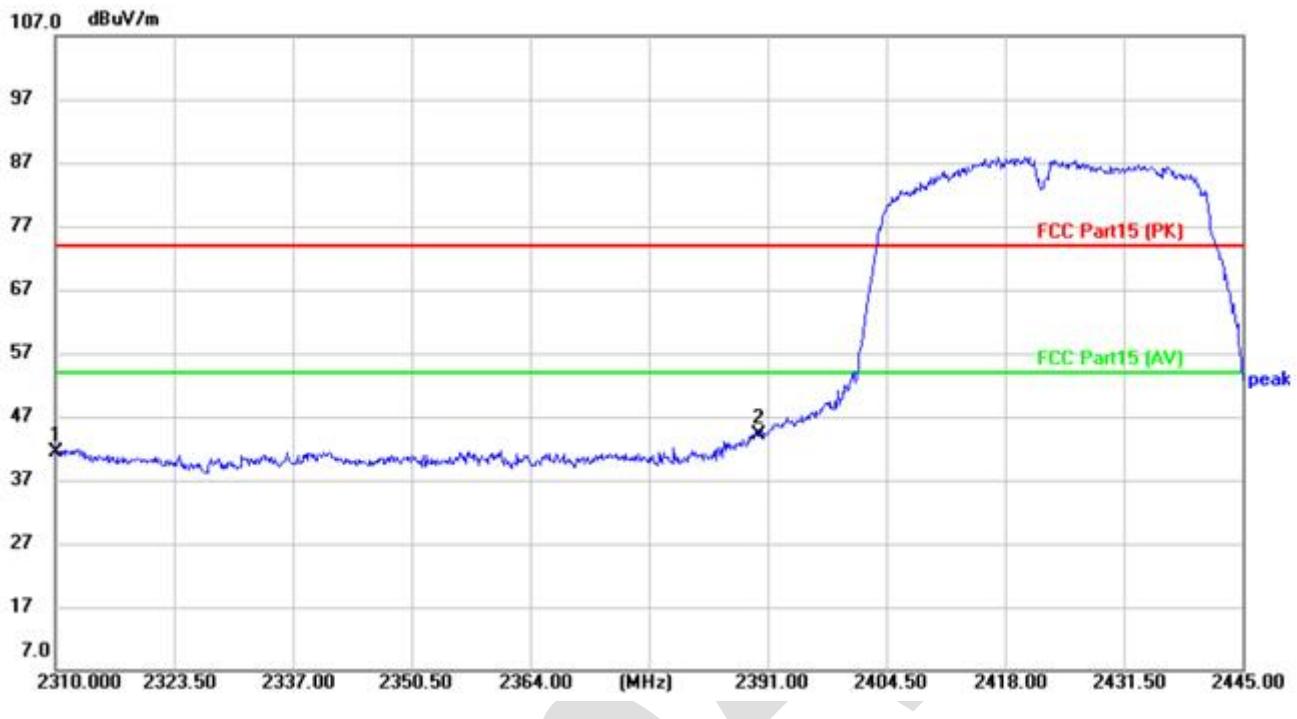

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	44.13	-2.87	41.26	74.00	-32.74	peak
2	*	2390.000	46.66	-2.44	44.22	74.00	-29.78	peak

Test Result: Pass

[Test mode:TX 802.11n40 low channel]; [Polarity: Vertical]

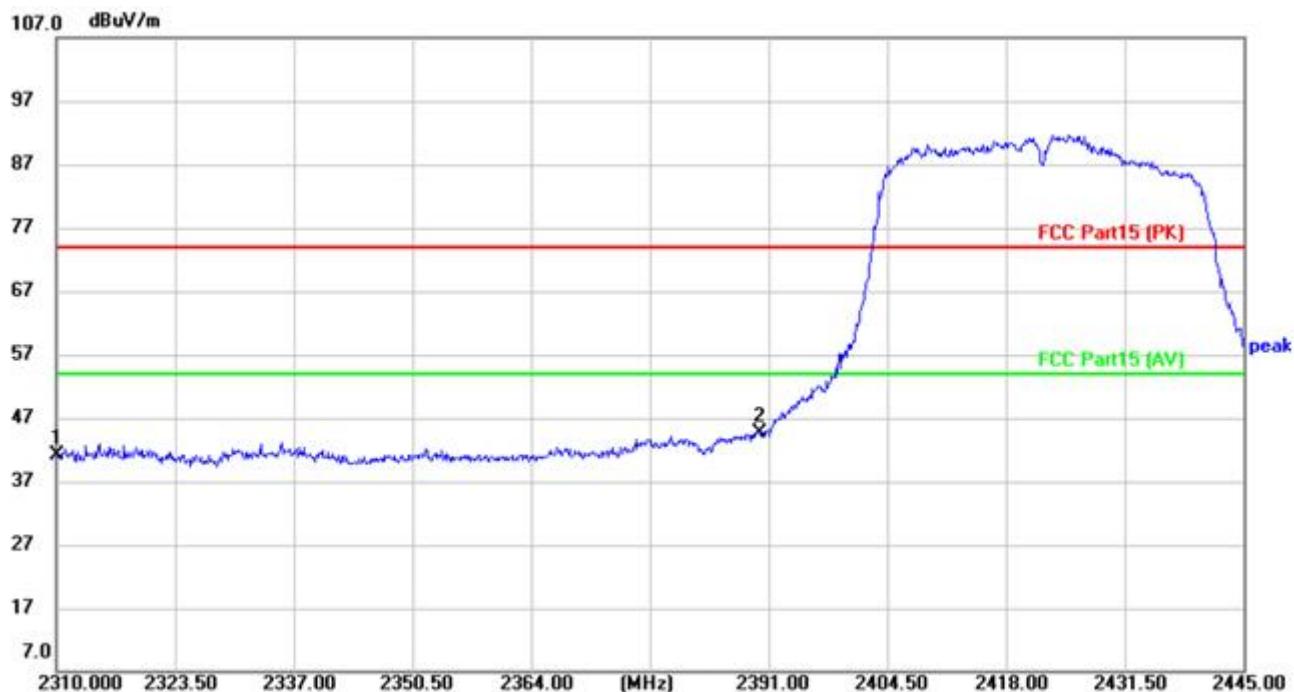

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	44.08	-2.87	41.21	74.00	-32.79	peak
2	*	2390.000	47.13	-2.44	44.69	74.00	-29.31	peak

Test Result: Pass

[**Test mode: TX 802.11n40 High channel**]; [**Polarity: Horizontal**]


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	2483.500	44.26	-2.91	41.35	74.00	-32.65	peak
2		2500.000	43.19	-3.00	40.19	74.00	-33.81	peak

**Test Result: Pass**

[**Test mode:TX 802.11n40 High channel**]; [**Polarity: Vertical**]


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	43.01	-2.91	40.10	74.00	-33.90	peak
2		2500.000	42.83	-3.00	39.83	74.00	-34.17	peak

**Test Result: Pass**

## 7 Appendix A


### 7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	15.053	30	Pass
NVNT	b	2437	Ant1	13.866	30	Pass
NVNT	b	2462	Ant1	10.284	30	Pass
NVNT	g	2412	Ant1	<b>17.238</b>	30	Pass
NVNT	g	2437	Ant1	16.326	30	Pass
NVNT	g	2462	Ant1	12.83	30	Pass
NVNT	n20	2412	Ant1	16.525	30	Pass
NVNT	n20	2437	Ant1	15.338	30	Pass
NVNT	n20	2462	Ant1	11.812	30	Pass
NVNT	n40	2422	Ant1	15.463	30	Pass
NVNT	n40	2437	Ant1	14.524	30	Pass
NVNT	n40	2452	Ant1	12.55	30	Pass


## 7.2 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.072	0.5	Pass
NVNT	b	2437	Ant1	9.092	0.5	Pass
NVNT	b	2462	Ant1	9.077	0.5	Pass
NVNT	g	2412	Ant1	16.352	0.5	Pass
NVNT	g	2437	Ant1	16.313	0.5	Pass
NVNT	g	2462	Ant1	16.335	0.5	Pass
NVNT	n20	2412	Ant1	17.59	0.5	Pass
NVNT	n20	2437	Ant1	17.578	0.5	Pass
NVNT	n20	2462	Ant1	17.661	0.5	Pass
NVNT	n40	2422	Ant1	32.332	0.5	Pass
NVNT	n40	2437	Ant1	32.1	0.5	Pass
NVNT	n40	2452	Ant1	32.25	0.5	Pass

-6dB Bandwidth NVNT b 2412MHz Ant1

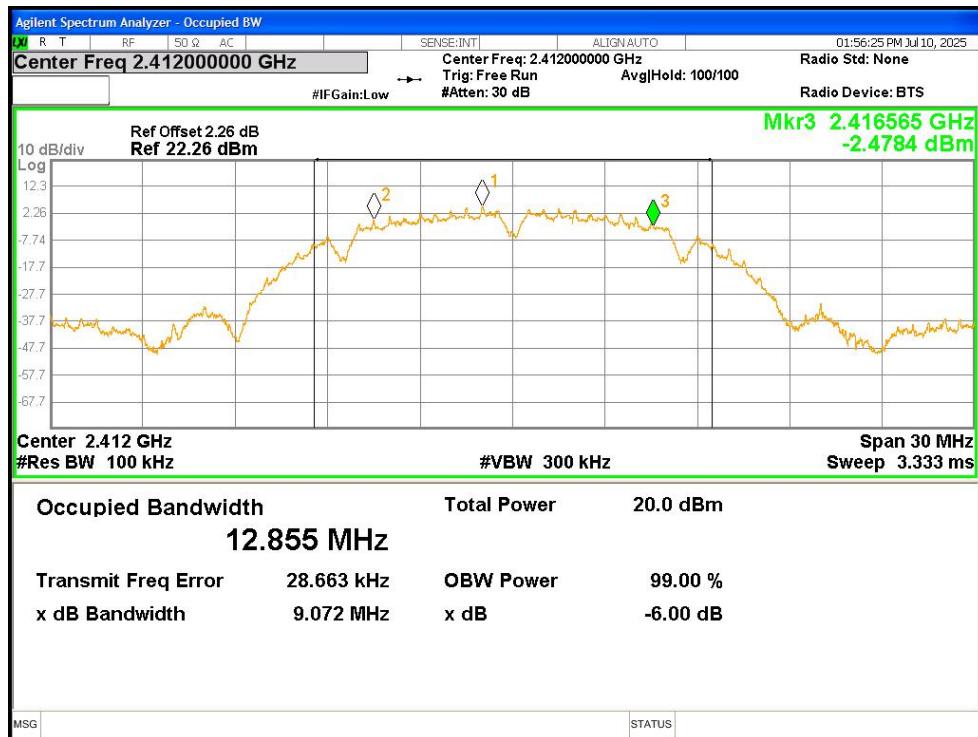

-6dB Bandwidth NVNT b 2437MHz Ant1

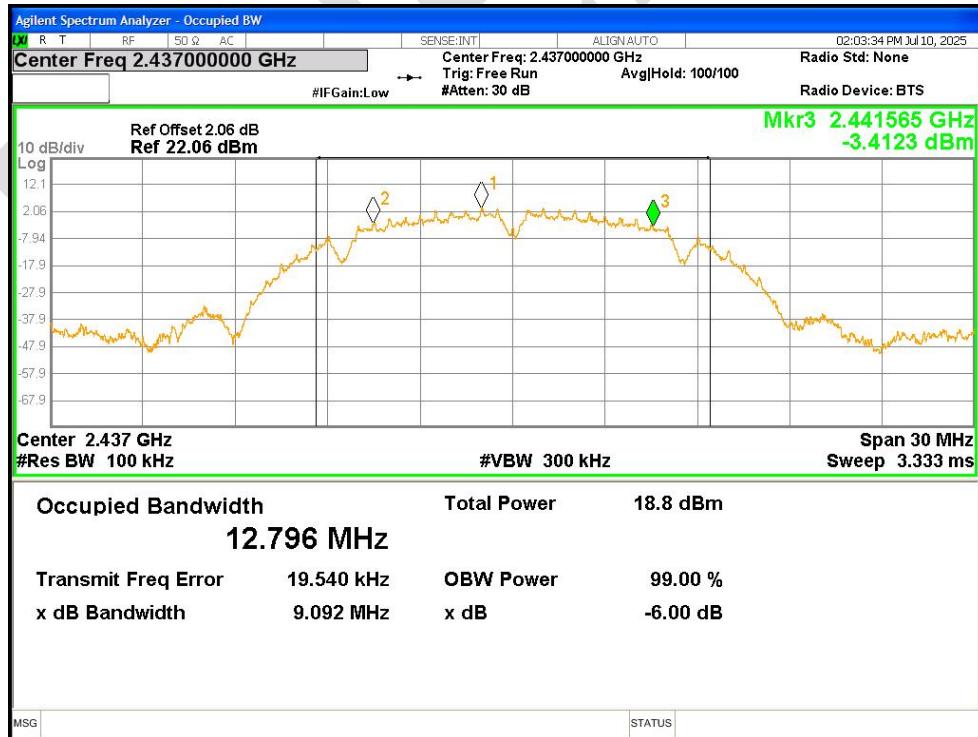


-6dB Bandwidth NVNT b 2462MHz Ant1

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.


Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)


Version:v1.2

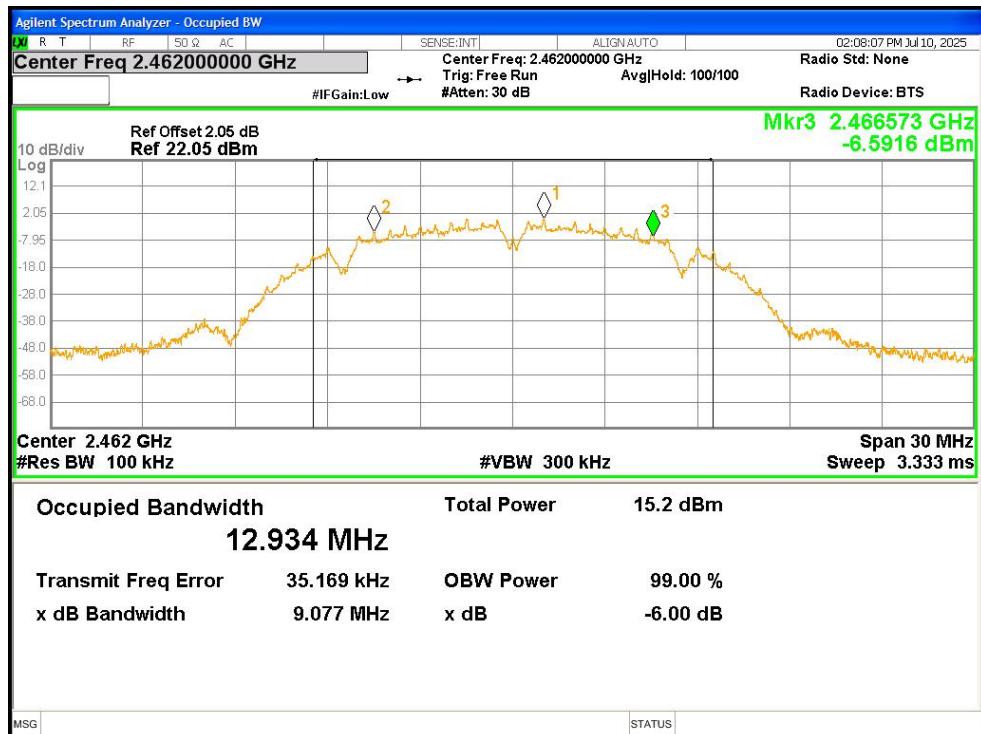


-6dB Bandwidth NVNT g 2412MHz Ant1

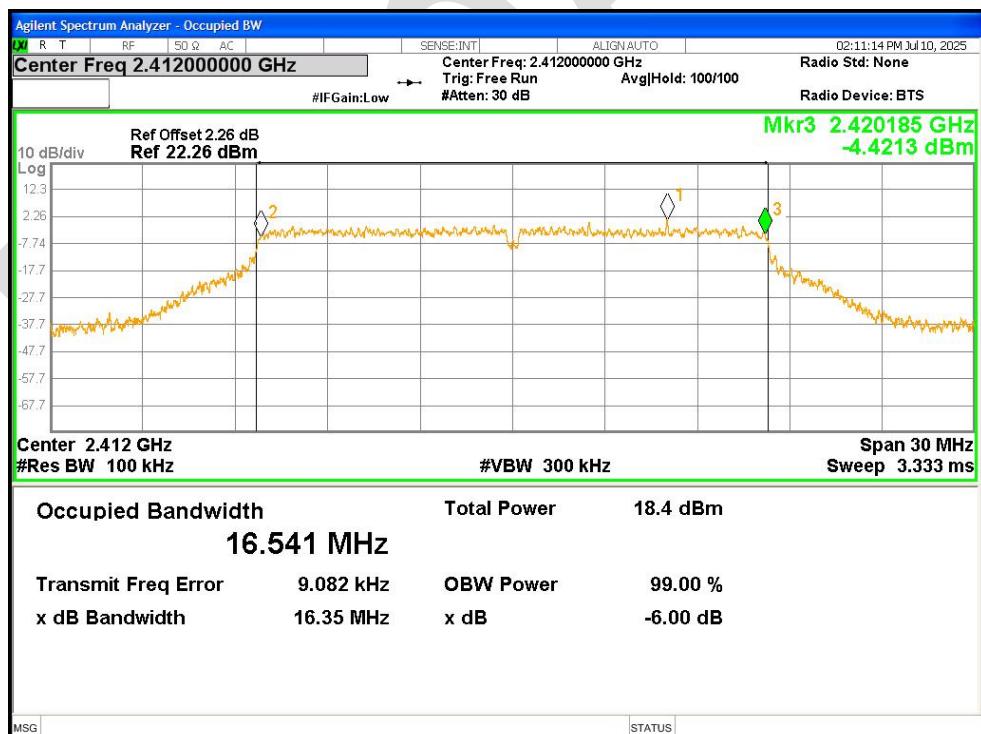


-6dB Bandwidth NVNT g 2437MHz Ant1

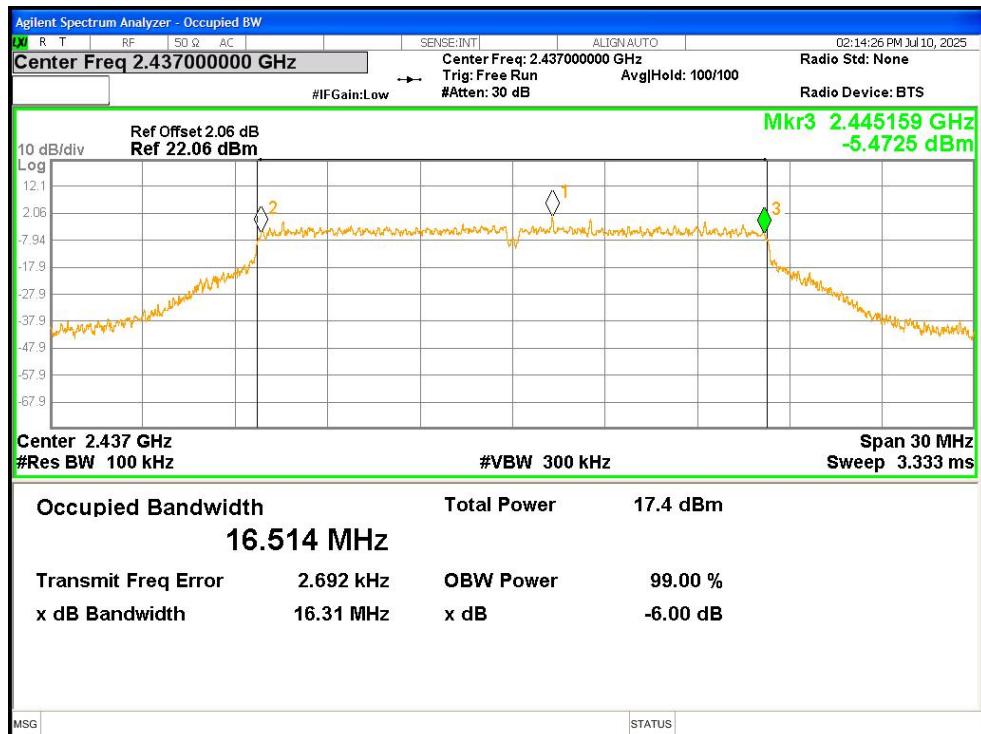


-6dB Bandwidth NVNT g 2462MHz Ant1

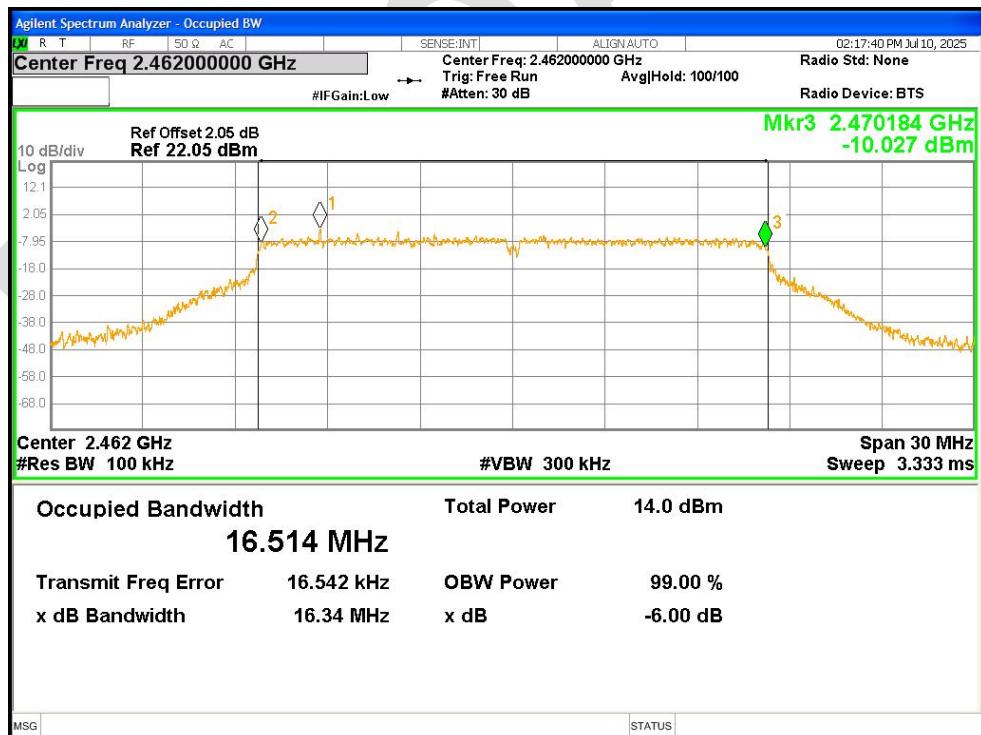


-6dB Bandwidth NVNT n20 2412MHz Ant1

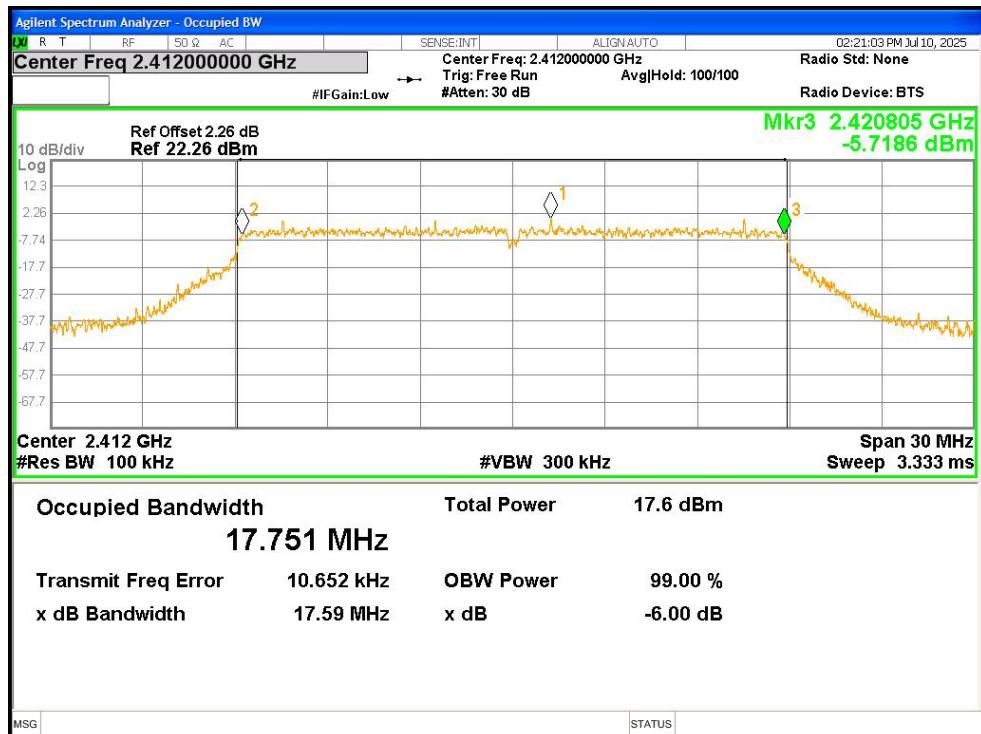


-6dB Bandwidth NVNT n20 2437MHz Ant1

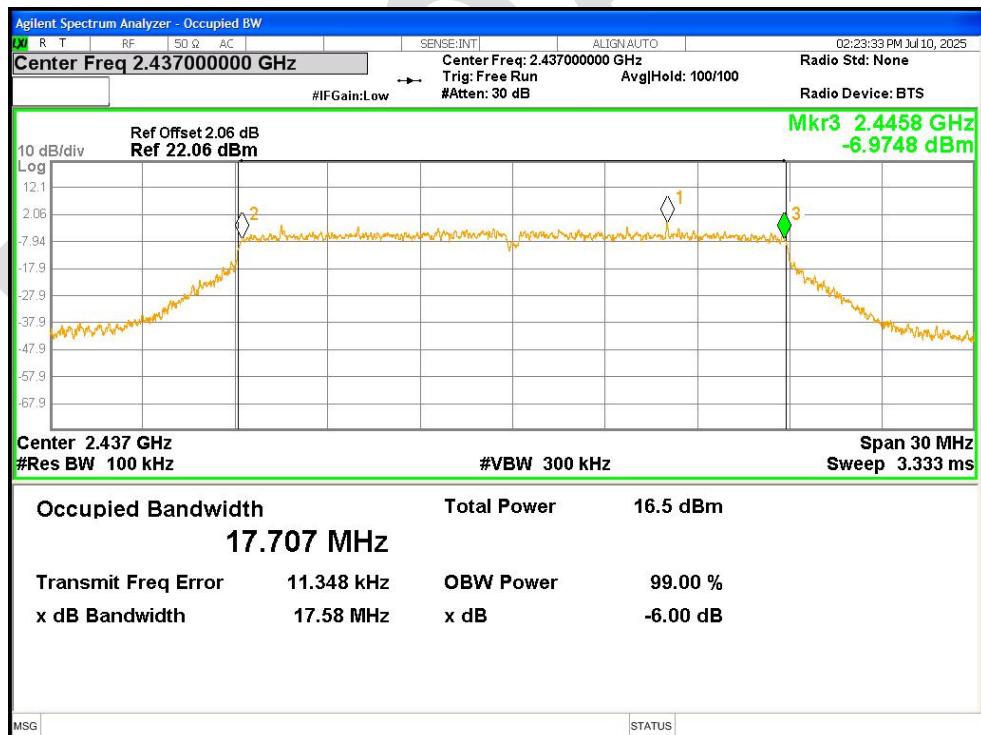


-6dB Bandwidth NVNT n20 2462MHz Ant1

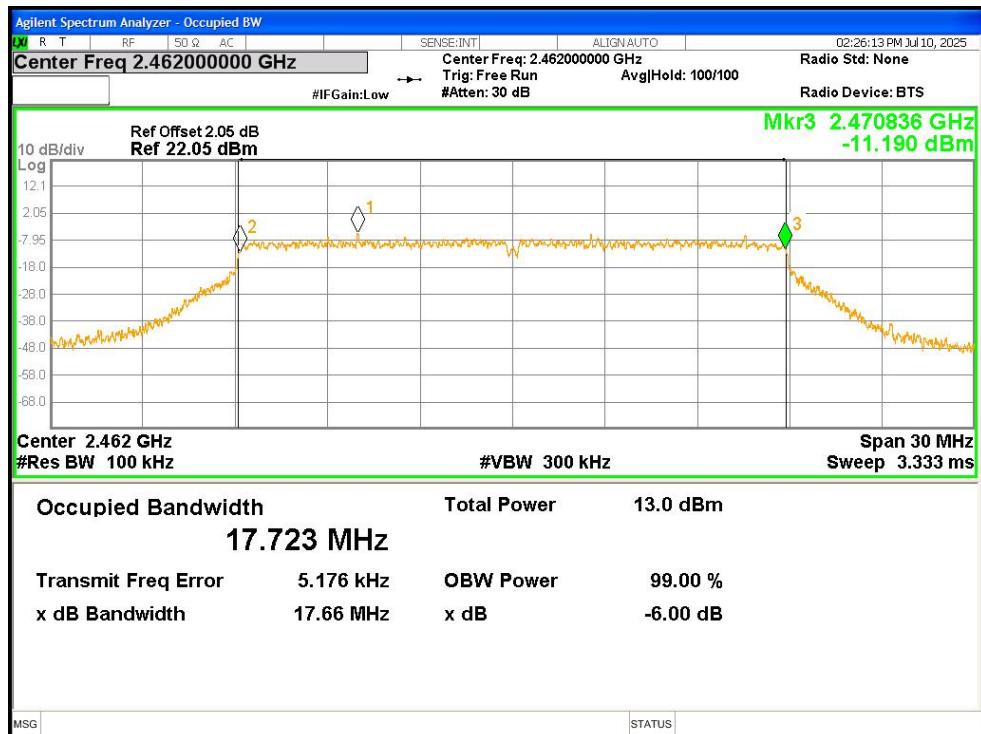


-6dB Bandwidth NVNT n40 2422MHz Ant1

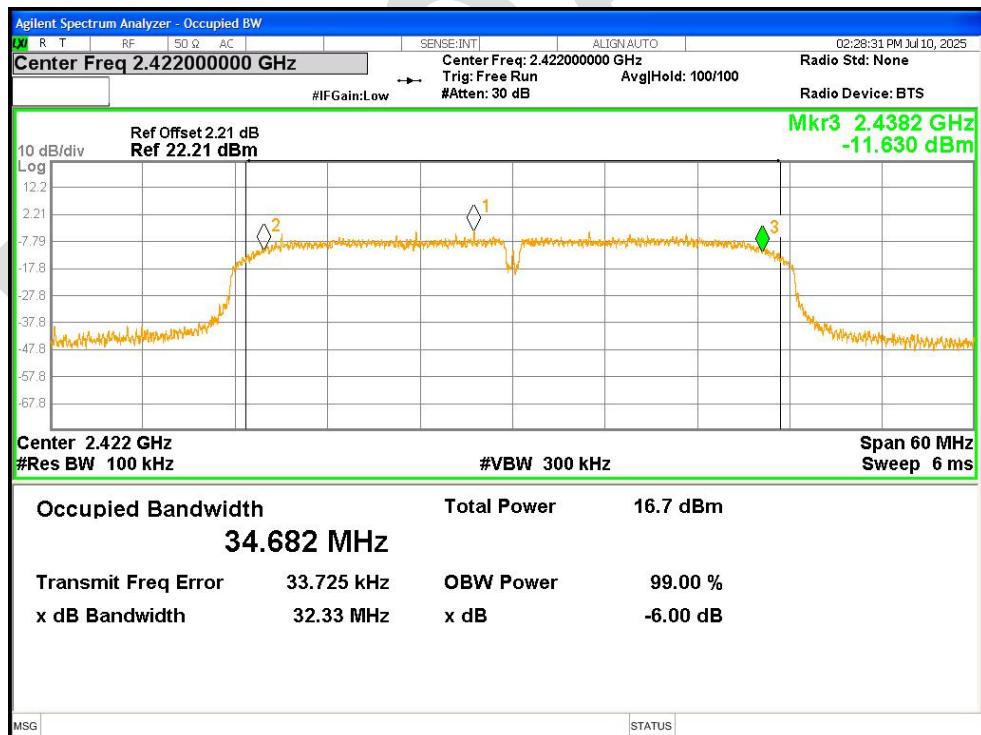

-6dB Bandwidth NVNT n40 2437MHz Ant1

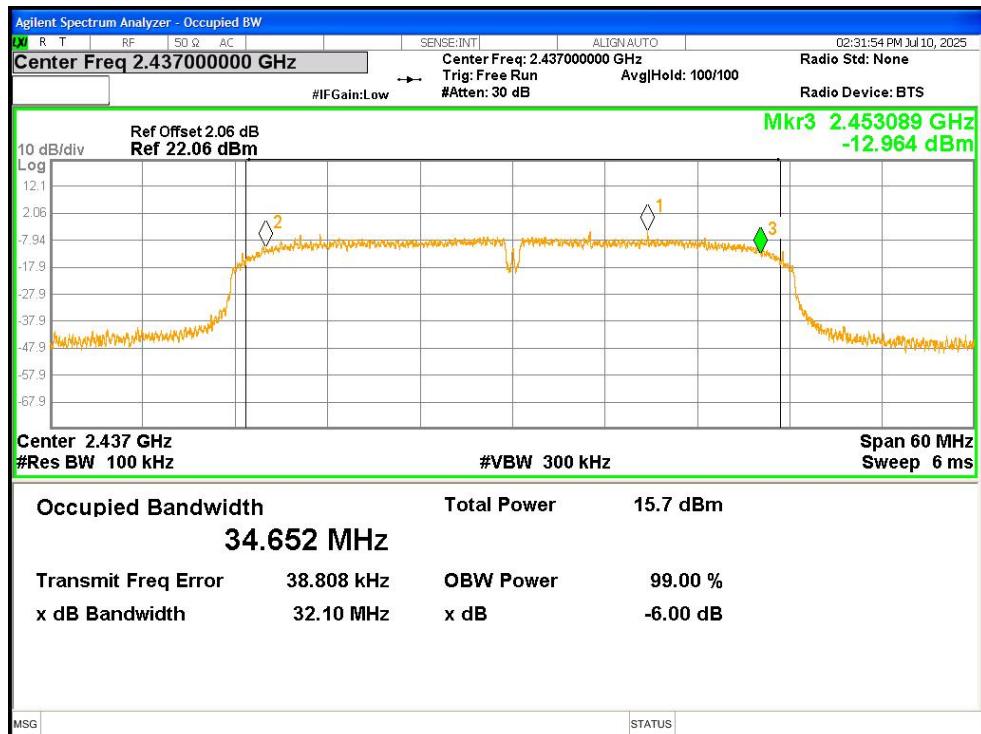


-6dB Bandwidth NVNT n40 2452MHz Ant1

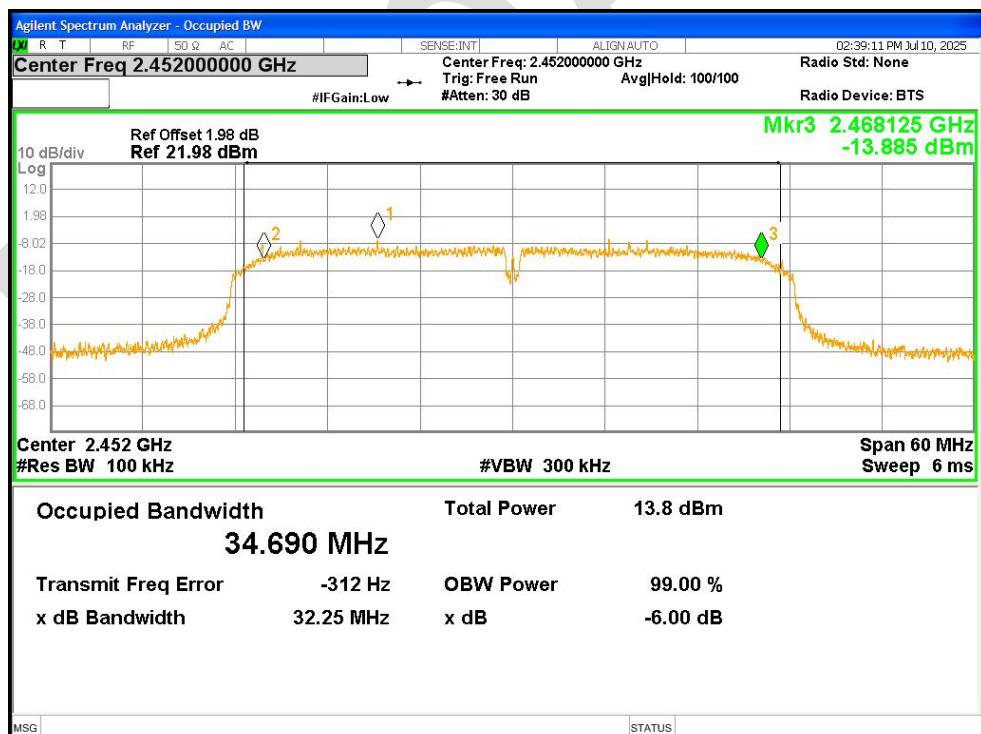


### 7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.890
NVNT	b	2437	Ant1	12.857
NVNT	b	2462	Ant1	12.958
NVNT	g	2412	Ant1	16.750
NVNT	g	2437	Ant1	16.681
NVNT	g	2462	Ant1	16.700
NVNT	n20	2412	Ant1	17.902
NVNT	n20	2437	Ant1	17.845
NVNT	n20	2462	Ant1	17.859
NVNT	n40	2422	Ant1	34.665
NVNT	n40	2437	Ant1	34.618
NVNT	n40	2452	Ant1	34.702

## OBW NVNT b 2412MHz Ant1

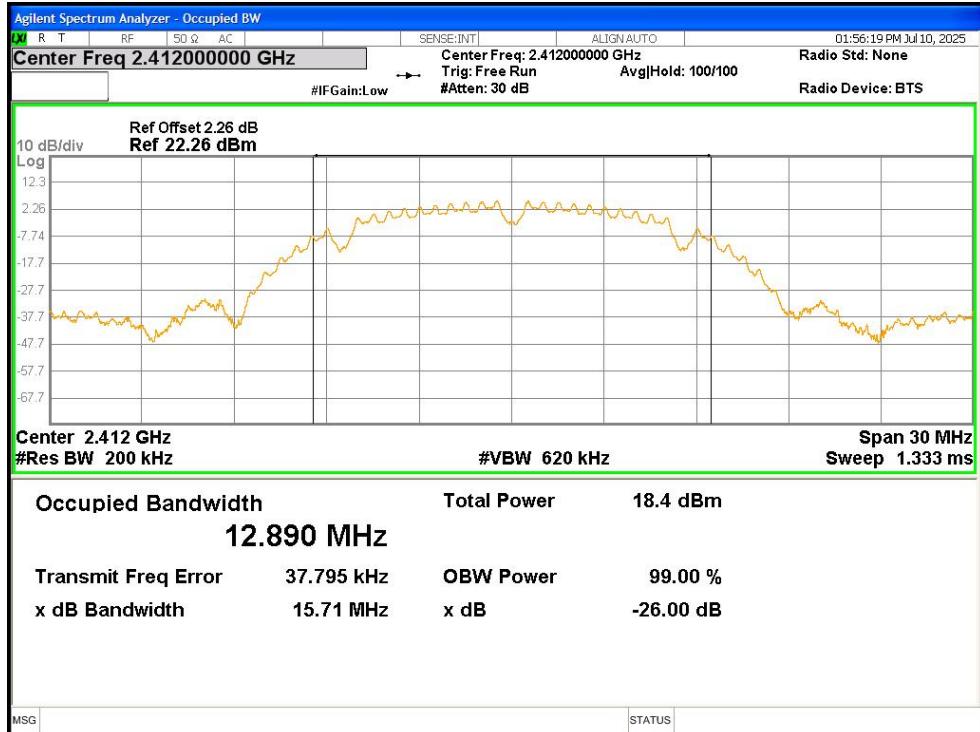

## OBW NVNT b 2437MHz Ant1

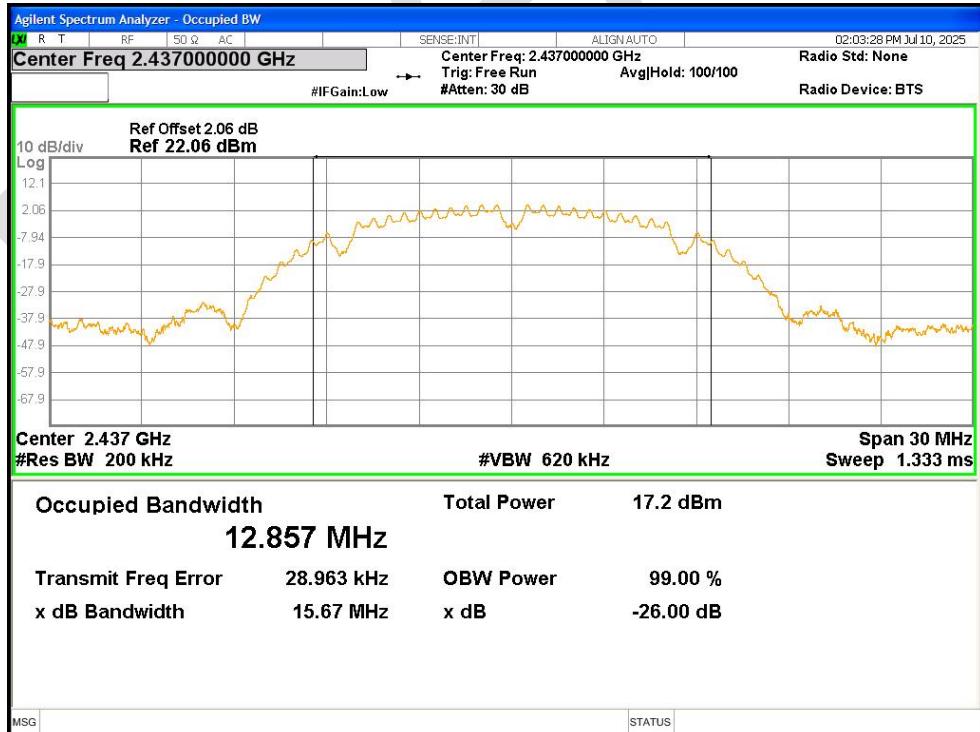


## OBW NVNT b 2462MHz Ant1

**BlueAsia** of Technical Services (Shenzhen) Co.,Ltd.


Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

Version:v1.2

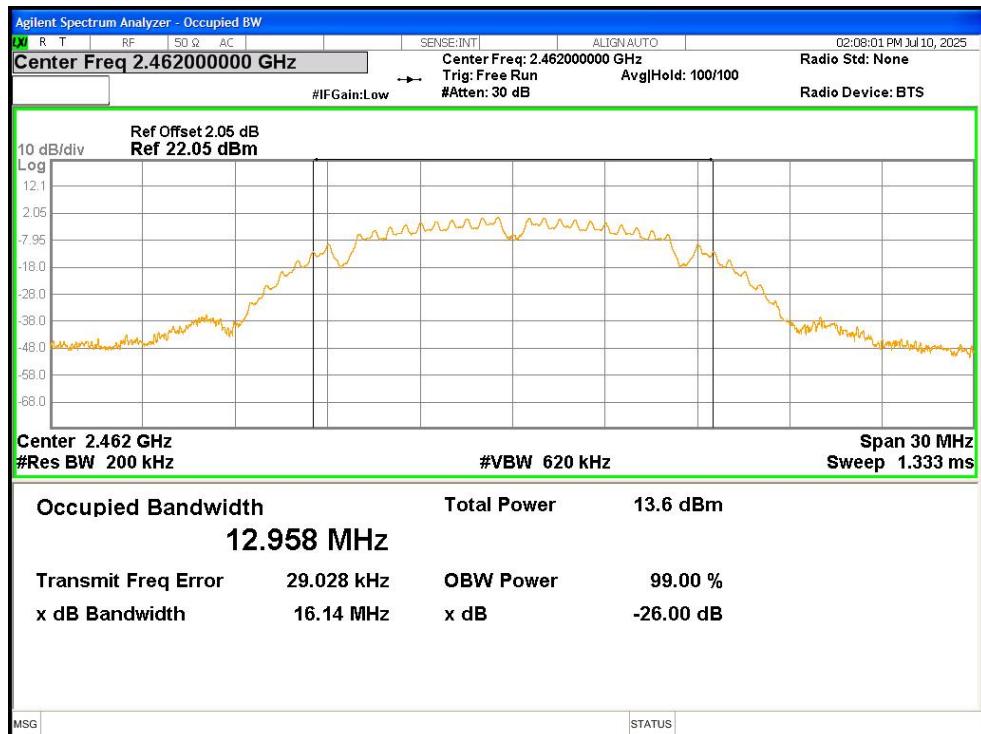

OBW NVNT g 2412MHz Ant1

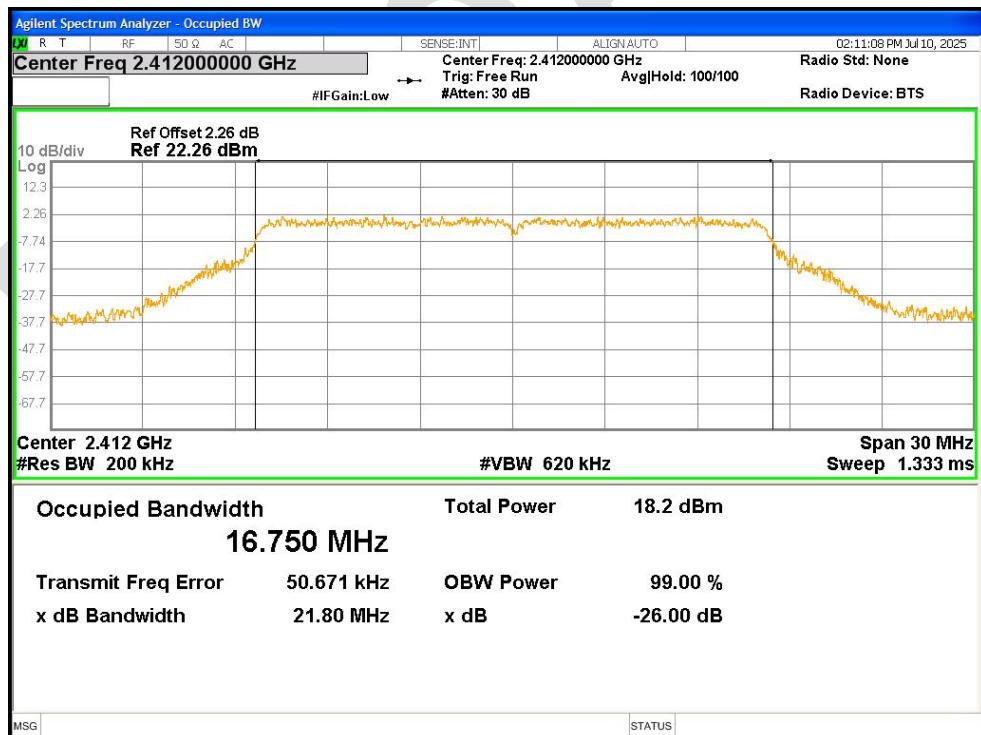

OBW NVNT g 2437MHz Ant1