

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



产品规格书

PRODUCT SPECIFICATION

客 户:	Gopod Group Limited.
CUSTOMER:	
客户料号:	3010800358
CUST P/N:	
金赞料号:	J30-000068-001
K C P/N:	
产品型号:	20.5*40*0.08*80P*11TS*5MM
D E S E :	
日 期:	2024.1.6
D A T E :	
版 本:	A.0
VERSION :	

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	批准 APPROVED BY
陈佳佳			

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

版本变更履历
Version Change History

客户料号: CUST P/N	
金赞型号: KC DESE	20.5*40*0.08*80P*11TS*5MM

版本 Rev.	变更前 Before Change	变更后内容 DESCRIPTION (Content Or Reason For Changed)	日期 Date	修订者 Revisor
A.0	--	新发行 (Initial Release)	2024/1/6	陈佳佳

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY
陈佳佳	吕树奇

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com 文件编号 FilNo: KC-JZ-09-008


东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N金赞型号:
KC DESE

20.5*40*0.08*80P*11TS*5MM

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

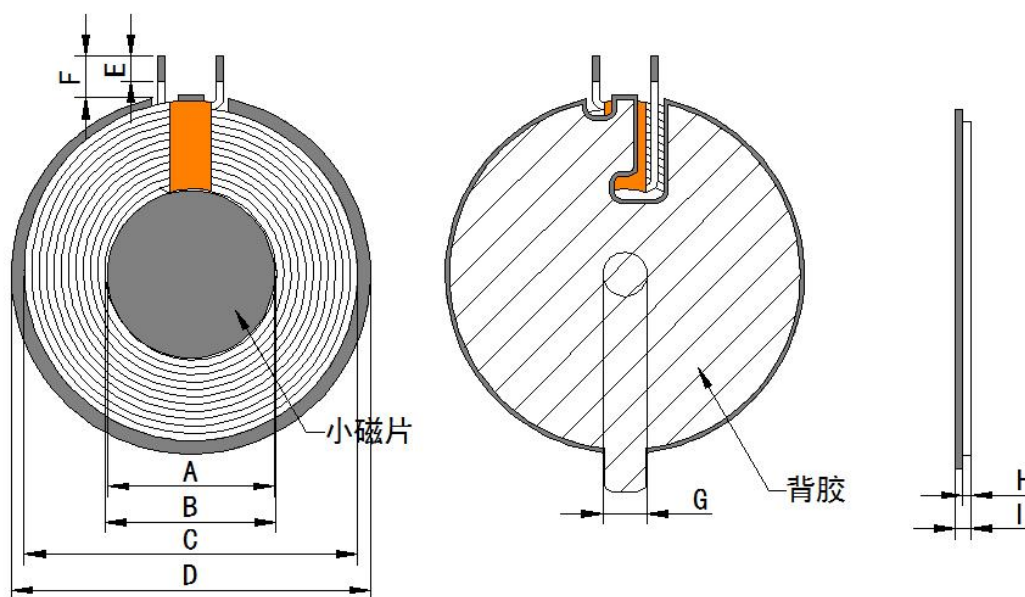

单位(Unit):毫米(mm)

A	B	C	D	E	F	G	H	I
20±1	20.5±0.5	40MAX	43+0-1	3±1	5±1	5.3±0.5	1.10±0.5	2.3MAX

PS:1. (F) Length of magnetic lead wire; 2. (H) Including inlet wire, excluding release paper.

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
11TS	0.08*80P 热风绞线 (Stranded wire)	密绕 (Close)	逆时针 (Anticlockwise)	是 (Yes)	反贴 (Anti/-Paste)

拟制
PREPARED BY

陈佳佳

工程审核
ENGINEER CHECKED BY

吕树奇

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N金赞型号:
KC DESE

20.5*40*0.08*80P*11TS*5MM

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE: 25±10℃, 湿度 RELATIVE HUMIDITY: 65±10%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	线圈加磁片: 7.9uH±10%	100kHz/V	LCZ METER 1062

3. 材料清单 (BILL OF MATERIALS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code
1	Wire	0.08*80P Hot air stranding	JX-2U-F-0008	ZY
2	Ferrite	G43+0-1*5.3*0.8H (With hole, with double slot L slot)	GCP-T-00189	KL
3	Double-sided tape	42*0.08H (No holes, slotted on the upper right corner with hand tear)	SMJ-T-0064	WY
4	Gold Finger Tape	5mm	High temperature adhesive tape 5MM	JRM
5	glue	JS-E7202 (Thickening) White glue	E7202W	HZY
6	Tin Bar	Environmentally friendly lead-free solder bar	Lead-free high temperature solder bar	XC
7	Small magnetic disk	Round 20*0.8H	GCP-T-0080	HBC
8	Small double-sided tape	15*0.08H Hand tear	SMJ-T-0056	WY

拟制
PREPARED BY

陈佳佳

工程审核
ENGINEER CHECKED BY

吕树奇

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008