

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



PRODUCT SPECIFICATION

广东高普达集团股份有限公司

CUSTOMER: _____

CUST P/N: 3010800358 _____

K C P/N: J30-000068-001

D E S E : 20.5*40*0.08*80P*11TS*5MM _____

D A T E : Jan. 06, 2024 _____

VERSION : A.0 _____

ACCEPTANCE STAMP

PREPARED BY	MERCHANDISER	ENGINEER CHECKED BY	APPROVED BY
Chen jiajia			

Address: No. 2, Xisha Road, Shijie Town, Dongguan City

Tel: 86-076986018114 Fax: 86-076986015646

[Http://www.jzcoil.com](http://www.jzcoil.com)

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Version Change History	CUST P/N :	
	KC DESE :	20. 5*40*0. 08*80P*11TS*5MM

[illegible]

PREPARED BY	ENGINEER CHECKED BY
Chen jiajia	Lv shuqi

Address: No. 2, Xisha Road, Shijie Town, Dongguan City
Tel: 86-076986018114 **Fax:** 86-076986015646

[Http://www.jzcoil.com](http://www.jzcoil.com)

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED


Specification

CUST P/N :

KC DESE :

20.5*40*0.08*80P*11TS*5MM

1. OVERALL DIMENSIONS OF PRODUCTS:

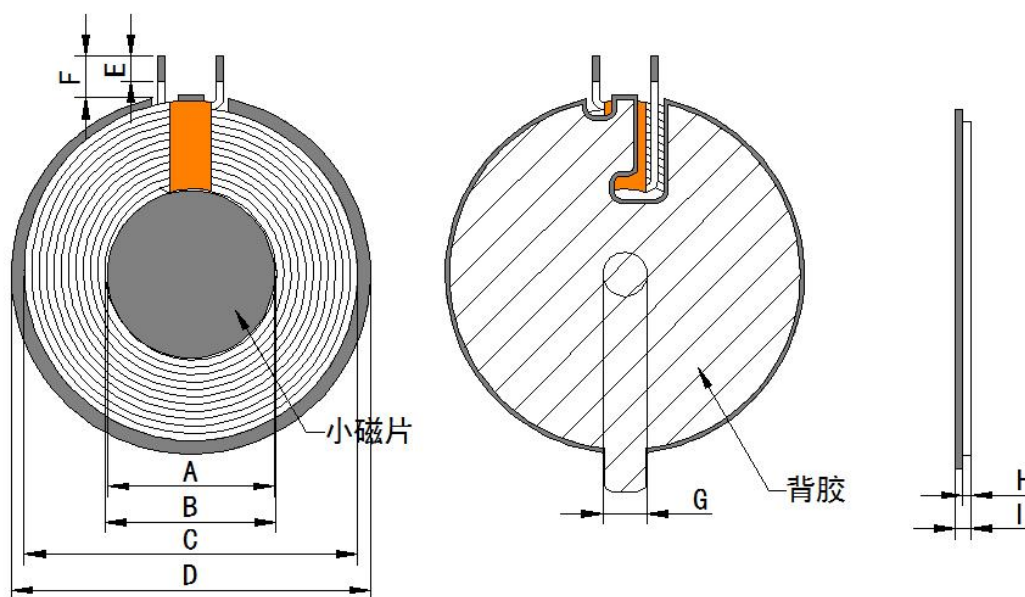

Unit: mm

A	B	C	D	E	F	G	H	I
20±1	20.5±0.5	40MAX	43+0-1	3±1	5±1	5.3±0.5	1.10±0.5	2.3MAX

PS:1. (F) Magnetic external lead length; 2. (H) Includes the inlet but excludes the release paper.

Turns	Wire Dia.	Wdg. Type Spred/Close	Wdg. Direction	Intersect Yes/Not	Coil Positive/Anti Paste
11TS	0.08*80P (Stranded wire)	(Close)	(Anticlockwise)	Yes	Anti/-Paste

All materials must meet the ROHS standards.

PREPARED BY	ENGINEER CHECKED BY
Chen jiajia	Lv shuqi

Address: No. 2, Xisha Road, Shijie Town, Dongguan City
 Tel: 86-076986018114 Fax: 86-076986015646

[Http://www.jzcoil.com](http://www.jzcoil.com)

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N :

KC DESE :

20.5*40*0.08*80P*11TS*5MM

2. ELECTRICAL CHARACTERISTICS:

TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, RELATIVE HUMIDITY: $65 \pm 10\%$

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND	S-F	Coil with magnetic sheet: $7.9\mu\text{H} \pm 10\%$	100kHz/V	LCZ METER 1062

3. BILL OF MATERIALS:

NO.	Material name	Description	Material Code	Vendor code
1	wire rod	0.08 * 80P hot air twisted wire	JX-2U-F-0008	ZY
2	ferrite	G43+0-1*5.3*0.8H (With holes and double slots, L-shaped slot)	GCP-T-00189	KL
3	double faced adhesive tape	42*0.08H (No holes. A slot is made on the upper right corner for tearing off.	SMJ-T-0064	WY
4	Gold Finger Adhesive Tape	5mm	High-temperature adhesive tape 5MM	JRM
5	glue	JS-E7202 (Thickened) White Adhesive	E7202W	HZY
6	tin bar	Environmentally friendly lead-free solder wire	Lead-free high-temperature solder wire	XC
7	Small magnetic disk	Circular shape, 20mm in diameter and 0.8mm in height.	GCP-T-0080	HBC
8	Small double-sided adhesive tape	15 x 0.08H with tear-off edge	SMJ-T-0056	WY

PREPARED BY

ENGINEER CHECKED BY

Chen jiajia

Lv shuqi

Address: No. 2, Xisha Road, Shijie Town, Dongguan City

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008