

RADIO TEST REPORT

FCC ID: 2AR5X-0544MM60W

Product: VM LIGHT&PLAY 21.5-1500

Trade Name: N/A

Model Name: 0103_0544MM_60W

Serial Model: 0103_0544MM_41W, 0103_0630MM_65W

Report No.: UNIA2018121914FR-01

Prepared for

VITRINEMEDIA Enterprise

50 route de la Reine 92100 Boulogne-Billancourt FRANCE

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, XixiangStr, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name : VITRINEMEDIA Enterprise

Address : 50 route de la Reine 92100 Boulogne-Billancourt FRANCE

Manufacture's Name : VITRINEMEDIA Enterprise

Address : 50 route de la Reine 92100 Boulogne-Billancourt FRANCE

Product description

Product name..... : VM LIGHT&PLAY 21.5-1500

Trade Mark : N/A

Model and/or type reference : 0103_0544MM_60W, 0103_0544MM_41W,
0103_0630MM_65W

Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

KDB558074 D01 V05r01: Guidance for Compliance
Measurements on Digital Transmission Systems (DTS) ,Frequency
Hopping Spread Spectrum System(HFSS), and Hybrid System
Devices Operating Under §15.247 of The FCC rules.

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test : Dec. 14, 2018

Date (s) of performance of tests..... : Dec. 14, 2018 -- Jan. 17, 2019

Date of Issue..... : Jan. 17, 2019

Test Result..... : Pass

Prepared by:


Kahn yang/Editor

Reviewer:


Shenwin Chan/ Supervisor

Approved & Authorized Signer:


Liuze/Manager

Table of Contents

1	TEST SUMMARY	4
1.1	<i>Environment conditions.....</i>	4
1.2	<i>SUMMARY of TEST RESULTS.....</i>	4
1.3	<i>TEST FACILITY.....</i>	4
1.4	<i>MEASUREMENT UNCERTAINTY.....</i>	5
2	GENERAL INFORMATION	6
2.1	<i>GENERAL DESCRIPTION OF EUT.....</i>	6
2.2	<i>CARRIER FREQUENCY OF CHANNELS.....</i>	6
2.3	<i>OPARATION OF EUT DURING TESTING.....</i>	7
2.4	<i>DESCRIPTION OF TEST SETUP</i>	7
2.5	<i>MEASUREMENT INSTRUMENTS LIST.....</i>	7
2.6	<i>Special Accessories</i>	8
3	TEST CONDITIONS AND RESULTS	9
3.1	<i>CONDUCTED EMISSIONS TEST.....</i>	9
3.2	<i>RADIATED EMISSION TEST.....</i>	12
3.3	<i>CONDUCTED OUTPUT POWER</i>	21
3.4	<i>POWER SPECTRAL DENSITY.....</i>	22
3.5	<i>-6dB BANDWIDTH.....</i>	25
3.6	<i>OUT-OF BAND EMISSIONS.....</i>	28
3.7	<i>ANTENNA REQUIREMENT.....</i>	34
4	PHOTOGRAPH OF TEST	35
5	PHOTOGRAPH OF EUT	36

1 TEST SUMMARY

1.1 Environment conditions

During the measurement the environment condition were within the listed ranges:

Normal temperature	25°C
Relative humidity	55%
Air pressure	101KPa

1.2 SUMMARY of TEST RESULTS

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3 TEST FACILITY

Test Firm :Shenzhen United Testing Technology Co.,Ltd.

Address :2F, Annex Bldg, JiahuangyuanTech Park, #365 Baotian 1 Rd,Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen,China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L6494

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

Designation Number: CN1227

Test Firm Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files.

1.4 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	VM LIGHT&PLAY 21.5-1500
Trade Mark	N/A
Model Name	0103_0544MM_60W
Serial No.	0103_0544MM_41W, 0103_0630MM_65W
Model Difference	There are several models of this product. The circuit principle and internal structure of each product are the same. Only the naming method and the appearance color are slightly different, and the power of the display is different. The others are the same, the main test model is:0103_0544MM_60W
FCC ID	2AR5X-0544MM60W
Antenna Type	External Antenna
Antenna Gain	2.5dBi
Frequency Range	802.11b/g/n20:2412~2462 MHz
Number of Channels	802.11b/g/n20: 11
Channels Separation	5MHz
Modulation Type	CCK/DSSS, OFDM
Battery	N/A
Power Source	DC 12V from adapter
Adapter Model	N/A

2.2 CARRIER FREQUENCY OF CHANNELS

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

2.3 OPERATION OF EUT DURING TESTING


The Applicant provides communication tools software (Realtek MPtool) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

802.11b/g/n20

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

Note: The line display in grey were the channel selected for testing

2.4 DESCRIPTION OF TEST SETUP



2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
CONDUCTED EMISSIONS TEST					
1	AMN	Schwarzbeck	NNLK8121	8121370	2019.09.09
2	AMN	ETS	3810/2	00020199	2019.09.09
3	EMI TEST RECEIVER	Rohde&Schwarz	ESCI	101210	2019.09.09
4	AAN	TESEQ	T8-Cat6	38888	2019.09.09
RADIATED EMISSION TEST					
1	Horn Antenna	Sunol	DRH-118	A101415	2019.09.29
2	BicoNILog Antenna	Sunol	JB1 Antenna	A090215	2019.09.29
3	PREAMP	HP	8449B	3008A00160	2019.09.09
4	PREAMP	HP	8447D	2944A07999	2019.09.09
5	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2019.09.09
6	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2019.09.28
7	Signal Generator	Agilent	E4421B	MY4335105	2019.09.28
8	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2019.09.28
9	MXA Signal Analyzer	Agilent	E4408B	MY51110104	2019.09.09
10	ANT Tower&Turn table Controller	Champro	EM 1000	60764	2019.09.28

11	Anechoic Chamber	Taihe Maorui	9m*6m*6m	966A0001	2019.09.09
12	Shielding Room	Taihe Maorui	6.4m*4m*3m	643A0001	2019.09.09
13	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2019.03.14
14	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2019.03.14
15	RF power divider	Anritsu	K241B	992289	2019.09.28
16	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2019.09.28
17	Biconical antenna	Schwarzbeck	VHA 9103	91032360	2019.09.08
18	Biconical antenna	Schwarzbeck	VHA 9103	91032361	2019.09.08
19	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2019.09.08
20	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2019.01.12
21	Active Receive Loop Antenna	Schwarzbeck	FMZB 1919B	00023	2019.11.02
22	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170651	2019.03.14
23	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2019.10.24
24	Active Loop Antenna	Com-Power	AL-130R	10160009	2019.05.10
25	Power Meter	KEYSIGHT	N1911A	MY50520168	2019.05.10

Note: The calibration interval was one year.

2.6 Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
YHY Power	AC Adapter	YHY-12003000 Input:AC 100-240V~ 50-60Hz,1.5A Output:12V---3000mA	---	FCC DOC
---	---	---	---	---

3 TEST CONDITIONS AND RESULTS

3.1 CONDUCTED EMISSIONS TEST

Limit


According to FCC CFR Title 47 Part 15 Subpart C Section 15.207 and RSS Gen 8.8, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

Test Setup

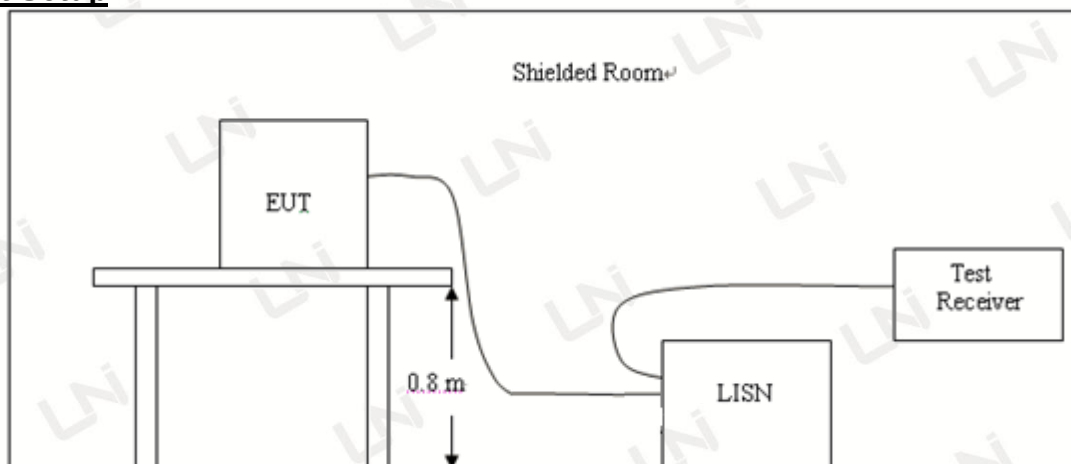

Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. A wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

Test Result


---PASS---


Remark:

- All modes of 802.11b/g/n were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below:
- Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

Temperature:	25°C	Relative Humidity:	48%
Test Date:	Jan. 08, 2019	Pressure:	1030hPa
Test Voltage:	AC 120V 50Hz	Polarization:	

Please refer to test data as follows:

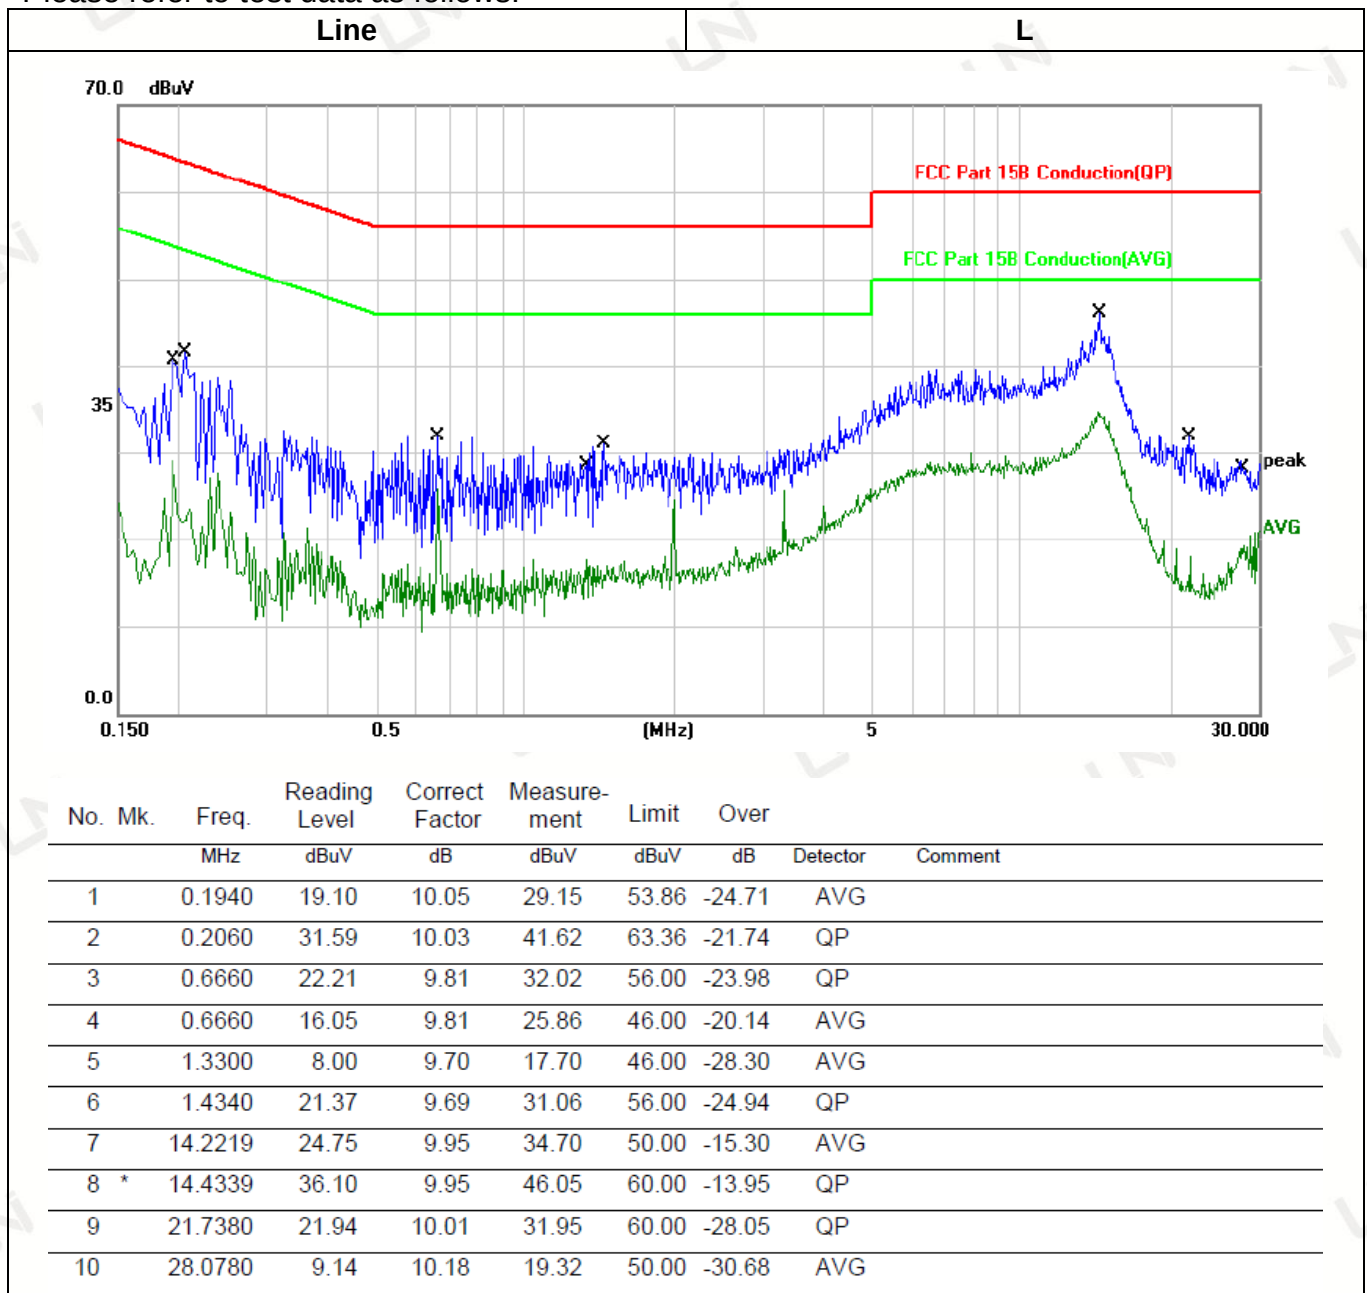

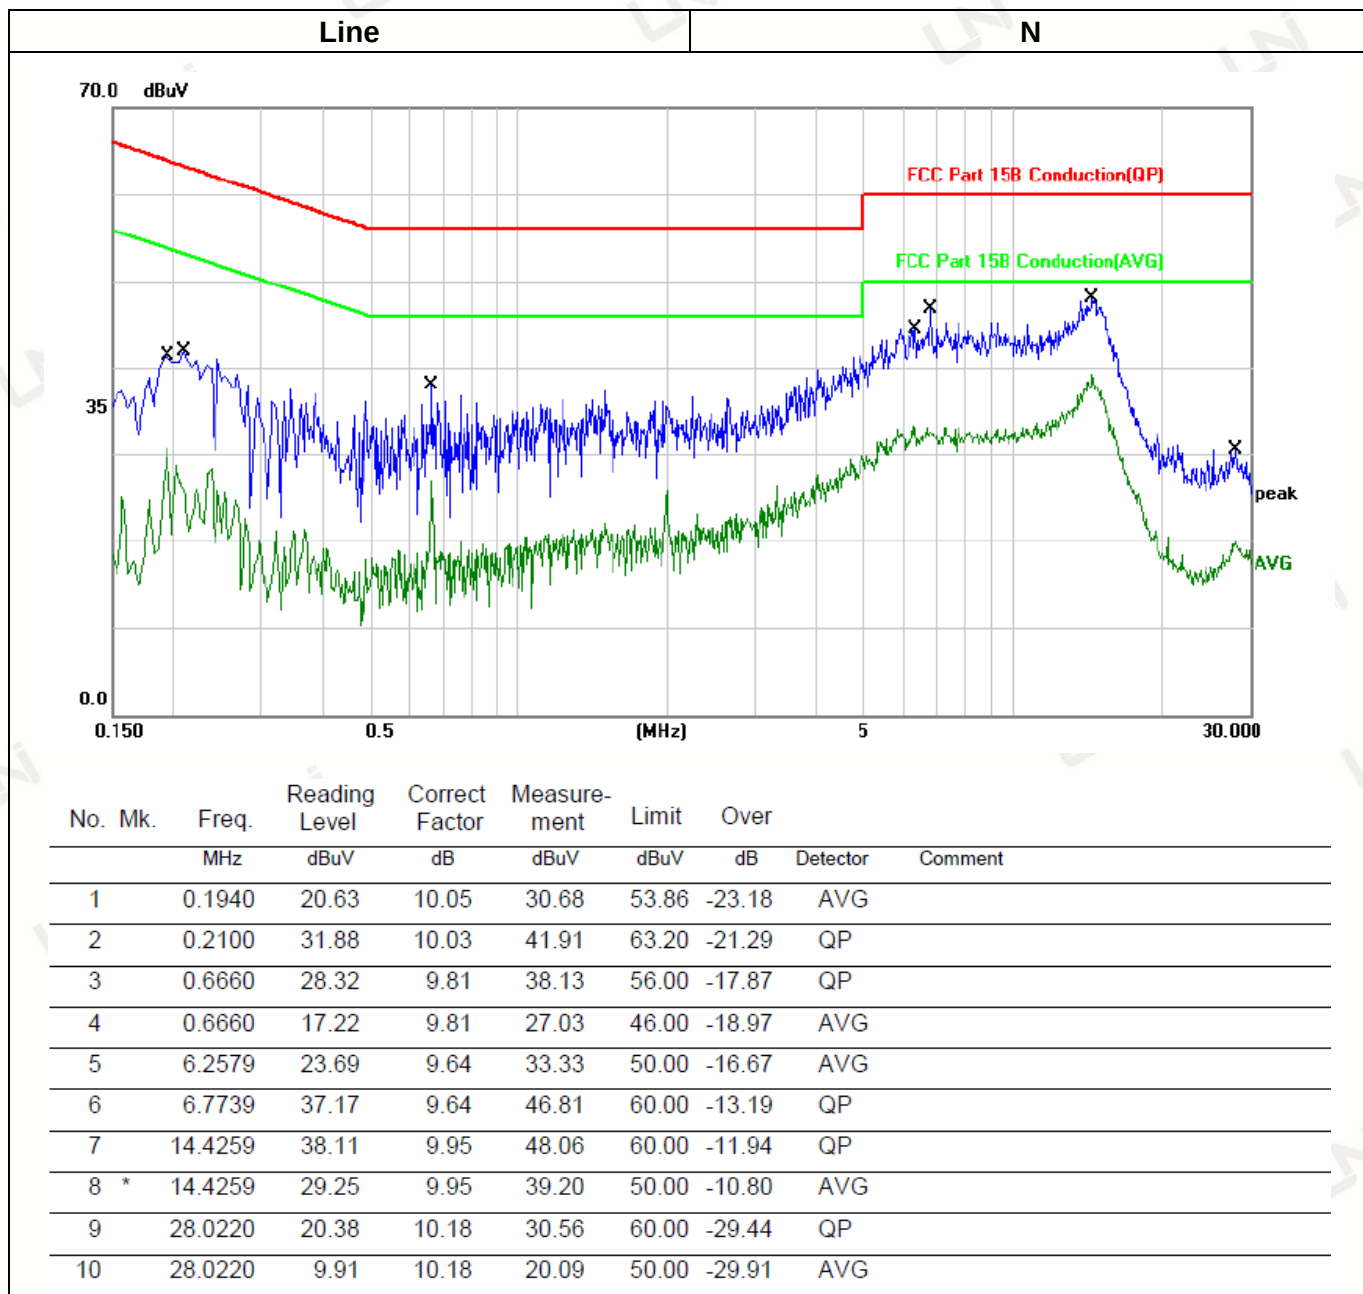

3.2 RADIATED EMISSION TEST

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission


Unwanted emissions that fall into restricted bands shall comply with the limits specified in RSS-Gen; and Unwanted emissions that do not fall within the restricted frequency bands shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Test Setup


1. Radiated Emission Test-Up Frequency below 30MHz

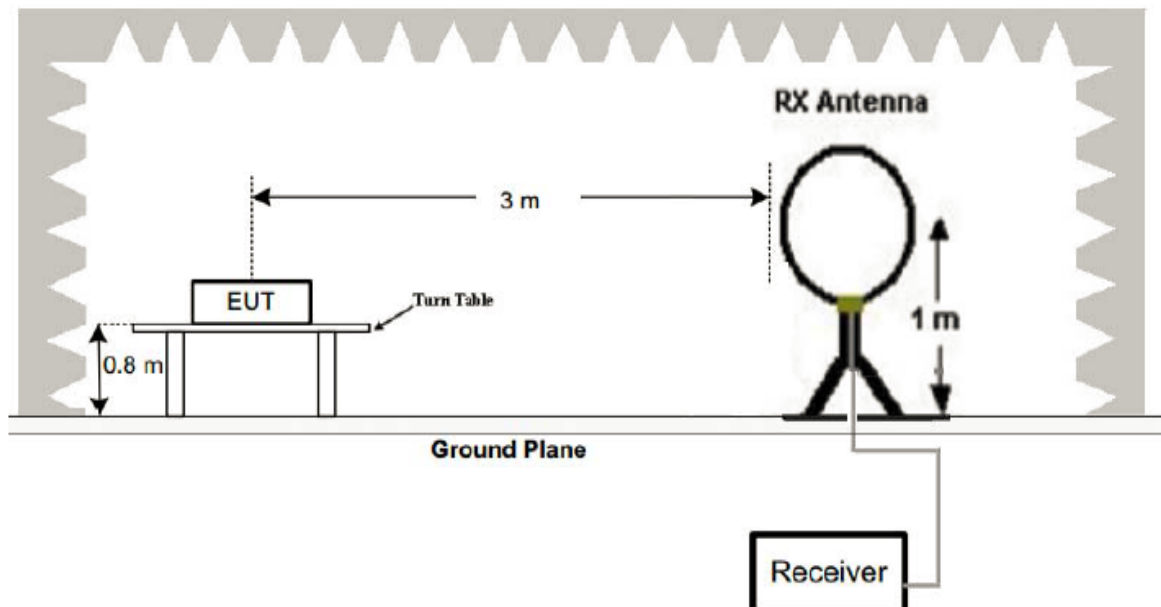

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

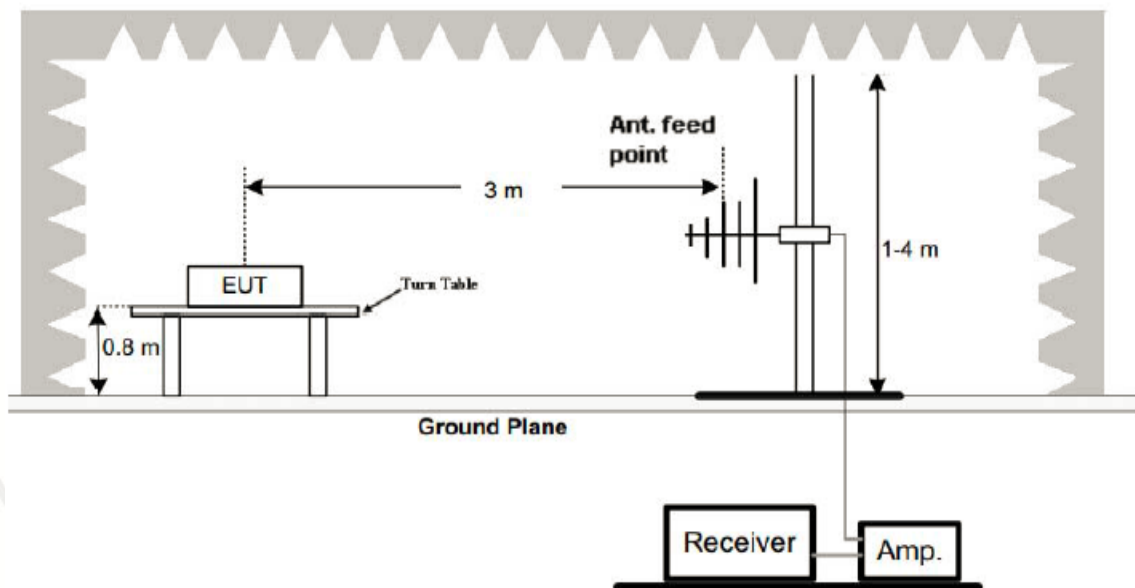

3. Radiated Emission Test-Up Frequency above 1GHz

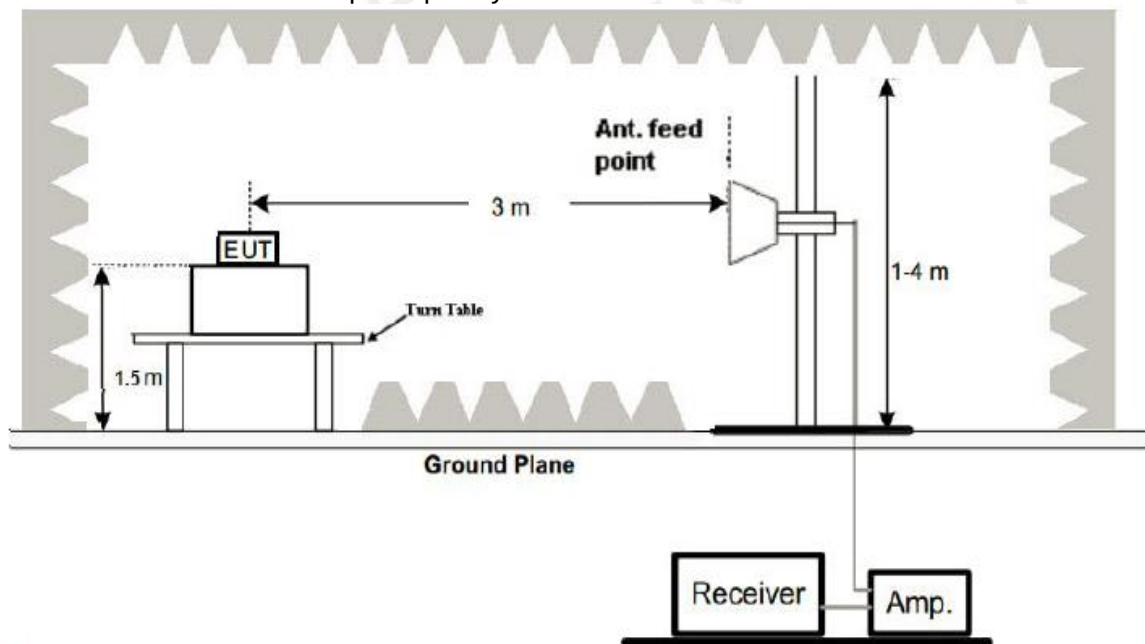

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS


---PASS---

Remark:


1. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
2. All three channels (lowest/middle/highest) of each mode were measured above 1GHz and recorded worst case at 802.11b mode.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

Below 1GHz Test Results:

Temperature:	25°C	Relative Humidity:	48%
Test Date:	Jan. 08, 2019	Pressure:	1030hPa
Test Voltage:	AC 120V 50Hz	Polarization:	Horizontal and Vertical

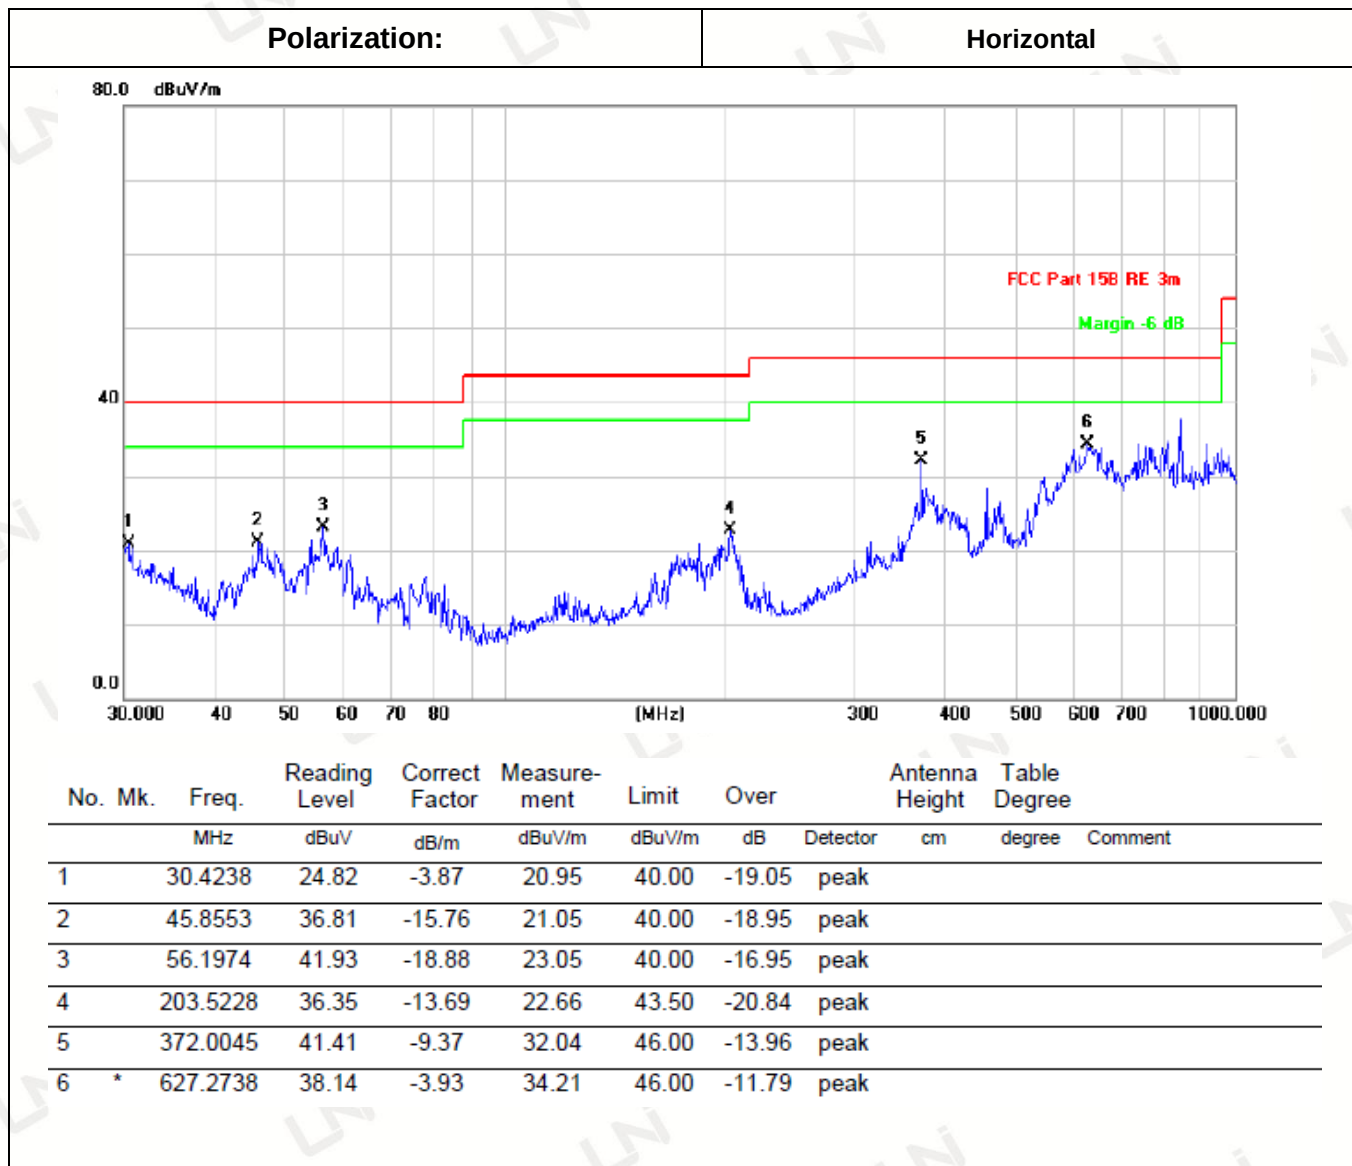

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier

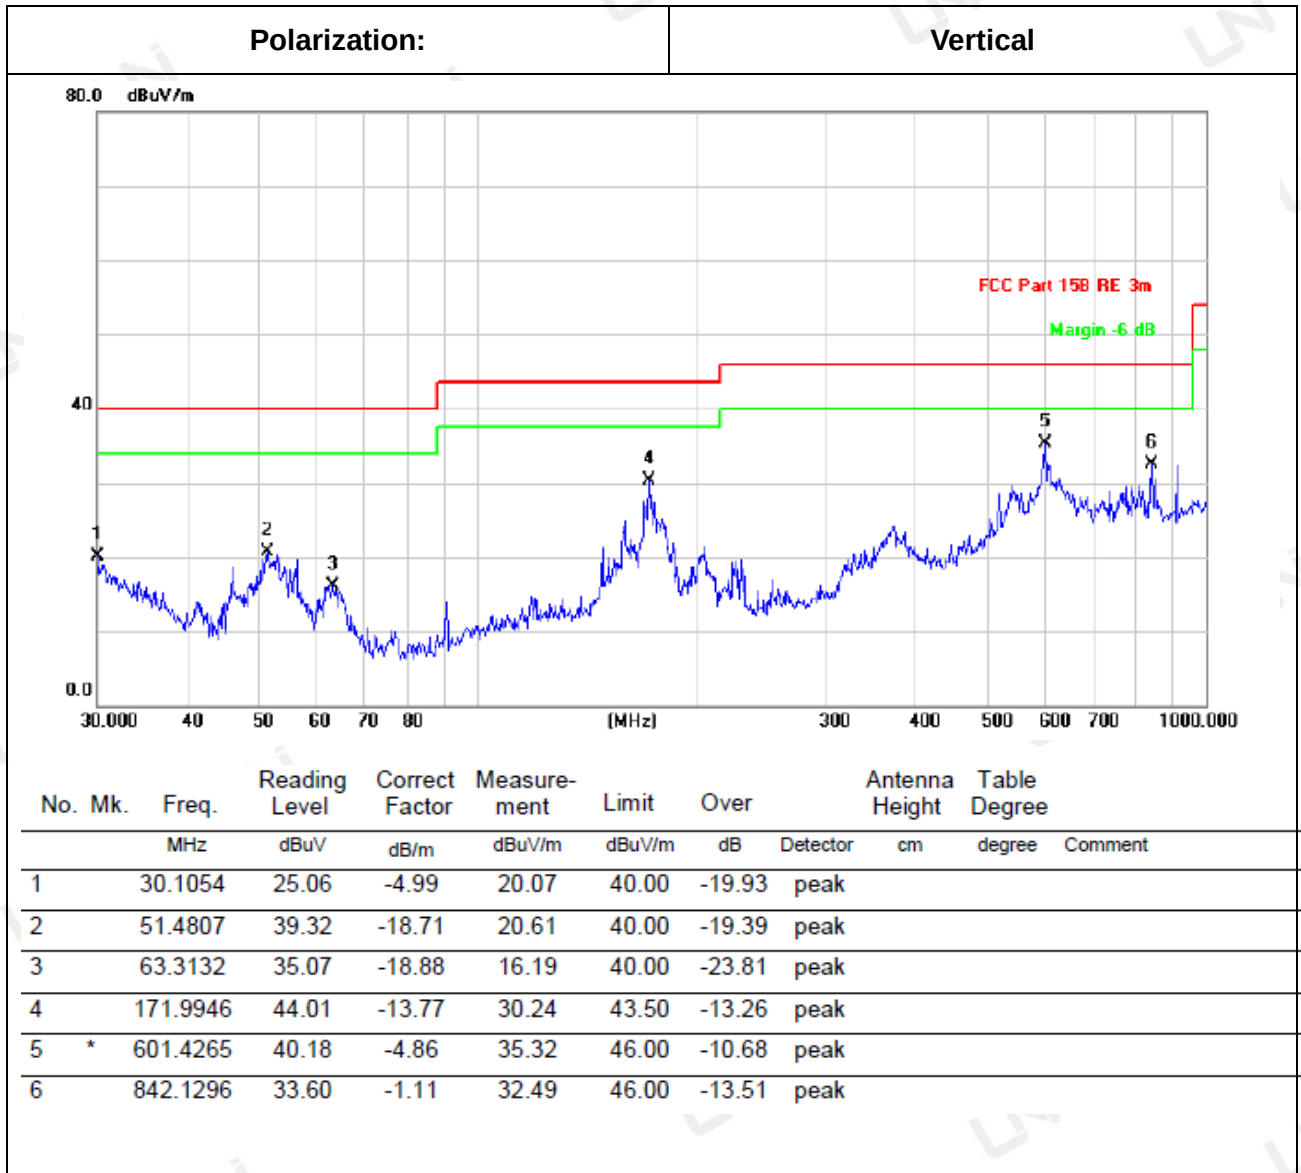

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier

Remark:

- (1) Measuring frequencies from 9 kHz to the 1 GHz, Radiated emission test from 9kHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results:

Note: 802.11b/802.11g/802.11n(H20) all have been tested, only worse case 802.11b is reported.

802.11b Mode (2412MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
4824.00	58.50	-3.64	54.86	74	19.14	PK
4824.00	45.20	-3.64	41.56	54	12.44	AV
7236.00	54.67	-0.95	53.72	74	20.28	PK
7236.00	42.37	-0.95	41.42	54	12.58	AV
--	--	--	--	--	--	--

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
4824.00	57.98	-3.64	54.34	74	19.66	PK
4824.00	45.77	-3.64	42.13	54	11.87	AV
7236.00	54.97	-0.95	54.02	74	19.98	PK
7236.00	43.41	-0.95	42.46	54	11.54	AV
--	--	--	--	--	--	--

802.11b Mode (2437MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
4874.00	58.26	-3.51	54.75	74	19.25	PK
4874.00	44.60	-3.51	41.09	54	12.91	AV
7311.00	54.58	-0.82	53.76	74	20.24	PK
7311.00	41.30	-0.82	40.48	54	13.52	AV
--	--	--	--	--	--	--

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
4874.00	58.04	-3.51	54.53	74	19.47	PK
4874.00	44.42	-3.51	40.91	54	13.09	AV
7311.00	54.76	-0.82	53.94	74	20.06	PK
7311.00	40.88	-0.82	40.06	54	13.94	AV
--	--	--	--	--	--	--

802.11b Mode (2462MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
4924	58.07	-3.43	54.64	74	19.36	PK
4924	45.85	-3.43	42.42	54	11.58	AV
7386	54.94	-0.75	54.19	74	19.81	PK
7386	43.66	-0.75	42.91	54	11.09	AV
--	--	--	--	--	--	--

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
4924	56.94	-3.43	53.51	74	20.49	PK
4924	43.92	-3.43	40.49	54	13.51	AV
7386	55.23	-0.75	54.48	74	19.52	PK
7386	42.62	-0.75	41.87	54	12.13	AV
--	--	--	--	--	--	--

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- (3) Margin= Limits –Emission Level
- (4) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (6) All modes of operation were investigated and the worst-case emissions are reported.

Radiated Band Edge Test:

Note: 802.11b/802.11g/802.11n (H20) all have been tested, only worse case 802.11b is reported

802.11b Mode (2412MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2336	61.19	-5.81	55.38	74	18.62	PK
2336	38.28	-5.81	32.47	54	21.53	AV
2390	58.49	-5.84	52.65	74	21.35	PK
2390	40.15	-5.84	34.31	54	19.69	AV
2400	68.37	-5.84	62.53	74	11.47	PK
2400	43.31	-5.84	37.47	54	16.53	AV

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2336	60.92	-5.81	55.11	74	18.89	PK
2336	37.24	-5.81	31.43	54	22.57	AV
2390	56.46	-5.84	50.62	74	23.38	PK
2390	39.64	-5.84	33.80	54	20.20	AV
2400	68.24	-5.84	62.40	74	11.60	PK
2400	43.23	-5.84	37.39	54	16.61	AV

802.11b Mode (2462MHz)

Horizontal (Worst case):

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2483.50	60.27	-5.65	54.62	74	19.38	PK
2483.50	37.22	-5.65	31.57	54	22.43	AV
2500.00	58.65	-5.65	53.00	74	21.00	PK
2500.00	40.95	-5.65	35.30	54	18.70	AV
2533.60	66.41	-5.72	60.69	74	13.31	PK
2533.60	43.98	-5.72	38.26	54	15.74	AV

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	58.46	-5.65	52.81	74	21.19	PK
2483.50	37.66	-5.65	32.01	54	21.99	AV
2500.00	59.08	-5.65	53.43	74	20.57	PK
2500.00	40.21	-5.65	34.56	54	19.44	AV
2533.60	66.22	-5.72	60.50	74	13.50	PK
2533.60	45.51	-5.72	39.79	54	14.21	AV

Remark:

- (1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- (2) Margin= Limits –Emission Level
- (3) -- Mean the PK detector measured value is below average limit.


3.3 CONDUCTED OUTPUT POWER

Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.



Test Result

---PASS---

Type	Channel	PK Output power (dBm)	Limit (dBm)	Result
802.11b	01	17.62	30.00	Pass
	06	17.44		
	11	17.13		
802.11g	01	16.67		
	06	16.34		
	11	16.10		
802.11n(HT20)	01	14.97		
	06	14.63		
	11	13.84		

Note: 1.The test results including the cable lose.

3.4 POWER SPECTRAL DENSITY

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.


Test Configuration




Test Results

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-13.08	8.00	Pass
	06	-13.23		
	11	-13.16		
802.11g	01	-15.58		
	06	-16.08		
	11	-15.15		
802.11n(HT20)	01	-16.63		
	06	-16.11		
	11	15.63		


Test plot as follows:

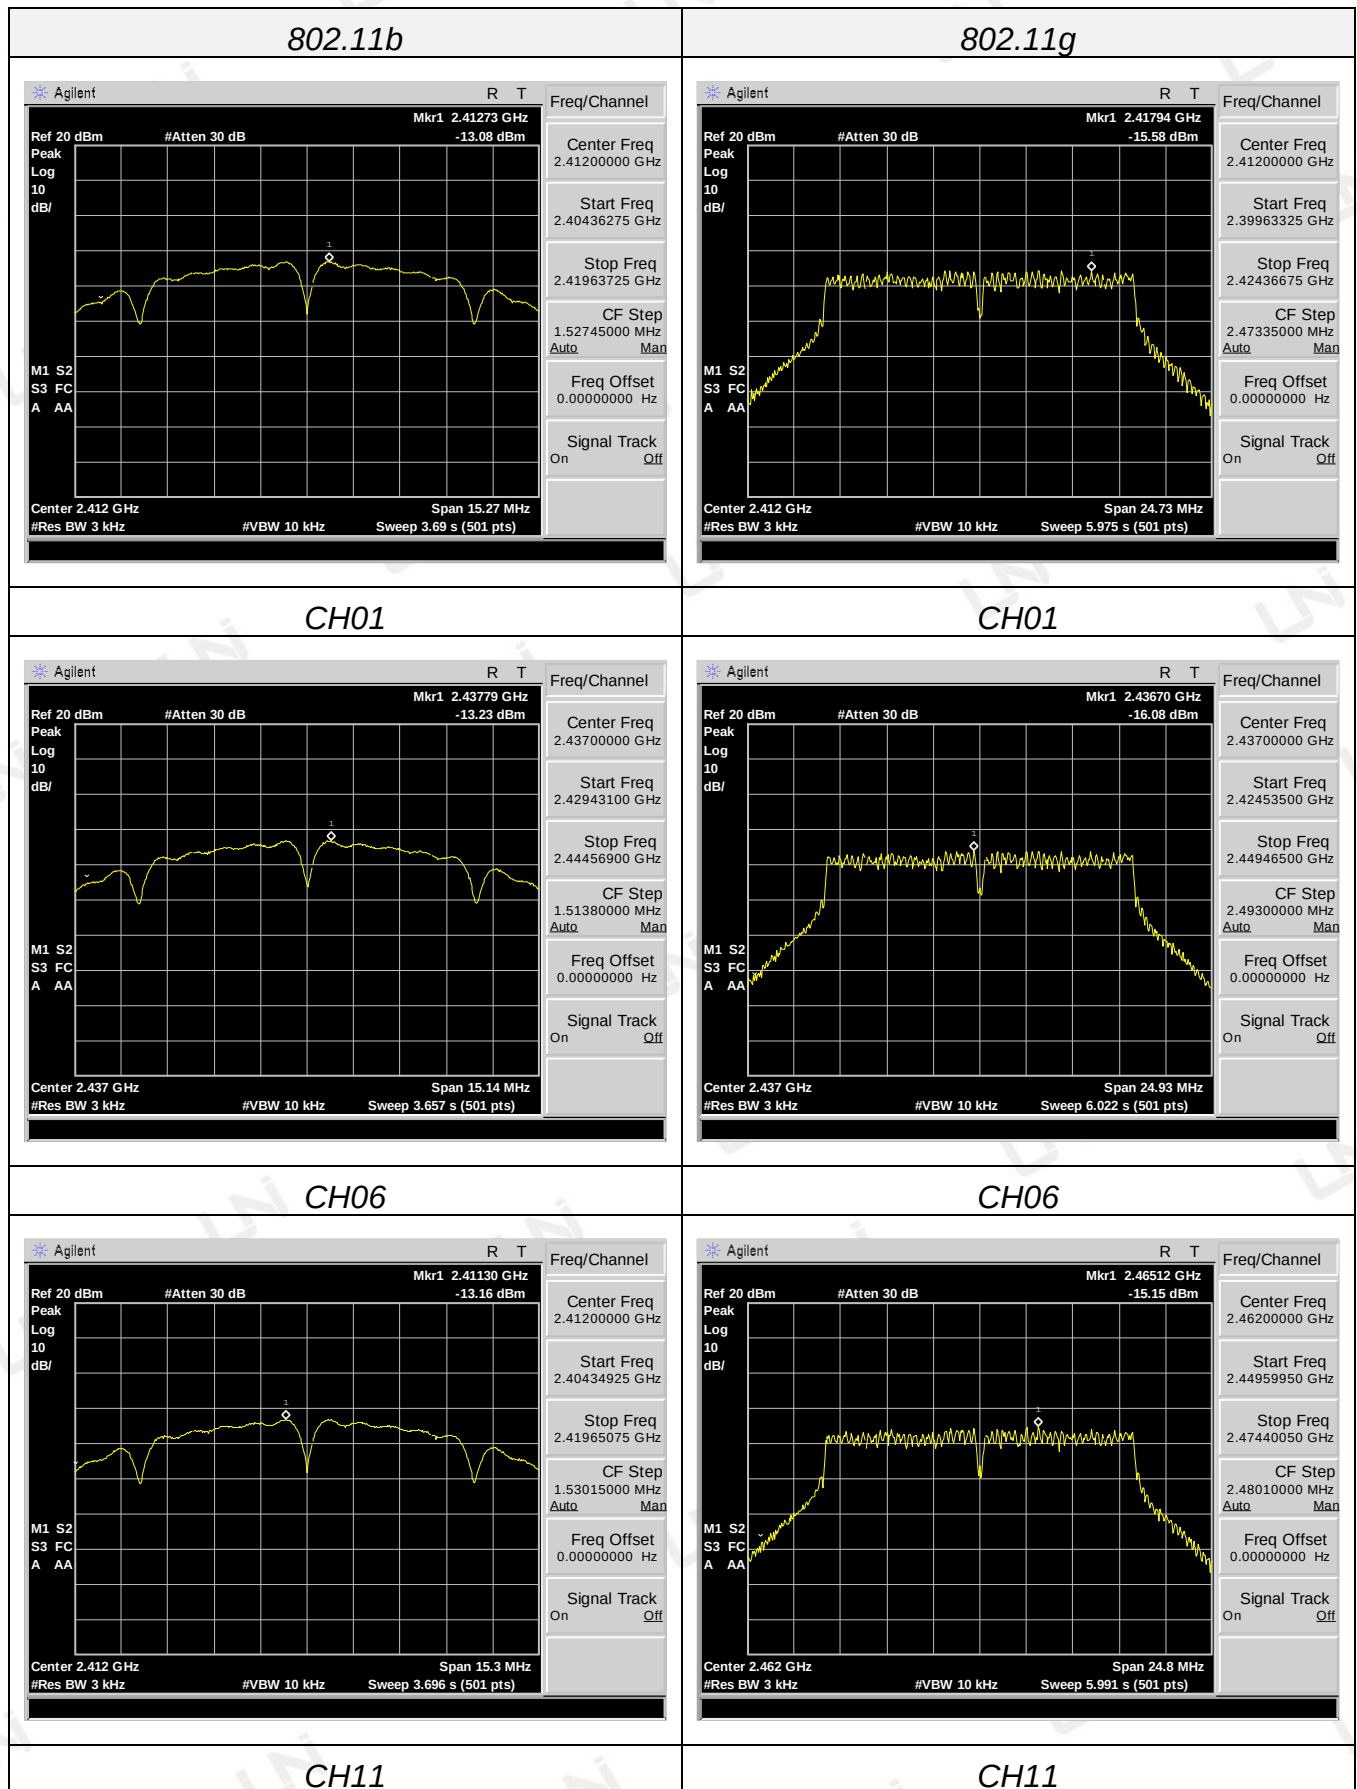


802.11n(HT20)

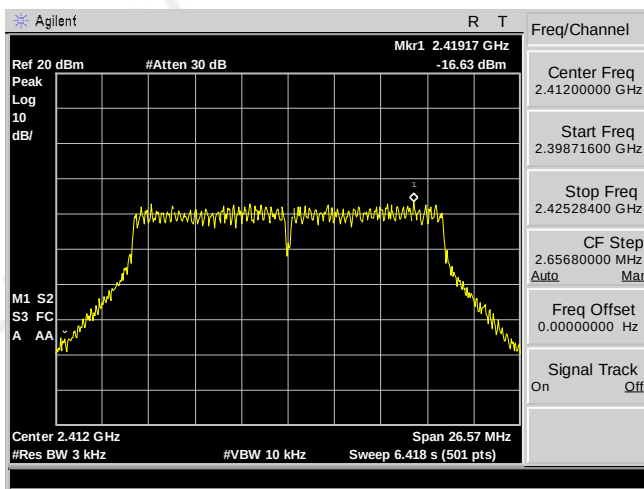

CH01

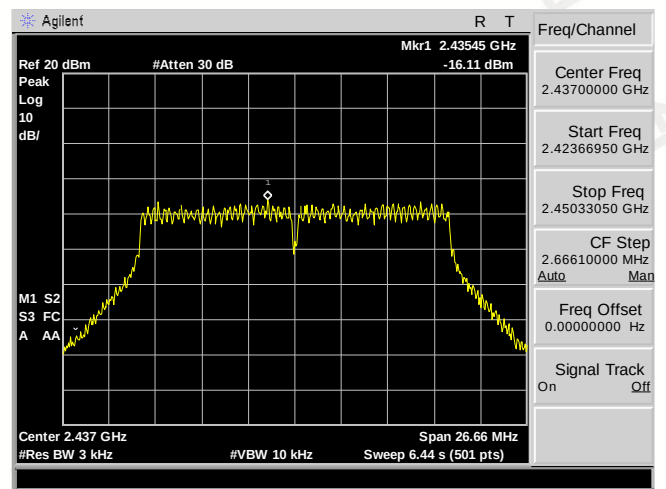

CH06

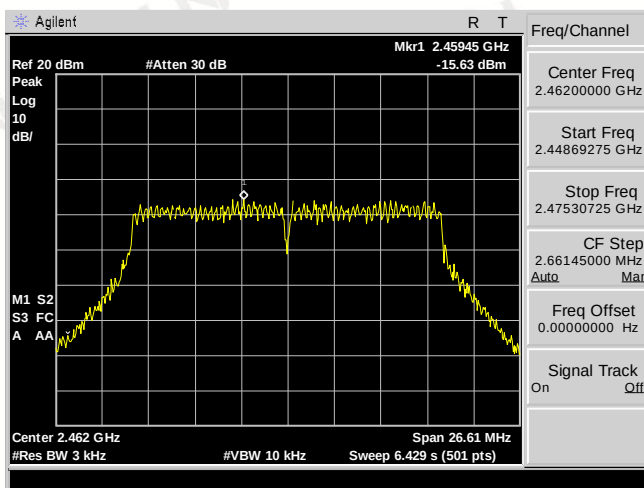

CH11

3.5 -6dB BANDWIDTH


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


Test Configuration




Test Results

Type	Channel	-6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	8.862	≥500	Pass
	06	10.008		
	11	9.976		
802.11g	01	15.211		
	06	16.544		
	11	16.567		
802.11n(HT20)	01	16.936		
	06	17.712		
	11	17.761		


Test plot as follows:

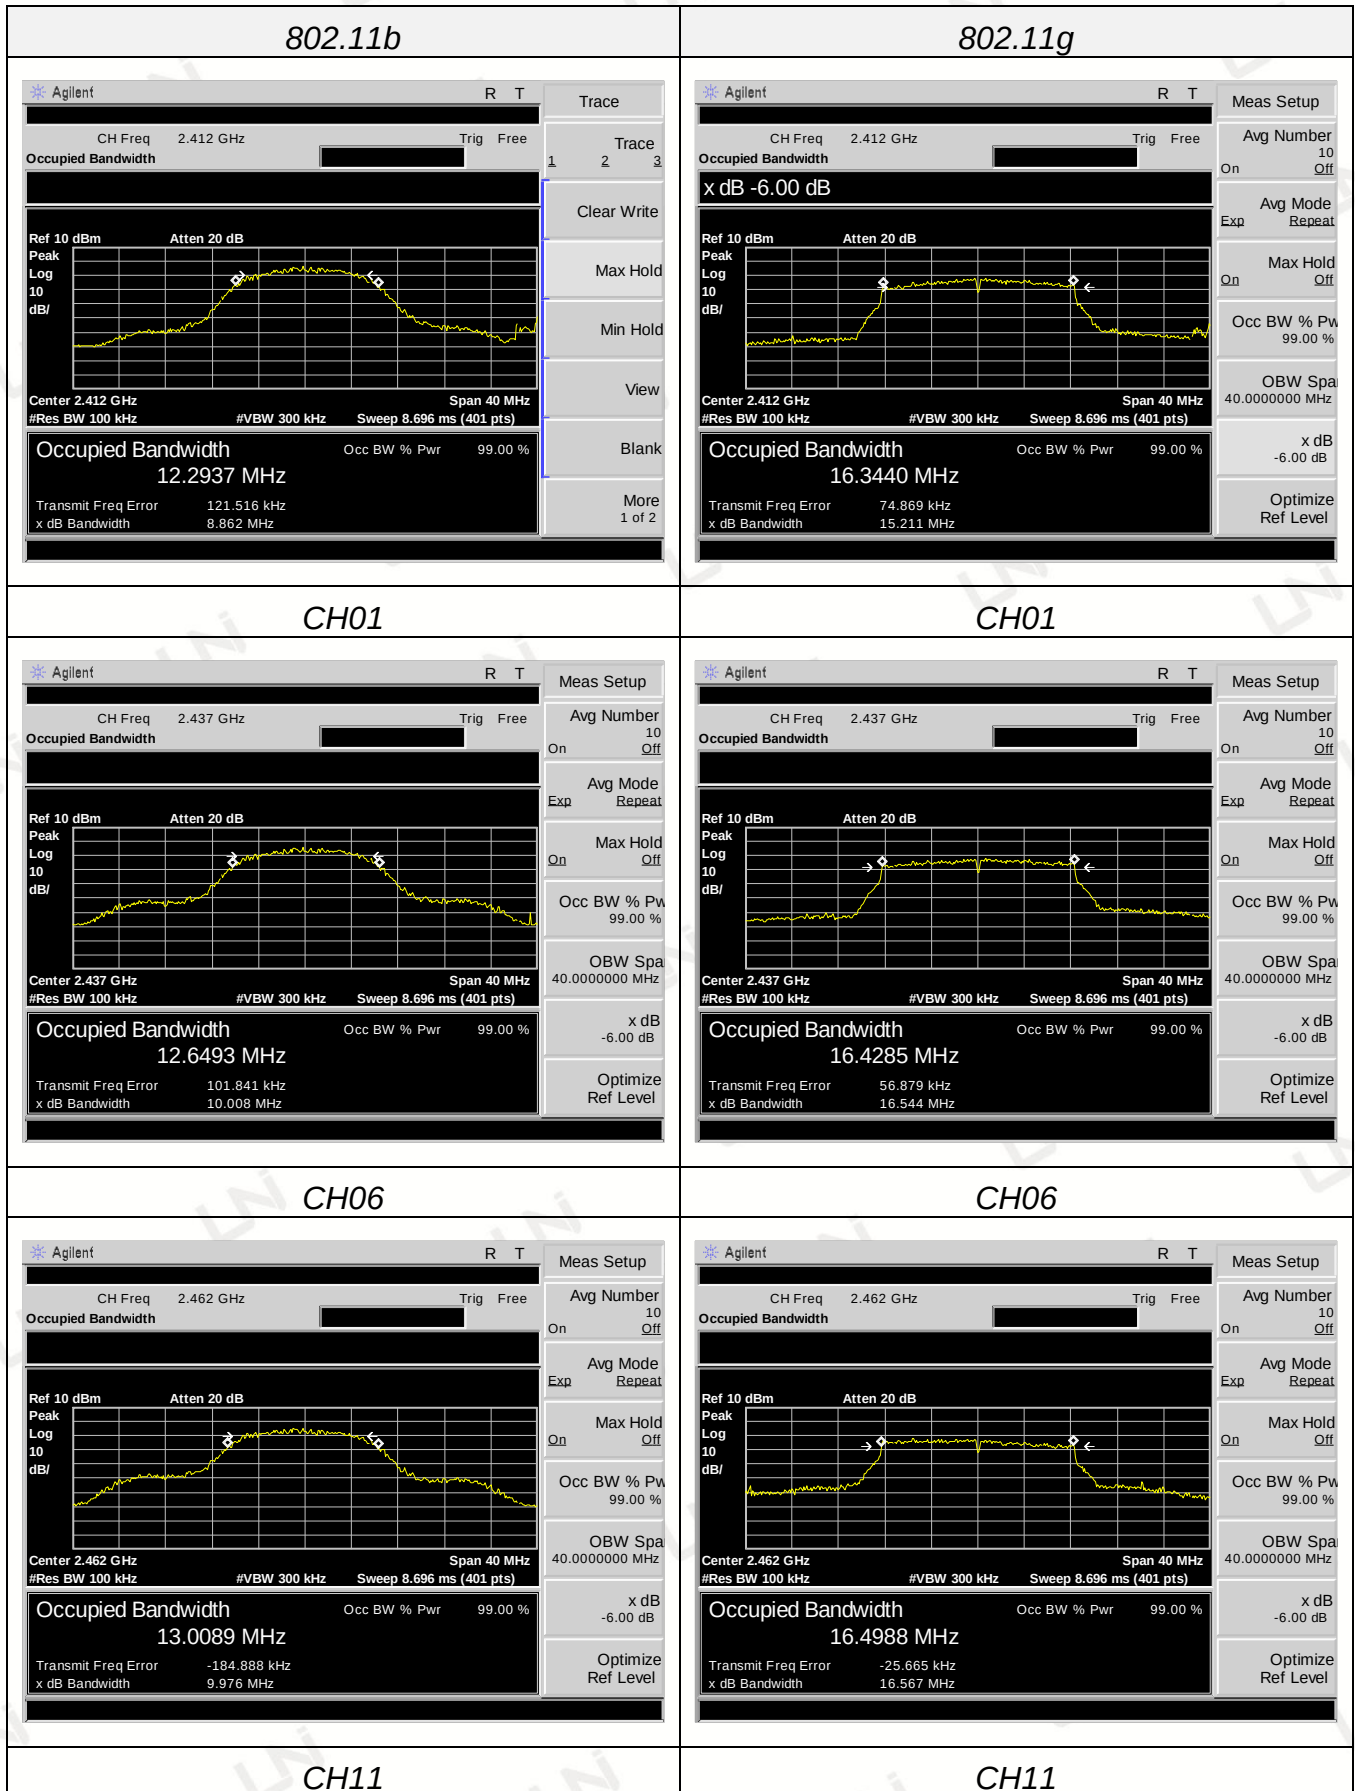


802.11n(HT20)

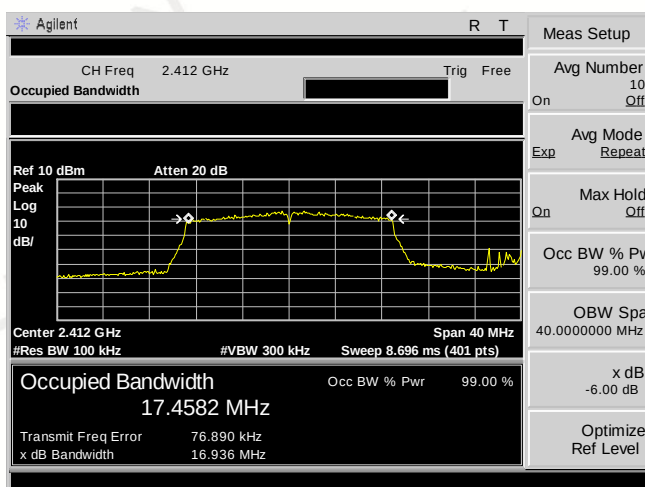

CH01

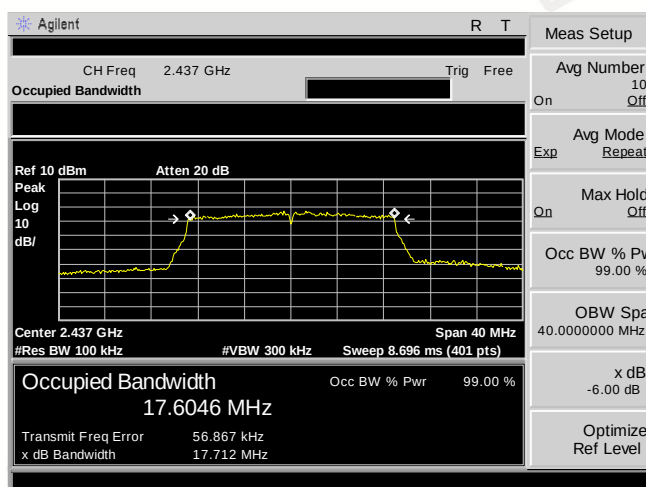

CH06

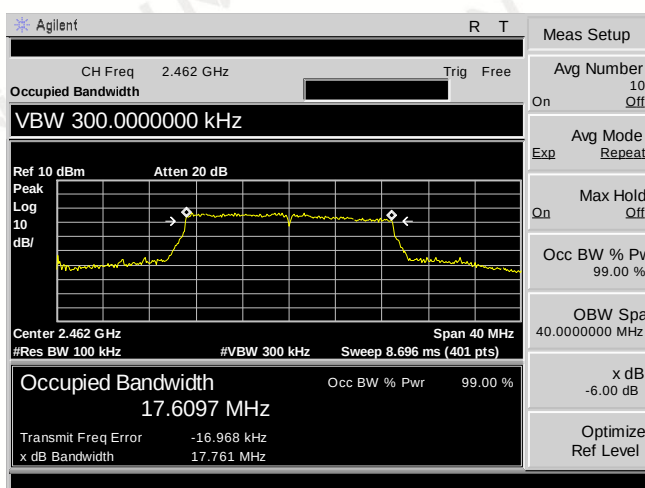

CH11

3.6 OUT-OF BAND EMISSIONS

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these setting are made of the in-band reference level, band edge and out-of-band emissions.



Test Configuration





Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.



802.11b

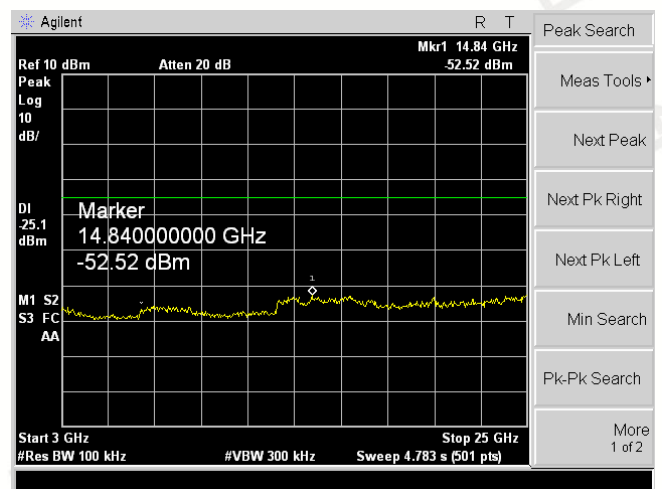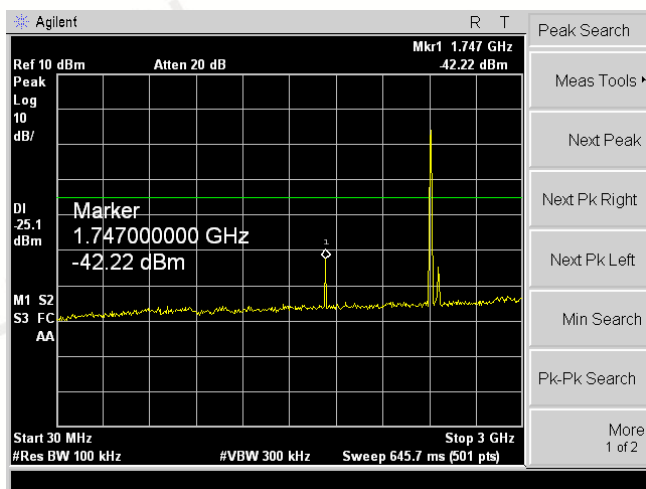

CH01

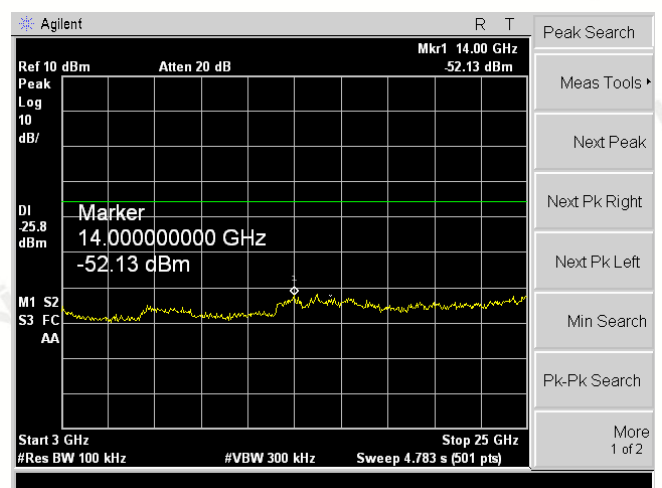
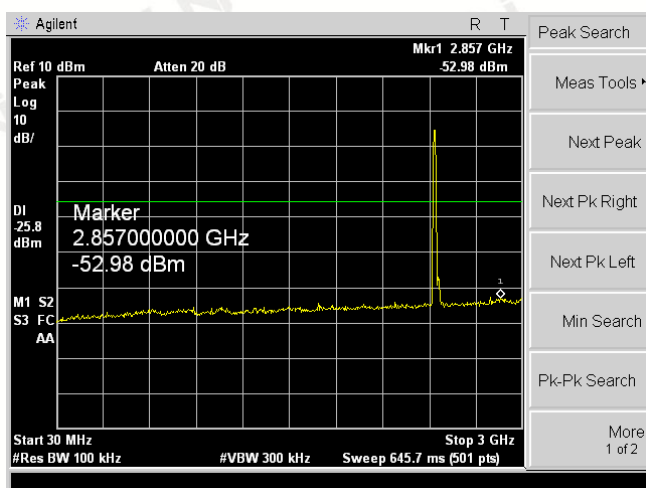


CH06

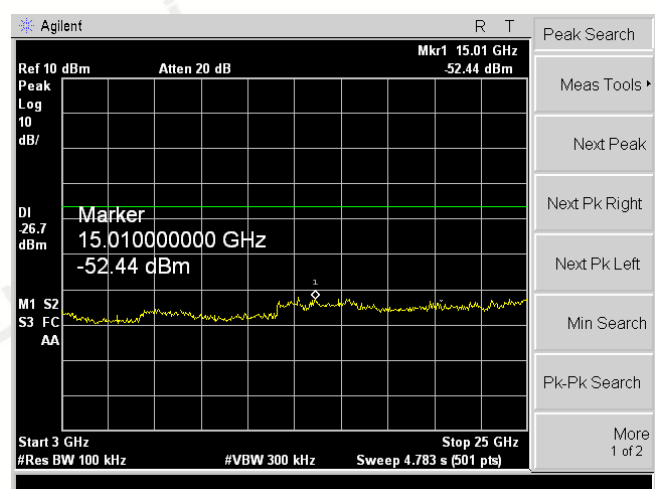
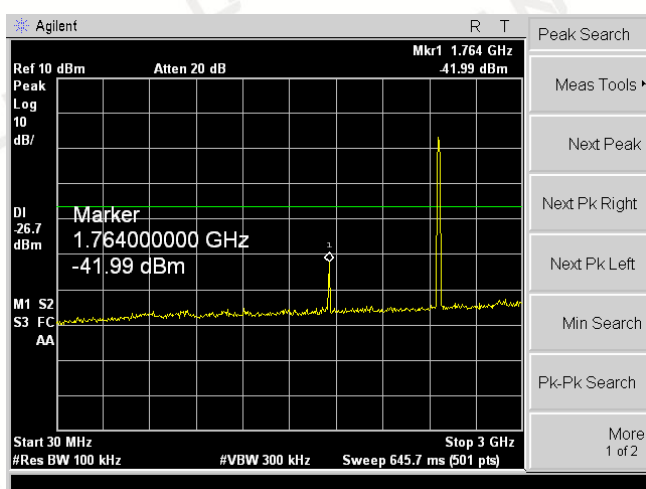


CH11



802.11g

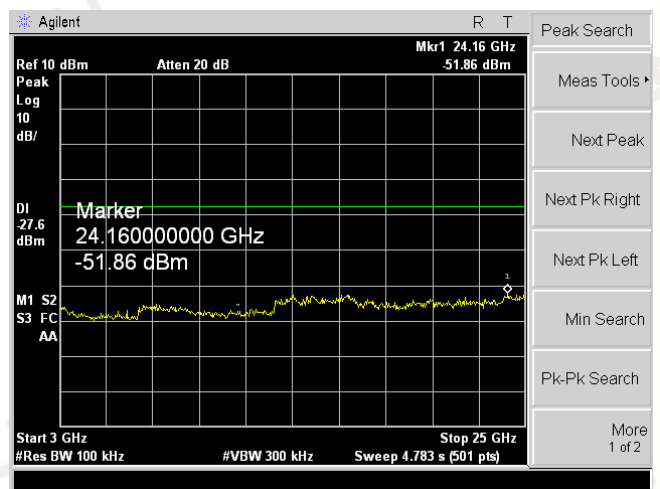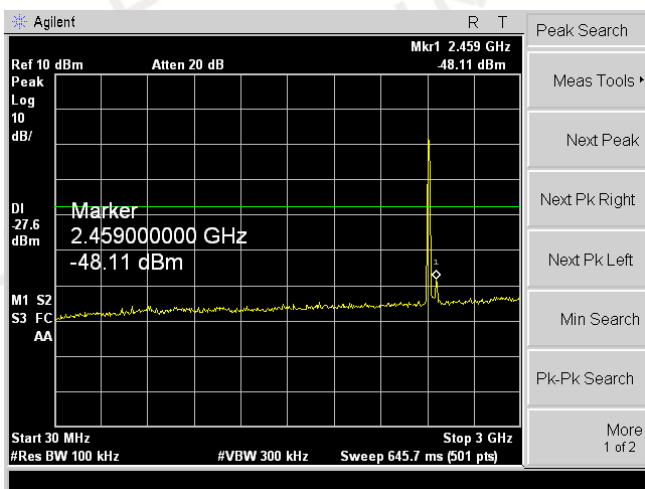

CH01

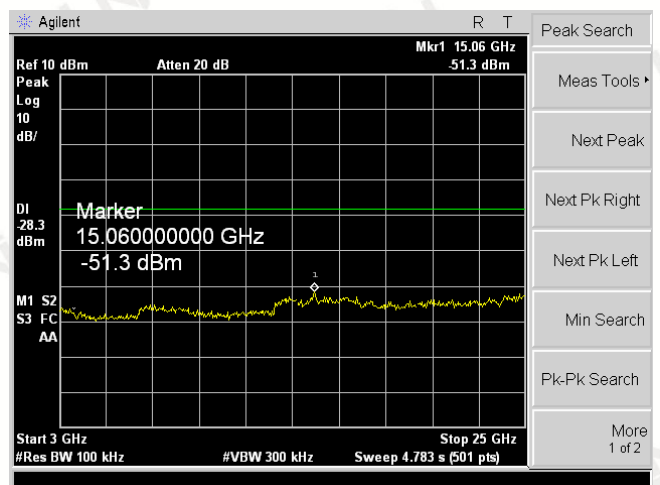
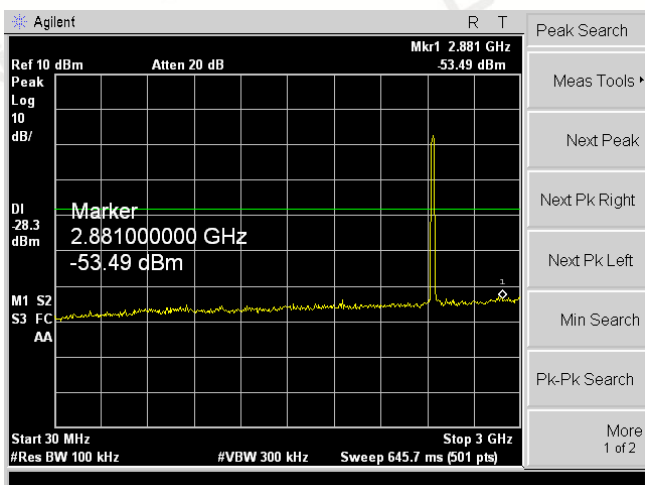


CH06

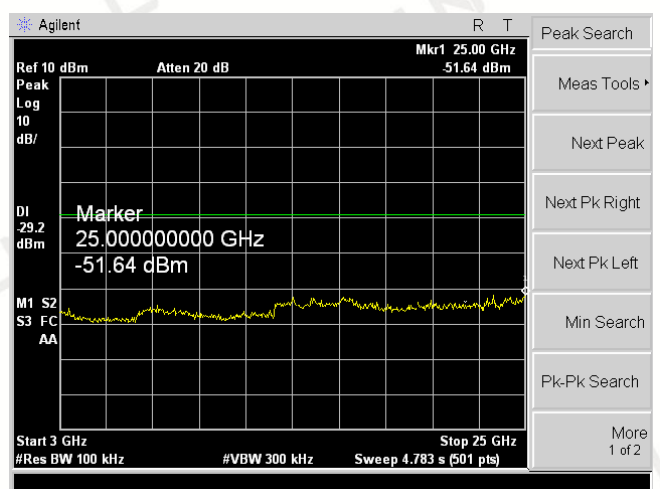
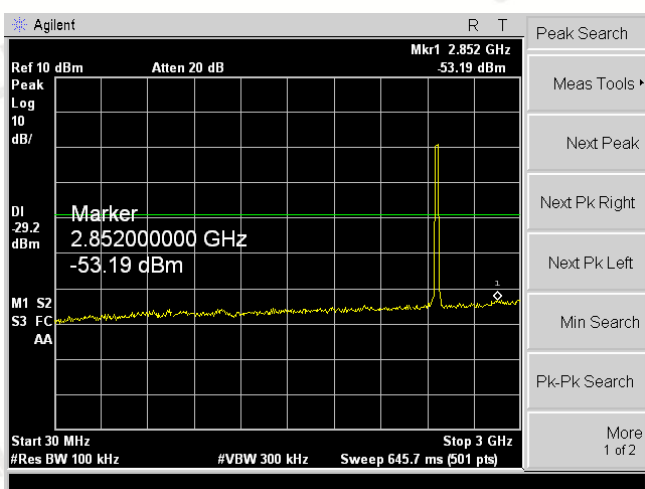


CH11



802.11n(HT20)

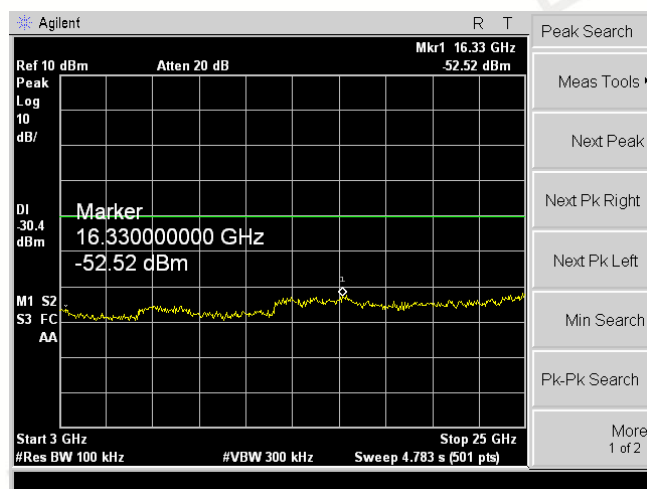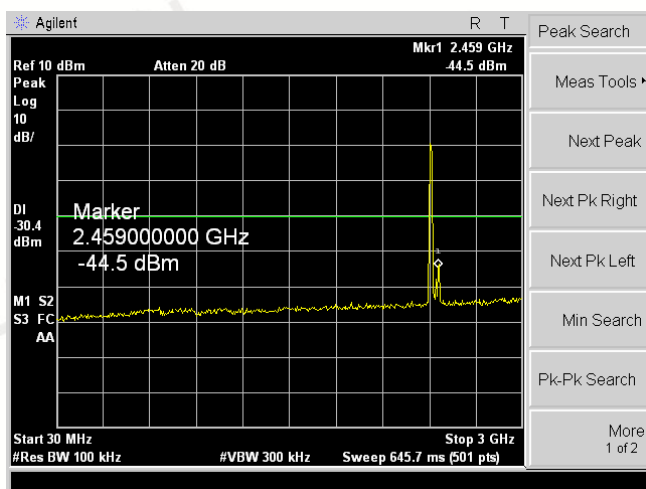

CH01

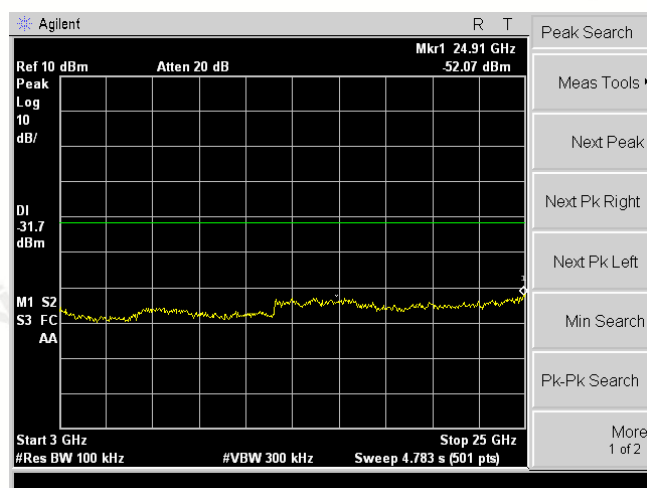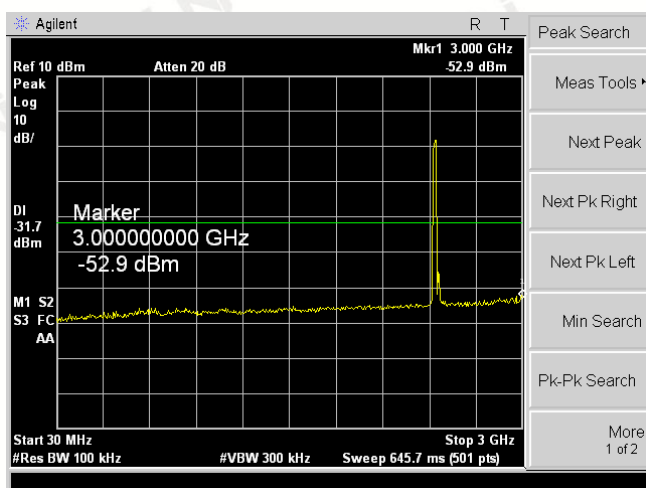



CH06

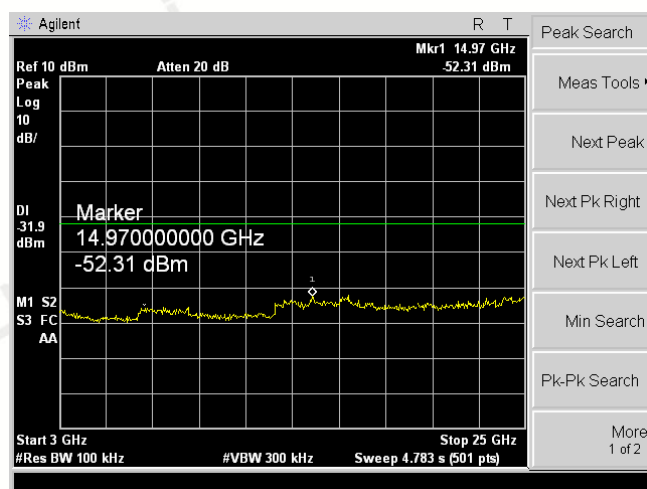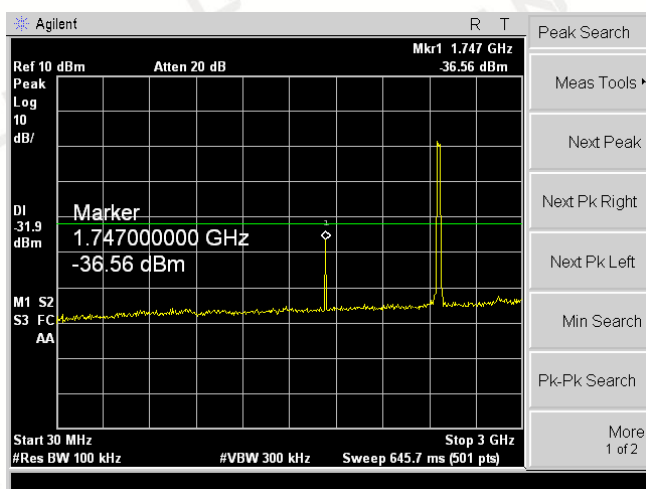

CH11



Band-edge Measurements for RF Conducted Emissions:

802.11b

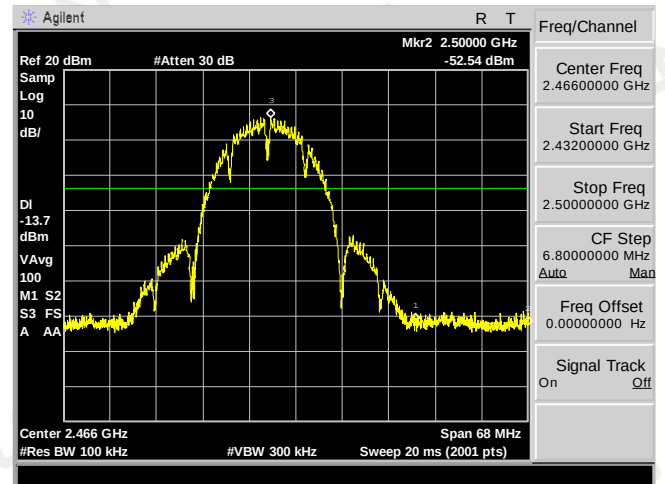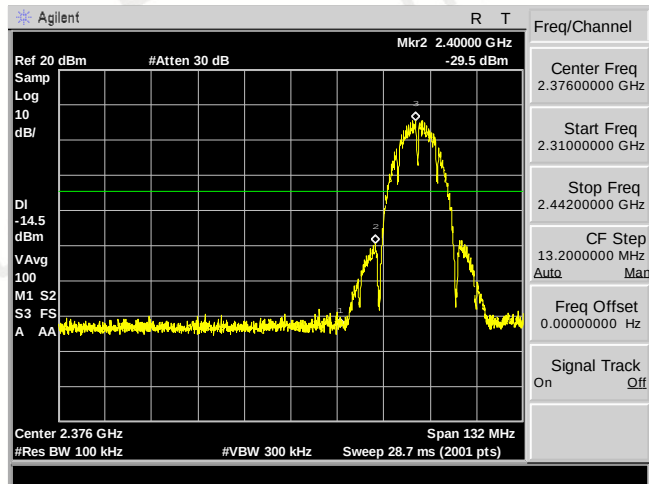


Frequency(MHz)	Peak(dBm)	limit(dBm)	Result	Frequency(MHz)	Peak(dBm)	limit(dBm)	Result
2390	-53.24	-14.5	Pass	2483.5	-51.76	-13.7	Pass
2400	-29.50	-14.5	Pass	2500	-52.54	-13.7	Pass
Left bandedge				Right bandedge			

802.11g

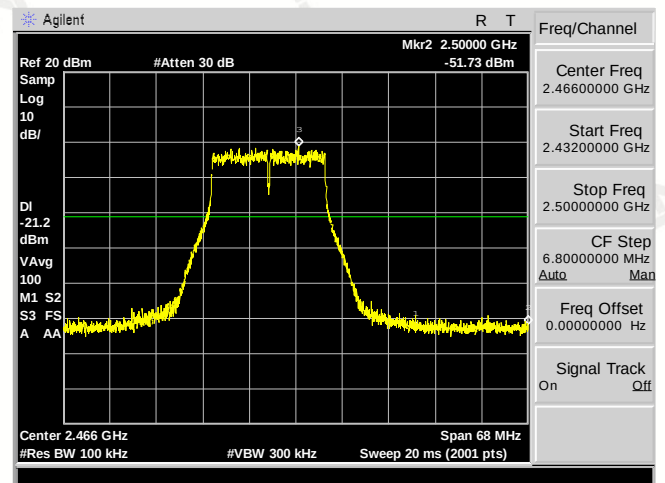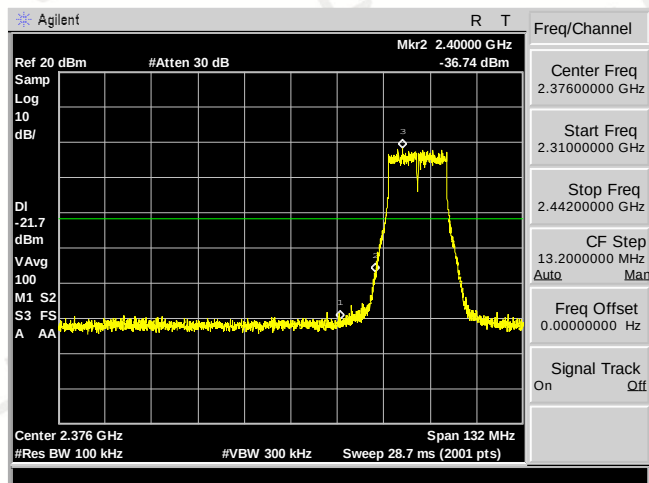

Frequency(MHz)	Peak(dBm)	limit(dBm)	Result	Frequency(MHz)	Peak(dBm)	limit(dBm)	Result
2390	-50.36	-21.7	Pass	2483.5	-53.42	-21.2	Pass
2400	-36.74	-21.7	Pass	2500	-51.73	-21.2	Pass
Left bandedge				Right bandedge			

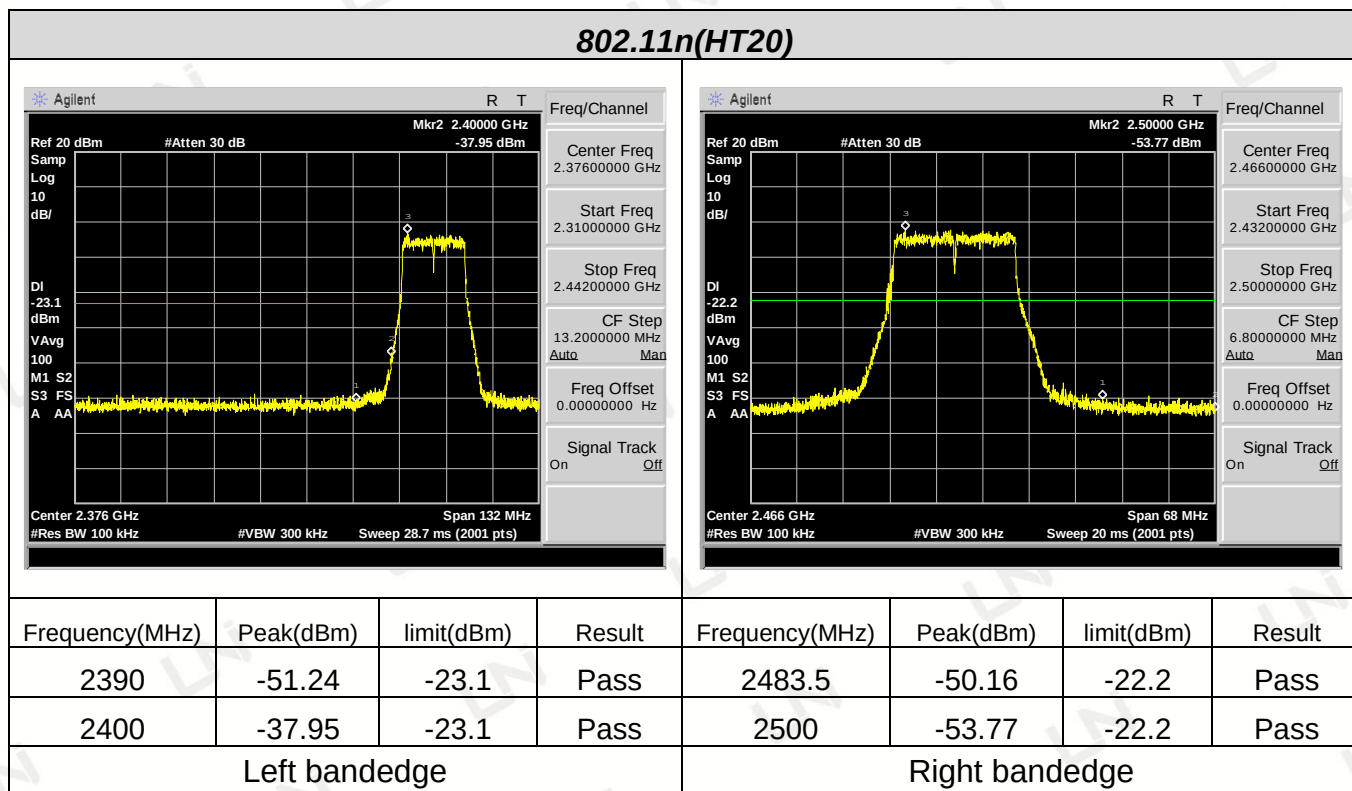



3.7 ANTENNA REQUIREMENT

Standard Applicable:


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is an Integral Antenna, the directional gains of antenna used for transmitting is 2.5dBi.

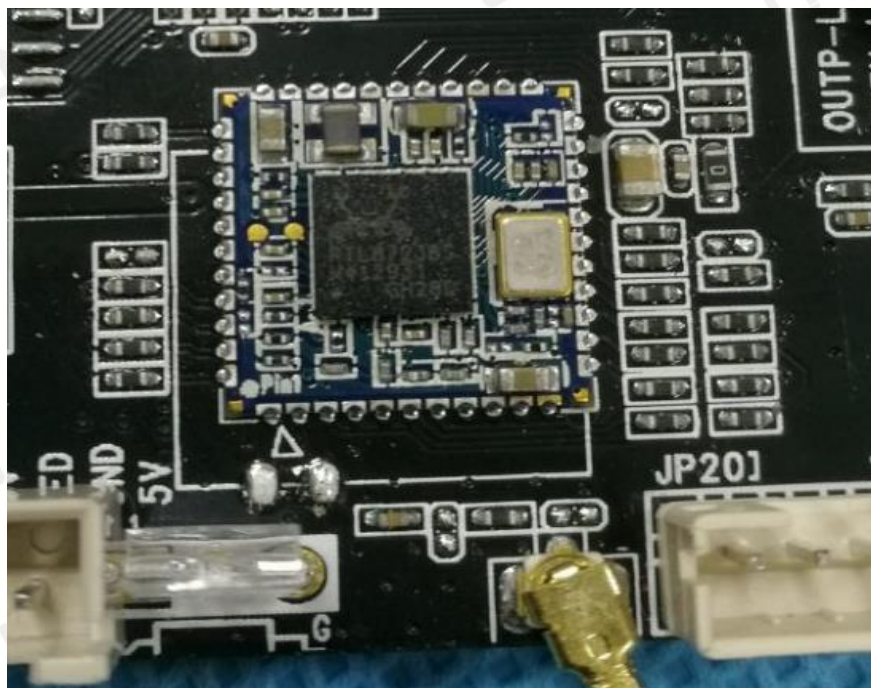
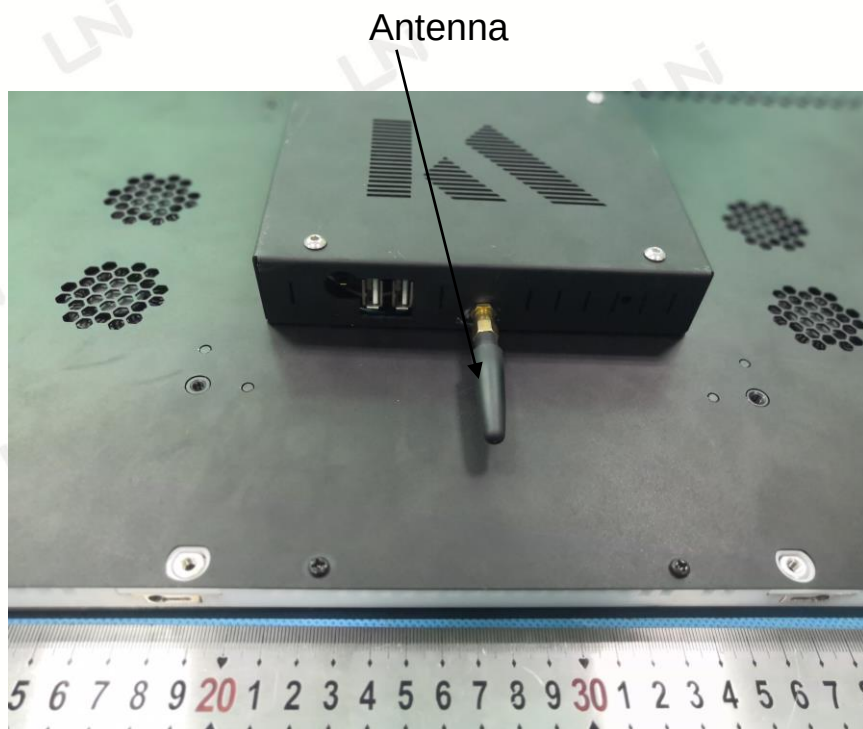



4 PHOTOGRAPH OF TEST

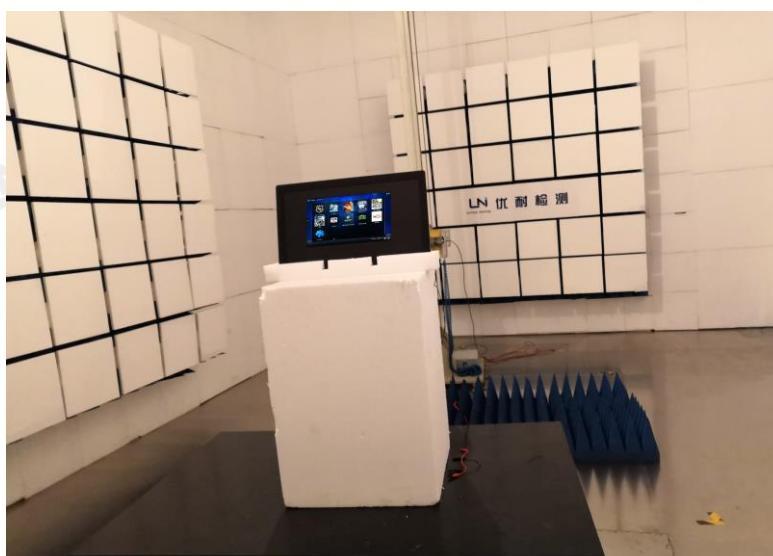



5 PHOTOGRAPH OF EUT


External photos

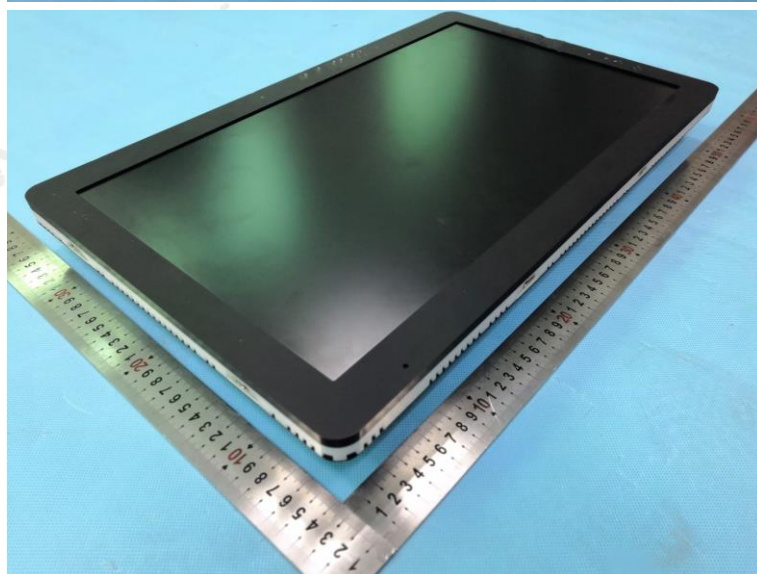
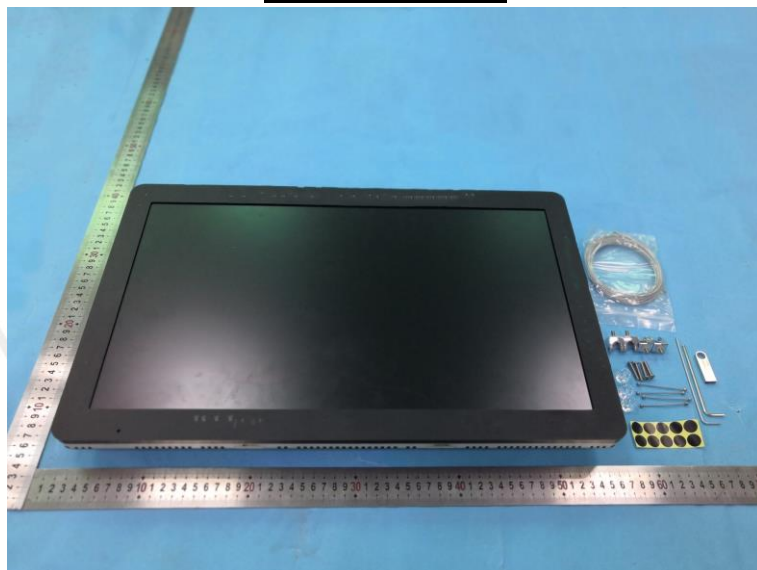




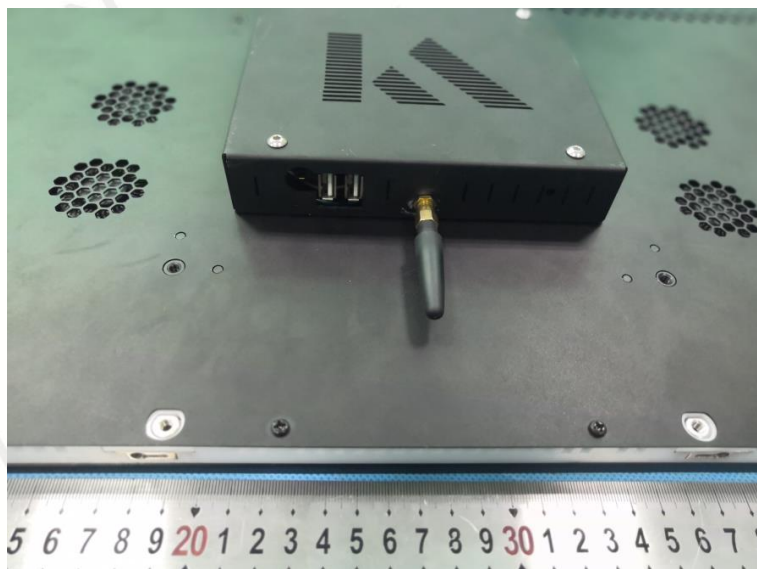



Internal photos

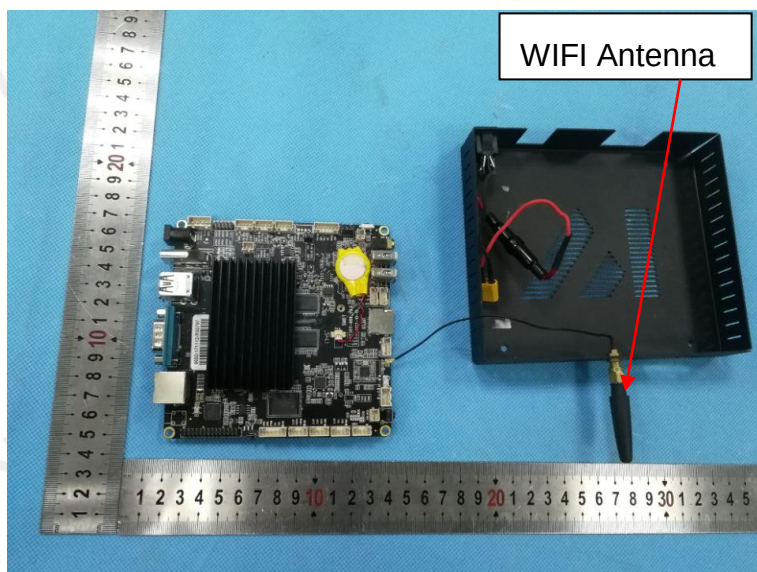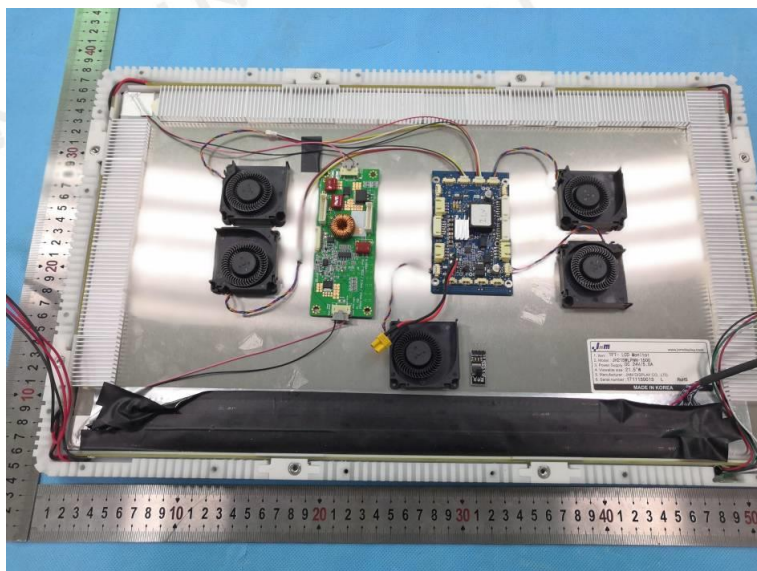

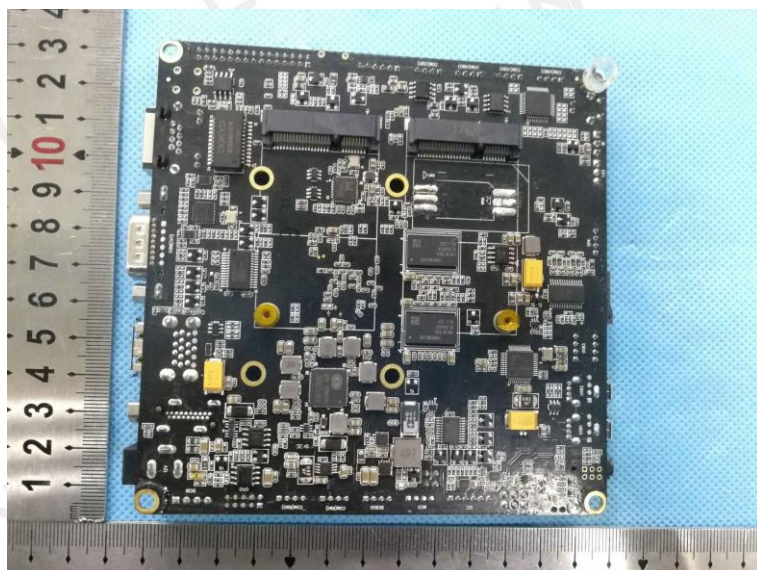

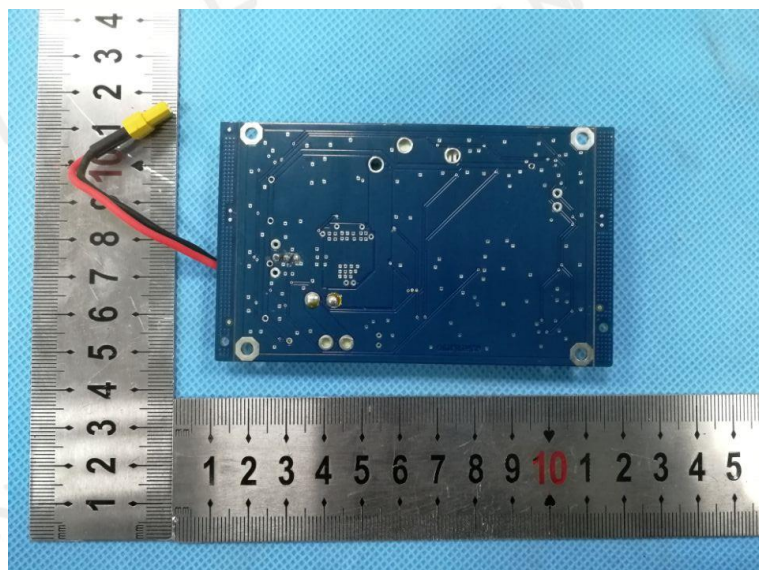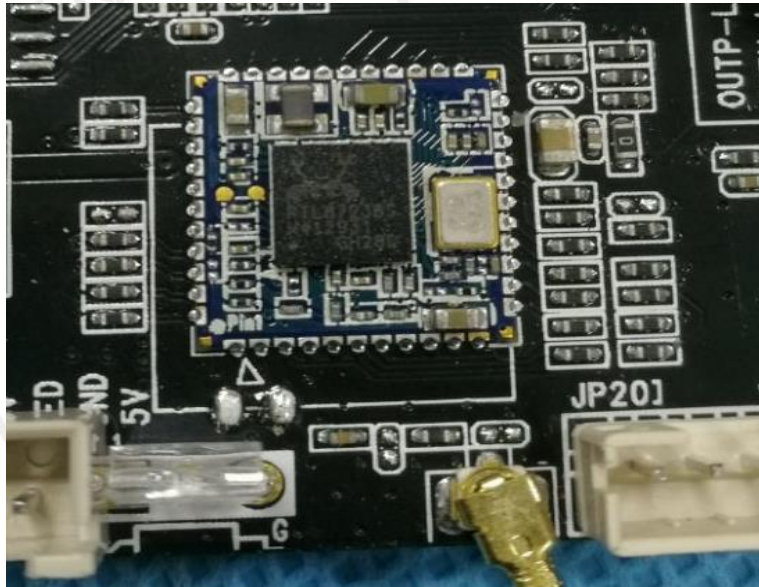

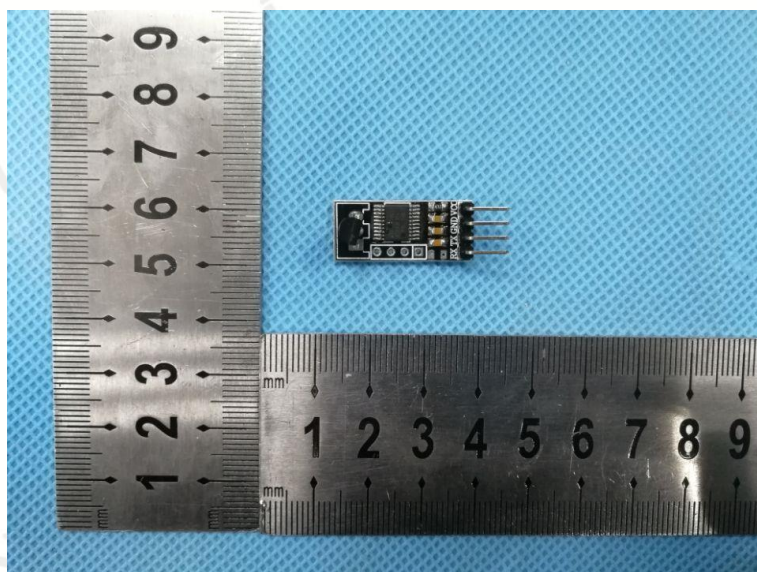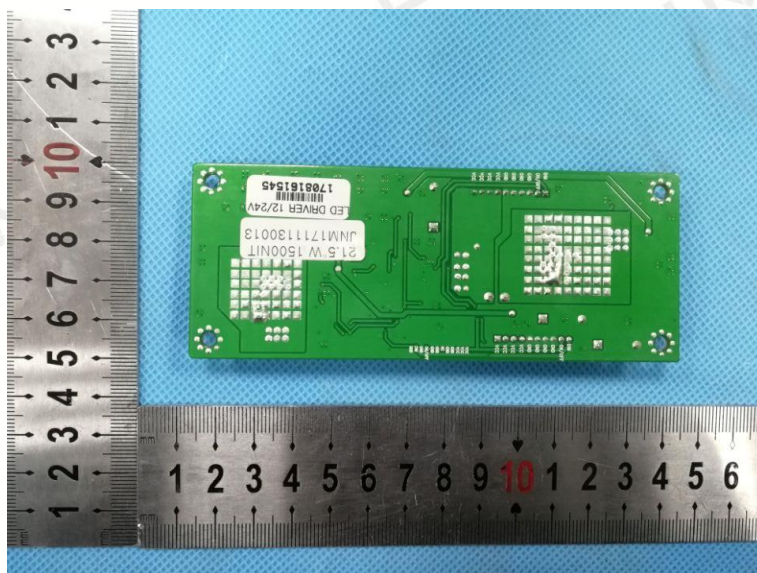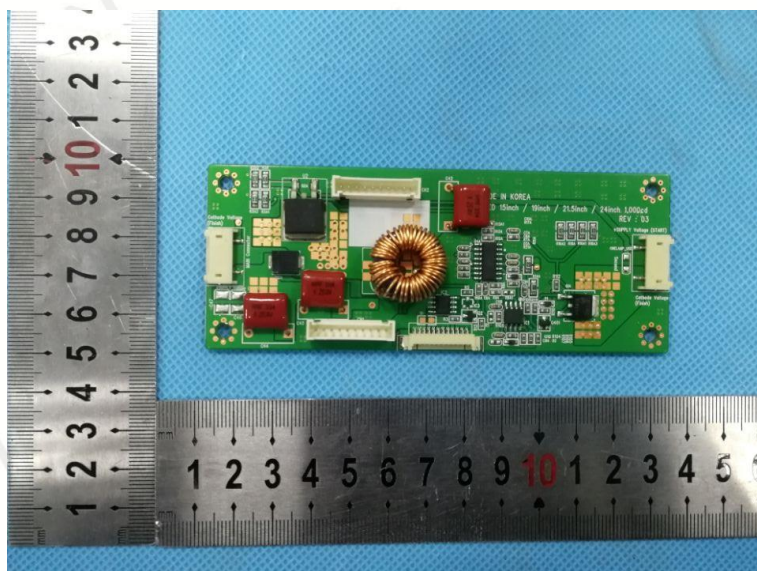

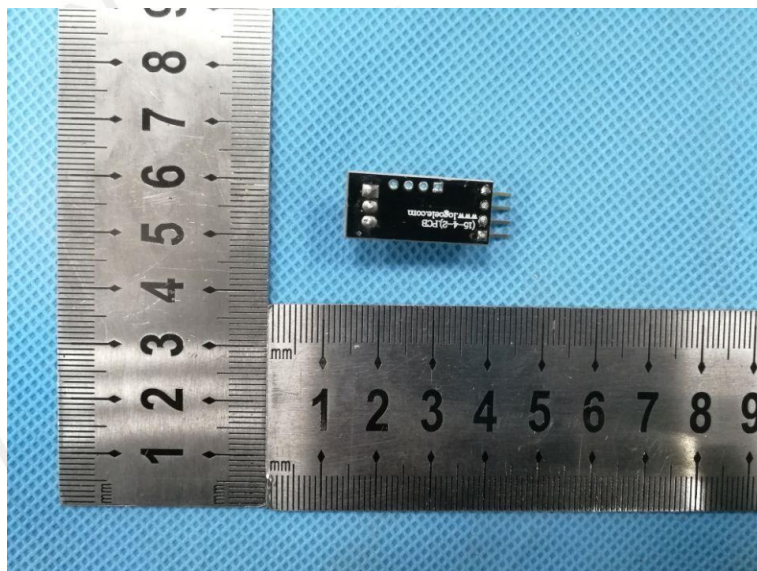

*****End of Report*****