

FCC AND ISCED CERTIFICATION TEST REPORT

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Description:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
Brand Name:	NA
Tested Model:	SKI.WB921AU.1
FCC ID:	2AR82-SKIWB921AU1
IC:	24728-SKIWB921AU1
Report No.:	JCF250705021-001
Received Date:	Jul. 05, 2025
Tested Date:	Jul. 05, 2025 ~ Aug. 04, 2025
Issued Date:	Aug. 04, 2025
Test Standards:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023
Test Procedure:	ANSI C63.10:2013, 558074 D01 15.247 Meas Guidance v05r02, RSS-Gen Issue 5 A2, Feb. 2021
Test Result:	Pass

Prepared By:



Roger Li/Engineer **Date:** Aug. 04, 2025

Reviewed By:



Kennys Zhang/Engineer **Date:** Aug. 04, 2025

Approved By:



Talent Zhang/Engineer **Date:** Aug. 04, 2025

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 04, 2025	Original Report	/

Reference Report	Differences between the statement
FCC2021-0003-1(XG1)	Based on the original report "FCC2021-0003-1(XG1)" add new antenna and modify the power setting to decrease power.

Table of Contents

1. Test Report Declare	4
2. Summary of Test Results	5
3. Test Laboratory	5
4. Equipment Under Test	6
4.1. Description of EUT	6
4.2. Channel List	6
4.3. Packet Type Configuration	7
4.4. Test Channel Configuration	7
4.5. Test environment conditions	7
4.6. The Worse Case Power Setting Parameter	7
4.7. Description of Available Antennas	8
5. Description of Test Setup	8
5.1. Accessory	8
5.2. Support Equipment	8
5.3. Test Setup	8
5.4. Setup Diagram for Tests	8
6. Measurement Uncertainty	8
7. Measuring Instrument and Software Used	9
8. Conducted Output Power	11
8.1. Block diagram of test setup	11
8.2. Limits	11
8.3. Test Procedure	11
8.4. Results	11
9. Radiated Emission	12
9.1. Block diagram of test setup	12
9.2. Limit	13
9.3. Test Procedure	14
9.4. Results	16
9.5. Original test data	16
10. Antenna Requirements	17
10.1. Limits	17
10.2. Result	17
APPENDIX A – Radiated Emission Below 1GHz Test Data	18
APPENDIX B – Radiated Emission Above 1GHz Test Data	20

1. Test Report Declare

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Name:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
Brand Name:	NA
Model Name:	SKI.WB921AU.1
Difference Description:	NA

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Result
1	20 dB Bandwidth and 99 % Occupied Bandwidth	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	NA
2	Conducted Output Power	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	NA
4	Number of Hopping Frequency	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	NA
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	NA
6	Conducted Band edge	FCC 15.247 (d) RSS-247 Clause 5.5	NA
7	Radiated Band edge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test For AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	NA
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass

Note: The original report has already been certified. Only add new antenna, So above test data should refer to the original report "FCC2021-0003-1(XG1)", only Radiated emission and Conducted Output Power need be retest.

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
Model Number:	SKI.WB921AU.1
EUT Function Description:	Refer to user manual
Power Supply:	DC 3.3V
Sample No.:	250705021-01-01
Hardware Version:	NA
Software Version:	NA
Radio Specification:	Bluetooth V5.2
Operation Frequency:	2402 MHz - 2480 MHz
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate:	1Mbps, 2Mbps, 3Mbps
Antenna Type:	FPC Antenna, MAX. Gain: 2.42 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

4.3. Packet Type Configuration

Test Mode	Packet Type	Setting(Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
$\pi/4$ -DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

4.4. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK hopping on Tx mode	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
8DPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480

4.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.6. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		WCN combo Tool		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 0	CH 39	CH 78
GFSK	1	Default	Default	Default
$\pi/4$ -DQPSK	1	Default	Default	Default

8DPSK	1	Default	Default	Default
GFSK	2	Default	Default	Default
$\pi/4$ -DQPSK	2	Default	Default	Default
8DPSK	2	Default	Default	Default

4.7. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 2TX, 2RX	Antenna 1, 2 can be used as transmitting/receiving antenna.
$\pi/4$ -DQPSK	☒ 2TX, 2RX	Antenna 1, 2 can be used as transmitting/receiving antenna.
8DPSK	☒ 2TX, 2RX	Antenna 1, 2 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k = 2.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Aug. 22, 2024	Aug. 21, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Aug. 22, 2024	Aug. 21, 2025
☒	Signal Generator	Keysight	N5171B	MY57280639	Aug. 22, 2024	Aug. 21, 2025
☒	DC POWER	Keysight	E342A	MY59020356	Aug. 29, 2024	Aug. 28, 2025
☒	Incubator thermometer	GWS	EL-02JA	21107288	Aug. 15, 2024	Aug. 14, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Aug. 23, 2024	Aug. 22, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112206	Sep. 11, 2024	Sep. 10, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Aug. 22, 2024	Aug. 21, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112811	Aug. 23, 2024	Aug. 22, 2025
☒	Signal Generator	Keysight	N5173B	MY62220145	Aug. 23, 2024	Aug. 22, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY61252859	Aug. 22, 2024	Aug. 21, 2025
☒	DC POWER	Keysight	E3642A	MY40005294	Aug. 30, 2024	Aug. 29, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 23, 2024	Aug. 22, 2025
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	EMI Receiver	R&S	ESR26	101424	Sep. 14, 2024	Sep. 13, 2025
☒	Hybrid Antenna	Schwarzbeck	VULB9163	01361	Sep. 25, 2024	Sep. 24, 2025
☒	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Sep. 11, 2024	Sep. 10, 2025
☒	Horn Antenna 2	ETS	BBHA 9170	1090	Sep. 11, 2024	Sep. 10, 2025
☒	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 12, 2025	Jan. 11, 2026
☒	Test path	/	Path2: WIFI-2.4G 1-3GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path7: ALL PASS 1-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path9: 3GHz High PASS 3-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path16: 30MHz-1GHz ALL PASS	/	Aug. 23, 2024	Aug. 22, 2025

			NO AMP			
☒	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Sep. 06, 2024	Sep. 05, 2025
☒	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	TS+		V5.0.0.0	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	LISN	R&S	ENV216	102509	Aug. 22, 2024	Aug. 21, 2025
☒	EMI Receiver	R&S	ESR	102154	Aug. 22, 2024	Aug. 21, 2025
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Temperature & Humidity	Temperature	HTC-1	/	Sep. 04, 2024	Sep. 03, 2025

8. Conducted Output Power

8.1. Block diagram of test setup

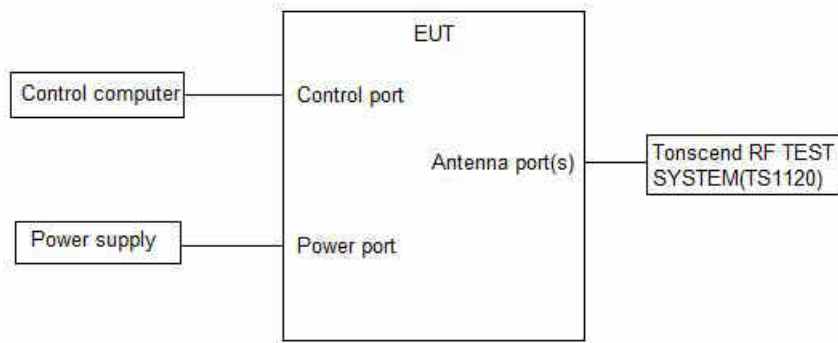

8.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel : 125 mW or 21dBm. The e.i.r.p. shall not exceed 4 W.	2400-2483.5

8.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
 - (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=8 MHz
- Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

8.4. Results


Test Mode	Ant.	Freq. (MHz)	Conducted Peak Power (dBm)	Conducted Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
DH5	Ant1	2402	9.32	≤20.97	11.74	≤36	PASS
		2441	9.23	≤20.97	11.65	≤36	PASS
		2480	9.26	≤20.97	11.68	≤36	PASS
2DH5	Ant1	2402	9.15	≤20.97	11.57	≤36	PASS
		2441	9.04	≤20.97	11.46	≤36	PASS
		2480	9.09	≤20.97	11.51	≤36	PASS
3DH5	Ant1	2402	9.28	≤20.97	11.70	≤36	PASS
		2441	9.18	≤20.97	11.60	≤36	PASS
		2480	9.34	≤20.97	11.76	≤36	PASS

Note: The ant1 is the worst port, so only show the ant1 test data.


9. Radiated Emission

9.1. Block diagram of test setup


In 3m Anechoic Chamber, test setup diagram for 9kHz - 30MHz:

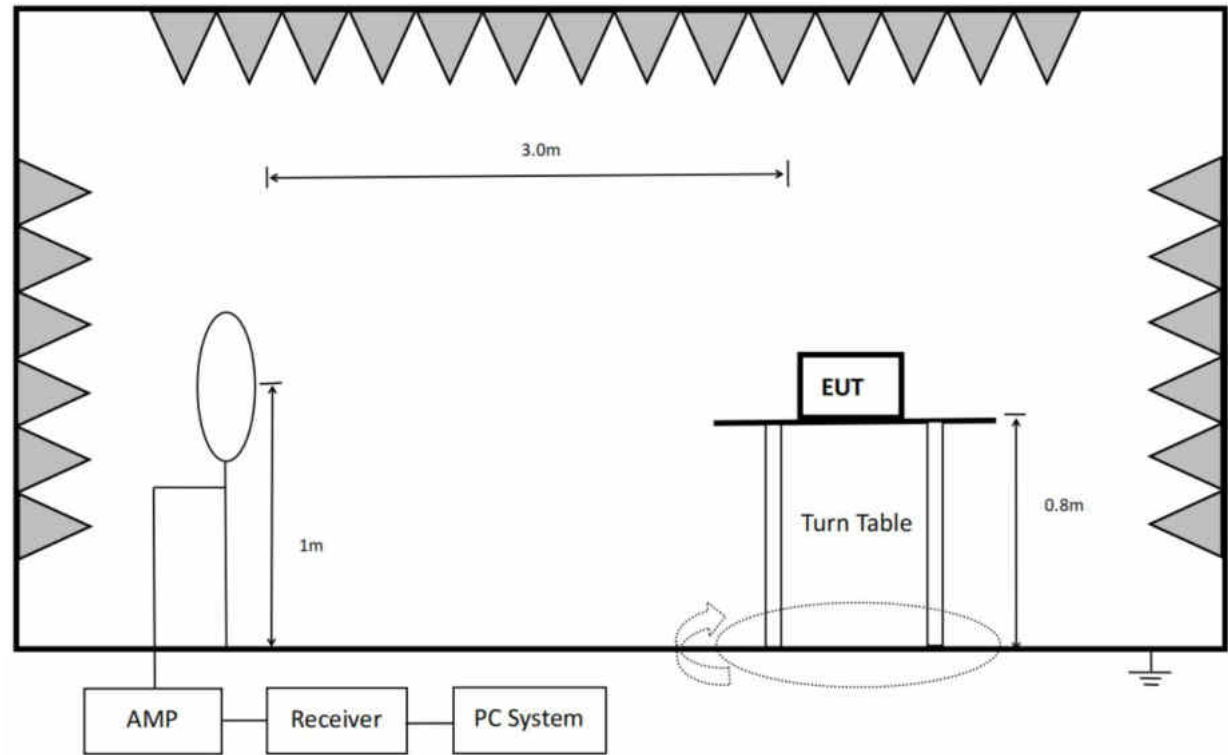

In 3m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

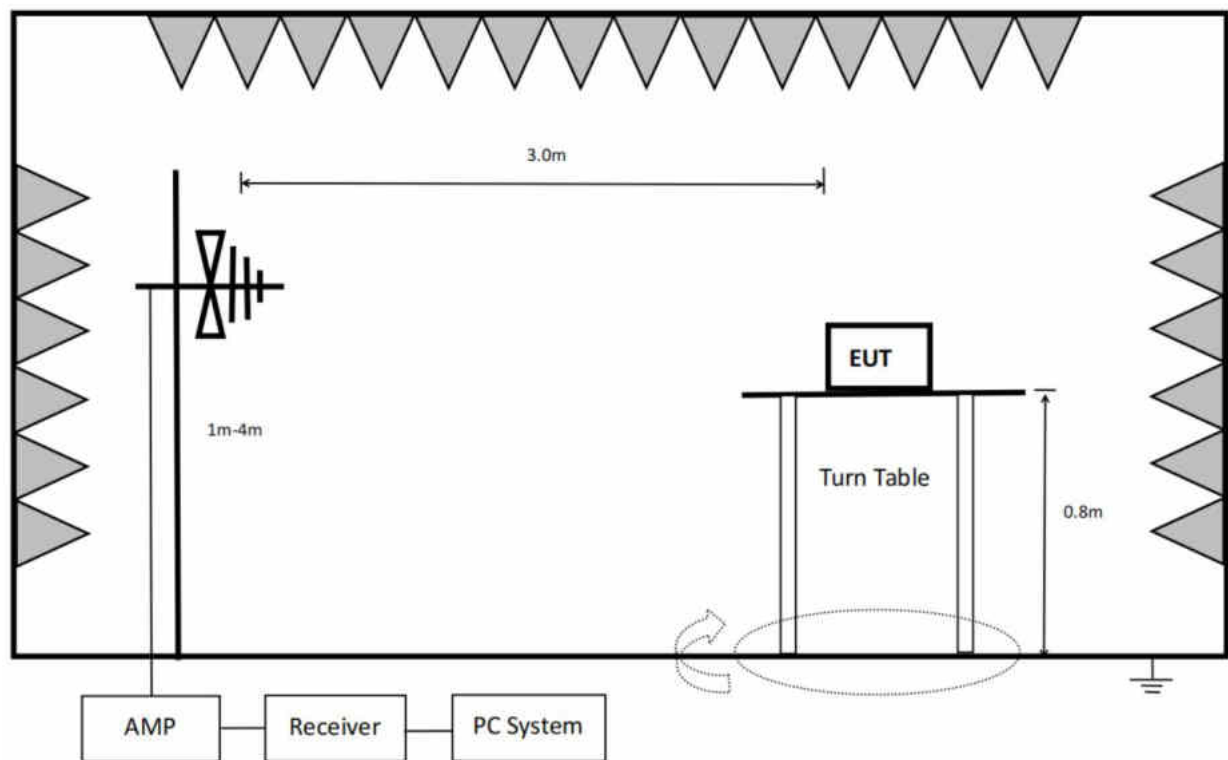

In 3m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

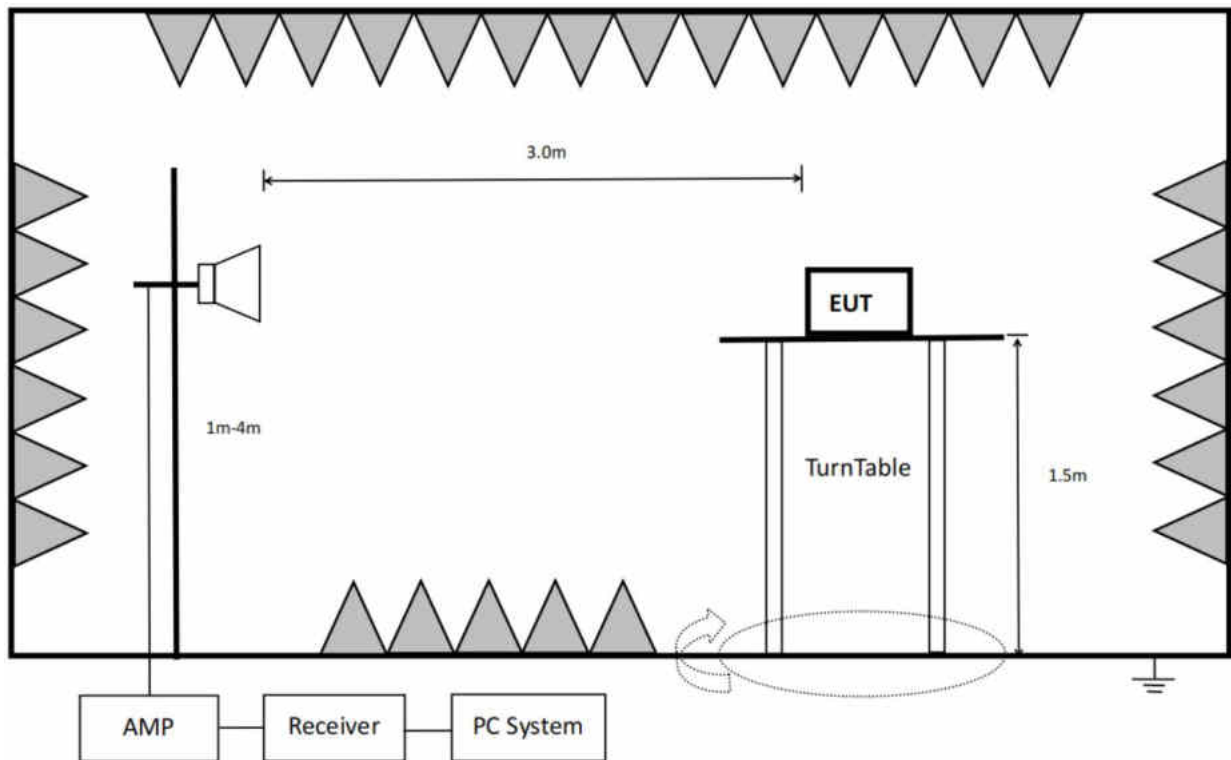

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

9.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to RSS-Gen section 8.10 and FCC § 15.205 (a),

9.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	300 Hz (From 9 kHz to 0.15 MHz)/ 10 kHz (From 0.15 MHz to 30 MHz)
VBW	1 kHz (From 9 kHz to 0.15 MHz)/ 30 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013

2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm meter above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.

5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT

measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	100 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 1.5m above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 7.1. On Time And Duty Cycle.

7. Restriction band: Investigated frequency range from 2310 MHz to 2410 MHz and 2470MHz to 2500 MHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

9.4. Results

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 8DPSK, TX 2402 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

9.5. Original test data

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

10. Antenna Requirements

10.1. Limits

Please refer to FCC § 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC § 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

10.2. Result

The antenna used for this product is FPC antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.42 dBi


APPENDIX A – Radiated Emission Below 1GHz Test Data

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-20 10:07:36

Test Graph

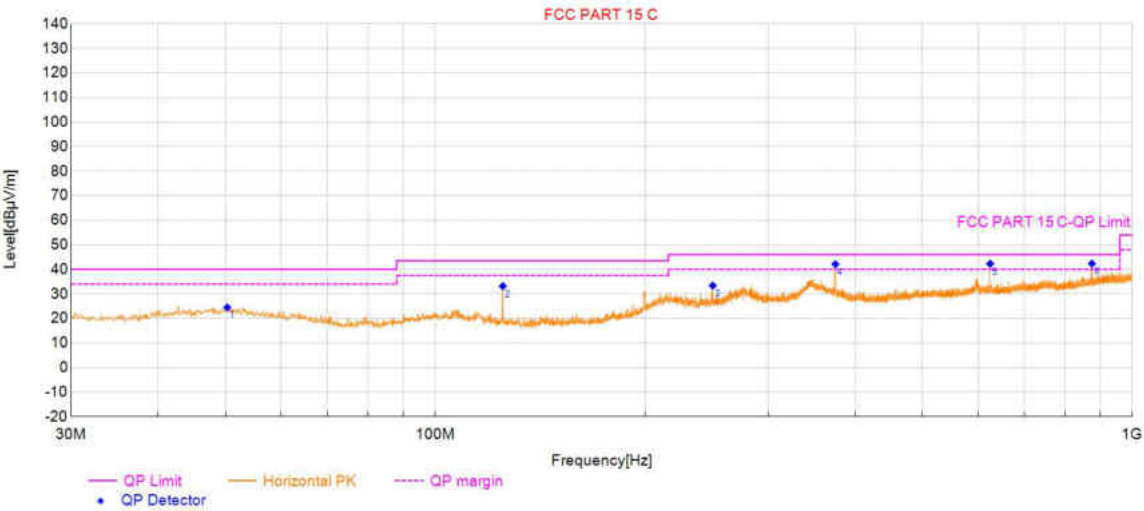


Final Data List									
NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	50.28	21.55	24.50	40.00	15.50	100	86	Horizontal	PASS
2	124.97	17.42	33.16	43.50	10.34	100	254	Horizontal	PASS
3	250.02	22.01	33.40	46.00	12.60	100	356	Horizontal	PASS
4	374.97	25.07	42.11	46.00	3.89	100	125	Horizontal	PASS
5	625.06	30.08	42.31	46.00	3.69	100	28	Horizontal	PASS
6	875.05	33.65	42.37	46.00	3.63	100	46	Horizontal	PASS

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-20 10:08:11

Test Graph

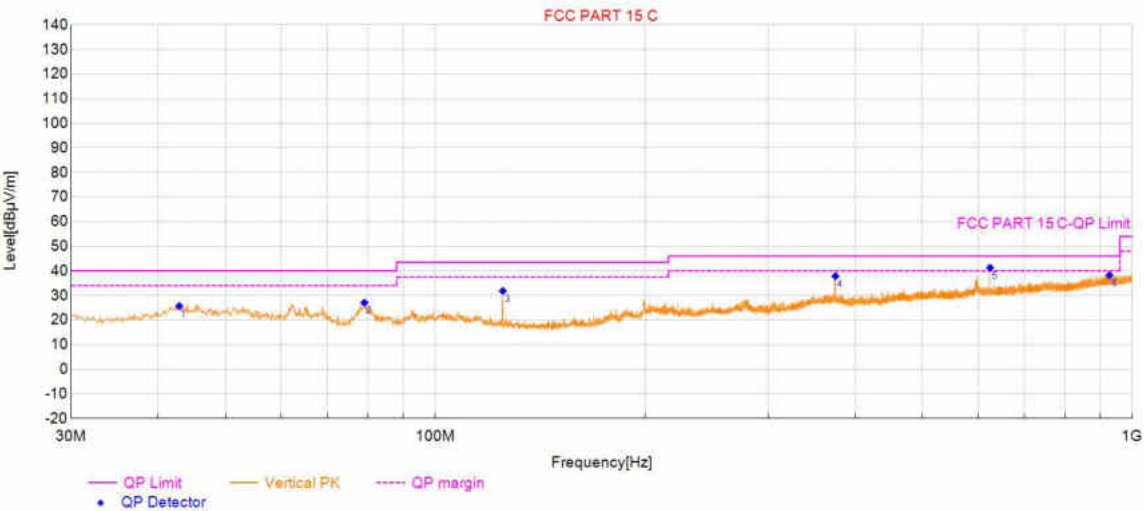

Final Data List									
NO.	Freq. (MHz)	Factor (dB)	QP Value (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	42.90	20.75	25.70	40.00	14.30	100	211	Vertical	PASS
2	79.09	15.14	27.08	40.00	12.92	100	228	Vertical	PASS
3	124.97	17.42	31.84	43.50	11.66	100	132	Vertical	PASS
4	374.97	25.07	37.88	46.00	8.12	100	149	Vertical	PASS
5	625.06	30.08	41.29	46.00	4.71	100	28	Vertical	PASS
6	927.24	34.40	38.23	46.00	7.77	100	292	Vertical	PASS


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:54:19

Test Graph

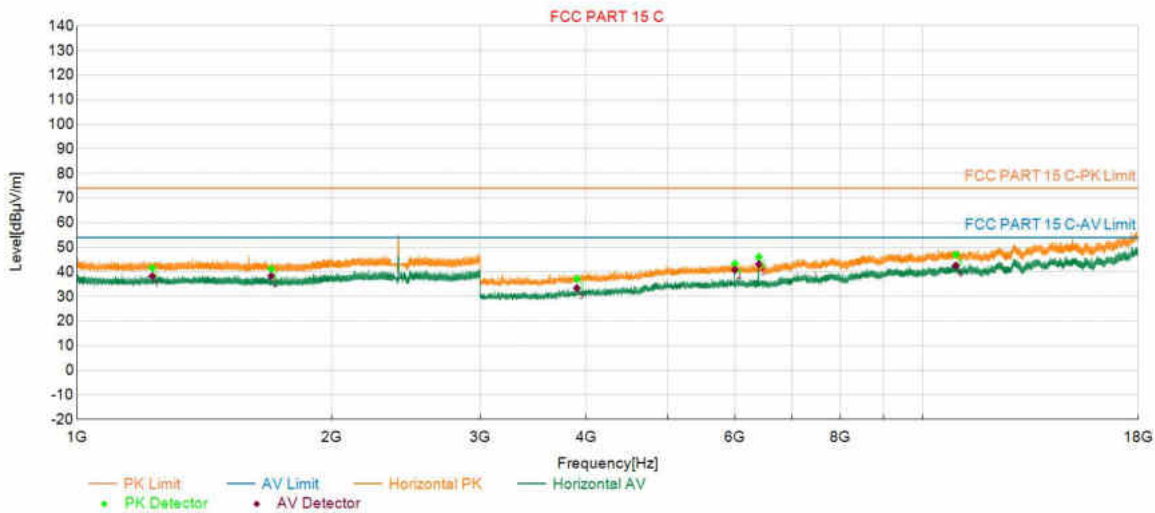

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1228.11	3.05	41.60	74.00	32.40	150	186	Horizontal
2	1697.73	4.32	41.20	74.00	32.80	150	349	Horizontal
3	3903.05	-11.52	37.19	74.00	36.81	150	0	Horizontal
4	6000.15	-4.16	43.33	74.00	30.67	150	49	Horizontal
5	6405.17	-2.76	46.11	74.00	27.89	150	16	Horizontal
6	10952.65	7.06	47.00	74.00	27.00	150	243	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1228.11	3.05	38.28	54.00	15.72	150	186	Horizontal
2	1697.73	4.32	38.33	54.00	15.67	150	349	Horizontal
3	3903.05	-11.52	33.42	54.00	20.58	150	0	Horizontal
4	6000.15	-4.16	40.83	54.00	13.17	150	49	Horizontal
5	6405.17	-2.76	43.20	54.00	10.80	150	16	Horizontal
6	10952.65	7.06	42.60	54.00	11.40	150	243	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:58:45

Test Graph

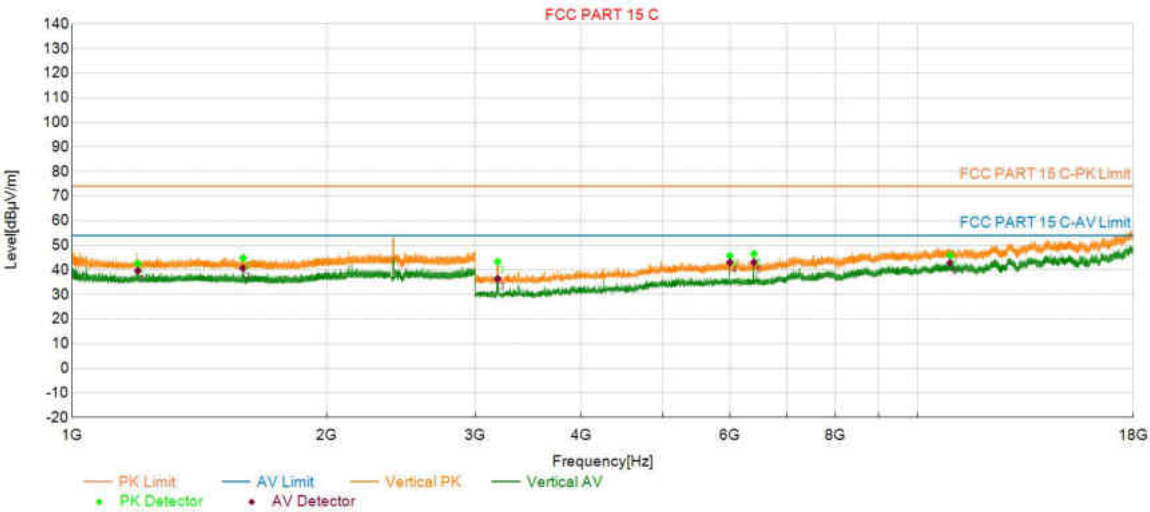

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1196.81	2.90	42.59	74.00	31.41	150	55	Vertical
2	1593.53	4.15	44.84	74.00	29.16	150	267	Vertical
3	3187.51	-14.16	43.31	74.00	30.69	150	77	Vertical
4	6000.15	-4.16	45.74	74.00	28.26	150	112	Vertical
5	6405.17	-2.76	46.54	74.00	27.46	150	64	Vertical
6	10932.40	7.15	45.89	74.00	28.11	150	172	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1196.81	2.90	39.64	54.00	14.36	150	55	Vertical
2	1593.53	4.15	40.69	54.00	13.31	150	267	Vertical
3	3187.51	-14.16	36.38	54.00	17.62	150	77	Vertical
4	6000.15	-4.16	43.08	54.00	10.92	150	112	Vertical
5	6405.17	-2.76	43.08	54.00	10.92	150	64	Vertical
6	10932.40	7.15	42.84	54.00	11.16	150	172	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2441	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 13:01:01

Test Graph

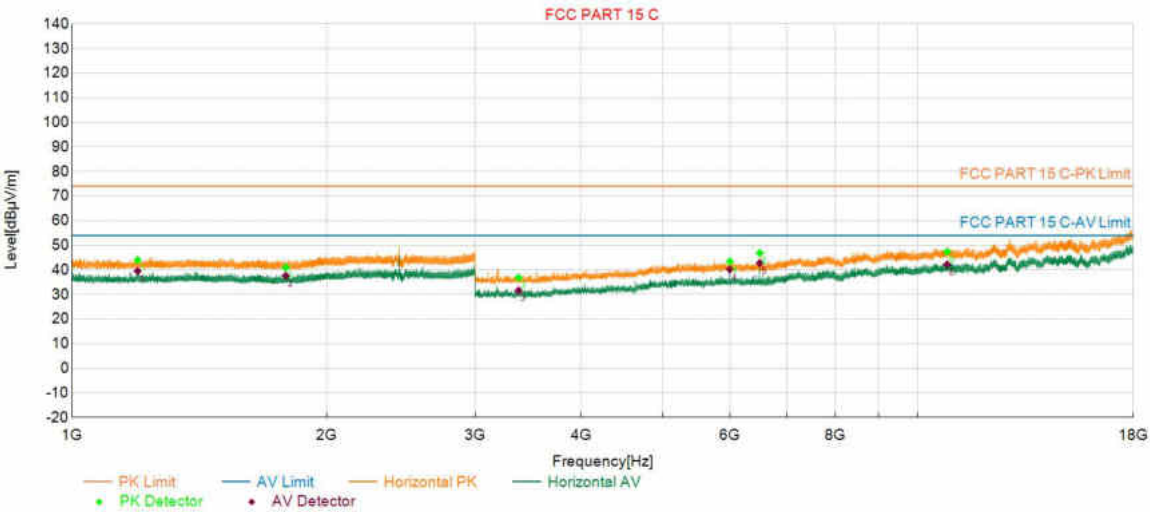

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1196.01	2.89	44.06	74.00	29.94	150	288	Horizontal
2	1790.44	4.37	41.01	74.00	32.99	150	357	Horizontal
3	3374.27	-13.74	36.89	74.00	37.11	150	350	Horizontal
4	6000.15	-4.16	43.48	74.00	30.52	150	38	Horizontal
5	6509.43	-2.03	46.88	74.00	27.12	150	12	Horizontal
6	10841.64	7.03	47.38	74.00	26.62	150	99	Horizontal


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1196.01	2.89	39.57	54.00	14.43	150	288	Horizontal
2	1790.44	4.37	37.65	54.00	16.35	150	357	Horizontal
3	3374.27	-13.74	31.64	54.00	22.36	150	350	Horizontal
4	6000.15	-4.16	40.18	54.00	13.82	150	38	Horizontal
5	6509.43	-2.03	42.79	54.00	11.21	150	12	Horizontal
6	10841.64	7.03	42.27	54.00	11.73	150	99	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2441	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 13:02:33

Test Graph

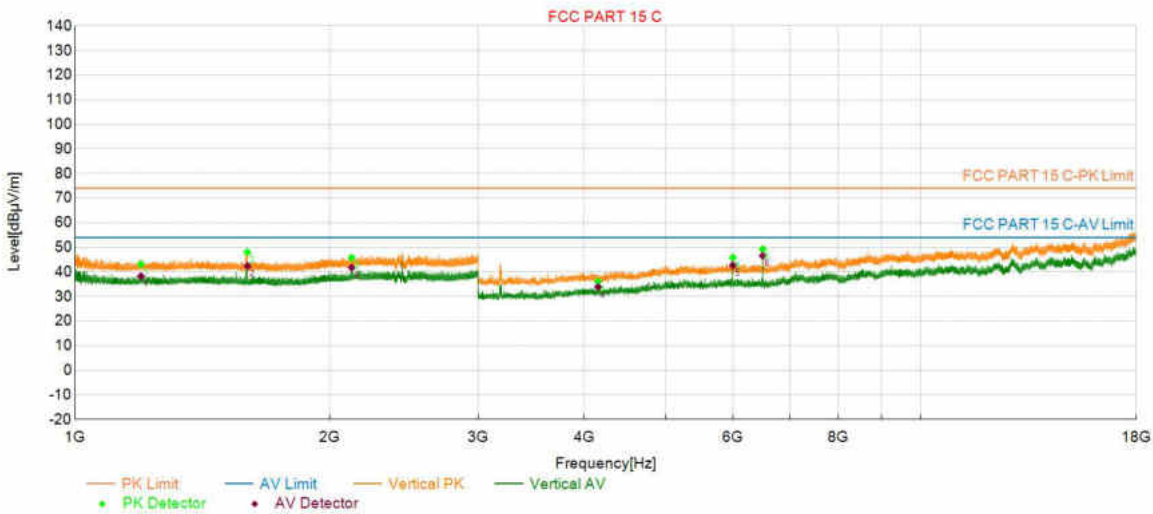

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1197.11	2.90	43.12	74.00	30.88	150	153	Vertical
2	1599.73	4.13	48.02	74.00	25.98	150	147	Vertical
3	2124.86	7.00	45.80	74.00	28.20	150	88	Vertical
4	4156.56	-10.79	36.08	74.00	37.92	150	243	Vertical
5	6000.15	-4.16	45.85	74.00	28.15	150	114	Vertical
6	6509.43	-2.03	49.29	74.00	24.71	150	68	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1197.11	2.90	38.24	54.00	15.76	150	153	Vertical
2	1599.73	4.13	42.45	54.00	11.55	150	147	Vertical
3	2124.86	7.00	41.77	54.00	12.23	150	88	Vertical
4	4156.56	-10.79	33.86	54.00	20.14	150	243	Vertical
5	6000.15	-4.16	42.71	54.00	11.29	150	114	Vertical
6	6509.43	-2.03	46.57	54.00	7.43	150	68	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2480	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 13:05:10

Test Graph

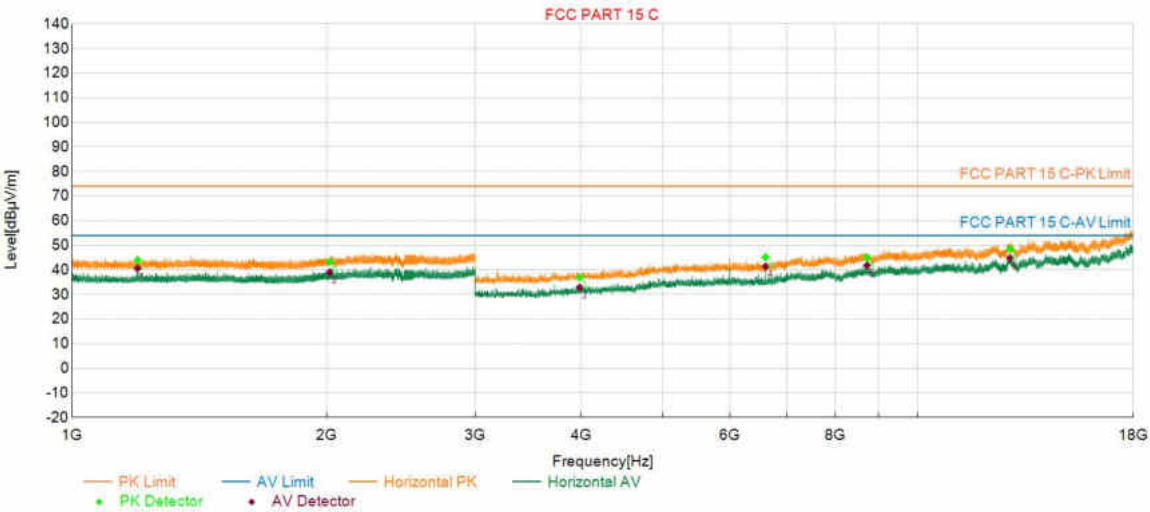

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1195.81	2.89	43.98	74.00	30.02	150	90	Horizontal
2	2018.25	6.35	43.25	74.00	30.75	150	96	Horizontal
3	3986.30	-10.91	36.97	74.00	37.03	150	105	Horizontal
4	6612.93	-1.93	45.22	74.00	28.78	150	54	Horizontal
5	8717.54	4.13	45.05	74.00	28.95	150	243	Horizontal
6	12867.49	9.99	48.47	74.00	25.53	150	0	Horizontal


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1195.81	2.89	40.63	54.00	13.37	150	90	Horizontal
2	2018.25	6.35	39.04	54.00	14.96	150	96	Horizontal
3	3986.30	-10.91	32.87	54.00	21.13	150	105	Horizontal
4	6612.93	-1.93	41.42	54.00	12.58	150	54	Horizontal
5	8717.54	4.13	41.87	54.00	12.13	150	243	Horizontal
6	12867.49	9.99	44.82	54.00	9.18	150	0	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2480	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 13:06:41

Test Graph

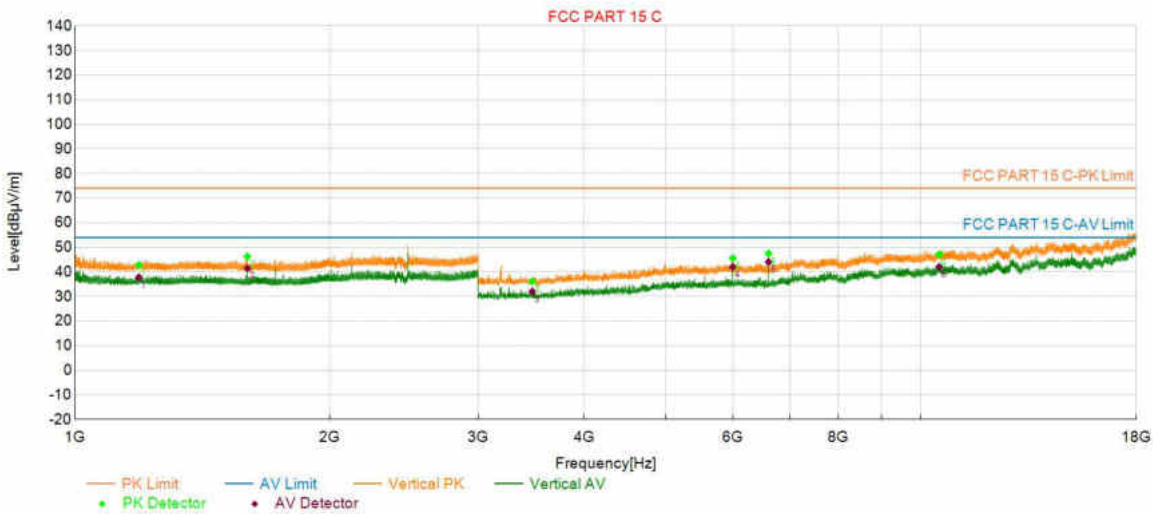

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1190.21	2.83	42.77	74.00	31.23	150	238	Vertical
2	1599.53	4.13	46.30	74.00	27.70	150	144	Vertical
3	3474.77	-13.65	36.15	74.00	37.85	150	276	Vertical
4	6000.15	-4.16	45.60	74.00	28.40	150	110	Vertical
5	6612.93	-1.93	47.50	74.00	26.50	150	77	Vertical
6	10522.13	7.04	47.17	74.00	26.83	150	304	Vertical


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1190.21	2.83	37.78	54.00	16.22	150	238	Vertical
2	1599.53	4.13	41.47	54.00	12.53	150	144	Vertical
3	3474.77	-13.65	32.01	54.00	21.99	150	276	Vertical
4	6000.15	-4.16	42.09	54.00	11.91	150	110	Vertical
5	6612.93	-1.93	44.06	54.00	9.94	150	77	Vertical
6	10522.13	7.04	42.06	54.00	11.94	150	304	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:35:07

Test Graph

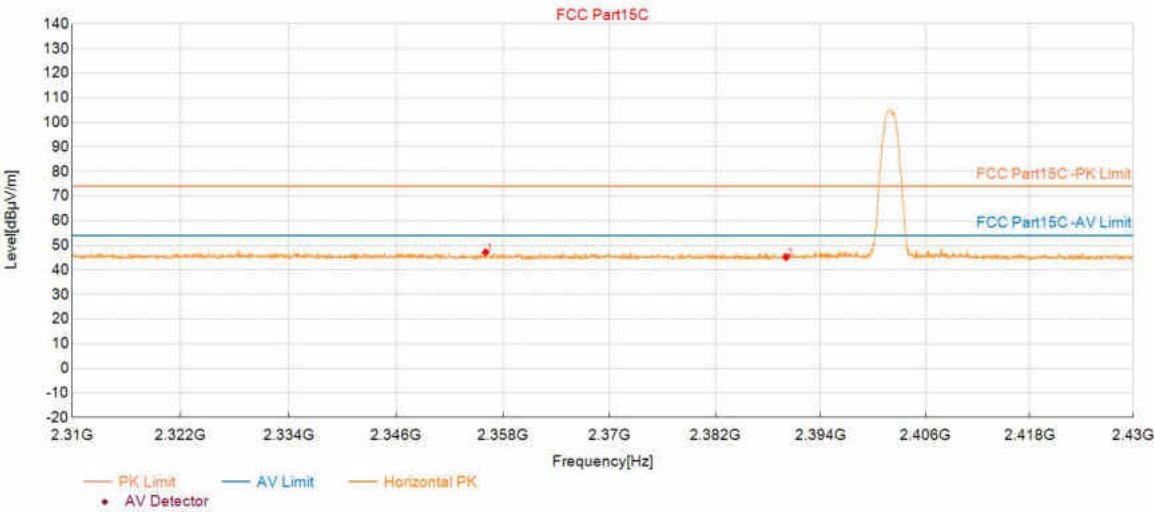


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2356.06	47.19	6.90	74.00	26.81	150	349	Horizontal
2	2390.07	45.18	6.85	74.00	28.82	150	212	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:35:46

Test Graph

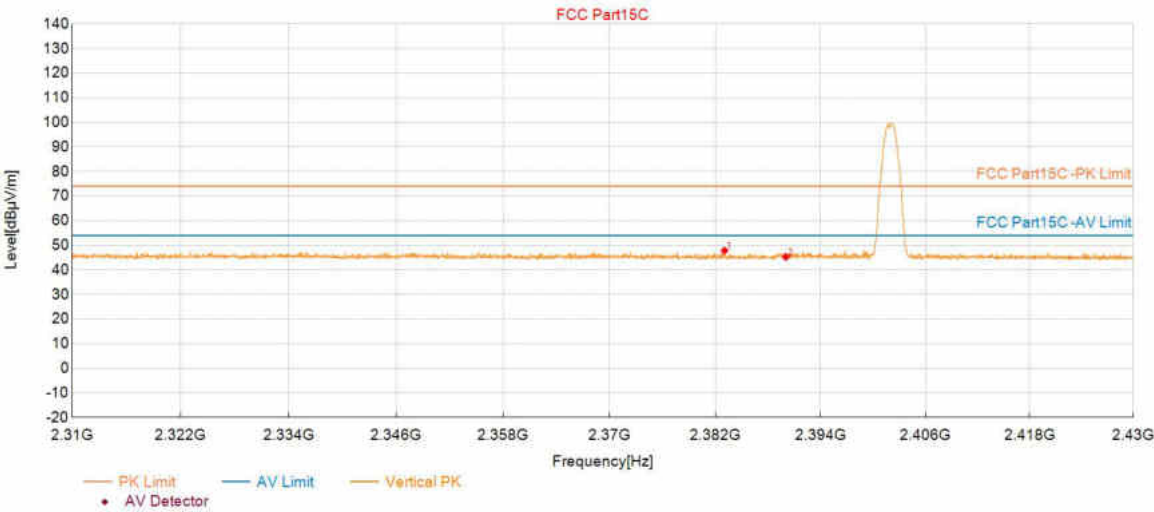


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2383.06	47.85	6.86	74.00	26.15	150	0	Vertical
2	2390.03	45.31	6.85	74.00	28.69	150	129	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	DH5_2480	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:38:12

Test Graph

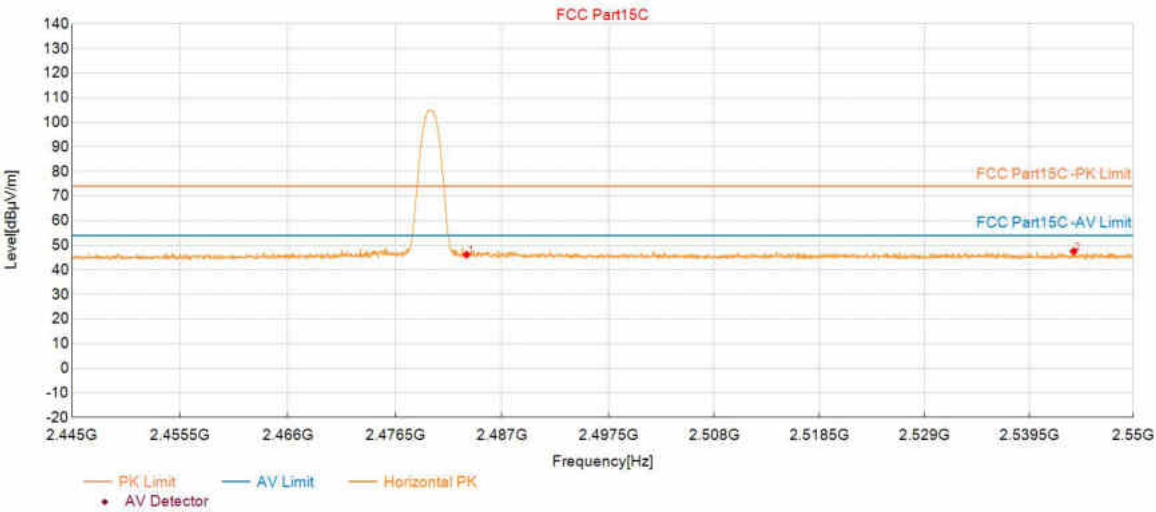


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	46.18	7.34	74.00	27.82	150	326	Horizontal
2	2543.98	47.55	7.66	74.00	26.45	150	27	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	DH5_2480	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:38:51

Test Graph

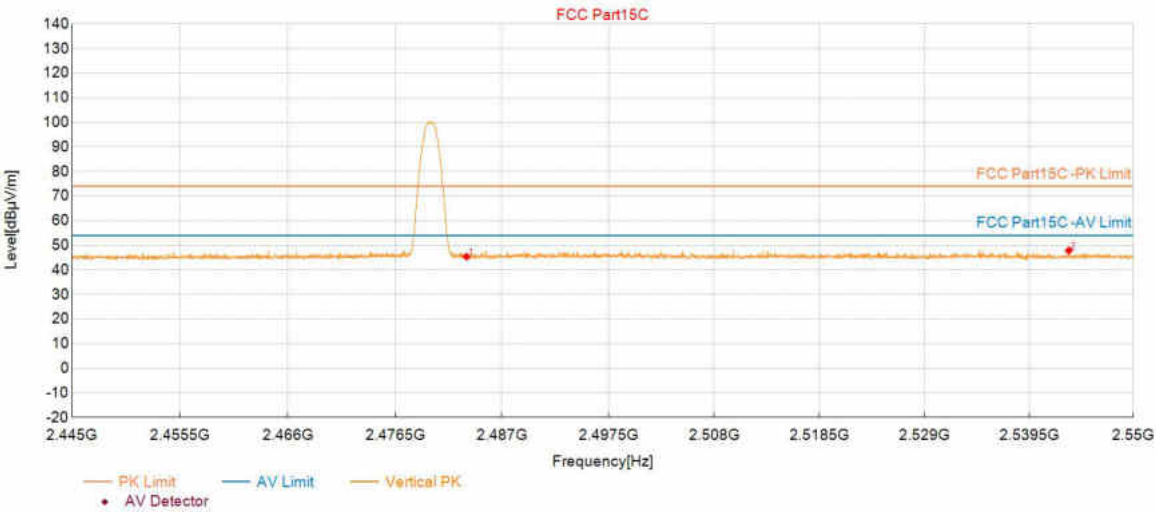


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	45.41	7.34	74.00	28.59	150	357	Vertical
2	2543.49	47.87	7.66	74.00	26.13	150	308	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	2DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:40:50

Test Graph

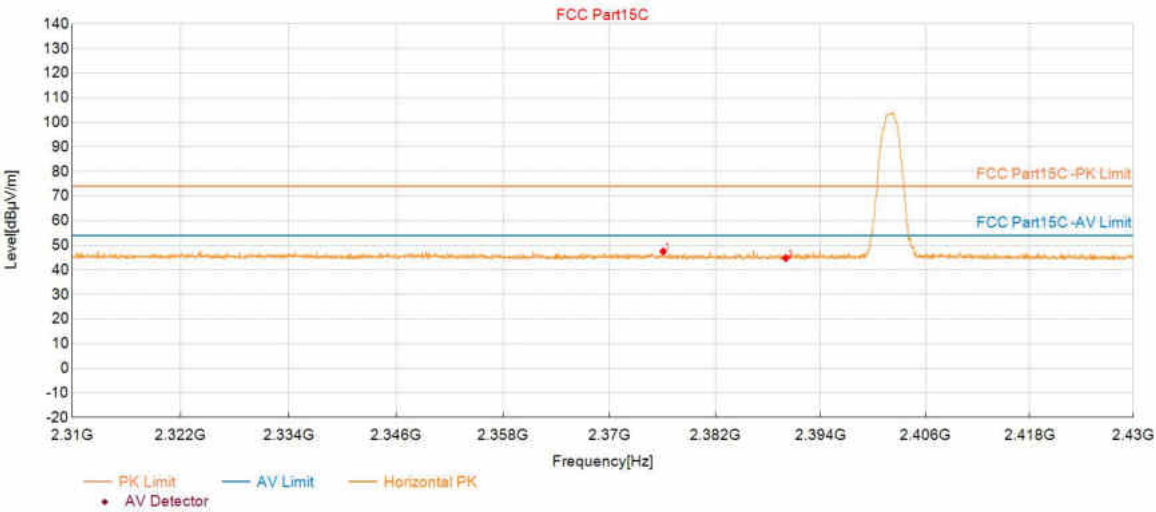


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2376.10	47.52	6.87	74.00	26.48	150	135	Horizontal
2	2390.03	44.80	6.85	74.00	29.20	150	135	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	2DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:41:30

Test Graph

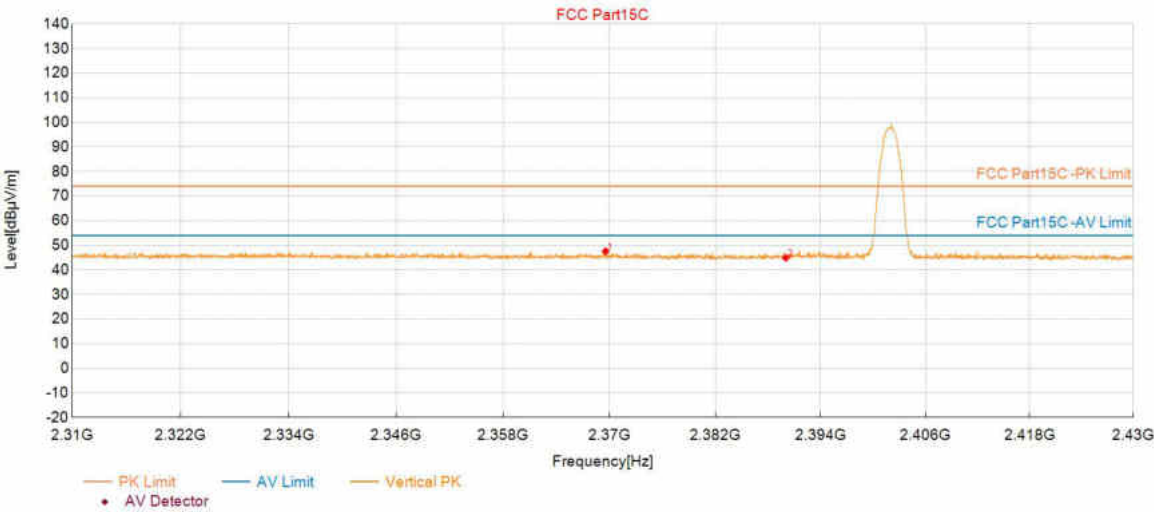


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2369.58	47.62	6.88	74.00	26.38	150	10	Vertical
2	2390.03	44.92	6.85	74.00	29.08	150	75	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	2DH5_2480	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:44:05

Test Graph

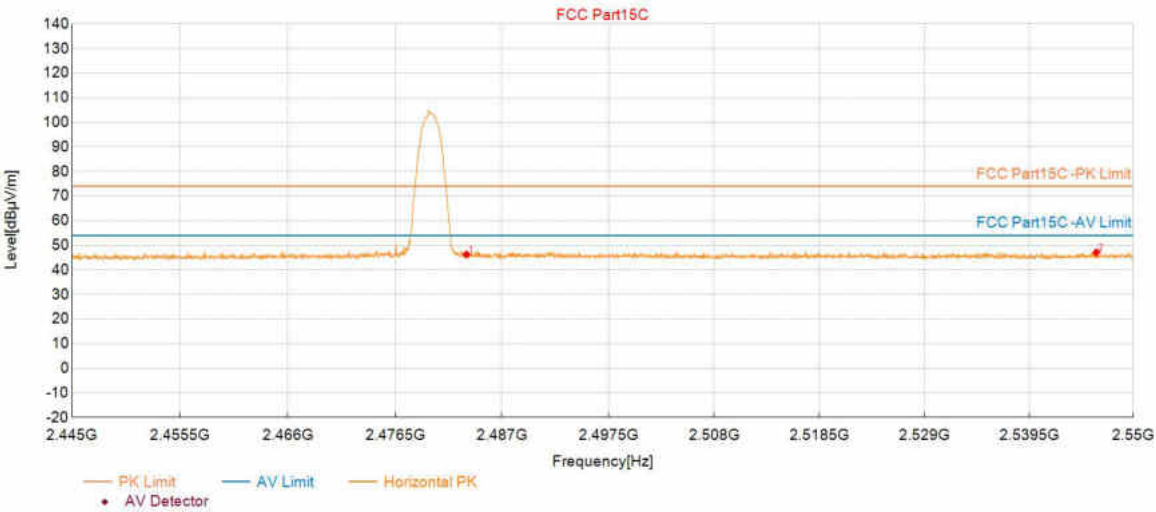


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	46.34	7.34	74.00	27.66	150	68	Horizontal
2	2546.25	47.09	7.67	74.00	26.91	150	6	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	2DH5_2480	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:44:45

Test Graph

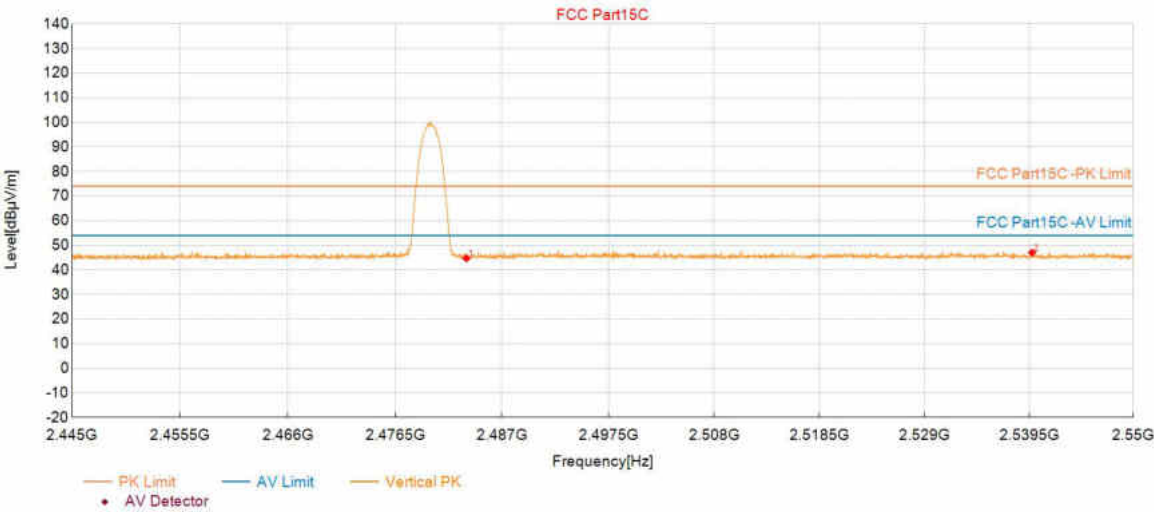


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	44.71	7.34	74.00	29.29	150	10	Vertical
2	2539.78	47.01	7.63	74.00	26.99	150	36	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:47:12

Test Graph

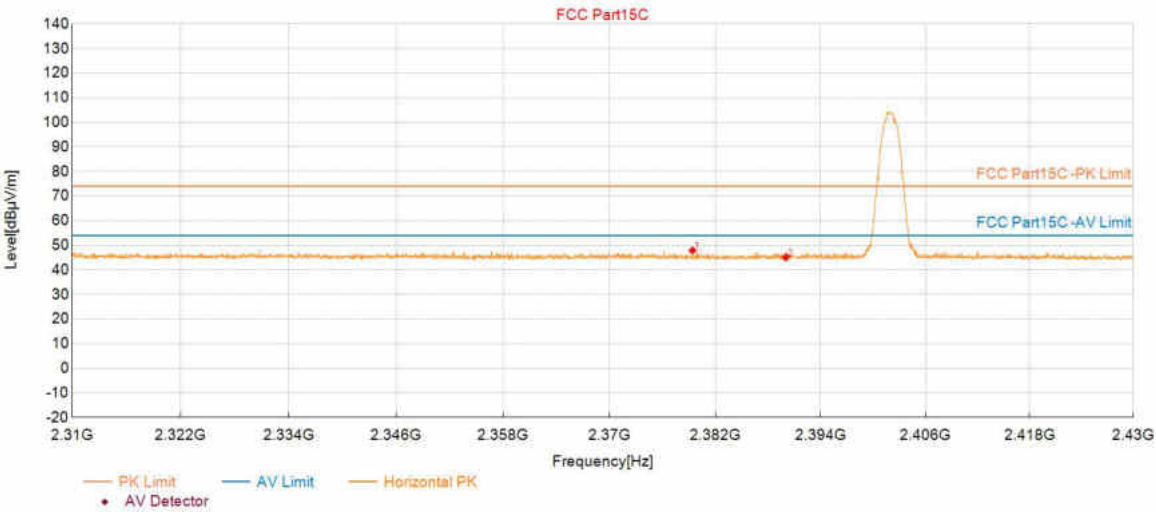


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2379.42	47.90	6.86	74.00	26.10	150	140	Horizontal
2	2390.03	45.07	6.85	74.00	28.93	150	227	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2402	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:47:52

Test Graph

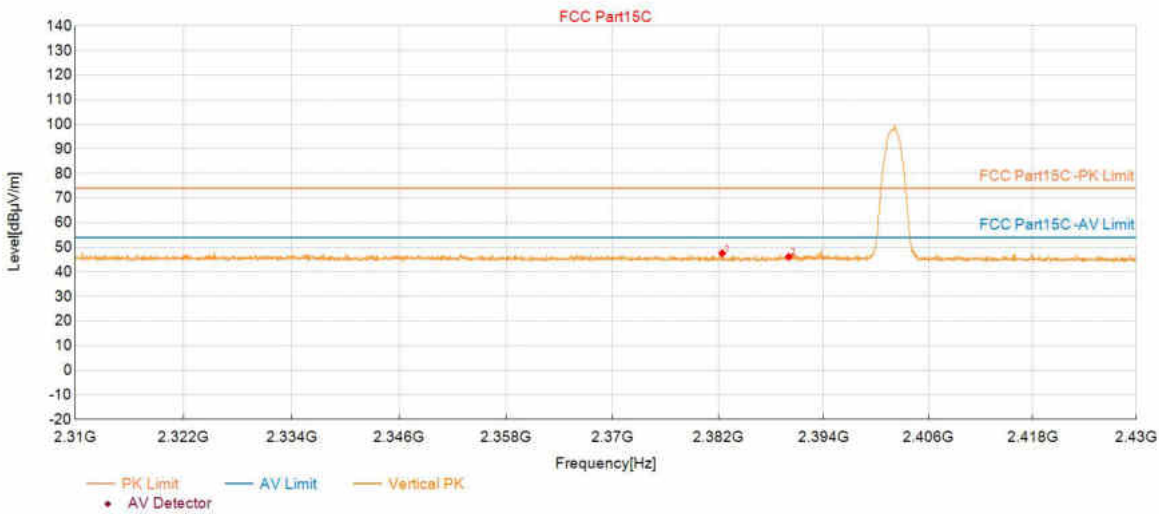


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2382.46	47.59	6.86	74.00	26.41	150	190	Vertical
2	2390.03	46.11	6.85	74.00	27.89	150	258	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2480	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:49:48

Test Graph

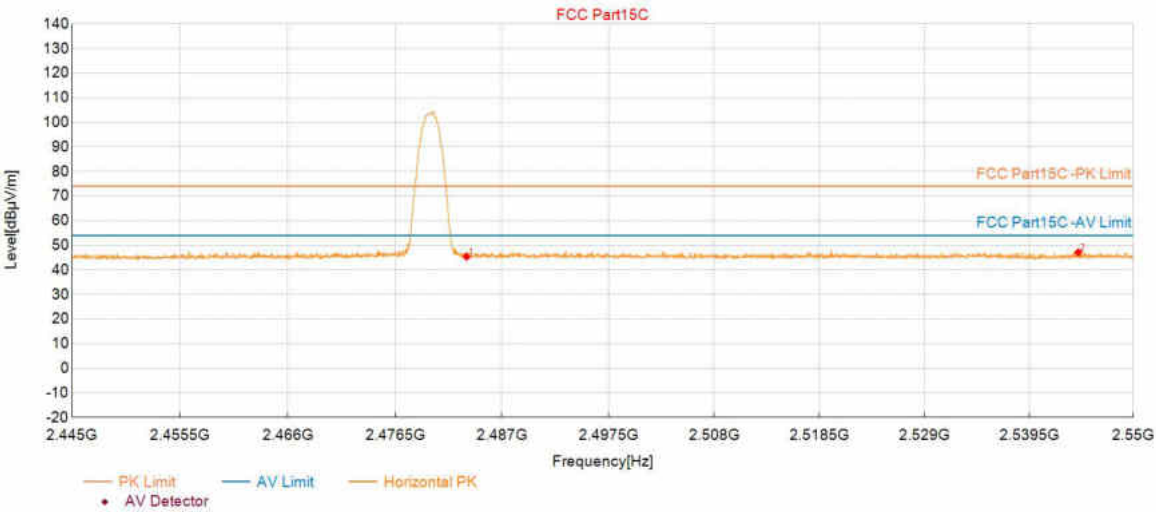


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	45.38	7.34	74.00	28.62	150	48	Horizontal
2	2544.43	47.18	7.66	74.00	26.82	150	285	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	3DH5_2480	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:	setpower:default		

Start of Test:2025-07-19 12:50:28

Test Graph

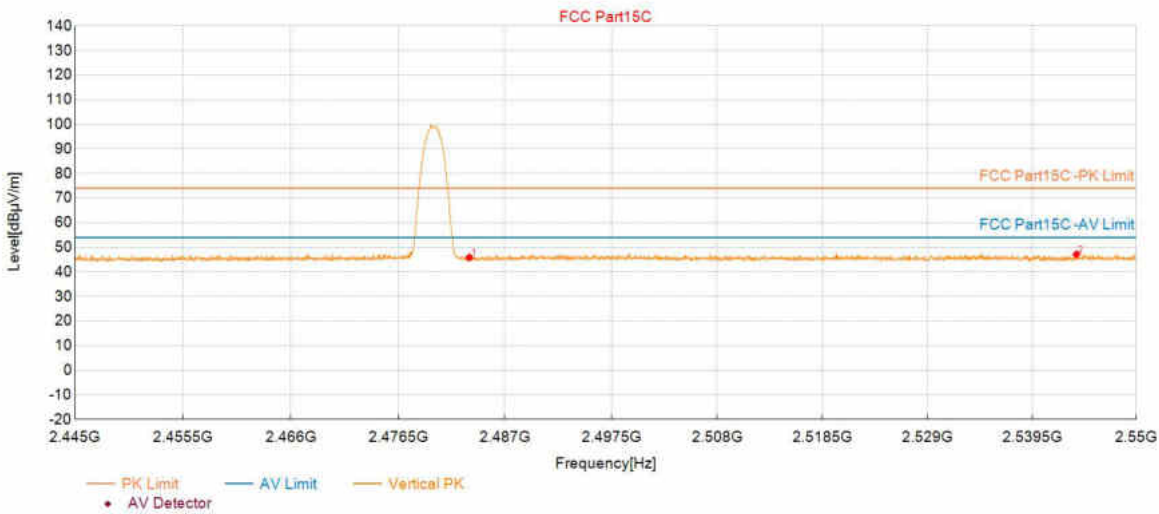

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	45.83	7.34	74.00	28.17	150	192	Vertical
2	2543.94	47.15	7.66	74.00	26.85	150	34	Vertical

END OF REPORT