

RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : Xigang Technologies Ltd.
Address : Room 123, Building B, Lane 139, Fanghua RD, Shanghai, China
Manufacturer/Factory : Yuyao Durable Electric Appliance Co., Ltd.
Address : Lane 38, Huanzhen North RD, DiTang Town, YuYao City, Zhejiang, China
E.U.T. : Phonesoap Wireless
Brand Name : N/A
Model No. : 600-W, 600-G, 600-X("X" stand for variable, which can be the number 0-9 and the letter A-Z, it represent the color of the product appearance. for example "G" represent the color gray, "W" represent the color white.)
(For model difference refer to section 1.1)

FCC ID : 2AR9J-600X

Measurement Standard : FCC PART 15 Subpart C


Date of Receiver : May 05, 2019

Date of Test : May 06, 2019 to May 24, 2019

Date of Report : May 25, 2019

This Test Report is Issued Under the Authority of :

Prepared by


Lay Lei Engineer

Approved & Authorized Signer



Iori Fan Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 EQUIPMENT MODIFICATIONS	6
1.5 SUPPORT DEVICE	6
1.6 TEST FACILITY AND LOCATION	7
1.7 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION	8
2.2 PECIAL ACCESSORIES	8
2.3 DESCRIPTION OF TEST MODES	8
2.4 EUT EXERCISE	8
3. CONDUCTED EMISSIONS TEST	9
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
3.2 TEST CONDITION	9
3.3 MEASUREMENT RESULTS	9
4. RADIATED EMISSION TEST	12
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
4.2 MEASUREMENT PROCEDURE	13
4.3 LIMIT	14
4.4 MEASUREMENT RESULTS	14
5. 20DB BANDWIDTH	21
5.1 MEASUREMENT PROCEDURE	21
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	21
5.3 MEASUREMENT RESULTS	21
6. ANTENNA APPLICATION	23
6.1 ANTENNA REQUIREMENT	23
6.2 MEASUREMENT RESULTS	23
7. TEST EQUIPMENT LIST	24

Revision History of This Test Report

Report Number	Description	Issued Date
NTC1905009FV00	Initial Issue	2019-05-25

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

Product name	: Phonesoap Wireless
Main model	: 600-W
Additional model	: 600-G, 600-X("X" stand for variable, which can be the number 0-9 and the letter A-Z, it represent the color of the product appearance. for example "G" represent the color gray, "W" represent the color white.)
Rating	: AC 100V-240V, 50/60Hz
Test voltage	: AC 120V/60Hz
Adapter	: MODEL: XS-0503100S INPUT: 100-240V~50/60Hz 0.5A OUT PUT: 5V 3100mA
Cable	: DC Line: 1.11m unshielded
Software version	: V1.0
Hardware version	: V1.0
Description of model difference	: These models have the same circuit schematic, construction, PCB Layout and critical components. Their difference are the appearance colours and model name for trading purpose.
Remark	: According to the model difference, all tests were performed on model 600-W.

Technical Specification:

Frequency Range	: 110.5-205KHz
Test Channel	: 124KHz
Type of Modulation	: ASK
Type of Antenna	: induction coil Antenna
Antenna Gain	: 0 dBi

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AR9J-600X filing to comply with FCC Part 15 (2017), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

Mobile Phone	:	Manufacturer: Apple
		M/N: MQA62CH/A
		S/N: DNQVRGNLJCLG

1.6 Test Facility and Location

Site Description

EMC Lab : Listed by CNAS, August 13, 2018
The certificate is valid until August 13, 2024
The Laboratory has been assessed and proved to
be in compliance with CNAS/CL01
The Certificate Registration Number is L5795.

Listed by A2LA, November 01, 2017
The certificate is valid until December 31, 2019
The Laboratory has been assessed and proved to
be in compliance with ISO17025
The Certificate Registration Number is 4429.01

Listed by FCC, November 06, 2017
The Designation Number is CN1214
Test Firm Registration Number: 907417

Name of Firm : Listed by Industry Canada, June 08, 2017
The Certificate Registration Number. Is 46405-9743
Dongguan Nore Testing Center Co., Ltd.
(Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science & Technology Park,
Hongtu Road, Nancheng District, Dongguan City,
Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.35	20dB Bandwidth	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.207 (a)	AC Power Conducted Emission	$\pm 1.06\text{dB}$	Compliant
§15.209	Radiated Emission	$\pm 3.70\text{dB}$	Compliant

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 pecial Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

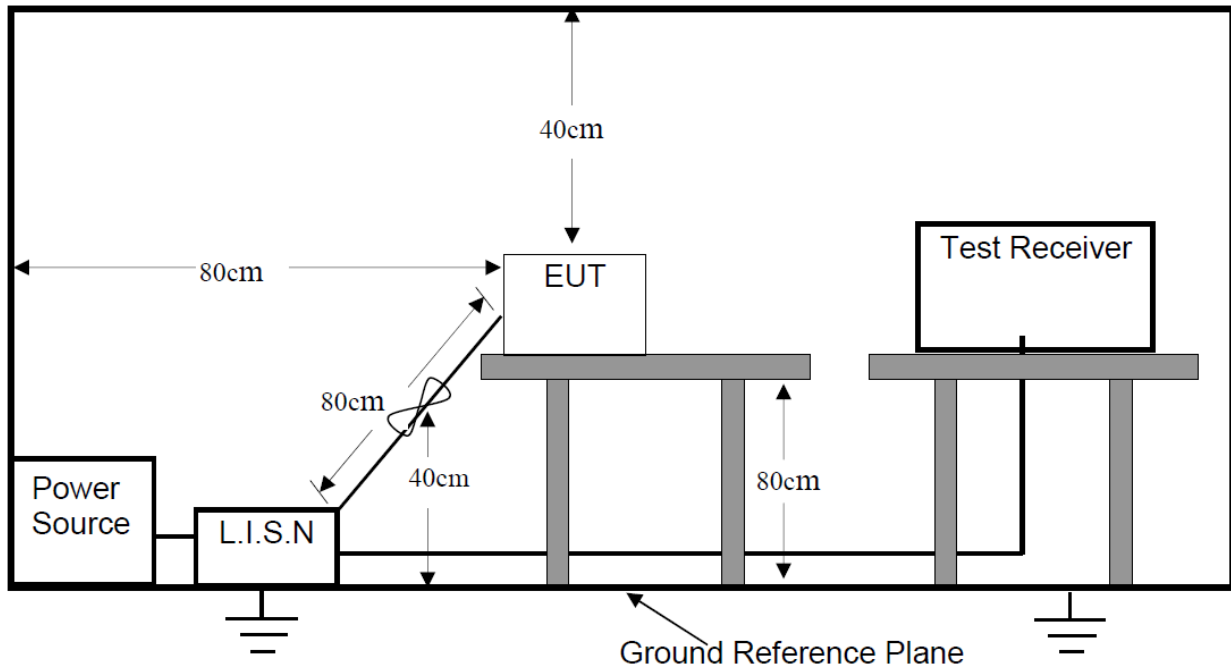

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: TX(Full Load, Half Load, Empty Load)

3.3 Measurement Results

Please refer to following plots of worst case: TX(Full Load)



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


Conducted Emission Measurement

File :600-W
80.0 dBuV

Data :#1

Date: 2019/5/8

Time: 15:24:23

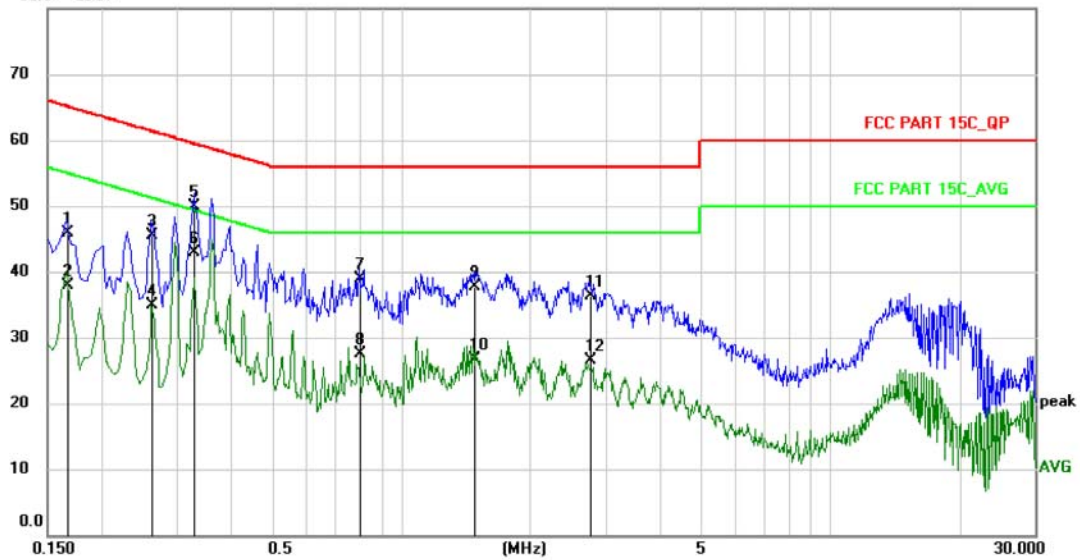


Site: Phase: **L1** Temperature: 26
Limit: FCC PART 15C_QP Power: AC120V/60Hz Humidity: 50 %
EUT: Phonesoap Wireless
M/N: 600-W
Mode: TX
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1660	35.29	10.61	45.90	65.16	-19.26	QP	
2		0.1660	27.29	10.61	37.90	55.16	-17.26	AVG	
3		0.2620	34.99	10.61	45.60	61.37	-15.77	QP	
4		0.2620	24.39	10.61	35.00	51.37	-16.37	AVG	
5		0.3300	39.29	10.61	49.90	59.45	-9.55	QP	
6	*	0.3300	32.29	10.61	42.90	49.45	-6.55	AVG	
7		0.7980	28.26	10.64	38.90	56.00	-17.10	QP	
8		0.7980	16.96	10.64	27.60	46.00	-18.40	AVG	
9		1.4819	27.15	10.65	37.80	56.00	-18.20	QP	
10		1.4819	16.05	10.65	26.70	46.00	-19.30	AVG	
11		2.7540	25.65	10.65	36.30	56.00	-19.70	QP	
12		2.7540	15.95	10.65	26.60	46.00	-19.40	AVG	



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Conducted Emission Measurement

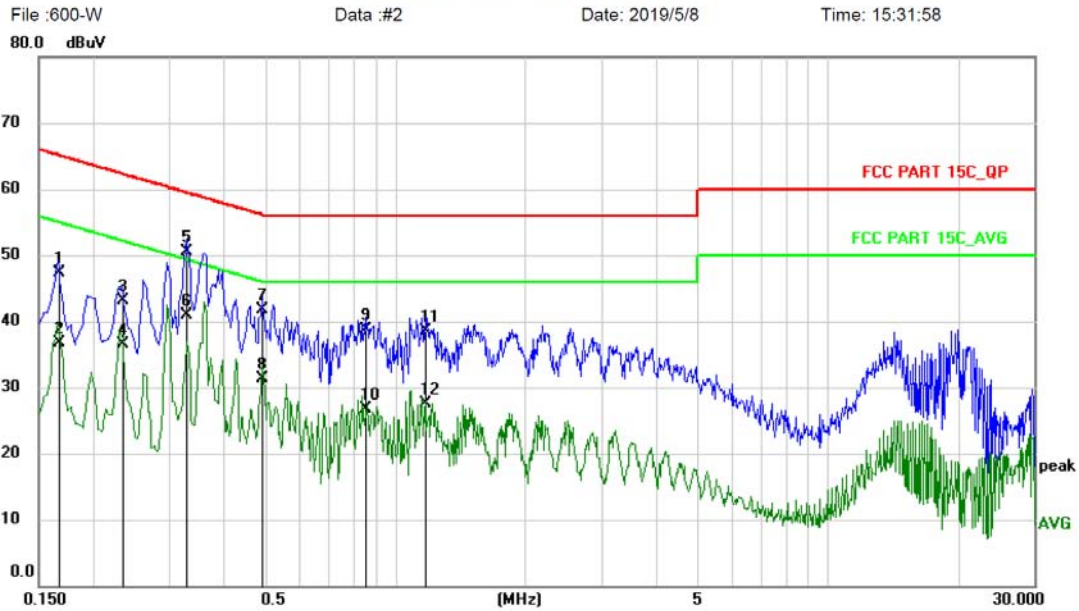


Site: Phase: **N** Temperature: 26
Limit: FCC PART 15C_QP Power: AC120V/60Hz Humidity: 50 %
EUT: Phonesoap Wireless
M/N: 600-W
Mode: TX
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1660	36.69	10.61	47.30	65.16	-17.86	QP	
2		0.1660	26.19	10.61	36.80	55.16	-18.36	AVG	
3		0.2340	32.59	10.61	43.20	62.31	-19.11	QP	
4		0.2340	25.99	10.61	36.60	52.31	-15.71	AVG	
5		0.3300	39.89	10.61	50.50	59.45	-8.95	QP	
6	*	0.3300	30.29	10.61	40.90	49.45	-8.55	AVG	
7		0.4940	31.18	10.62	41.80	56.10	-14.30	QP	
8		0.4940	20.78	10.62	31.40	46.10	-14.70	AVG	
9		0.8540	28.16	10.64	38.80	56.00	-17.20	QP	
10		0.8540	16.06	10.64	26.70	46.00	-19.30	AVG	
11		1.1740	27.95	10.65	38.60	56.00	-17.40	QP	
12		1.1740	16.85	10.65	27.50	46.00	-18.50	AVG	


4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)

4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

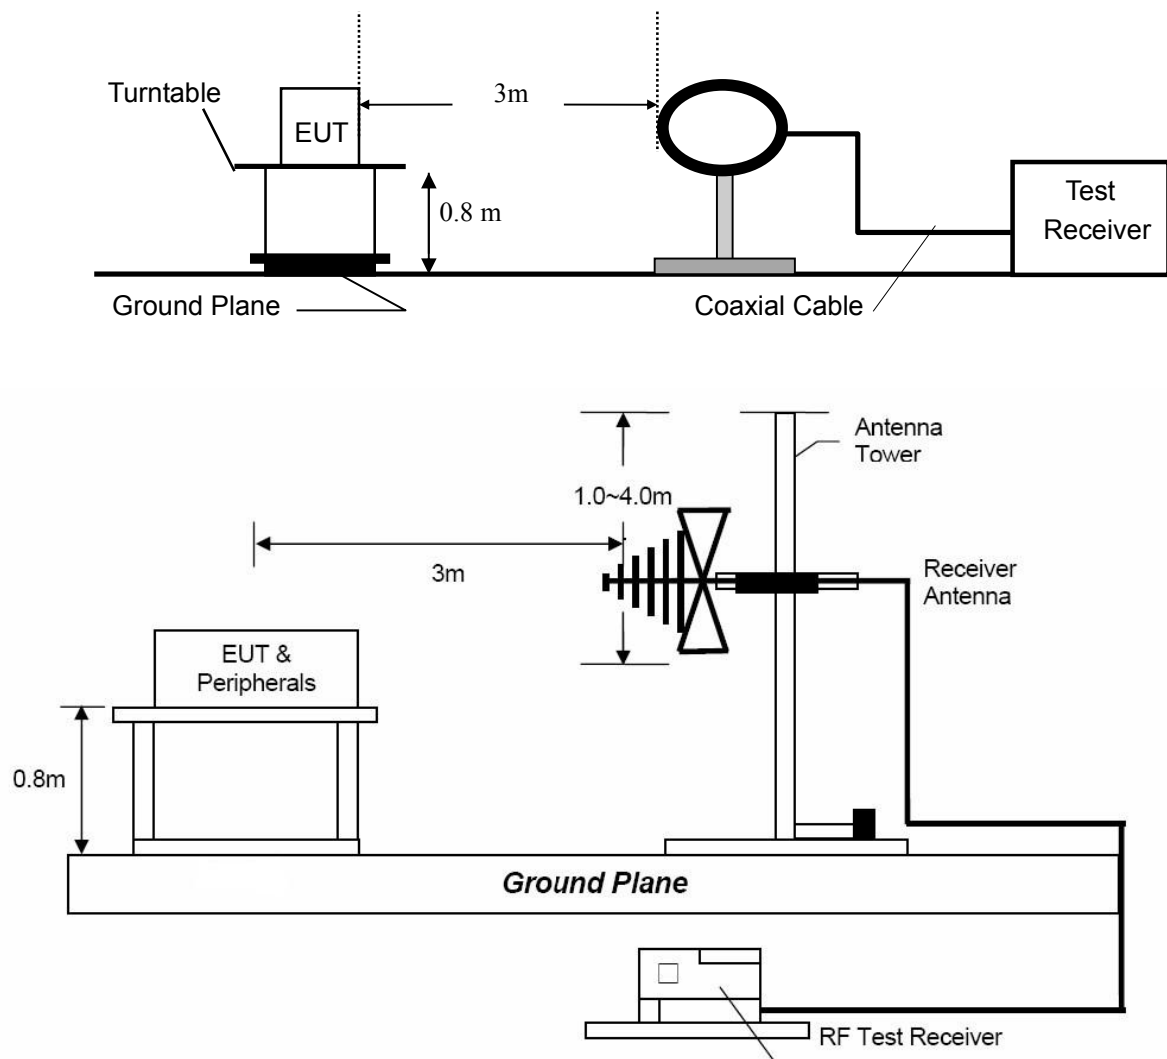

4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

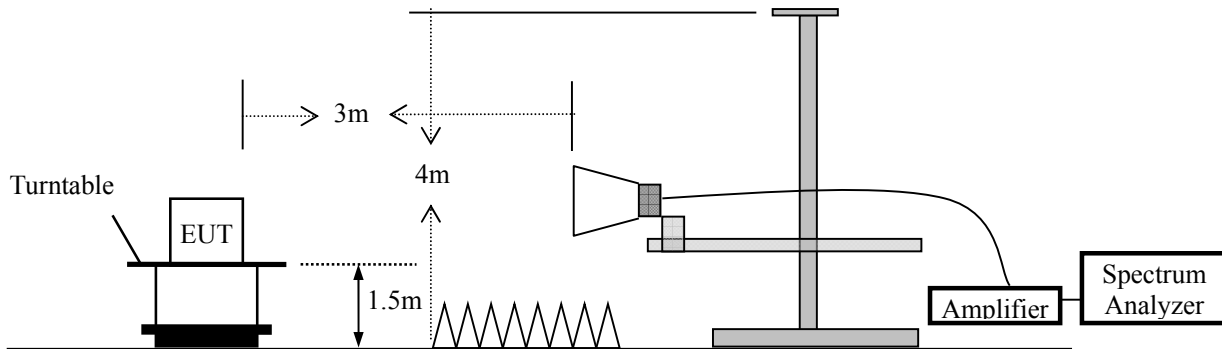

4.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark: (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

4.4 Measurement Results

Please refer to following plots of worst case: TX(Full Load)



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement


File : 600-W

Data : #7

Date: 2019/5/13

Time: 8:59:18

133.0 dBuA

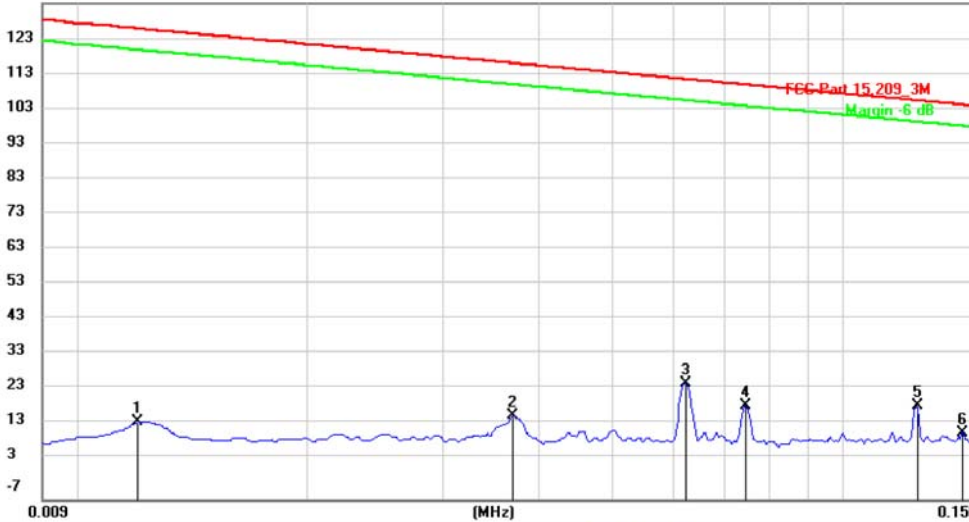

Site

Limit: FCC Part 15.209_3M

EUT: Phonesoap Wireless

M/N: 600-W

Mode: TX

Note:

Polarization: **Horizontal**

Power: AC120V/60Hz

Dist: 3m

Temperature: 26

Humidity: 60 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Antenna Height cm	Table Degree	Comment
1		0.0120	-16.56	31.51	14.95	125.84	-110.89	QP		
2		0.0371	-15.80	32.32	16.52	116.09	-99.57	QP		
3	*	0.0623	-6.42	32.30	25.88	111.61	-85.73	QP		
4		0.0747	-13.03	32.30	19.27	110.05	-90.78	QP		
5		0.1250	-13.02	32.30	19.28	105.60	-86.32	QP		
6		0.1436	-20.72	32.30	11.58	104.40	-92.82	QP		


Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Radiated Emission Measurement

File :600-W Data :#8 Date: 2019/5/13 Time: 9:06:18

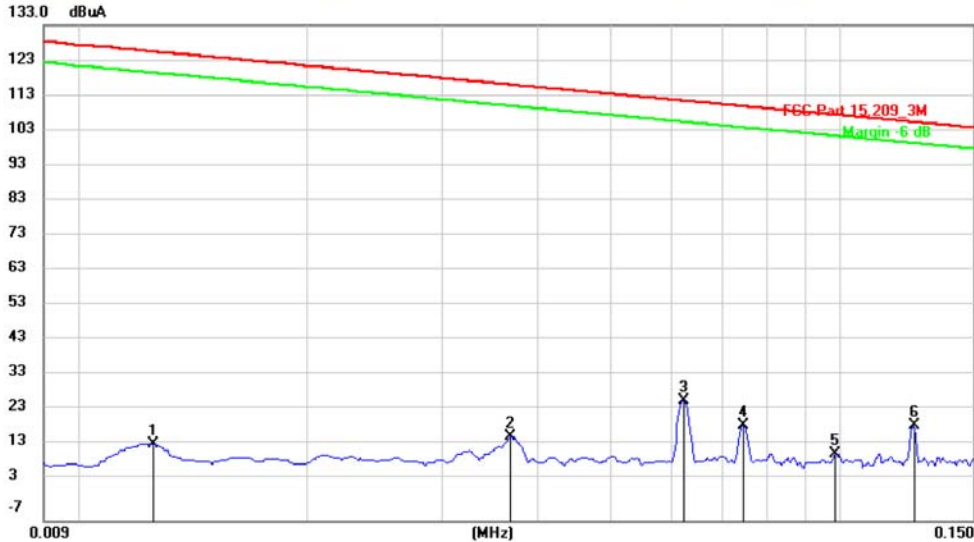

Site
Limit: FCC Part 15.209_3M
EUT: Phonesoap Wireless
M/N: 600-W
Mode: TX
Note:

Polarization: **Vertical**
Power: AC120V/60Hz
Distance: 3m
Temperature: 26
Humidity: 60 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuA	dBuA	dB	cm	degree	Comment
1		0.0125	-16.88	31.58	14.70	125.49	-110.79	QP		
2		0.0369	-15.80	32.32	16.52	116.14	-99.62	QP		
3	*	0.0623	-5.43	32.30	26.87	111.61	-84.74	QP		
4		0.0747	-12.39	32.30	19.91	110.05	-90.14	QP		
5		0.0986	-20.72	32.31	11.59	107.65	-96.06	QP		
6		0.1250	-12.38	32.30	19.92	105.60	-85.68	QP		

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


Radiated Emission Measurement

File :600-W
133.0 dBuA

Data :#6

Date: 2019/5/13

Time: 8:52:39

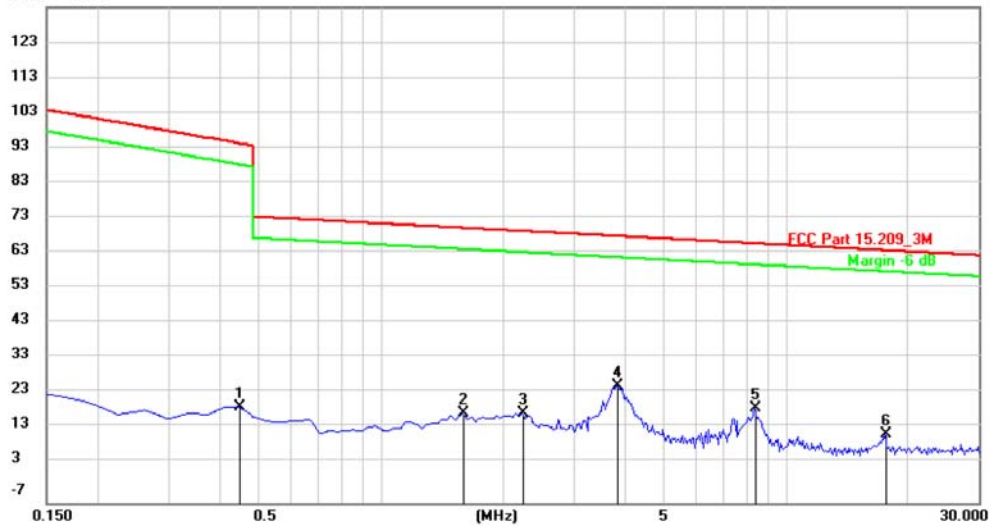

Site
Limit: FCC Part 15.209_3M
EUT: Phonesoap Wireless
M/N: 600-W
Mode: TX
Note:

Polarization: **Horizontal**
Power: AC120V/60Hz
Distance: 3m
Temperature: 26
Humidity: 60 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Antenna Height cm	Table Degree	Comment
1		0.4485	-12.05	32.22	20.17	94.56	-74.39	QP		
2		1.6050	-13.96	32.17	18.21	70.68	-52.47	QP		
3		2.2395	-13.84	32.17	18.33	69.80	-51.47	QP		
4	*	3.8439	-6.09	32.20	26.11	68.38	-42.27	QP		
5		8.3961	-12.66	32.30	19.64	66.32	-46.68	QP		
6		17.6122	-19.95	32.31	12.36	64.37	-52.01	QP		

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :600-W

Data :#9

Date: 2019/5/13

Time: 9:12:48

133.0 dBuA



Site

Limit: FCC Part 15.209_3M

EUT: Phonesoap Wireless

M/N: 600-W

Mode: TX

Note:

Polarization: **Vertical**

Power: AC120V/60Hz

Distance: 3m

Temperature: 26

Humidity: 60 %


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Antenna Height cm	Table Degree degree	Comment
1		0.4112	-12.82	32.23	19.41	95.31	-75.90	QP		
2		0.8215	-10.02	32.18	22.16	72.44	-50.28	QP		
3		1.1947	-6.75	32.17	25.42	71.45	-46.03	QP		
4	*	2.0529	1.98	32.17	34.15	70.03	-35.88	QP		
5		3.7692	-9.76	32.19	22.43	68.43	-46.00	QP		
6		8.6198	-17.45	32.31	14.86	66.25	-51.39	QP		

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

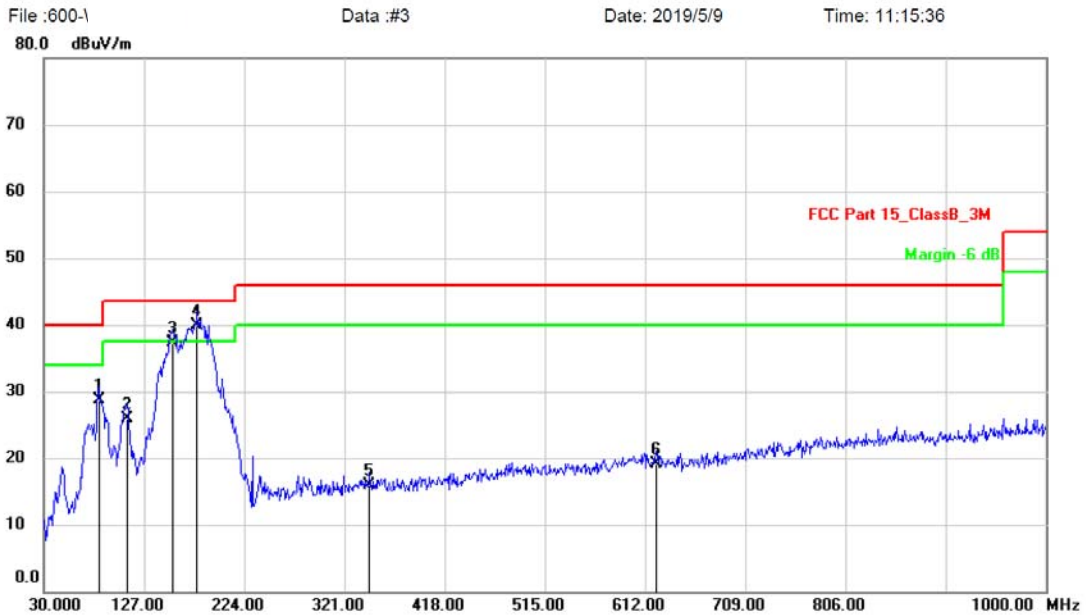

Site: 3m Chamber
Limit: FCC Part 15_ClassB_3M
EUT: Phonesoap Wireless
M/N: 600-W
Mode: TX
Note:


Polarization: **Horizontal** Temperature: 26
Power: AC120V/60Hz Humidity: 47 %
Distance: 3m

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		83.3500	44.20	-15.50	28.70	40.00	-11.30	QP		
2		110.5100	38.26	-12.26	26.00	43.50	-17.50	QP		
3		155.1300	52.66	-15.36	37.30	43.50	-6.20	QP		
4	*	178.4100	54.25	-14.25	40.00	43.50	-3.50	QP		
5		345.2500	25.10	-9.20	15.90	46.00	-30.10	QP		
6		622.6700	24.28	-5.08	19.20	46.00	-26.80	QP		



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

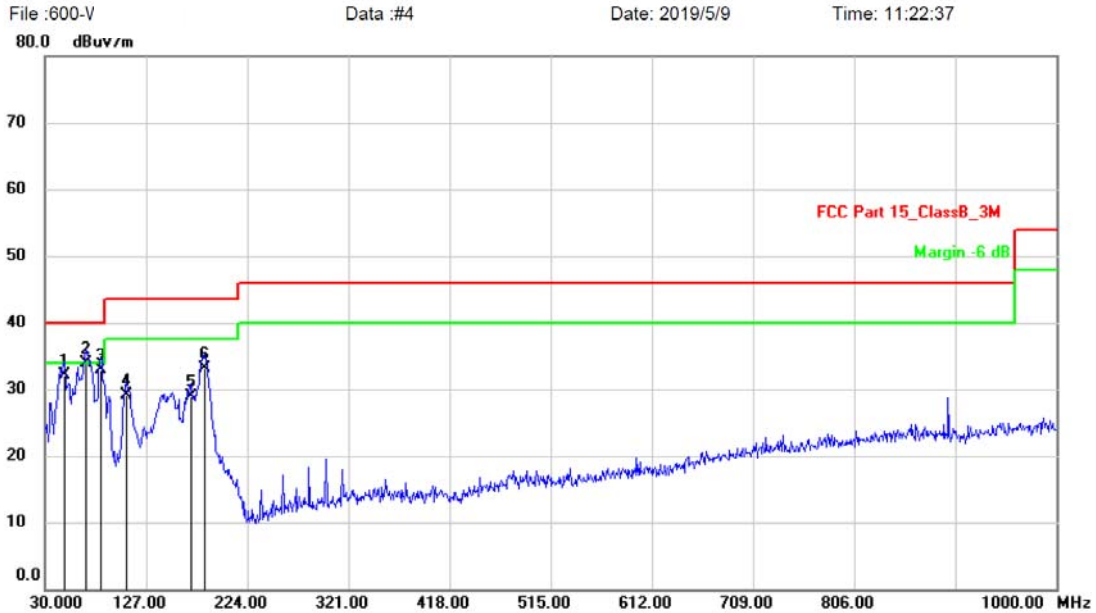

Site: 3m Chamber

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15_ClassB_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT: Phonesoap Wireless

Distance: 3m

M/N: 600-W

Mode: TX

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		48.4300	45.52	-13.42	32.10	40.00	-7.90	QP		
2	*	69.7699	51.21	-17.31	33.90	40.00	-6.10	QP		
3		83.3500	51.40	-18.50	32.90	40.00	-7.10	QP		
4		107.6000	45.26	-16.06	29.20	43.50	-14.30	QP		
5		169.6799	46.71	-17.81	28.90	43.50	-14.60	QP		
6		183.2600	50.14	-16.94	33.20	43.50	-10.30	QP		


5. 20dB Bandwidth

5.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.35:

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Refer to attached data chart.

RBW:	1KHz	VBW:	3KHz
Test By:	Sance	Spectrum Detector:	PK
Temperature :	24 °C	Test Date :	May 24, 2019
Test Result:	PASS	Humidity :	50 %

Channel frequency (KHz)	20dB Down BW(KHz)
124	0.833

Test Channel

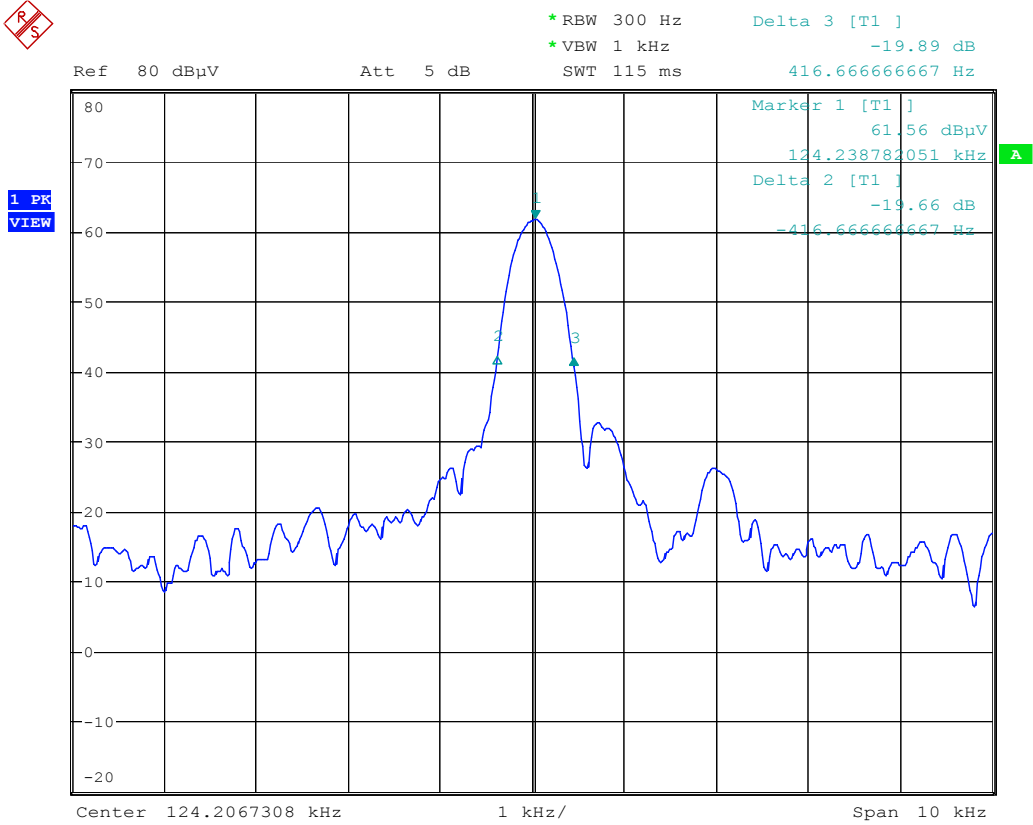

Date: 24.MAY.2019 11:18:10

6. Antenna Application

6.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2 Measurement Results

The antenna is induction coil antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 0dBi, So, the antenna is consider meet the requirement.

7. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 14, 2019	Mar. 13, 2020
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Mar. 15, 2019	Mar. 14, 2020
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Mar. 14, 2019	Mar. 13, 2020
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Mar. 14, 2019	Mar. 13, 2020
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Apr. 25, 2019	Apr. 25, 2020
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 14, 2019	Mar. 13, 2020
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Mar. 14, 2019	Mar. 13, 2020
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Mar. 15, 2019	Mar. 14, 2020
RF Cable	Huber+Suhner	SF-104	N/A	9KHz~40GHz	Apr. 25, 2019	Apr. 24, 2020
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Apr. 25, 2019	Apr. 24, 2020
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Apr. 25, 2019	Apr. 24, 2020
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	Apr. 06, 2019	April. 05, 2020
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Nov. 03, 2018	Nov. 02, 2019
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Apr. 25, 2019	Apr. 24, 2020
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Mar. 14, 2019	Mar. 13, 2020
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 03, 2018	Nov. 02, 2019
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 03, 2018	Nov. 02, 2019

---End---