

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Arovast Corporation

Levoit Vesync Aura Sensor

Model Number: LTM-AS041S-WUS

Additional Model: LTM-AS041S-XXXY
(XXX may be A-Z, Y may be A-Z or none)

FCC ID: 2ARBY-AS041S

Applicant :	Arovast Corporation
Address:	1202 N Miller St. Suite A, Anaheim, California 92806, United States
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808



Report Number:	ESTE-R2203225
Date of Test:	Mar. 03~Mar. 16, 2022
Date of Report:	Mar. 21, 2022

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
1.2. Antenna Information	5
1.3. Information of RF Cable	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram	8
2.6. Test Mode.....	9
2.7. Power Setting of Test Software.....	9
2.8. Duty Cycle.....	10
2.9. Channel List	11
2.10. Test Equipment List	12
3. 6DB BANDWIDTH.....	13
3.1. Limit	13
3.2. Test Setup.....	13
3.3. Spectrum Analyzer Setting.....	13
3.4. Test Procedure.....	13
3.5. Test Result.....	14
4. MAXIMUM PEAK OUTPUT POWER.....	16
4.1. Limit	16
4.2. Test Setup.....	16
4.3. Spectrum Analyzer Setting.....	16
4.4. Test Procedure.....	16
4.5. Test Result.....	17
5. POWER SPECTRAL DENSITY	19
5.1. Limit	19
5.2. Test Setup.....	19
5.3. Spectrum Analyzer Setting.....	19
5.4. Test Procedure.....	19
5.5. Test Result.....	20
6. CONDUCTED BAND EDGE	22
6.1. Limit	22
6.2. Test Setup.....	22
6.3. Spectrum Analyzer Setting.....	22
6.4. Test Procedure.....	22
6.5. Test Result.....	23
7. CONDUCTED SPURIOUS EMISSIONS.....	24
7.1. Limit	24
7.2. Test Setup.....	24

7.3.	Spectrum Analyzer Setting.....	24
7.4.	Test Procedure.....	24
7.5.	Test Result.....	25
8.	RADIATED SPURIOUS EMISSIONS AND BAND EDGE	27
8.1.	Limit.....	27
8.2.	Test Setup.....	28
8.3.	Spectrum Analyzer Setting.....	29
8.4.	Test Procedure.....	30
8.5.	Test Result.....	31
9.	ANTENNA REQUIREMENTS.....	43
9.1.	Limit.....	43
9.2.	Test Result.....	43
10.	TEST SETUP PHOTO	44
11.	EUT PHOTO.....	45

EST Technology Co., Ltd.

Applicant:	Arovast Corporation		
Address:	1202 N Miller St. Suite A, Anaheim, California 92806, United States		
Manufacturer:	Arovast Corporation		
Address:	1202 N Miller St. Suite A, Anaheim, California 92806, United States		
E.U.T:	Levoit Vesync Aura Sensor		
Model Number:	LTM-AS041S-WUS		
Additional Model:	LTM-AS041S-XXXY (XXX may be A-Z, Y may be A-Z or none) Note: They are identical except model name and appearance of color.		
Power Supply:	DC 3V		
Trade Name:	Levoit	Serial No.:	-----
Date of Receipt:	Mar. 03, 2022	Date of Test:	Mar. 03~Mar. 16, 2022
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:		Reviewed by:	
 Ring Yang / Assistant		 Seven Wang / Engineer	
		Date: Mar. 21, 2022 Approved by:  Iceman Hu / Manager	
Other Aspects:			
None.			
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products, It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Levoit Vesync Aura Sensor
Model Number	:	LTM-AS041S-WUS
Software Version	:	N/A
Hardware Version	:	N/A
Operation frequency	:	2405MHz~2480MHz
Number of channel	:	16
Max Output Power (PEAK)	:	10.27dBm
Modulation Type	:	OQPSK
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	PCB	-	-0.5

Note: This information is provided by the applicant.

1.3. Information of RF Cable

Cable Loss(dB)	Provided by
1.0	Arovast Corporation
Note: 1.The customer declared the loss value of the RF Cable, and the test results of this report only apply to the sample as received. 2. This information is provided by the applicant.	

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth	15.247(a)(2)	PASS
4	Maximum Peak Output Power	15.247(b)(3)	PASS
5	Power Spectral Density	15.247(e)	PASS
6	Conducted Band Edge	15.247(d)	PASS
7	Conducted Spurious Emissions	15.247(d)	PASS
8	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
9	AC Power Line Conducted Emissions	15.207	N/A
10	Antenna Requirement	15.203	PASS

Note:

(1) “N/A” denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2024

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2024

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2024

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (Below 30MHz)	$\pm 1.62\text{ dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 25GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into zigbee test mode by software before test.

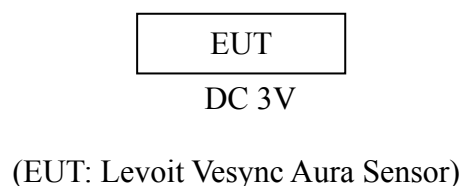

2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Modulation Type	Test Channel
6dB Bandwidth	OQPSK	Low/Middle/High
Maximum Peak Output Power	OQPSK	Low/Middle/High
Power Spectral Density	OQPSK	Low/Middle/High
Conducted Band Edge	OQPSK	Low/ High
Conducted Spurious Emissions	OQPSK	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	OQPSK	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	OQPSK	Low/Middle/High
Radiated Band Edge	OQPSK	Low/High

Note:

1. In radiated measurement,the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Power Setting of Test Software

Software Name	EMI_Test_Tool		
Frequency(MHz)	2405	2445	2480
Setting	10.5	10.5	3.9


Note: This information is provided by the applicant.

2.8. Duty Cycle

Temperature	23℃	Relative Humidity	52%	Test Voltage	DC 3V
Mode	Fre(MHz)	On time(ms)	Total Time(ms)	Duty Cycle	Duty Factor
OQPSK	2445	0.21739	0.21739	100.00	0.00

Note:

1. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle ≥ 98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor(consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).

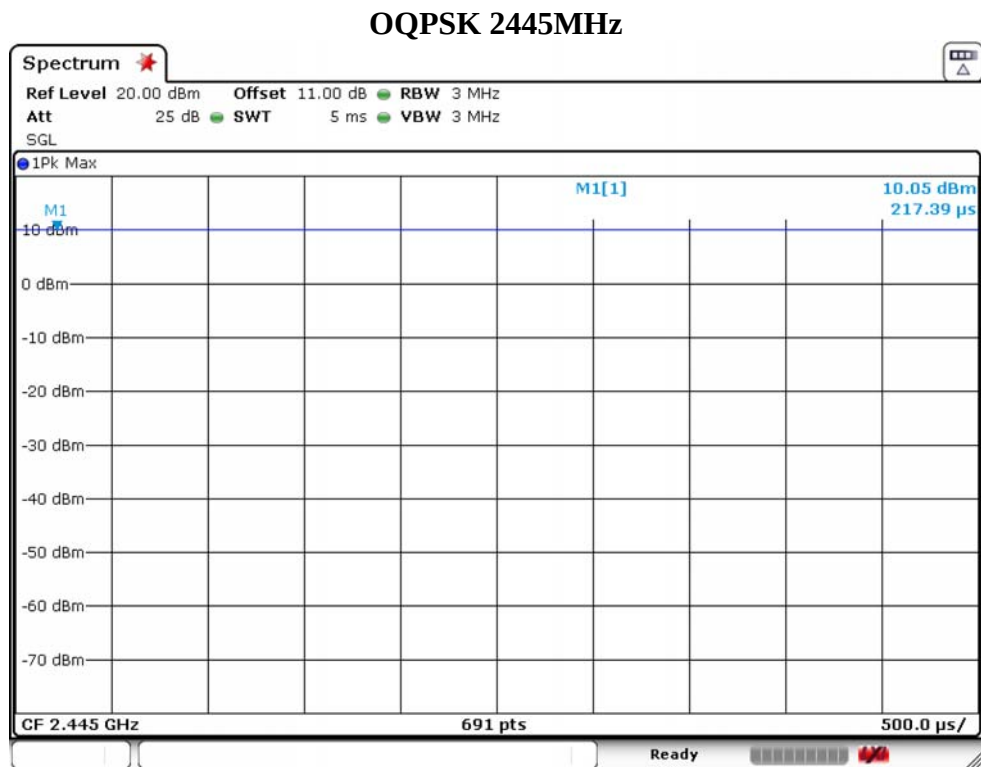

2.9. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
11	2405	12	2410
13	2415	14	2420
15	2425	16	2430
17	2435	18	2440
19	2445	20	2450
21	2455	22	2460
23	2465	24	2470
25	2475	26	2480

2.10. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,21	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,21	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E031	LISAI	June 13,21	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,21	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A


For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde&Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year

3. 6dB BANDWIDTH

3.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2. Test Setup

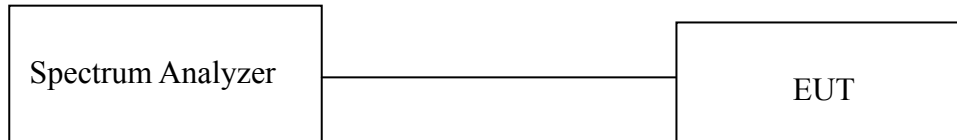

3.3. Spectrum Analyzer Setting


Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	6MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure


- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the ndB down function to measure 6dB Bandwidth.
- Repeat above procedures until all channels were measured.
- Record the results in the test report.

3.5. Test Result


Temperature	23℃	Relative Humidity	52%	
Test Voltage	DC 3V			
Mode	Freq (MHz)	6dB Bandwidth (MHz)	6dB BW Limit (MHz)	Result
OQPSK	2405	1.5282	≥0.5	PASS
	2445	1.4935	≥0.5	PASS
	2480	1.3893	≥0.5	PASS

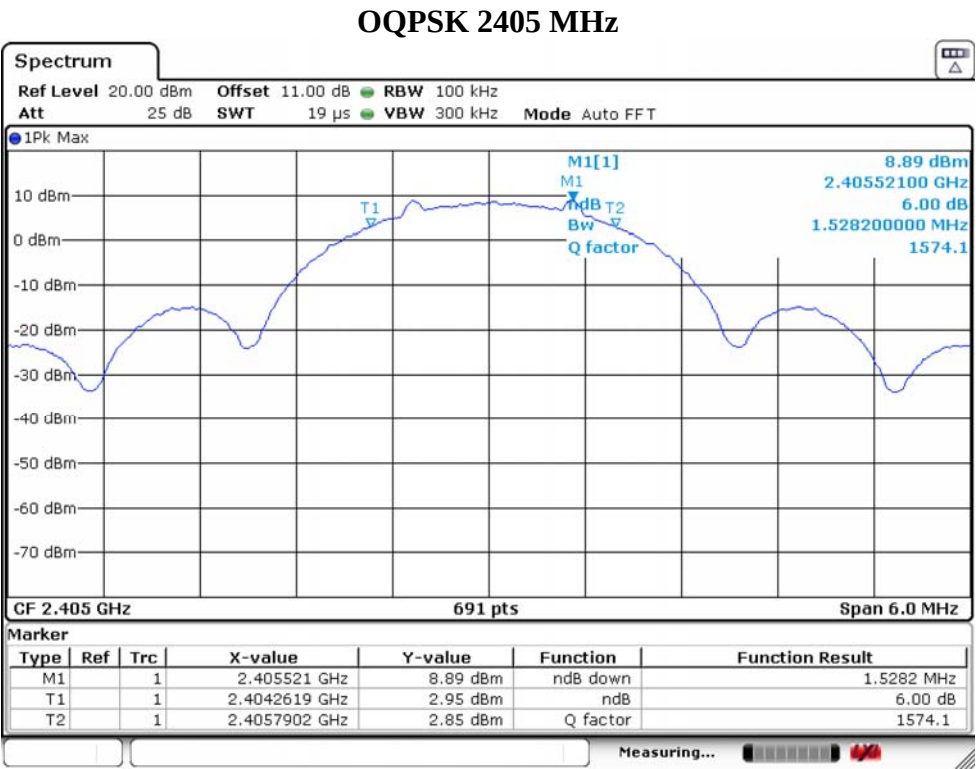

OQPSK 2445 MHz

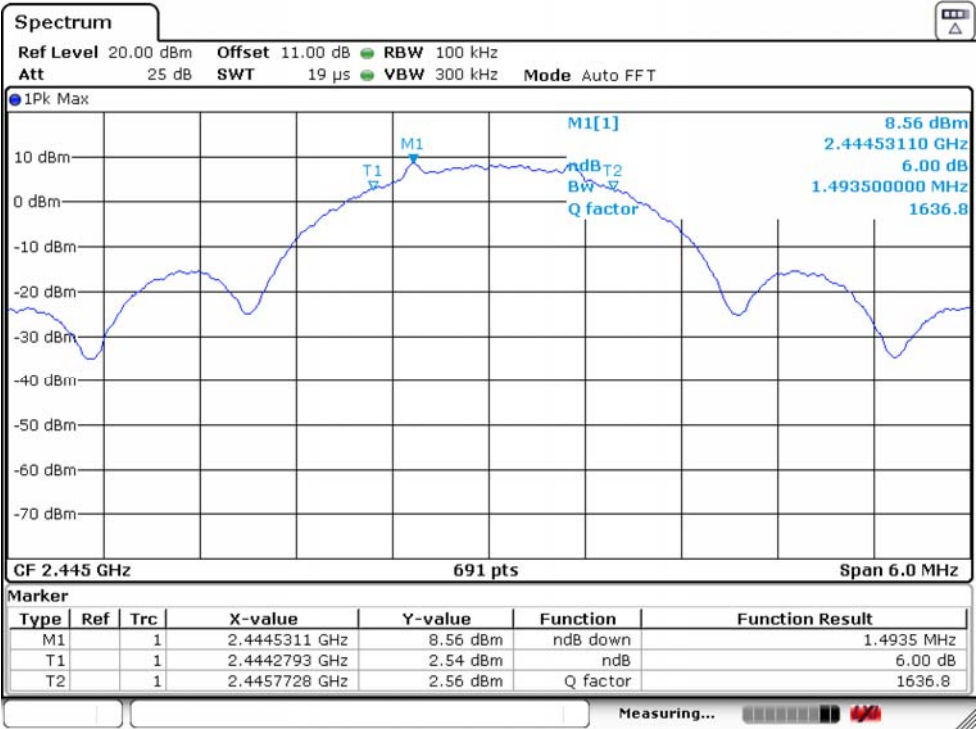

OQPSK 2480 MHz

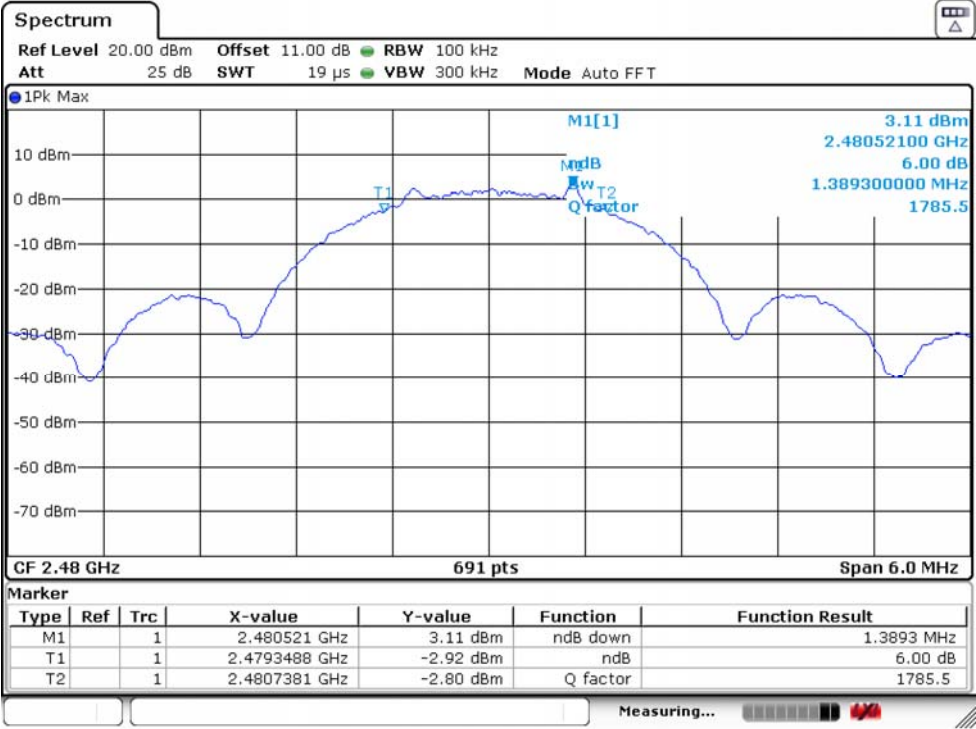

4. MAXIMUM PEAK OUTPUT POWER

4.1. Limit

For systems using digital modulation in 2400-2483.5 MHz, the maximum peak output power is 1 Watt(30dBm).

4.2. Test Setup



4.3. Spectrum Analyzer Setting


Spectrum Parameters	Setting
RBW	$\geq$ DTS Bandwidth
VBW	3*RBW
Span	$\geq$ 3*DTS Bandwidth
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

4.4. Test Procedure


- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 4.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- Repeat above procedures until all channels were measured.
- Record the results in the test report.

4.5. Test Result


Temperature	23℃	Relative Humidity	52%	Test Voltage		DC 3V
Mode	Freq (MHz)	Peak Output Power		Limit		Result
		dBm	W	dBm	W	
OQPSK	2405	10.27	0.0106	30.00	1.0000	PASS
	2445	10.25	0.0106	30.00	1.0000	PASS
	2480	4.13	0.0026	30.00	1.0000	PASS

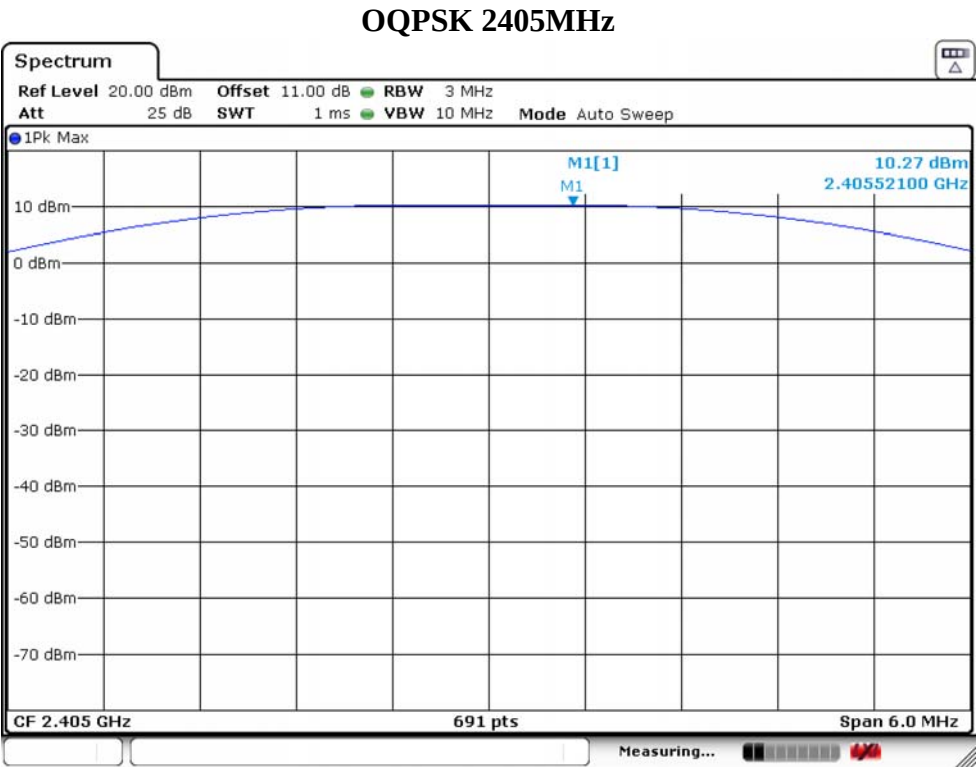

OQPSK 2445MHz

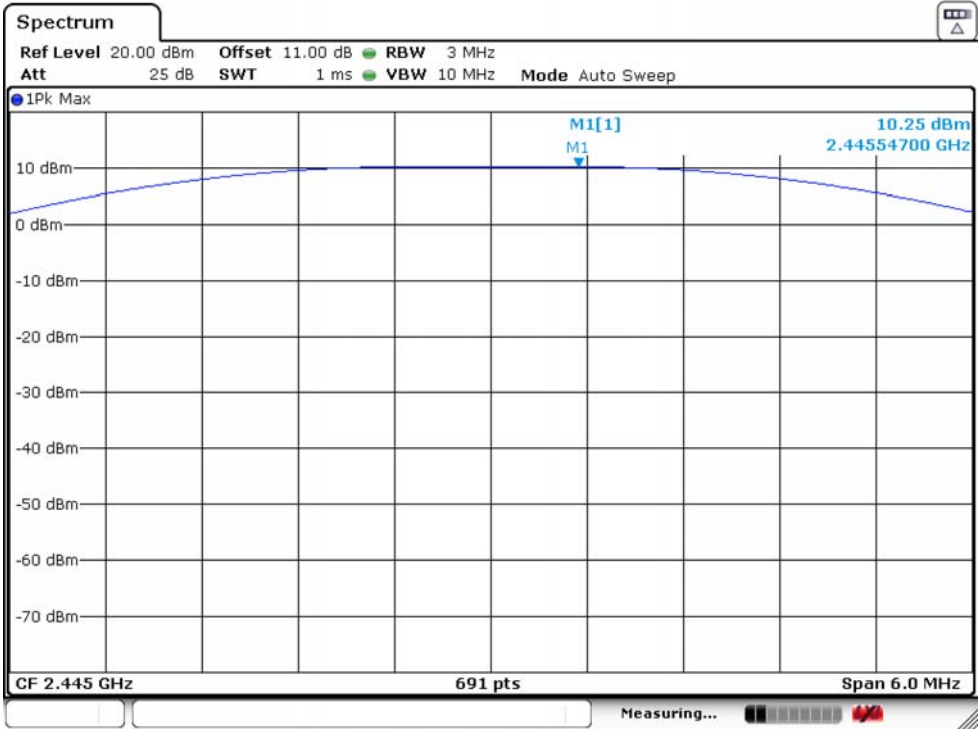

OQPSK 2480MHz

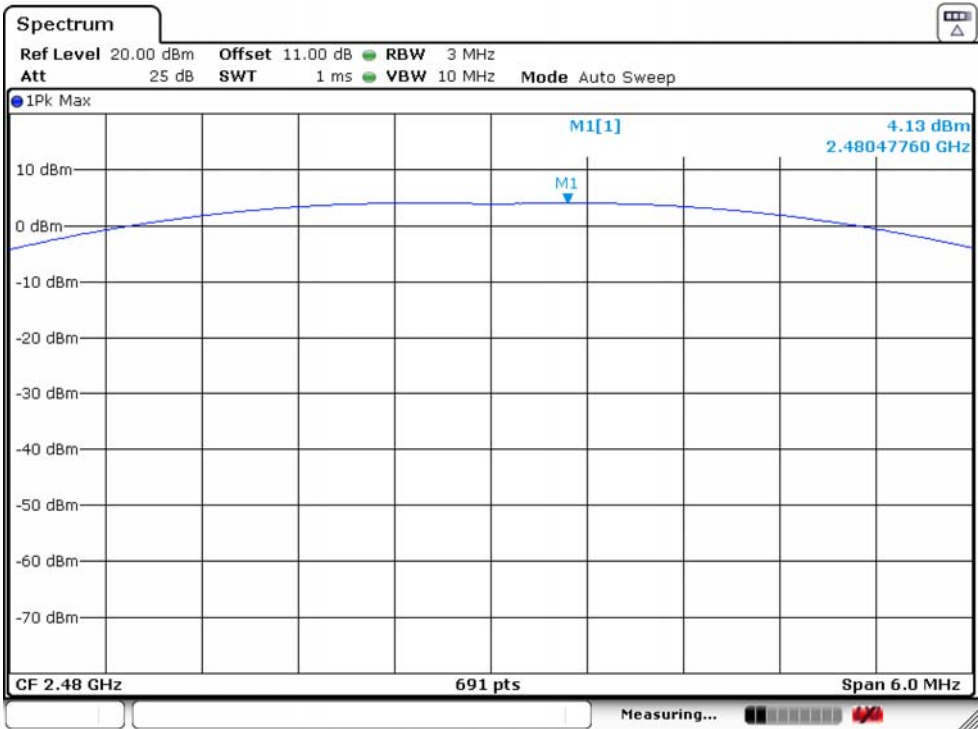

5. POWER SPECTRAL DENSITY

5.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2. Test Setup



5.3. Spectrum Analyzer Setting


Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	4MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

5.4. Test Procedure


- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- Repeat above procedures until all channels were measured.
- Record the results in the test report.

5.5. Test Result


Temperature	23℃	Relative Humidity	52%	Test Voltage	DC 3V
Mode	Freq (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result	
OQPSK	2405	-1.31	8.00	PASS	
	2445	-1.93	8.00	PASS	
	2480	-7.73	8.00	PASS	

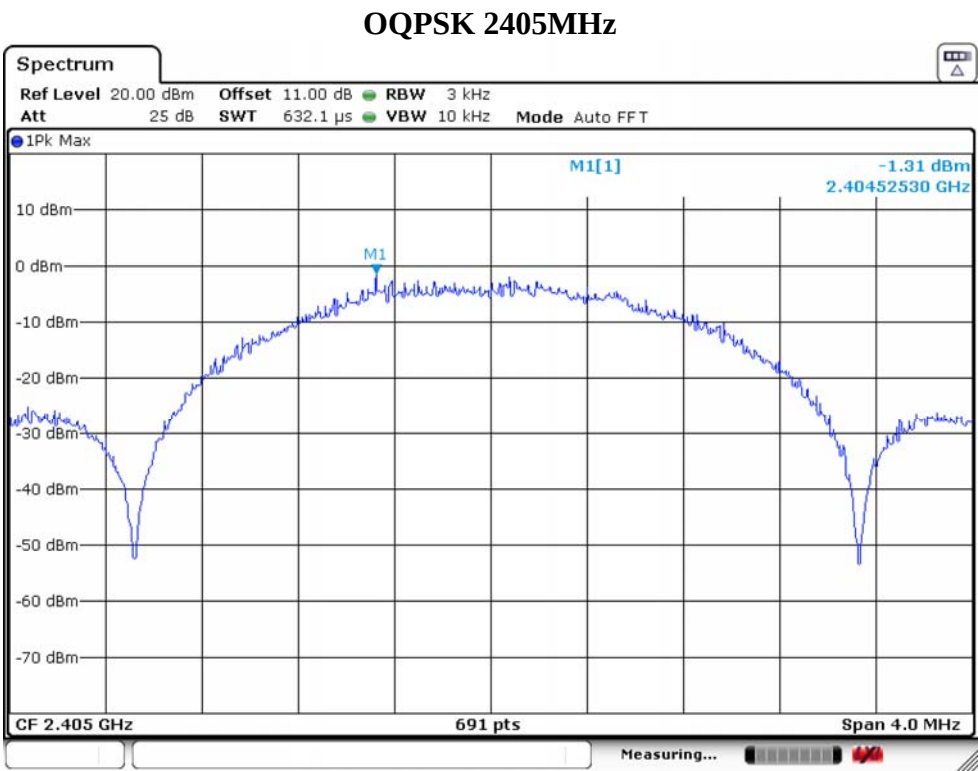

OQPSK 2445MHz

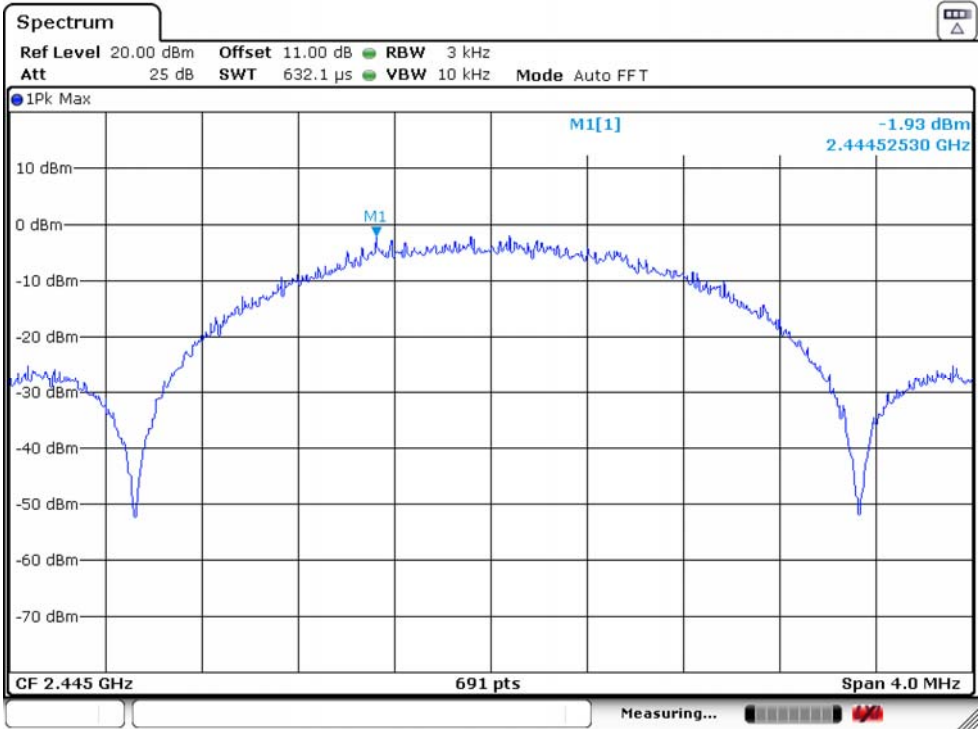

OQPSK 2480MHz

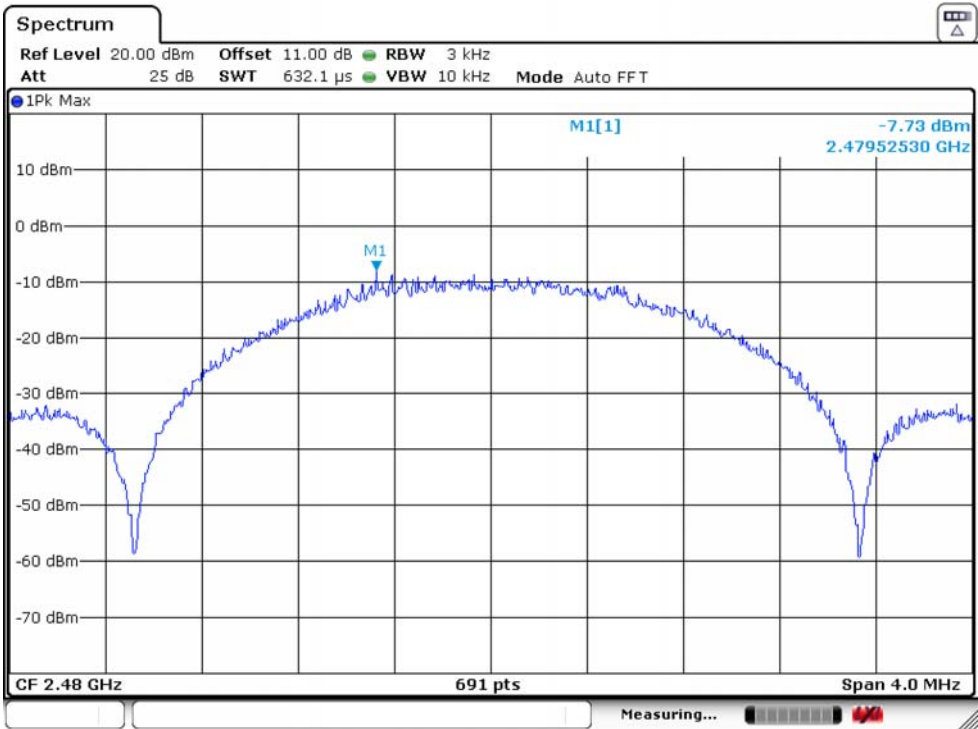


6. CONDUCTED BAND EDGE

6.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2. Test Setup

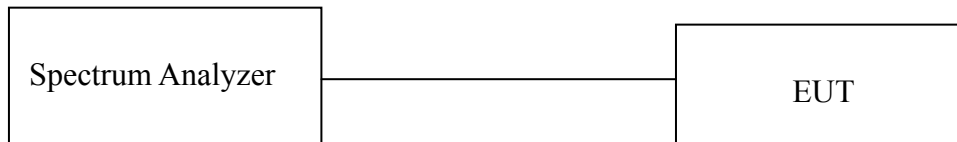

6.3. Spectrum Analyzer Setting



Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

6.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 6.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all channels were measured.
- Record the results in the test report.

6.5. Test Result

Temperature	23℃	Relative Humidity	52%	Test Voltage	DC 3V
Result	PASS				

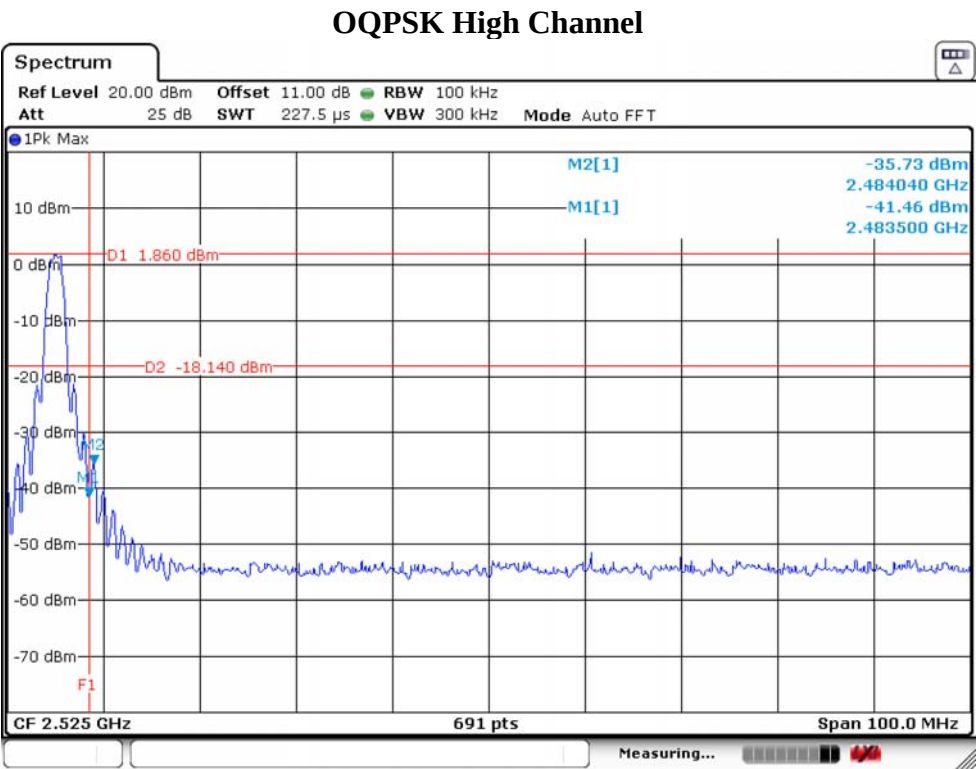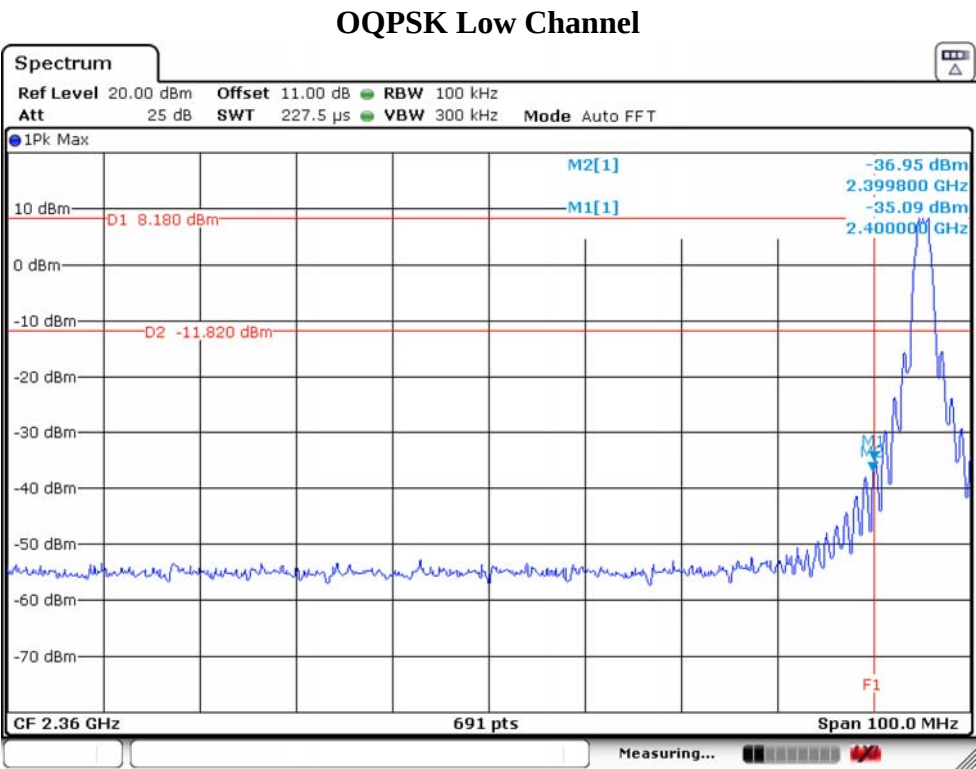


7. CONDUCTED SPURIOUS EMISSIONS

7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2. Test Setup

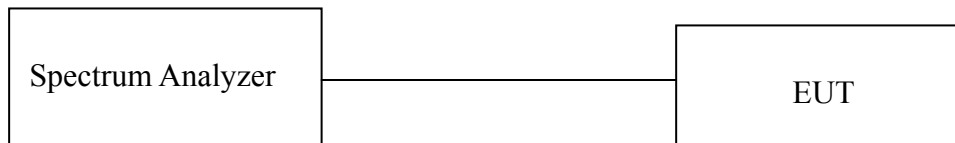

7.3. Spectrum Analyzer Setting


Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

7.4. Test Procedure


- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 7.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all channels were measured.
- Record the results in the test report.

7.5. Test Result


Temperature	23℃	Relative Humidity	52%	Test Voltage	DC 3V
Result	PASS				

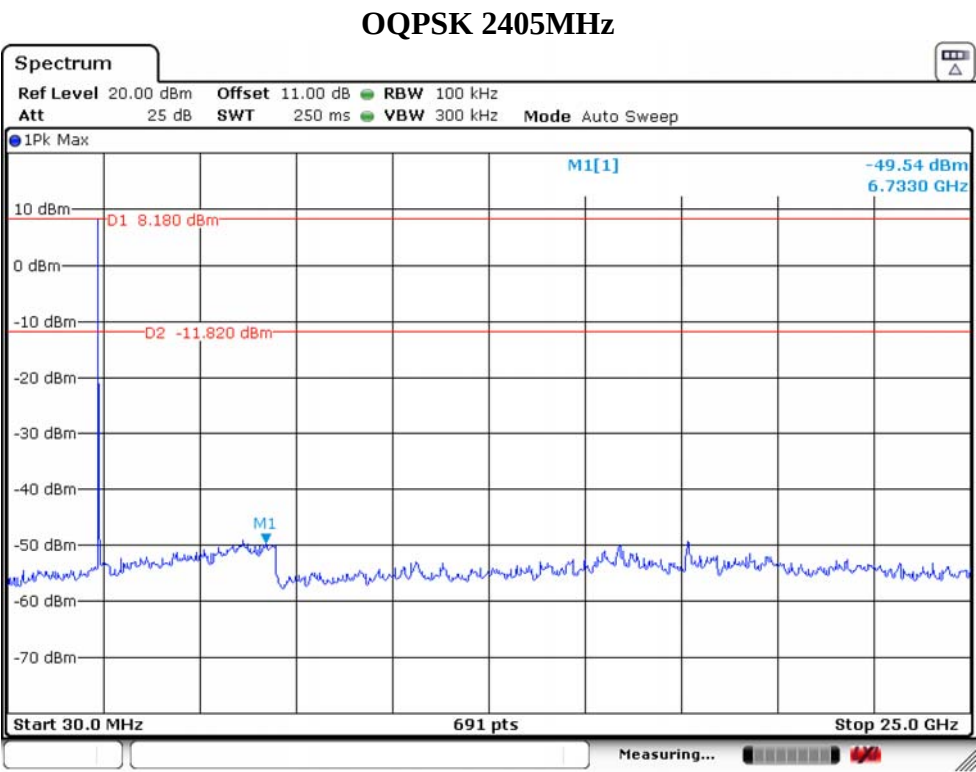

OQPSK 2445MHz

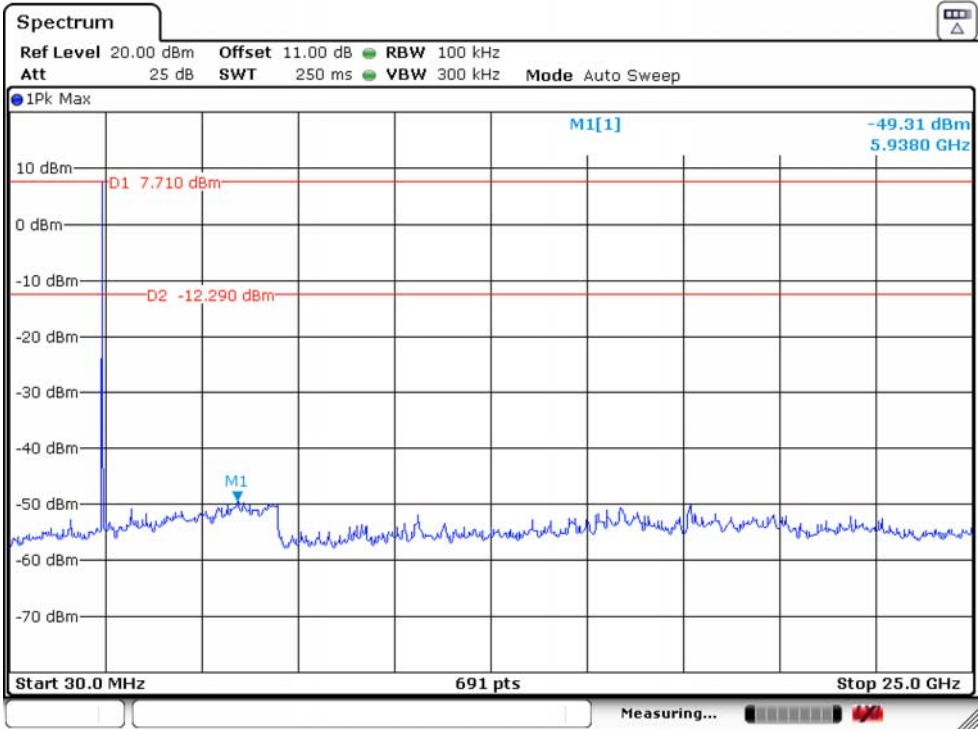

OQPSK 2480MHz

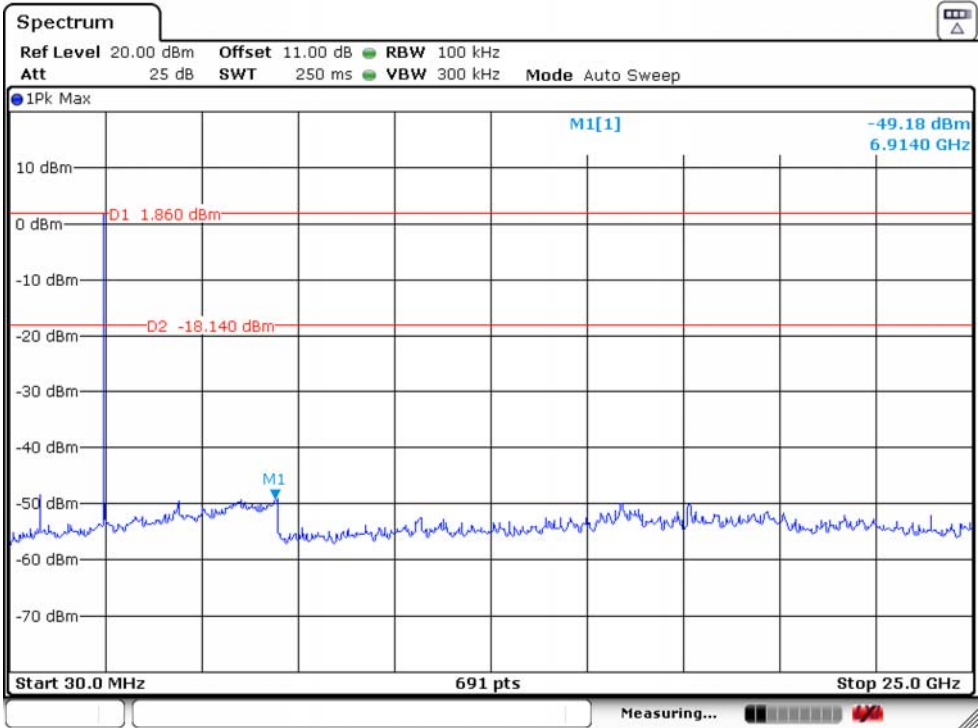

8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. Test Setup

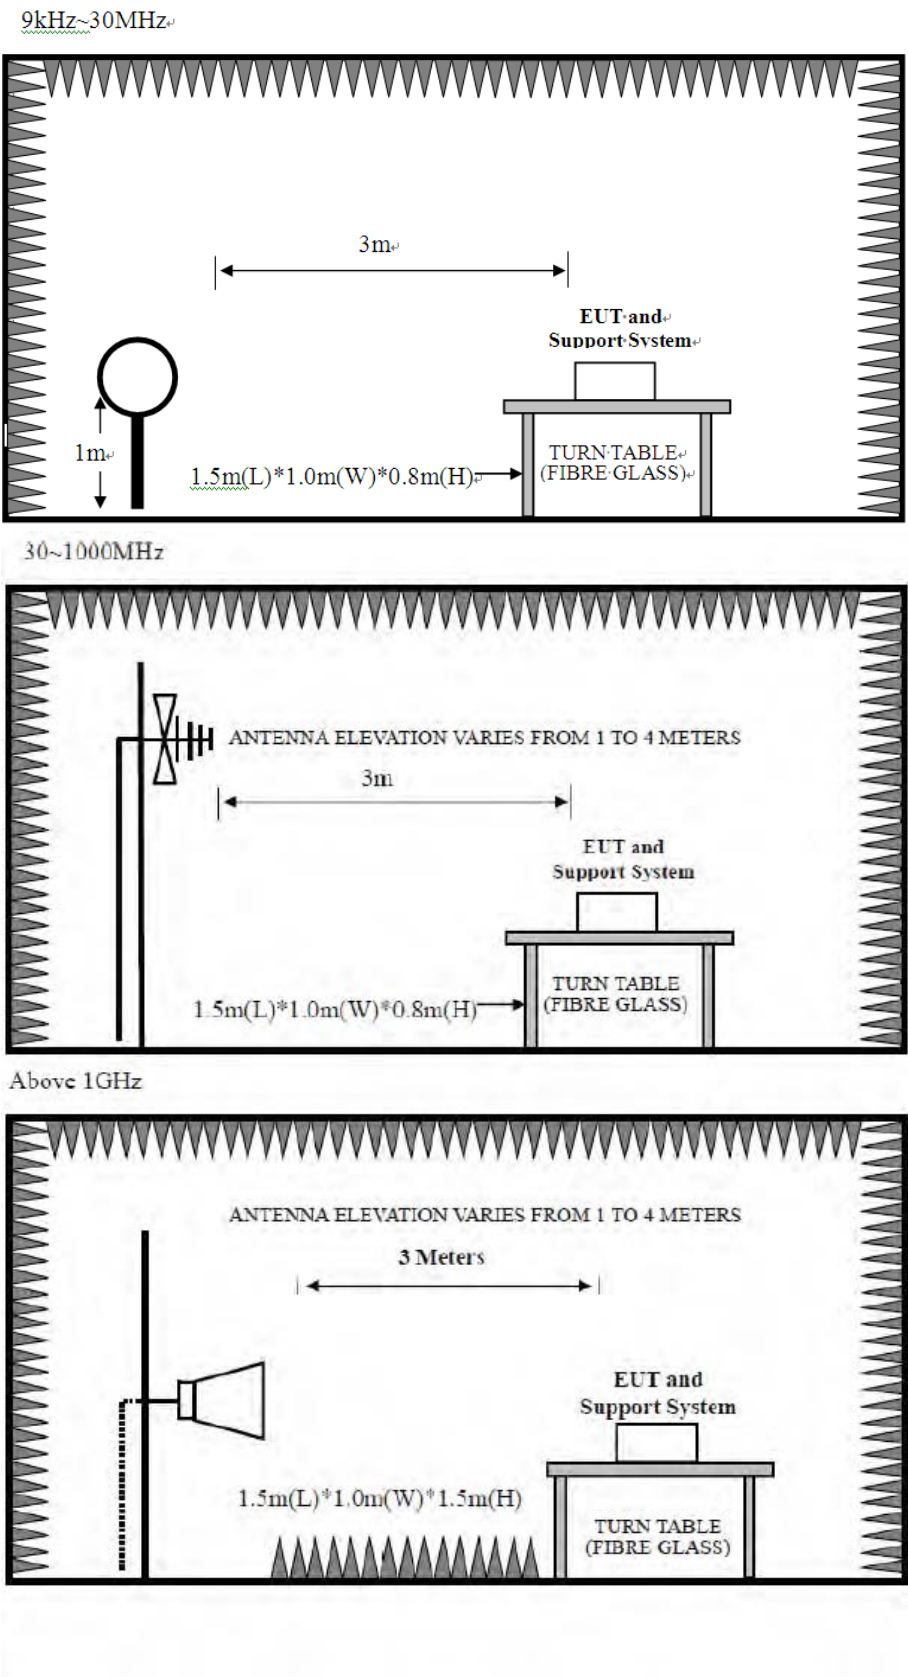

8.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting
RBW	1MHz
VBW	PEAK Measurement
	3MHz
	AVG Measurement Duty cycle $\geq 98\%$, VBW=10Hz Duty cycle $< 98\%$, VBW $\geq 1/T$
Start frequency	1GHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	PEAK
Trace Mode	Max Hold

Note :

1. T is the on-time time of the duty cycle,when EUT transmit continuously with maximum output power,unit is seconds. reference section 2.8 for the on-time time.

8.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 8.3.
- g. Repeat above procedures until all channels were measured.
- h. Record the results in the test report.

Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2405MHz ,2445MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

8.5. Test Result

Radiated Emissions Below 1GHz

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

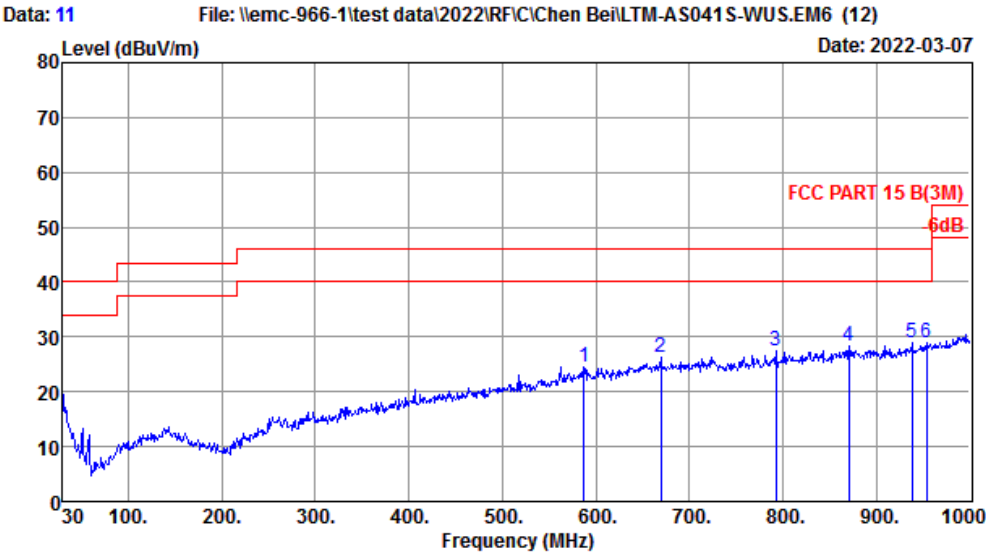

Site no. : 1# 966 Chamber Data no. : 11
Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	587.750	20.46	2.23	1.87	24.56	46.00	21.44	QP
2	669.230	21.89	2.48	1.86	26.23	46.00	19.77	QP
3	792.420	22.92	2.56	1.94	27.42	46.00	18.58	QP
4	870.990	23.99	2.77	1.67	28.43	46.00	17.57	QP
5	937.920	24.54	3.21	1.24	28.99	46.00	17.01	QP
6	953.440	24.84	3.42	0.76	29.02	46.00	16.98	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

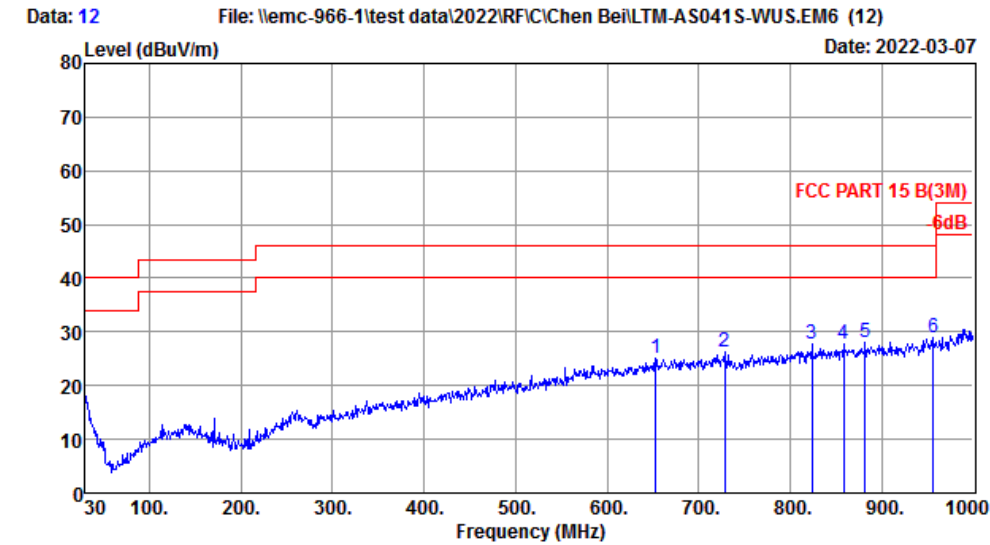

Site no. : 1# 966 Chamber Data no. : 12
Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	652.740	21.73	2.51	0.76	25.00	46.00	21.00	QP
2	728.400	21.90	2.66	1.61	26.17	46.00	19.83	QP
3	823.460	23.57	2.78	1.37	27.72	46.00	18.28	QP
4	858.380	23.99	2.73	1.13	27.85	46.00	18.15	QP
5	881.660	23.94	2.88	1.30	28.12	46.00	17.88	QP
6	956.350	24.86	3.22	0.76	28.84	46.00	17.16	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test, only the worst case was reported.

Radiated Emissions Above 1G

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan,Guangdong,China
Tel:+86-769-83081888
Fax:+86-769-83081878

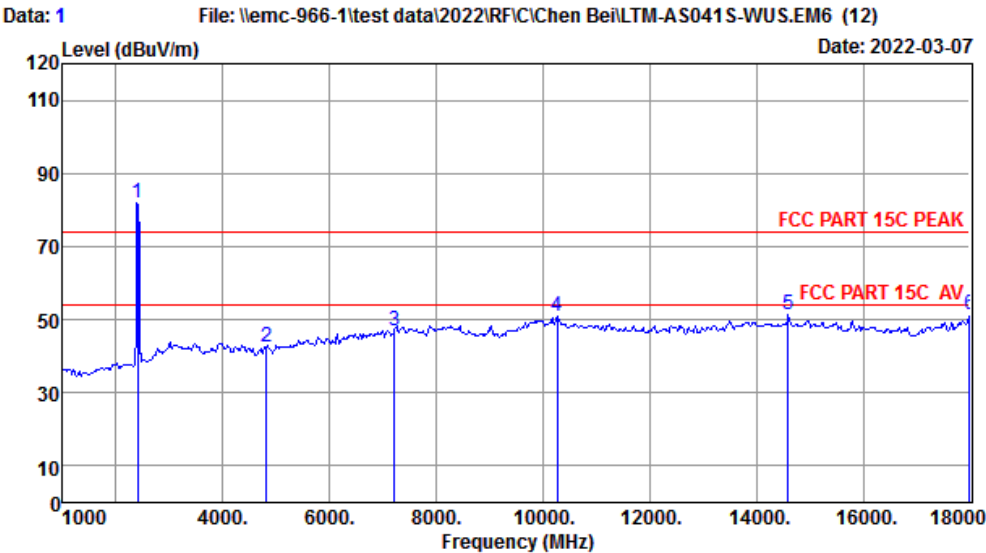

Site no. : 1# 966 Chamber Data no. : 1
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2405MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2405.000	27.28	1.46	34.64	87.70	81.80	74.00	-7.80	Peak
2	4810.000	31.12	3.25	34.66	42.96	42.67	74.00	31.33	Peak
3	7215.000	36.25	5.19	34.82	40.47	47.09	74.00	26.91	Peak
4	10265.000	39.17	5.96	34.28	40.09	50.94	74.00	23.06	Peak
5	14600.000	40.98	6.88	34.48	37.96	51.34	74.00	22.66	Peak
6	18000.000	48.90	8.24	34.30	28.58	51.42	74.00	22.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.




EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 2

File: \\emc-966-1\test data\2022\RFIC\Chen Bei\LTM-AS041S-WUS.EM6 (12)


Date: 2022-03-07

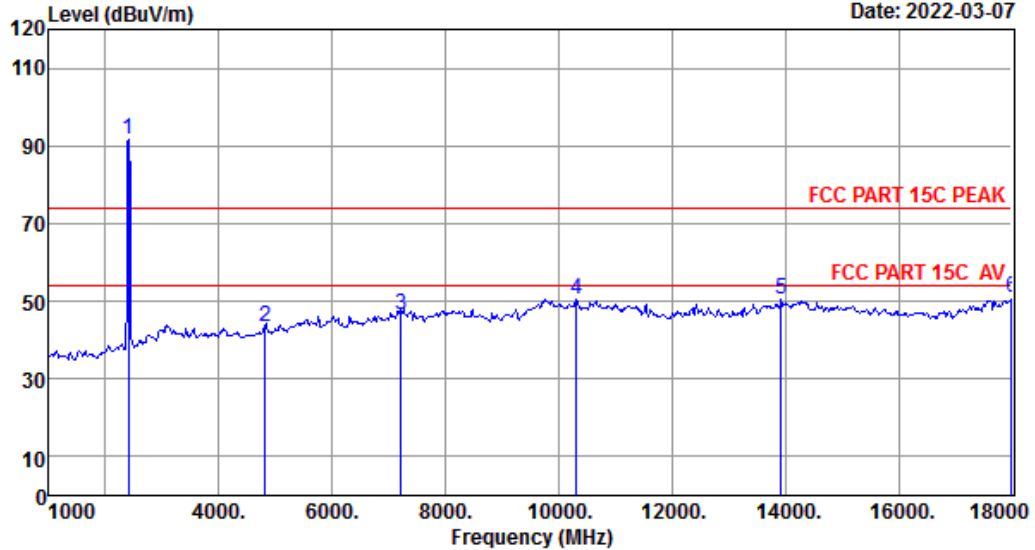

Site no. : 1# 966 Chamber Data no. : 2
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levait Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2405MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2405.000	27.28	1.46	34.64	97.49	91.59	74.00	-17.59	Peak
2	4810.000	31.12	3.25	34.66	43.74	43.45	74.00	30.55	Peak
3	7215.000	36.25	5.19	34.82	39.99	46.61	74.00	27.39	Peak
4	10316.000	39.22	5.97	34.30	39.65	50.54	74.00	23.46	Peak
5	13920.000	40.96	6.50	34.31	37.38	50.53	74.00	23.47	Peak
6	18000.000	48.90	8.24	34.30	27.90	50.74	74.00	23.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

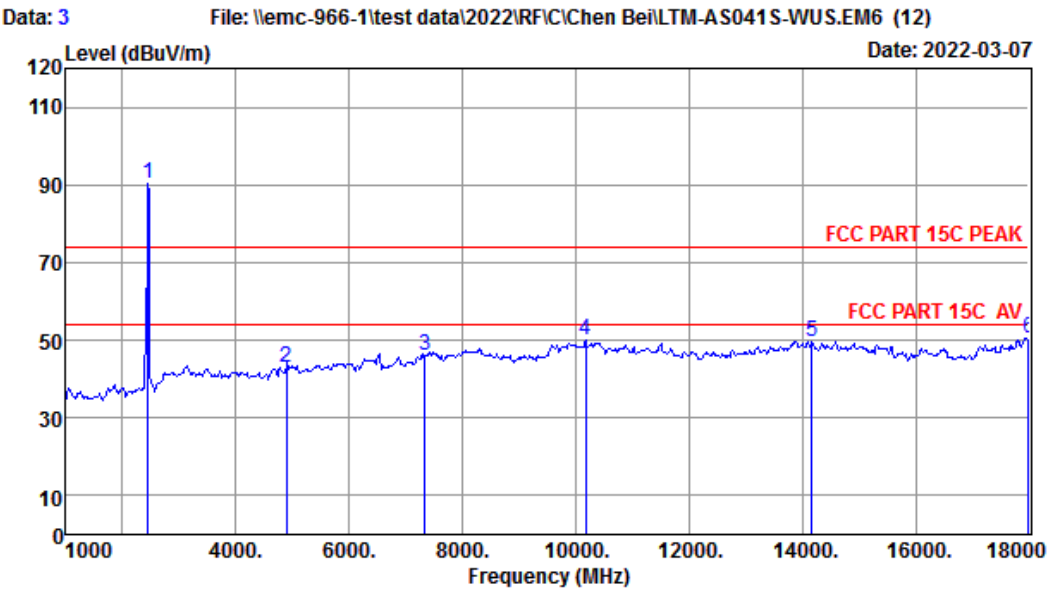

Site no. : 1# 966 Chamber Data no. : 3
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2445MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2445.000	27.33	1.47	34.62	96.14	90.32	74.00	-16.32	Peak
2	4890.000	31.43	3.32	34.68	42.98	43.05	74.00	30.95	Peak
3	7335.000	36.49	5.23	34.83	39.14	46.03	74.00	27.97	Peak
4	10180.000	39.09	5.94	34.26	39.14	49.91	74.00	24.09	Peak
5	14175.000	41.07	6.66	34.35	36.33	49.71	74.00	24.29	Peak
6	18000.000	48.90	8.24	34.30	27.75	50.59	74.00	23.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

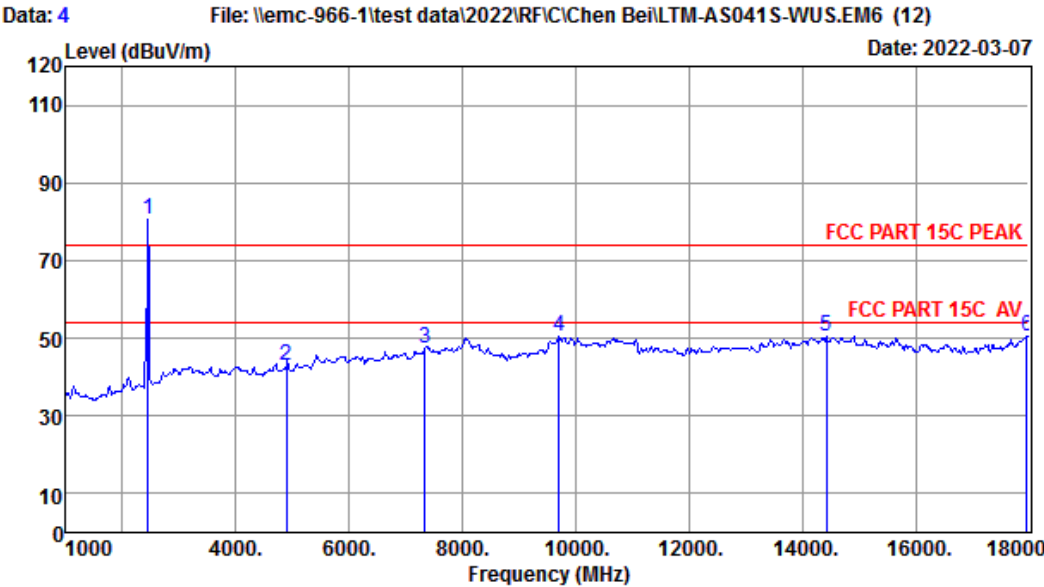

Site no. : 1# 966 Chamber Data no. : 4
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levait Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2445MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2445.000	27.33	1.47	34.62	86.50	80.68	74.00	-6.68	Peak
2	4890.000	31.43	3.32	34.68	43.07	43.14	74.00	30.86	Peak
3	7335.000	36.49	5.23	34.83	40.41	47.30	74.00	26.70	Peak
4	9704.000	38.31	5.66	34.26	40.82	50.53	74.00	23.47	Peak
5	14430.000	41.02	6.85	34.43	37.05	50.49	74.00	23.51	Peak
6	17966.000	48.63	8.22	34.30	28.10	50.65	74.00	23.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 5

File: \\emc-966-1\test data\2022\RFIC\Chen Bei\LTM-AS041S-WUS.EM6 (12)

Date: 2022-03-07

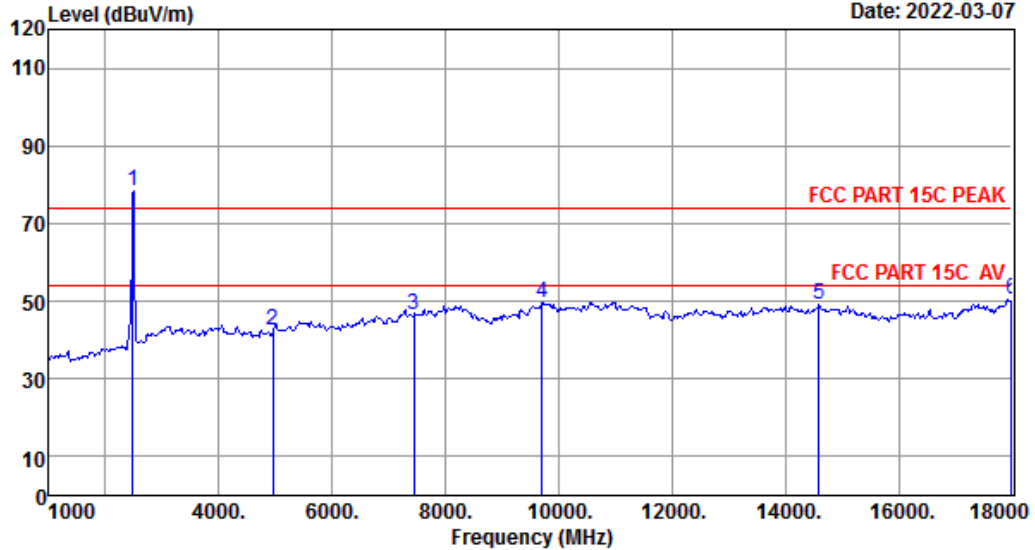


Site no. : 1# 966 Chamber Data no. : 5
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Levoit Vesync Aura Sensor
 Power : DC 3V
 M/N : LTM-AS041S-WUS
 Test Mode : TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	27.38	1.48	34.61	84.30	78.55	74.00	-4.55	Peak
2	4960.000	31.68	3.38	34.69	41.97	42.34	74.00	31.66	Peak
3	7440.000	36.70	5.26	34.84	39.31	46.43	74.00	27.57	Peak
4	9704.000	38.31	5.66	34.26	40.09	49.80	74.00	24.20	Peak
5	14600.000	40.98	6.88	34.48	35.85	49.23	74.00	24.77	Peak
6	18000.000	48.90	8.24	34.30	27.83	50.67	74.00	23.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

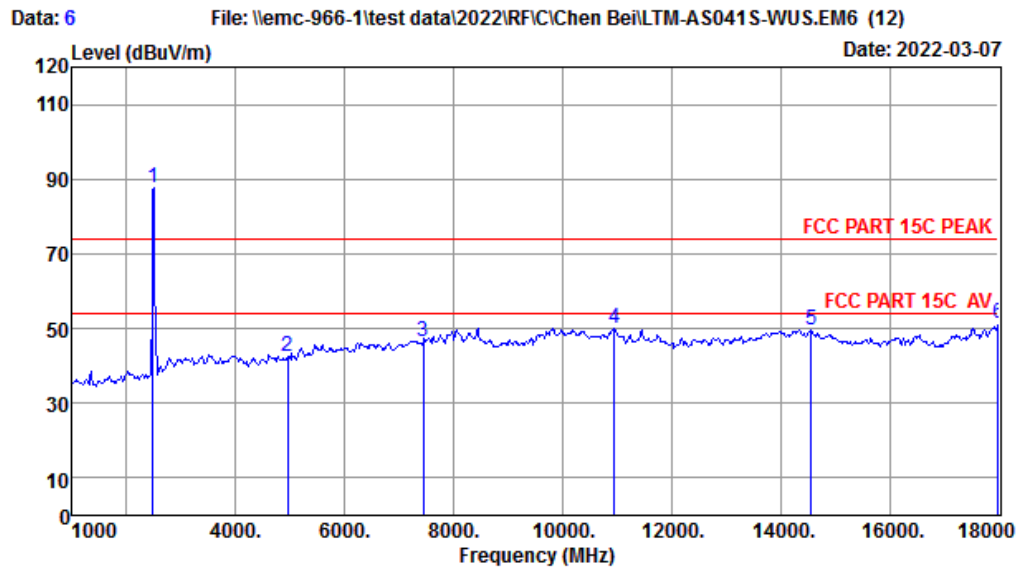

Site no. : 1# 966 Chamber Data no. : 6
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	27.38	1.48	34.61	93.63	87.88	74.00	-13.88	Peak
2	4960.000	31.68	3.38	34.69	42.36	42.73	74.00	31.27	Peak
3	7440.000	36.70	5.26	34.84	39.23	46.35	74.00	27.65	Peak
4	10945.000	39.85	6.10	34.48	38.69	50.16	74.00	23.84	Peak
5	14566.000	40.99	6.89	34.47	36.36	49.77	74.00	24.23	Peak
6	18000.000	48.90	8.24	34.30	28.35	51.19	74.00	22.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:


1. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.



Radiated Band Edge

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan,Guangdong,China
Tel:+86-769-83081888
Fax:+86-769-83081878

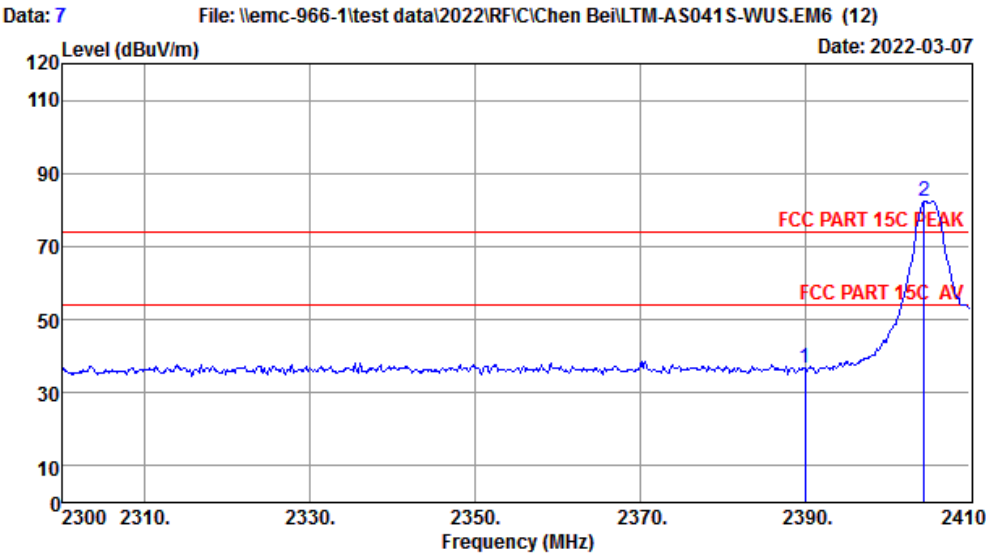

Site no. : 1# 966 Chamber Data no. : 7
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesyndc Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2405MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.26	1.45	34.64	42.87	36.94	74.00	37.06	Peak
2	2404.500	27.28	1.46	34.64	88.33	82.43	74.00	-8.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official
limit are not reported.

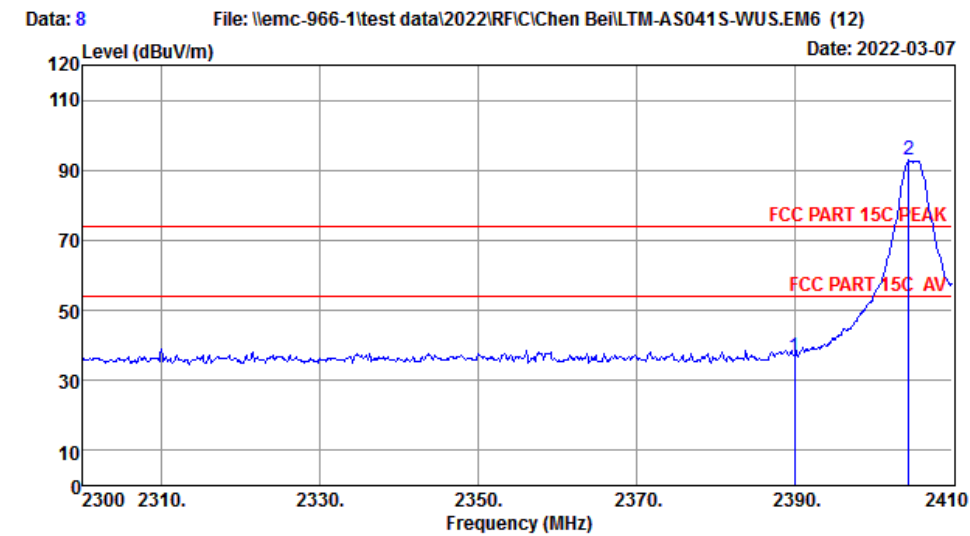

Site no. : 1# 966 Chamber Data no. : 8
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2405MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.26	1.45	34.64	42.85	36.92	74.00	37.08	Peak
2	2404.500	27.28	1.46	34.64	98.73	92.83	74.00	-18.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

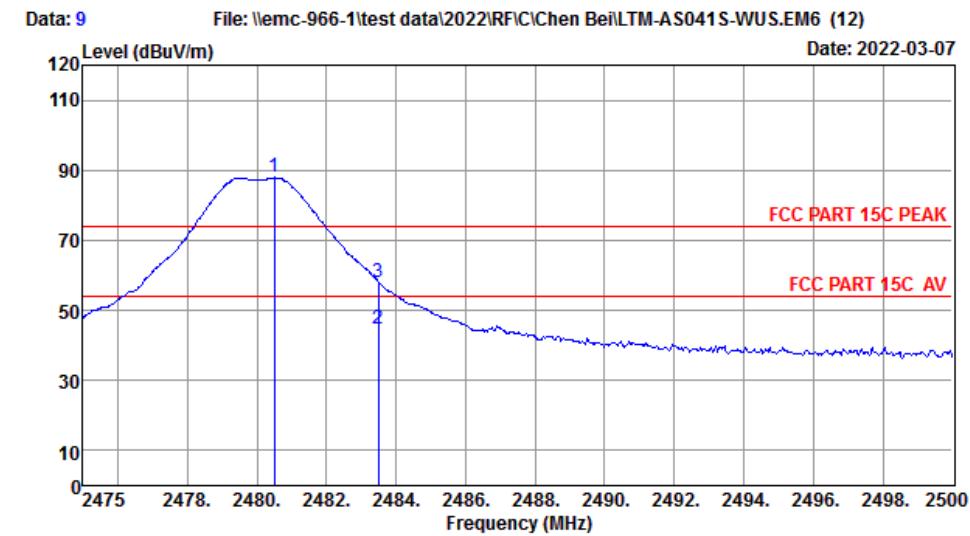

Site no. : 1# 966 Chamber Data no. : 9
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesync Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.500	27.38	1.48	34.61	93.66	87.91	74.00	-13.91	Peak
2	2483.500	27.38	1.48	34.61	50.54	44.79	54.00	9.21	Average
3	2483.500	27.38	1.48	34.61	63.86	58.11	74.00	15.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 10 File: \\emc-966-1\test data\2022\RFIC\Chen Bei\LTM-AS041S-WUS.EM6 (12) Date: 2022-03-07

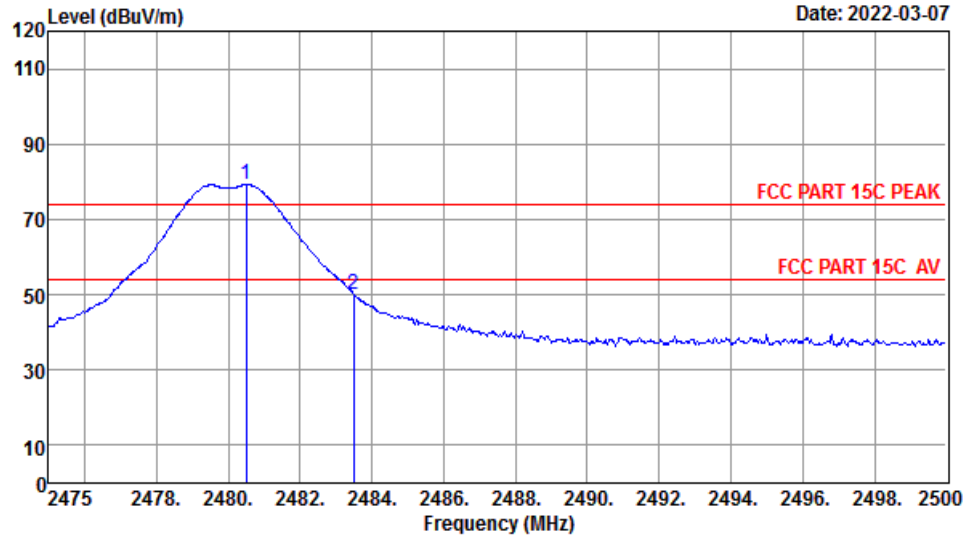

Site no. : 1# 966 Chamber Data no. : 10
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer : JBR
EUT : Levoit Vesynd Aura Sensor
Power : DC 3V
M/N : LTM-AS041S-WUS
Test Mode : TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.500	27.38	1.48	34.61	84.92	79.17	74.00	-5.17	Peak
2	2483.500	27.38	1.48	34.61	55.85	50.10	74.00	23.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. All channels had been pre-test, only of the worst case channels were reported.



9. ANTENNA REQUIREMENTS

9.1. Limit


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

9.2. Test Result


The antennas used for this product is PCB antenna ,so compliance with antenna requirements.
(Please refer to the EUT photo for details)

10. TEST SETUP PHOTO

Radiated Test (Below 1GHz)

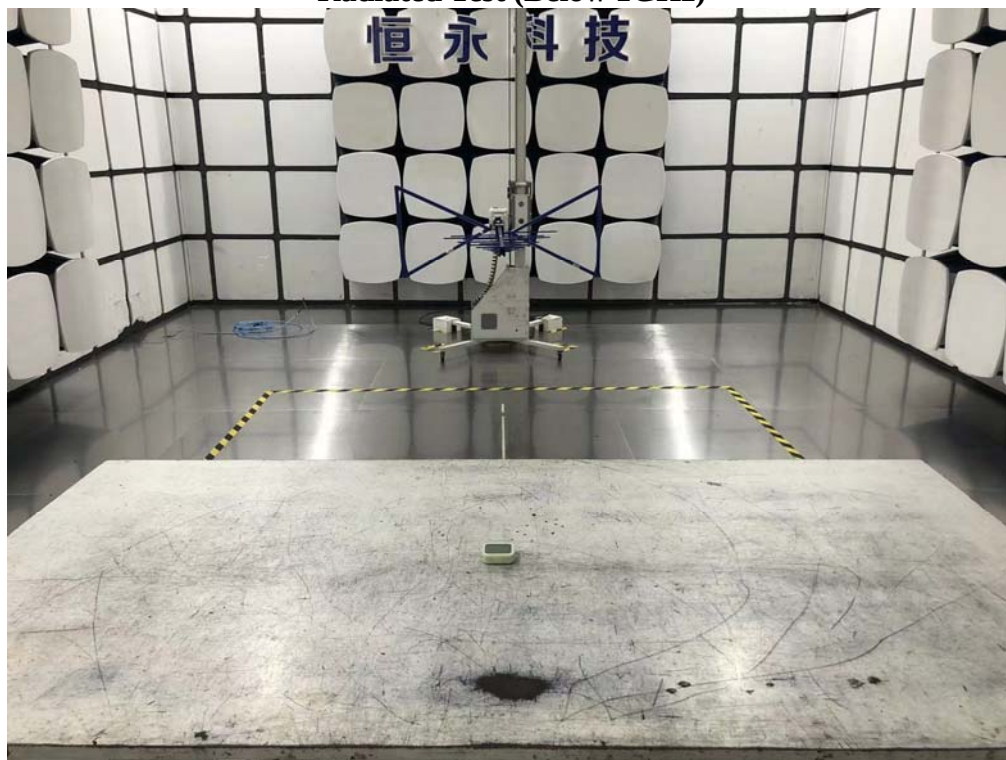


Radiated Test (Above 1GHz)


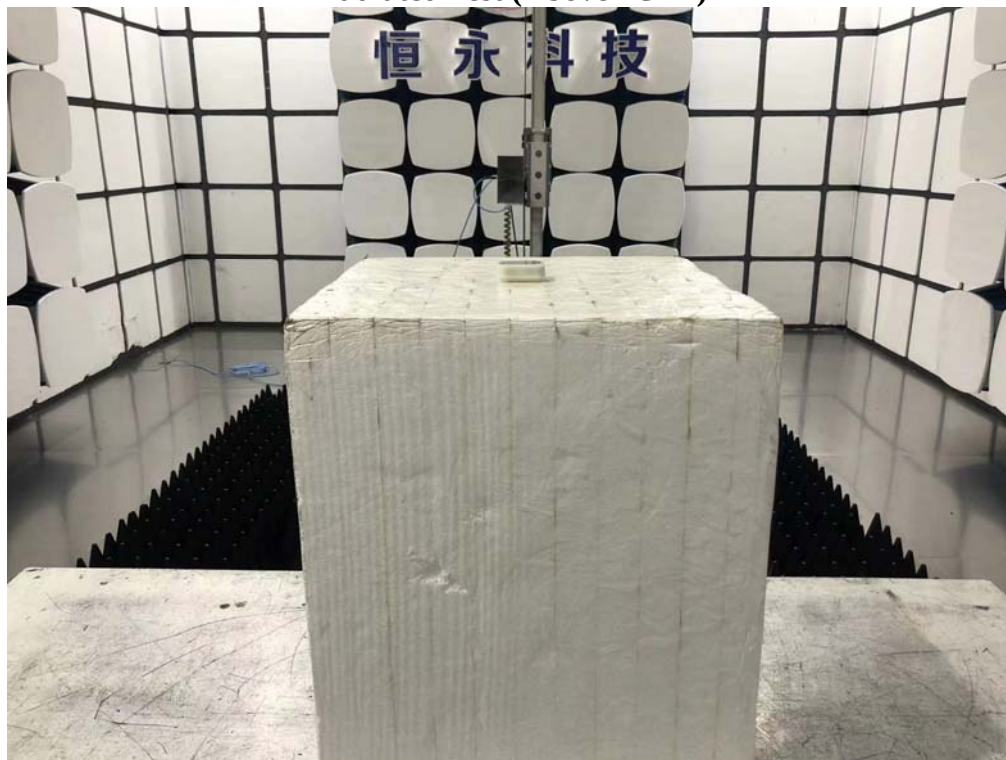


11. EUT PHOTO

External Photos
M/N: LTM-AS041S-WUS

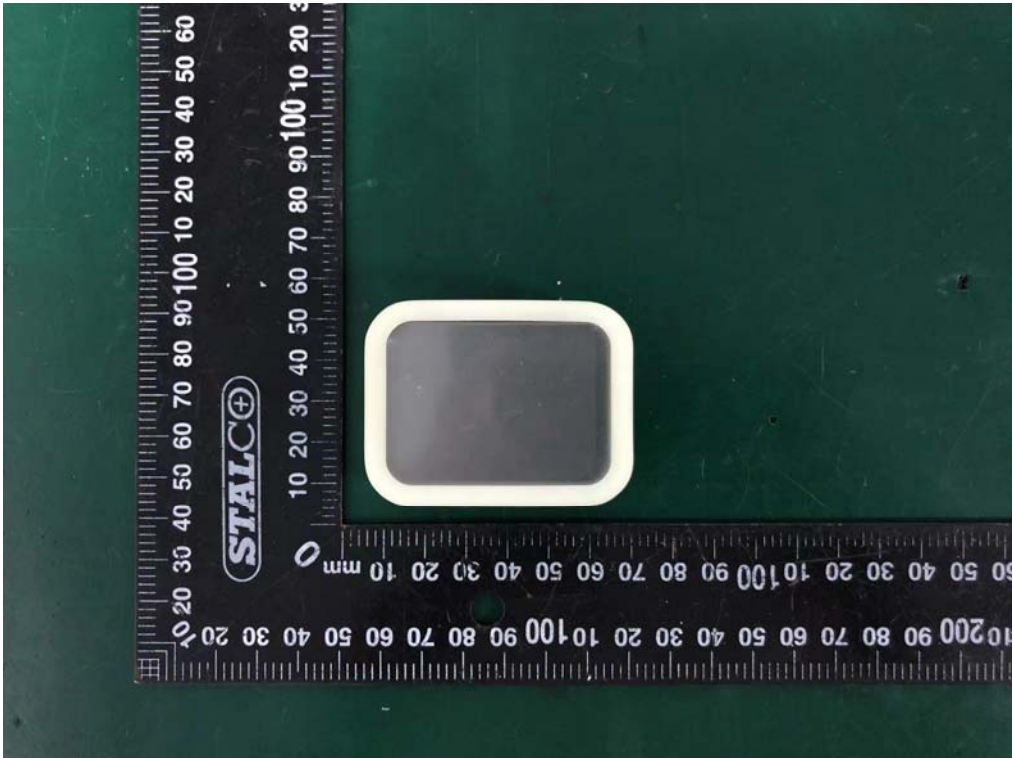

External Photos
M/N: LTM-AS041S-WUS

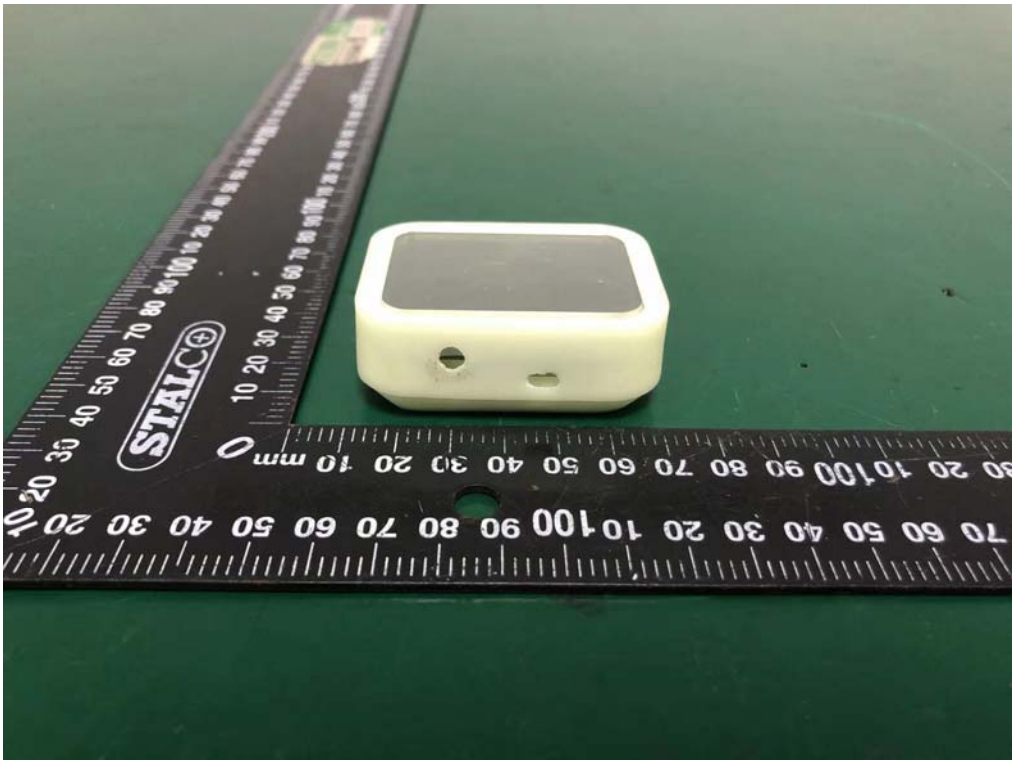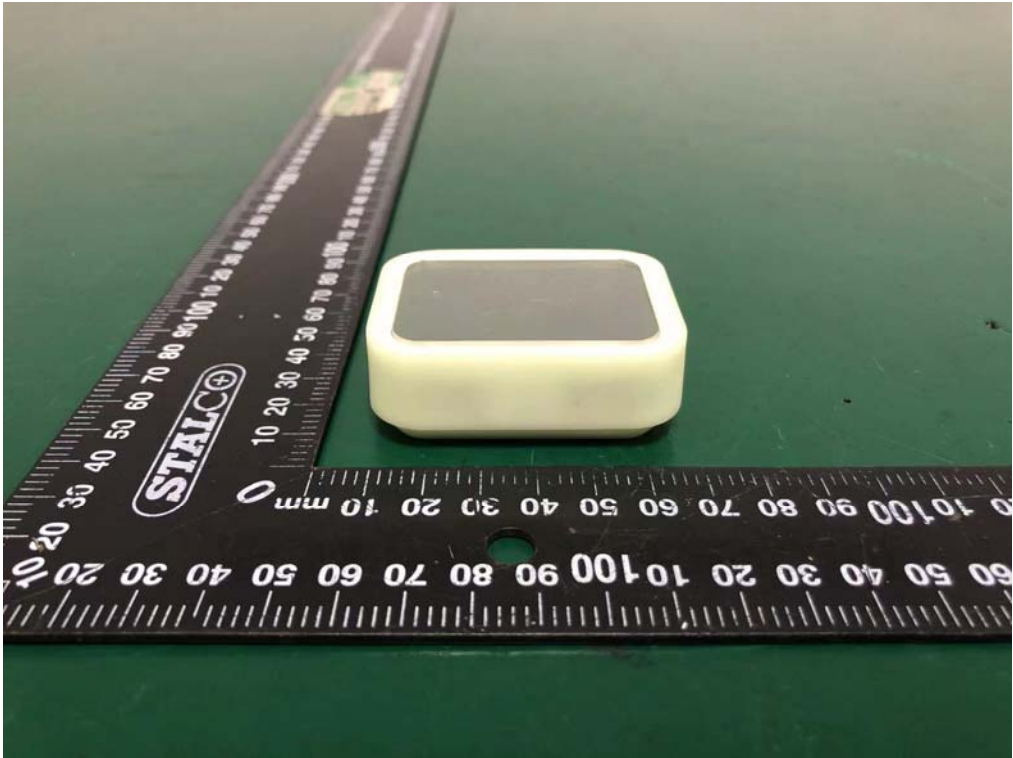



External Photos
M/N: LTM-AS041S-WUS




External Photos
M/N: LTM-AS041S-WUS



Internal Photos
M/N: LTM-AS041S-WUS

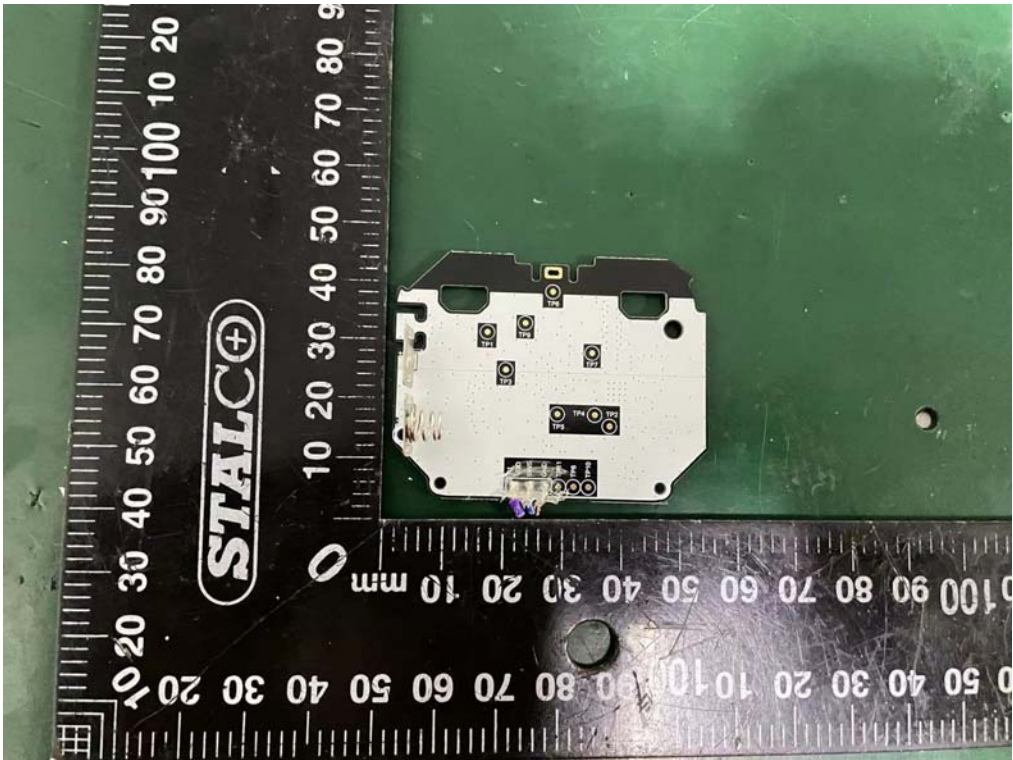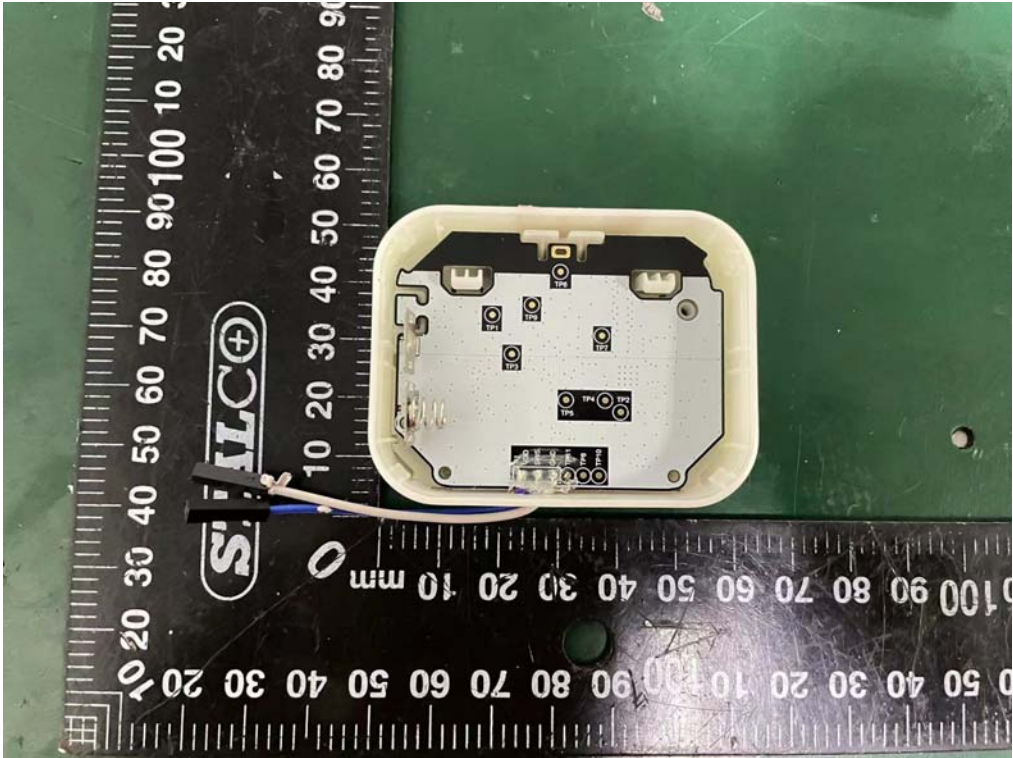

Internal Photos
M/N: LTM-AS041S-WUS

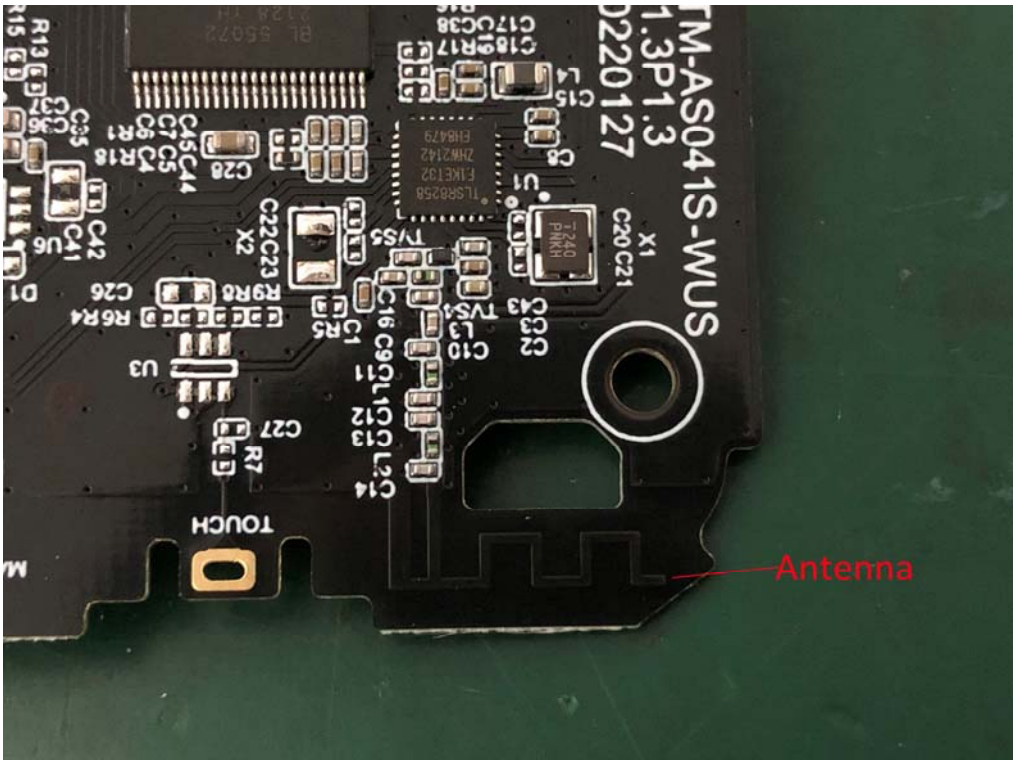

End of Test Report