

# FCC Part 15C

## Measurement and Test Report

### For

**LOWEX, LLC**

**FCC ID: 2AREV-LWXF24**

<b>FCC Rule(s):</b>	<u>FCC Part 15.247</u>
<b>Product Description:</b>	<u>feature phone</u>
<b>Tested Model:</b>	<u>F24</u>
<b>Report No.:</b>	<u>BSL008390303RF</u>
<b>Tested Date:</b>	<u>November 16-November 18, 2018</u>
<b>Issued Date:</b>	<u>November 20, 2018</u>
<b>Tested By:</b>	<u>Messi Wang / Engineer</u>
<b>Reviewed By:</b>	<u>Lisa. Li / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Mike mo / PSQ Manager</u>
<b>Prepared By:</b>	
<b>BSL Testing Co.,LTD.</b>	
NO. 24, ZH Park, Nantou, Shenzhen, 518000 China	
Tel: 400-882-9628	Fax: 86- 755-26508703

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 EUT SETUP AND TEST MODE.....	5
1.3 TEST STANDARDS.....	5
1.4 TEST METHODOLOGY.....	5
1.5 TEST FACILITY.....	5
1.6 MEASUREMENT UNCERTAINTY.....	6
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>3. RF EXPOSURE.....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. ANTENNA REQUIREMENT.....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION.....	9
<b>5. CONDUCTED EMISSIONS.....</b>	<b>10</b>
<b>6. CONDUCTED PEAK OUTPUT POWER.....</b>	<b>13</b>
<b>7. 20DB EMISSION BANDWIDTH.....</b>	<b>14</b>
<b>8. CARRIER FREQUENCIES SEPARATION.....</b>	<b>18</b>
<b>9. HOPPING CHANNEL NUMBER.....</b>	<b>20</b>
<b>10. DWELL TIME.....</b>	<b>22</b>
<b>11. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....</b>	<b>25</b>
<b>12. BAND EDGE.....</b>	<b>26</b>
<b>14. SPURIOUS EMISSION.....</b>	<b>33</b>
<b>15. TEST SETUP PHOTO.....</b>	<b>44</b>
<b>16. EUT CONSTRUCTIONAL DETAILS.....</b>	<b>45</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

Applicant:	LOWEX, LLC
Address of applicant:	739 NW 105th Pl, Miami, Florida 33172, USA
Manufacturer:	LuZhou XinYu Communication Technology Co., LTD
Address of manufacturer:	NO.19, Section 5, JiuGu Avenue, High Tech District, LuZhou City, SiChuan Provice, China
Product Name:	feature phone
Model No.:	F24
Test Model No:	N/A

Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are color, appearance and model name for commercial purpose.

Quantity of tested samples	1
Serial No.:	N/A
Description test modes:	SIM 1 and SIM 2 is a chipset unit, the wors case is SIM1.
Hardware Version:	DF600_PCB
Software Version:	DF600_DF600E_HC
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4 QPSK, 8DPSK
Antenna Type:	Internal antenna
Antenna gain:	1.2dBi
Power supply:	DC 3.7V by battery or DC 5V from adapter input AC 120V, 60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test.

#### EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Earphone	1.0	Unshielded	Without Ferrite

#### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	JINFULIN	A01	/

#### Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

## 1.2 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level.

<b>Test Mode List</b>			
Test Mode	Description	Channel	Frequency (MHz)
1	GFSK,	CH1	2402
		CH40	2441
		CH79	2480
2	Pi/4 QPSK	CH1	2402
		CH40	2441
		CH79	2480
3	8DPSK	CH1	2402
		CH40	2441
		CH79	2480

## 1.3 Test Standards

The following report accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

## 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.5 Test Facility

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Test Firm Registration Number: 866035

Designation Number: CN1217

Tel: 400-882-9628

Fax: 86-755-26508703

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	±2.88dB
Transmitter Spurious Emissions	Radiated	±5.1dB

## 1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
Communication Tester	Rohde & Schwarz	CMW500	100358	2018-11-08	2019-11-07
Spectrum Analyzer	R&S	FSP40	100550	2018-10-08	2019-10-07
Test Receiver	R&S	ESCI7	US47140102	2018-10-08	2019-10-07
Signal Generator	HP	83630B	3844A01028	2018-10-08	2019-10-07
Test Receiver	R&S	ESPI-3	100180	2018-10-08	2019-10-07
Amplifier	Agilent	8449B	4035A00116	2018-10-08	2019-10-07
Amplifier	HP	8447E	2945A02770	2018-10-08	2019-10-07
Signal Generator	IFR	2023A	202307/242	2018-10-08	2019-10-07
Broadband Antenna	SCHAFFNER	2774	2774	2018-10-21	2019-10-20
Biconical and log periodic antennas	ELECTRO-METRI CS	EM-6917B-1	171	2018-10-21	2019-10-20
Horn Antenna	R&S	HF906	100253	2018-10-21	2019-10-20
Horn Antenna	EM	EM-6961	6462	2018-10-21	2019-10-20
LISN	R&S	ESH3-Z5	100196	2018-10-08	2019-10-07
LISN	COM-POWER	LI-115	02027	2018-10-08	2019-10-07
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	2018-10-08	2019-10-07
Horn Antenna	Schwarzbeck	BBHA9170	00814	2018-10-21	2019-10-20

## 2. SUMMARY OF TEST RESULTS

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Pass* (Please refer to SAR Report)
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark: Test according to ANSI C63.10:2013*

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## 4. Antenna Requirement

---

### 4.1 Standard Applicable


According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### 4.2 Evaluation Information


This product has a internal permanent antenna(1.2dBi), fulfill the requirement of this section.

## 5. Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test setup:	<p>Reference Plane</p> <p>LISN</p> <p>AUX Equipment</p> <p>E.U.T</p> <p>Test table/Insulation plane</p> <p>EMI Receiver</p> <p>Filter</p> <p>AC power</p> <p>40cm</p> <p>80cm</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>																
Test Instruments:	Refer to section 1.7 for details																
Test mode:	Refer to section 1.2 for details																
Test results:	Pass																

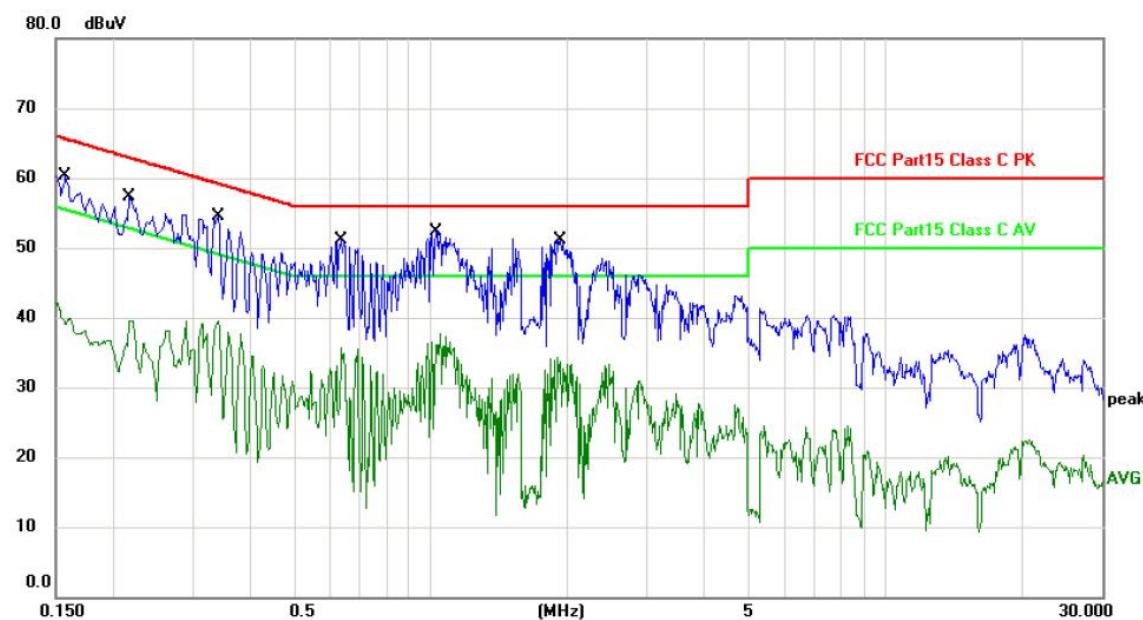
**Measurement data:****Line:**

No.	Mk.	Freq.	Measure-	Limit	Over	Detector	Comment
			ment				
		MHz	dBuV	dBuV	dB		
1		0.1580	60.26	65.56	-5.30	QP	
2		0.1580	38.03	55.56	-17.53	AVG	
3		0.2180	57.35	62.89	-5.54	QP	
4		0.2180	34.63	52.89	-18.26	AVG	
5		0.3420	54.45	59.15	-4.70	QP	
6		0.3420	35.25	49.15	-13.90	AVG	
7		0.6380	51.04	56.00	-4.96	QP	
8		0.6380	21.10	46.00	-24.90	AVG	
9	*	1.0300	52.30	56.00	-3.70	QP	
10		1.0300	37.32	46.00	-8.68	AVG	
11		1.9300	51.09	56.00	-4.91	QP	
12		1.9300	28.16	46.00	-17.84	AVG	

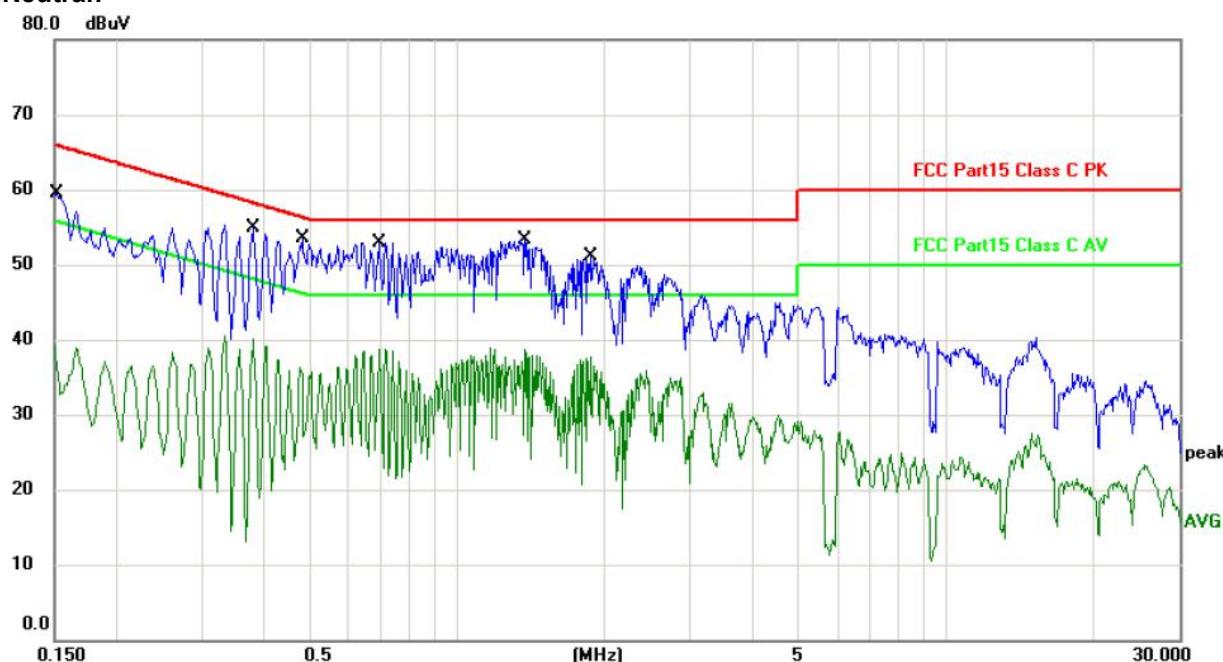**Neutral:**

No.	Mk.	Freq.	Measure- ment		Limit	Over	Detector	Comment
			MHz	dBuV				
1		0.1516	59.42	65.91	-6.49	QP		
2		0.1516	35.93	55.91	-19.98	AVG		
3		0.3820	54.92	58.23	-3.31	QP		
4		0.3820	33.59	48.23	-14.64	AVG		
5		0.4820	53.52	56.30	-2.78	QP		
6		0.4820	26.33	46.30	-19.97	AVG		
7		0.6900	52.93	56.00	-3.07	QP		
8		0.6900	35.51	46.00	-10.49	AVG		
9	*	1.3779	53.36	56.00	-2.64	QP		
10		1.3779	37.95	46.00	-8.05	AVG		
11		1.8820	51.06	56.00	-4.94	QP		
12		1.8820	33.26	46.00	-12.74	AVG		


## 6. Conducted Peak Output Power

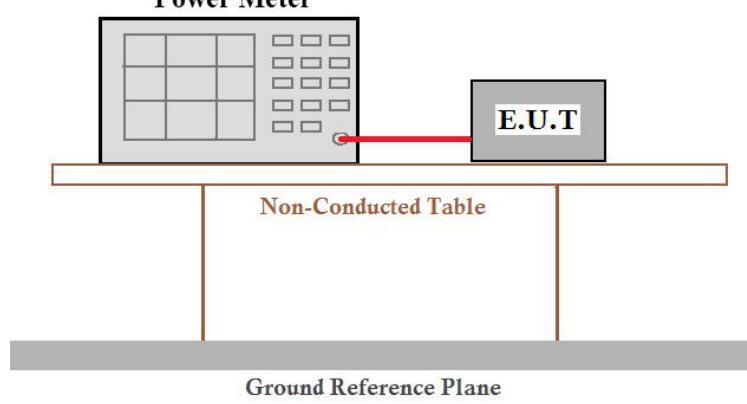Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	30dBm(for GFSK),20.97dBm(for EDR)
Test setup:	<p style="text-align: center;"><b>Power Meter</b></p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

### Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	0.028	30.00	Pass
	Middle	0.684		
	Highest	0.986		
Pi/4QPSK	Lowest	-0.112	20.97	Pass
	Middle	0.125		
	Highest	0.035		
8DPSK	Lowest	-0.254	20.97	Pass
	Middle	0.352		
	Highest	0.210		

## 7. 20dB Emission Bandwidth



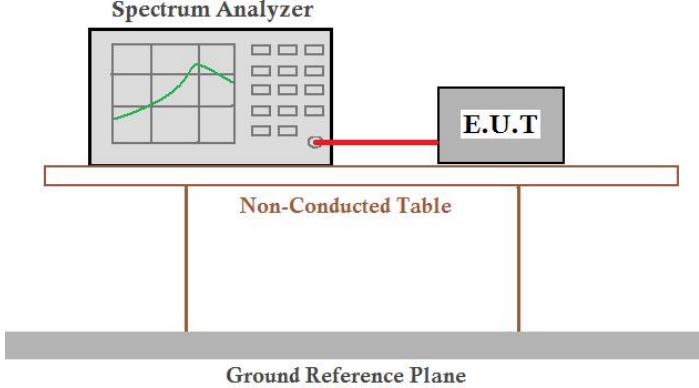
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

### Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.93	Pass
	Middle	0.93	
	Highest	0.93	
Pi/4QPSK	Lowest	1.29	Pass
	Middle	1.29	
	Highest	1.29	
8DPSK	Lowest	1.28	Pass
	Middle	1.28	
	Highest	1.28	


**Test plot as follows:**

Test mode:	GFSK mode
------------	-----------

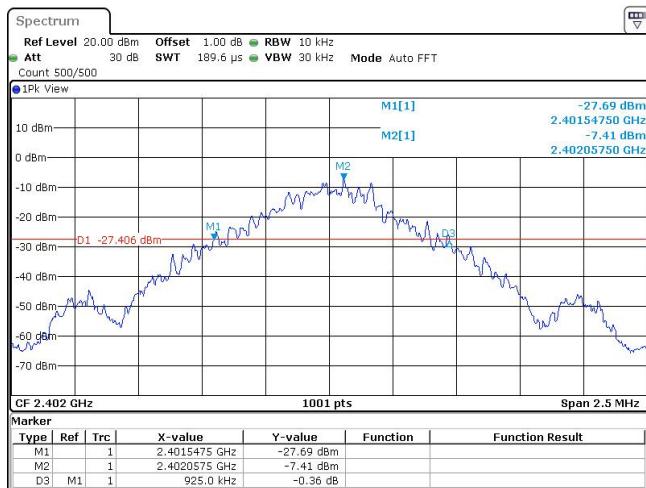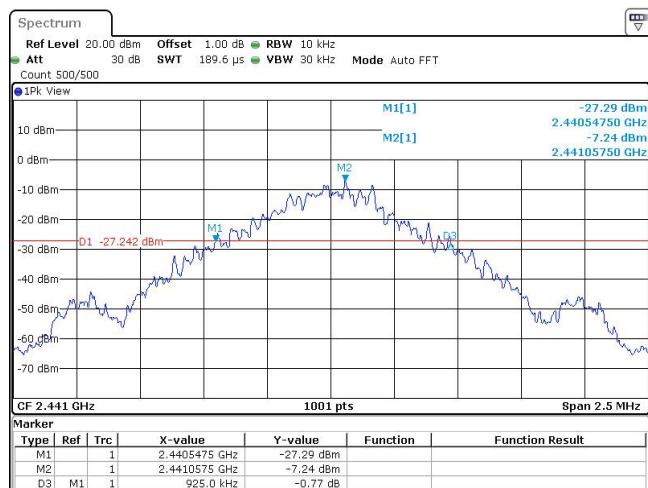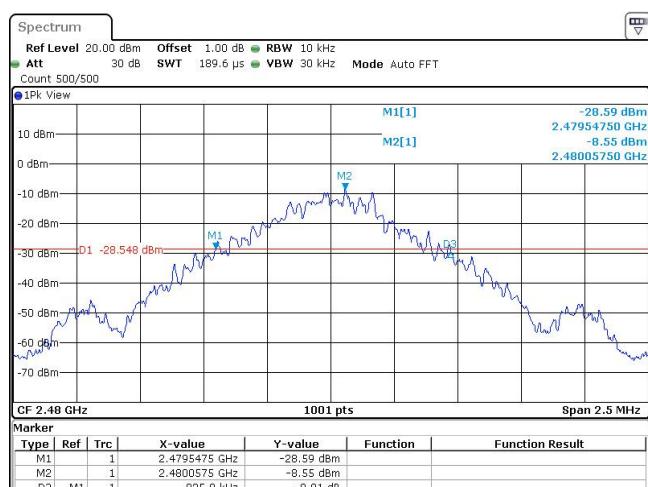
**Lowest channel****Middle channel****Highest channel**

Test mode:


Pi/4QPSK mode

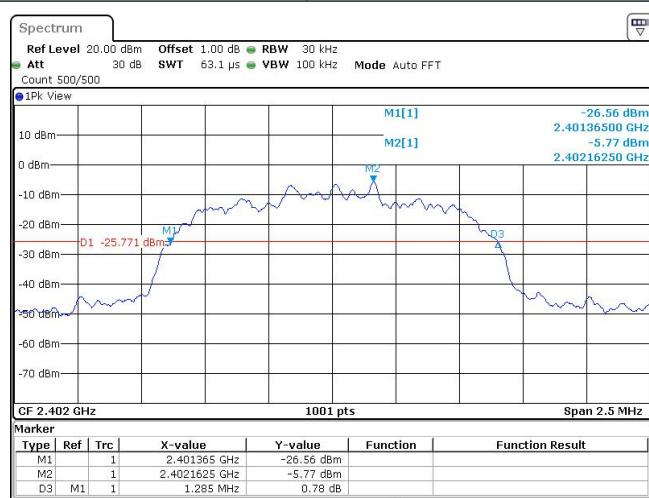

Lowest channel

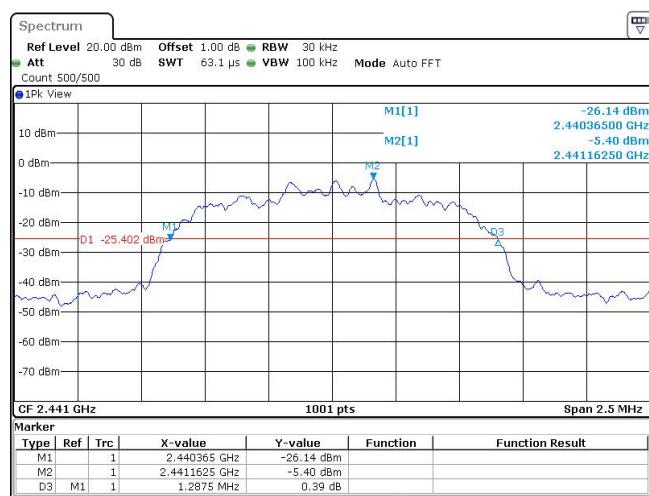


Middle channel

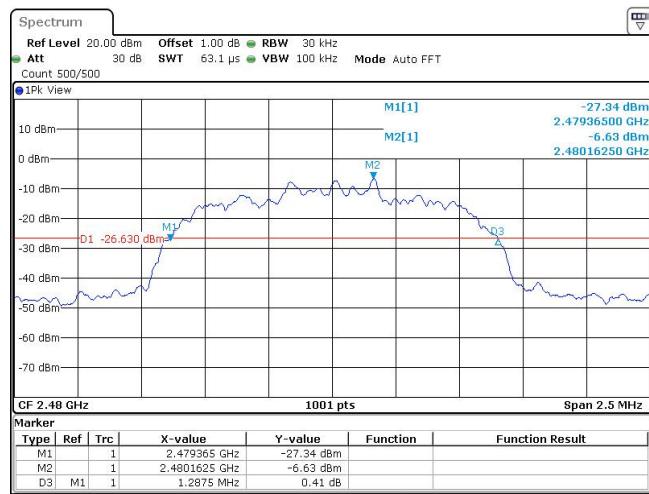


Highest channel

Test mode:


8DPSK mode

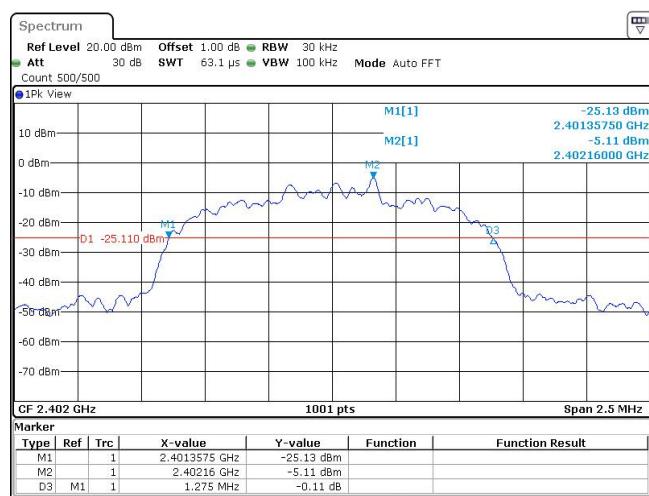

Lowest channel

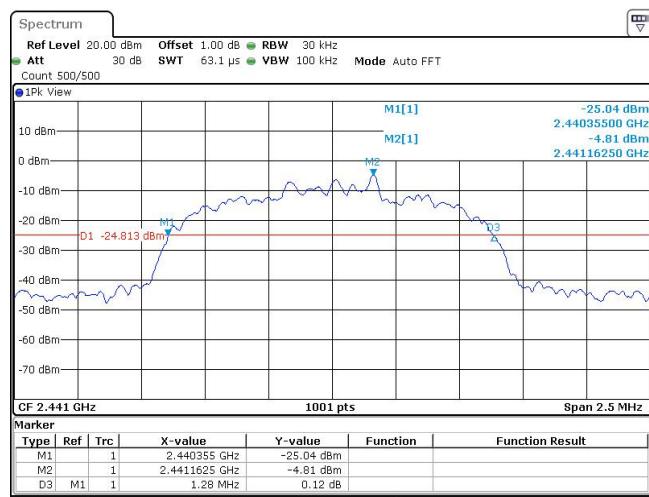


Middle channel

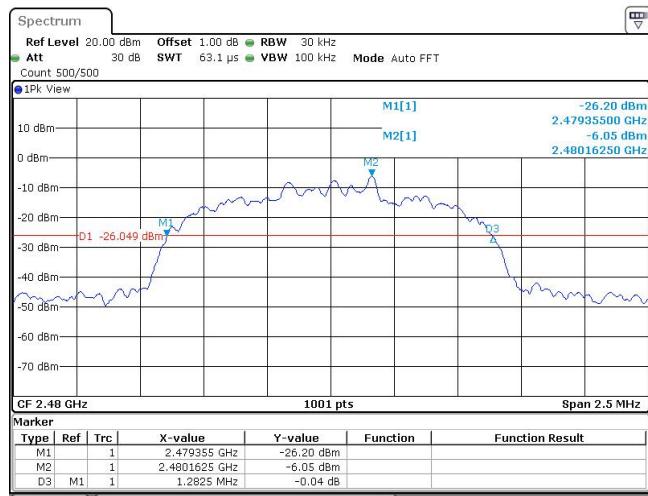

Highest channel

## 8. Carrier Frequencies Separation

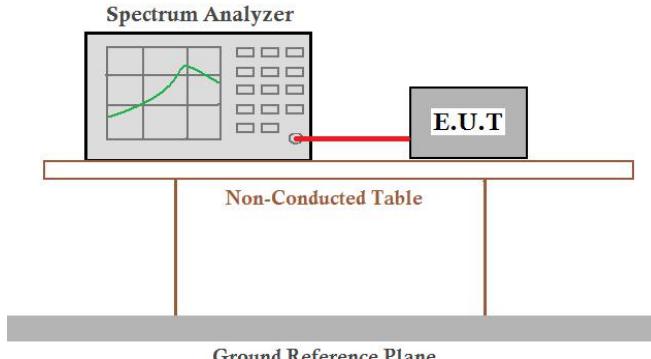Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=20KHz, VBW=62KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

### Measurement Data

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.00	$\geq 0.93$	Pass
$\pi/4$ DQPSK	39	1.00	$\geq 0.86$	Pass
8DPSK	39	1.00	$\geq 0.85$	Pass

Note:

\*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 7.4.


$\pi/4$ DQPSK limit = 2/3 \* The maximum 20 dB Bandwidth for  $\pi/4$ DQPSK modulation on the section 7.4.

8DPSK limit = 2/3 \* The maximum 20 dB Bandwidth for 8DPSK modulation on the section 7.4


**Test plot as follows:**

**Only show the worst case**


**GFSK**

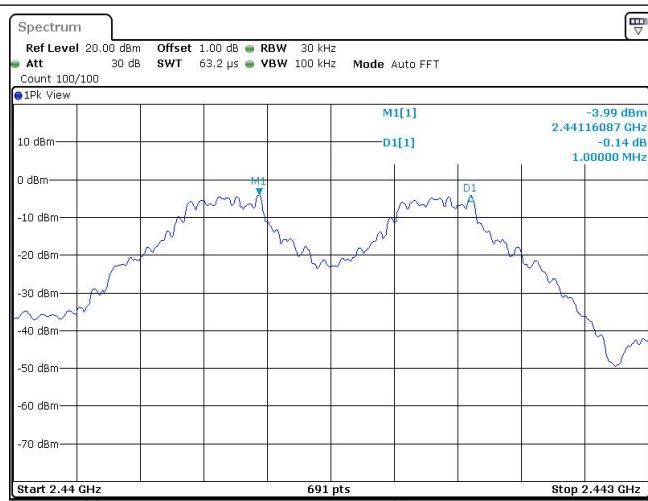


**$\pi/4$ DQPSK**

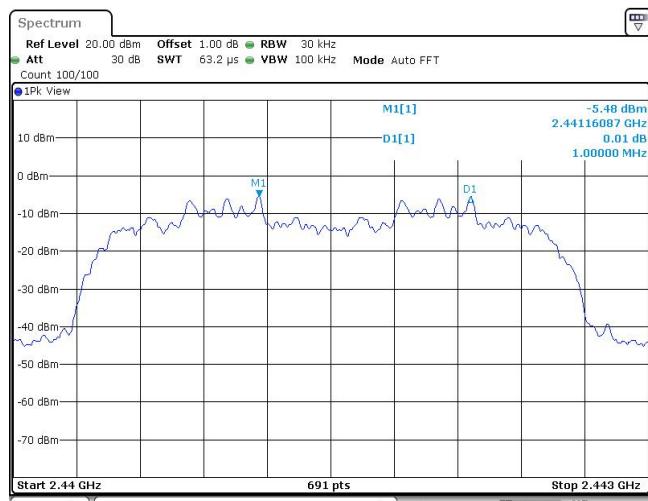

**8DPSK**

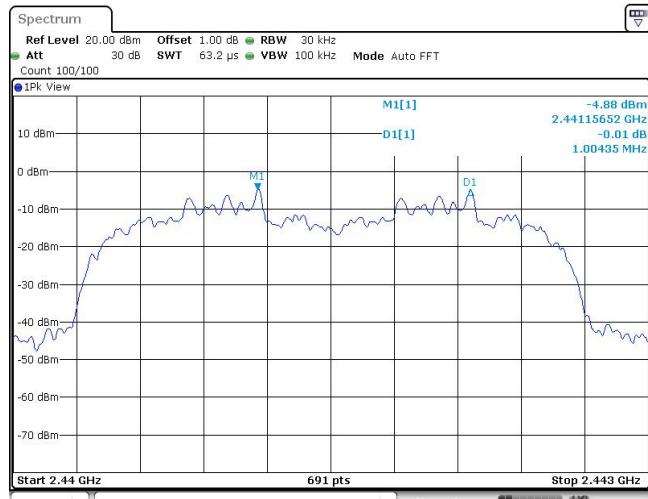



## 9. Hopping Channel Number

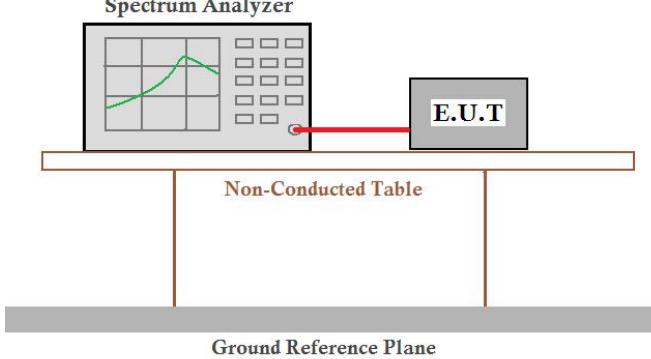Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass


### Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
Pi/4QPSK	79	15	Pass
8DPSK	79	15	Pass


## GFSK

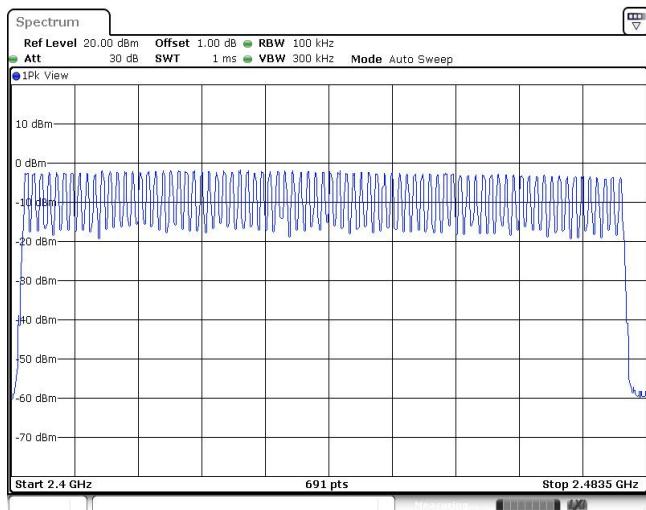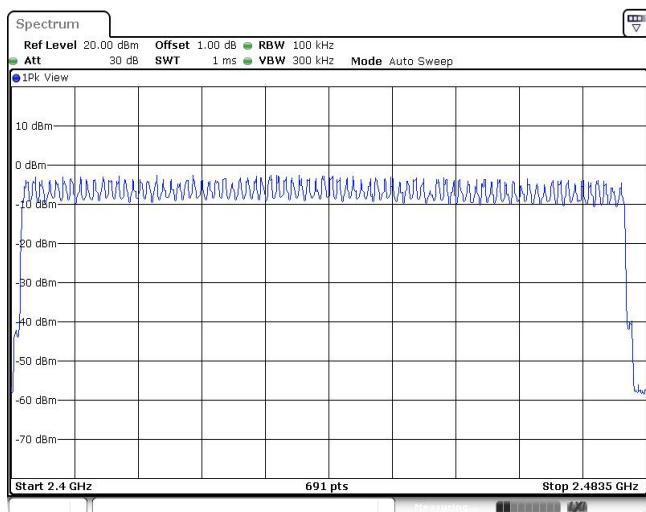 $\pi/4$ DQPSK

## 8DPSK

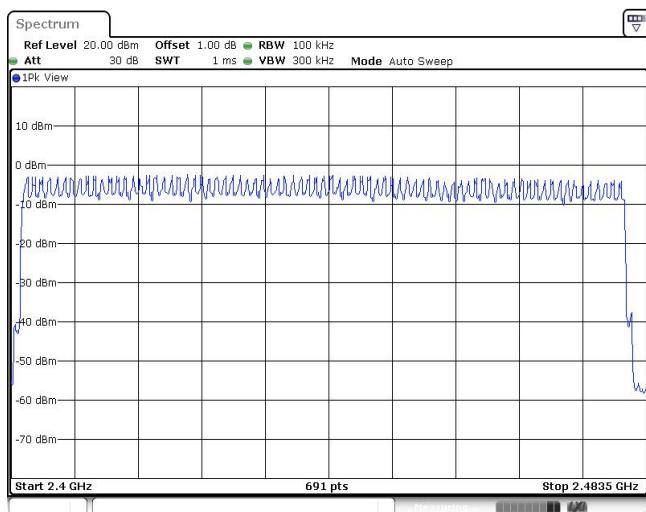

## 10. Dwell Time

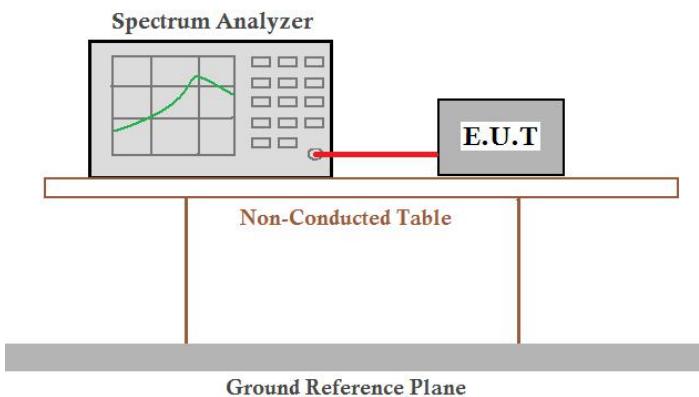
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass


### Measurement Data

Modulation type	Test Mode	Channel	Pulse Time (ms)	Total of Dwell (ms)	Limit (ms)	Result
GFSK	DH1	2441	0.38	121.60	400	Pass
	DH3	2441	1.63	260.80		
	DH5	2441	2.88	307.20		
$\pi/4$ DQPSK	2DH1	2441	0.38	121.60	400	Pass
	2DH3	2441	1.64	262.40		
	2DH5	2441	2.88	307.20		
8DPSK	3DH1	2441	0.38	121.60	400	Pass
	3DH3	2441	1.64	262.40		
	3DH5	2441	2.89	308.27		


The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

Test plot as follows:

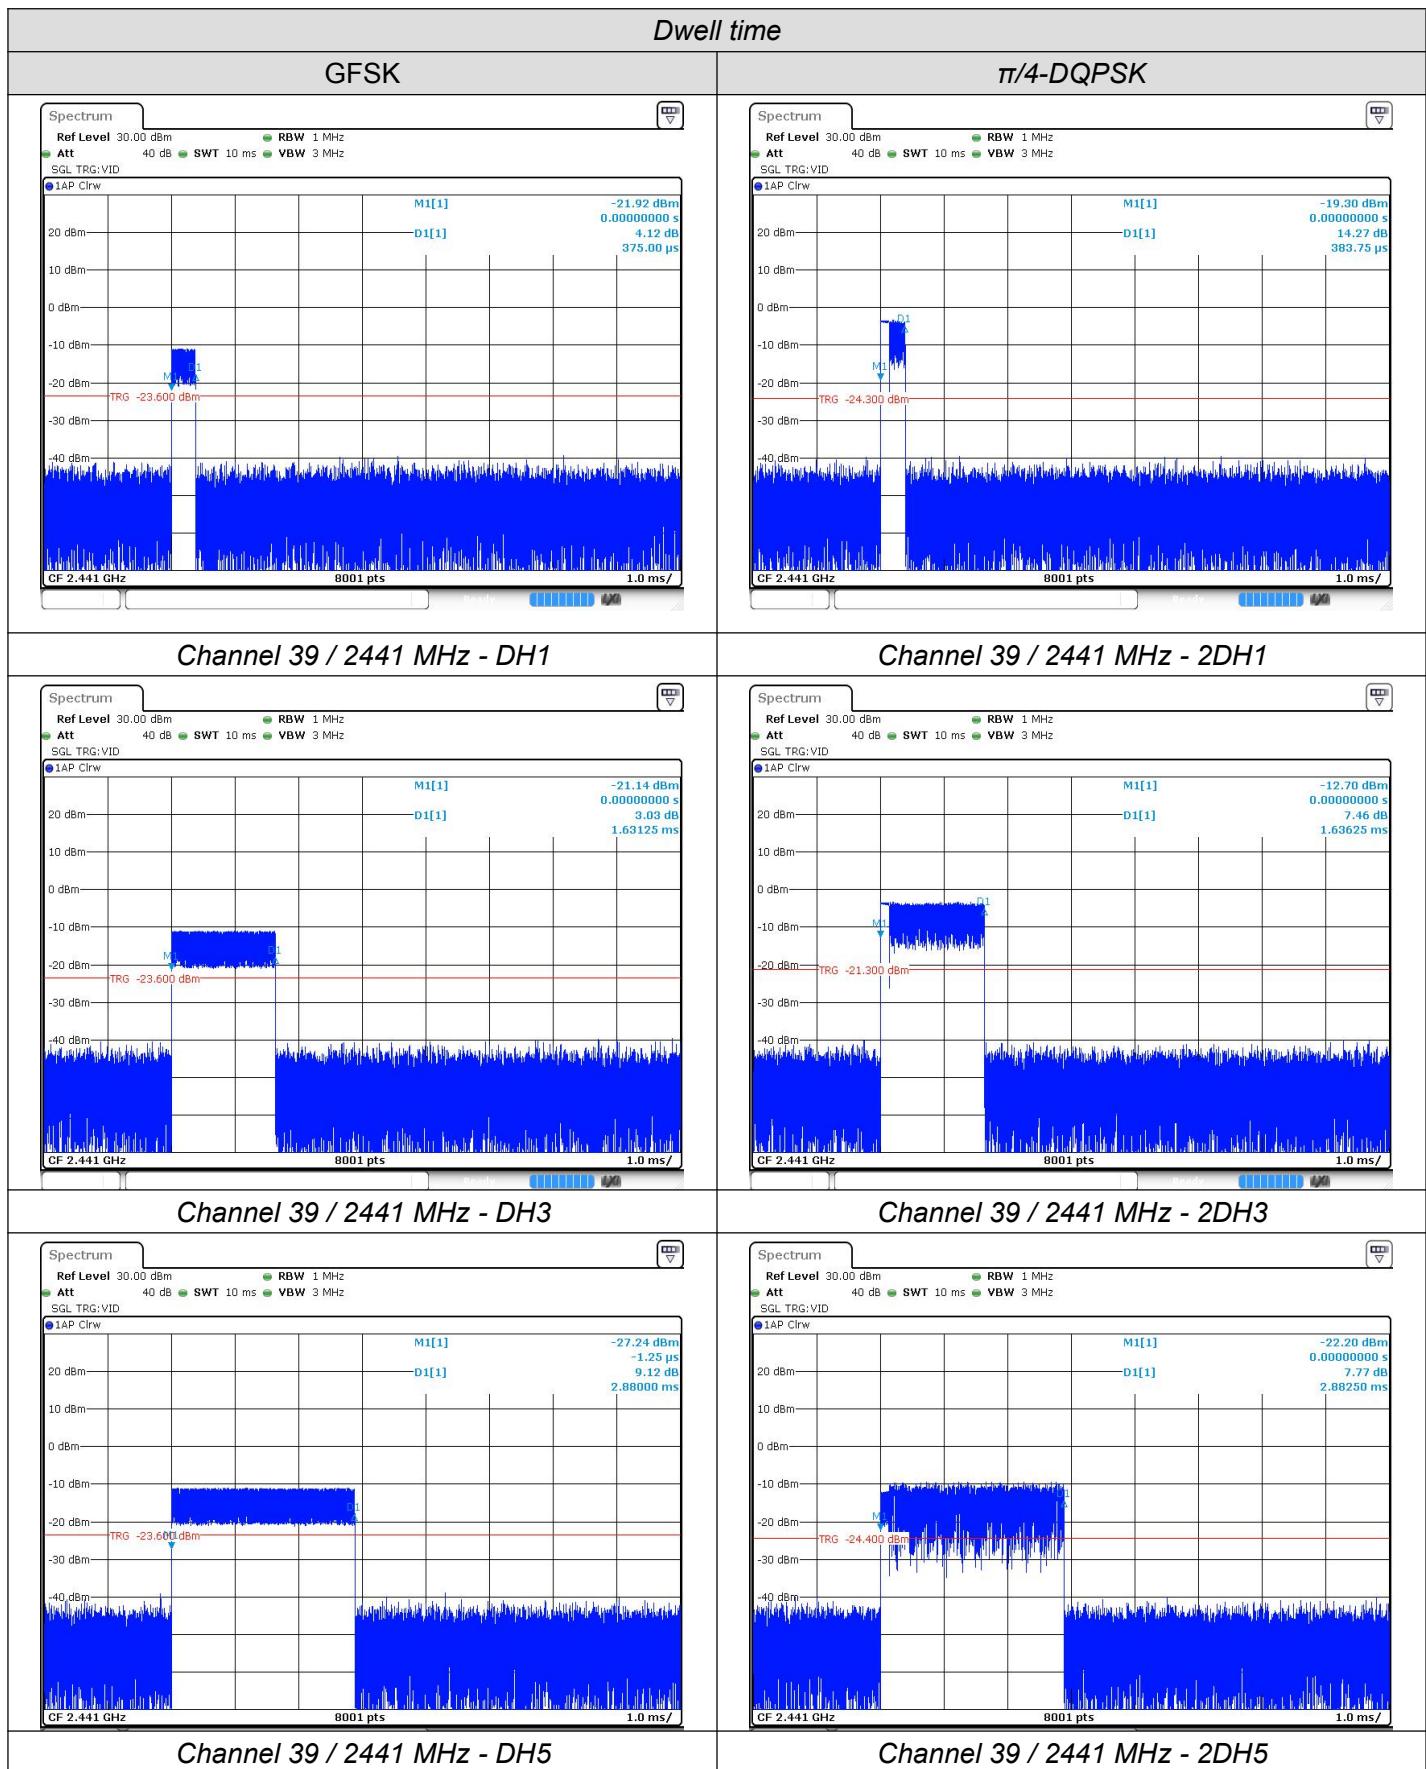

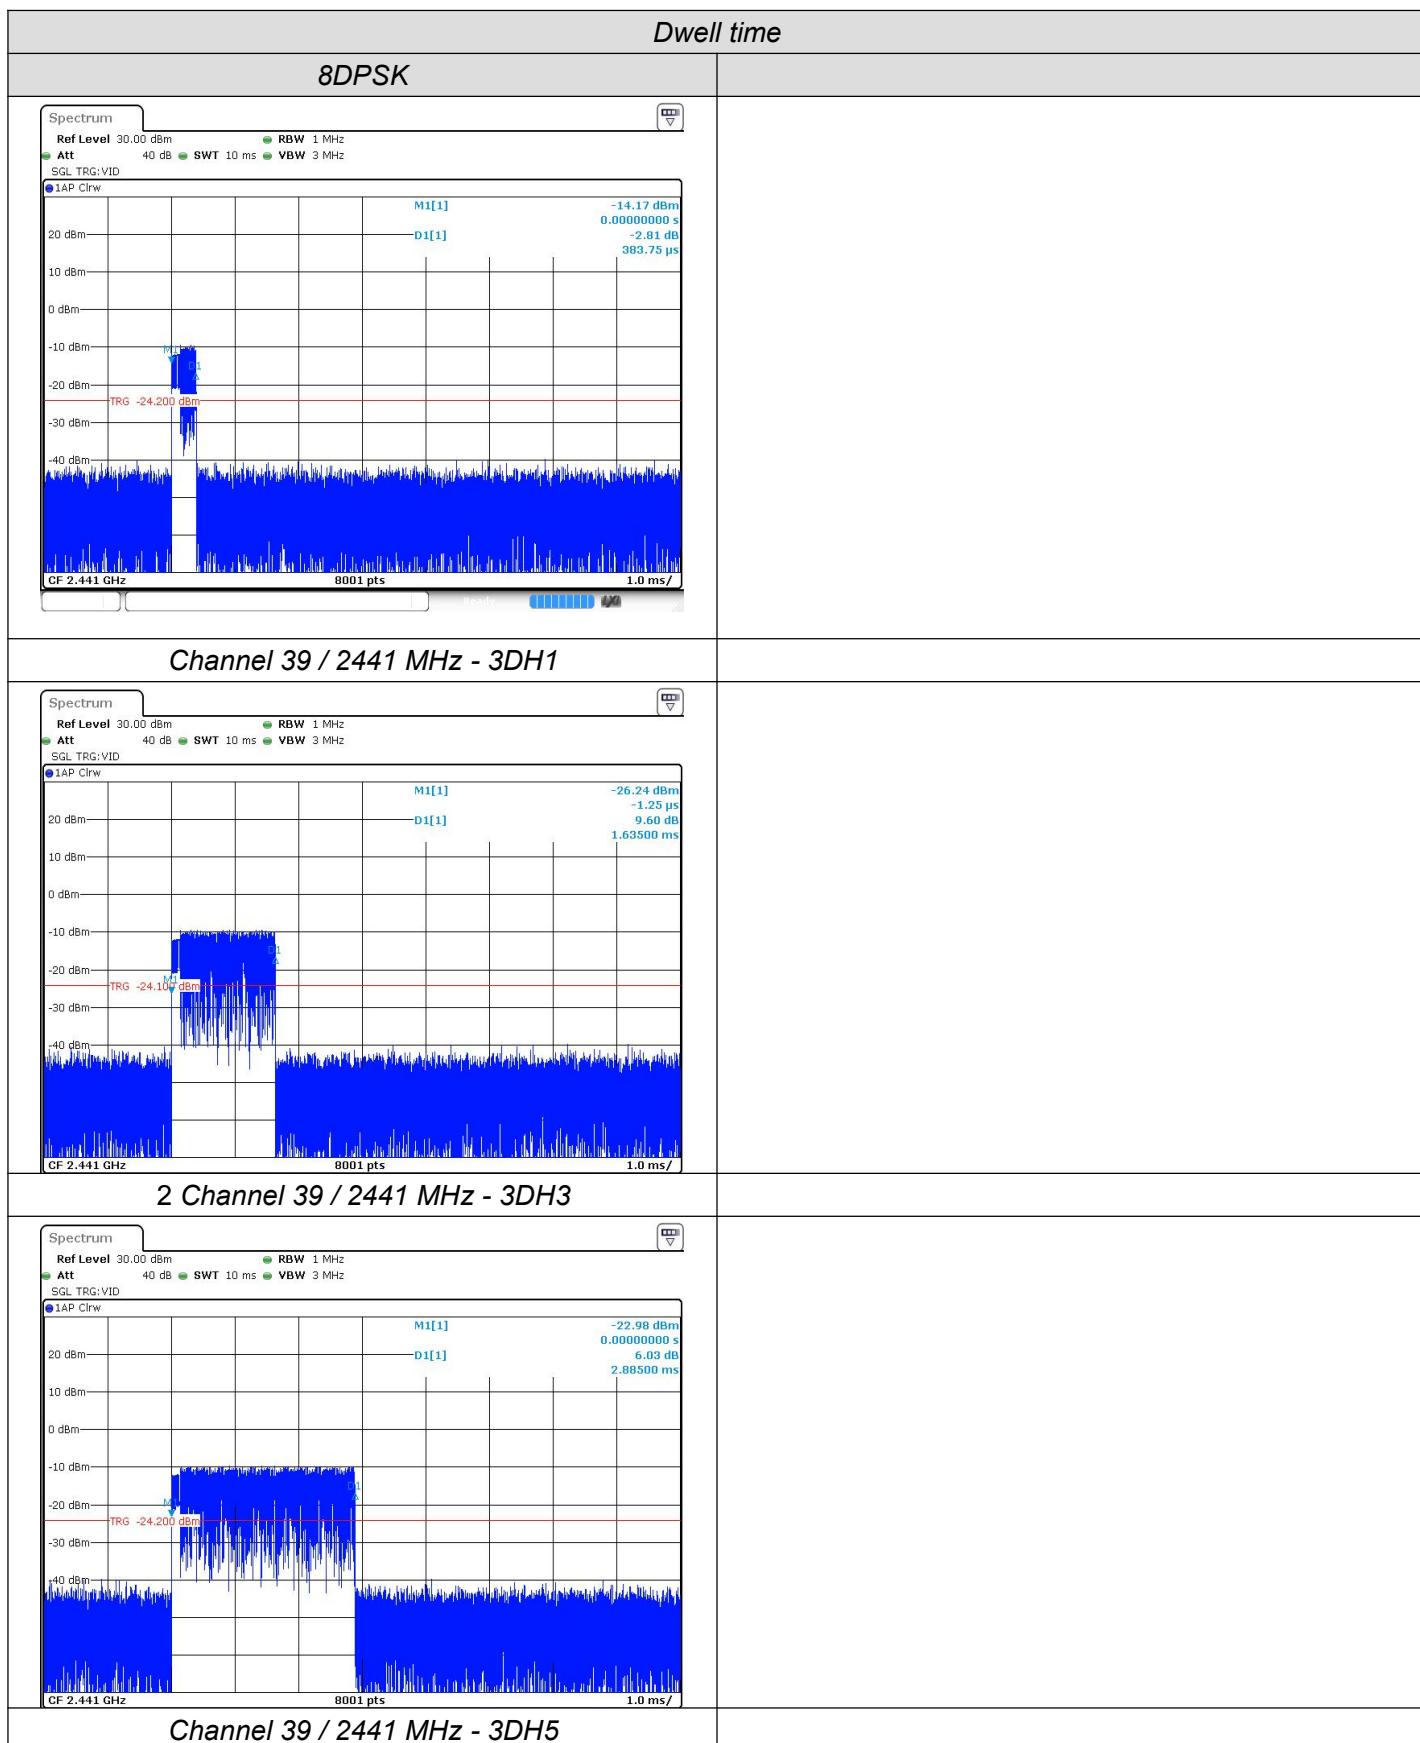


## 11. Pseudorandom Frequency Hopping Sequence

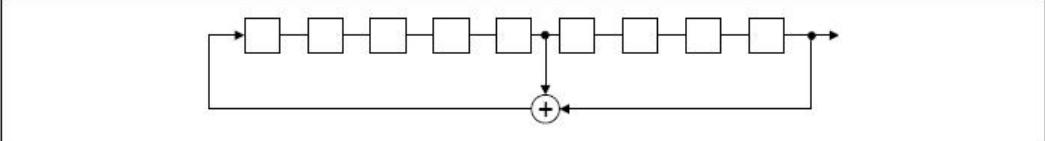Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:																						
	<p><i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i></p> <p><i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i></p>																						
<b>EUT Pseudorandom Frequency Hopping Sequence</b>																							
<p><i>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</i></p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul>  <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p><i>An example of Pseudorandom Frequency Hopping Sequence as follow:</i></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>0</td><td>2</td><td>4</td><td>6</td> <td>62</td><td>64</td> <td>78</td><td>1</td> <td>73</td><td>75</td><td>77</td> </tr> <tr> <td>  </td><td>  </td><td>  </td><td>  </td> <td>  </td><td>  </td> <td>  </td><td>  </td> <td>  </td><td>  </td><td>  </td> </tr> </table> <p><i>Each frequency used equally on the average by each transmitter.</i></p> <p><i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i></p>		0	2	4	6	62	64	78	1	73	75	77											
0	2	4	6	62	64	78	1	73	75	77													


## 12. Band Edge

### Conducted Emission Method

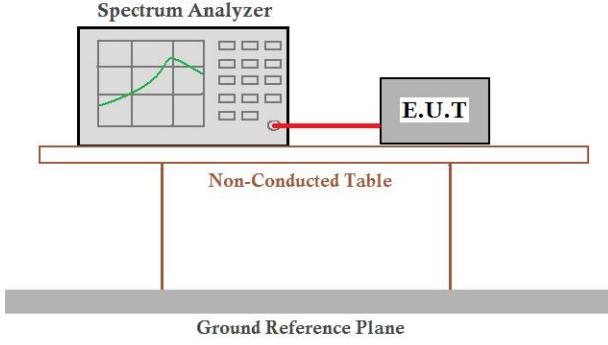
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

**Test plot as follows:**

**GFSK Mode:**

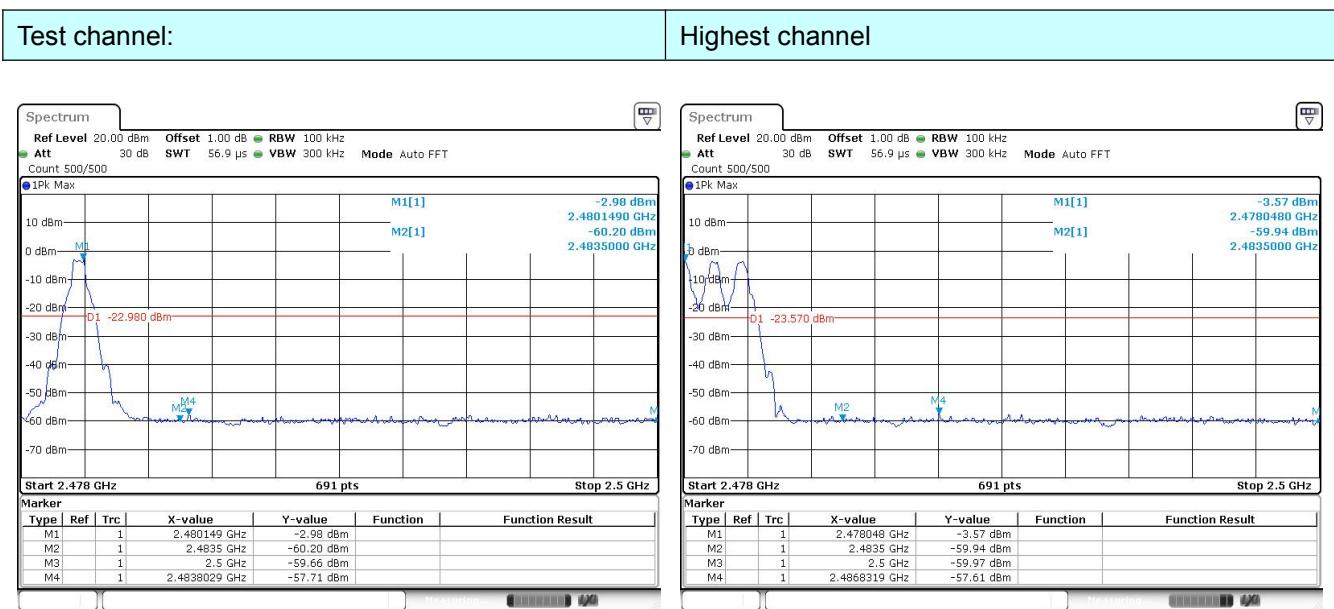


## Pi/4QPSK Mode:

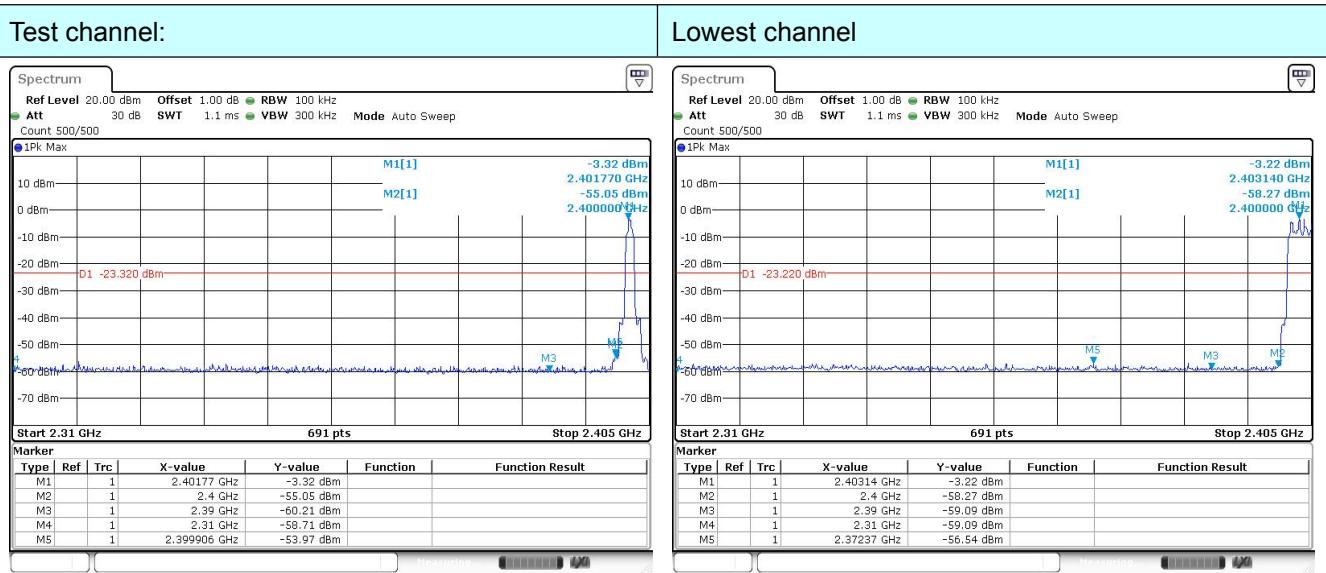

No-hopping mode


Hopping mode

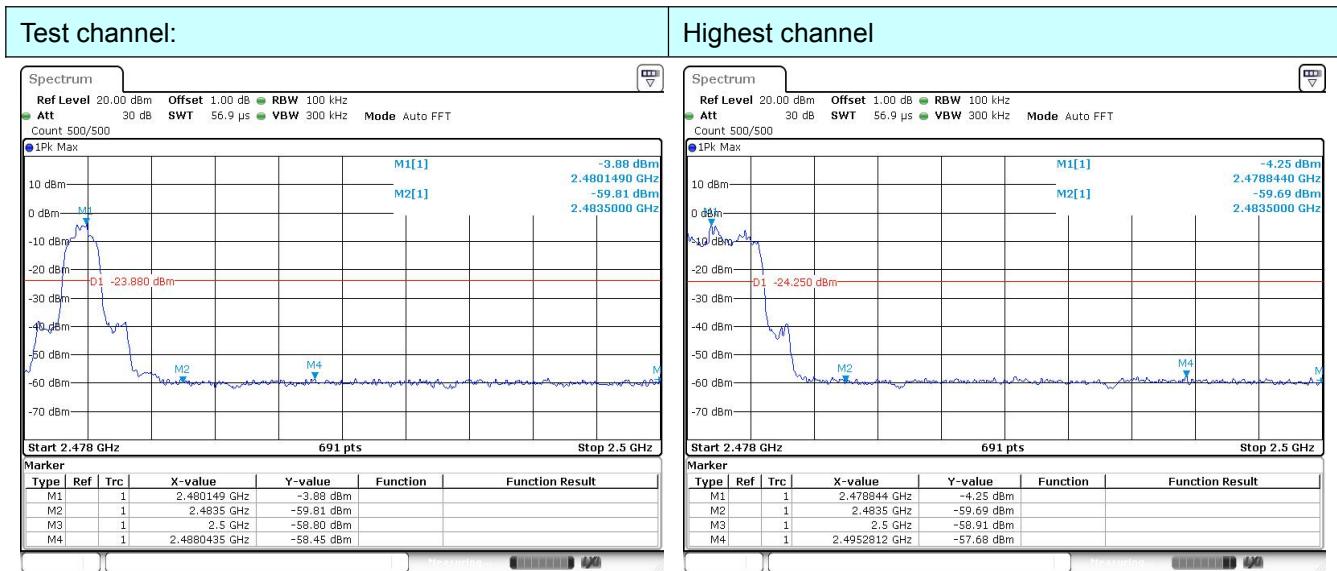

No-hopping mode


Hopping mode

## 8DPSK Mode:

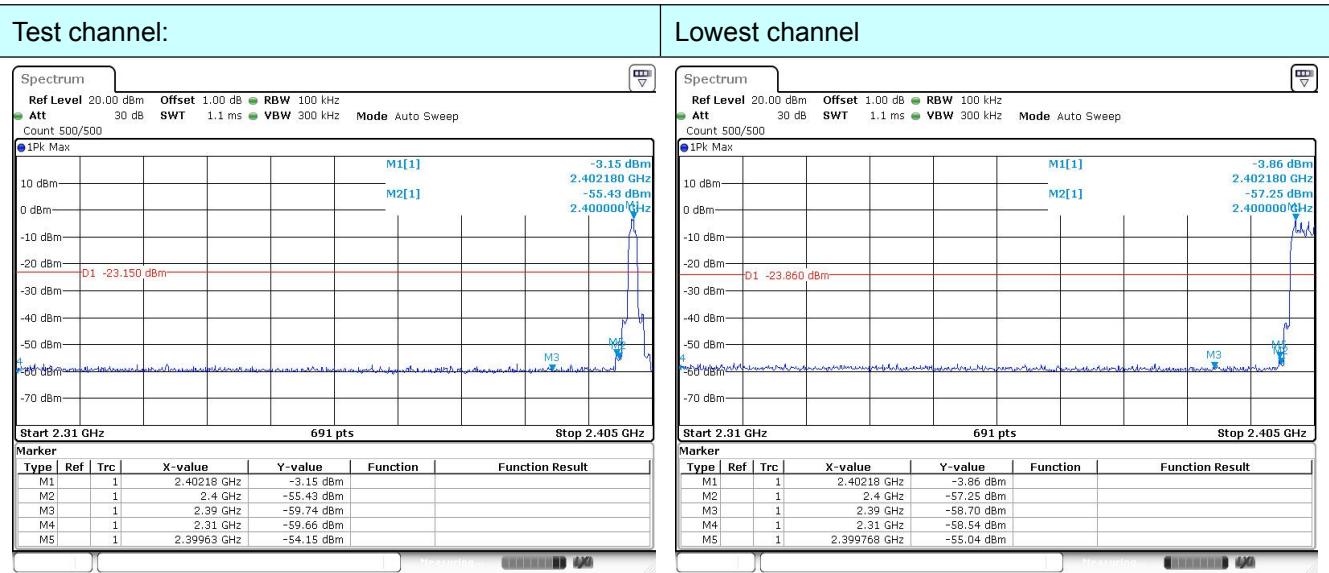

No-hopping mode


Hopping mode

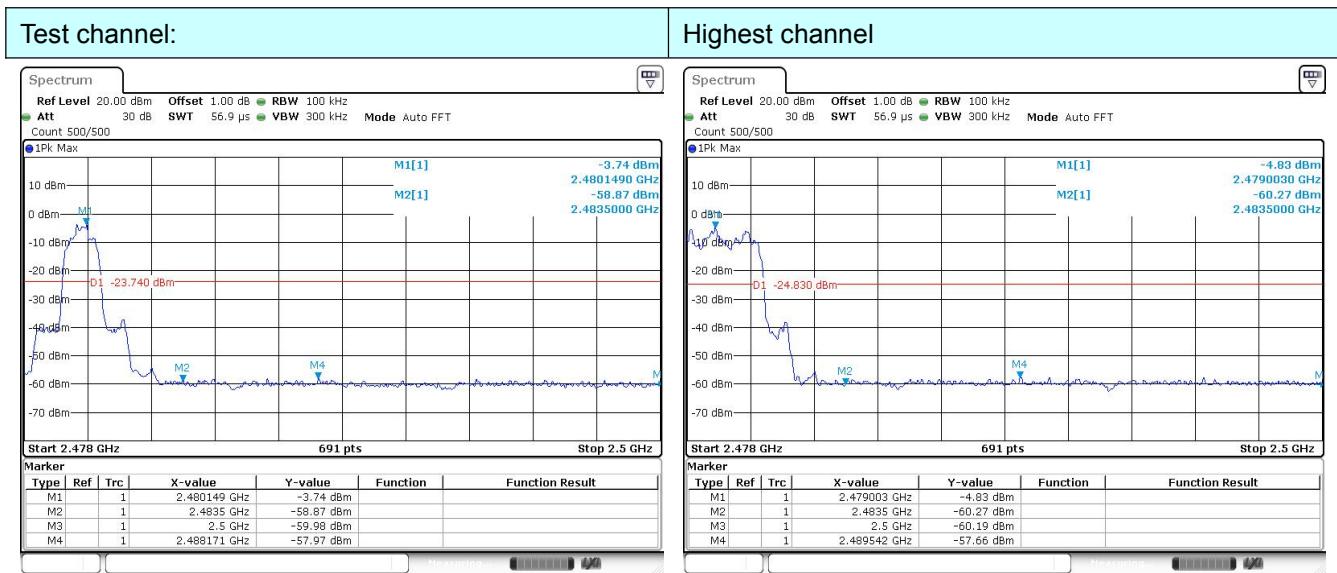

No-hopping mode

Hopping mode

### Radiated Emission Method

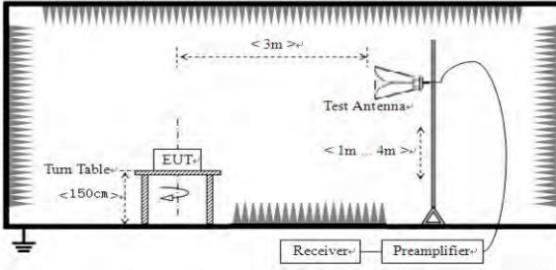Test Requirement:	FCC Part15 C Section 15.209 and 15.205						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	All restriction band have been tested, and 2.31GHz to 2.5GHz band is the worse case						
Test site:	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Remark		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
		Peak	1MHz	10Hz	Average Value		
Limit:	Frequency		Limit (dBuV/m @3m)		Remark		
	Above 1GHz		54.00		Average Value		
			74.00		Peak Value		
Test setup:							
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> </ol>						

	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

*Remark: During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.*

Test channel:	Lowest
---------------	--------

**Peak value:**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	51.62	74.00	-22.38	Horizontal
2400.00	53.35	74.00	-20.65	Horizontal
2390.00	52.24	74.00	-21.76	Vertical
2400.00	54.58	74.00	-19.42	Vertical

**Average value:**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	42.62	54.00	-11.38	Horizontal
2400.00	43.35	54.00	-10.65	Horizontal
2390.00	44.24	54.00	-9.76	Vertical
2400.00	45.84	54.00	-8.16	Vertical

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	52.62	74.00	-21.38	Horizontal
2500.00	54.35	74.00	-19.65	Horizontal


2483.50	52.52	74.00	-21.48	Vertical
2500.00	52.54	74.00	-21.46	Vertical

**Average value:**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	44.62	54.00	-9.38	Horizontal
2500.00	41.52	54.00	-12.48	Horizontal
2483.50	46.57	54.00	-7.43	Vertical
2500.00	42.84	54.00	-11.16	Vertical


## 14. Spurious Emission


### Conducted Emission Method

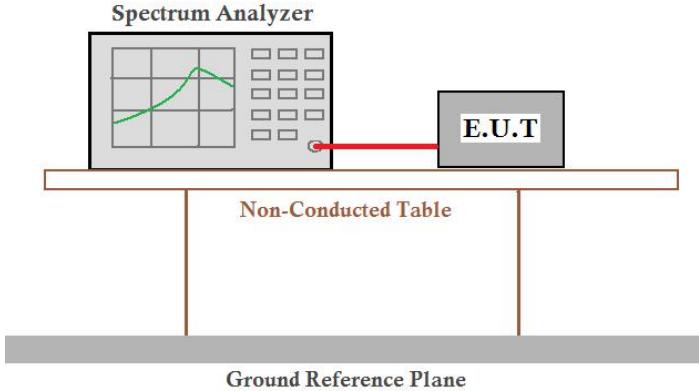
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to a Non-Conducted Table. The Non-Conducted Table is connected to an E.U.T (Equipment Under Test) and a Ground Reference Plane. The Non-Conducted Table is positioned above the Ground Reference Plane.</p>
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

#### Remark:


During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

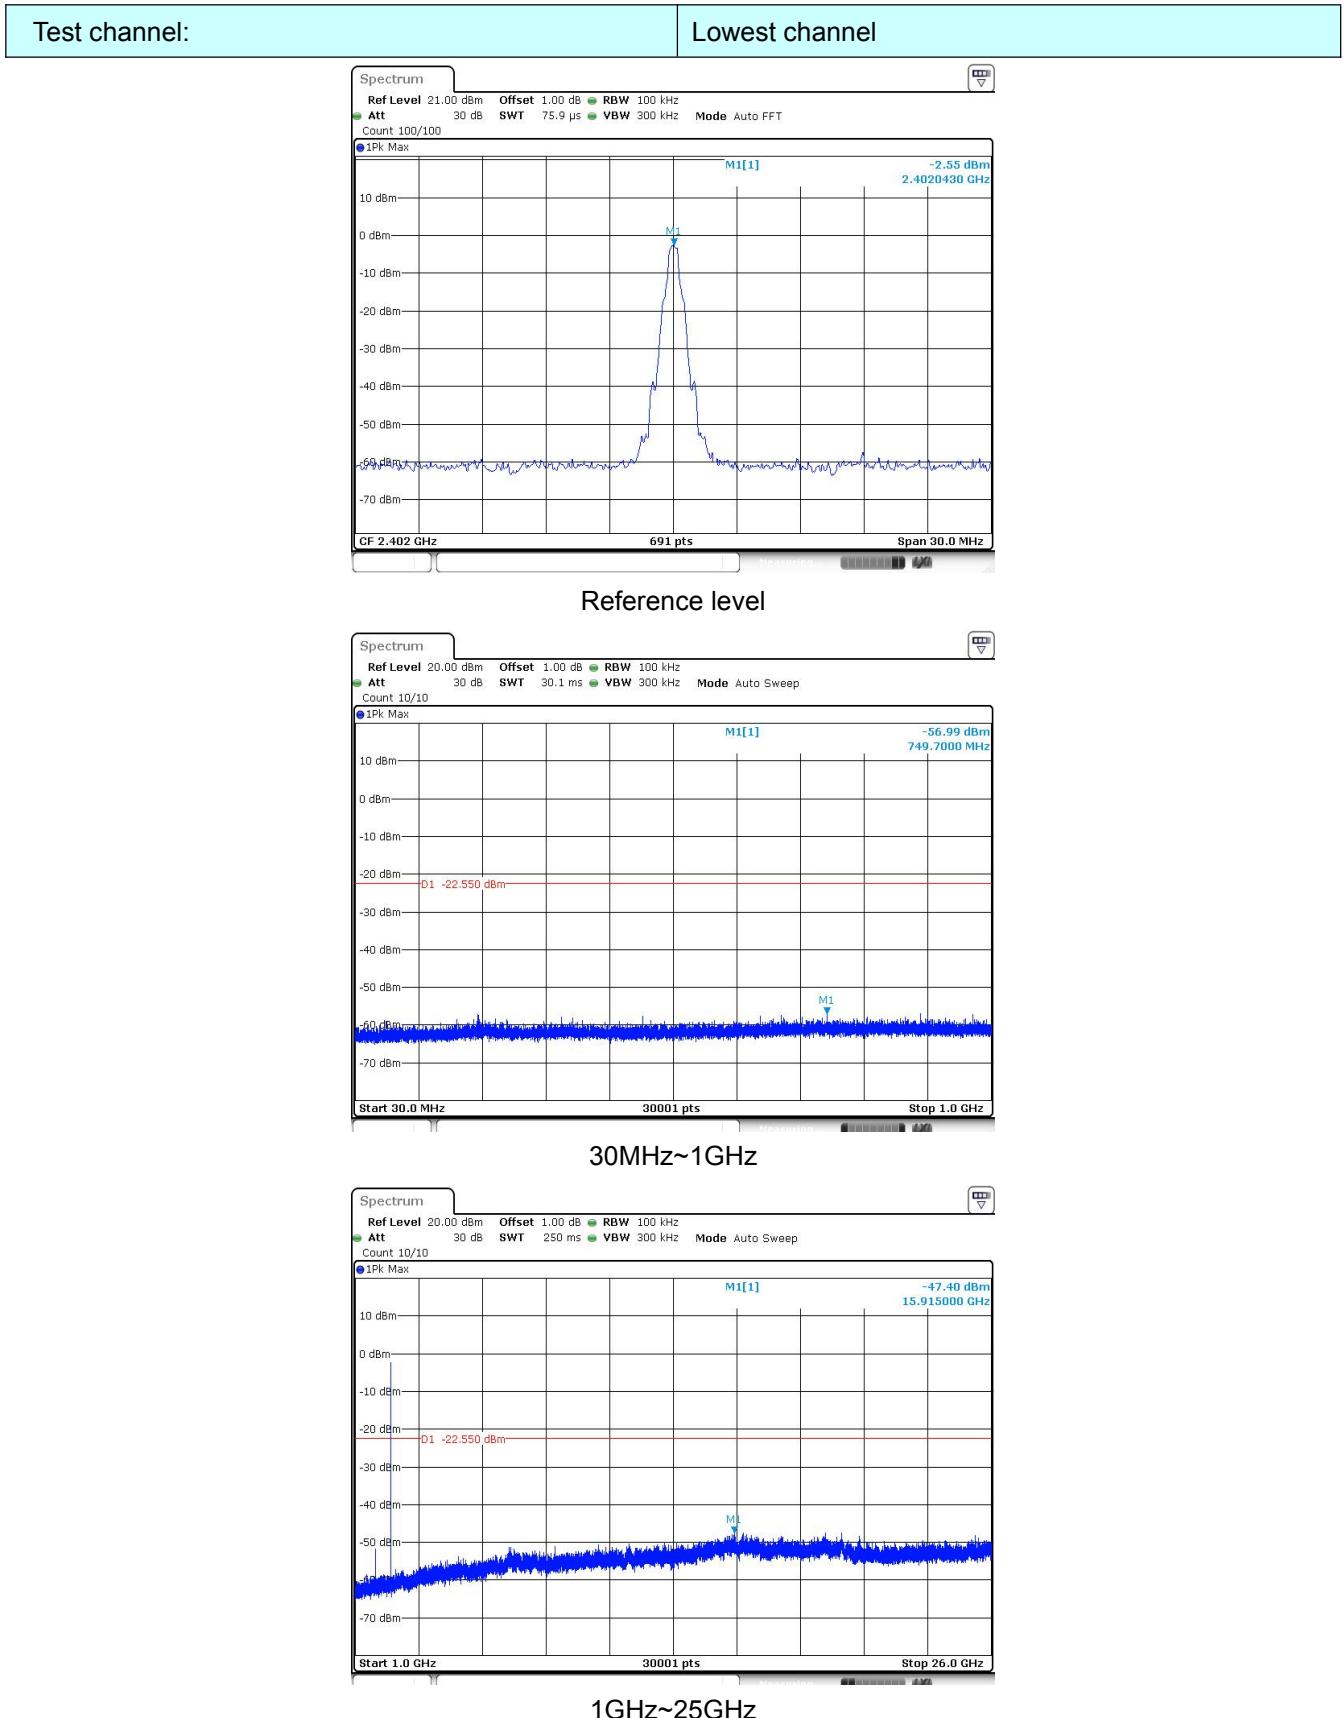


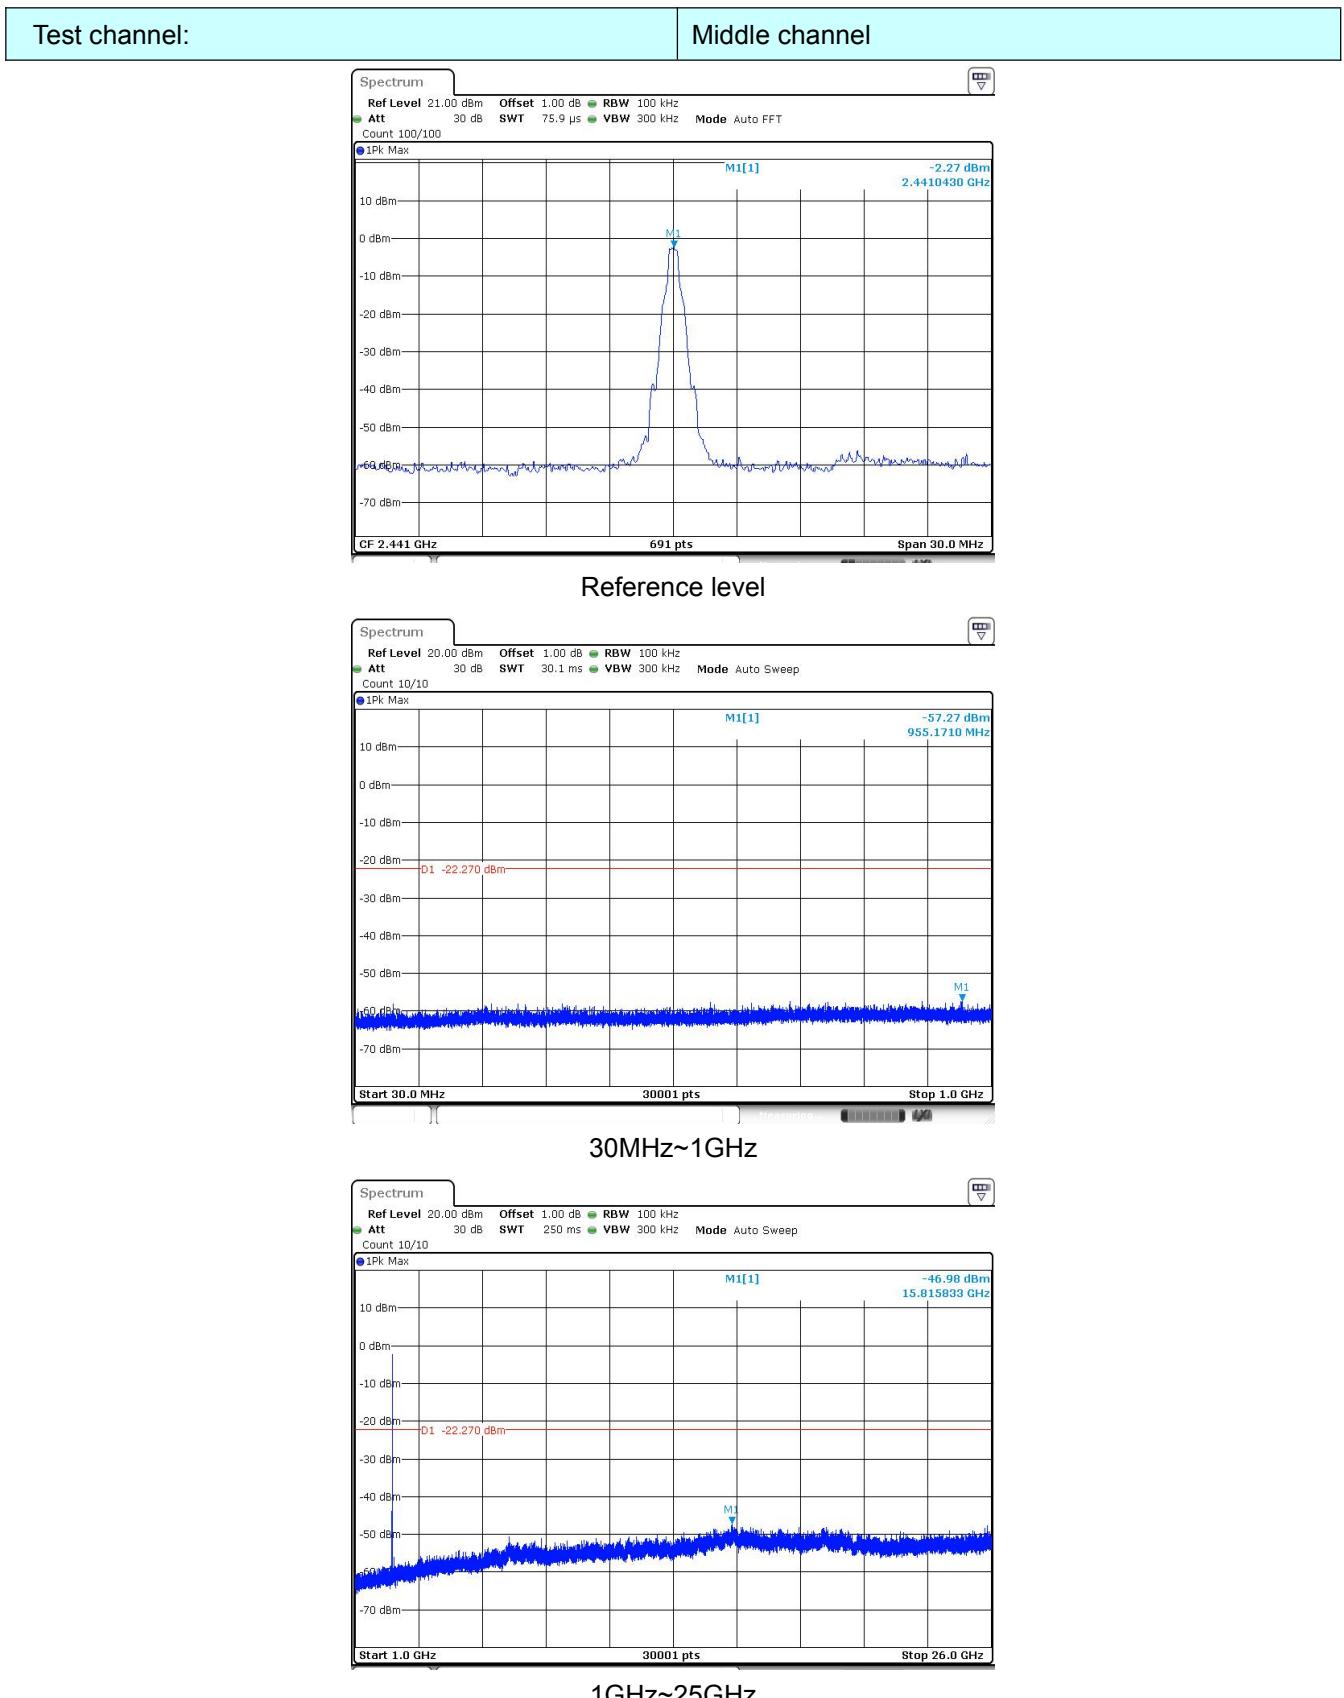

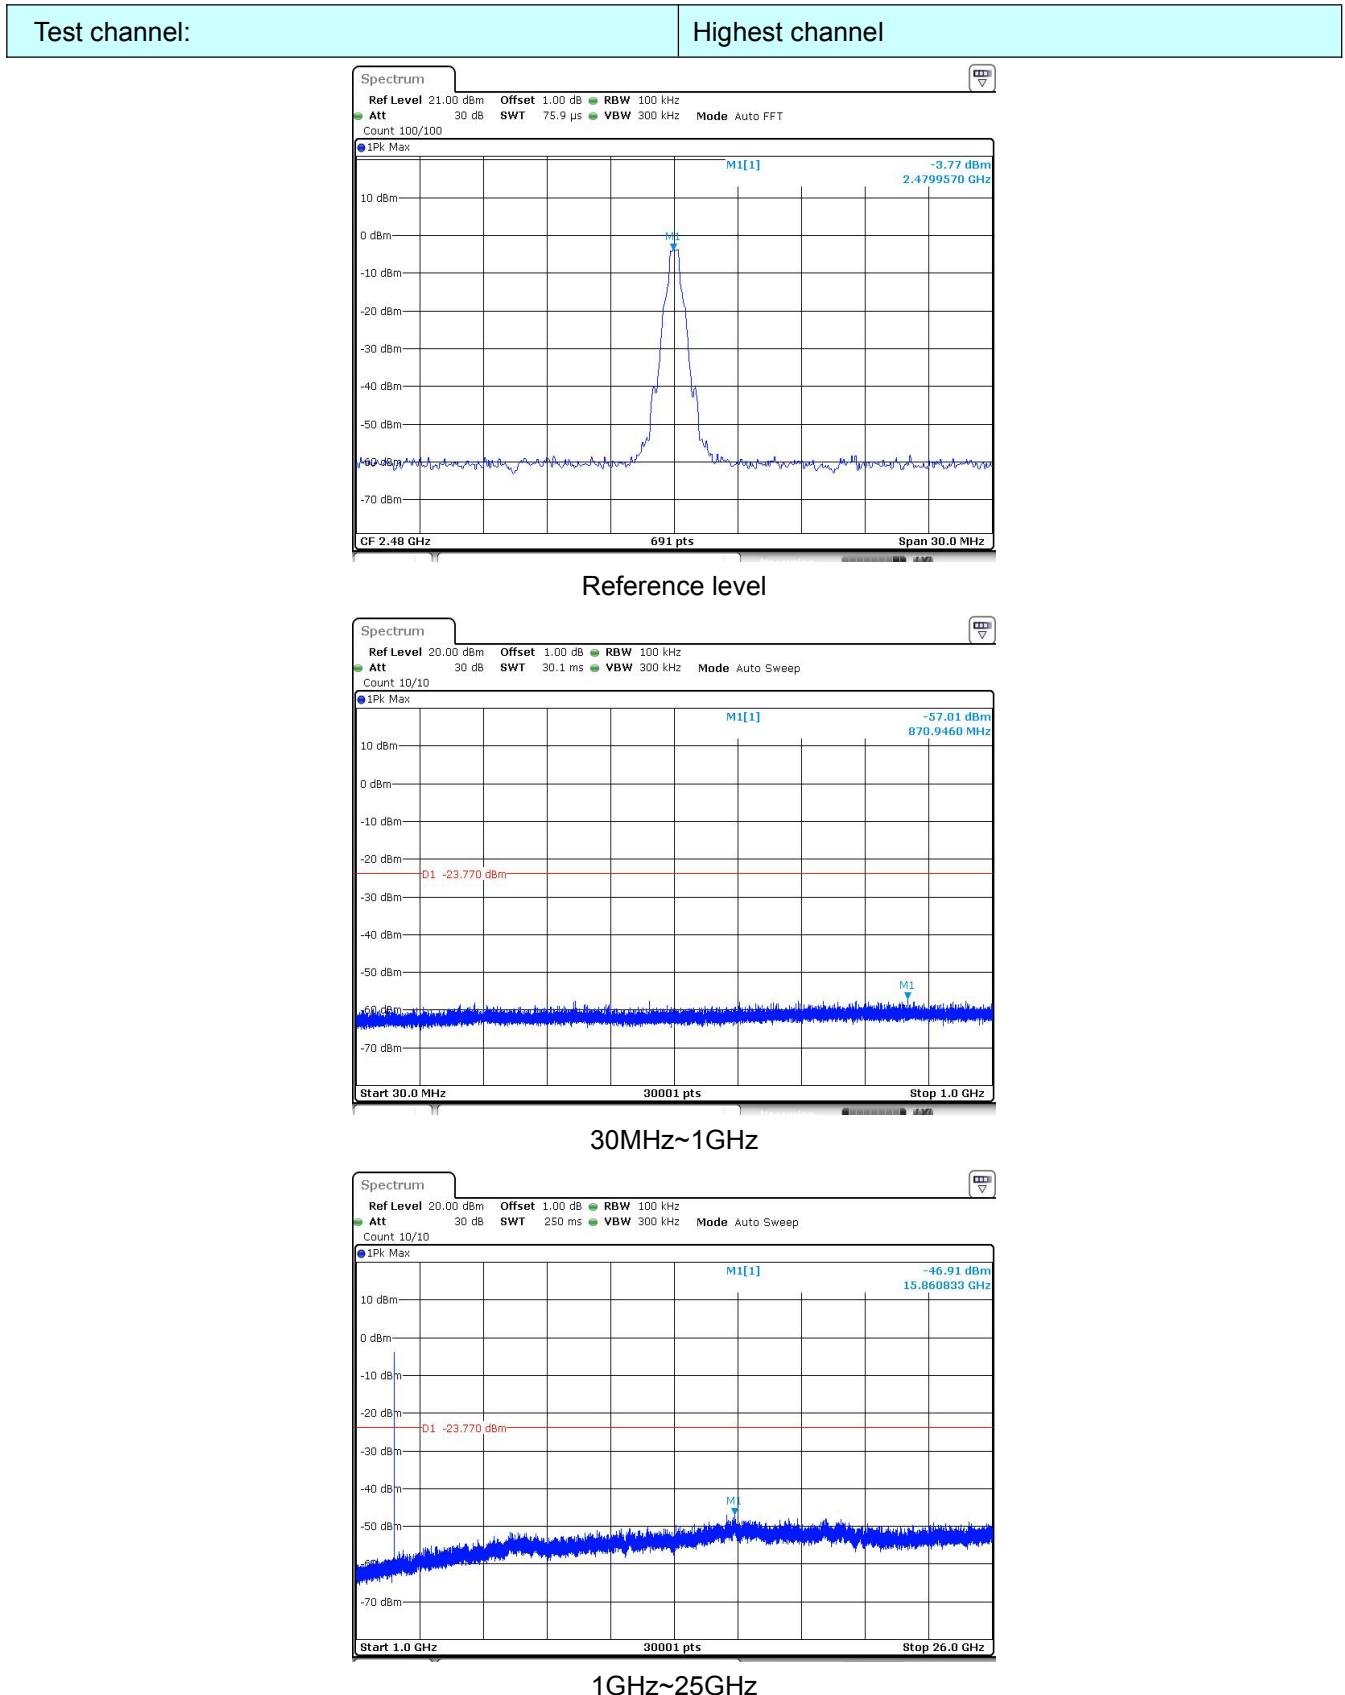

**Radiated Emission Method**

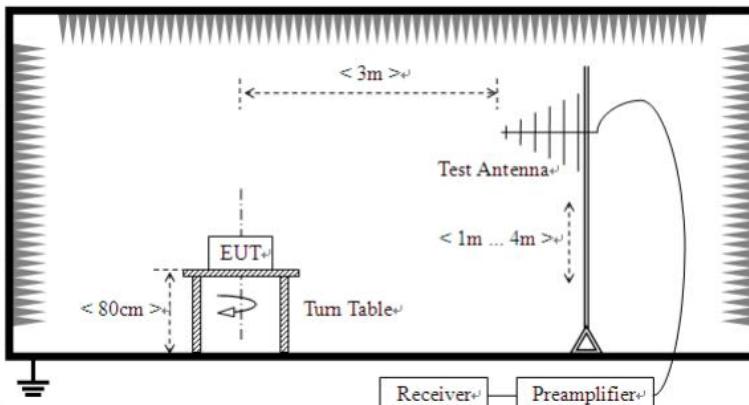
Test Requirement:	FCC Part15 C Section 15.209								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	30MHz to 25GHz								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		Peak	1MHz	10Hz	Average Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	30MHz-88MHz	40.0		Quasi-peak Value					
	88MHz-216MHz	43.5		Quasi-peak Value					
	216MHz-960MHz	46.0		Quasi-peak Value					
	960MHz-1GHz	54.0		Quasi-peak Value					
	Above 1GHz	54.0		Average Value					
		74.0		Peak Value					
Test setup:	Below 1GHz								
									
	Above 1GHz								

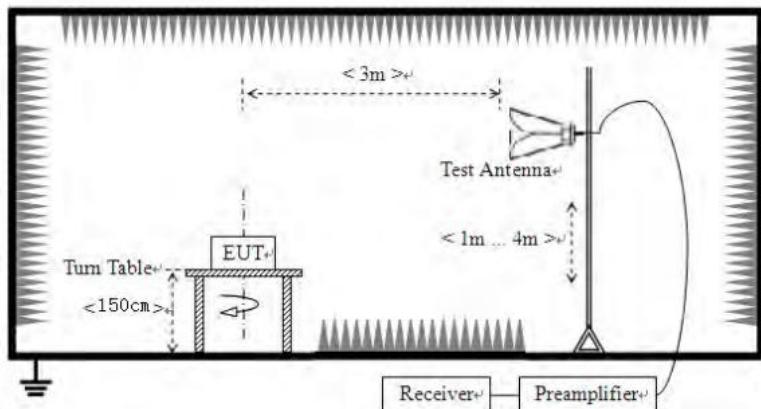


Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

**Remark:**

- During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.
- Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

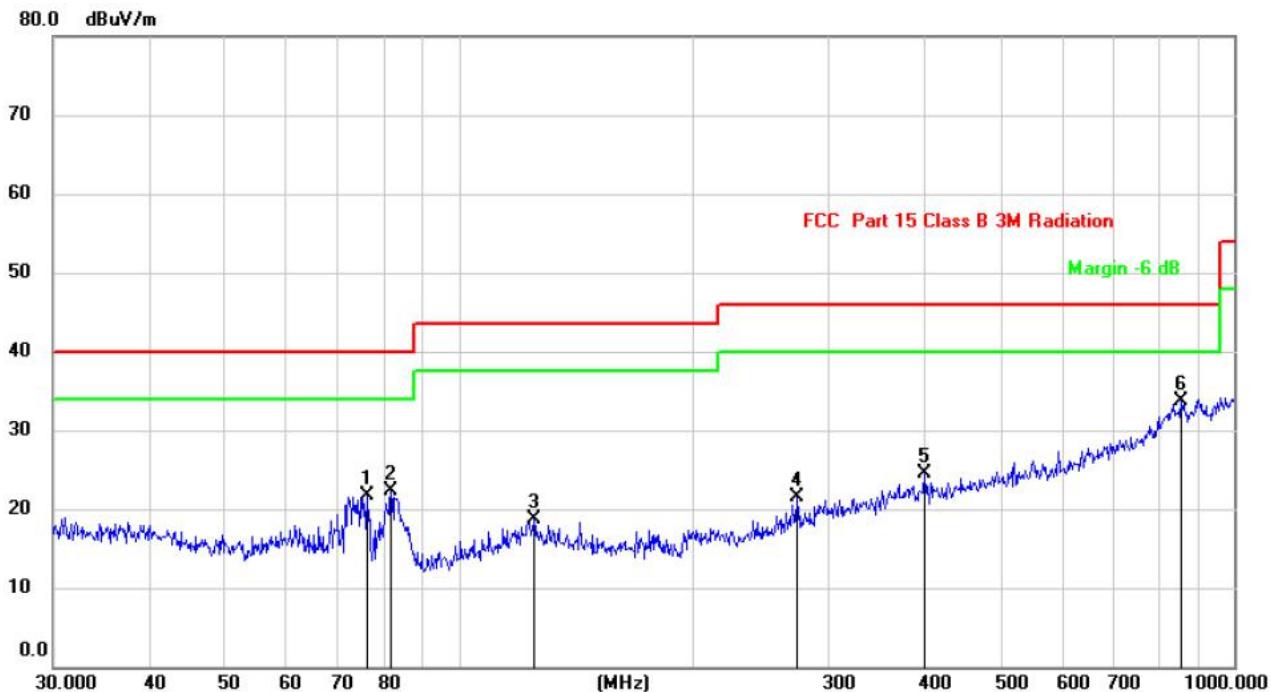**Measurement data:****Vertical:**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		Antenna	Table	
			Level	Factor	ment		dB	Detector			Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		76.2442	20.54	1.16	21.70	40.00	-18.30	QP			
2		81.7832	21.09	1.19	22.28	40.00	-17.72	QP			
3		125.0066	14.82	3.85	18.67	43.50	-24.83	QP			
4		273.2341	15.40	6.16	21.56	46.00	-24.44	QP			
5		399.0300	14.86	9.62	24.48	46.00	-21.52	QP			
6	*	854.0247	15.75	17.97	33.72	46.00	-12.28	QP			

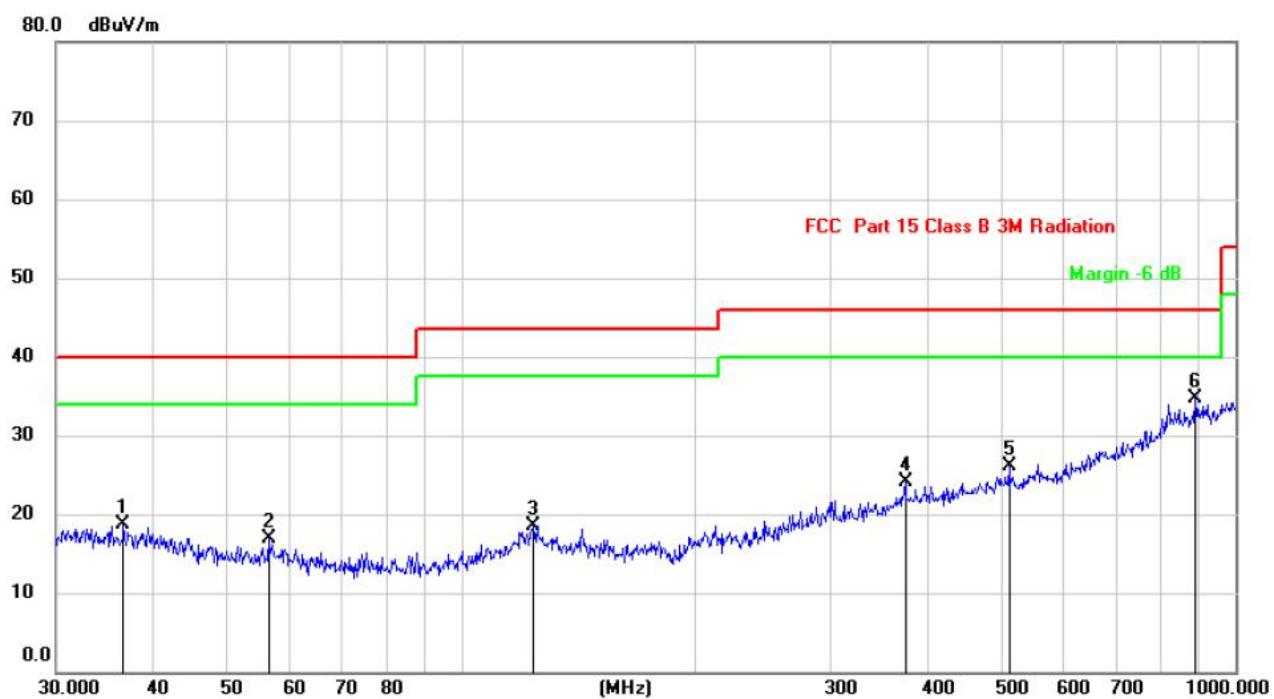**Horizontal:**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		36.6375	13.84	4.77	18.61	40.00	-21.39	QP		
2		56.3947	14.91	1.92	16.83	40.00	-23.17	QP		
3		124.1329	14.65	3.91	18.56	43.50	-24.94	QP		
4		374.6225	14.48	9.64	24.12	46.00	-21.88	QP		
5		510.0436	15.11	10.92	26.03	46.00	-19.97	QP		
6	*	887.6099	16.37	18.41	34.78	46.00	-11.22	QP		

## ■ Above 1GHz

Test channel:	Lowest
---------------	--------

## Peak value:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	42.62	74.00	-31.38	Vertical
7206.00	43.52	74.00	-30.48	Vertical
9608.00	52.54	74.00	-21.46	Vertical
12010.00	*	74.00		Vertical
14412.00	*	74.00		Vertical
4804.00	46.62	74.00	-27.38	Horizontal
7206.00	48.35	74.00	-25.65	Horizontal
9608.00	45.94	74.00	-28.06	Horizontal
12010.00	*	74.00		Horizontal
14412.00	*	74.00		Horizontal

## Average value:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	33.58	54.00	-20.42	Vertical
7206.00	35.65	54.00	-18.35	Vertical
9608.00	36.28	54.00	-17.72	Vertical
12010.00	*	54.00		Vertical
14412.00	*	54.00		Vertical
4804.00	35.25	54.00	-18.75	Horizontal
7206.00	38.34	54.00	-15.66	Horizontal
9608.00	34.82	54.00	-19.18	Horizontal
12010.00	*	54.00		Horizontal
14412.00	*	54.00		Horizontal

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

**Peak value:**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	45.52	74.00	-28.48	Vertical
7323.00	46.58	74.00	-27.42	Vertical
9764.00	48.65	74.00	-25.35	Vertical
12205.00	*	74.00		Vertical
14646.00	*	74.00		Vertical
4882.00	46.65	74.00	-27.35	Horizontal
7323.00	42.25	74.00	-31.75	Horizontal
9764.00	48.84	74.00	-25.16	Horizontal
12205.00	*	74.00		Horizontal
14646.00	*	74.00		Horizontal

**Average value:**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	33.25	54.00	-20.75	Vertical
7323.00	34.64	54.00	-19.36	Vertical
9764.00	36.86	54.00	-17.14	Vertical
12205.00	*	54.00		Vertical
14646.00	*	54.00		Vertical
4882.00	38.35	54.00	-15.65	Horizontal
7323.00	36.84	54.00	-17.16	Horizontal
9764.00	37.52	54.00	-16.48	Horizontal
12205.00	*	54.00		Horizontal
14646.00	*	54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	44.35	74.00	-29.65	Vertical
7440.00	45.62	74.00	-28.38	Vertical
9920.00	48.57	74.00	-25.43	Vertical
12400.00	*	74.00		Vertical
14880.00	*	74.00		Vertical
4960.00	49.25	74.00	-24.75	Horizontal
7440.00	45.62	74.00	-28.38	Horizontal
9920.00	47.54	74.00	-26.46	Horizontal
12400.00	*	74.00		Horizontal
14880.00	*	74.00		Horizontal

**Average value:**



Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	35.58	54.00	-18.42	Vertical
7440.00	36.65	54.00	-17.35	Vertical
9920.00	37.24	54.00	-16.76	Vertical
12400.00	*	54.00		Vertical
14880.00	*	54.00		Vertical
4960.00	38.25	54.00	-15.75	Horizontal
7440.00	36.68	54.00	-17.32	Horizontal
9920.00	35.94	54.00	-18.06	Horizontal
12400.00	*	54.00		Horizontal
14880.00	*	54.00		Horizontal

**Remark:**


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 15. Test Setup Photo

Radiated Emission

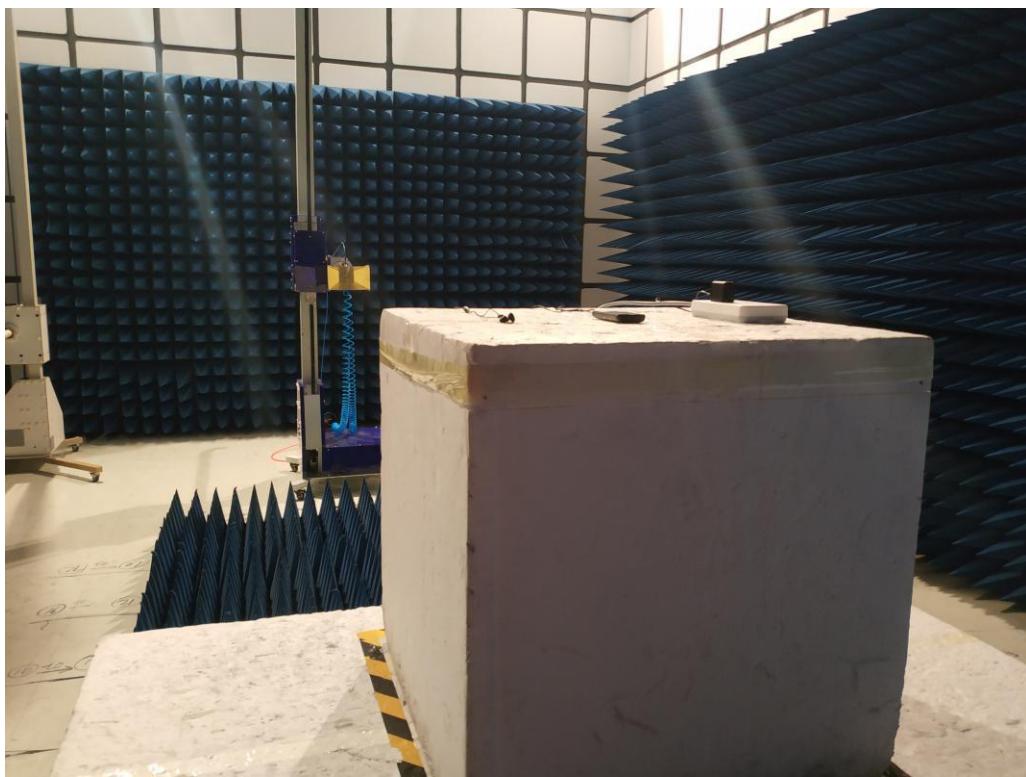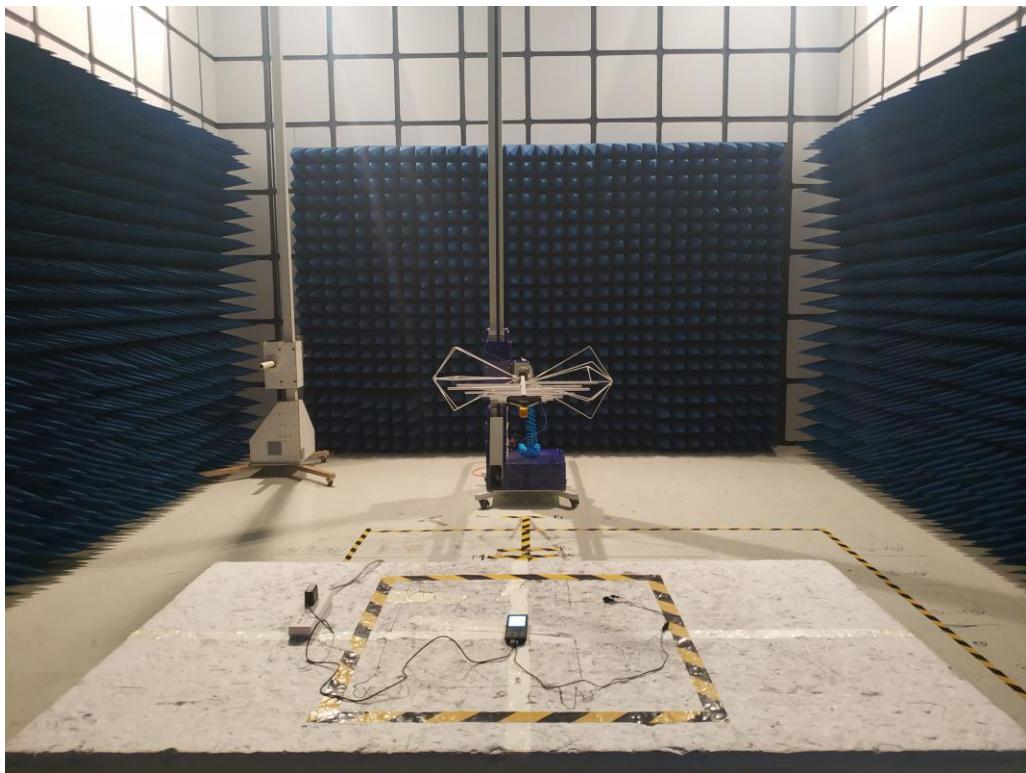

Conducted Emission

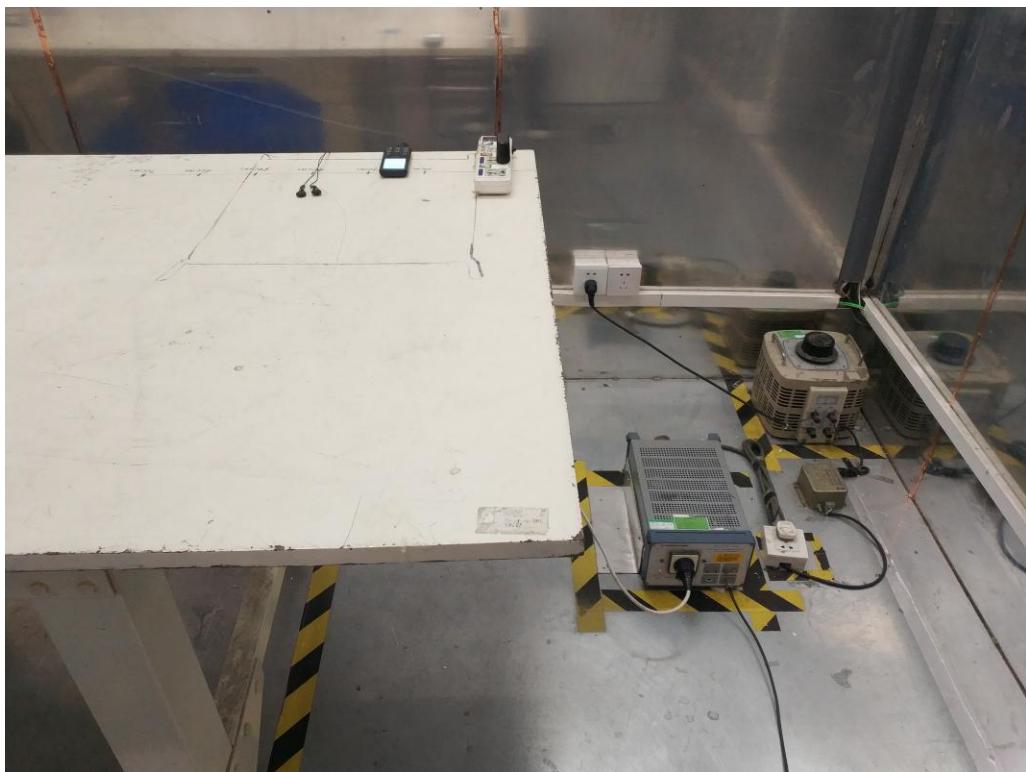

## 16. EUT Constructional Details

Please refer to report BSL008390304RF.

-----End-----