



FCC PART 73G & BETS 6

LOW POWER FM BROADCAST STATIONS (LPFM) TEST REPORT

APPLICANT	RFE BROADCAST S.R.L.
	VIA MAREVITANO N. 26 FALERNA (CZ) 88042 ITALY
FCC ID	2ARJIDS500
IC	24642-DS500
MODEL NUMBER	DS300, DS500
PRODUCT DESCRIPTION	FM BROADCAST TRANSMITTER
DATE SAMPLE RECEIVED	12/31/2018
DATE TESTED	1/14/2019
TESTED BY	Tim Royer
APPROVED BY	Franklin Rose
TEST RESULTS	☒ PASS ☐ FAIL

Report Number	Report Version	Description	Issue Date
2271UT18TestReport	Rev1	Initial Issue	01/14/2019
	Rev3	Updated Power Measurement Section	06/29/2020

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE
WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS	1
GENERAL INFORMATION	2
RESULTS SUMMARY	3
RF POWER OUTPUT	4
TEST DATA: RF OUTPUT POWER	ERROR! BOOKMARK NOT DEFINED.
FCC PART 2.1033(C)(8).....	ERROR! BOOKMARK NOT DEFINED.
TEST DATA: POWER IN THE FINAL STAGE	ERROR! BOOKMARK NOT DEFINED.
MODULATION CHARACTERISTICS	5
AUDIO FREQUENCY RESPONSE.....	7
TEST DATA: AUDIO FREQUENCY RESPONSE PLOT.....	7
AUDIO INPUT VS MODULATION	8
TEST DATA: MODULATION LIMITING	9
OCCUPIED BANDWIDTH & EMISSION MASK.....	10
TEST DATA: OCCUPIED BANDWIDTH TABLE	11
20dB OCCUPIED BANDWIDTH PLOT LOW END OF BAND	11
20dB OCCUPIED BANDWIDTH PLOT MIDDLE OF BAND	12
20dB OCCUPIED BANDWIDTH PLOT HIGH END OF BAND	13
EMISSION MASK PLOT LOW END OF BAND	14
EMISSION MASK PLOT MIDDLE OF BAND	15
EMISSION MASK PLOT HIGH END OF BAND	16
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)	17
TEST DATA: LOW FREQUENCY	18
TEST DATA: MIDDLE FREQUENCY	18
TEST DATA: HIGH FREQUENCY	19
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	20
TEST DATA: LOW FREQUENCY	22
TEST DATA: MIDDLE FREQUENCY	22
TEST DATA: HIGH FREQUENCY	22
FREQUENCY STABILITY	23
TEST DATA: FCC FREQUENCY STABILITY TABLE	24
TEST DATA: FCC FREQUENCY STABILITY PLOT	24
TEST DATA: IC FREQUENCY STABILITY TABLE	25
TEST DATA: IC FREQUENCY STABILITY PLOT.....	25
STATE OF THE MEASUREMENT UNCERTAINTY	26
EQUIPMENT LIST.....	27

GENERAL REMARKS

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Tested by:



Name and Title	Tim Royer, Project Manager / EMC Testing Engineer
Date	02/11/2019

Reviewed and Approved by:



Name and Title	Franklin Rose, Project Manager / EMC Testing Technician
Date	02/12/2019

APPLICANT: RFE BROADCAST S.R.L.
FCC ID: 2ARJIDS500
IC: 24642-DS500
REPORT: 2271UT18TestReport_Rev2

GENERAL INFORMATION

EUT Description	FM BROADCAST TRANSMITTER
FCC ID	2ARJIDS500
IC	24642-DS500
Model Number	DS300, DS500
Operating Frequency	87.5 – 108 MHz
Test Frequencies	88, 98, 108 MHz
EUT Power Source	☒ 110–120Vac/50– 60Hz
	☐ DC Power
	☐ Battery Operated Exclusively
Test Item	☐ Prototype
	☒ Pre-Production
	☐ Production
Type of Equipment	☒ Fixed
	☐ Mobile
	☐ Portable
Antenna Connector	N
Test Conditions	The temperature was 26°C Relative humidity of 50%.
Modification to the EUT	No Modification to EUT.
Test Exercise	The EUT was placed in continuous transmit and was operated in "Test Mode" for digital emissions tests.
Applicable Standards	ANSI C63.26-2015, FCC CFR 47 Part 73, BETS-6 Issue 2, Referencing ANSI/TIA 603-D:2010
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070, ISED: 2056A

RESULTS SUMMARY

Test Description	FCC RULE PART NO.	RESULT
RF Power Output	2.1046(a), 73.267(b), 73.811(a), 73.812(a), 73.840, BETS-6 6.1.3	Pass
Power Into the Amplifier	2.1033(C)(8)	For Reporting Only
Modulation Characteristics	2.202(g)(III)(3), BETS-6 4.2	Pass
Audio Frequency Response	2.1047(a)	Pass
Audio Input Vs. Modulation	2.1047(b), BETS-6 4.2	Pass
Occupied Bandwidth	2.1049(e)(3) – (5), 73.317(b), (c), BETS-6 6.3.3	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 & 73.317(d), BETS-6 6.3.3	Pass
Field Strength of Spurious Radiation	Part 2.1053(a) & 73.317(d), BETS-6 6.3.3	Pass
Frequency Stability	Part 2.1055(a)(3), Part 73.1545(b), BETS-6 6.2.2	Pass

RF POWER OUTPUT

Rule Part No.: Part 2.1046(a), Part 73.267(c), 73.811(a), 73.812(a), BETS-6 6.1.3

Test Requirements: Part 73.267(c), 73.811(a), 73.812(a)

(c) *Indirect method.* The operating power is determined by the indirect method by applying an appropriate factor to the input power to the last radio-frequency power amplifier stage of the transmitter, using the following formula:

$$\text{Transmitter output power} = E_p \times I_p \times F$$

Where:

E_p = DC input voltage of final radio stage.

I_p = Total DC input current of final radio stage.

F = Efficiency factor.

§73.811 LPFM power and antenna height requirements.

(a) *Maximum facilities.* LPFM stations will be authorized to operate with maximum facilities of 100 watts ERP at 30 meters HAAT. An LPFM station with a HAAT that exceeds 30 meters will not be permitted to operate with an ERP greater than that which would result in a 60 dBu contour of 5.6 kilometers. In no event will an ERP less than one watt be authorized. No facility will be authorized in excess of one watt ERP at 450 meters HAAT.

§73.812 Rounding of power and antenna heights.

(a) Effective radiated power (ERP) will be rounded to the nearest watt on LPFM authorizations.


Test Requirements: BETS-6 6.1.3

6.1.3 Standard

The standard rating of power output for the transmitting equipment shall be as specified by the individual manufacturer. The transmitting equipment shall be capable of being adjusted to deliver the rated power output when the AC input voltage varies by 5% from the rated value.

Method of Measurement: ANSI C63.26

Test Setup Diagram:

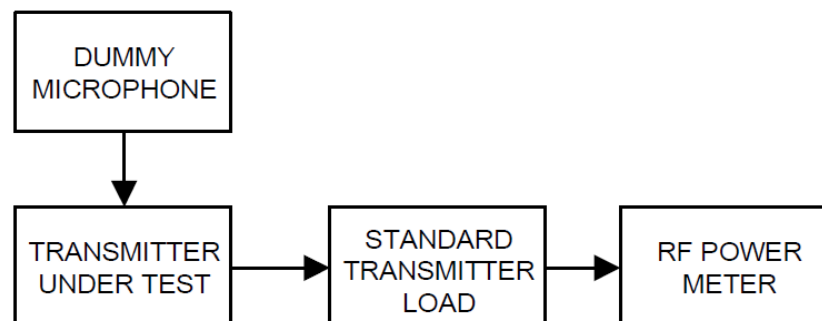

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2

RF POWER OUTPUT

Test Data: RF Output Power, Model DS300

Frequency (MHz)	Stable over Input Voltage Variation (+/- %)	Output Power (W)	Min Power 90% (W)	Max Power 105% (W)
88.0	5%	300	270	315
98.0	5%	300	270	315
108.0	5%	300	270	315

Efficiency Factor: $300 / (450) = 66.67\%$

Test Data: RF Output Power, Model DS500

Frequency (MHz)	Stable over Input Voltage Variation (+/- %)	Output Power (W)	Min Power 90% (W)	Max Power 105% (W)
88.0	5%	500	450	525
98.0	5%	500	450	525
108.0	5%	500	450	525

Efficiency Factor: $500 / (750) = 66.67\%$

FCC Part 2.1033(C)(8)

(8) The dc voltages applied to and dc currents into the several elements of the final radio frequency amplifying device for normal operation over the power range.

Power In the Final Stage

AC Apparent Power Consumption: 100VA @ 50W, 200VA @ 100W, 450VA @ 300W, 750VA @ 500W, 1400VA @ 1000W.

DS300 Power at Final Stage: (250.0 VDC) (1.8 A) = **450 Watts**

DS500 Power at Final Stage: (250.0 VDC) (3 A) = **750 Watts**

MODULATION CHARACTERISTICS

Rule Part No.: Part 2.202(g)(III)(3) "Sound Broadcasting", BETS-6 4.2

Test Requirements: Part 2.202(g)(III)(3)

Description of emission	Necessary bandwidth		Designation of emission
	Formula	Sample calculation	
III-A. FREQUENCY MODULATION			
3. Sound Broadcasting			
Sound broadcasting	$B_n = 2M + 2DK$, K = 1 (typically)	Monaural, D = 75,000 Hz, M = 15,000, Bandwidth: 18,000 Hz = 180 kHz	180KF3E

Test Requirements: BETS-6 4.2

4.2 Type of Emission

The designation of modulation and emission refers to the manner in which the carrier is modulated and transmitted. The transmitting equipment shall produce F3EGN emission for monophonic operation and F8EHF emission for stereophonic operation. The transmitting equipment shall be capable of operating with a frequency deviation of ± 75 kHz, which is equivalent to 100% modulation.

Type of Emission: **180KF3E**

$$B_n = 2M + 2DK$$

$$B_n = 2(15K) + 2(75K) (1) = 180K$$

Where:

M = 10 (Modulation Frequency, kHz)

D = 75 (Peak Deviation, kHz)

K = 1 (constant value)

AUDIO FREQUENCY RESPONSE

Rule Part No.: FCC Part 2.1047(a), (b)

Test Requirements: FCC Part 2.1047(a)

§2.1047 Measurements required: Modulation characteristics.

(a) *Voice modulated communication equipment.* A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Method of Measurement: ANSI C63.26 s. 5.3.3

Test Setup Diagram:


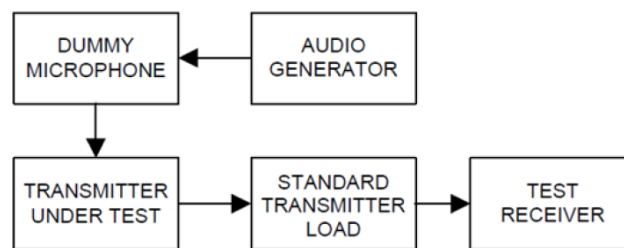


Figure 3—Equipment set-up audio frequency response (constant input)

Test Data: Audio Frequency Response Plot

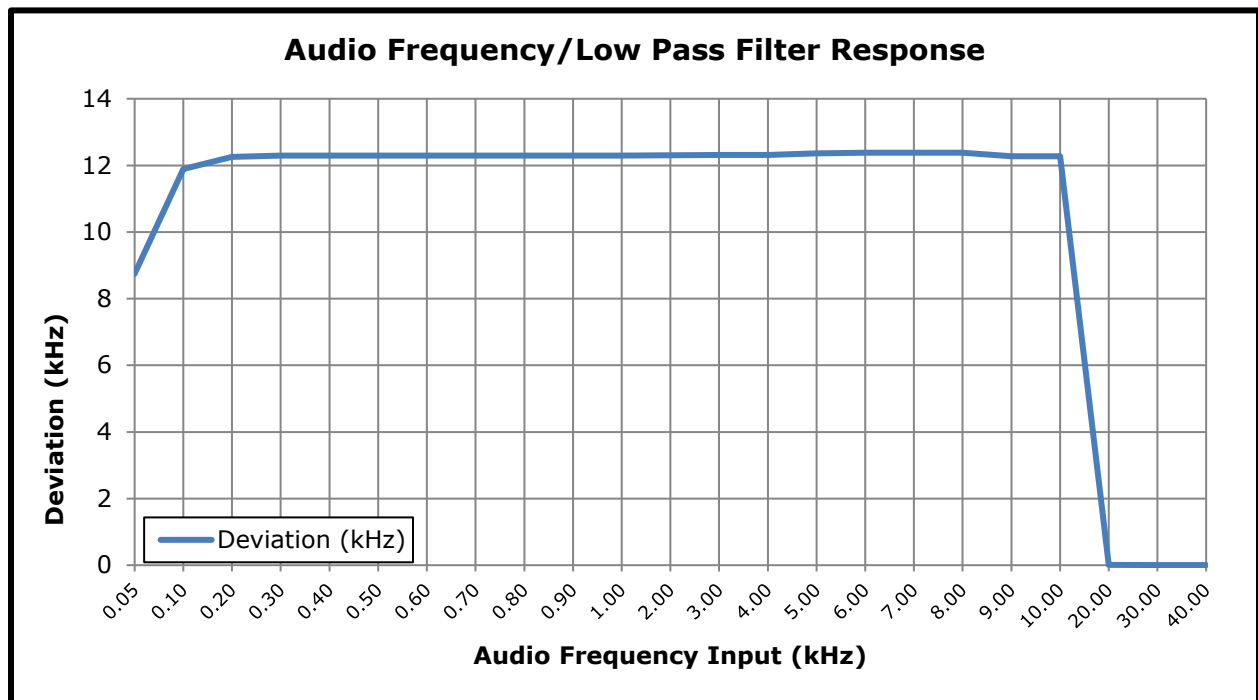

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2

AUDIO INPUT VS MODULATION

Rule Part No.: FCC Part 2.1047(b), BETS-6 4.2

Test Requirements: FCC Part 2.1047(b)

(b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Test Requirements: BETS-6 4.2

4.2 Type of Emission

The designation of modulation and emission refers to the manner in which the carrier is modulated and transmitted. The transmitting equipment shall produce F3EGN emission for monophonic operation and F8EHF emission for stereophonic operation. The transmitting equipment shall be capable of operating with a frequency deviation of ± 75 kHz, which is equivalent to 100% modulation.

Method of Measurement: ANSI C63.26 s. 5.3.2


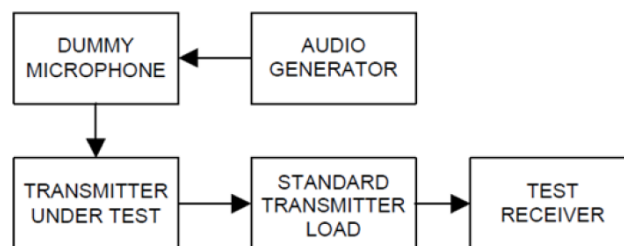


Figure 3—Equipment set-up audio frequency response (constant input)

AUDIO INPUT VERSUS MODULATION

Test data: Modulation Limiting

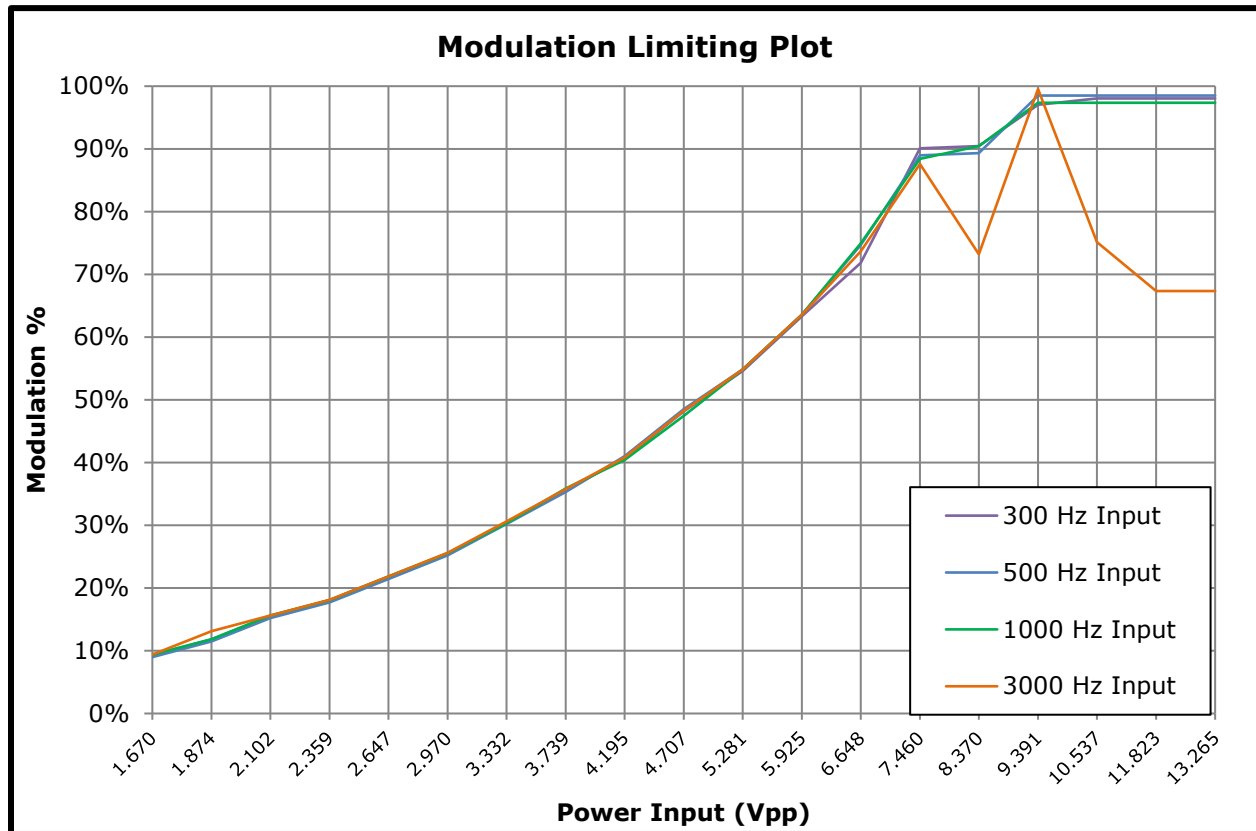

OCCUPIED BANDWIDTH & EMISSION MASK

Rule Part No.: FCC Part 2.1049(e)(3) – (5), Part 73.317(b), (c), BETS-6 6.3.3

Requirement: FCC 2.1049(e)(3)-(5)

§2.1049 Measurements required: Occupied bandwidth.

(e) Transmitters for use in the Radio Broadcast Services:

(3) FM broadcast transmitter not used for multiplex operation—when modulated 85 percent by a 15 kHz input signal.

(4) FM broadcast transmitters for multiplex operation under Subsidiary Communication Authorization (SCA)—when carrier is modulated 70 percent by a 15 kHz main channel input signal, and modulated an additional 15 percent simultaneously by a 67 kHz subcarrier (unmodulated).

(5) FM broadcast transmitter for stereophonic operation—when modulated by a 15 kHz input signal to the main channel, a 15 kHz input signal to the stereophonic subchannel, and the pilot subcarrier simultaneously. The input signals to the main channel and stereophonic subchannel each shall produce 38 percent modulation of the carrier. The pilot subcarrier should produce 9 percent modulation of the carrier.

Requirement: FCC 73.317(b), (c)

(b) Any emission appearing on a frequency removed from the carrier by between 120 kHz and 240 kHz inclusive must be attenuated at least 25 dB below the level of the unmodulated carrier. Compliance with this requirement will be deemed to show the occupied bandwidth to be 240 kHz or less.

(c) Any emission appearing on a frequency removed from the carrier by more than 240 kHz and up to and including 600 kHz must be attenuated at least 35 dB below the level of the unmodulated carrier.


Requirement: BETS-6 6.3.3

6.3.3 Standard

Spurious emissions of the transmitting equipment shall not exceed the values given below:

Spurious Emission	Maximum Value
Between 120 kHz and 240 kHz from the carrier frequency	-25 dB $\pm$
More than 240 kHz and up to and including 600 kHz from the carrier frequency	-35 dB*
More than 600 kHz from the carrier frequency, whichever is the stronger	$-(43 + 10 \log P)$ $\pm$ or -80 dB* P = power in watts

Test Setup Diagram:




APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2

Test Data: Occupied Bandwidth Table

Frequency (MHz)	20dB OBW (kHz)
88	117.73
98	115.73
108	109.71


20dB OCCUPIED BANDWIDTH PLOT Low End of band

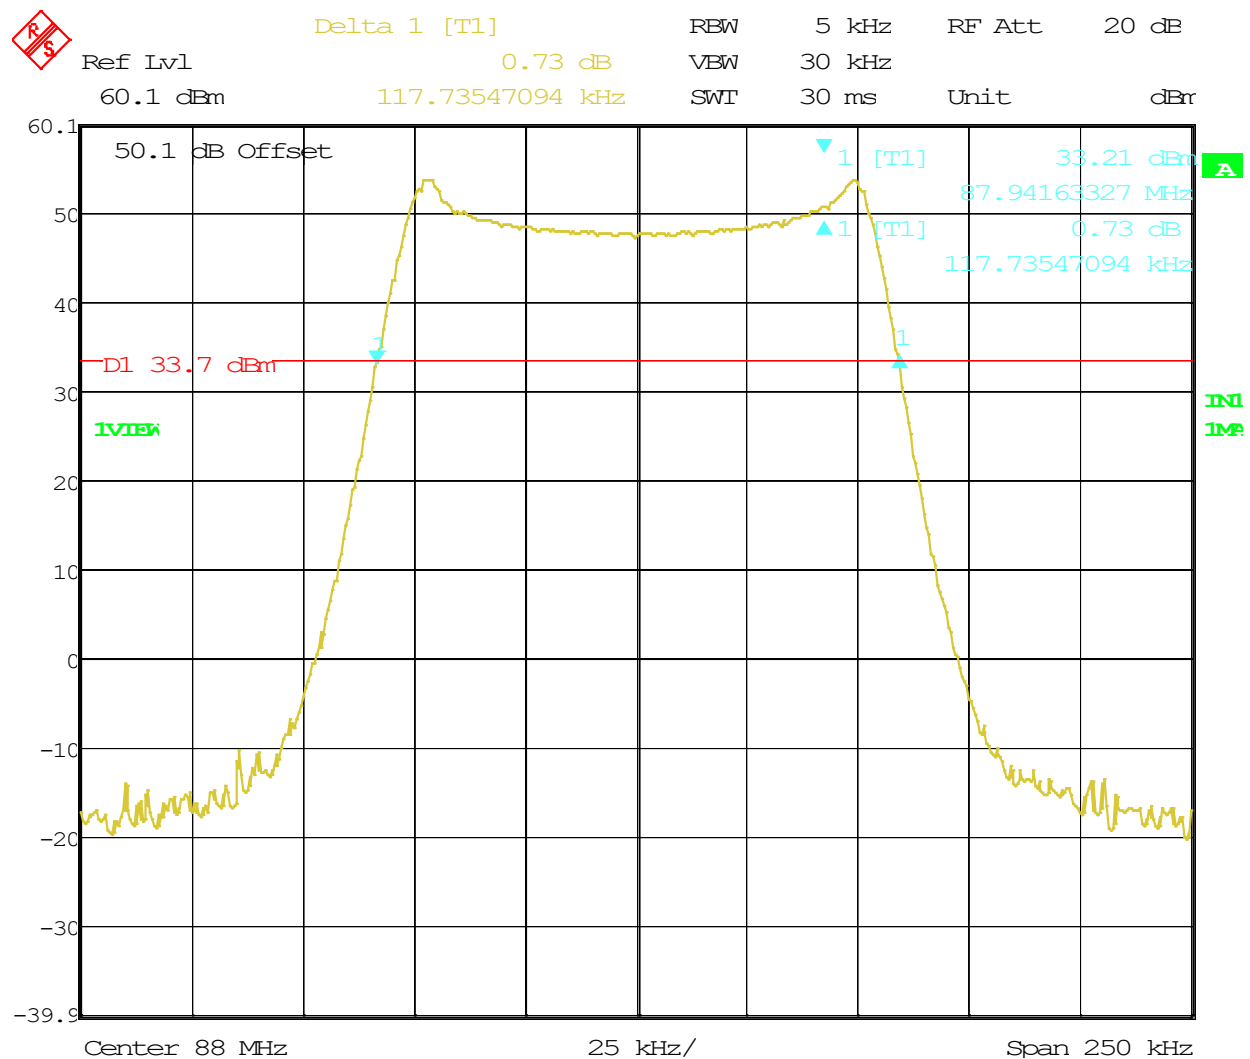

Date: 1.JAN.1997 02:52:18

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2


20dB OCCUPIED BANDWIDTH PLOT Middle of band

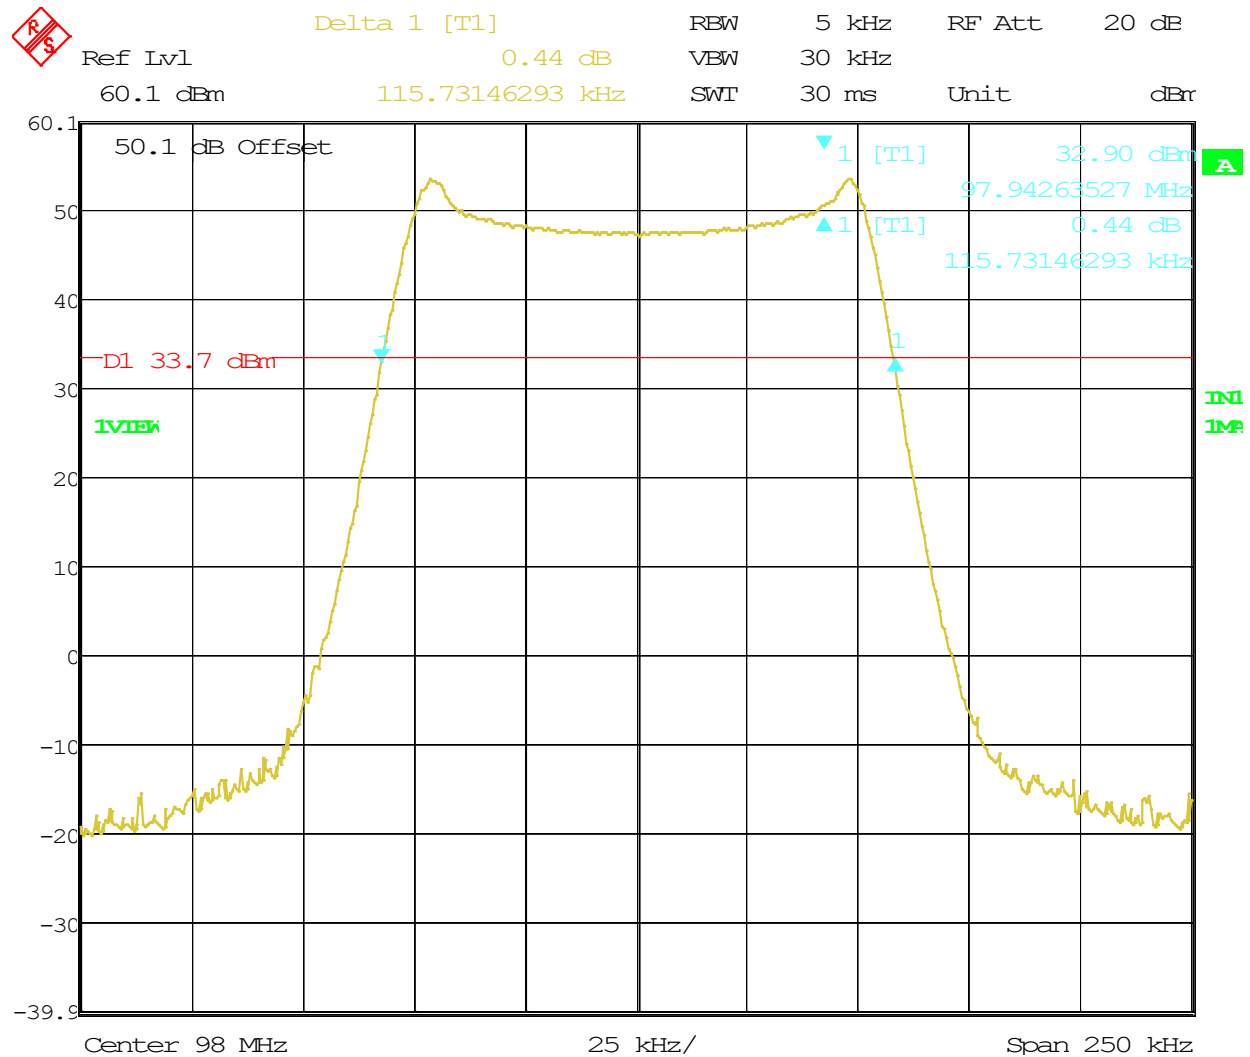

Date: 1.JAN.1997 02:53:42

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2


20dB OCCUPIED BANDWIDTH PLOT High End of band

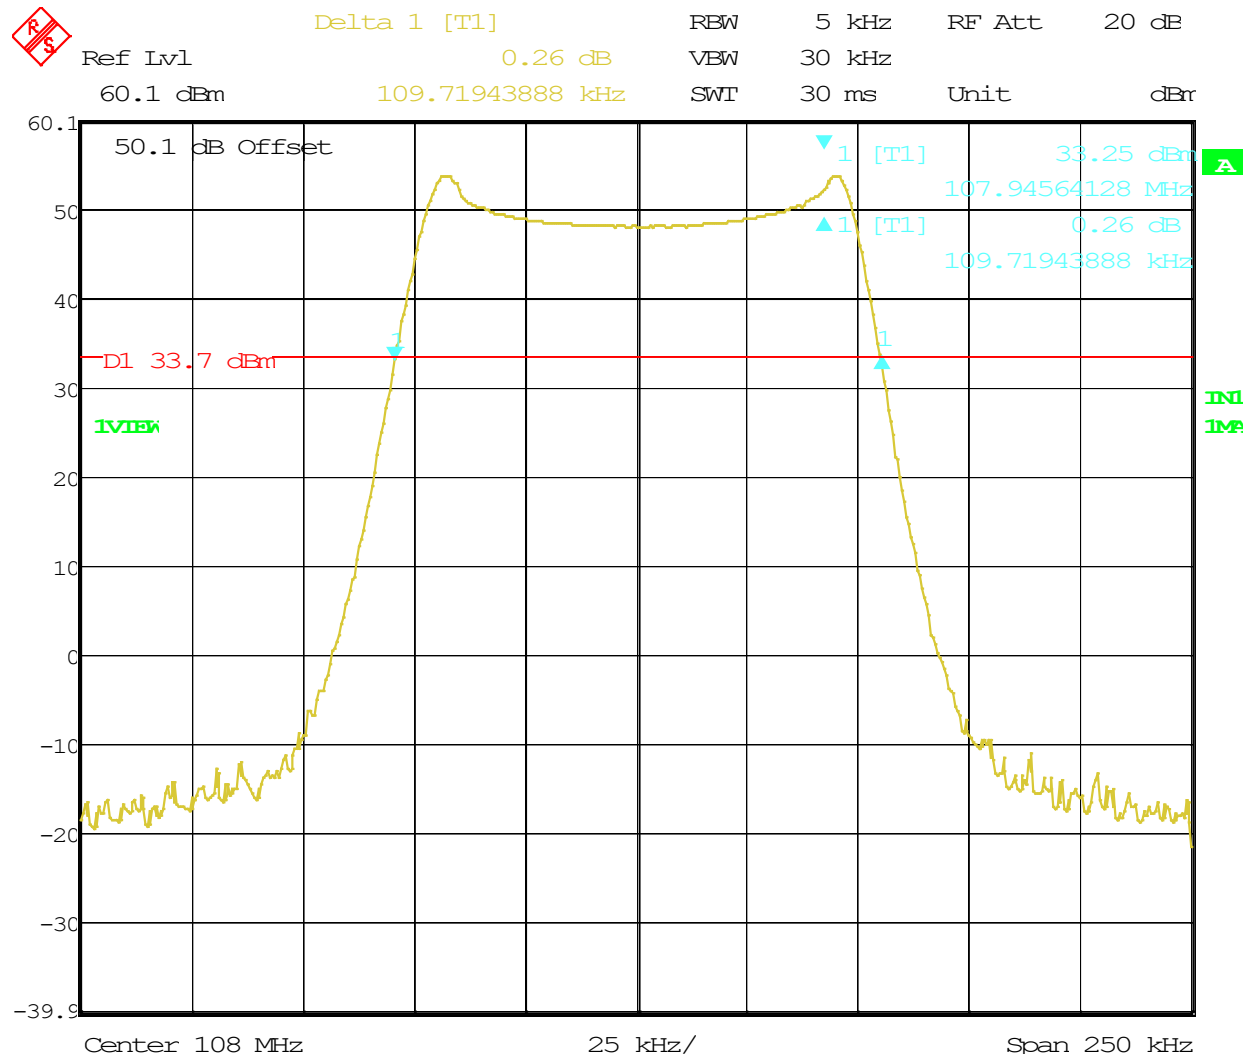

Date: 1.JAN.1997 02:35:06

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2


EMISSION MASK PLOT Low End of band

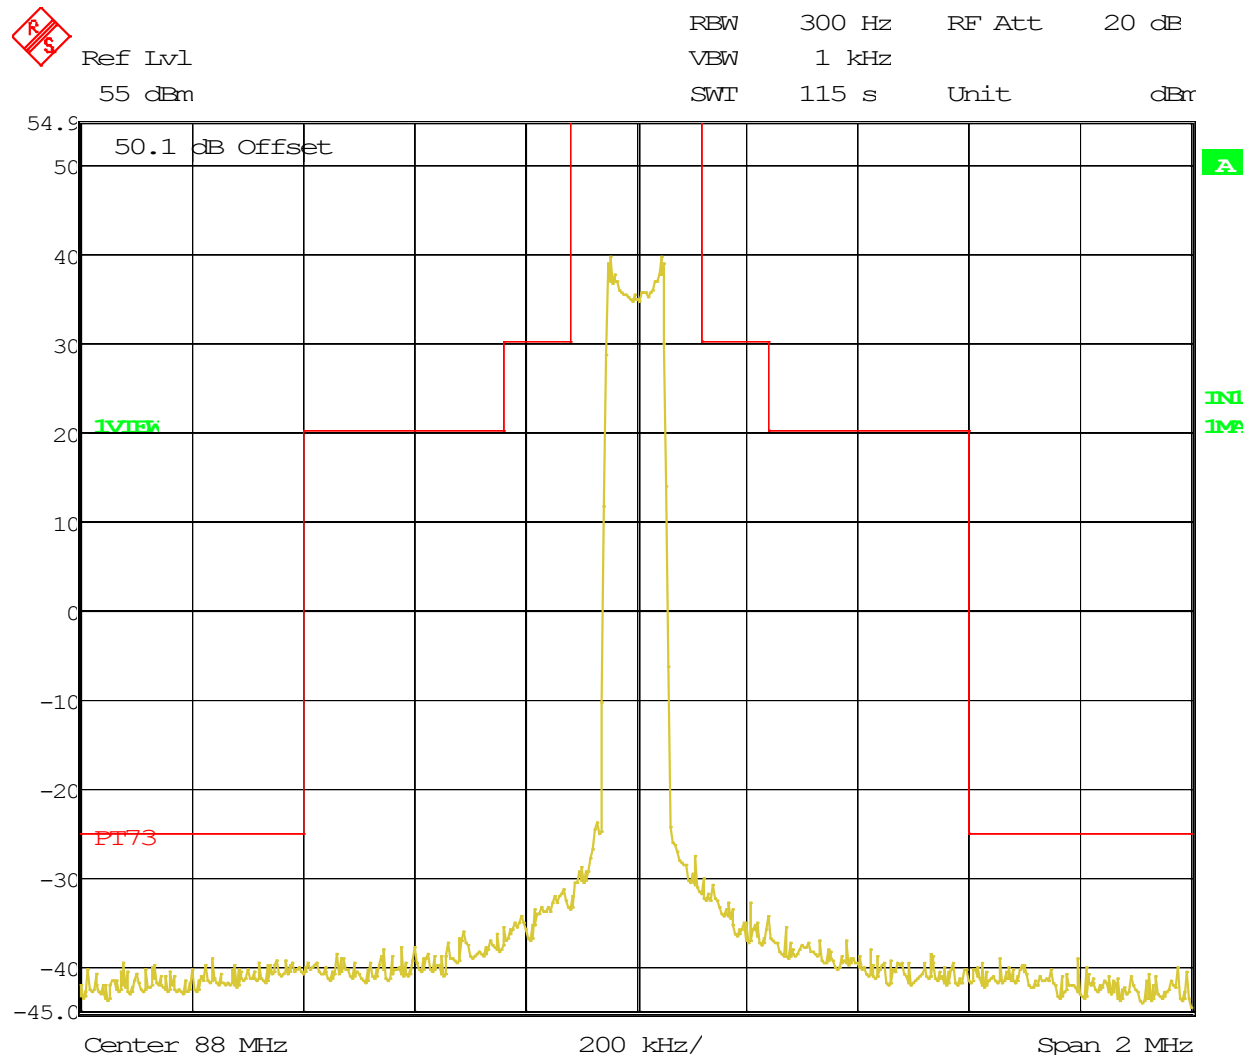

Date: 1.JAN.1997 02:16:20

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2


EMISSION MASK PLOT Middle of band

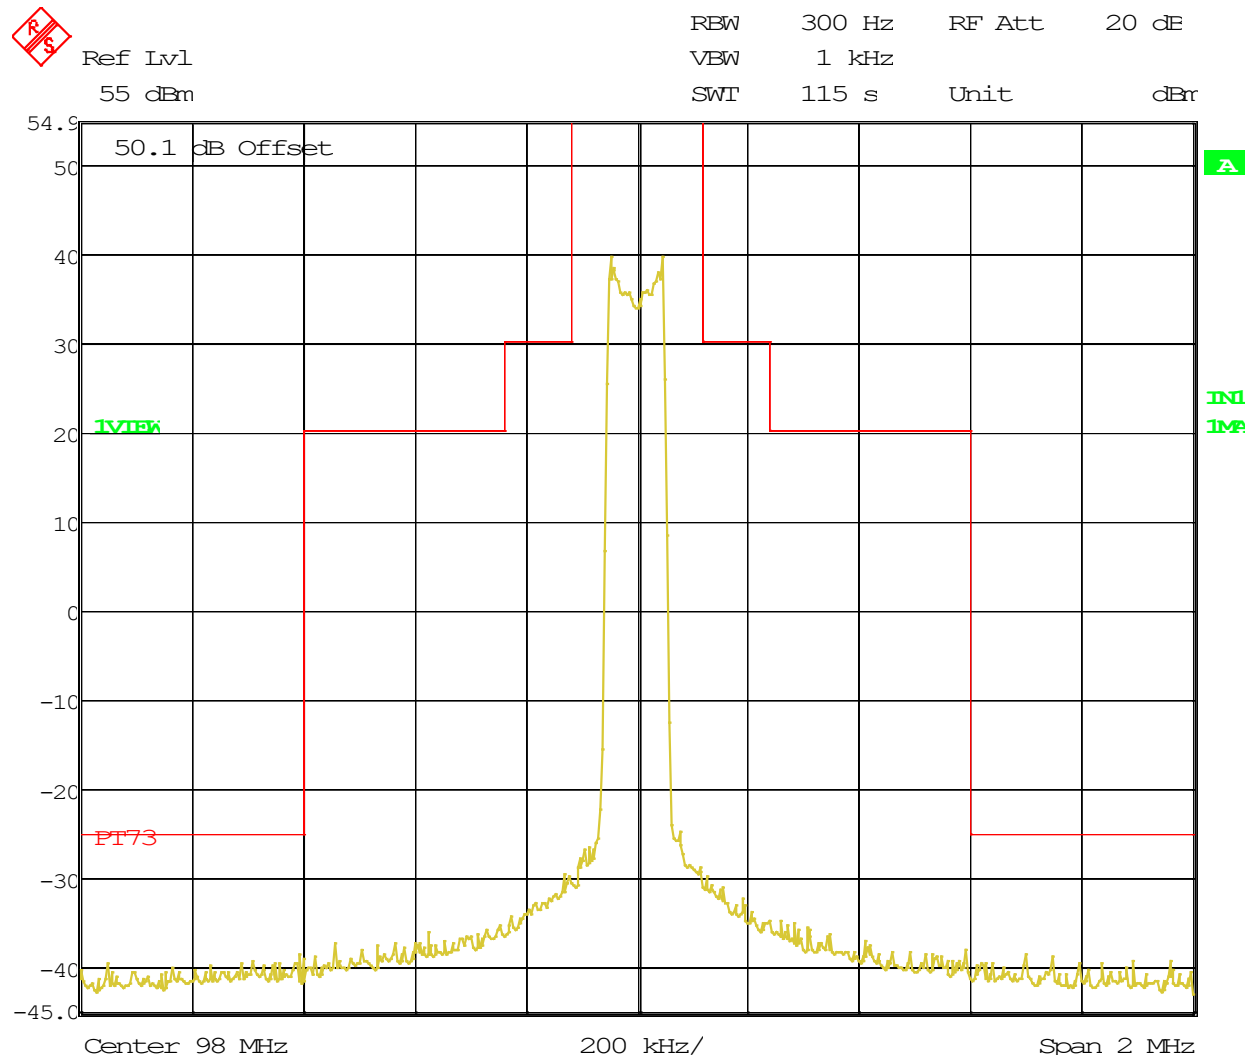

Date: 1.JAN.1997 02:24:34

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2

EMISSION MASK PLOT High End of band

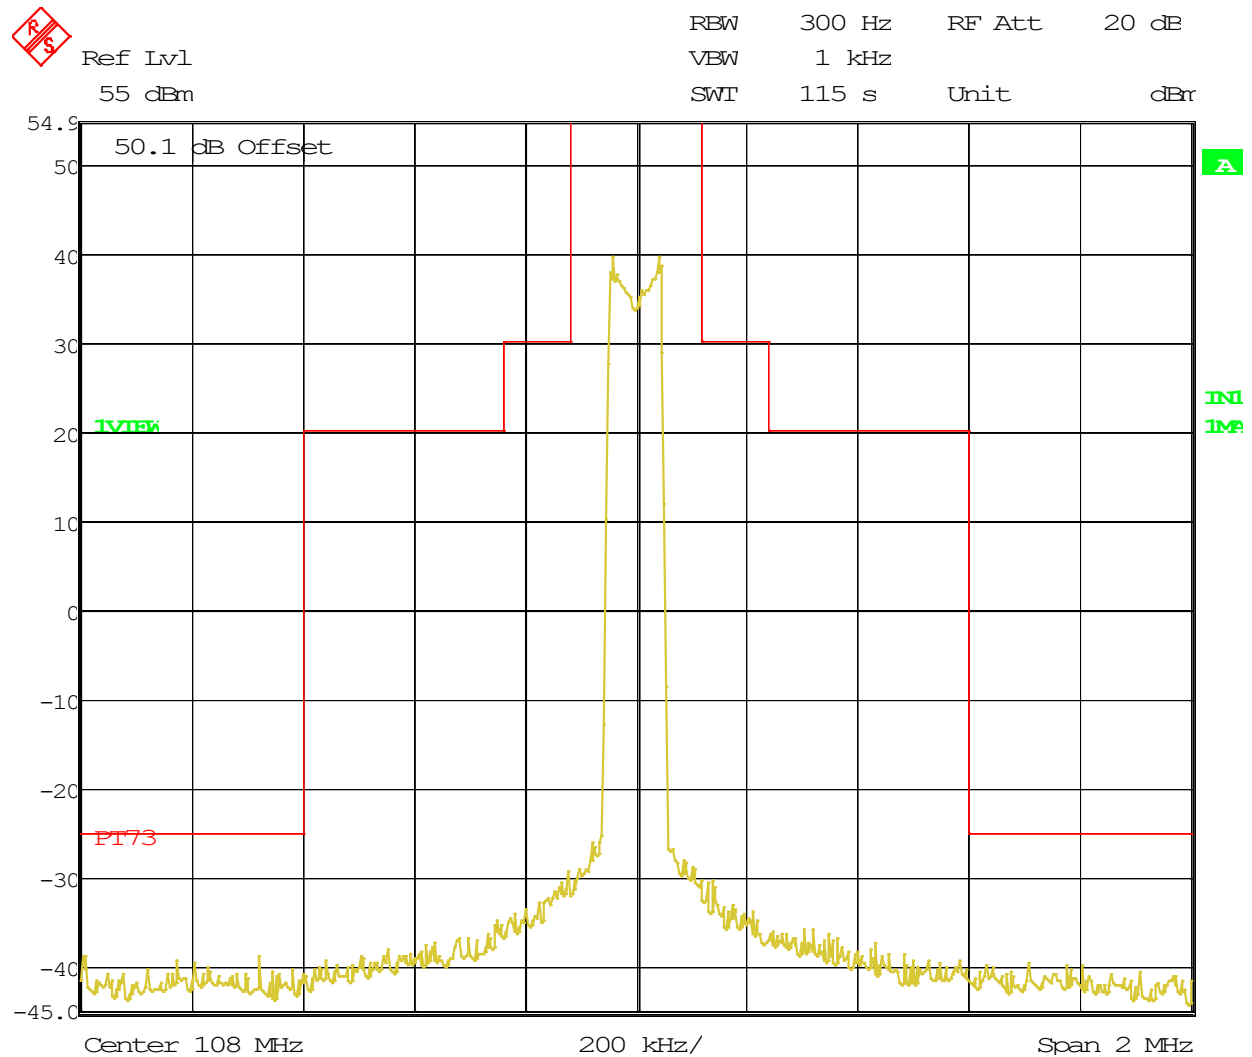

Date: 1.JAN.1997 02:27:18

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part No.: Part 2.1051 & 73.317(d), BETS-6 6.3.3

Test Requirements: 73.317 (d)

(d) Any emission appearing on a frequency removed from the carrier by more than 600 kHz must be attenuated at least $43 + 10 \log_{10}(\text{Power, in watts})$ dB below the level of the unmodulated carrier, or 80 dB, whichever is the lesser attenuation.

Test Requirements: BETS-6 6.3.3


More than 600 kHz from the carrier frequency, whichever is the stronger

$-(43 + 10 \log P)$ 
or -80 dB*
P = power in watts

$$43 + 10 \cdot \log(620) = 59.56 \text{ dB} < 80 \text{ dB}$$

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Method of Measuring Conducted Spurious Emissions



SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Test Data: Low Frequency

Spurious Conducted Emissions		(dBm)	(Watts)	Limit (dBc)
		54.96	313.33	67.96
		Frequency	Peak (dBm)	Margin (dB)
(fundamental)		88.000	0.00	0.00
2nd Harmonic		176.000	-26.52	13.52
3rd Harmonic		264.000	-26.37	13.37
4th Harmonic	*	352.000	-42.26	29.26
5th Harmonic		440.000	-36.74	23.74
6th Harmonic		528.000	-29.33	16.33
7th Harmonic		616.000	-35.84	22.84
8th Harmonic	*	704.000	-40.59	27.59
9th Harmonic	*	792.000	-37.10	24.10
10th Harmonic	*	880.000	-40.59	27.59

* Indicates Noise Floor of Measurement

Test Data: Middle Frequency

Spurious Conducted Emissions		(dBm)	(Watts)	Limit (dBc)
		54.79	301.30	67.79
		Frequency	Peak (dBm)	Margin (dB)
(fundamental)		98.000	0.00	0.00
2nd Harmonic		196.000	-27.82	14.82
3rd Harmonic		294.000	-27.67	14.67
4th Harmonic	*	392.000	-43.56	30.56
5th Harmonic		490.000	-38.04	25.04
6th Harmonic	*	588.000	-30.63	17.63
7th Harmonic		686.000	-37.14	24.14
8th Harmonic	*	784.000	-41.89	28.89
9th Harmonic		882.000	-38.40	25.40
10th Harmonic	*	980.000	-41.89	28.89

* Indicates Noise Floor of Measurement

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Test Data: High Frequency

Spurious Conducted Emissions		(dBm)	(Watts)	Limit (dBc)
		54.77	299.92	67.77
Frequency		Peak (dBm)	Margin (dB)	
(fundamental)		108.000	0.00	0.00
2nd Harmonic		216.000	-47.79	34.79
3rd Harmonic		324.000	-29.94	16.94
4th Harmonic		432.000	-47.30	34.30
5th Harmonic		540.000	-43.73	30.73
6th Harmonic		648.000	-47.05	34.05
7th Harmonic		756.000	-45.49	32.49
8th Harmonic		864.000	-47.72	34.72
9th Harmonic	*	972.000	-49.74	36.74
10th Harmonic	*	1080.000	-49.74	36.74

* Indicates Noise Floor of Measurement

FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts. No.: Part 2.1053(a) & 73.317 (d), BETS-6 6.3.3

Test Requirements: 73.317 (d)

(d) Any emission appearing on a frequency removed from the carrier by more than 600 kHz must be attenuated at least $43 + 10 \log_{10}(\text{Power, in watts})$ dB below the level of the unmodulated carrier, or 80 dB, whichever is the lesser attenuation.


Test Requirements: BETS-6 6.3.3

More than 600 kHz from the carrier frequency, whichever is the stronger


$-(43 + 10 \log P)$ 
or -80 dB*
P = power in watts

$$43 + 10 \cdot \log(620) = 59.56 \text{ dB} < 80 \text{ dB}$$

Test Site Setup:

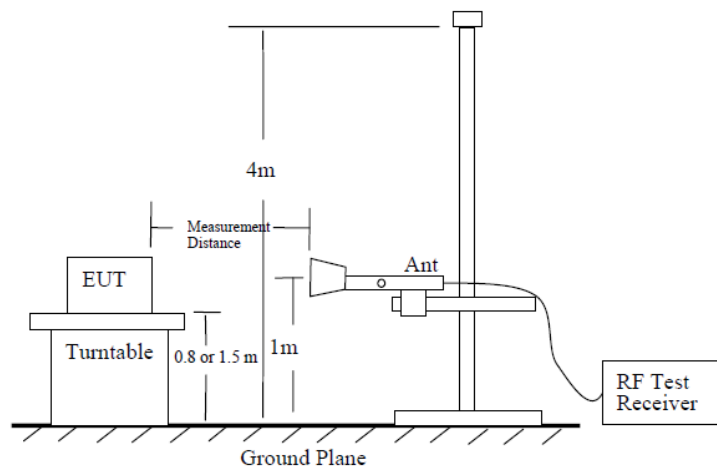

EUT Orientation(s):

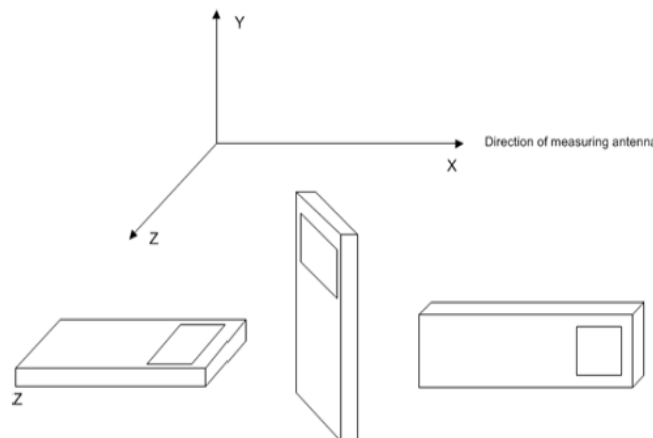

APPLICANT: RFE BROADCAST S.R.L.
FCC ID: 2ARJIDS500
IC: 24642-DS500
REPORT: 2271UT18TestReport_Rev2

FIELD STRENGTH OF SPURIOUS EMISSIONS

Note: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from the lowest frequency generated internally to at least the tenth harmonic of the fundamental. This test was conducted in accordance with the standard listed above using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669. The measurements below represent the worst case of all the frequencies tested.

Note: Six (6) or more of the highest emissions of each worst-case operational mode of the EUT are represented below. Emissions 20 dB below the limit were not required to be reported.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: Low Frequency

Power Output		Limit								
dBm	Watts	dBc	dBm							
57	501.19	70	-13.00							

Tuned Frequency (MHz)	Emission Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Limit (dBm)	Margin (dB)
88.0000	264.0000	31.2000	V	2.0340	12.8000	3.000	46.034	-51.343	-13.000	38.34
88.0000	264.0000	33.2200	H	2.0340	12.8000	3.000	48.054	-49.323	-13.000	36.32
88.0000	352.0000	20.7700	V	2.1200	14.8000	3.000	37.690	-59.687	-13.000	46.69
88.0000	352.0000	24.3700	H	2.1200	14.8000	3.000	41.290	-56.087	-13.000	43.09
88.0000	440.0000	24.2900	V	2.4000	16.2000	3.000	42.890	-54.487	-13.000	41.49
88.0000	440.0000	23.8400	H	2.4000	16.2000	3.000	42.440	-54.937	-13.000	41.94
88.0000	528.0000	36.8600	V	2.7620	17.2000	3.000	56.822	-40.555	-13.000	27.56
88.0000	528.0000	32.6700	H	2.7620	17.2000	3.000	52.632	-44.745	-13.000	31.75
88.0000	616.0000	38.9900	V	2.8960	18.8000	3.000	60.686	-36.691	-13.000	23.69
88.0000	616.0000	35.6700	H	2.8960	18.8000	3.000	57.366	-40.011	-13.000	27.01
88.0000	704.0000	20.5000	V	3.1120	21.3000	3.000	44.912	-52.465	-13.000	39.47
88.0000	704.0000	14.9000	H	3.1120	21.3000	3.000	39.312	-58.065	-13.000	45.07
88.0000	792.0000	22.1000	V	3.3160	21.3000	3.000	46.716	-50.661	-13.000	37.66
88.0000	792.0000	20.0300	H	3.3160	21.3000	3.000	44.646	-52.731	-13.000	39.73
88.0000	880.0000	16.8900	V	3.5400	21.7000	3.000	42.130	-55.247	-13.000	42.25
88.0000	880.0000	16.8900	H	3.5400	21.7000	3.000	42.130	-55.247	-13.000	42.25

Test Data: Middle Frequency

Tuned Frequency (MHz)	Emission Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Limit (dBm)	Margin (dB)
98.0000	294.0000	23.7800	H	2.0800	13.7000	3.000	39.560	-57.817	-13.000	44.82
98.0000	294.0000	26.3400	V	2.0800	13.7000	3.000	42.120	-55.257	-13.000	42.26
98.0000	392.0000	19.7100	H	2.2660	15.1000	3.000	37.076	-60.301	-13.000	47.30
98.0000	392.0000	18.4200	V	2.2660	15.1000	3.000	35.786	-61.591	-13.000	48.59
98.0000	490.0000	14.0800	H	2.6200	17.8000	3.000	34.500	-62.877	-13.000	49.88
98.0000	490.0000	34.5100	V	2.6200	17.8000	3.000	54.930	-42.447	-13.000	29.45
98.0000	588.0000	41.2600	H	2.8680	18.9000	3.000	63.028	-34.349	-13.000	21.35
98.0000	588.0000	46.3000	V	2.8680	18.9000	3.000	68.068	-29.309	-13.000	16.31
98.0000	686.0000	22.1400	H	3.0620	20.8000	3.000	46.002	-51.375	-13.000	38.38
98.0000	686.0000	27.1200	V	3.0620	20.8000	3.000	50.982	-46.395	-13.000	33.40
98.0000	784.0000	20.0100	H	3.3040	21.6000	3.000	44.914	-52.463	-13.000	39.46
98.0000	784.0000	21.3800	V	3.3040	21.6000	3.000	46.284	-51.093	-13.000	38.09
98.0000	882.0000	14.2200	H	3.5440	21.5000	3.000	39.264	-58.113	-13.000	45.11
98.0000	882.0000	17.3800	V	3.5440	21.5000	3.000	42.424	-54.953	-13.000	41.95
98.0000	980.0000	14.2200	H	3.6900	23.6000	3.000	41.510	-55.867	-13.000	42.87
98.0000	980.0000	20.6300	V	3.6900	23.6000	3.000	47.920	-49.457	-13.000	36.46

Test Data: High Frequency

Tuned Frequency (MHz)	Emission Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Limit (dBm)	Margin (dB)
108.0000	216.0000	42.0600	H	1.6720	10.7000	3.000	54.432	-42.945	-13.000	29.95
108.0000	216.0000	39.8600	V	1.6720	10.7000	3.000	52.232	-45.145	-13.000	32.15
108.0000	324.0000	23.4300	H	2.0900	13.8000	3.000	39.320	-58.057	-13.000	45.06
108.0000	324.0000	20.1600	V	2.0900	13.8000	3.000	36.050	-61.327	-13.000	48.33
108.0000	432.0000	17.5500	H	2.3840	16.9000	3.000	36.834	-60.543	-13.000	47.54
108.0000	432.0000	23.0700	V	2.3840	16.9000	3.000	42.354	-55.023	-13.000	42.02
108.0000	540.0000	35.8300	H	2.7800	17.3000	3.000	55.910	-41.467	-13.000	28.47
108.0000	540.0000	36.1800	V	2.7800	17.3000	3.000	56.260	-41.117	-13.000	28.12
108.0000	648.0000	30.1300	H	2.9600	20.2000	3.000	53.290	-44.087	-13.000	31.09
108.0000	648.0000	32.4800	V	2.9600	20.2000	3.000	55.640	-41.737	-13.000	28.74
108.0000	756.0000	25.7100	H	3.2260	20.9000	3.000	49.836	-47.541	-13.000	34.54
108.0000	756.0000	23.6500	V	3.2260	20.9000	3.000	47.776	-49.601	-13.000	36.60
108.0000	864.0000	15.6700	H	3.5020	22.7000	3.000	41.872	-55.505	-13.000	42.51
108.0000	864.0000	18.5100	V	3.5020	22.7000	3.000	44.712	-52.665	-13.000	39.67
108.0000	972.0000	18.2300	H	3.6580	23.6000	3.000	45.488	-51.889	-13.000	38.89
108.0000	972.0000	17.7500	V	3.6580	23.6000	3.000	45.008	-52.369	-13.000	39.37

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055(a)(3), Part 73.1545(b), BETS-6 6.2.2

Test Requirements: Part 2.1055(A) (3)

§2.1055 Measurements required: Frequency stability.

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(3) From 0° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

Test Requirements: Part 73.1545(b)

§73.1545 Carrier frequency departure tolerances.

(b) *FM stations.* (1) The departure of the carrier or center frequency of an FM station with an authorized transmitter output power more than 10 watts may not exceed ± 2000 Hz from the assigned frequency.

Test Requirements: BETS-6 6.2.2

6.2 Carrier Frequency Stability

6.2.1 Definition

The carrier frequency stability is the ability of the transmitting equipment to maintain a mean test frequency.

6.2.2 Method of Measurement

After a warm-up period of one hour at rated AC input voltage, measure the frequency of the carrier at one minute intervals during a period of fifteen minutes. From these measurements, determine a mean test frequency. Then, measure and record the operating frequency at a temperature of 5°C at 85, 100 and 115% of the rated AC supply voltage. Repeat for a temperature of 45°C .

Where it is not practical to subject the complete transmitting equipment to the specified test conditions, it is permissible to isolate and separately measure the stability of the frequency-determining elements of the transmitting equipment under the specified conditions.

6.2.3 Standard


The frequency of the carrier shall remain within ± 1 kHz of the mean test frequency.

Method of Measurements: ANSI C63.26 5.6

Test Data: FCC Frequency Stability Table

FCC Part 73 Limit	2	+/- kHz	
FCC Part 73 Lower Limit	108.005671	MHz	
FCC Part 73 Upper Limit	108.009671	MHz	
Rated Supply Voltage	110.0	☒ AC ☐ DC	
Temperature / Voltage Variation			
Temperature (°C)	Supplied Voltage (V)	Frequency (MHz)	Deviation (kHz)
0	110.0	108.007510	0.161
+10	110.0	108.007671	0.000
+20 (reference)	110.0	108.007671	0.000
+20	93.5	108.007671	0.000
+20	126.5	108.007671	0.000
+30	110.0	108.007671	0.000
+40	110.0	108.007808	-0.137
+50	110.0	108.007682	-0.011

Test Data: FCC Frequency Stability Plot

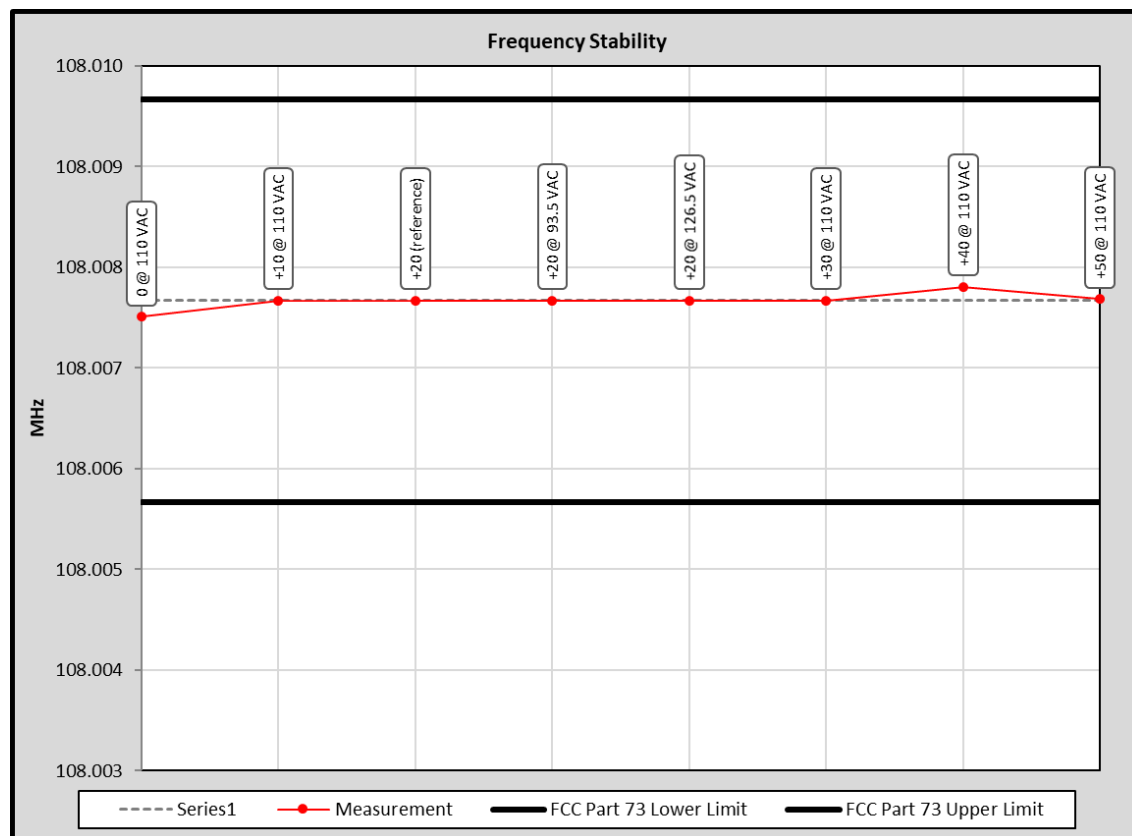


APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2

Test Data: IC Frequency Stability Table

BETS-6 Limit	1	+/- kHz	
BETS-6 Lower Limit	108.006671	MHz	
BETS-6 Upper Limit	108.008671	MHz	
Rated Supply Voltage	110.0	☒ AC ☐ DC	
Temperature / Voltage Variation			
Temperature (°C)	Supplied Voltage (V)	Frequency (MHz)	Deviation (kHz)
+20 (reference)	110	108.007671	0.000
+5	94	108.00751	0.161
+5	0	108.00751	0.161
+5	127	108.00751	0.161
+45	94	108.007682	-0.011
+45	110	108.007682	-0.011
+45	127	108.007682	-0.011

Test Data: IC Frequency Stability Plot

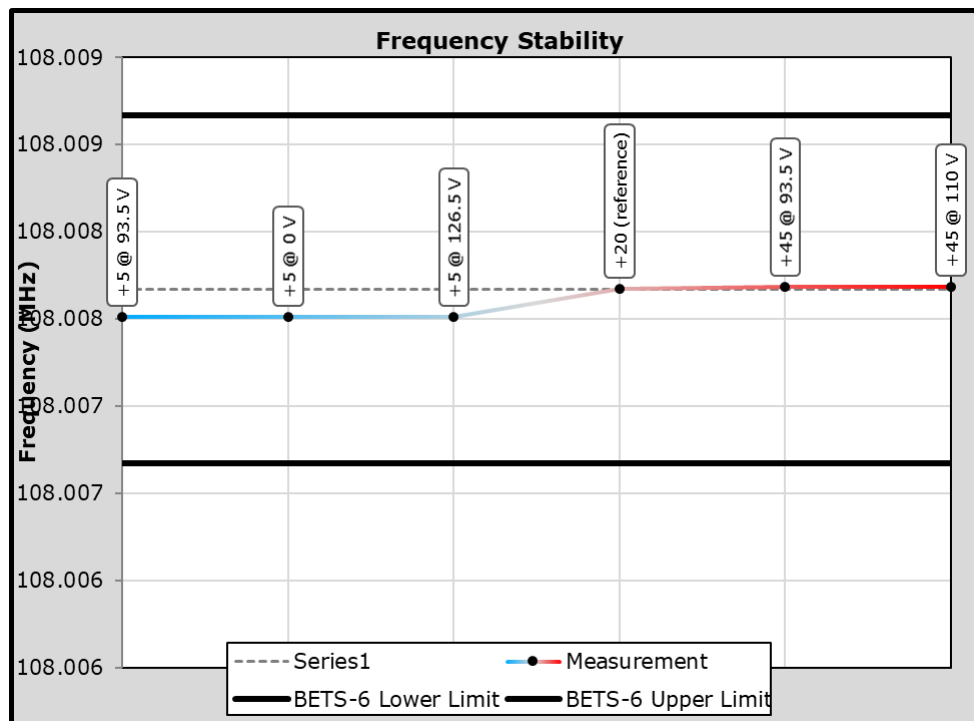

STATE OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	± 0.93 dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	± 1.86 dB	
Occupied Bandwidth	± 2.65 %	
Audio Frequency Response	± 1.86 dB	
Modulation limiting	± 1.88 %	
Radiated RF Power	± 1.4 dB	
Maximum frequency deviation: Within 300 Hz and 6 kHz of audio freq. Within 6 kHz and 25 kHz of audio freq.	± 1.88 % ± 2.04 %	
Rad Emissions Sub Meth up to 26.5GHz	± 2.14 dB	
Rad Emissions Sub Meth up to 18-40 GHz	± 2.04 %	
Adjacent channel power	± 1.47 dB	(1)
Intermodulation - Tx	± 2.07 dB	
Noise Figure	± 1.00 dB	
Transient Frequency Response	± 1.88 %	
Temperature	± 1.0 °C	(1)
Humidity	± 5.0 %	
Radiated Emissions to 6.0GHz	± 4.4 dB	
Power line conducted emissions	± 3.9 dB	

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical 1096	Eaton	94455-1	1096	08/01/17	08/01/19
Antenna: Log-Periodic 1122	Electro-Metrics	LPA-25	1122	07/26/17	07/26/19
Temperature Chamber LARGE	Tenney Engineering	TTRC	11717-7	N/A	N/A
Frequency Counter	HP	5385A	2730A03025	11/08/17	11/08/19
CHAMBER	Panashield	3M	N/A	07/11/18	07/11/20
Sweep/Signal Generator	Anritsu	68369B	985112	11/08/17	11/08/19
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	03/01/17	03/01/19
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Type K J Thermometer	Martel	303	080504494	11/06/17	11/06/19
Modulation Analyzer	HP	8901A	3050A05856	04/13/17	04/13/19
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	08/28/18	08/28/20
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244-01; KMKM-0670-00; KFKF-0198-01	08/09/16	08/09/19
Function Generator	Standford	DS340	25200	02/21/18	02/21/20
Terminator N 20W DC-18G	Narda	8205	#14	04/06/17	04/06/19
Non Radiating 50 OHM Load	Tenuline	8329-300		02/01/18	02/01/21
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	N/A	N/A

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF REPORT

APPLICANT: RFE BROADCAST S.R.L.
 FCC ID: 2ARJIDS500
 IC: 24642-DS500
 REPORT: 2271UT18TestReport_Rev2