

FCC TEST REPORT

Client Name : Bizringer Inc.

Address : 1221 E. Dyer Road, Suite 250, Santa Ana, CA. 92705,
USA

Product Name : Car dash cam

Date : May 06, 2021

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	7
1.6. Description Of Test Setup.....	9
1.7. Test Equipment List.....	10
1.8. Measurement Uncertainty.....	11
1.9. Description of Test Facility.....	11
2. Summary of Test Results.....	12
3. Conducted Emission Test.....	13
3.1. Test Standard and Limit.....	13
3.2. Test Setup.....	13
3.3. Test Procedure.....	13
3.4. Test Data.....	13
4. Radiation Spurious Emission and Band Edge.....	14
4.1. Test Standard and Limit.....	14
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. 20DB Occupy Bandwidth Test.....	22
5.1. Test Standard and Limit.....	22
5.2. Test Setup.....	22
5.3. Test Procedure.....	22
5.4. Test Data.....	22
6. Antenna Requirement.....	25
6.1. Test Standard and Requirement.....	25
6.2. Antenna Connected Construction.....	25
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	26
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	27

TEST REPORT

Applicant : Bizringer Inc.
Manufacturer : Shenzhen Cocolife Technology Co., Ltd
Product Name : Car dash cam
Model No. : EM10
Trade Mark : N.A.
Rating(s) : Input: DC 5V, 3A

Test Standard(s) : FCC Part15 Subpart C 2018, Section 15.239

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.


Date of Receipt

Jan. 21, 2021

Date of Test

Jan. 21~Feb. 27, 2021

Prepared by



(Engineer / Ella Liang)

Approved & Authorized Signer



(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Bizringer Inc.
Address	:	1221 E. Dyer Road, Suite 250, Santa Ana, CA. 92705, USA
Manufacturer	:	Shenzhen Cocolife Technology Co., Ltd
Address	:	3F, Building A,Ying Ren Shi Wentao Science Park, Baoan District, shenzhen, China
Factory	:	Shenzhen Cocolife Technology Co., Ltd
Address	:	3F, Building A,Ying Ren Shi Wentao Science Park, Baoan District, shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	Car dash cam
Model No.	:	EM10
Trade Mark	:	N.A.
Test Power Supply	:	DC 12-48V (Note: This Report only reflect the data of the worst test voltage, namely "DC 12V".)
Product Description	:	Operation Frequency: BLE: 2402-2480MHz 2.4G WIFI: 2412MHz~2462MHz / 2422~2452MHz GSM 850: TX:824.2~848.8 MHz PCS 1900: TX:1850.2~1909.8 MHz UMTS Band 2: TX:1852.4~1907.6 MHz UMTS Band 4: TX: 1710 ~ 1755 MHz UMTS Band 5: TX: 826.4 ~ 846.6 MHz: LTE-FDD Band 2: TX: 1850.7 ~ 1909.3 MHz LTE-FDD Band 4: TX:1710.7 ~ 1754.3 MHz LTE-FDD Band 5: TX: 824.7 ~ 848.3 MHz LTE-FDD Band 12: TX: 699.7 ~ 715.3 MHz LTE-FDD Band 17: TX: 706.5 ~ 713.5 MHz FM: 88.1-107.9MHz Transfer Rate: 2.4G WIFI: 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps

		802.11n: up to 150Mbps BLE: 1 Mbits/s
	Number of Channel:	BLE: 40 Channels 2.4G WIFI: 11 Channels for 802.11b/g/n(HT20) 7 Channels for 802.11n(HT40) FM: 199 Channels
	Modulation Type:	BLE: GFSK 2.4G WIFI: 802.11b CCK; 802.11g/n OFDM 2G: GMSK for GPRS, 8PSK for EDGE 3G: BPSK, 16QAM 4G: QPSK, 16QAM FM: FM
	Antenna Type:	BT&WIFI/ 2G&3G&4G: PIFA Antenna FM: Linear antenna
	Antenna Gain(Peak):	BLE: 2 dBi 2.4G WIFI: 2 dBi GSM 850: 2 dBi PCS 1900: 2 dBi WCDMA Band 2: 2 dBi WCDMA Band 4: 2 dBi WCDMA Band 5: 2 dBi LTE-FDD Band 2: 2 dBi LTE-FDD Band 4: 2 dBi LTE-FDD Band 5: 2 dBi LTE-FDD Band 12: 2 dBi LTE-FDD Band 17: 2 dBi FM: 1.2 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2) This report is for FM module.

1.3. Auxiliary Equipment Used During Test

N/A

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	88.1MHz
Mode 2	98.1MHz
Mode 3	107.9MHz

For Radiated Emission	
Final Test Mode	Description
Mode 1	88.1MHz
Mode 2	98.1MHz
Mode 3	107.9MHz

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.


1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	88.10	51	93.10	101	98.10	151	103.10
2	88.20	52	93.20	102	98.20	152	103.20
3	88.30	53	93.30	103	98.30	153	103.30
4	88.40	54	93.40	104	98.40	154	103.40
5	88.50	55	93.50	105	98.50	155	103.50
6	88.60	56	93.60	106	98.60	156	103.60
7	88.70	57	93.70	107	98.70	157	103.70
8	88.80	58	93.80	108	98.80	158	103.80
9	88.90	59	93.90	109	98.90	159	103.90
10	89.00	60	94.00	110	99.00	160	104.00
11	89.10	61	94.10	111	99.10	161	104.10
12	89.20	62	94.20	112	99.20	162	104.20
13	89.30	63	94.30	113	99.30	163	104.30
14	89.40	64	94.40	114	99.40	164	104.40
15	89.50	65	94.50	115	99.50	165	104.50
16	89.60	66	94.60	116	99.60	166	104.60
17	89.70	67	94.70	117	99.70	167	104.70
18	89.80	68	94.80	118	99.80	168	104.80
19	89.90	69	94.90	119	99.90	169	104.90
20	90.00	70	95.00	120	100.00	170	105.00
21	90.10	71	95.10	121	100.10	171	105.10
22	90.20	72	95.20	122	100.20	172	105.20
23	90.30	73	95.30	123	100.30	173	105.30
24	90.40	74	95.40	124	100.40	174	105.40
25	90.50	75	95.50	125	100.50	175	105.50
26	90.60	76	95.60	126	100.60	176	105.60
27	90.70	77	95.70	127	100.70	177	105.70
28	90.80	78	95.80	128	100.80	178	105.80
29	90.90	79	95.90	129	100.90	179	105.90
30	91.00	80	96.00	130	101.00	180	106.00
31	91.10	81	96.10	131	101.10	181	106.10
32	91.20	82	96.20	132	101.20	182	106.20
33	91.30	83	96.30	133	101.30	183	106.30
34	91.40	84	96.40	134	101.40	184	106.40

35	91.50	85	96.50	135	101.50	185	106.50
36	91.60	86	96.60	136	101.60	186	106.60
37	91.70	87	96.70	137	101.70	187	106.70
38	91.80	88	96.80	138	101.80	188	106.80
39	91.90	89	96.90	139	101.90	189	106.90
40	92.00	90	97.00	140	102.00	190	107.00
41	92.10	91	97.10	141	102.10	191	107.10
42	92.20	92	97.20	142	102.20	192	107.20
43	92.30	93	97.30	143	102.30	193	107.30
44	92.40	94	97.40	144	102.40	194	107.40
45	92.50	95	97.50	145	102.50	195	107.50
46	92.60	96	97.60	146	102.60	196	107.60
47	92.70	97	97.70	147	102.70	197	107.70
48	92.80	98	97.80	148	102.80	198	107.80
49	92.90	99	97.90	149	102.90	199	107.90
50	93.00	100	98.00	150	103.00		



1.6. Description Of Test Setup

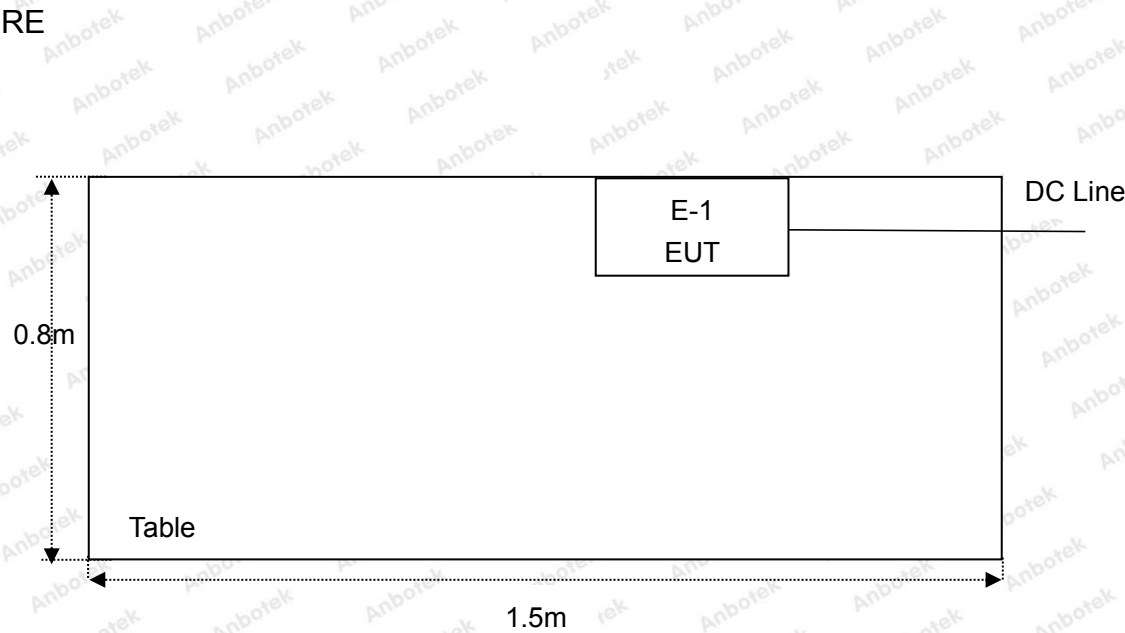

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results


Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.205/15.209/15.239	Spurious Emission	PASS
15.205	Band Edge Emission	PASS
15.239 (c)	Occupied Bandwidth	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

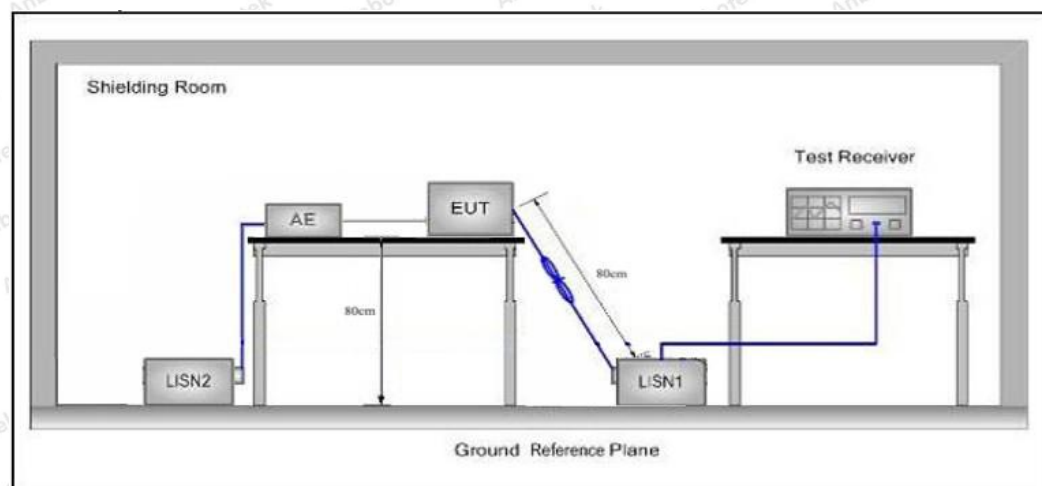

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

The EUT is powered DC, so there is no need to conduct this test.

The device is vehicle used only.

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.239(a)				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

According to §15.239(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Emission Level (dBuV/m)=20log Emission Level(uV/m)

The field strength of emission limits have been calculated in below table:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)@3m
88.1-107.9	48 (AVG)
	68 (Peak)

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

3. FCC part15.239(b) The field strength of any emissions within the permitted 200 KHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.

4.2. Test Setup

Figure 1. Below 30MHz

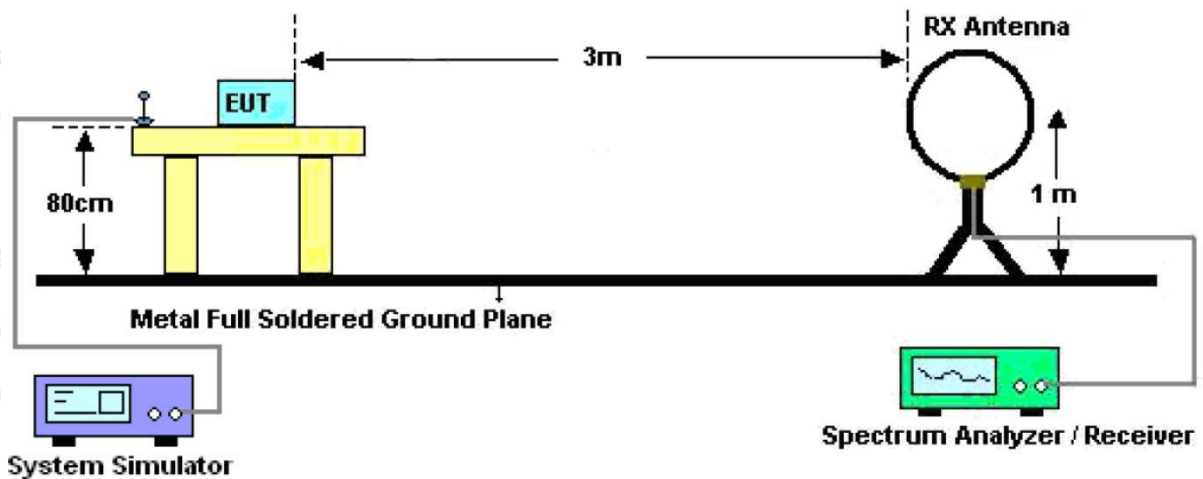


Figure 2. 30MHz to 1GHz


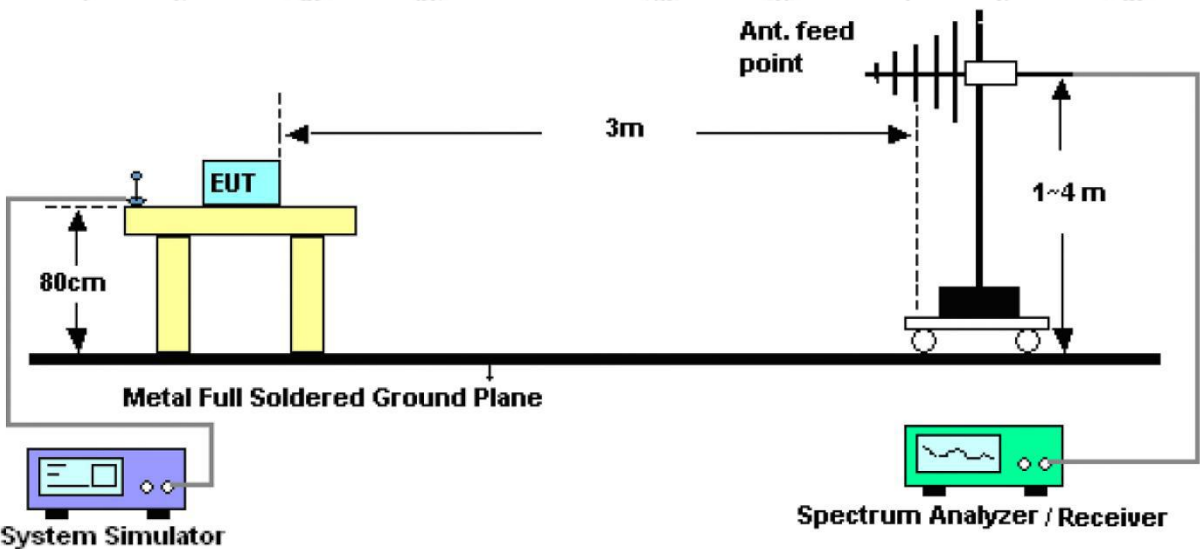


Figure 3. Above 1 GHz

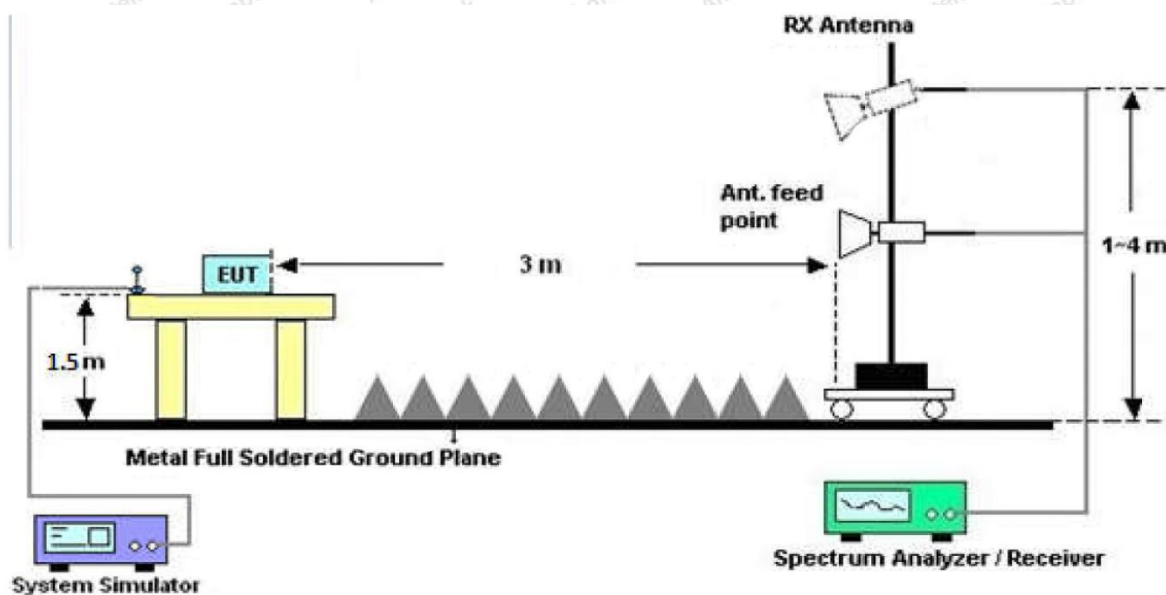

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 120kHz, VBW = 360kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

4.4. Test Data

PASS


During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

worst case: Mode1, only the worst case is recorded in the report.

Test Results (30~1000MHz)


Test Mode: Mode 1
Power Source: DC 12V
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 20.4°C/50%RH

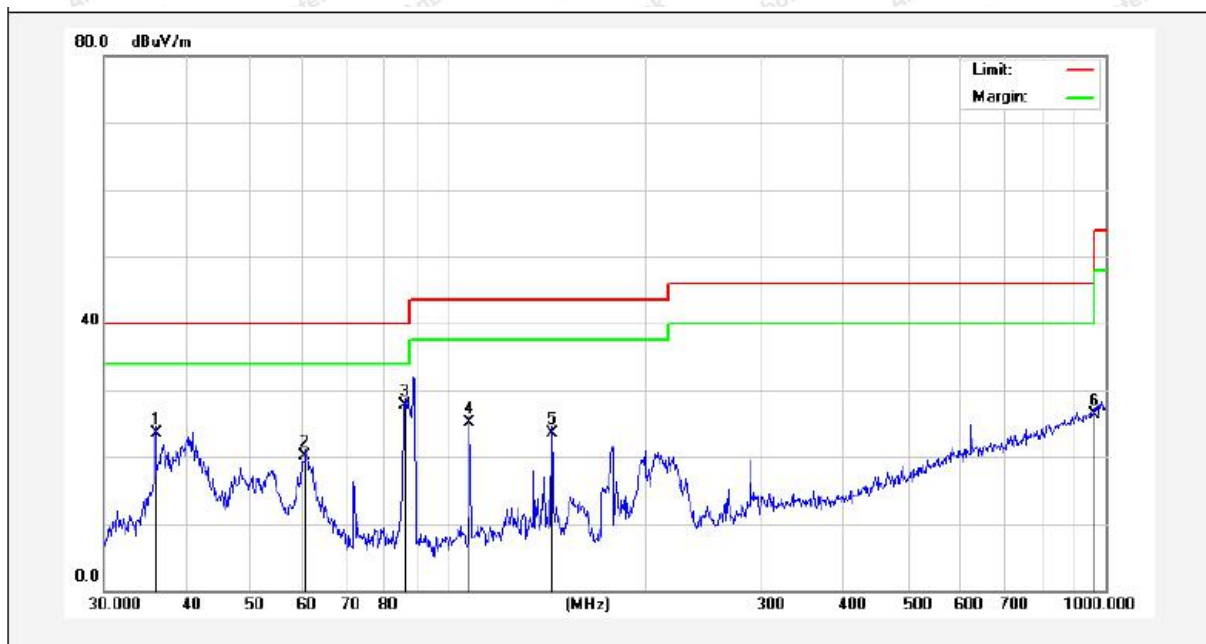

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	36.0007	39.30	-15.74	23.56	40.00	-16.44	QP	100	0	
2	60.7044	36.47	-16.46	20.01	40.00	-19.99	QP	100	360	
3	85.8984	44.41	-16.63	27.78	40.00	-12.22	QP	100	0	
4	107.8877	41.09	-15.90	25.19	43.50	-18.31	QP	100	360	
5	143.8295	43.59	-20.00	23.59	43.50	-19.91	QP	100	0	
6	958.7943	26.87	-0.64	26.23	46.00	-19.77	QP	100	360	

Test Results (30~1000MHz)

Test Mode: Mode 1
Power Source: DC 12V
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 20.4°C/50%RH

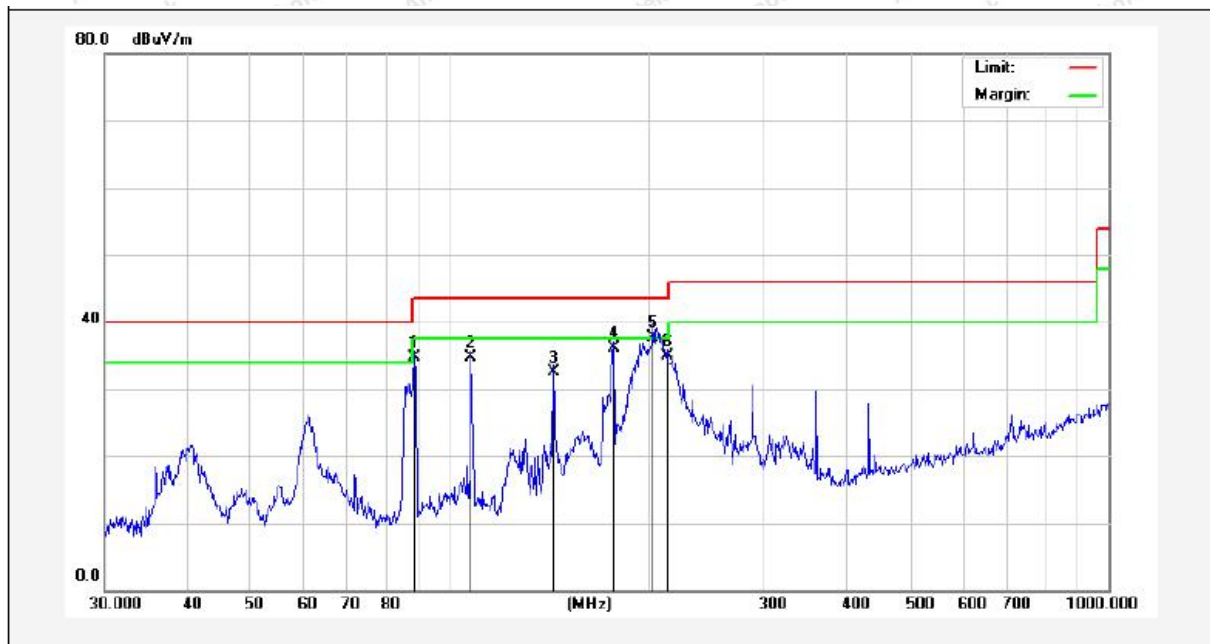

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	88.3421	55.31	-20.52	34.79	43.50	-8.71	QP	100	0	
2	107.8877	55.56	-20.85	34.71	43.50	-8.79	QP	100	360	
3	143.8295	53.25	-20.84	32.41	43.50	-11.09	QP	100	0	
4	177.5092	57.07	-20.95	36.12	43.50	-7.38	QP	100	360	
5	203.5228	57.45	-19.79	37.66	43.50	-5.84	QP	100	0	
6	213.7634	54.43	-19.58	34.85	43.50	-8.65	QP	100	360	

TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL

Horizontal							
Frequency (MHz)	Read Level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Pass/Fail
88.1	60.90	-20.65	40.25	68.00	-27.75	Peak	Pass
88.1	60.32	-20.65	39.67	48.00	-8.33	AV	Pass
98.1	63.90	-20.71	43.19	68.00	-24.81	Peak	Pass
98.1	62.63	-20.71	41.92	48.00	-6.08	AV	Pass
107.9	61.08	-20.85	40.23	68.00	-27.77	Peak	Pass
107.9	60.96	-20.85	40.11	48.00	-7.89	AV	Pass

Vertical							
Frequency (MHz)	Read Level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Pass/Fail
88.1	52.56	-20.65	31.91	68.00	-36.09	Peak	Pass
88.1	50.84	-20.65	30.19	48.00	-17.81	AV	Pass
98.1	54.68	-20.71	33.97	68.00	-34.03	Peak	Pass
98.1	53.59	-20.71	32.88	48.00	-15.12	AV	Pass
107.9	52.66	-20.85	31.81	68.00	-36.19	Peak	Pass
107.9	51.64	-20.85	30.79	48.00	-17.21	AV	Pass

TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION

Frequency (MHz)	Polarization	Read Level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Pass/Fail
88.1	V	54.65	-20.65	34.00	40.00	-6.00	QP	Pass
88.1	H	56.70	-20.65	36.05	40.00	-3.95	QP	Pass
107.9	V	54.90	-20.85	34.05	43.50	-9.45	QP	Pass
107.9	H	60.84	-20.85	39.99	43.50	-3.51	QP	Pass

Note: During the test, pre-scan all test voltages and only show the test data of the worst case (DC 12V) in this Report.

Level=Read Level+Factor

TEST RESULT(1~25GHz)

Test Mode: 107.9MHz					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
1080.00	30.77	34.04	6.58	34.09	37.30	74.00	-36.70	V
1188.00	27.86	37.11	7.73	34.50	38.20	74.00	-35.80	V
1296.00	27.44	39.31	9.23	34.79	41.19	74.00	-32.81	V
1404.00						74.00		V
1512.00						74.00		V
1080.00	33.91	34.04	6.58	34.09	40.44	74.00	-33.56	H
1188.00	28.83	37.11	7.73	34.50	39.17	74.00	-34.83	H
1296.00	26.83	39.31	9.23	34.79	40.58	74.00	-33.42	H
1402.70	*					74.00		H
1510.60	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
1080.00	21.47	34.04	6.58	34.09	28.00	54.00	-26.00	V
1188.00	16.98	37.11	7.73	34.50	27.32	54.00	-26.68	V
1296.00	16.77	39.31	9.23	34.79	30.52	54.00	-23.48	V
1404.00						54.00		V
1512.00						54.00		V
1080.00	24.78	34.04	6.58	34.09	31.31	54.00	-22.69	H
1188.00	18.50	37.11	7.73	34.50	28.84	54.00	-25.16	H
1296.00	16.20	39.31	9.23	34.79	29.95	54.00	-24.05	H
1402.70	*					54.00		H
1510.60	*					54.00		H

Remark: 1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

2. All the conditions have been tested. It is found that 107.9MHz is the worst mode, and the data in the report only reflects the worst mode.


3. During the test, pre-scan all test voltages and only show the test data of the worst case (DC 12V) in this Report.

5. 20DB Occupy Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.239
Test Limit	§ 15.239 (a): Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz. Limit: 200 KHz

5.2. Test Setup



5.3. Test Procedure


1. Place the EUT on the table and set it in the continuously transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 30kHz, VBW $\geq$ 3*RBW =100kHz,
Span= 3MHz
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.4. Test Data


Test Item : 20dB Bandwidth
Test Voltage : DC 12V
Test Result : PASS

Test Mode : TX Mode
Temperature : 24℃
Humidity : 55%RH


Test Channel	Frequency (MHz)	20 dBc Bandwidth (KHz)	Limit (KHz)
Low	88.1	52.94	200
Mid	98.1	52.87	200
High	107.9	53.14	200

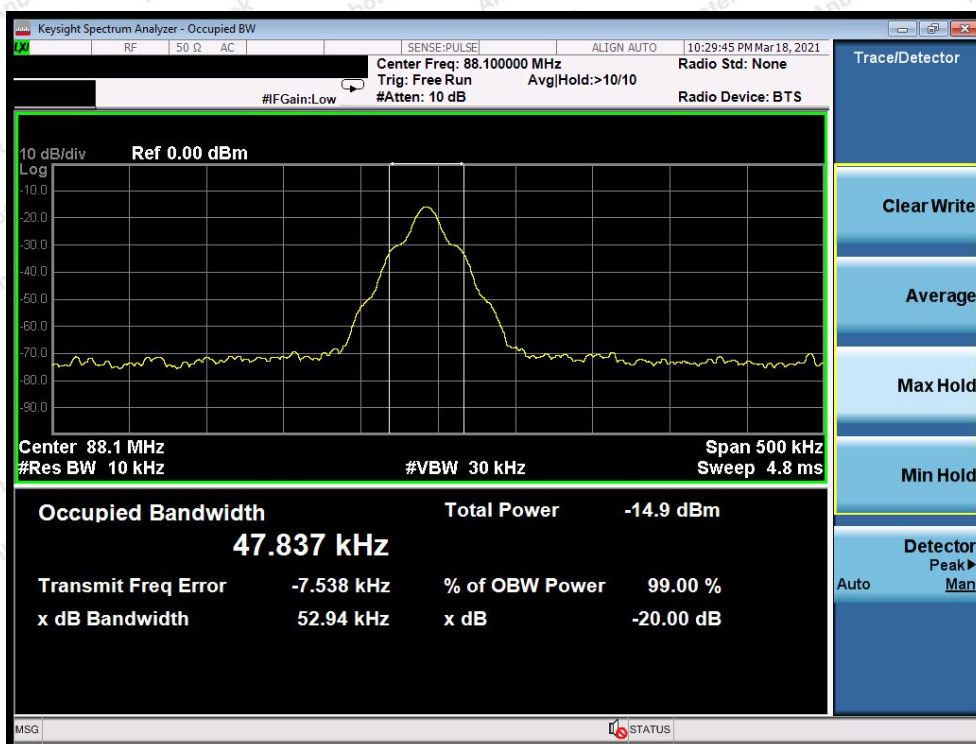

The Low Channel

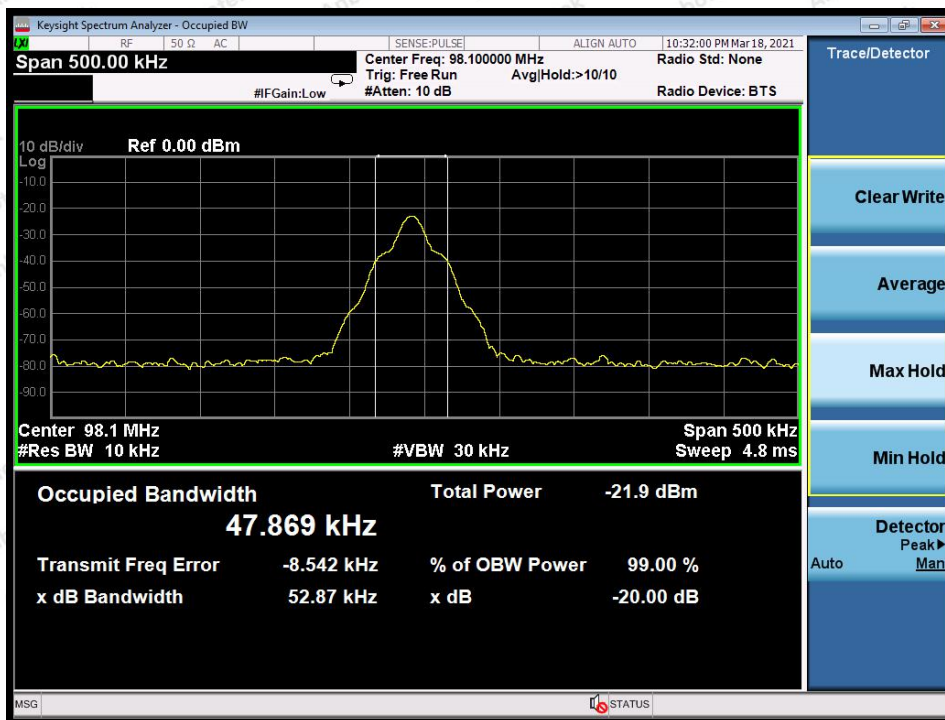

The Mid Channel

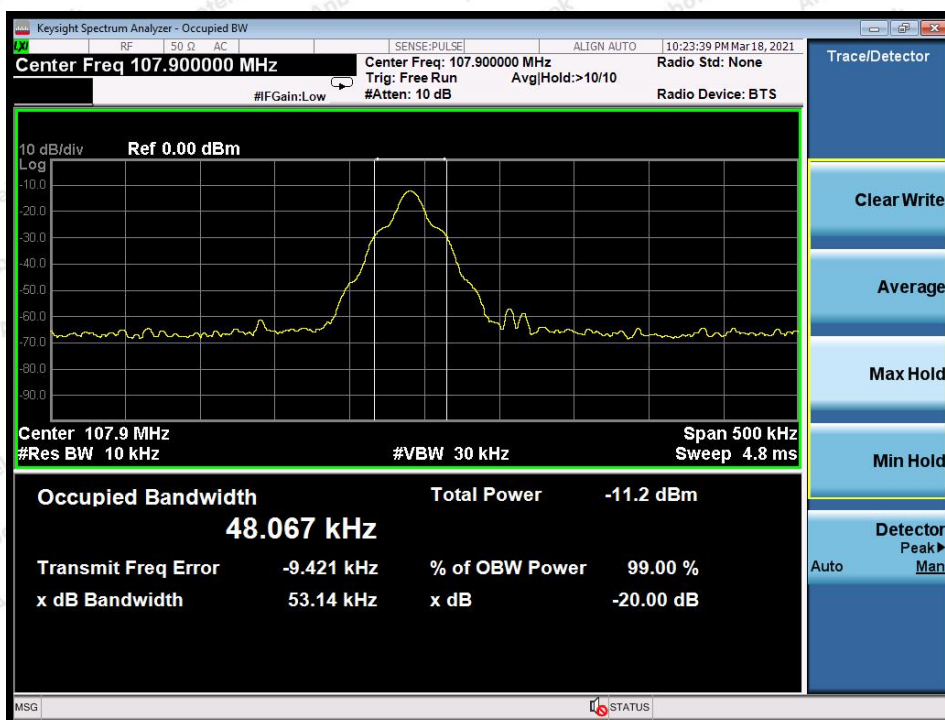

The High Channel

6. Antenna Requirement

6.1. Test Standard and Requirement


Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. Antenna requirement must meet at least one of the following: 1) Antenna must be permanently attached to device. 2) The antenna must use a unique type of connector to attach to the device. 3) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.

6.2. Antenna Connected Construction

The antenna is a Linear antenna which permanently attached, and the best case gain of the antenna is 1.2 dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test

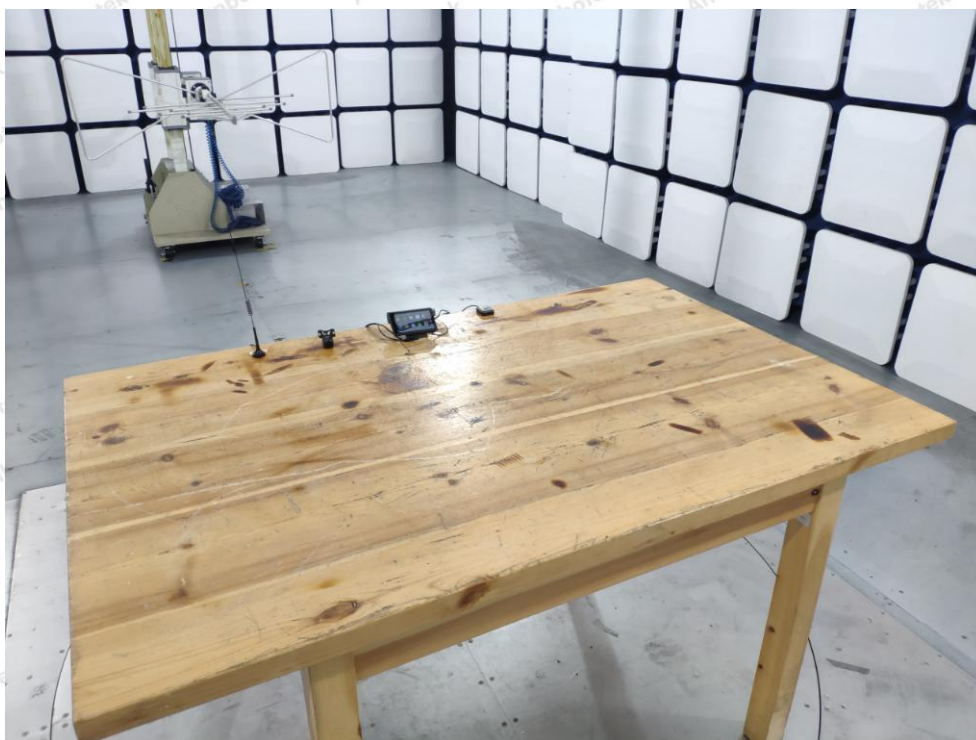

APPENDIX II -- EXTERNAL PHOTOGRAPH

Reference to the test report 18220WC10013701.

APPENDIX III -- INTERNAL PHOTOGRAPH

Reference to the test report 18220WC10013701

----- End of Report -----