



## FCC & IC TEST REPORT

On Behalf of

By TechDesign SL

FCC ID: 2ARQ3-MTA41762

Door control system

Model No.: MTA 41762, MTA 42039

Prepared for : By TechDesign SL  
Address : Calle Tomas Edison 5, Arganda del Rey, Madrid, Spain

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
              518103, Shenzhen, Guangdong, China

Report Number : T1881525 01  
Date of Receipt : September 25, 2018  
Date of Test : September 25, 2018 – November 13, 2018  
Date of Report : November 13, 2018  
Version Number : REV0

## Contents

|   |           |
|---|-----------|
| <b>1. General Information.....</b>                              | <b>5</b>  |
| 1.1. Description of Device (EUT) .....                          | 5         |
| 1.2. Accessories of Device (EUT).....                           | 6         |
| 1.3. Ancillary Equipment Details.....                           | 6         |
| 1.4. Test Lab Information.....                                  | 6         |
| <b>2. Summary of test.....</b>                                  | <b>7</b>  |
| 2.1. Summary of test result .....                               | 7         |
| 2.2. Block Diagram .....  | 7         |
| 2.3. Test mode .....  | 7         |
| 2.4. Additional instructions .....                              | 8         |
| 2.5. Test Conditions .....                                      | 8         |
| 2.6. Measurement Uncertainty (95% confidence levels, k=2) ..... | 8         |
| 2.7. Test Equipment.....  | 9         |
| <b>3. Occupied bandwidth and 20dB Bandwidth .....</b>           | <b>10</b> |
| 3.1. Limit.....   | 10        |
| 3.2. Test Procedure.....  | 10        |
| 3.3. Test Setup.....  | 10        |
| 3.4. Test Result.....   | 10        |
| <b>4. Radiated emissions .....</b>                              | <b>11</b> |
| 4.1. Limit.....   | 11        |
| 4.2. Block Diagram of Test setup.....                           | 11        |
| 4.3. Test Procedure.....  | 12        |
| 4.4. Test Result.....   | 13        |
| <b>5. Frequency stability .....</b>                             | <b>17</b> |
| 5.1. Test limit .....   | 17        |
| 5.2. Test Procedure.....  | 17        |
| 5.3. Test Setup .....   | 17        |
| 5.4. Test Results .....   | 17        |
| <b>6. Power Line Conducted Emissions.....</b>                   | <b>19</b> |
| 6.1. Block Diagram of Test Setup .....                          | 19        |
| 6.2. Limit.....   | 19        |
| 6.3. Test Procedure.....  | 19        |
| 6.4. Test Result.....   | 20        |
| <b>7. Antenna Requirements .....</b>                            | <b>22</b> |
| 7.1. Limit.....   | 22        |
| 7.2. Antenna Connected Construction .....                       | 22        |
| 7.3. Results.....   | 22        |
| <b>8. Test setup photo.....</b>                                 | <b>23</b> |
| 8.1. Photos of Radiated emission .....                          | 23        |
| 8.2. Photos of Radiated emission .....                          | 23        |
| <b>9. Photos of EUT.....</b>                                    | <b>25</b> |

## TEST REPORT DECLARATION

Applicant : By TechDesign SL  
Address : Calle Tomas Edison 5, Arganda del Rey, Madrid, Spain  
Manufacturer : By TechDesign SL  
Address : Calle Tomas Edison 5, Arganda del Rey, Madrid, Spain  
EUT Description : Door control system  
                  (A) Model No. : MTA 41762, MTA 42039  
                  (B) Trademark : by

Measurement Standard Used:


**FCC Rules and Regulations Part 15 Subpart C Section 15.225: 2017**  
**ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the RSS-310 limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests. After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Reak Yang  
Project Engineer



Approved by (name + signature).....:

Simple Guan  
Project Manager



Date of issue.....

November 13, 2018

## Revision History

| Revision | Issue Date        | Revisions              | Revised By  |
|----------|-------------------|------------------------|-------------|
| 00       | November 13, 2018 | Initial released Issue | Simple Guan |

## 1. General Information

### 1.1. Description of Device (EUT)

Description : The product is built with 13.56MHz module.

Model Name : Door control system

Model No. : MTA 41762, MTA 42039

DIFF : Both models are the same, except the appearance color, the results in this report belong to model MTA 41762.

Trade mark : by

Power supply : DC 24V from Host

Radio Technology : RFID

Operation frequency : 13.56MHz

Channel No. : 1 Channel

Modulation : ASK

Antenna Type : PCB Antenna.

Software Version : 1.1.0.20

Hardware Version : v2 and v3

Product Size : Length: 30cm  
Width: 20cm  
Height: 6cm

## 1.2. Accessories of Device (EUT)

Accessories1 : /  
Manufacturer : /  
Model : /

## 1.3. Ancillary Equipment Details

| No. | Description               | Manufacturer     | Model       | Serial Number | Certification or sDOC |
|-----|---------------------------|------------------|-------------|---------------|-----------------------|
| 1   | POWER SUPPLY              | TP-LINK          | HKI-D06-500 | N/A           | N/A                   |
| 2   | POE SWITCH                | TP-LINK          | POE31004P   | N/A           | N/A                   |
| 3   | Door control system(Host) | By TechDesign SL | MTA42209    | N/A           | sDOC                  |

## 1.4. Test Lab Information

Shenzhen Alpha Product Testing Co., Ltd  
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
Registration Number: 293961  
Designation Number: CN1236


July 25, 2017 Certificated by IC  
Registration Number: 12135A

## 2. Summary of test

### 2.1. Summary of test result

| Description of Test Item                      | Standard       | Results |
|---|----------------|---------|
| Occupied bandwidth and 20dB Bandwidth         | PART 15.215(a) | PASS    |
| Radiated Emission (9KHz-1GHz)                 | PART 15.225(d) | PASS    |
| Power Line Conducted Emissions (150KHz-30MHz) | PART 15.207(a) | PASS    |
| Frequency stability                           | PART 15.225(e) | PASS    |
| Antenna Requirement                           | Section 15.203 | PASS    |

### 2.2. Block Diagram

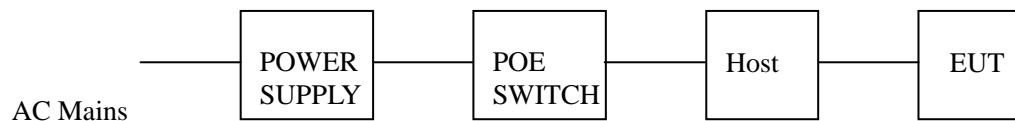

### 2.3. Test mode

| Tested mode, channel, and data rate information   |         |                 |
|---|---------|-----------------|
| Mode  | Channel | Frequency (MHz) |
| 1   | CH1     | 13.56           |
| Note: According exploratory test, EUT will have maximum output power in those data rate. so those data rate were used for all test. |         |                 |

## 2.4. Additional instructions

Hardware operating method (Used for test) from client

|                             |  |                 |                                    |
|-----------------------------|--|-----------------|------------------------------------|
| Mode                        | Special Hardware operating is used.<br>The Hardware operating method is provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually. |                 |                                    |
| Power level setup by client |  |                 |                                    |
| Mode                        | Channel  | Frequency (MHz) | Soft Set                           |
| ASK                         | Low  | 13.56           | TX level is set as defaults value. |

## 2.5. Test Conditions

|                   |           |
|-------------------|-----------|
| Temperature range | 21-25°C   |
| Humidity range    | 40-75%    |
| Pressure range    | 86-106kPa |

## 2.6. Measurement Uncertainty (95% confidence levels, k=2)

| Item  | Uncertainty                                 |
|---|---|
| Uncertainty for Power point Conducted Emissions Test                  | 2.74dB                                      |
| Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)   | 2.13 dB(Polarize: V)<br>2.57dB(Polarize: H) |
| Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz) | 3.77dB(Polarize: V)<br>3.80dB(Polarize: H)  |
| Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz) | 4.16dB(Polarize: H)<br>4.13dB(Polarize: V)  |
| Uncertainty for radio frequency                                       | 5.4×10-8                                    |
| Uncertainty for conducted RF Power                                    | 0.37dB                                      |
| Uncertainty for temperature   | 0.2 °C                                      |
| Uncertainty for humidity  | 1%  |
| Uncertainty for DC and low frequency voltages                         | 0.06%                                       |

## 2.7. Test Equipment

| Equipment              | Manufacturer      | Model No.               | Serial No.                 | Last cal.  | Cal. Due day |
|------------------------|-------------------|-------------------------|----------------------------|------------|--------------|
| Filter                 | KANGMAI           | ZLPF-LDC-10<br>00- 1959 | 1209002075                 | 2018.09.21 | 2019.09.20   |
| RF Cable               | Resenberger       | Cable 4                 | N/A                        | 2018.09.21 | 2019.09.20   |
| Signal Analyzer        | Agilent           | N9020A                  | MY499100060                | 2018.09.11 | 2019.09.10   |
| Amplifier              | HP                | HP8347A                 | 2834A00455                 | 2018.09.21 | 2019.09.20   |
| Filter                 | WAINWRIGHT        | WHKX1.0G/1<br>5G- 10SS  | SN40                       | 2018.09.21 | 2019.09.20   |
| Test Receiver          | ROHDE&SCHWA<br>RZ | ESR                     | 1316.3003K03-<br>102082-Wa | 2018.09.21 | 2019.09.20   |
| Bilog Antenna          | SCHWARZBECK       | VULB 9168               | 9168-438                   | 2018.04.13 | 2020.04.12   |
| 9*6*6 anechoic chamber | CHENYU            | 9*6*6                   | N/A                        | 2016.07.21 | 2020.07.20   |
| RF Cable               | Resenberger       | Cable 1                 | N/A                        | 2018.09.21 | 2019.09.20   |
| RF Cable               | Resenberger       | Cable 2                 | N/A                        | 2018.09.21 | 2019.09.20   |
| RF Cable               | Resenberger       | Cable 3                 | N/A                        | 2018.09.21 | 2019.09.20   |
| Loop Antenna           | SCHWARZBECK       | FMZB 1519B              | 00005                      | 2018.09.26 | 2020.09.25   |
| Attenuator             | HP                | 8494B                   | DC-18G                     | 2018.09.21 | 2019.09.20   |
| 20dB Attenuator        | ICPROBING         | IATS1                   | 82347                      | 2018.09.21 | 2019.09.20   |

### 3. Occupied bandwidth and 20dB Bandwidth

#### 3.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-Gen & FCC part 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### 3.2. Test Procedure

The transmitter output was directly connected to a spectrum analyzer with a  $50\Omega$  cable. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3KHz RBW and 10kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### 3.3. Test Setup



#### 3.4. Test Result

| Mode    | Freq (MHz) | 20dB Bandwidth (KHz) | 99% Bandwidth | Limit (kHz) | Conclusion |
|---------|------------|----------------------|---------------|-------------|------------|
| Tx Mode | 13.56      | 12.70                | 21.249        | /           | PASS       |



## 4. Radiated emissions

### 4.1. Limit

| Frequency<br>(MHz) | Field Strength |                 | Field Strength Limit at 3m Measurement Dist |                                |
|--------------------|----------------|-----------------|---|--------------------------------|
|                    | uV/m           | Distance<br>(m) | uV/m  | dBuV/m                         |
| 0.009 ~ 0.490      | 2400/F(kHz)    | 300             | 10000 * 2400/F(kHz)                         | $20\log^{(2400/F(kHz))} + 80$  |
| 0.490 ~ 1.705      | 24000/F(kHz)   | 30              | 100 * 24000/F(kHz)                          | $20\log^{(24000/F(kHz))} + 40$ |
| 1.705 ~ 30         | 30             | 30              | 100 * 30                                    | $20\log^{(30)} + 40$           |
| 30 ~ 88            | 100            | 3               | 100   | $20\log^{(100)}$               |
| 88 ~ 216           | 150            | 3               | 150   | $20\log^{(150)}$               |
| 216 ~ 960          | 200            | 3               | 200   | $20\log^{(200)}$               |
| Above 960          | 500            | 3               | 500   | $20\log^{(500)}$               |

Note:

a) The tighter limit applies at the band edges.

For example: F.S limit at 88MHz is 100uV/m

b) If measurement is made at 3m distance, then F.S Limit at 3m distance is adjusted by using the formula of  $L_{d1} = L_{d2} * (d2/d1)^2$ .

For example:

F.S Limit at 30m(d2) distance is 30uV/m( $L_{d2}$ ), then F.S Limit at 3m(d1) distance is

$$L_{d1} = 30\text{uV/m} * (30/3)^2 = 100 * 30\text{uV/m} = 69.54 \text{ dBuV/m}$$

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.


(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.


(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

### 4.2. Block Diagram of Test setup

In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

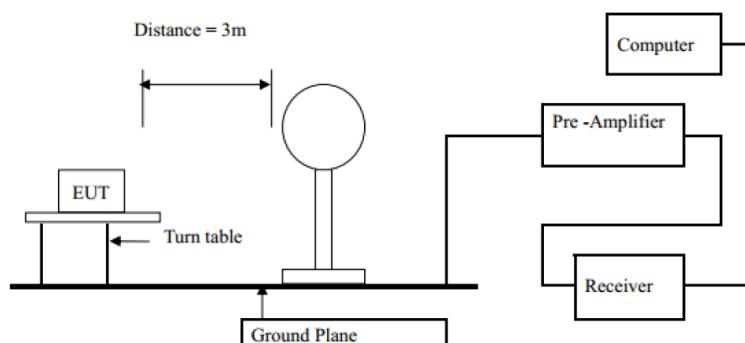

In 3m Anechoic Chamber Test Setup Diagram for frequency 30MHz-1GHz

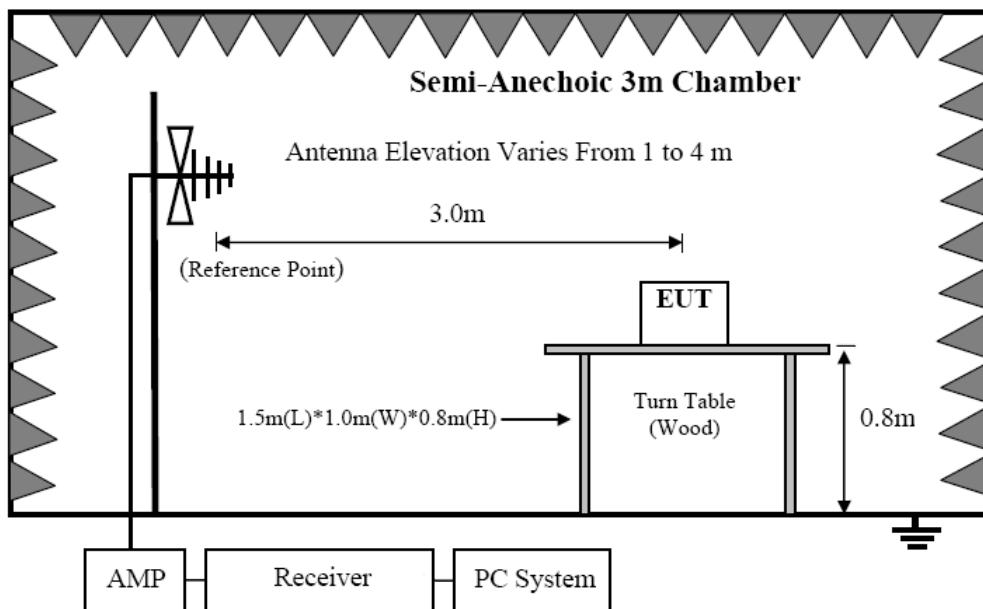

#### 4.3. Test Procedure

##### Procedure of Preliminary Test

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 4.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10:2013. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Receiver quickly scanned from 9KHz to 30MHz and 30MHz to 1GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in clause 2.4 were scanned during the preliminary test:

After the preliminary scan, we found the test mode producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

##### Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Receiver scanned from 9KHz to 30MHz and 30MHz to 1GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above

the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 200Hz for 9 KHz to 150 KHz measure, 10 KHz for 150 KHz to 30MHz measure and 120 KHz for 30 MHz to 1GHz measure .

#### 4.4. Test Result


PASS. (See below detailed test result)

Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

|               |                                  |                    |          |
|---------------|----------------------------------|--------------------|----------|
| Temperature:  | 26 °C                            | Relative Humidity: | 58%      |
| Pressure:     | 1010 hPa                         | Polarization :     | Vertical |
| Test Voltage: | DC 24V From Host with POE supply |                    |          |
| Test Mode :   | 13.56MHz                         |                    |          |

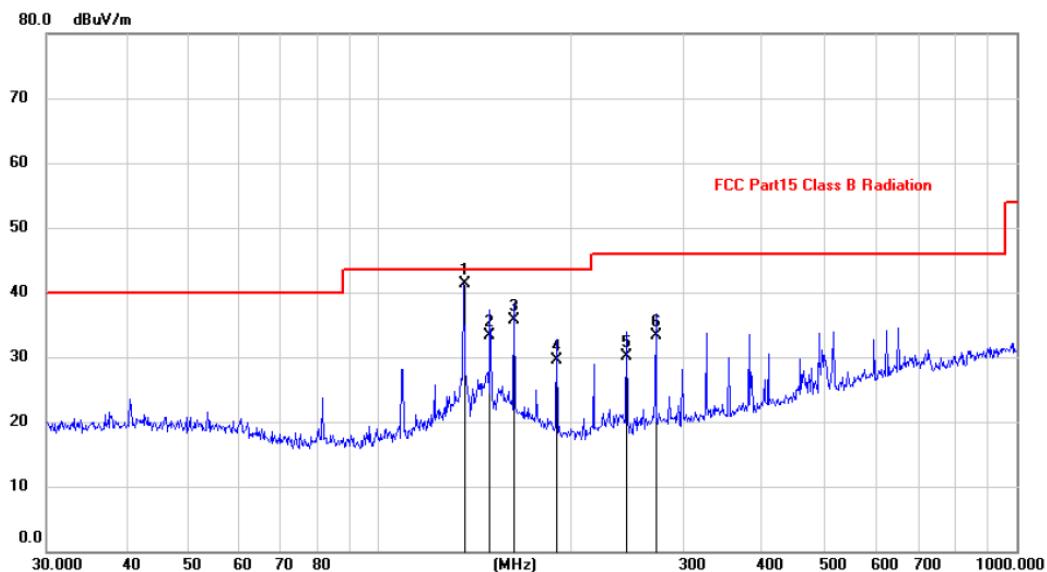


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin   | Antenna | Table  |         |
|-----|-----|----------|---------|---------|----------|--------|----------|---------|--------|---------|
|     |     |          | Level   | Factor  | ment     | dBuV/m | dB       |         |        | Comment |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB     | Detector | cm      | degree |         |
| 1   | *   | 135.9822 | 27.64   | 13.59   | 41.23    | 43.50  | -2.27    | QP      |        |         |
| 2   |     | 148.9625 | 18.81   | 14.47   | 33.28    | 43.50  | -10.22   | QP      |        |         |
| 3   |     | 163.1818 | 21.32   | 14.32   | 35.64    | 43.50  | -7.86    | QP      |        |         |
| 4   |     | 189.7385 | 18.51   | 10.96   | 29.47    | 43.50  | -14.03   | QP      |        |         |
| 5   |     | 244.2321 | 18.19   | 12.01   | 30.20    | 46.00  | -15.80   | QP      |        |         |
| 6   |     | 271.3246 | 20.44   | 12.81   | 33.25    | 46.00  | -12.75   | QP      |        |         |

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

|               |                                  |                    |            |
|---------------|----------------------------------|--------------------|------------|
| Temperature:  | 26 °C                            | Relative Humidity: | 58%        |
| Pressure:     | 1010 hPa                         | Polarization :     | Horizontal |
| Test Voltage: | DC 24V From Host with POE supply |                    |            |
| Test Mode :   | 13.56MHz                         |                    |            |

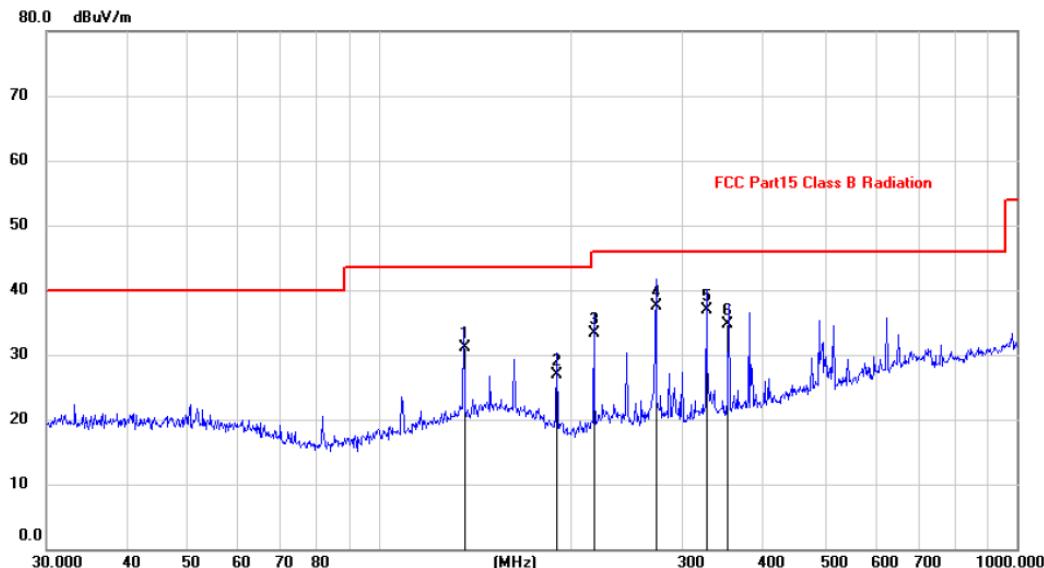

| No. | Mk.      | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit  | Margin | Antenna Height | Table<br>Degree |        |         |
|-----|----------|----------|---------------|----------------|------------------|--------|--------|----------------|-----------------|--------|---------|
|     |          | MHz      | dBuV          | dB             | dBuV/m           | dBuV/m | dB     | Detector       | cm              | degree | Comment |
| 1   | 135.9822 | 17.46    | 13.59         | 31.05          | 43.50            | -12.45 | QP     |                |                 |        |         |
| 2   | 189.7385 | 15.89    | 10.96         | 26.85          | 43.50            | -16.65 | QP     |                |                 |        |         |
| 3   | 216.7828 | 22.17    | 11.11         | 33.28          | 46.00            | -12.72 | QP     |                |                 |        |         |
| 4   | *        | 271.3246 | 24.77         | 12.81          | 37.58            | 46.00  | -8.42  | QP             |                 |        |         |
| 5   | 325.5958 | 22.80    | 14.10         | 36.90          | 46.00            | -9.10  | QP     |                |                 |        |         |
| 6   | 352.9433 | 20.30    | 14.44         | 34.74          | 46.00            | -11.26 | QP     |                |                 |        |         |

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

## Field Strength Emissions Result

| Temperature    | 26°C                             |                             | Relative Humidity |                | 58%                   |                       |                    |
|----------------|----------------------------------|-----------------------------|-------------------|----------------|-----------------------|-----------------------|--------------------|
| Pressure       | 960hPa                           |                             | Distance          |                | 3m                    |                       |                    |
| Test Voltage:  | DC 24V From Host with POE supply |                             |                   |                |                       |                       |                    |
| Test Mode      | TX                               |                             |                   |                |                       |                       |                    |
| Freq.<br>(MHz) | Position<br>H/V                  | Detector<br>Mode<br>(PK/QP) | Reading<br>(dBuV) | Factor<br>(dB) | Actual FS<br>(dBuV/m) | Limits 3m<br>(dBuV/m) | Margin<br>(dBuV/m) |
| 13.560         | H                                | Peak                        | 64.61             | -13.94         | 50.67                 | 124                   | -73.33             |
| 13.560         | H                                | AV                          | 55.74             | -13.94         | 41.80                 | 104                   | -62.20             |
| 13.110         | H                                | Peak                        | 53.42             | -13.94         | 39.48                 | 80.5                  | -41.02             |
| 13.410         | H                                | Peak                        | 53.63             | -13.94         | 39.69                 | 90.5                  | -50.81             |
| 13.553         | H                                | Peak                        | 52.27             | -13.94         | 38.33                 | 90.5                  | -52.17             |
| 13.567         | H                                | Peak                        | 48.58             | -13.93         | 34.65                 | 90.5                  | -55.85             |
| 13.710         | H                                | Peak                        | 46.66             | -13.93         | 32.73                 | 80.5                  | -47.77             |
| 14.010         | H                                | Peak                        | 47.21             | -13.93         | 33.28                 | 80.5                  | -47.22             |
| Freq.<br>(MHz) | Position<br>H/V                  | Detector<br>Mode<br>(PK/QP) | Reading<br>(dBuV) | Factor<br>(dB) | Actual FS<br>(dBuV/m) | Limits 3m<br>(dBuV/m) | Margin<br>(dBuV/m) |
| 13.560         | V                                | Peak                        | 58.73             | -13.94         | 44.79                 | 124                   | -79.21             |
| 13.560         | V                                | AV                          | 51.30             | -13.94         | 37.36                 | 104                   | -66.64             |
| 13.110         | V                                | Peak                        | 51.85             | -13.94         | 37.91                 | 80.5                  | -42.59             |
| 13.410         | V                                | Peak                        | 51.61             | -13.94         | 37.67                 | 90.5                  | -52.83             |
| 13.553         | V                                | Peak                        | 49.76             | -13.94         | 35.82                 | 90.5                  | -54.68             |
| 13.567         | V                                | Peak                        | 47.07             | -13.93         | 33.14                 | 90.5                  | -57.36             |
| 13.710         | V                                | Peak                        | 44.78             | -13.93         | 30.85                 | 80.5                  | -49.65             |
| 14.010         | V                                | Peak                        | 45.54             | -13.93         | 31.61                 | 80.5                  | -48.89             |

## 5. Frequency stability

### 5.1. Test limit


Please refer section RSS-Gen & 15.225e.

Regulation 15.225(e) The frequency tolerance of the carrier signal shall be maintained within +/-0.01% ( $\pm 100$  ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 5.2. Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.3. Test Setup



### 5.4. Test Results


**PASS.**

Detailed information please see the following page.

| Assigned Frequency(MHz): 13.56MHz |             |                          |                           |   |
|-----------------------------------|-------------|--------------------------|---------------------------|---|
| Voltage                           | Temperature | Measured Frequency (MHz) | Frequency stability (MHz) | Limit   |
| Low DC 20.4V                      | +20°C       | 13.560950                | 0.00095                   |   |
| Normal DC 24V                     | -20°C       | 13.560650                | 0.00065                   | $\pm 100 \text{ ppm}$<br>$\pm 0.001356 \text{ MHz}$ |
|                                   | -10°C       | 13.560844                | 0.000844                  |   |
|                                   | 0°C         | 13.560240                | 0.00024                   |   |
|                                   | +10°C       | 13.560086                | 0.000086                  |   |
|                                   | +20°C       | 13.560687                | 0.000687                  |   |
|                                   | +30°C       | 13.560369                | 0.000369                  |   |
|                                   | +40°C       | 13.560135                | 0.000135                  |   |
|                                   | +50°C       | 13.560841                | 0.000841                  |   |
| High DC 27.6V                     | +20°C       | 13.560664                | 0.000664                  |   |

## 6. Power Line Conducted Emissions

### 6.1. Block Diagram of Test Setup

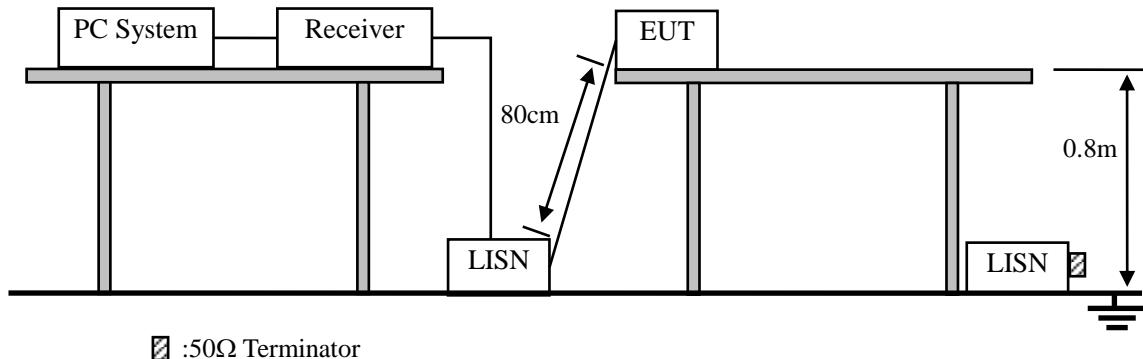

### 6.2. Limit

| Frequency       | Maximum RF Line Voltage    |                         |
|-----------------|----------------------------|-------------------------|
|                 | Quasi-Peak Level<br>dB(μV) | Average Level<br>dB(μV) |
| 150kHz ~ 500kHz | 66 ~ 56*                   | 56 ~ 46*                |
| 500kHz ~ 5MHz   | 56                         | 46                      |
| 5MHz ~ 30MHz    | 60                         | 50                      |

Notes: 1. \* Decreasing linearly with logarithm of frequency.


2. The lower limit shall apply at the transition frequencies.

### 6.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N1), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C64.10:2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.


## 6.4. Test Result

|               |                                  |                    |     |
|---------------|----------------------------------|--------------------|-----|
| Temperature:  | 24 °C                            | Relative Humidity: | 57% |
| Pressure:     | 1010 hPa                         | Polarization :     | N   |
| Test Voltage: | DC 24V From Host with POE supply |                    |     |
| Test Mode :   | 13.56MHz                         |                    |     |

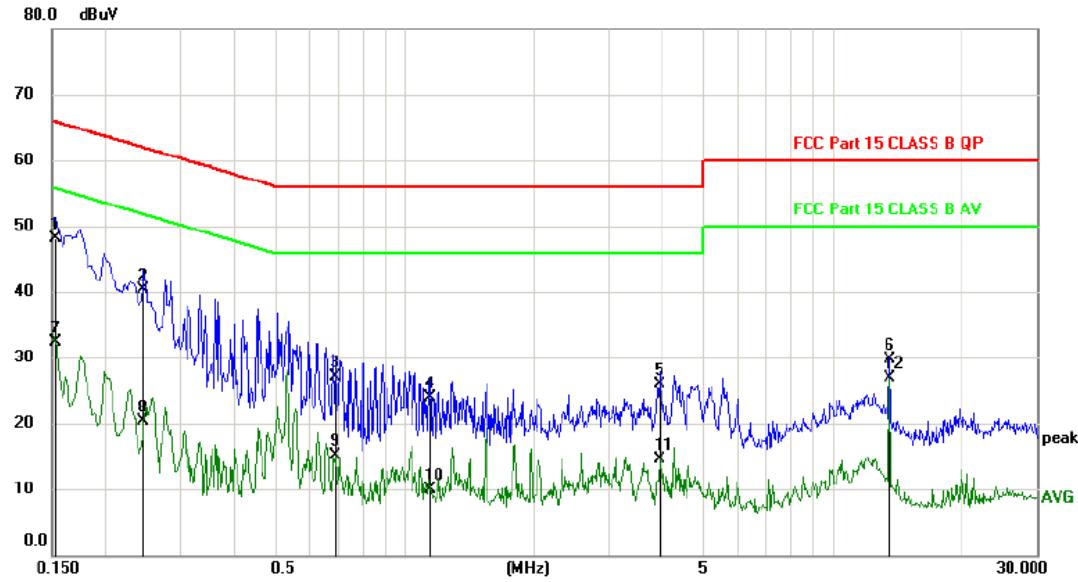

| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit | Margin | Comment  |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|
|     |     |         | Level   | Factor  | ment     |       |        |          |
|     |     | MHz     | dBuV    | dB      | dBuV     | dBuV  | dB     | Detector |
| 1   | *   | 0.1530  | 38.47   | 9.66    | 48.13    | 65.84 | -17.71 | QP       |
| 2   |     | 0.2460  | 30.54   | 9.69    | 40.23    | 61.89 | -21.66 | QP       |
| 3   |     | 0.6870  | 17.42   | 9.74    | 27.16    | 56.00 | -28.84 | QP       |
| 4   |     | 1.1430  | 14.15   | 9.78    | 23.93    | 56.00 | -32.07 | QP       |
| 5   |     | 3.9450  | 15.76   | 10.08   | 25.84    | 56.00 | -30.16 | QP       |
| 6   |     | 13.5600 | 19.31   | 10.35   | 29.66    | 60.00 | -30.34 | QP       |
| 7   |     | 0.1529  | 22.67   | 9.66    | 32.33    | 55.84 | -23.51 | AVG      |
| 8   |     | 0.2460  | 10.68   | 9.69    | 20.37    | 51.89 | -31.52 | AVG      |
| 9   |     | 0.6870  | 5.43    | 9.74    | 15.17    | 46.00 | -30.83 | AVG      |
| 10  |     | 1.1429  | 0.21    | 9.78    | 9.99     | 46.00 | -36.01 | AVG      |
| 11  |     | 3.9450  | 4.38    | 10.08   | 14.46    | 46.00 | -31.54 | AVG      |
| 12  |     | 13.5600 | 16.47   | 10.35   | 26.82    | 50.00 | -23.18 | AVG      |

|               |                                  |                    |     |
|---------------|----------------------------------|--------------------|-----|
| Temperature:  | 24 °C                            | Relative Humidity: | 57% |
| Pressure:     | 1010 hPa                         | Polarization :     | L   |
| Test Voltage: | DC 24V From Host with POE supply |                    |     |
| Test Mode :   | 13.56MHz                         |                    |     |

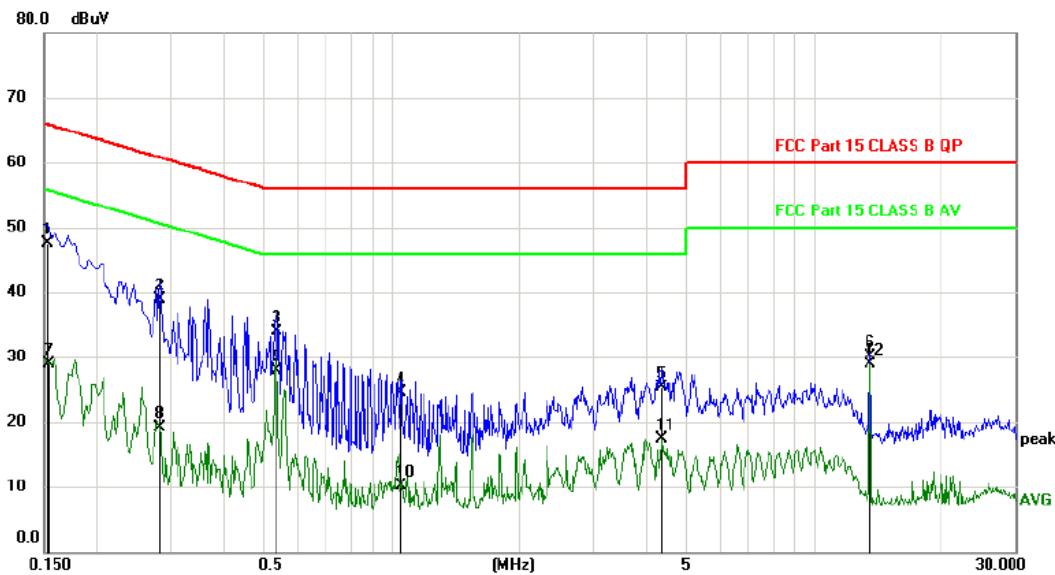

| No. | Mk.     | Freq. | Reading | Correct | Measure- | Limit  | Margin | Comment  |
|-----|---------|-------|---------|---------|----------|--------|--------|----------|
|     |         |       | Level   | Factor  | ment     |        |        |          |
|     |         | MHz   | dBuV    | dB      | dBuV     | dBuV   | dB     | Detector |
| 1   | 0.1530  | 37.88 | 9.66    | 47.54   | 65.84    | -18.30 | QP     |          |
| 2   | 0.2819  | 29.22 | 9.69    | 38.91   | 60.76    | -21.85 | QP     |          |
| 3   | 0.5340  | 24.20 | 9.72    | 33.92   | 56.00    | -22.08 | QP     |          |
| 4   | 1.0530  | 14.71 | 9.78    | 24.49   | 56.00    | -31.51 | QP     |          |
| 5   | 4.3560  | 15.13 | 10.12   | 25.25   | 56.00    | -30.75 | QP     |          |
| 6   | 13.5630 | 19.82 | 10.35   | 30.17   | 60.00    | -29.83 | QP     |          |
| 7   | 0.1539  | 19.26 | 9.66    | 28.92   | 55.79    | -26.87 | AVG    |          |
| 8   | 0.2819  | 9.47  | 9.69    | 19.16   | 50.76    | -31.60 | AVG    |          |
| 9 * | 0.5340  | 18.25 | 9.72    | 27.97   | 46.00    | -18.03 | AVG    |          |
| 10  | 1.0529  | 0.35  | 9.78    | 10.13   | 46.00    | -35.87 | AVG    |          |
| 11  | 4.3560  | 7.17  | 10.12   | 17.29   | 46.00    | -28.71 | AVG    |          |
| 12  | 13.5630 | 18.57 | 10.35   | 28.92   | 50.00    | -21.08 | AVG    |          |

Remark: All modes and channels have been tested and only listed RF mode that is worst data

## 7. Antenna Requirements

### 7.1. Limit

For intentional device, according to RSS-Gen Section 6.8 and FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.209, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 7.2. Antenna Connected Construction

The antenna is PCB antenna and no consideration of replacement. Please see EUT photo for details.

### 7.3. Results


The EUT antenna is PCB Antenna. It complies with the standard requirement.


## 8. Test setup photo

### 8.1. Photos of Radiated emission





### 8.2. Photos of Radiated emission

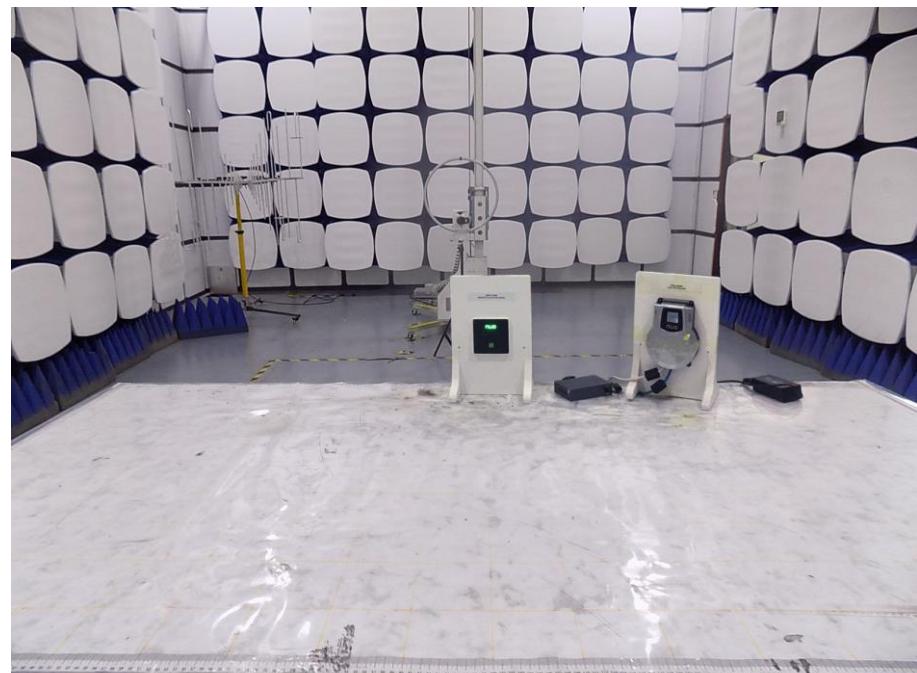



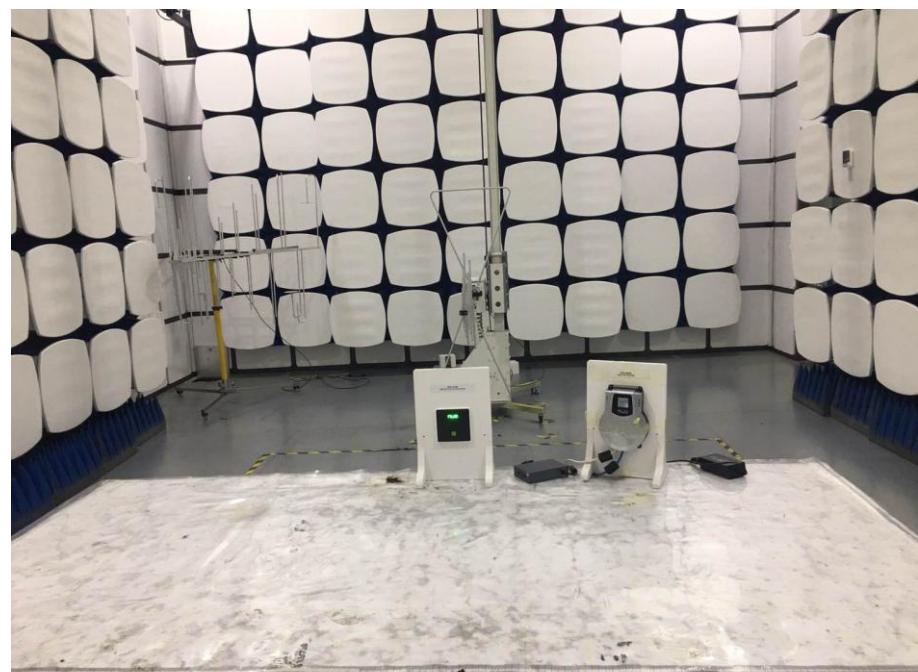




## 9. Photos of EUT




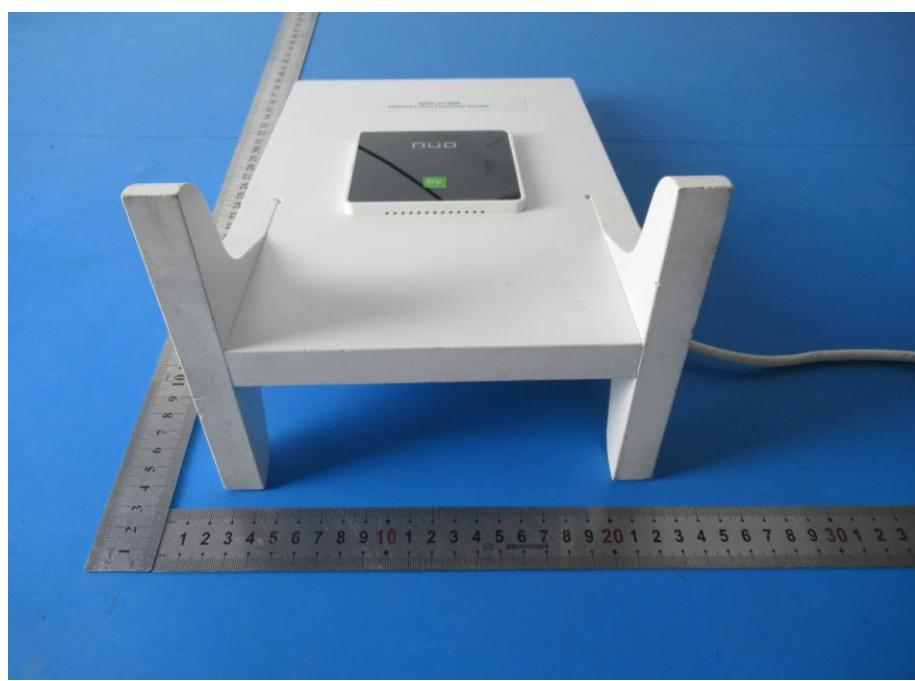
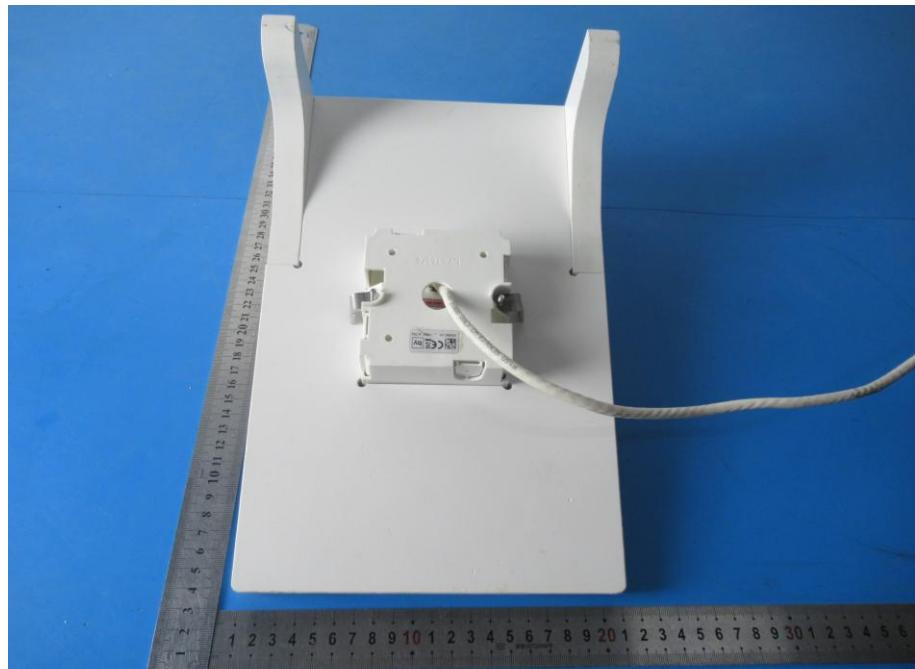



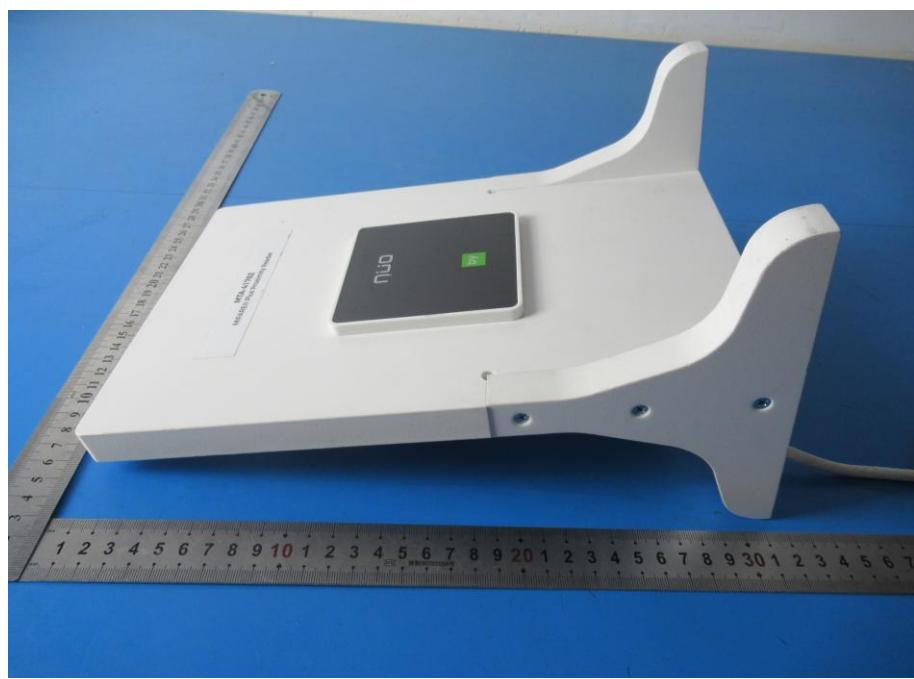


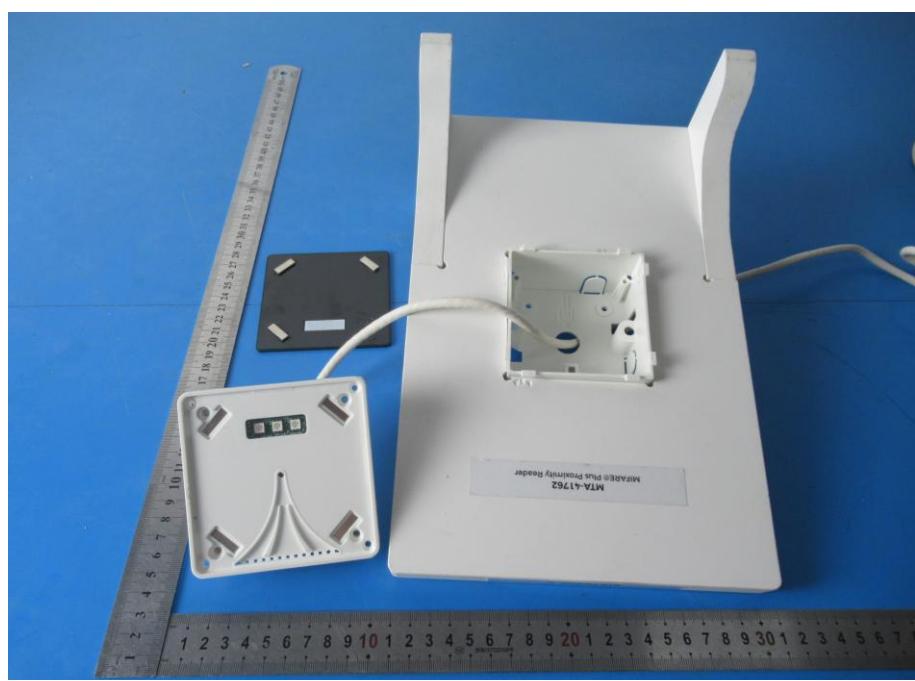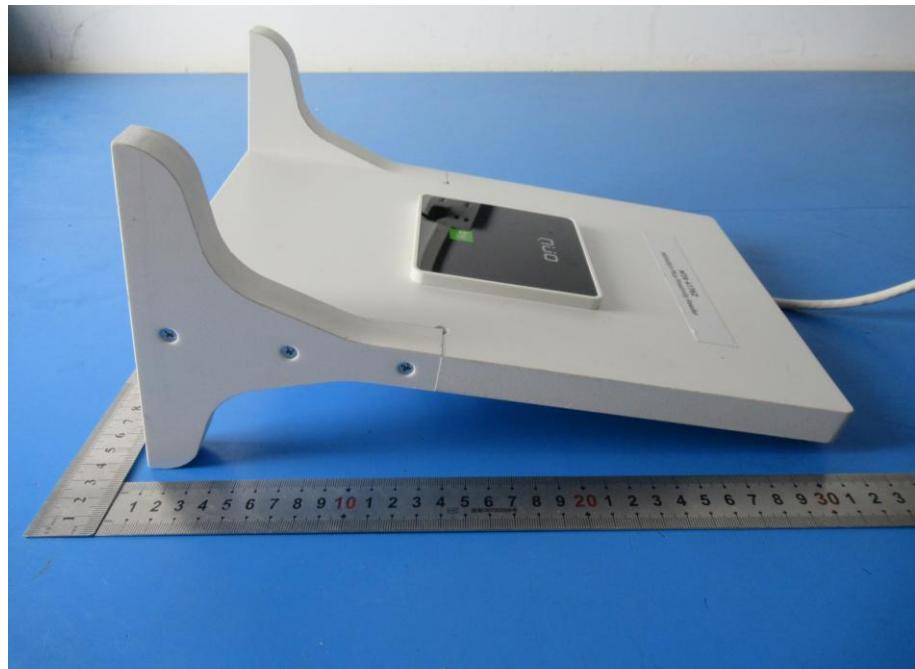

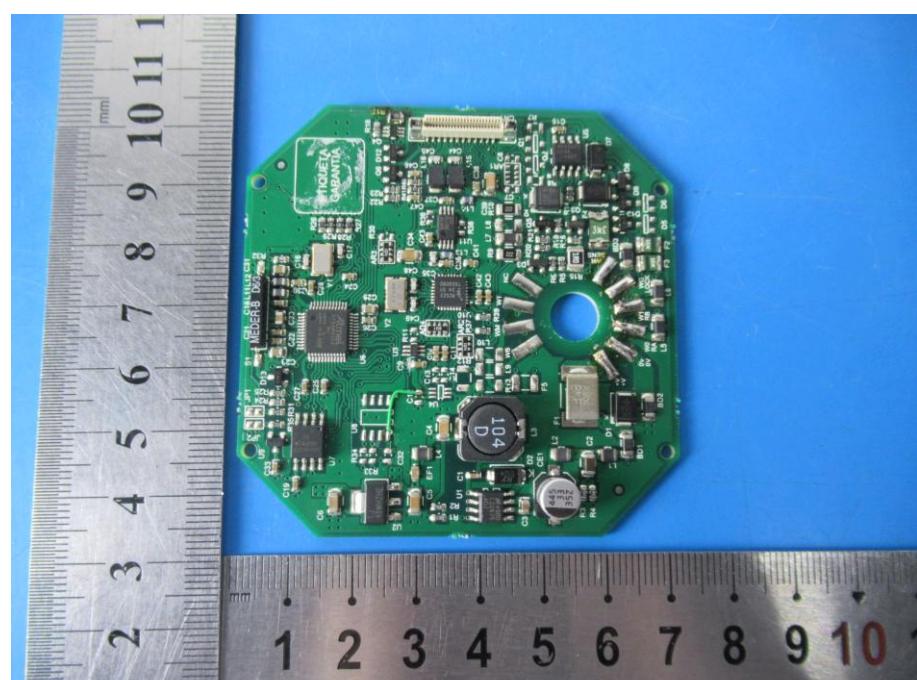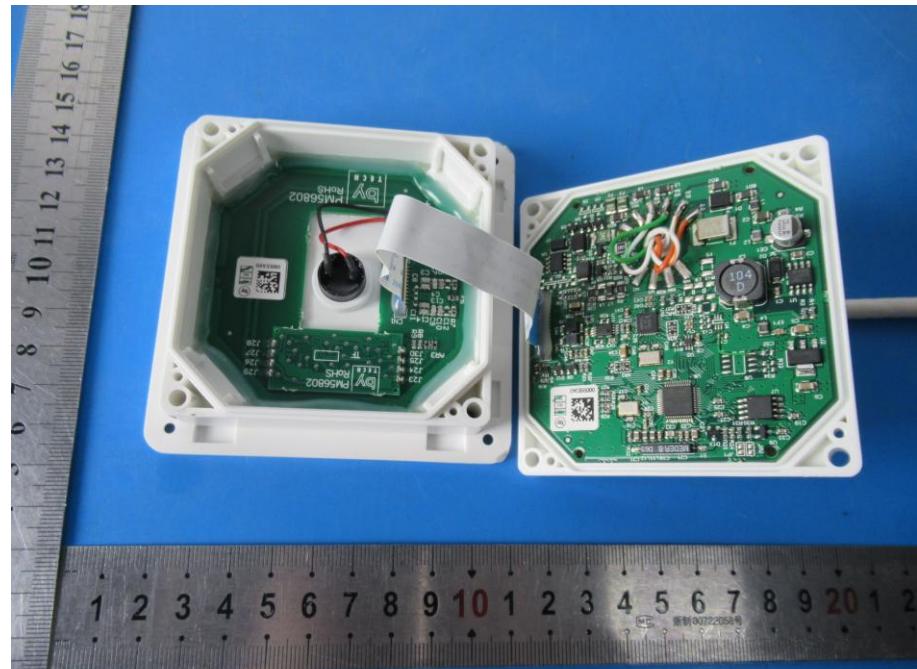

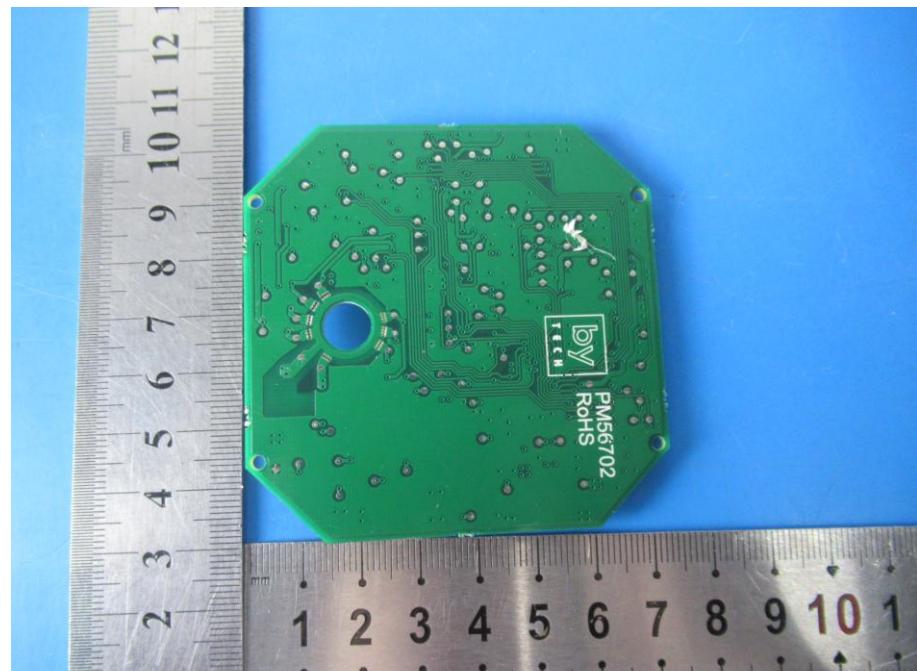

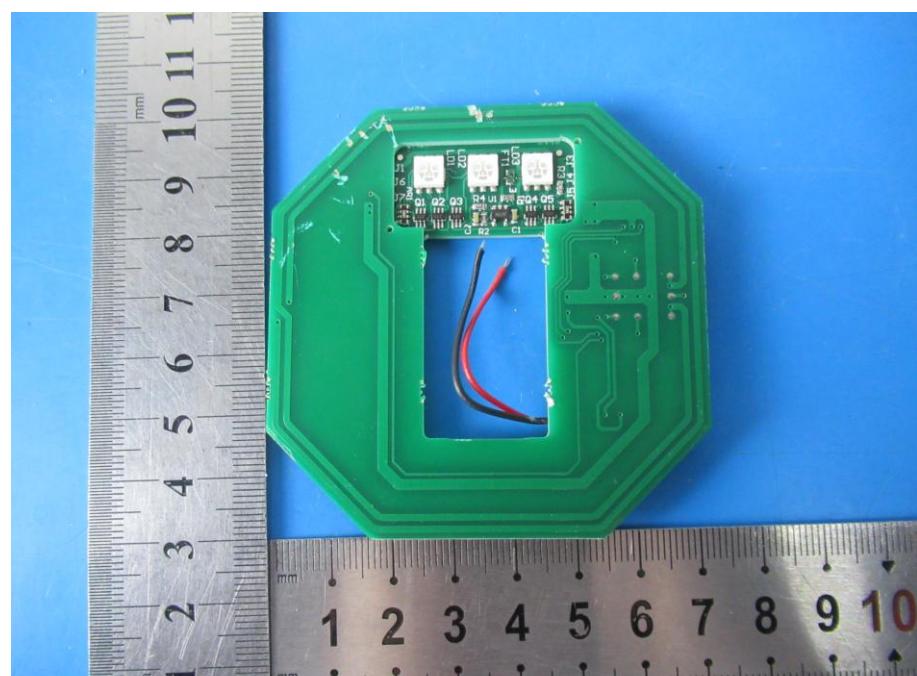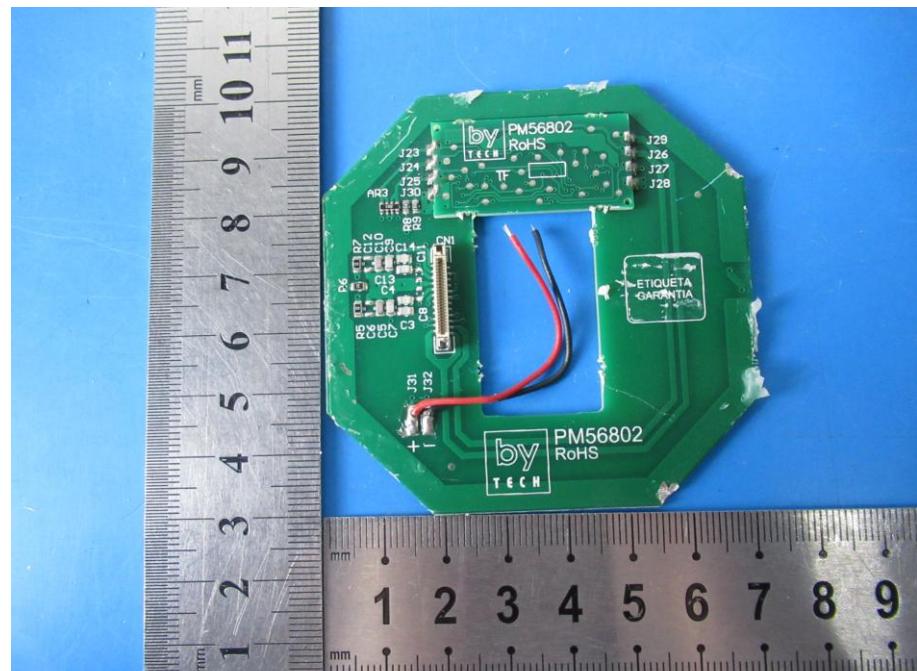

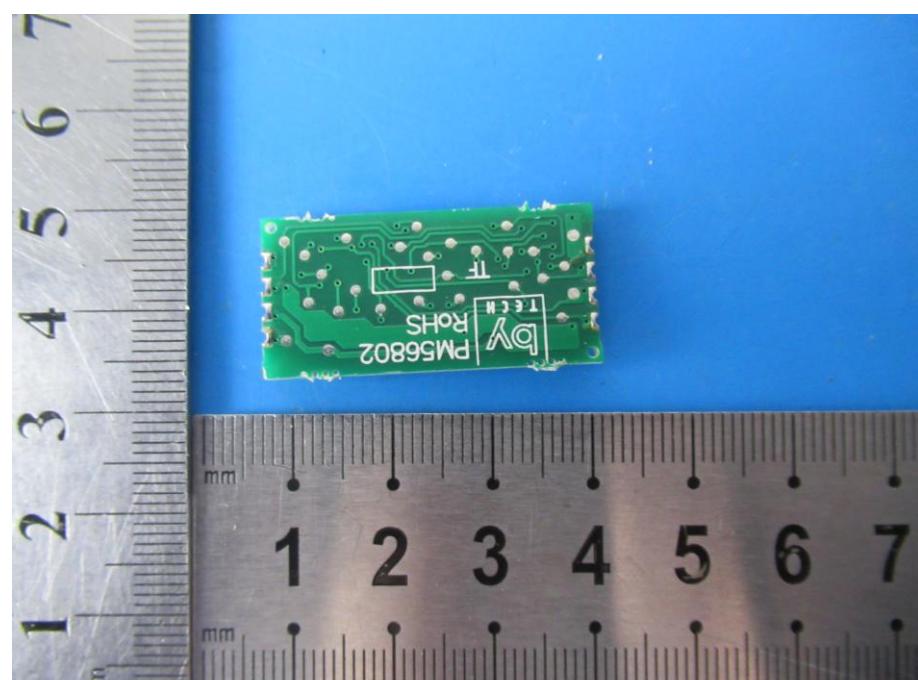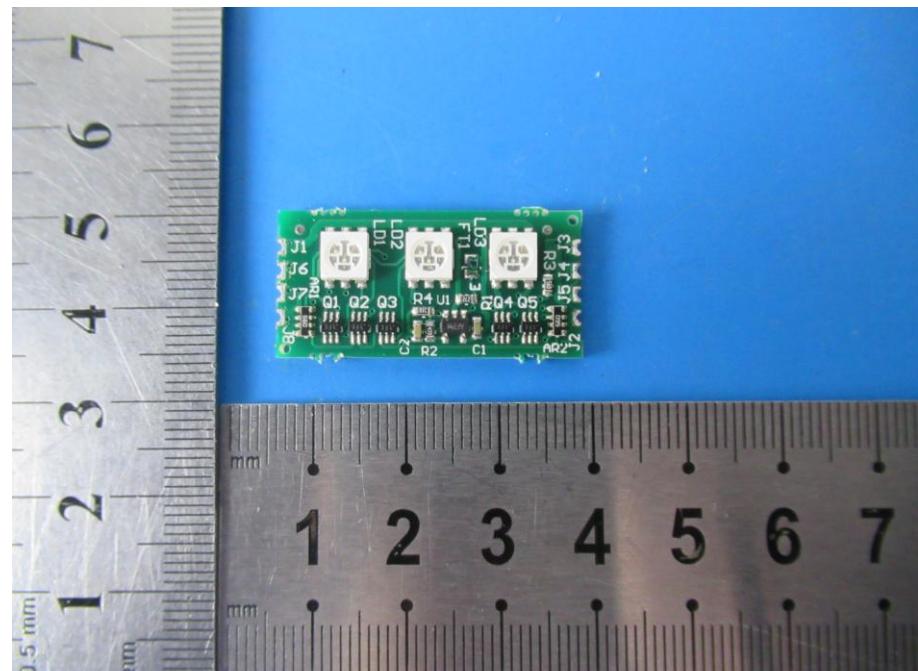

----END OF REPORT----