



Test Report

FCC ID: 2ART3-S10

IC: 34152-S10

Applicant: Shenzhen Lonsdor Technology Co., Ltd.

Address: No.201-203,Block B3,Fuhai B3 Industrial Zone,Fuhai Ave,FuyongSt.,Bao'an,Shenzhen, China

Manufacturer: Shenzhen Lonsdor Technology Co., Ltd.

Address: No.201-203,Block B3,Fuhai B3 Industrial Zone,Fuhai Ave,FuyongSt.,Bao'an,Shenzhen, China

EUT: LTPSEER

Trade Mark: LONSDOR

Model Number: S10

Date of Receipt: May 12, 2025

Test Date: May 16, 2025 - July 17, 2025

Date of Report: July 17, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC PART 15 C 15.231

Applicable Standards: ANSI C63.10:2013

RSS-210 Issue 11: June 2024

RSS-Gen Issue 5 Amendment 2, February 2021

Test Result: Pass

Report Number: DLE-250605001R

Prepared by(Engineer): Ken Tan

Reviewer(Supervisor): Jack Bu

Approved(Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents

Page

1. SUMMARY OF TEST RESULTS	4
MEASUREMENT UNCERTAINTY	4
2. GENERAL INFORMATION	5
GENERAL DESCRIPTION OF EUT	5
DESCRIPTION OF TEST MODES	5
BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	6
DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	6
TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	6
EQUIPMENTS LIST FOR ALL TEST ITEMS	7
3. EMC EMISSION TEST	8
CONDUCTED EMISSION MEASUREMENT	8
POWER LINE CONDUCTED EMISSION Limits	8
TEST PROCEDURE	8
DEVIATION FROM TEST STANDARD	8
TEST SETUP	9
EUT OPERATING CONDITIONS	9
TEST RESULTS	9
RADIATED EMISSION MEASUREMENT	10
RADIATED EMISSION LIMITS	10
TEST PROCEDURE	11
DEVIATION FROM TEST STANDARD	11
TEST SETUP	12
EUT OPERATING CONDITIONS	13
TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	14
TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	15
TEST RESULTS (1GHZ TO 10TH HARMONICS)	24
4. BANDWIDTH TEST	28
APPLIED PROCEDURES / LIMIT	28
TEST PROCEDURE	28
DEVIATION FROM STANDARD	28
TEST SETUP	28
EUT OPERATION CONDITIONS	28
TEST RESULTS	29
5. CALCULATION OF AVERAGE FACTOR	31
APPLIED PROCEDURES / LIMIT	31
TEST PROCEDURE	31
TEST SETUP	31



Table of Contents	Page
EUT OPERATION CONDITIONS	31
TEST RESULTS	32
6. TRANSMISSION CEASE TIME	36
APPLIED PROCEDURES / LIMIT	36
TEST PROCEDURE	36
DEVIATION FROM STANDARD	36
TEST SETUP	36
EUT OPERATION CONDITIONS	36
TEST RESULTS	37
7. ANTENNA REQUIREMENT	39
STANDARD REQUIREMENT	39
EUT ANTENNA	39
8. TEST SEUUP PHOTO	40
9. EUT PHOTO	40



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.231) , Subpart C RSS-210 Issue 11: June 2024 RSS-Gen Issue 5 Amendment 2, February 2021			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-Gen 8.8	Conducted Emission	N/A	
15.209,15.231e RSS-210 Clause A.1.3(b)& RSS-Gen Clause 8.9&8.10	Fundamental & Radiated Spurious Emission Measurement	PASS	
FCC Part15(15.231(e)) RSS-210.A1.5(b)	Transmission cease time	PASS	
FCC Part15 (15.231) , Subpart C RSS-210 A.1.4, RSS-Gen.6.7	20dB Bandwidth 99% Occupied bandwidth	PASS	
15.203 RSS-Gen 6.8	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1
Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.42\text{dB}$
3	Spurious emissions, conducted	$\pm 2.76\text{dB}$
4	All emissions, radiated (<1G)	$\pm 3.65\text{dB}$
5	All emissions, radiated (>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$
8	Bandwidth	$\pm 0.2\text{MHz}$
9	Time	$\pm 2\%$



2. GENERAL INFORMATION

GENERAL DESCRIPTION OF EUT

Product Name:	LTPSEER
Trademark	LONSDOR
Model No.:	S10
Test sample No. :	315 & 433.92 TX:DLE-250605001R-1
Operation Frequency:	433.92MHz 315MHz
Channel numbers:	2 Channels
Modulation technology:	433.92MHz: ASK&FSK 315MHz: ASK&FSK
Antenna Type:	Internal antenna
Antenna gain:	0dBi
Power supply:	DC 3.0V by battery
HVIN:	S10

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.

DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Keep the EUT in 315M transmitting with modulation
Mode 2	Keep the EUT in 433M transmitting with modulation
For Radiated Emission	
Final Test Mode	Description
Mode 1	Keep the EUT in 315M transmitting with modulation
Mode 2	Keep the EUT in 433M transmitting with modulation

Note:

- (1) New battery is used during the test

**BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

Radiated Spurious Emission Test

**DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	LTPSEER	S10	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

None.

**EQUIPMENTS LIST FOR ALL TEST ITEMS****Radiation test, Band-edge test and 20db bandwidth test equipment**

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	Temperature & humidity chamber	Changfeng	CF-150-40-P	CF170802-01	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

CONDUCTED EMISSION MEASUREMENT

POWER LINE CONDUCTED EMISSION Limits

(Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

DEVIATION FROM TEST STANDARD

No deviation

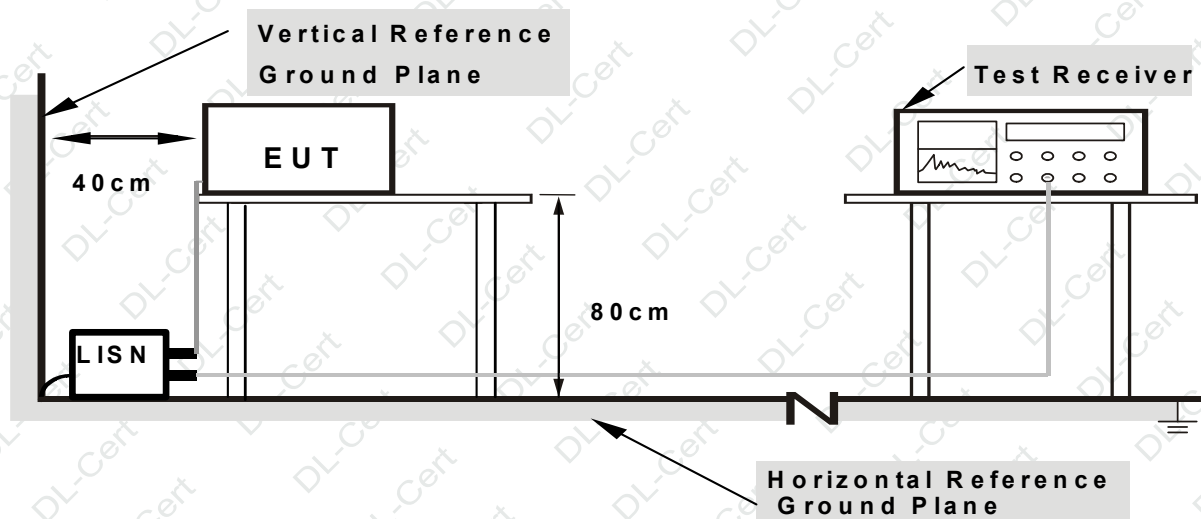**TEST SETUP**

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

TEST RESULTS

The EUT is powered by DC, no requirements for this item.

**RADIATED EMISSION MEASUREMENT****RADIATED EMISSION LIMITS****(Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (micromvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
40.66-40.70 MHz	1000	100
70-130 MHz	500	50
130-174 MHz	500-1500	50-150
174-260 MHz	1500	150
260-470 MHz	1500-5000	150-500
Above 470 MHz	5000	500

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $22.7273(F) - 2454.5455$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $16.6667(F) - 2833.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = $20 \log$ Emission level ($\mu\text{V/m}$).
- (4) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.



Receiver setup:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:



- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


DEVIATION FROM TEST STANDARD

No deviation

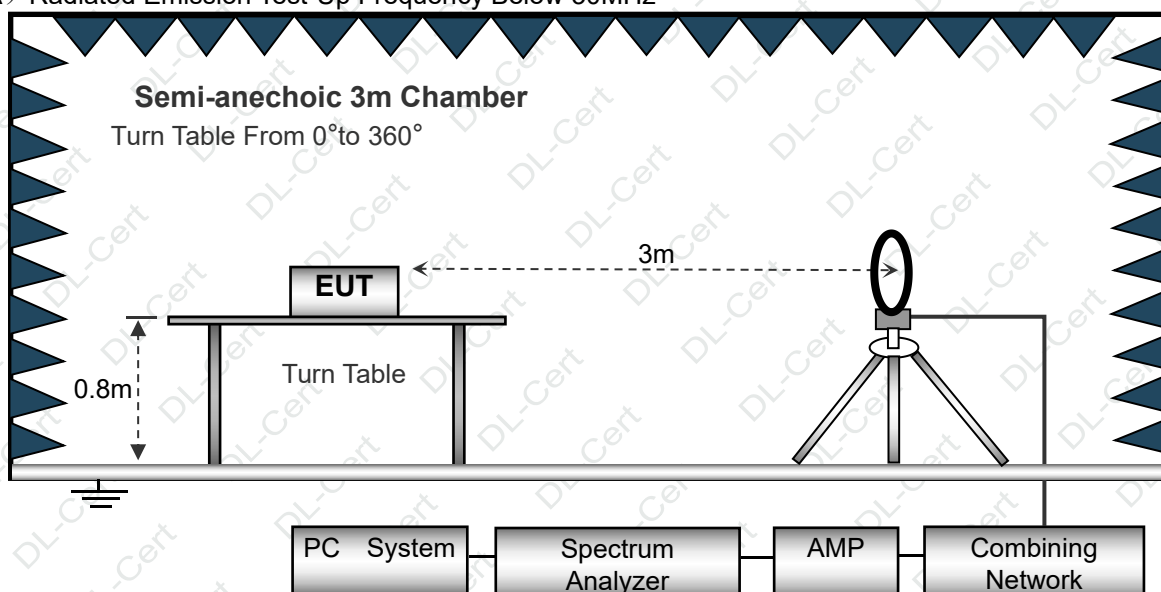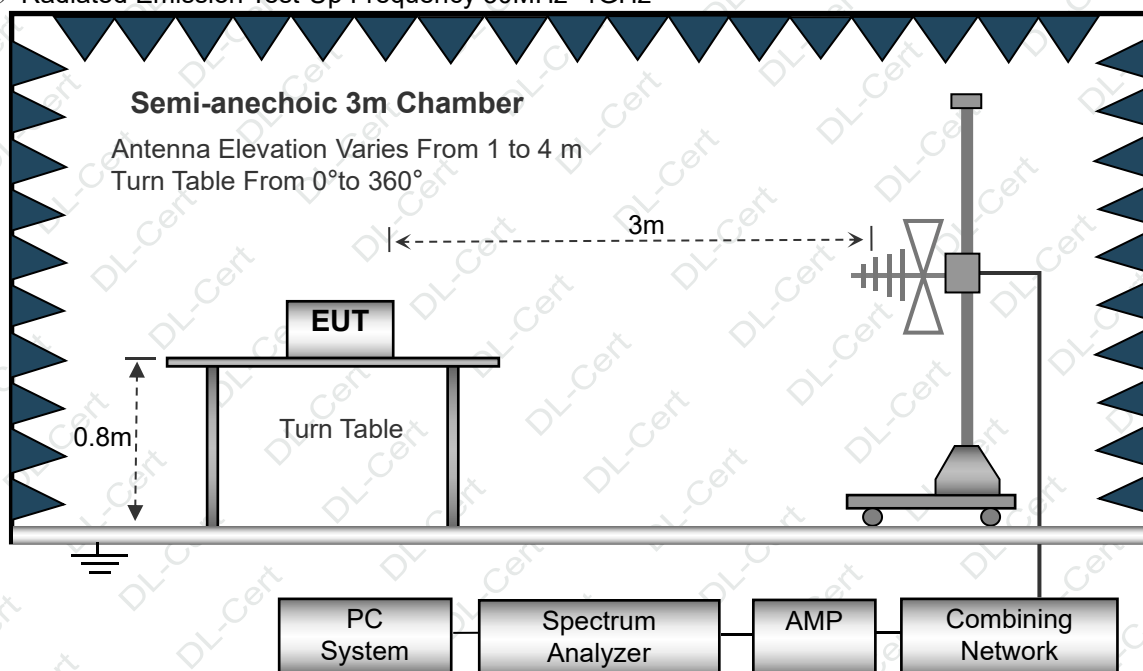**TEST SETUP****(A) Radiated Emission Test-Up Frequency Below 30MHz****(B) Radiated Emission Test-Up Frequency 30MHz~1GHz**



(C) Radiated Emission Test-Up Frequency Above 1GHz

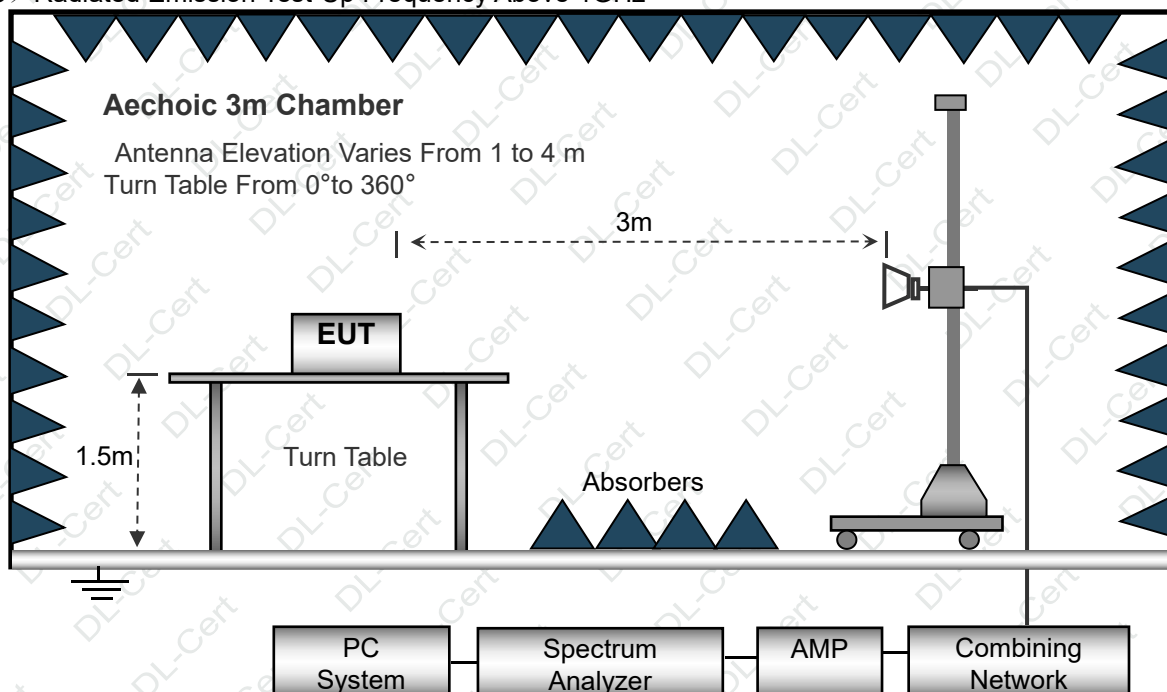**EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3V
Test Mode :	Mode 1	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3V		
Test Mode :	Mode 1 for 315MHz for ASK		

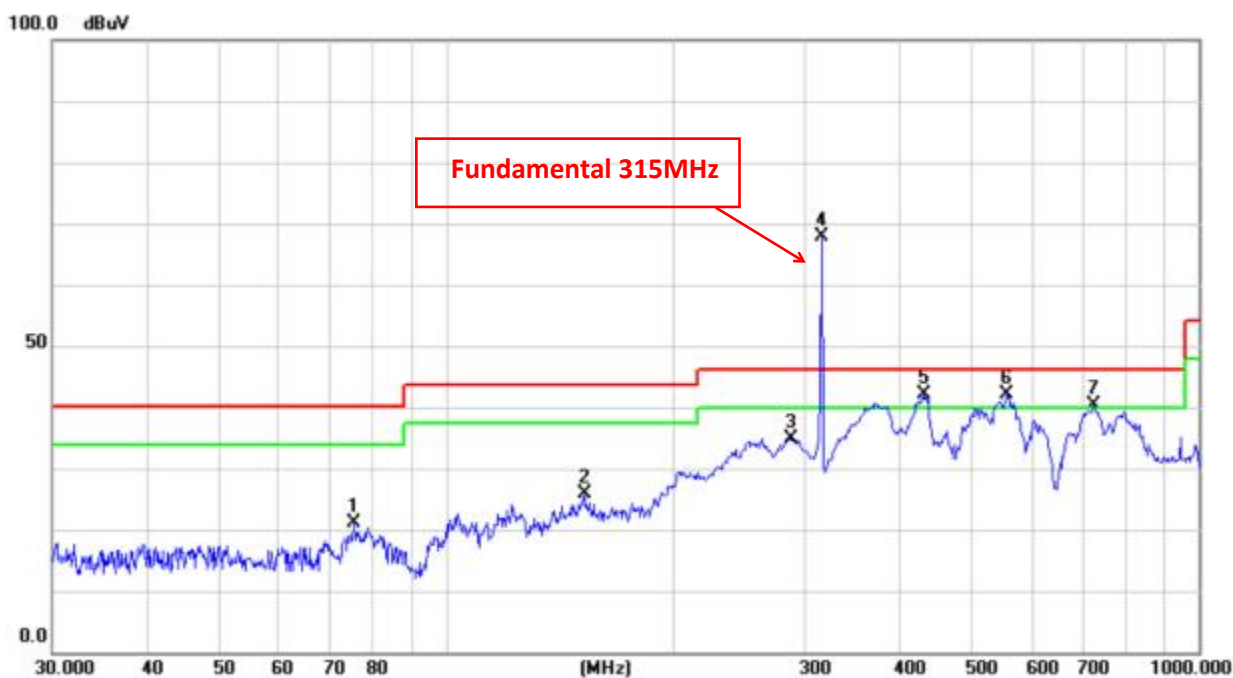

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV	dBuV	dB
1		75.4462	34.85	-13.63	21.22	40.00	-18.78
2		152.6640	35.75	-9.78	25.97	43.50	-17.53
3		287.9904	46.02	-11.06	34.96	46.00	-11.04
4	*	315.00	78.23	-10.29	67.94	87.66	19.72
5	!	431.0314	49.70	-7.46	42.24	46.00	-3.76
6	!	554.8253	46.10	-3.93	42.17	46.00	-3.83
7	!	726.8052	42.34	-1.96	40.38	46.00	-5.62


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3V		
Test Mode :	Mode 1 for 315MHz for ASK		

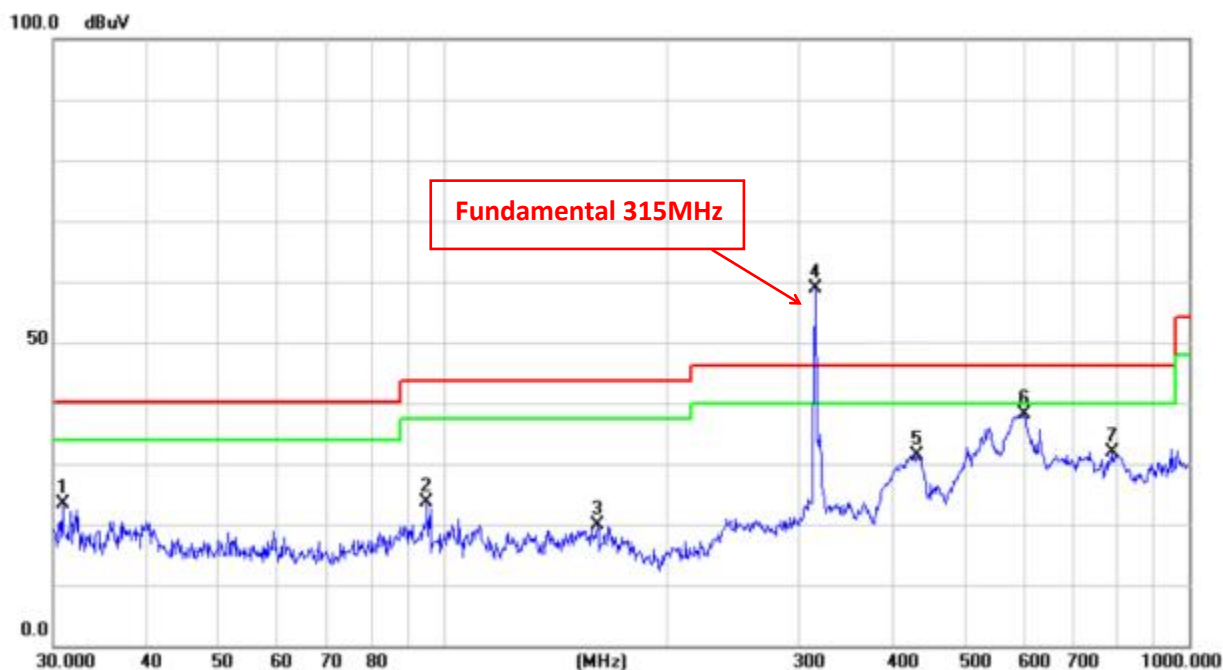

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		30.8534	34.14	-10.75	23.39	40.00	-16.61	QP
2		95.0930	37.59	-13.93	23.66	43.50	-19.84	QP
3		160.9090	29.98	-10.12	19.86	43.50	-23.64	QP
4	*	315.00	69.18	-10.29	58.89	87.66	28.77	peak
5		431.0315	38.73	-7.46	31.27	46.00	-14.73	QP
6		601.4265	40.64	-2.47	38.17	46.00	-7.83	QP
7		787.8512	32.58	-0.59	31.99	46.00	-14.01	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3V		
Test Mode :	Mode 1 for 315MHz for FSK		

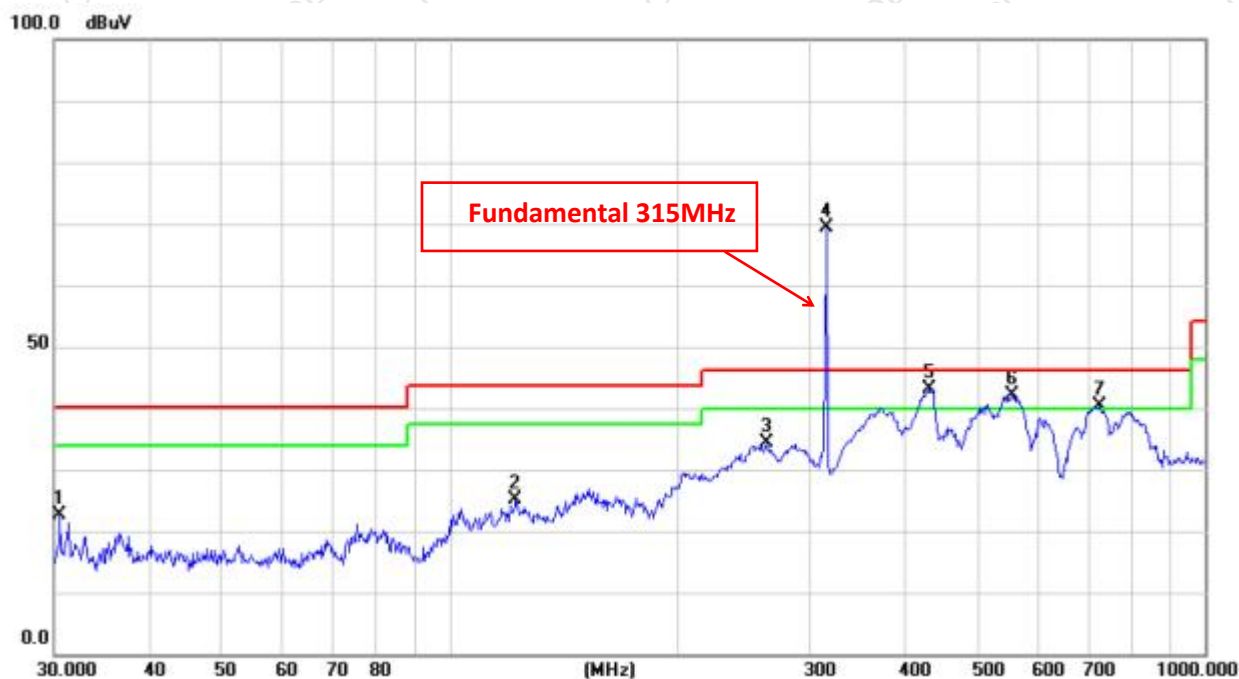

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		30.5304	33.47	-10.85	22.62	40.00	-17.38	QP
2		122.4040	36.10	-10.97	25.13	43.50	-18.37	QP
3		262.8955	46.06	-11.71	34.35	46.00	-11.65	QP
4	*	315.00	79.73	-10.29	69.44	87.66	18.22	peak
5	!	431.0315	50.70	-7.46	43.24	46.00	-2.76	QP
6	!	554.8254	46.10	-3.93	42.17	46.00	-3.83	QP
7	!	726.8052	42.46	-1.96	40.50	46.00	-5.50	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3V		
Test Mode :	Mode 1 for 315MHz for FSK		

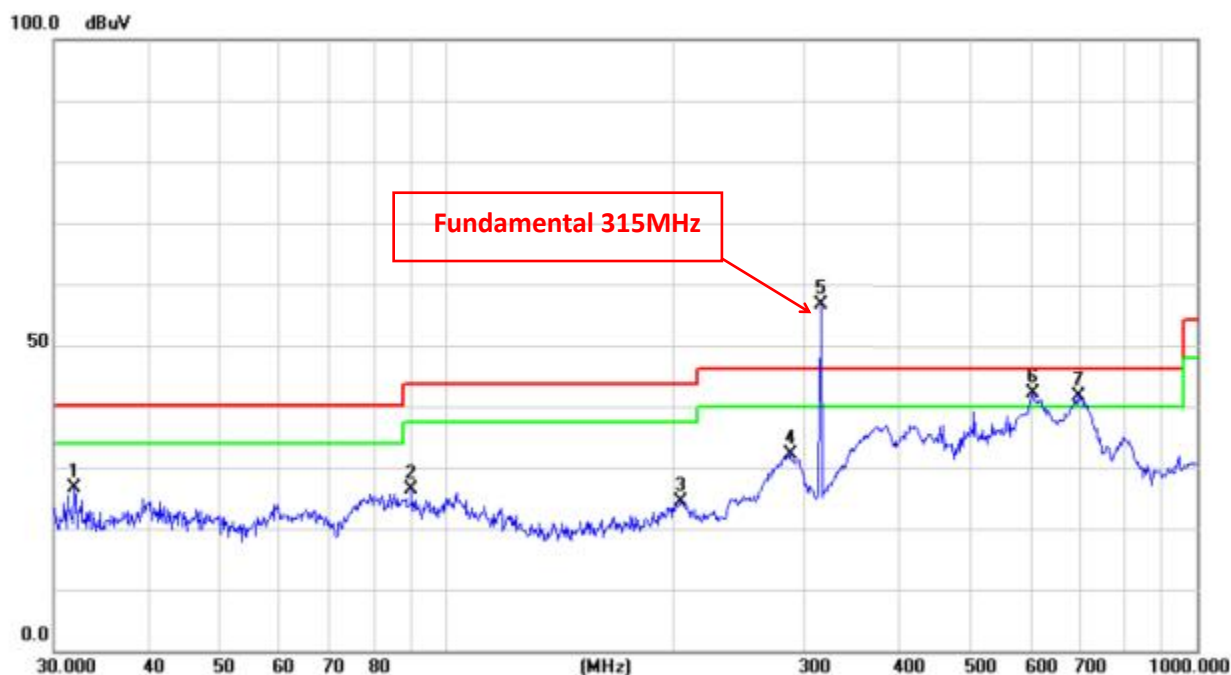

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		31.9544	38.07	-11.37	26.70	40.00	-13.30	QP
2		89.9046	40.82	-14.39	26.43	43.50	-17.07	QP
3		204.9550	36.53	-12.23	24.30	43.50	-19.20	QP
4		286.9823	43.16	-10.97	32.19	46.00	-13.81	QP
5	*	315.00	66.88	-10.29	56.59	87.66	31.07	peak
6	!	605.6592	45.02	-2.78	42.24	46.00	-3.76	QP
7	!	694.4174	44.34	-2.61	41.73	46.00	-4.27	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3V		
Test Mode :	Mode 2 for 433MHz for ASK		

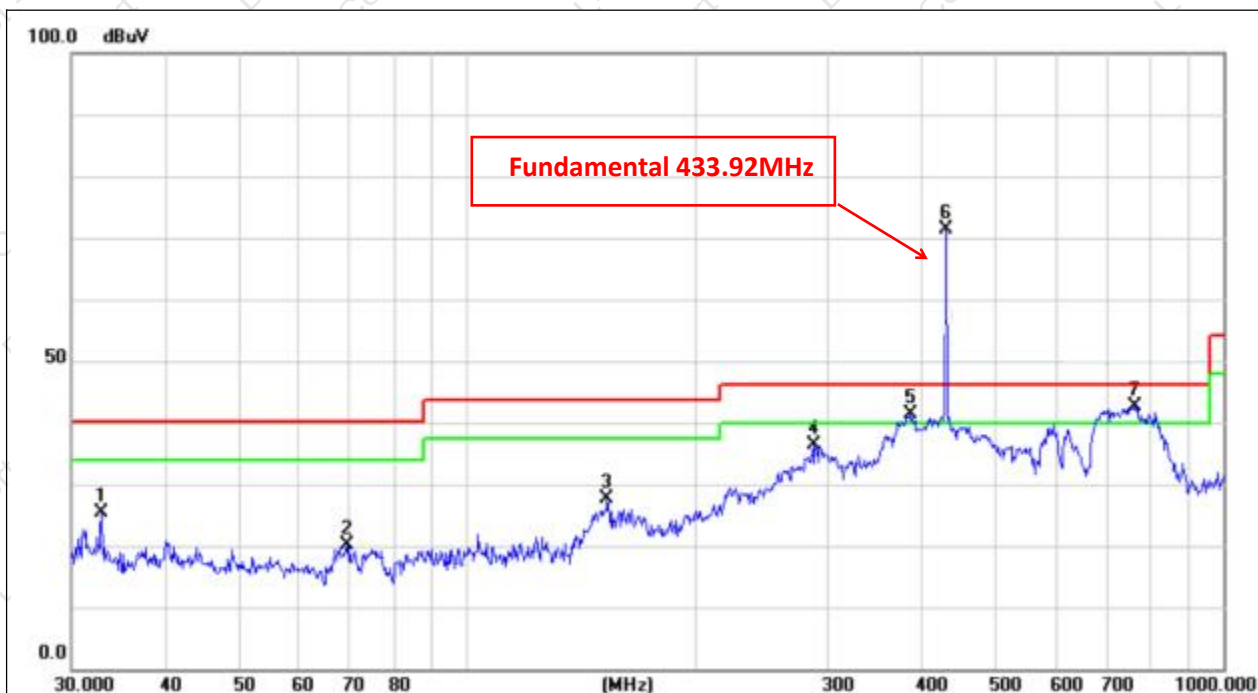

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		32.8635	36.70	-11.40	25.30	40.00	-14.70	QP
2		69.3568	33.03	-12.80	20.23	40.00	-19.77	QP
3		153.2000	37.65	-9.97	27.68	43.50	-15.82	QP
4		287.9904	47.32	-11.06	36.26	46.00	-9.74	QP
5	!	385.2803	49.13	-7.73	41.40	46.00	-4.60	QP
6	*	433.92	79.14	-6.92	72.22	92.87	20.65	peak
7	!	763.3757	44.09	-1.39	42.70	46.00	-3.30	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3V		
Test Mode :	Mode 2 for 433MHz for ASK		

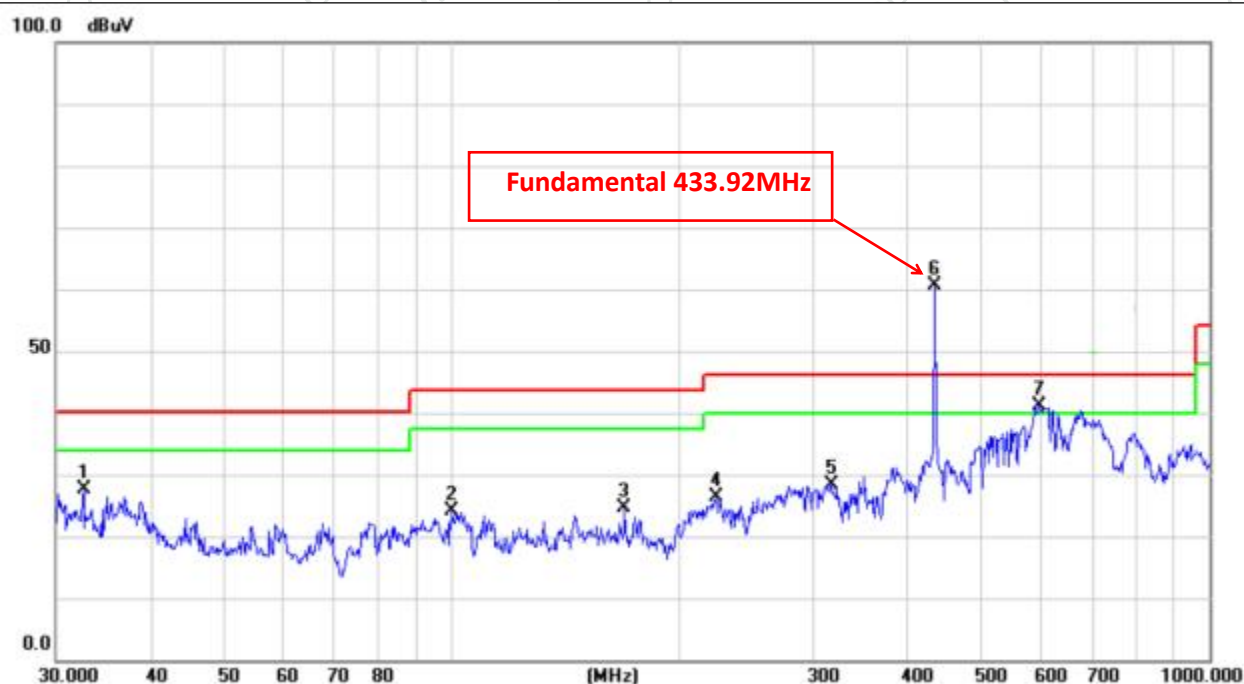

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		32.6340	38.96	-11.40	27.56	40.00	-12.44	QP
2		99.8777	37.88	-13.85	24.03	43.50	-19.47	QP
3		169.0053	34.38	-9.69	24.69	43.50	-18.81	QP
4		222.9500	39.41	-13.07	26.34	46.00	-19.66	QP
5		316.5890	38.58	-10.11	28.47	46.00	-17.53	QP
6	*	433.92	67.65	-6.92	60.73	92.87	32.14	peak
7	!	595.1326	44.56	-3.47	41.09	46.00	-4.91	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3V		
Test Mode :	Mode 2 for 433MHz for FSK		

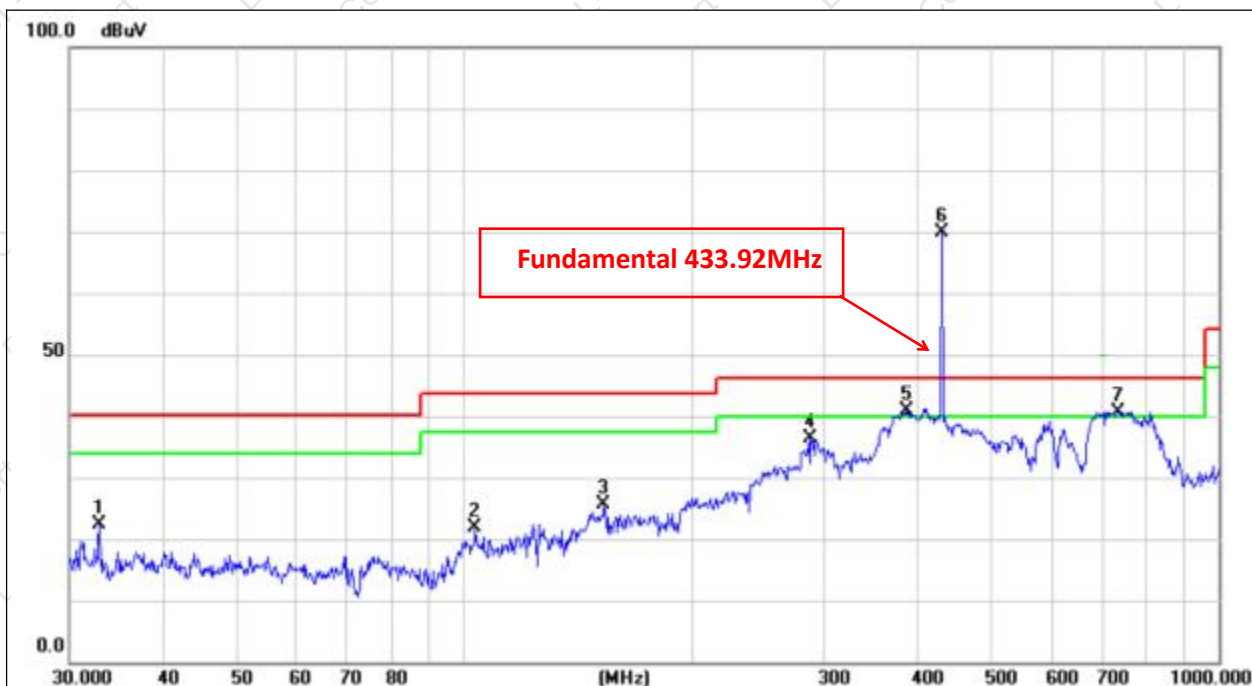

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		32.8635	33.70	-11.40	22.30	40.00	-17.70	QP
2		103.4420	35.38	-13.41	21.97	43.50	-21.53	QP
3		153.2002	35.65	-9.97	25.68	43.50	-17.82	QP
4		287.9904	47.32	-11.06	36.26	46.00	-9.74	QP
5	!	385.2803	48.63	-7.73	40.90	46.00	-5.10	QP
6	*	433.92	77.64	-6.92	70.72	92.87	22.15	peak
7	!	737.0712	41.69	-0.95	40.74	46.00	-5.26	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3V		
Test Mode :	Mode 2 for 433MHz for FSK		

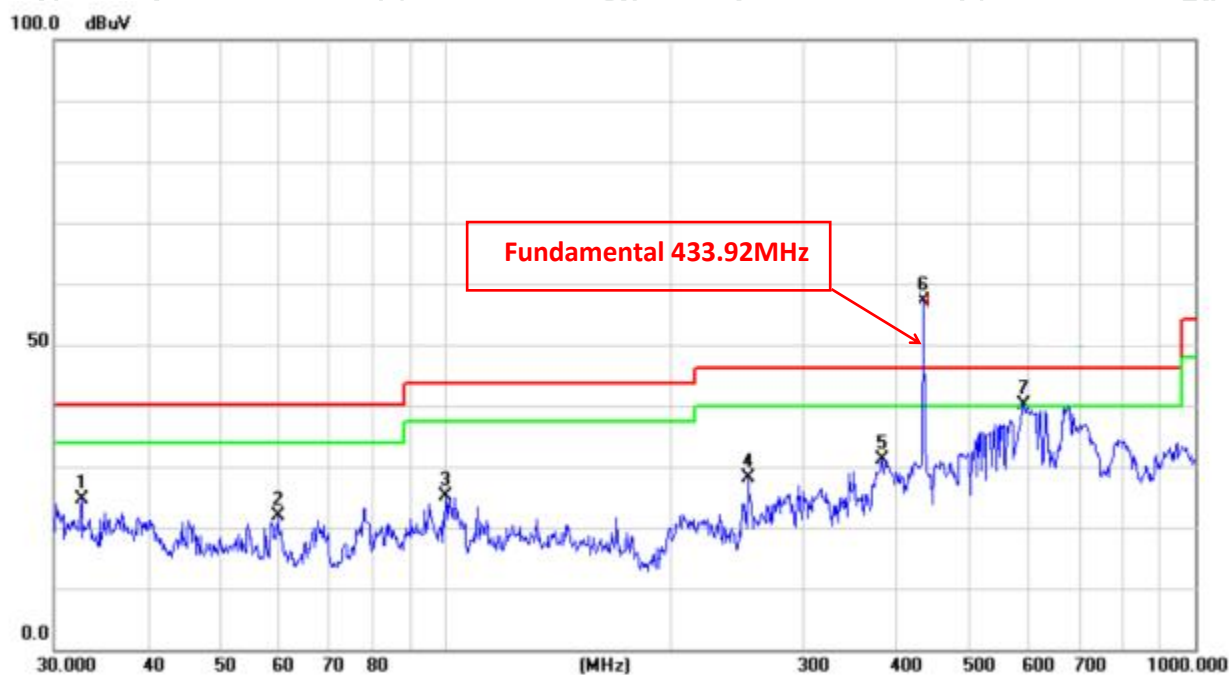

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		32.6340	35.96	-11.40	24.56	40.00	-15.44	QP
2		59.6493	33.03	-11.26	21.77	40.00	-18.23	QP
3		99.8777	38.88	-13.85	25.03	43.50	-18.47	QP
4		252.9481	40.06	-12.03	28.03	46.00	-17.97	QP
5		382.5878	39.49	-8.37	31.12	46.00	-14.88	QP
6	*	433.92	64.15	-6.92	57.23	92.87	35.64	peak
7	!	590.9737	44.05	-3.98	40.07	46.00	-5.93	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Field Strength of Fundamental

Modulation TYPE	Frequency MHz	Read Level dBuV/m	Correct factor	Peak Level dBuV/m	Polarization	Limit PK	Margin
ASK	315	78.23	-10.29	67.94	Horizontal	87.66	-19.72
ASK	315	69.18	-10.29	58.89	Vertical	87.66	-28.77
FSK	315	79.73	-10.29	69.44	Horizontal	87.66	-18.22
FSK	315	66.88	-10.29	56.59	Vertical	87.66	-31.07
ASK	433.92	67.65	-6.92	60.73	Vertical	92.87	-32.14
ASK	433.92	79.14	-6.92	72.22	Horizontal	92.87	-20.65
FSK	433.92	77.64	-6.92	70.72	Horizontal	92.87	-22.15
FSK	433.92	64.15	-6.92	57.23	Vertical	92.87	-35.64

Modulation TYPE	Frequency MHz	Peak Level dBuV/m	Duty cycle factor	AverageLevel dBuV/m	Polarization	Limit AV	Margin
ASK	315	67.94	-14.42	53.52	Horizontal	67.66	-14.14
ASK	315	58.89	-14.42	44.47	Vertical	67.66	-23.19
FSK	315	69.44	-25.35	44.09	Horizontal	67.66	-23.57
FSK	315	56.59	-25.35	31.24	Vertical	67.66	-36.42
ASK	433.92	72.22	-15.39	56.83	Horizontal	72.87	-16.04
ASK	433.92	60.73	-15.39	45.34	Vertical	72.87	-27.53
FSK	433.92	57.23	-19.91	37.32	Vertical	72.87	-35.55
FSK	433.92	70.72	-19.91	50.81	Horizontal	72.87	-22.06

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

**TEST RESULTS (1GHZ TO 10TH HARMONICS)****ASK****315MHz**

Polar (H/V)	Frequency	Read Reading Level	Correct Factor	Peak Level	Duty cycle factor	Average Level	Limits PK	Limits AV	Margin PK	Margin AV
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dB)	(dB)		
operation frequency:315										
V	1260.12	57.28	-21.97	35.31	-14.42	20.89	74.00	54.00	-38.69	-33.11
V	1575.42	66.56	-21.97	44.59	-14.42	30.17	74.00	54.00	-29.41	-23.83
V	1890.61	65.61	-17.41	48.2	-14.42	33.78	74.00	54.00	-25.8	-20.22
V	2205.67	64.23	-17.41	46.82	-14.42	32.4	74.00	54.00	-27.18	-21.6
V	2520.72	52.30	-2.63	49.67	-14.42	35.25	74.00	54.00	-24.33	-18.75
V	2835.64	51.38	-2.63	48.75	-14.42	34.33	74.00	54.00	-25.25	-19.67
H	1260.41	58.70	-21.97	36.73	-14.42	22.31	74.00	54.00	-37.27	-31.69
H	1575.36	65.47	-21.97	43.5	-14.42	29.08	74.00	54.00	-30.5	-24.92
H	1890.47	63.76	-17.41	46.35	-14.42	31.93	74.00	54.00	-27.65	-22.07
H	2205.46	64.17	-17.41	46.76	-14.42	32.34	74.00	54.00	-27.24	-21.66
H	2520.05	50.25	-2.63	47.62	-14.42	33.2	74.00	54.00	-26.38	-20.8
H	2835.36	49.28	-2.63	46.65	-14.42	32.23	74.00	54.00	-27.35	-21.77

Remark:

1. PK Emission Level = Peak Reading Level + Correct Factor
2. Correct Factor= Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 5.

3. Pulse Desensitization Correction Factor

Pulse Width (PW) = 46.26ms

$2/PW = 2/46.26\text{ms} = 0.04\text{kHz}$

RBW (100 kHz) > 2/PW (0.04kHz)

Therefore PDCF is not needed



FSK

315MHz

Polar (H/V)	Frequency	Peak Reading Level	Correct Factor	Peak Level	Duty cycle factor	Average Level	Limits PK	Limits AV	Margin PK	Margin AV
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dB)	(dB)		
operation frequency:315										
V	1260.12	57.04	-21.97	35.07	-25.35	9.72	74.00	54.00	-38.93	-44.28
V	1575.42	66.32	-21.97	44.35	-25.35	19.00	74.00	54.00	-29.65	-35.00
V	1890.61	65.37	-17.41	47.96	-25.35	22.61	74.00	54.00	-26.04	-31.39
V	2205.67	63.99	-17.41	46.58	-25.35	21.23	74.00	54.00	-27.42	-32.77
V	2520.72	52.06	-2.63	49.43	-25.35	24.08	74.00	54.00	-24.57	-29.92
V	2835.64	51.14	-2.63	48.51	-25.35	23.16	74.00	54.00	-25.49	-30.84
H	1260.41	58.46	-21.97	36.49	-25.35	11.14	74.00	54.00	-37.51	-42.86
H	1575.36	65.23	-21.97	43.26	-25.35	17.91	74.00	54.00	-30.74	-36.09
H	1890.47	63.52	-17.41	46.11	-25.35	20.76	74.00	54.00	-27.89	-33.24
H	2205.46	63.93	-17.41	46.52	-25.35	21.17	74.00	54.00	-27.48	-32.83
H	2520.05	50.01	-2.63	47.38	-25.35	22.03	74.00	54.00	-26.62	-31.97
H	2835.36	49.04	-2.63	46.41	-25.35	21.06	74.00	54.00	-27.59	-32.94

Remark:

3. PK Emission Level = Peak Reading Level + Correct Factor
4. Correct Factor= Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 5.

3. Pulse Desensitization Correction Factor

Pulse Width (PW) = 46.26ms

$2/PW = 2/46.26\text{ms} = 0.04\text{kHz}$

RBW (100 kHz) > 2/PW (0.04kHz)

Therefore PDCF is not needed

**ASK****433.92MHz**

Polar (H/V)	Frequency	Peak Reading Level	Correct Factor	Peak Level	Duty cycle factor	Average Level	Limits PK	Limits AV	Margin PK	Margin AV
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dB)	(dB)		
operation frequency:433.92										
V	1301.76	56.31	-21.97	34.34	-15.39	18.95	74.00	54.00	-39.66	-35.05
V	1735.68	65.59	-21.97	43.62	-15.39	28.23	74.00	54.00	-30.38	-25.77
V	2169.6	64.64	-17.41	47.23	-15.39	31.84	74.00	54.00	-26.77	-22.16
V	2603.52	63.26	-17.41	45.85	-15.39	30.46	74.00	54.00	-28.15	-23.54
V	3037.44	51.33	-2.63	48.7	-15.39	33.31	74.00	54.00	-25.3	-20.69
V	3471.36	50.41	-2.63	47.78	-15.39	32.39	74.00	54.00	-26.22	-21.61
H	1301.76	57.73	-21.97	35.76	-15.39	20.37	74.00	54.00	-38.24	-33.63
H	1735.68	64.5	-21.97	42.53	-15.39	27.14	74.00	54.00	-31.47	-26.86
H	2169.6	62.79	-17.41	45.38	-15.39	29.99	74.00	54.00	-28.62	-24.01
H	2603.52	63.2	-17.41	45.79	-15.39	30.4	74.00	54.00	-28.21	-23.6
H	3037.44	49.28	-2.63	46.65	-15.39	31.26	74.00	54.00	-27.35	-22.74
H	3471.36	48.31	-2.63	45.68	-15.39	30.29	74.00	54.00	-28.32	-23.71

Remark:

5. PK Emission Level = Peak Reading Level + Correct Factor
6. Correct Factor= Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 5.

3. Pulse Desensitization Correction Factor

Pulse Width (PW) = 46.26ms

$2/PW = 2/46.26\text{ms} = 0.04\text{kHz}$

RBW (100 kHz) > 2/PW (0.04kHz)

Therefore PDCF is not needed



FSK

433.92MHz

Polar (H/V)	Frequency	Peak Reading Level	Correct Factor	Peak Level	Duty cycle factor	Average Level	Limits PK	Limits AV	Margin PK	Margin AV
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dB)	(dB)		
operation frequency:433.92										
V	1301.76	56.07	-21.97	34.1	-19.91	14.19	74.00	54.00	-39.90	-39.81
V	1735.68	65.35	-21.97	43.38	-19.91	23.47	74.00	54.00	-30.62	-30.53
V	2169.6	64.4	-17.41	46.99	-19.91	27.08	74.00	54.00	-27.01	-26.92
V	2603.52	63.02	-17.41	45.61	-19.91	25.7	74.00	54.00	-28.39	-28.30
V	3037.44	51.09	-2.63	48.46	-19.91	28.55	74.00	54.00	-25.54	-25.45
V	3471.36	50.17	-2.63	47.54	-19.91	27.63	74.00	54.00	-26.46	-26.37
H	1301.76	57.49	-21.97	35.52	-19.91	15.61	74.00	54.00	-38.48	-38.39
H	1735.68	64.26	-21.97	42.29	-19.91	22.38	74.00	54.00	-31.71	-31.62
H	2169.6	62.55	-17.41	45.14	-19.91	25.23	74.00	54.00	-28.86	-28.77
H	2603.52	62.96	-17.41	45.55	-19.91	25.64	74.00	54.00	-28.45	-28.36
H	3037.44	49.04	-2.63	46.41	-19.91	26.5	74.00	54.00	-27.59	-27.50
H	3471.36	48.07	-2.63	45.44	-19.91	25.53	74.00	54.00	-28.56	-28.47

Remark:

7. PK Emission Level = Peak Reading Level + Correct Factor
8. Correct Factor= Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 5.

3. Pulse Desensitization Correction Factor

Pulse Width (PW) = 46.26ms

 $2/PW = 2/46.26\text{ms} = 0.04\text{kHz}$

RBW (100 kHz) > 2/PW (0.04kHz)

Therefore PDCF is not needed



4. BANDWIDTH TEST

APPLIED PROCEDURES / LIMIT

FCC Part15 (15.231) , Subpart C RSS-210 A.1.4, RSS-Gen.6.7	
Section	Description
15.231C 247.5.1(a) RSS-210 A.1.4 & RSS-Gen Clause 6.7	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. B. $W(20dBc) \text{ Limit} = 0.25\% * f(\text{MHz}) = 0.25\% * 433.92\text{MHz} = 1.0848\text{MHz}$ C. $W(20dBc) \text{ Limit} = 0.25\% * f(\text{MHz}) = 0.25\% * 315\text{MHz} = 0.7875\text{MHz}$

TEST PROCEDURE

1. Set RBW = 1%~5% Occupied bandwidth
2. Set VBW = 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

DEVIATION FROM STANDARD

No deviation.

TEST SETUP



EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




TEST RESULTS


433.92MHz:

Modulation TYPE	Frequency (MHz)	Occupied bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Result
ASK	433.92	0.10565	0.0286	1.084	Pass
FSK	433.92	0.11587	0.0873	1.084	Pass

ASK


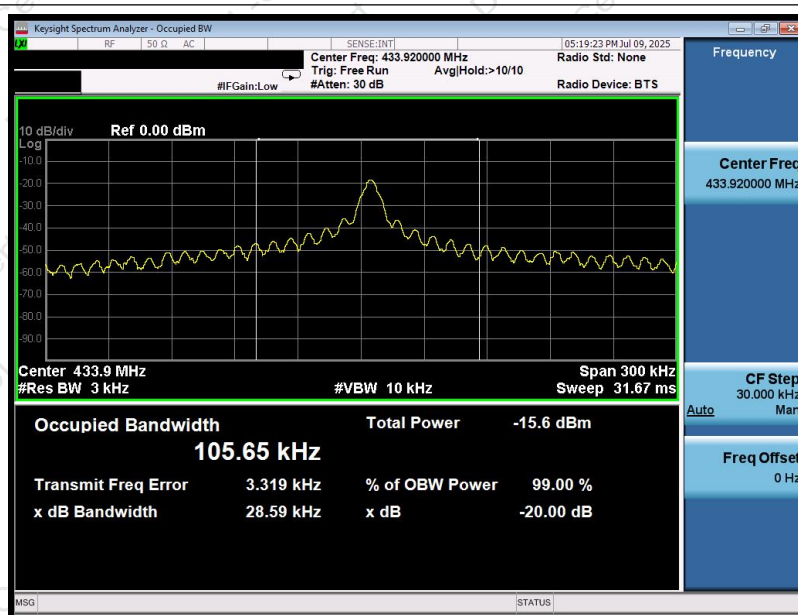


FSK

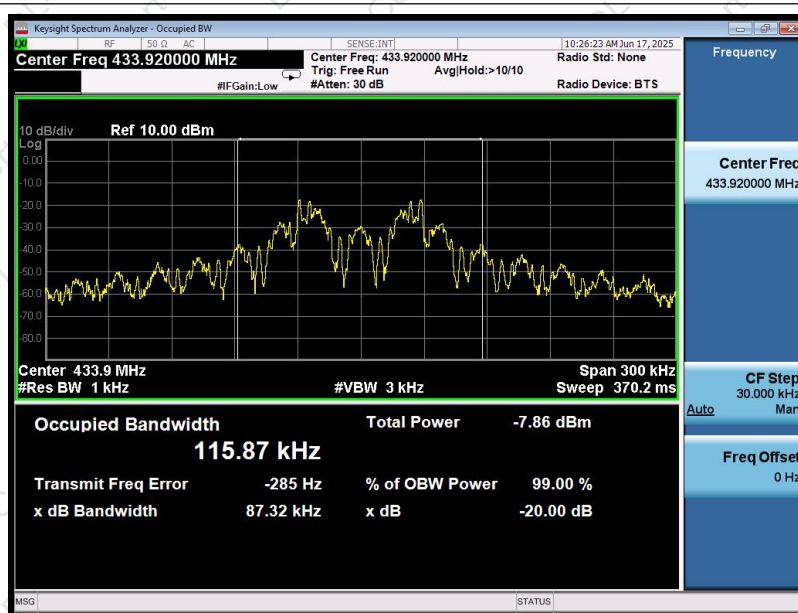

**315MHz:**

Modulation TYPE	Frequency (MHz)	Occupied bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Result
ASK	315	0.083572	0.02842	0.7875	Pass
FSK	315	0.11270	0.11720	0.7875	Pass

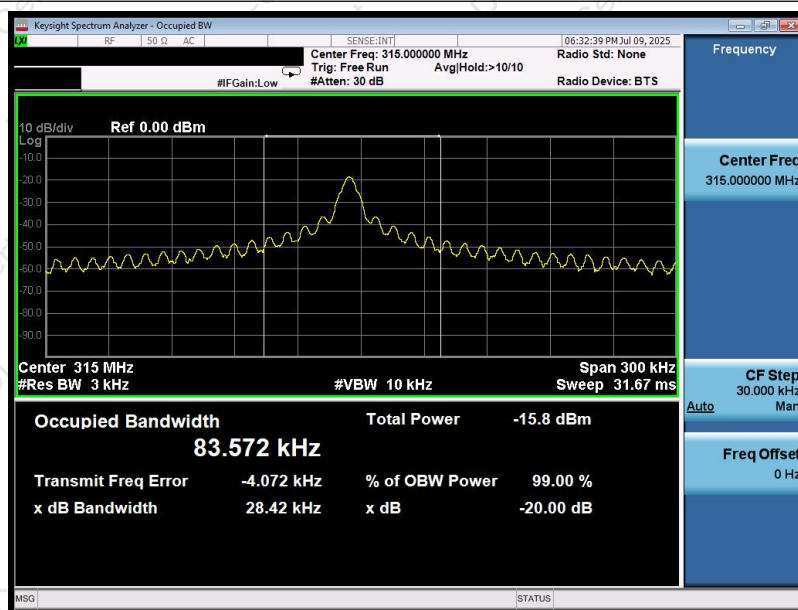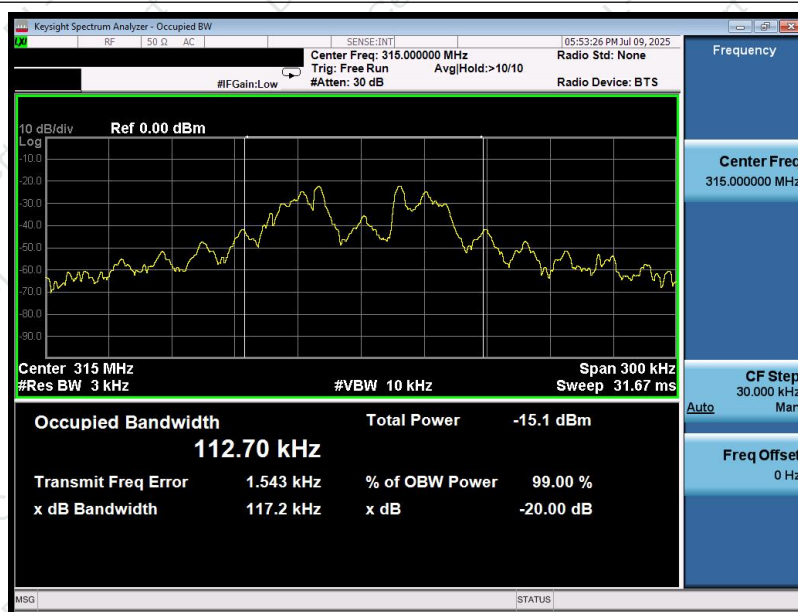ASK**FSK**



5. CALCULATION OF AVERAGE FACTOR

APPLIED PROCEDURES / LIMIT

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame.

The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Detector = Normal.
4. Sweep = auto couple.
5. Allow the trace to stabilize.

TEST SETUP



EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**TEST RESULTS****433.92MHz: FSK**



Duty Cycle= Effective time one cycle/ Total time one cycle

Averaging factor in dB = $20\log(\text{Ton} * (\text{duty cycle}))$

Duty Cycle = $10.10\text{ms}/100\text{ms}=0.101$

Therefore, the averaging factor is found by $20\log 0.101=-19.91\text{dB}$

Test plot as follows:

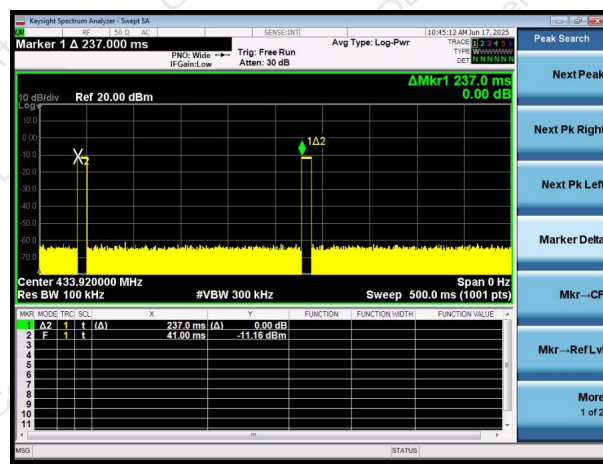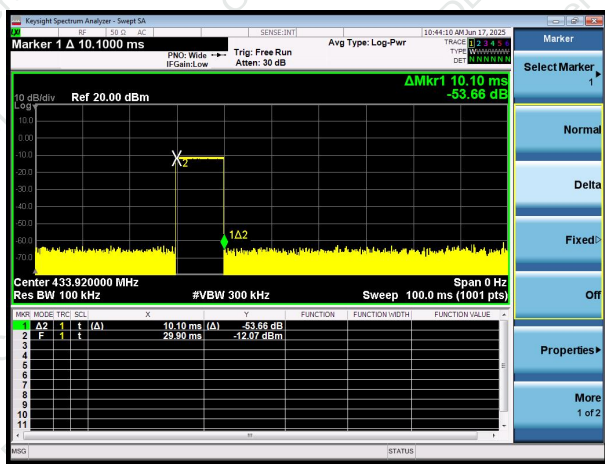

**433.92MHz: ASK**



Duty Cycle= Effective time one cycle/ Total time one cycle

Averaging factor in dB =20log(Ton* (duty cycle))

Duty Cycle = (0.25*18+0.125*83)=14.875ms/88.51ms=0.17

Therefore, the averaging factor is found by 20log0.17=-15.39dB

Test plot as follows:

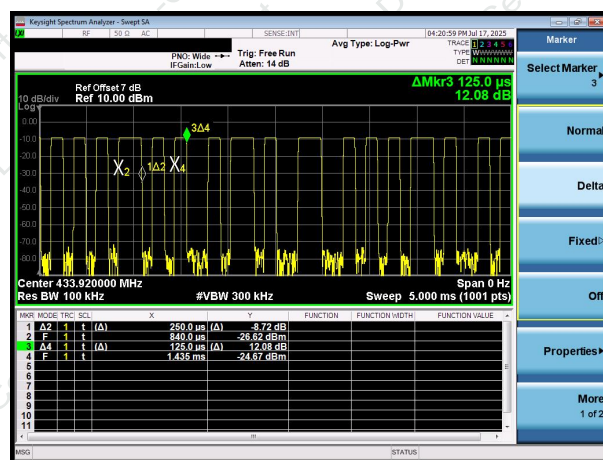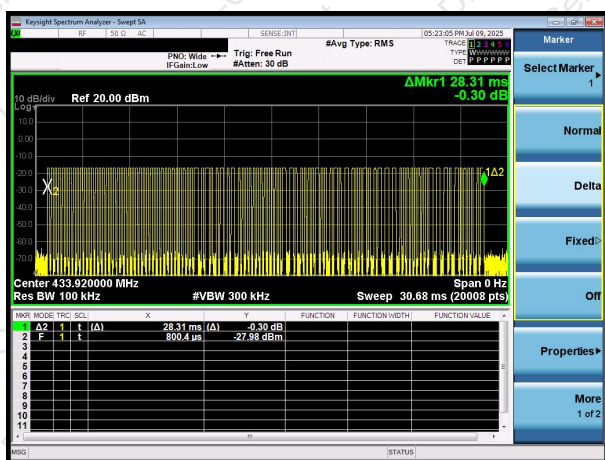

**315MHz: FSK**



Duty Cycle= Effective time one cycle/ Total time one cycle

Averaging factor in dB = $20\log(\text{Ton} * (\text{duty cycle}))$

Duty Cycle = $5.444\text{ms}/100\text{ms}=0.054$

Therefore, the averaging factor is found by $20\log 0.054=-25.35\text{dB}$

Test plot as follows:

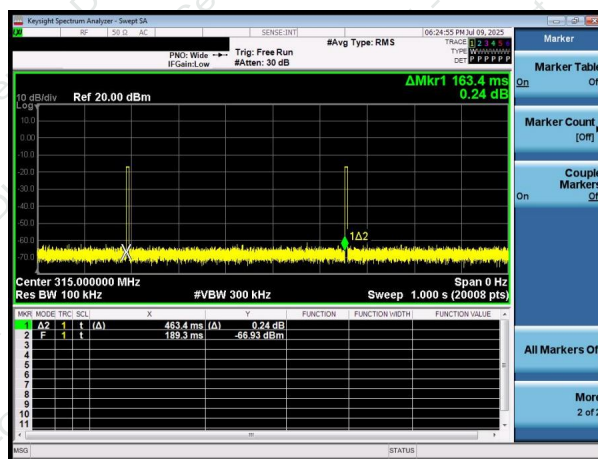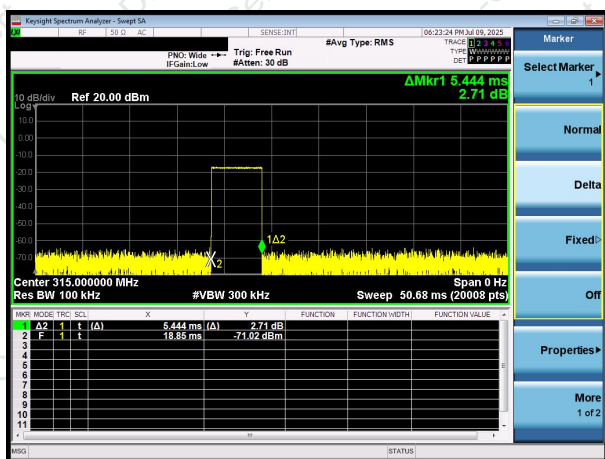

**315MHz: ASK**



Duty Cycle= Effective time one cycle/ Total time one cycle

Averaging factor in dB =20log(Ton* (duty cycle))

Duty Cycle = (0.13ms*88+0.25*16) =15.44ms/81.58ms=0.19

Therefore, the averaging factor is found by 20log0.19=-14.42dB

Test plot as follows:

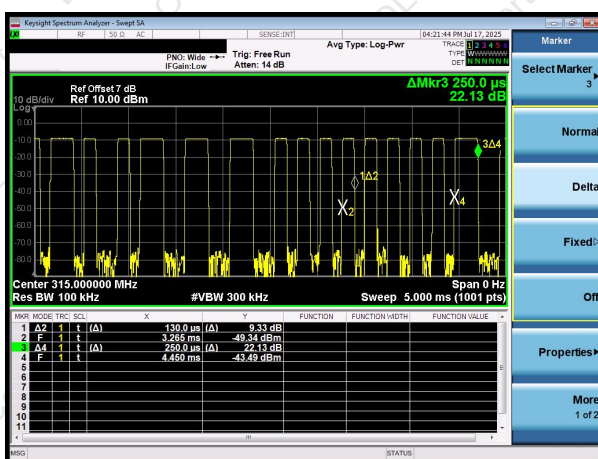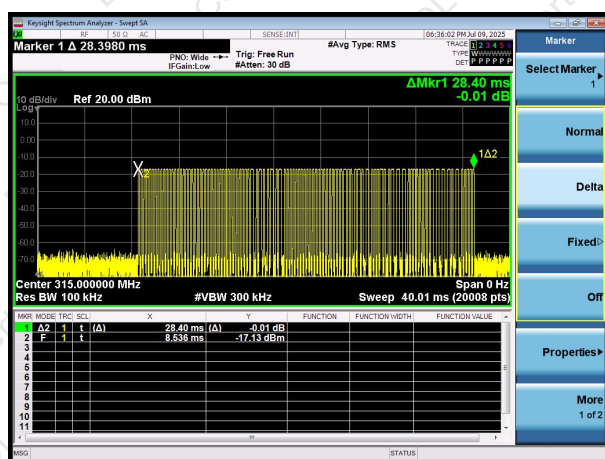



6. TRANSMISSION CEASE TIME

APPLIED PROCEDURES / LIMIT

FCC Part15(15.231(e)) RSS-210.A1.4(b)	
Section	Description
15.231e RSS-210 Clause A.1.4(b)	In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.


TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Allow the trace to stabilize.

DEVIATION FROM STANDARD

No deviation.

TEST SETUP

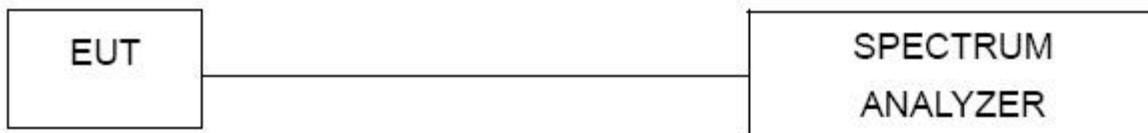

EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



TEST RESULTS



433.92MHz:

Modulation TYPE	Transmission time (second)	Limit (second)	Result
FSK	0.0690	<1s	Pass
ASK	0.0286	<1s	Pass



Modulation TYPE	Transmission off time (second)	Limit (second)	Result
FSK	14.20	shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.	Pass
ASK	13.28		Pass

FSK T on

ASK T on

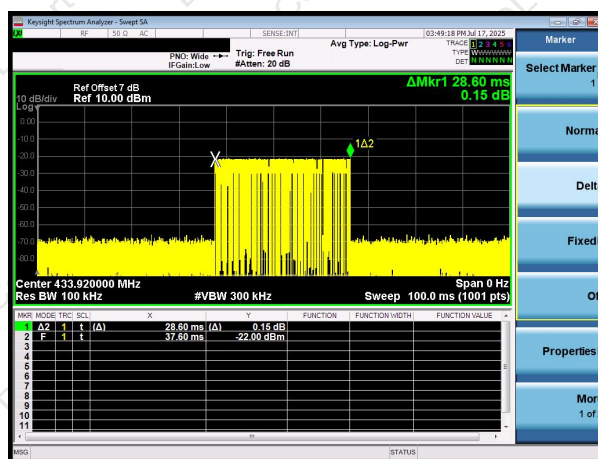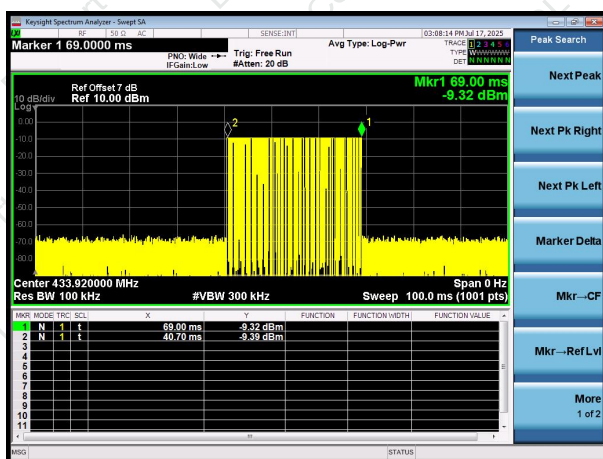

T OFF

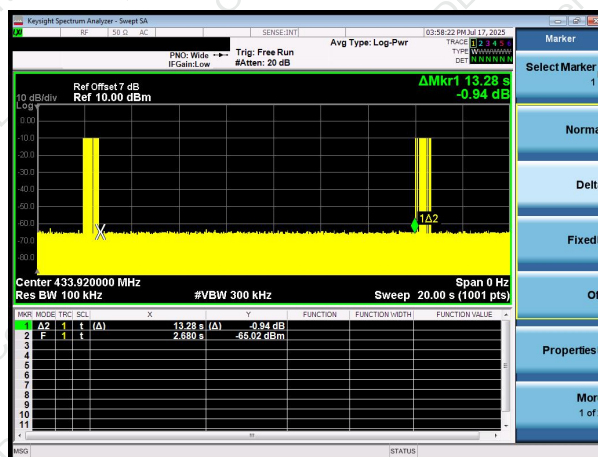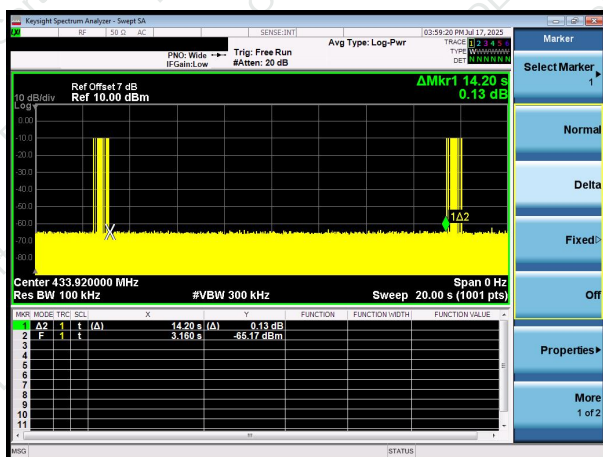




315MHz:


Modulation TYPE	Transmission time (second) (second)	Limit (second)	Result
FSK	0.05560	<1s	Pass
ASK	0.02820	<1s	Pass

Modulation TYPE	Transmission off time (second)	Limit (second)	Result
FSK	14.08	>10s	Pass
ASK	15.40	>10s	Pass



FSK T on

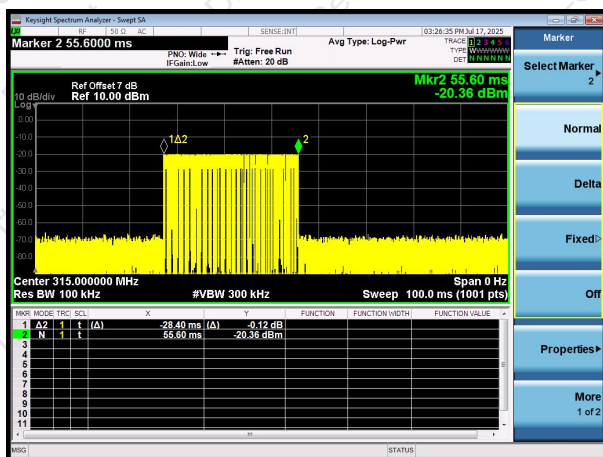

ASK T on

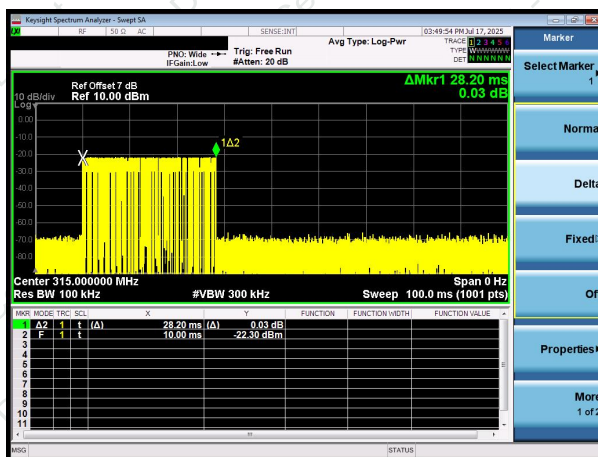

T OFF

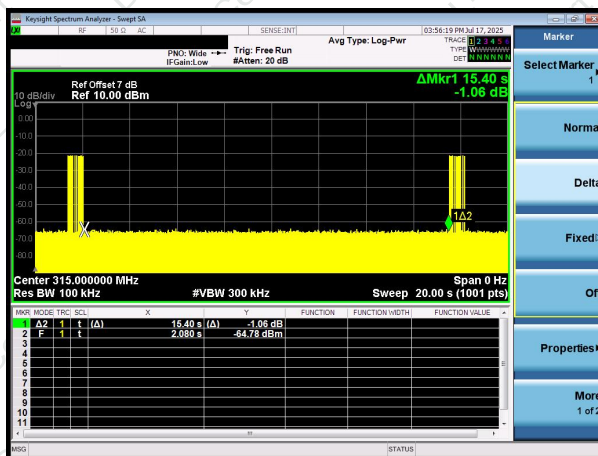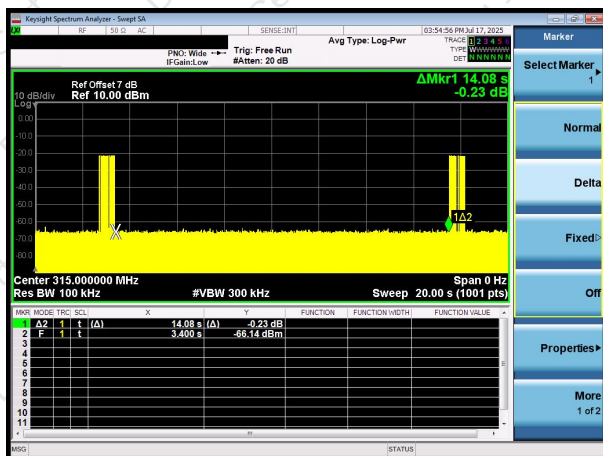



7. ANTENNA REQUIREMENT

STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

RSS-Gen 6.8 requirement: For intentional device, according to RSS-Gen 6.8: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT ANTENNA

The EUT antenna is Internal antenna, It comply with the standard requirement.



8. TEST SEUUP PHOTO

Reference to the Appendix I for details.

9. EUT PHOTO

Reference to the Appendix II for details.

***** END OF REPORT *****