



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM181100960302  
Page: 1 of 41

# TEST REPORT

**Application No.:** SZEM1811009603CR  
**Applicant:** Longxiang Toys industrial company limited  
**Address of Applicant:** Longxiang toys, Wenguan road, Chenghai, Shantou, China  
**Manufacturer:** Toysmax Industrial Company Limited  
**Address of Manufacturer:** 3 rd floor, Longxiang toys, Wenguan Road, Chenghai District, Shantou, China

**Equipment Under Test (EUT):**

**EUT Name:** RC drift car  
**Model No.:** LX443330, 265, 6013-3, 610-1, 601, 601-1, 601-2, 118, 118-1, 118-2, 116, 126, 168, 1688, 518-2, MD903/904, 6012-5, 616-3, 616-4, 616-5, 6020, 9029B, 9029, 9029D, 9060BE, 9082BE, 9082C, 9066, 6012-1, 6012-2, 6012-3, 6012-4, 80828-2, 6018, 9065B, 9065BX, MD903, MD904, 6013, 9025, 6016-A, 6016-B, 9030, 9088, 9088X, 9088-1, 6017, 6019-1, 6019-2, 615, 613, 618, 619, 620, 266, 267, 268, 269, 618, 619, 620, 622, 626, 628, 656, 30305, 30366, 30368, 8016, 8018, 8019, 8020, 8026, 8028, 8029, 8033, 8036, 8066, 8068, 8088 ♣

♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.

**FCC ID:** 2ARTRLX443330

**Standard(s) :** 47 CFR Part 15, Subpart C 15.249

**Date of Receipt:** 2018-11-06

**Date of Test:** 2018-11-06 to 2018-11-07

**Date of Issue:** 2018-11-08

<b>Test Result:</b>	Pass*
---------------------	-------

\* In the configuration tested, the EUT complied with the standards specified above.




Keny Xu

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<b>Revision Record</b>				
<b>Version</b>	<b>Chapter</b>	<b>Date</b>	<b>Modifier</b>	<b>Remark</b>
01		2018-11-08		Original

<b>Authorized for issue by:</b>			
		 Bill Chen	
		Bill Chen /Project Engineer	
		 Eric Fu	
		Eric Fu /Reviewer	

## 2 Test Summary

<b>Radio Spectrum Technical Requirement</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass

<b>Radio Spectrum Matter Part</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
20dB Bandwidth	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
Restricted Band Around Fundamental Frequency	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Radiated Emissions	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass

### Declaration of EUT Family Grouping:

Model No.: LX443330, 265, 6013-3, 610-1, 601, 601-1, 601-2, 118, 118-1, 118-2, 116, 126, 168, 1688, 518-2, MD903/904, 6012-5, 616-3, 616-4, 616-5, 6020, 9029B, 9029, 9029D, 9060BE, 9082BE, 9082C, 9066, 6012-1, 6012-2, 6012-3, 6012-4, 80828-2, 6018, 9065B, 9065BX, MD903, MD904, 6013, 9025, 6016-A, 6016-B, 9030, 9088, 9088X, 9088-1, 6017, 6019-1, 6019-2, 615, 613, 618, 619, 620, 266, 267, 268, 269, 618, 619, 620, 622, 626, 628, 656, 30305, 30366, 30368, 8016, 8018, 8019, 8020, 8026, 8028, 8029, 8033, 8036, 8066, 8068, 8088

Only the model LX443330 was tested, since the electrical circuit design, layout, components used, internal wiring and functions were identical for the above models, with only difference on colour, appearance and packaging.

### 3 Contents

	Page
1 COVER PAGE .....	1
2 TEST SUMMARY .....	3
3 CONTENTS .....	4
4 GENERAL INFORMATION .....	5
4.1 DETAILS OF E.U.T .....	5
4.2 DESCRIPTION OF SUPPORT UNITS .....	6
4.3 MEASUREMENT UNCERTAINTY .....	6
4.4 TEST LOCATION .....	7
4.5 TEST FACILITY .....	7
4.6 DEVIATION FROM STANDARDS .....	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
5 EQUIPMENT LIST .....	8
6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....	11
6.1 ANTENNA REQUIREMENT .....	11
6.1.1 Test Requirement: .....	11
6.1.2 Conclusion .....	11
7 RADIO SPECTRUM MATTER TEST RESULTS .....	12
7.1 20dB BANDWIDTH .....	12
7.1.1 E.U.T. Operation .....	12
7.1.2 Test Setup Diagram .....	12
7.1.3 Measurement Procedure and Data .....	12
7.2 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A)) .....	15
7.2.1 E.U.T. Operation .....	16
7.2.2 Test Setup Diagram .....	16
7.2.3 Measurement Procedure and Data .....	16
7.3 RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY .....	23
7.3.1 E.U.T. Operation .....	24
7.3.2 Test Setup Diagram .....	24
7.3.3 Measurement Procedure and Data .....	24
7.4 RADIATED EMISSIONS .....	30
7.4.1 E.U.T. Operation .....	31
7.4.2 Test Setup Diagram .....	31
7.4.3 Measurement Procedure and Data .....	31
8 PHOTOGRAPHS .....	41
8.1 TEST SETUP .....	41
8.2 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) .....	41

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	Tx:DC 3.0V by 1.5V x 2"AA" batteries
Cable:	USB cable:56cm unshielded
Frequency Range:	2405MHz to 2480MHz
Channel Separated:	1MHz
Number of Channels:	76
Modulation Type:	GFSK
Antenna Type:	Monopole
Antenna Gain:	0dBi

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	20	2424MHz	39	2443MHz	58	2462MHz
2	2406MHz	21	2425MHz	40	2444MHz	59	2463MHz
3	2407MHz	22	2426MHz	41	2445MHz	60	2464MHz
4	2408MHz	23	2427MHz	42	2446MHz	61	2465MHz
5	2409MHz	24	2428MHz	43	2447MHz	62	2466MHz
6	2410MHz	25	2429MHz	44	2448MHz	63	2467MHz
7	2411MHz	26	2430MHz	45	2449MHz	64	2468MHz
8	2412MHz	27	2431MHz	46	2450MHz	65	2469MHz
9	2413MHz	28	2432MHz	47	2451MHz	66	2470MHz
10	2414MHz	29	2433MHz	48	2452MHz	67	2471MHz
11	2415MHz	30	2434MHz	49	2453MHz	68	2472MHz
12	2416MHz	31	2435MHz	50	2454MHz	69	2473MHz
13	2417MHz	32	2436MHz	51	2455MHz	70	2474MHz
14	2418MHz	33	2437MHz	52	2456MHz	71	2475MHz
15	2419MHz	34	2438MHz	53	2457MHz	72	2476MHz
16	2420MHz	35	2439MHz	54	2458MHz	73	2477MHz
17	2421MHz	36	2440MHz	55	2459MHz	74	2478MHz
18	2422MHz	37	2441MHz	56	2460MHz	75	2479MHz
19	2423MHz	38	2442MHz	57	2461MHz	76	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH1)	2405MHz
The Middle channel(CH44)	2448MHz
The Highest channel(CH76)	2480MHz

#### **4.2 Description of Support Units**

The EUT has been tested as an independent unit.

#### **4.3 Measurement Uncertainty**

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 2.84\text{dB}$
6	Conducted Spurious emissions	$\pm 0.75\text{dB}$
7	RF Radiated power	$\pm 4.5\text{dB}$ (below 1GHz) $\pm 4.8\text{dB}$ (above 1GHz)
8	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (Below 1GHz) $\pm 4.8\text{dB}$ (Above 1GHz)
9	Temperature test	$\pm 1\text{ }^{\circ}\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$

#### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053      Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None

## 5 Equipment List

<b>20dB Bandwidth</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24

<b>Field Strength of the Fundamental Signal (15.249(a))</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2018-09-25	2019-09-24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2018-09-27	2019-09-26
Pre-amplifier (18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

<b>RE in Chamber</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal. Date (yyyy-mm-dd)</b>	<b>Cal. Due date (yyyy-mm-dd)</b>



# SGS-CSTC Standards Technical Services Co., Ltd.

## Shenzhen Branch

Report No.: SZEM181100960302  
Page: 9 of 41

3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2018-09-25	2019-09-24
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26
Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2018-04-02	2019-04-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2018-07-12	2019-07-11

Restricted Band Around Fundamental Frequency Field Strength of the Fundamental Signal (15.249(a))					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2018-09-25	2019-09-24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2018-09-27	2019-09-26
Pre-amplifier (18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2018-04-13	2019-04-12

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181100960302  
Page: 10 of 41

BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (800MHz-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2018-09-25	2019-09-24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2018-09-27	2019-09-26
Band filter	N/A	N/A	N/A	N/A	N/A
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11

## General used equipment

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2018-09-27	2019-09-26
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2018-09-27	2019-09-26
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2018-09-27	2019-09-26
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2018-04-08	2019-04-07

## **6 Radio Spectrum Technical Requirement**

### **6.1 Antenna Requirement**

#### **6.1.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.203

Limit:

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **6.1.2 Conclusion**

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi

.Antenna location: Refer to Appendix(Internal photos)

## 7 Radio Spectrum Matter Test Results

### 7.1 20dB Bandwidth


Test Requirement 47 CFR Part 15, Subpart C 15.215  
Test Method: ANSI C63.10 (2013) Section 6.9  
Limit: N/A

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.6 °C Humidity: 51.2 % RH Atmospheric Pressure: 1015 mbar  
Test mode a:TX mode\_Keep the EUT in transmitting with modulation mode.


#### 7.1.2 Test Setup Diagram

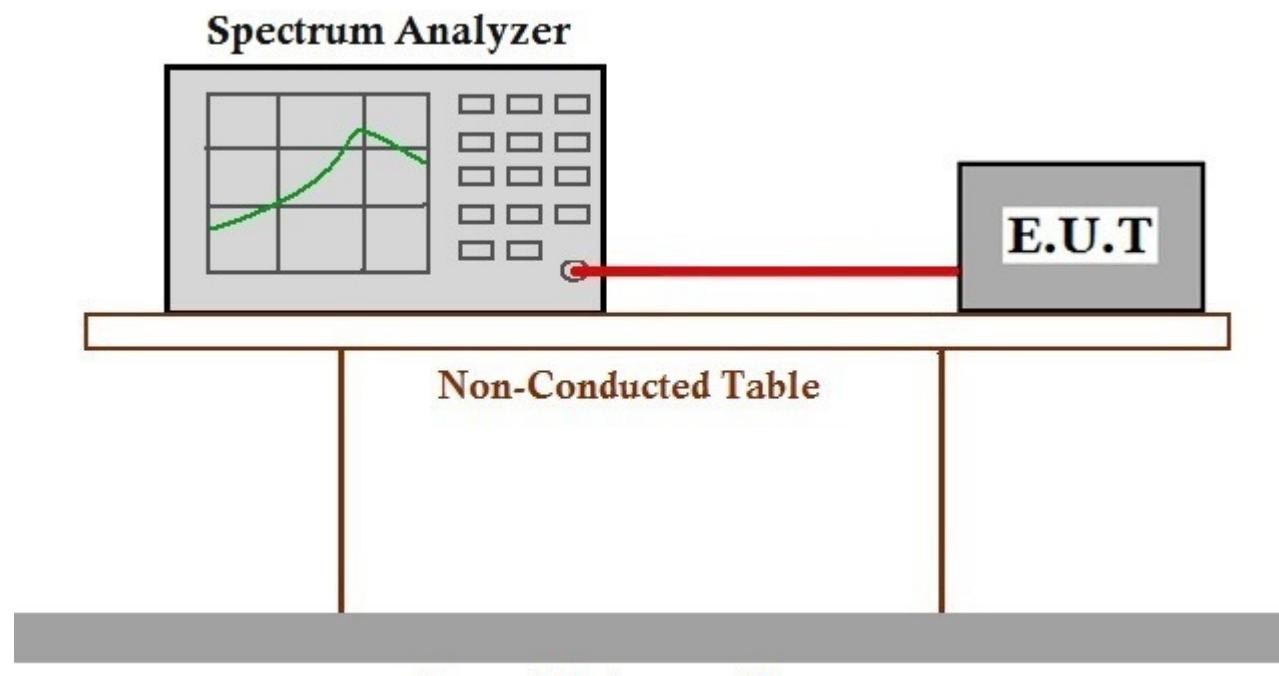

#### 7.1.3 Measurement Procedure and Data


Test channel	20dB bandwidth (MHz)	Results
Lowest	1.2301	Pass
Middle	1.2446	Pass
Highest	1.2446	Pass

Mode:a; channel:Low

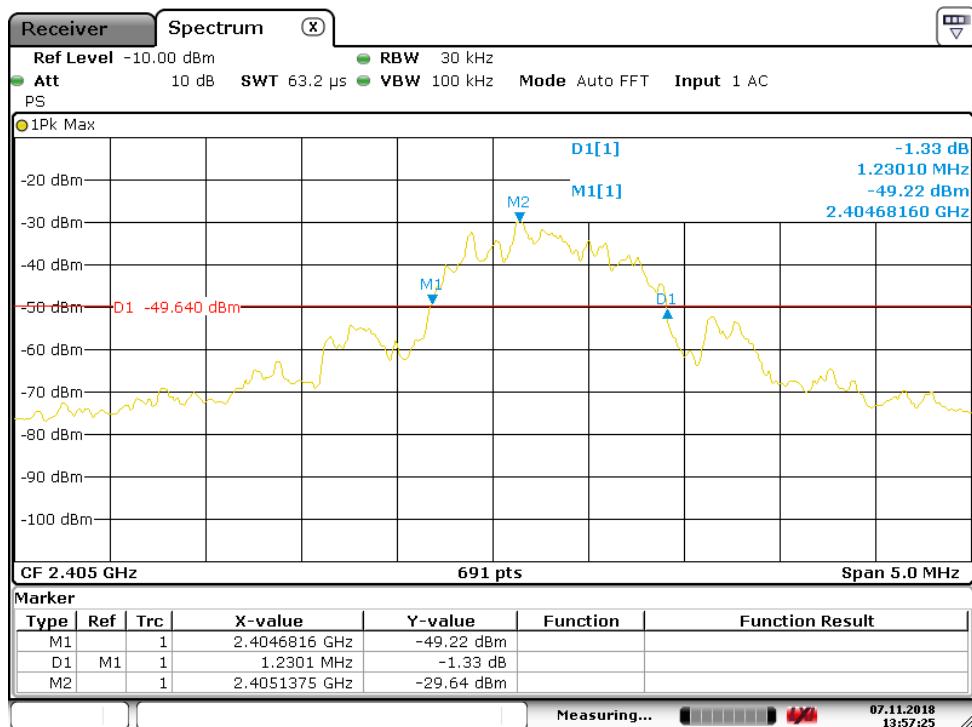


Date: 7 NOV 2018 13:57:25

Mode:a; ; ; Channel:middle

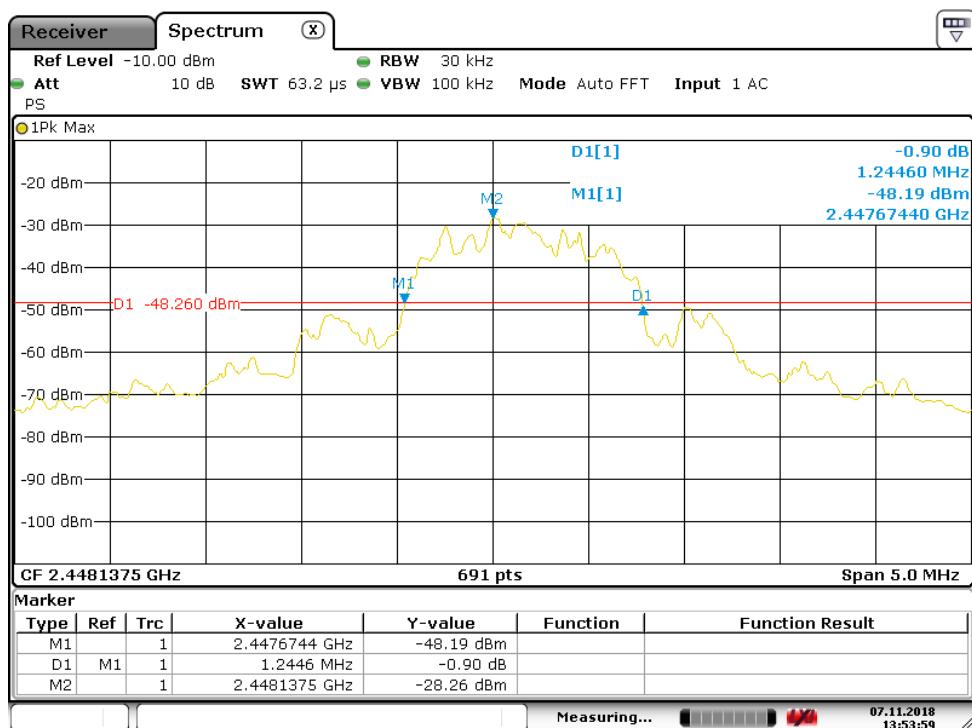

Date: 7 NOV 2018 13:53:59

Mode:a; ; ; Channel:High

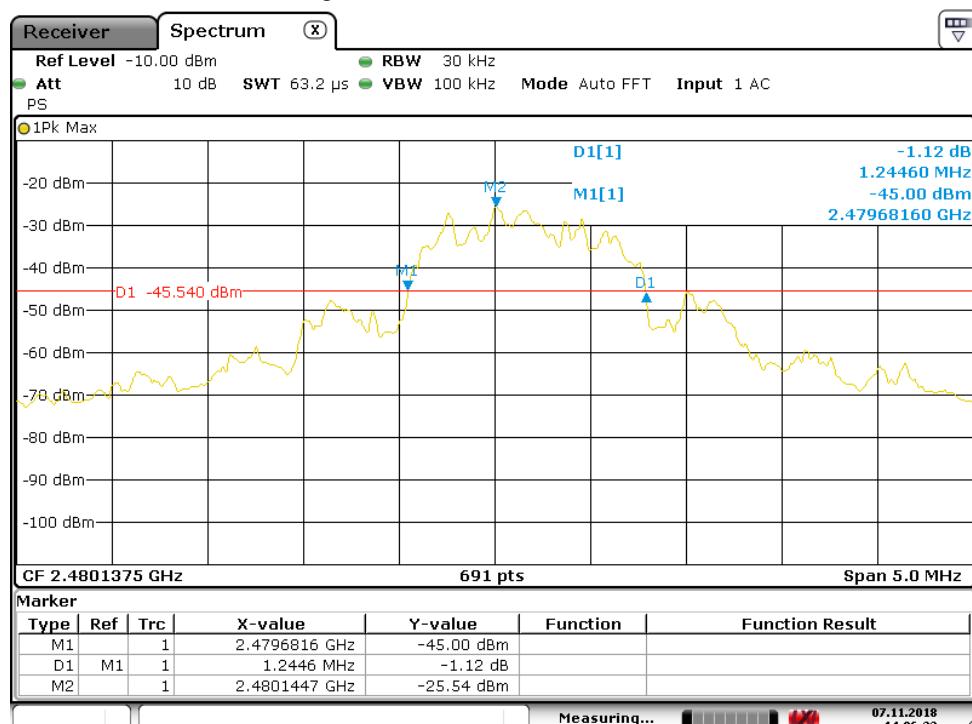

Date: 7 NOV 2018 14:06:34

## **7.2 Field Strength of the Fundamental Signal (15.249(a))**

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)

Test Method: ANSI C63.10 (2013) Section 6.5&6.6

Measurement Distance: 3m

Limit:


Frequency	Limit (dBuV/m @3m)	Remark
2400MHz-2483.5MHz	94.0	Average Value
	114.0	Peak Value

### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C      Humidity: 62.5 % RH      Atmospheric Pressure: 1015 mbar  
Test mode      a:TX mode\_Keep the EUT in transmitting with modulation mode.

### 7.2.2 Test Setup Diagram

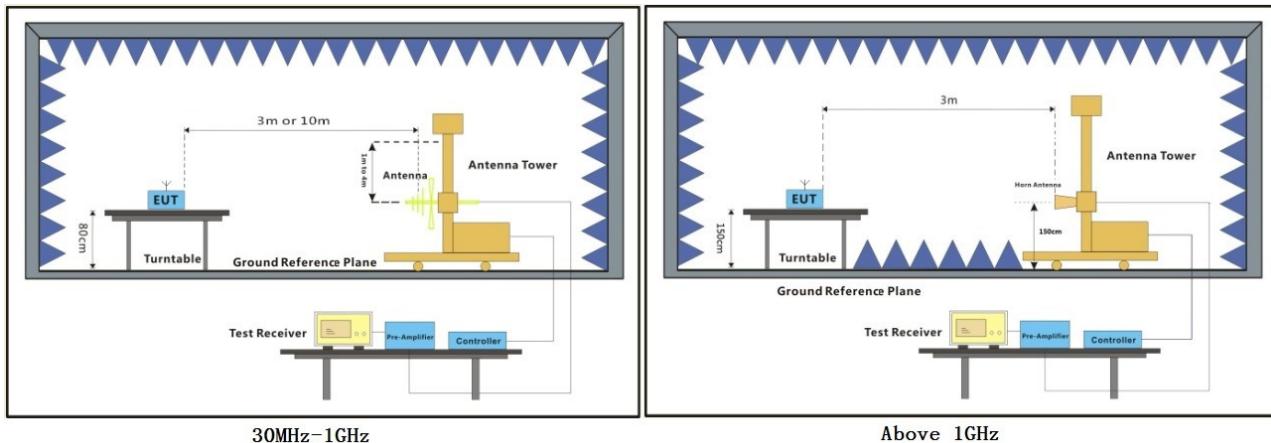


### 7.2.3 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

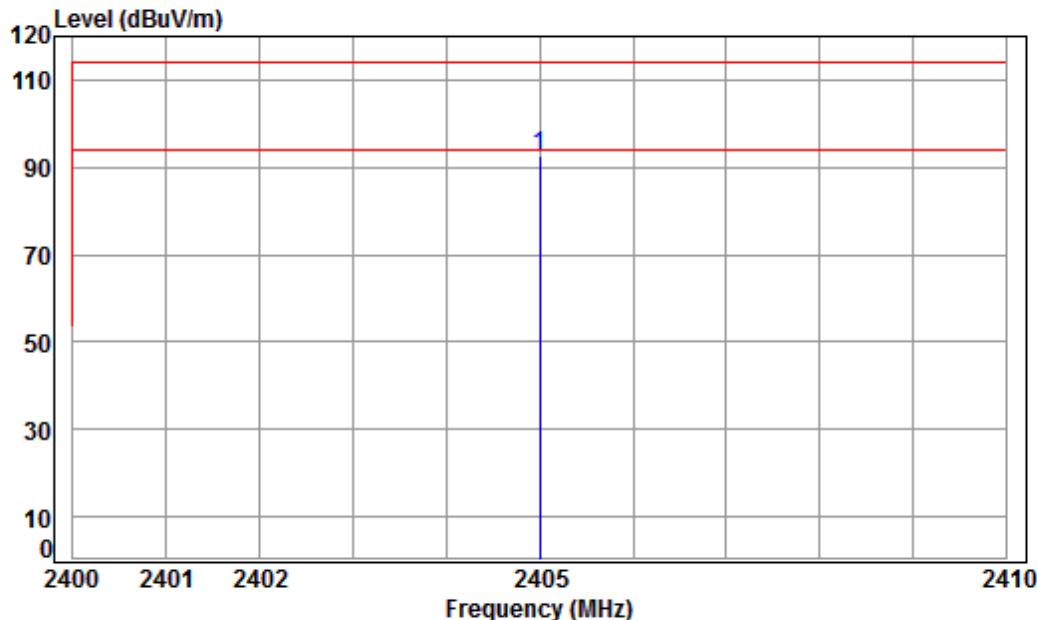


Condition: 3m HORIZONTAL

Job No : 09603CR

Mode : 2405 Field Strength  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2405.000	5.49	29.12	41.88	99.81	92.54	114.00	-21.46 peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

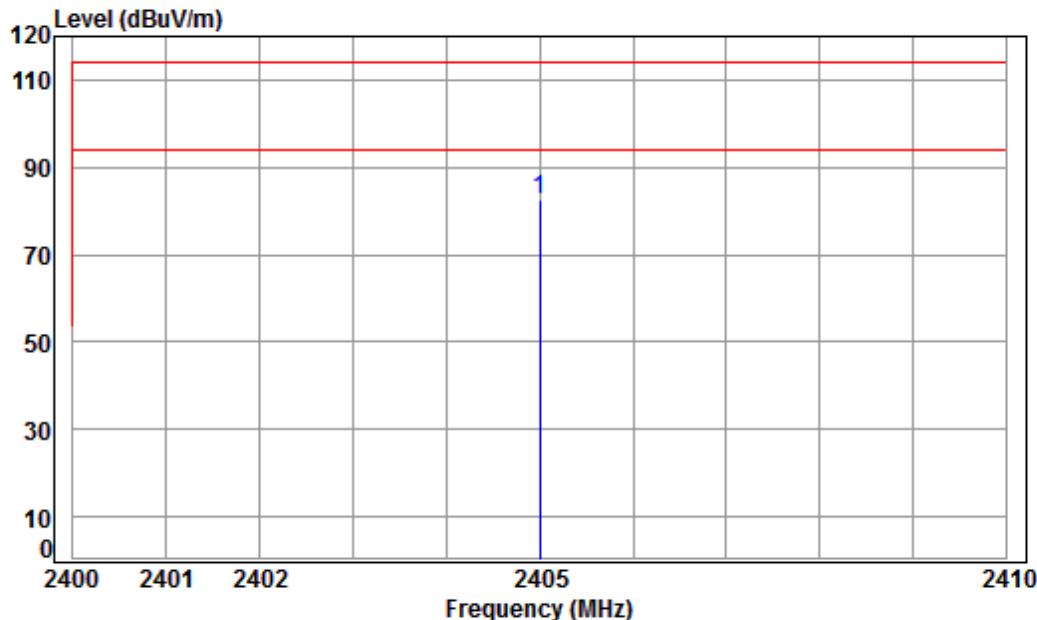


Condition: 3m VERTICAL

Job No : 09603CR

Mode : 2405 Field Strength  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2405.000	5.49	29.12	41.88	89.85	82.58	114.00	-31.42 peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

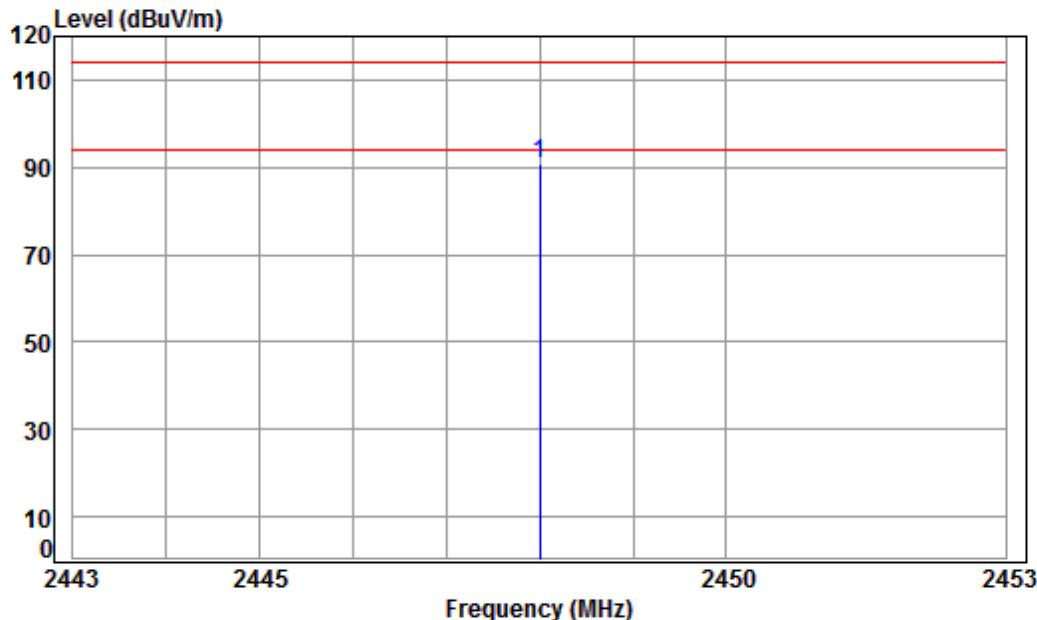


Condition: 3m HORIZONTAL

Job No : 09603CR

Mode : 2448 Field Strength  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2448.000	5.55	29.25	41.90	98.00	90.90	114.00	-23.10 Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

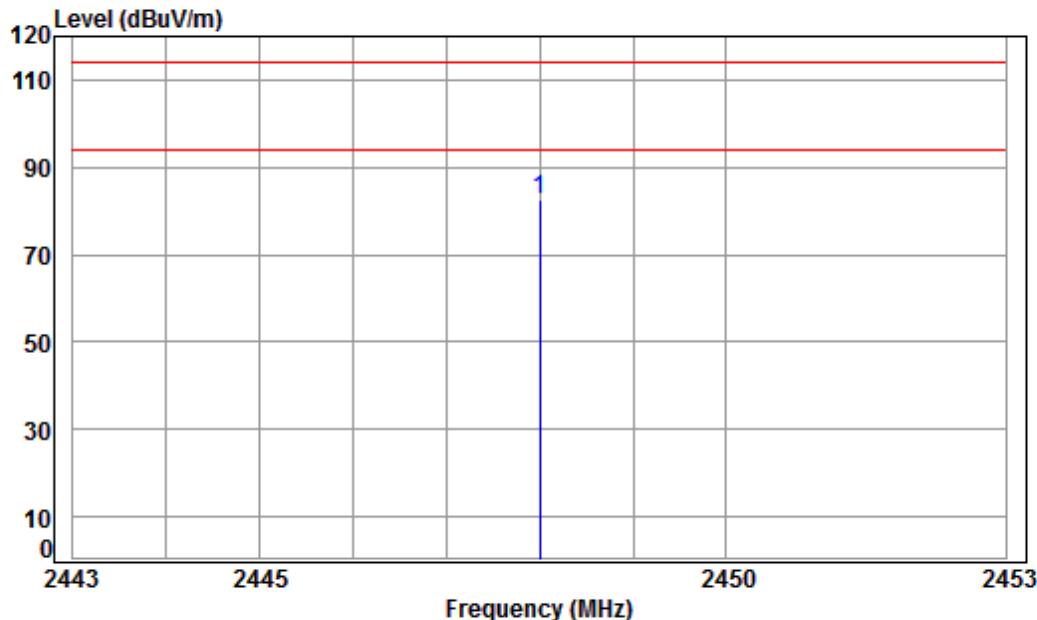


Condition: 3m VERTICAL

Job No : 09603CR

Mode : 2448 Field Strength  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2448.000	5.55	29.25	41.90	89.67	82.57	114.00	-31.43 Peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

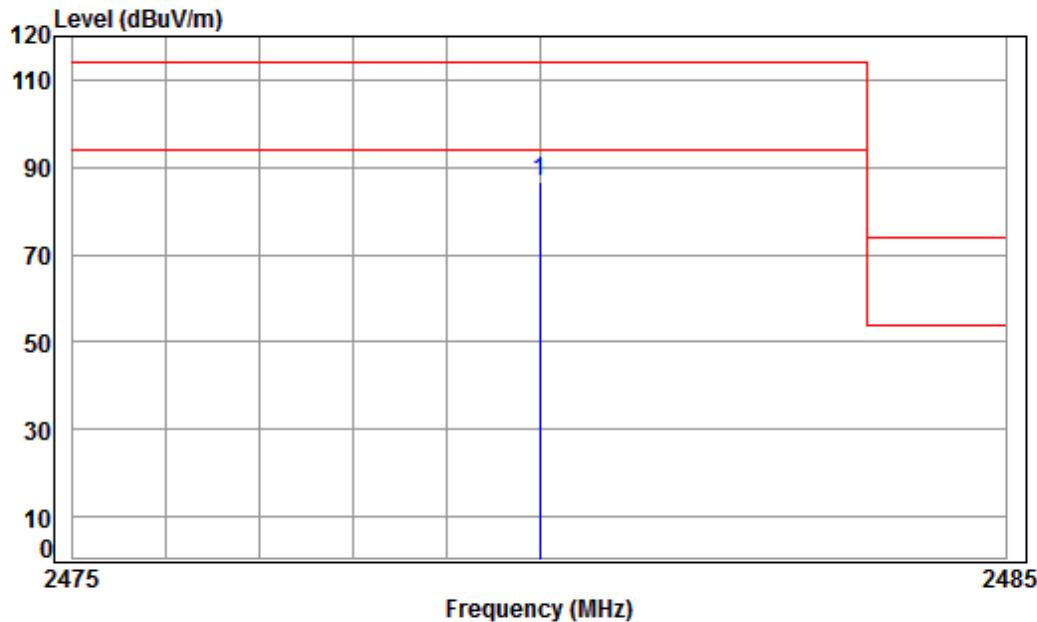


Condition: 3m HORIZONTAL

Job No : 09603CR

Mode : 2480 Field Strength  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2480.000	5.59	29.34	41.91	93.82	86.84	114.00	-27.16 peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High

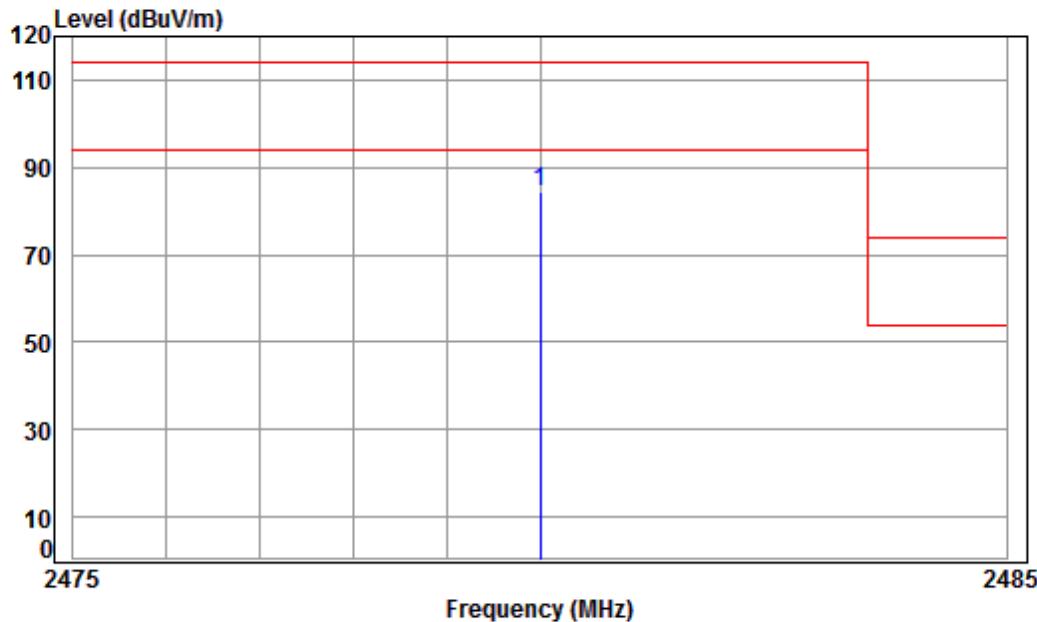

Condition: 3m VERTICAL

Job No : 09603CR

Mode : 2480 Field Strength  
: 2.4G

	Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
	MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.000	5.59	29.34	41.91	91.40	84.42	114.00	-29.58	peak	

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.

### **7.3 Restricted Band Around Fundamental Frequency**

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value


Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21.6 °C      Humidity: 59.6 % RH      Atmospheric Pressure: 1015 mbar  
Test mode      a:TX mode\_Keep the EUT in transmitting with modulation mode.

### 7.3.2 Test Setup Diagram

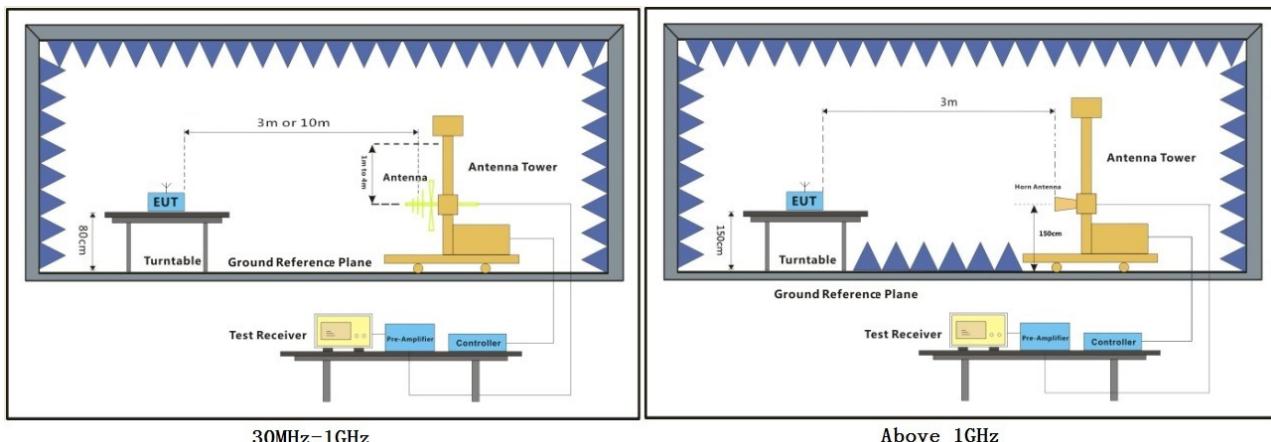

### 7.3.3 Measurement Procedure and Data


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Average value:

Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =14.79ms
	T period =100ms
	PDCF value= -16.60dB

Duty cycle test plots:

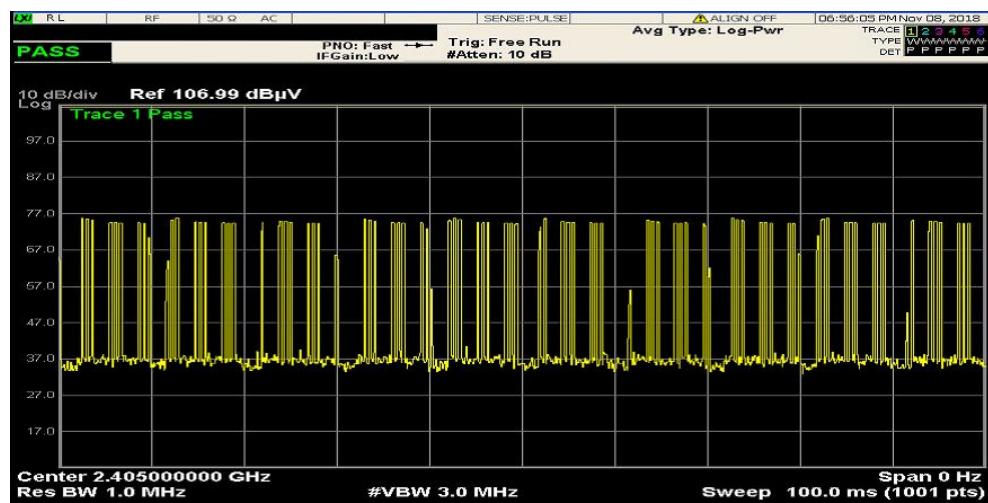

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

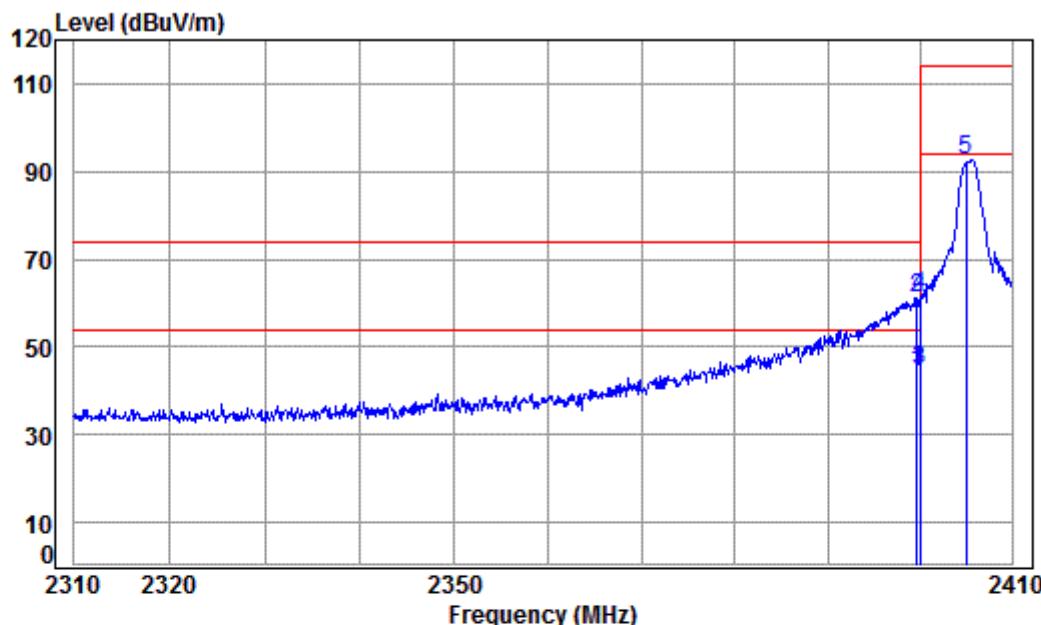


Condition: 3m HORIZONTAL

Job No : 09603CR

Mode : 2405 Band edge  
: 2.4G

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Limit Line	Over Limit	Remark
				Level	Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2399.707	5.49	29.11	41.88	51.54	44.56	54.00	-9.44	Average
2 2399.707	5.49	29.11	41.88	68.44	61.16	74.00	-12.84	peak
3 pp 2400.000	5.49	29.11	41.88	52.20	44.92	54.00	-9.08	Average
4 pk 2400.000	5.49	29.11	41.88	68.80	61.52	74.00	-12.48	peak
5 2405.000	5.50	29.12	41.88	99.80	92.54	114.00	-21.46	peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

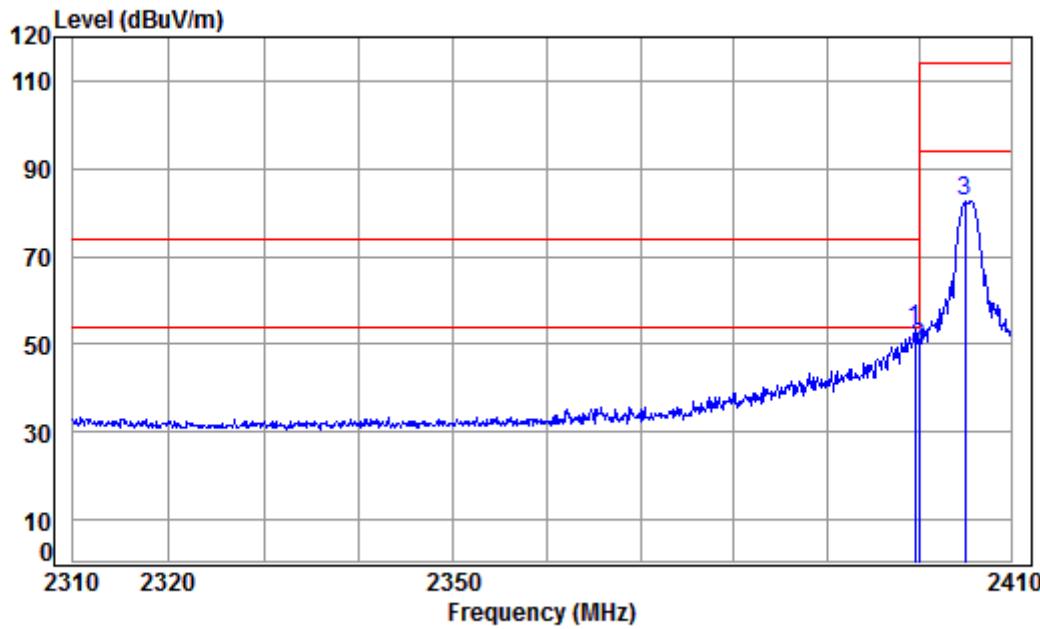


Condition: 3m VERTICAL

Job No : 09603CR

Mode : 2405 Band edge  
: 2.4G


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	2399.605	5.49	29.11	41.88	60.70	53.42	74.00	-20.58 peak
2		2400.000	5.49	29.11	41.88	56.67	49.39	74.00	-24.61 peak
3		2405.000	5.50	29.12	41.88	89.84	82.58	114.00	-31.42 peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

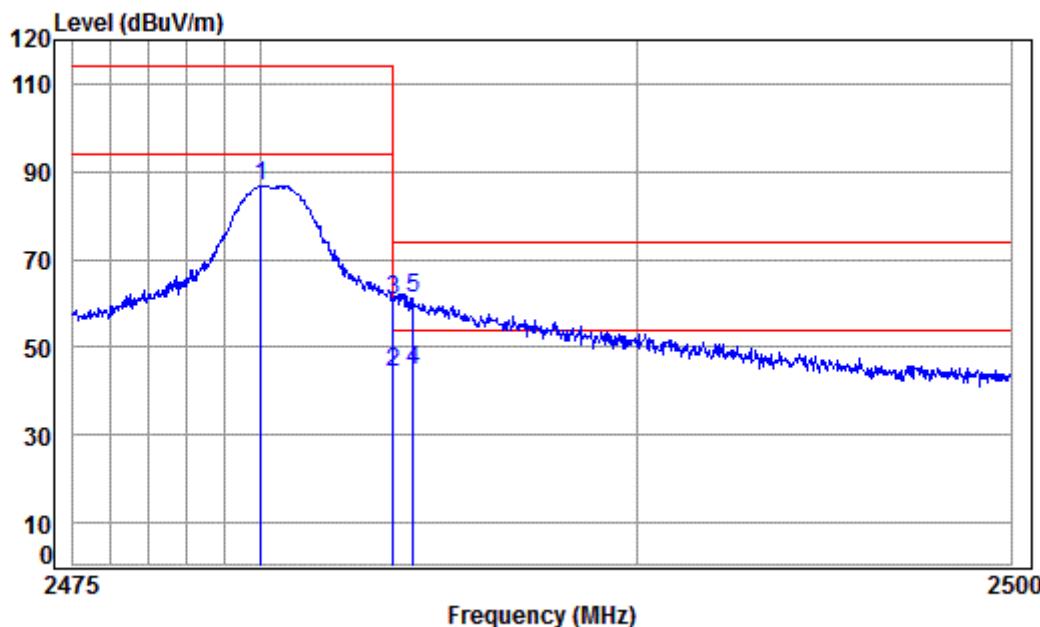

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2480.000	5.59	29.34	41.91	93.82	86.84	114.00	-27.16	peak
2	2483.500	5.60	29.35	41.91	51.16	44.20	54.00	-9.80	Average
3	2483.500	5.60	29.35	41.91	67.76	60.80	74.00	-13.20	peak
4 pp	2484.046	5.60	29.35	41.91	51.66	44.71	54.00	-9.29	Average
5 pk	2484.046	5.60	29.35	41.91	68.27	61.31	74.00	-12.69	peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High

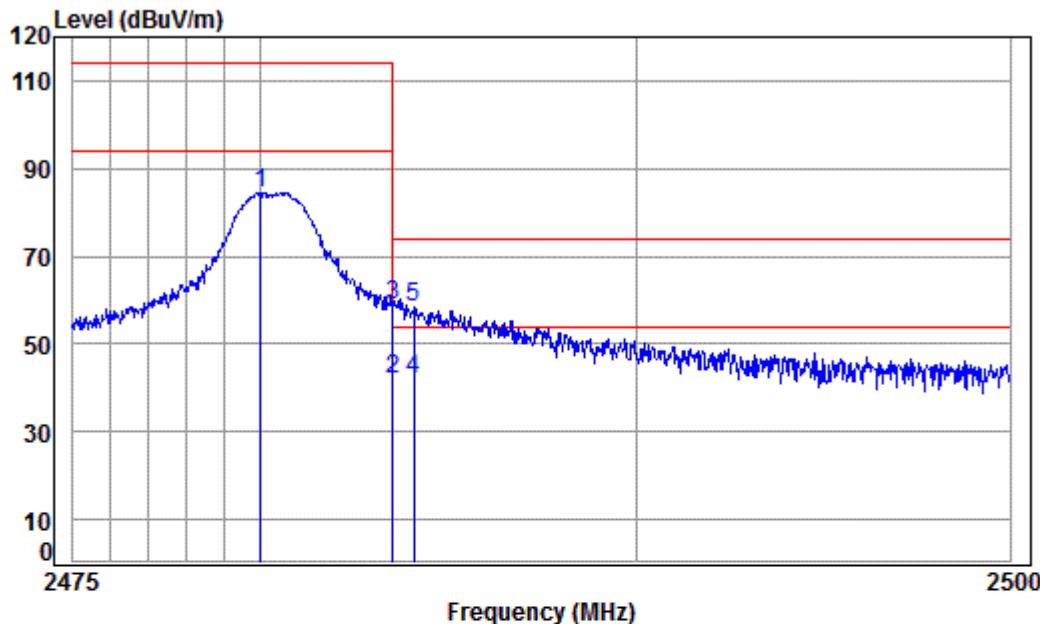

Condition: 3m VERTICAL

Job No : 09603CR

Mode : 2480 Band edge  
: 2.4G

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2480.000	5.59	29.34	41.91	91.40	84.42	114.00	-29.58	peak
2 pp	2483.500	5.60	29.35	41.91	49.02	42.06	54.00	-11.94	Average
3 pk	2483.500	5.60	29.35	41.91	65.62	58.66	74.00	-15.34	peak
4	2484.071	5.60	29.35	41.91	48.92	41.97	54.00	-12.03	Average
5	2484.071	5.60	29.35	41.91	65.53	58.57	74.00	-15.43	Peak

Remark:

- 3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 4) The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.

## 7.4 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:


Frequency(MHz)	Field strength (microvolts/meter)	Limit (dBuV/m)	Detector	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3

#### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C      Humidity: 62.5 % RH      Atmospheric Pressure: 1015 mbar  
Test mode      a:TX mode\_Keep the EUT in transmitting with modulation mode.

#### 7.4.2 Test Setup Diagram

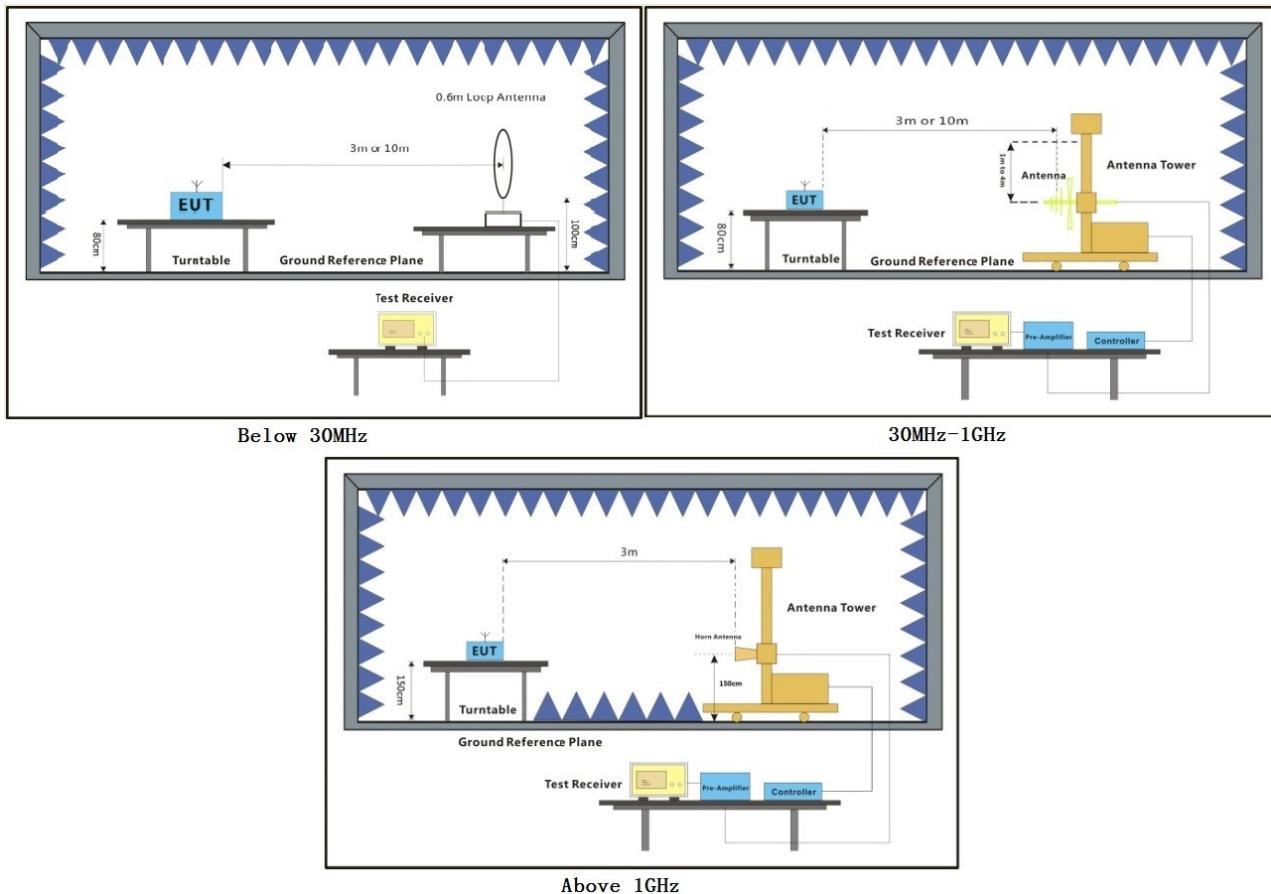


#### 7.4.3 Measurement Procedure and Data

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

30MHz~1GHz

Detector:QP

Mode: a; Polarization: Horizontal

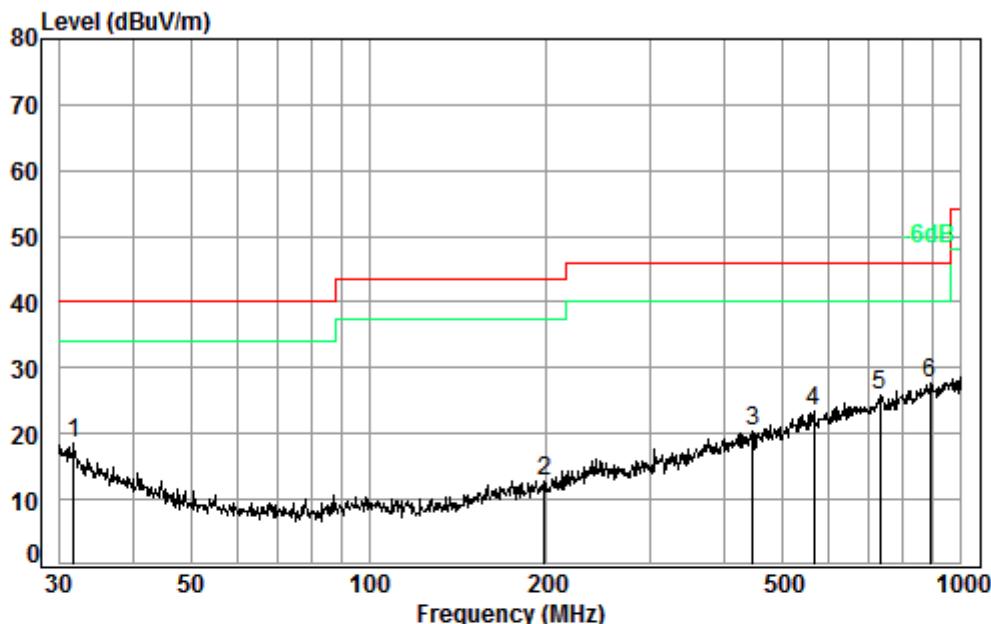


Condition: 3m HORIZONTAL

Job No. : 09603CR

Test mode: a

Freq	Cable	Ant	Preamp	Read	Limit	Over	dB
	Loss	Factor	Factor	Level	Level	Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	
1	31.73	0.60	21.52	27.66	24.01	18.47	40.00
2	197.89	1.40	16.44	27.53	22.54	12.85	43.50
3	444.85	2.39	23.45	27.80	22.31	20.35	46.00
4	564.64	2.67	25.93	27.76	22.49	23.33	46.00
5	729.36	2.99	28.08	27.51	22.30	25.86	46.00
6 pp	887.61	3.56	29.65	27.12	21.66	27.75	46.00
							-18.25

Mode: a; Polarization: Vertical

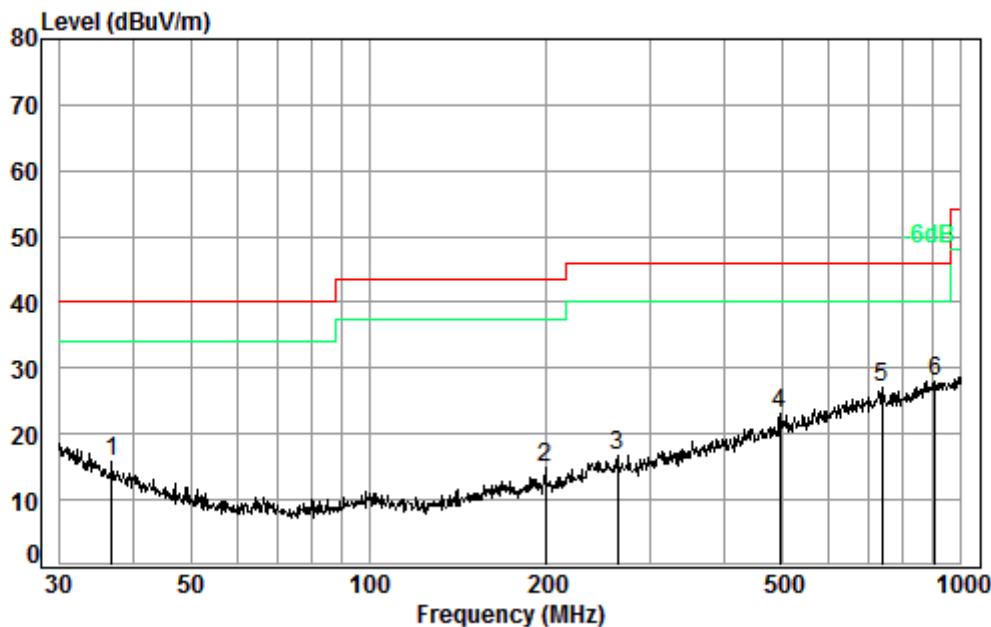

Condition: 3m VERTICAL


Job No. : 09603CR

Test mode: a

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level			Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	36.77	0.60	18.97	27.64	23.84	15.77	40.00	-24.23
2	198.59	1.40	16.46	27.53	24.64	14.97	43.50	-28.53
3	262.90	1.74	19.06	27.54	23.60	16.86	46.00	-29.14
4	494.20	2.58	24.48	27.87	23.83	23.02	46.00	-22.98
5	737.07	3.01	28.13	27.50	23.29	26.93	46.00	-19.07
6 pp	906.48	3.61	29.83	27.06	21.61	27.99	46.00	-18.01

Above 1GHz

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

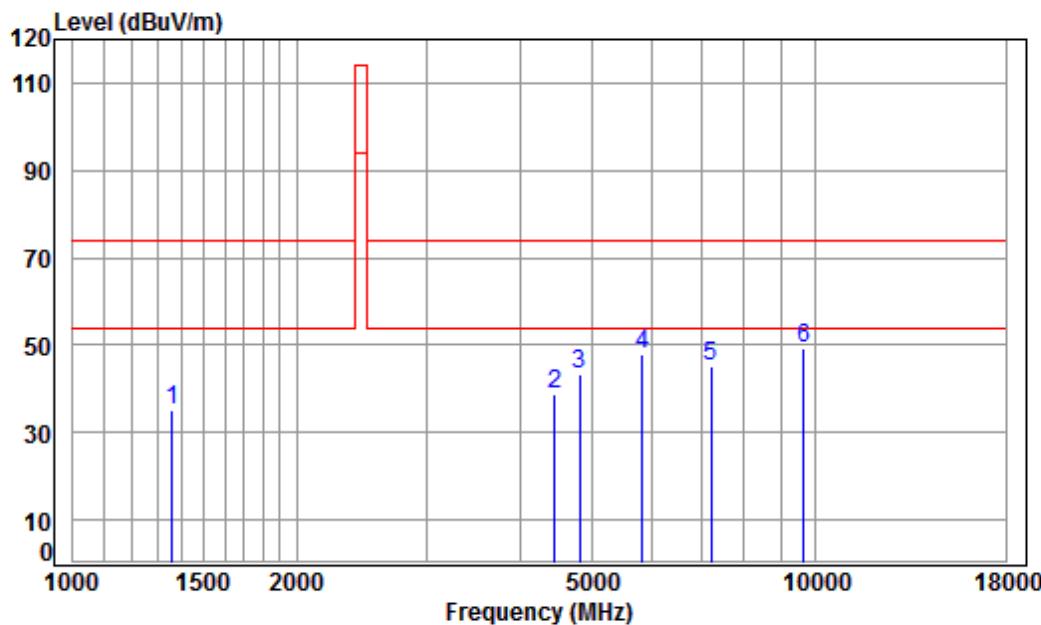


Condition: 3m HORIZONTAL

Job No : 09603CR

Mode : 2405 TX  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1358.498	5.01	25.21	41.31	46.07	34.98	74.00	-39.02 peak
2	4456.315	7.51	33.60	42.41	40.10	38.80	74.00	-35.20 peak
3	4810.000	7.90	34.17	42.47	43.85	43.45	74.00	-30.55 peak
4	5847.517	10.06	34.61	41.73	44.89	47.83	74.00	-26.17 peak
5	7215.000	10.07	36.41	40.71	39.52	45.29	74.00	-28.71 peak
6 pp	9620.000	10.75	37.52	37.72	38.90	49.45	74.00	-24.55 peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

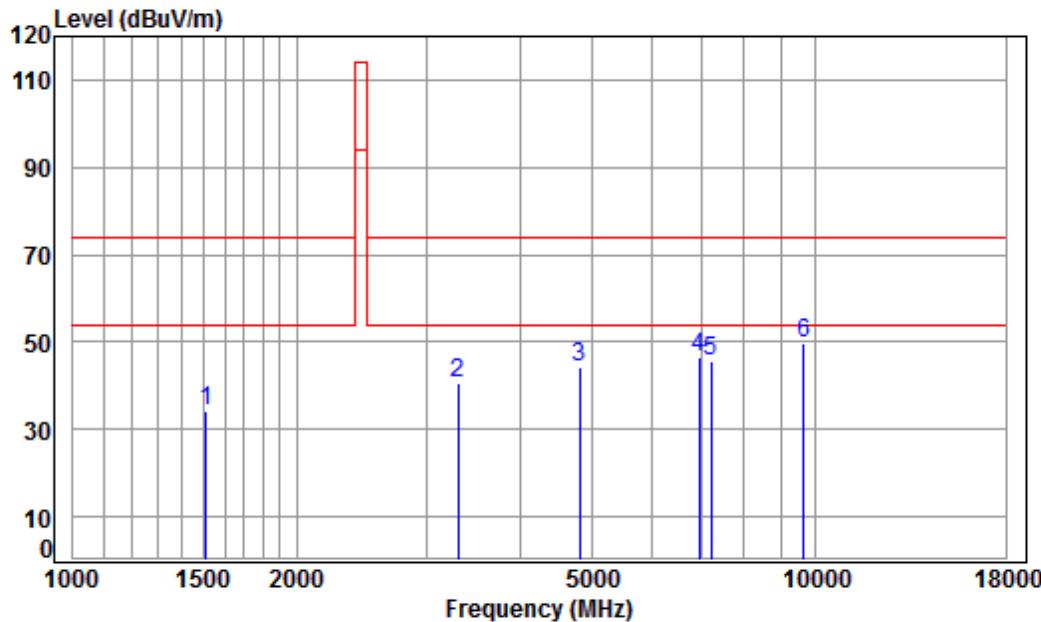


Condition: 3m VERTICAL

Job No : 09603CR

Mode : 2405 TX  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1511.833	5.46	25.85	41.41	44.43	34.33	74.00	-39.67 peak
2	3299.344	6.28	31.86	42.17	44.58	40.55	74.00	-33.45 peak
3	4810.000	7.90	34.17	42.47	44.49	44.09	74.00	-29.91 peak
4	6954.852	10.25	36.38	40.89	40.95	46.69	74.00	-27.31 peak
5	7215.000	10.07	36.41	40.71	39.78	45.55	74.00	-28.45 peak
6 pp	9620.000	10.75	37.52	37.72	38.98	49.53	74.00	-24.47 peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

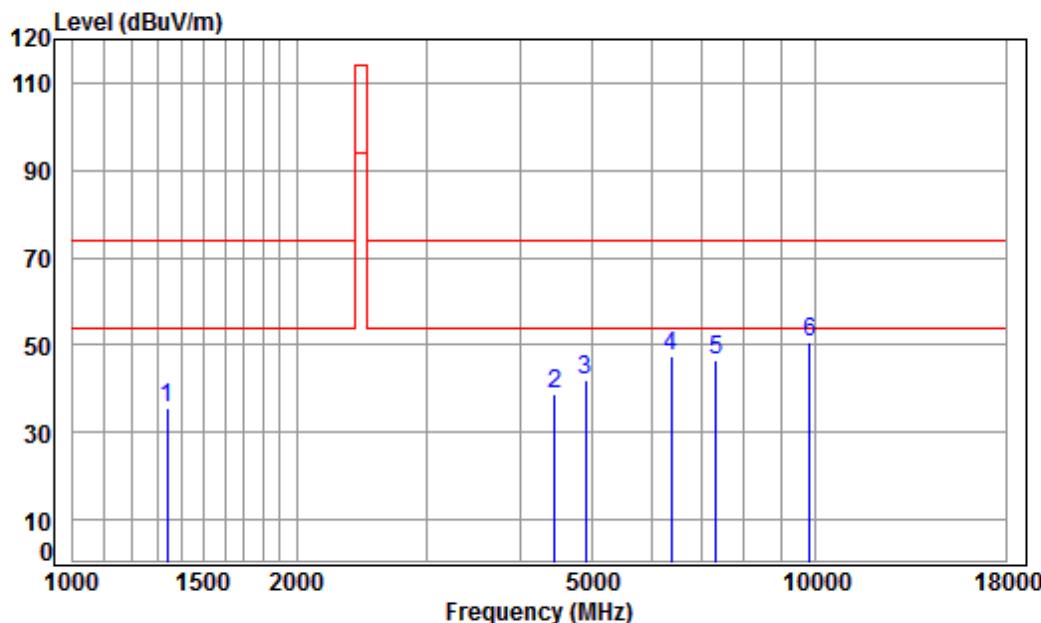


Condition: 3m HORIZONTAL

Job No : 09603CR

Mode : 2448 TX  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1339.006	4.94	25.13	41.29	46.92	35.70	74.00	-38.30 peak
2	4456.315	7.51	33.60	42.41	39.94	38.64	74.00	-35.36 peak
3	4896.000	7.98	34.32	42.48	41.99	41.81	74.00	-32.19 peak
4	6395.654	11.34	35.02	41.30	42.58	47.64	74.00	-26.36 peak
5	7344.000	10.04	36.36	40.62	40.71	46.49	74.00	-27.51 peak
6 pp	9792.000	10.84	37.56	37.48	39.83	50.75	74.00	-23.25 peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

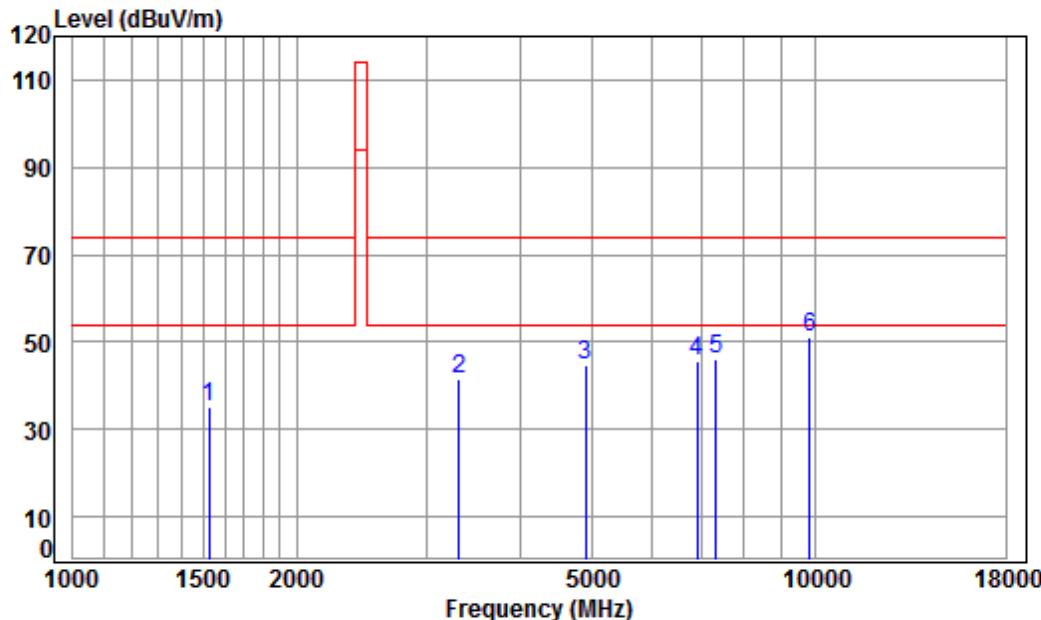


Condition: 3m VERTICAL

Job No : 09603CR

Mode : 2448 TX  
: 2.4G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1525.000	5.45	25.91	41.42	45.00	34.94	74.00	-39.06	peak
2	3308.894	6.29	31.87	42.18	45.38	41.36	74.00	-32.64	peak
3	4896.000	7.98	34.32	42.48	44.99	44.81	74.00	-29.19	peak
4	6914.763	10.36	36.27	40.91	39.89	45.61	74.00	-28.39	peak
5	7344.000	10.04	36.36	40.62	40.13	45.91	74.00	-28.09	peak
6 pp	9792.000	10.84	37.56	37.48	40.36	51.28	74.00	-22.72	peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

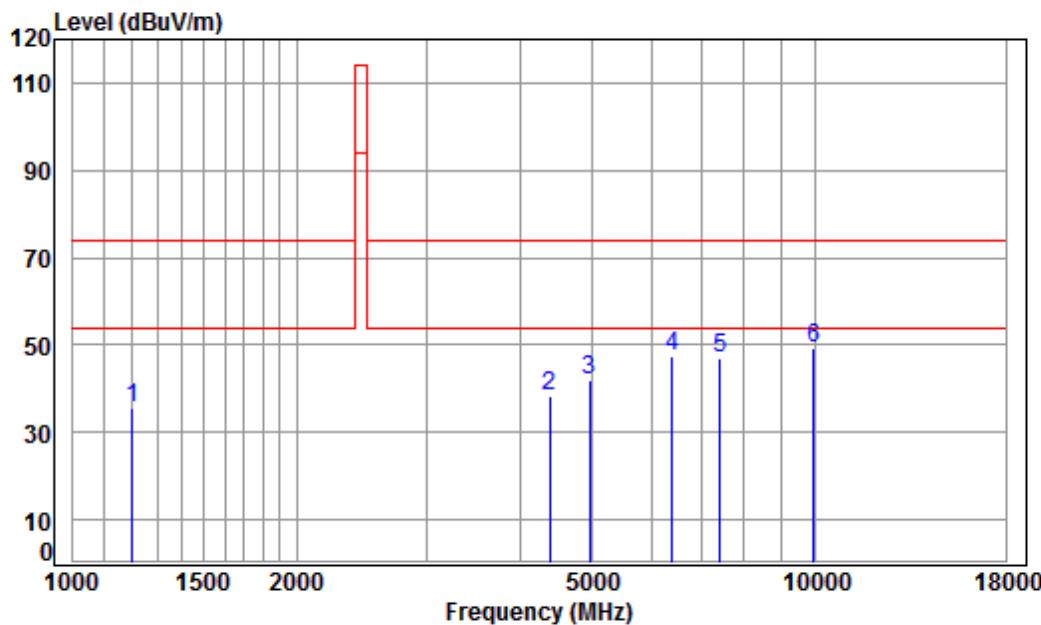


Condition: 3m HORIZONTAL

Job No : 09603CR

Mode : 2480 TX  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	47.71	35.44	74.00	-38.56 peak
2	4379.699	7.43	33.60	42.40	39.76	38.39	74.00	-35.61 peak
3	4960.000	8.05	34.43	42.49	41.90	41.89	74.00	-32.11 peak
4	6414.167	11.38	35.03	41.28	42.12	47.25	74.00	-26.75 peak
5	7440.000	10.02	36.32	40.56	41.30	47.08	74.00	-26.92 peak
6 pp	9920.000	10.90	37.58	37.31	37.90	49.07	74.00	-24.93 peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High

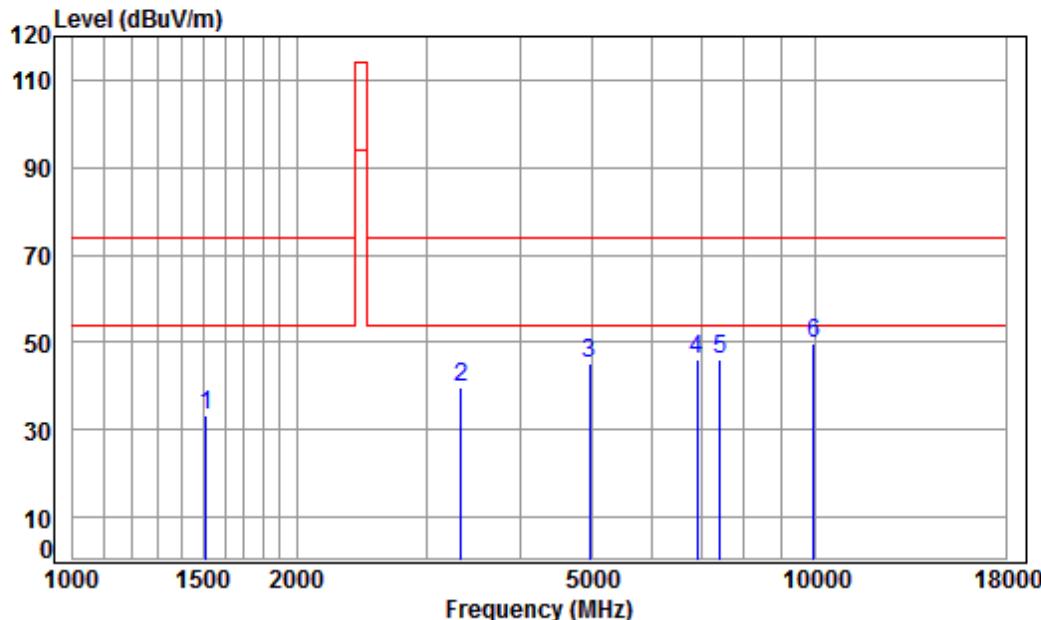

Condition: 3m VERTICAL

Job No : 09603CR

Mode : 2480 TX  
: 2.4G

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1511.833	5.46	25.85	41.41	43.57	33.47	74.00	-40.53 peak
2	3328.077	6.30	31.91	42.18	43.59	39.62	74.00	-34.38 peak
3	4960.000	8.05	34.43	42.49	45.19	45.18	74.00	-28.82 peak
4	6914.763	10.36	36.27	40.91	40.27	45.99	74.00	-28.01 peak
5	7440.000	10.02	36.32	40.56	40.52	46.30	74.00	-27.70 peak
6 pp	9920.000	10.90	37.58	37.31	38.34	49.51	74.00	-24.49 peak

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor &amp; Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## **8 Photographs**

### **8.1 Test Setup**

Refer to Setup Photos

### **8.2 EUT Constructional Details (EUT Photos)**

Refer to EUT external and internal photos

- End of the Report -