



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: LAVA International Limited

Address: A-56, Sector-64, Gautam Buddha Nagar, Noida Uttar Pradesh 201301, India

FCC ID: 2ARTX -TH008

Product Name: Tablet

Standard(s): 47 CFR Part 2
47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E
47 CFR Part 27
ANSI C63.26-2015

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230637415-00E

Date Of Issue: 2023/8/22

Reviewed By: Calvin Chen

Title: RF Engineer

Reviewed By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.2 Support Equipment List and Details	10
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 Applicable Standard For Part 22 Subpart H:.....	13
3.1.1 RF Output Power	13
3.1.2 Spurious Emissions.....	13
3.1.3 Frequency stability.....	13
3.2 Applicable Standard For Part 24 Subpart E:	15
3.2.1 RF Output Power	15
3.2.2 Spurious Emissions.....	15
3.2.3 Frequency stability.....	15
3.3 Applicable Standard For Part 27:.....	16
3.3.1 RF Output Power	16
3.3.2 Spurious Emissions.....	16
3.3.3 Frequency stability.....	18
3.4 Test Method:	19
3.4.1 RF Output Power	19
Test Setup Block:.....	19
3.4.2 Occupied Bandwidth.....	20
Test Setup Block:.....	20
3.4.3 Spurious emissions at antenna terminals.....	21
Test Setup Block:.....	21
3.4.4 Out of band emission	22
Test Setup Block:.....	22
3.4.5 Frequency stability.....	23
Test Setup Block:.....	23
3.4.6 Field strength of spurious radiation.....	24
4. Test DATA AND RESULTS.....	26
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....	26
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....	33
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5.....	40

4.4 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 40.....56

4.5 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41.....81

4.6 RADIATED SPURIOUS EMISSIONS.....97

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230637415-00E	Original Report	2023/8/22

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

General:

EUT Name:	Tablet
EUT Model:	TH008
Multiple Model:	TH008A, TH008B, TH008Y, TH008Z
Operation Bands and modes:	GSM/GPRS/EDGE: 850/1900 LTE: Band 5/40/41
Modulation Type:	GMSK, 8PSK, BPSK, QPSK, 16QAM
Rated Input Voltage:	DC 3.8V from battery or DC 5V from adapter
Serial Number:	27KB-1
EUT Received Date:	2023/6/9
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

Operation Voltage(V_{DC}) ▲:

Lowest:	3.3	Normal:	3.8	Highest:	4.35
---------	-----	---------	-----	----------	------

Antenna Information ▲:

Antenna	Manufacturer	Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (G _T) (dBi)	L _c (dB)
Main	SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD	FPC	GSM850	824-849	0.22	0.1
			PCS1900	1850-1910	1.17	0.2
			LTE B5	824-849	0.22	0.1
			LTE B40 Lower	2305-2315	0.46	0.3
			LTE B40 Upper	2350-2360	0.46	0.3
			LTE B41	2535-2655	1.14	0.3
Note: Lc= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.						

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting:	
GSM/GPRS/EGPRS	
Function: Menu select > GSM Mobile Station > GSM 850/1900	
Press Connection control to choose the different menus	
Press RESET > choose all the reset all settings	
Connection Press Signal Off to turn off the signal and change settings	
Network Support > GSM + GPRS or GSM + EGSM	
Main Service > Packet Data	
Service selection > Test Mode A – Auto Slot Config. off	
MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting	
> Slot configuration > Uplink/Gamma	
> 33 dBm for GPRS 850	
> 30 dBm for GPRS 1900	
> 27 dBm for EGPRS 850	
> 26 dBm for EGPRS 1900	
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel	
Frequency Offset > + 0 Hz	
Mode > BCCH and TCH	
BCCH Level > -85 dBm (May need to adjust if link is not stable)	
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]	
Channel Type > Off	
P0 > 4 dB	
Slot Config > Unchanged (if already set under MS signal)	
TCH > choose desired test channel	
Hopping > Off	
Main Timeslot > 3	
Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)	
Bit Stream > 2E9-1 PSR Bit Stream	
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input	
Connection Press Signal on to turn on the signal and change settings	

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30 15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	A Index	20	12	1	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI s	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2	41	20	>10	≤ 1
			5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	See Table 6.2.4-4	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SZTY	Adapter	TPA-23A050200UU01	AD220930003
IPRO	Earphone	Phonenix 5.0s	EP221126001
Unknown	Antenna	Unknown	Unknown
R&S	Wideband Radio Communication Tester	CMW500	143458

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	NO	NO	0.8	Adapter	EUT
Earphone Cable	NO	NO	0.8	EUT	Earphone
Antenna Cable	NO	NO	2	CMW500	Antenna

1.2.4 Block Diagram of Test Setup

Spurious emissions:

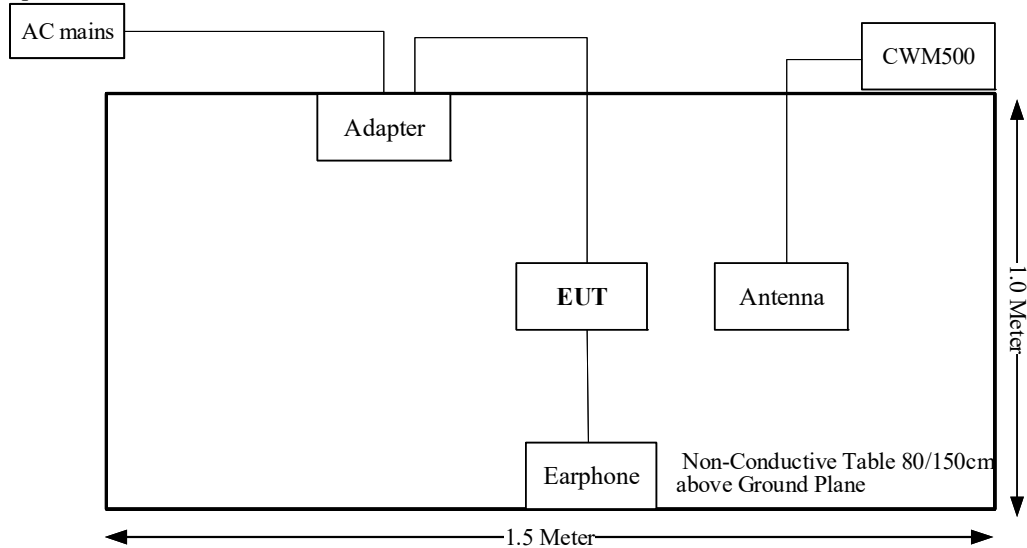

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232; §27.50	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905, §22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 22.917; § 24.238; §27.53	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917; § 24.238; §27.53	Out of band emission, Band Edge	Compliant
FCC§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053 § 22.917; § 24.238; §27.53	Field Strength of Spurious Radiation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-toaverage ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rmsequivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.4 Test Method:

3.4.1 RF Output Power

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

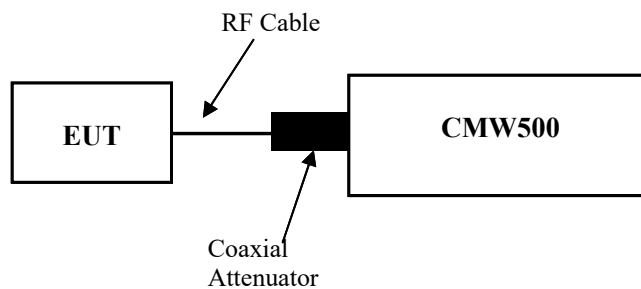

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.4.2 Occupied Bandwidth


According to CFR Part 2.1049, ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

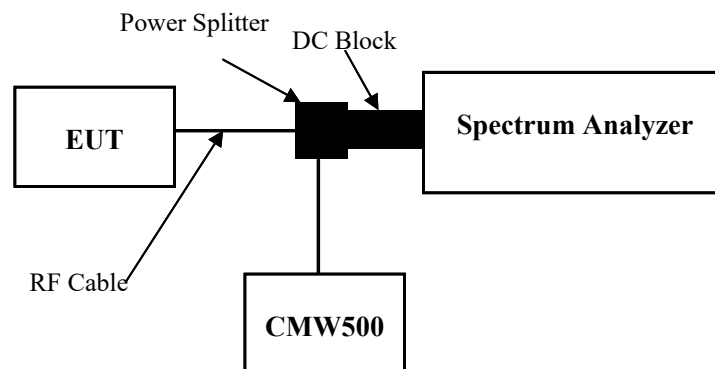


3.4.3 Spurious emissions at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),⁸ effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

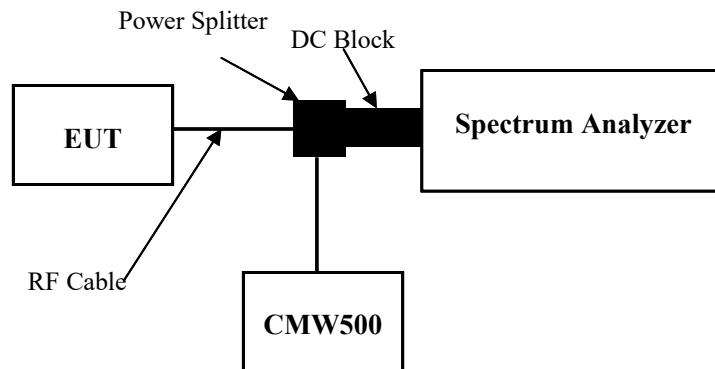


3.4.4 Out of band emission

According to ANSI C63.26-2015 Section 5.7.3:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

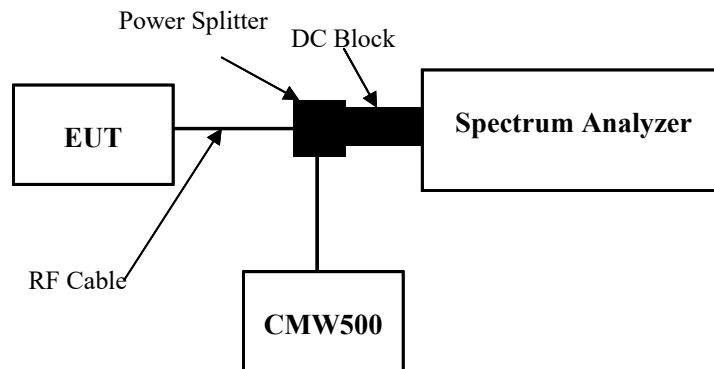

3.4.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and $\pm 15\%$ supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

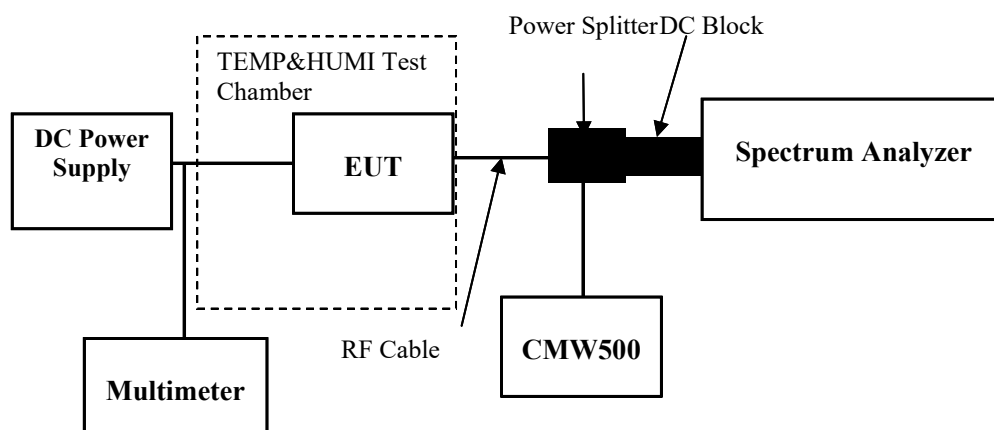

3.4.6 Field strength of spurious radiation

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

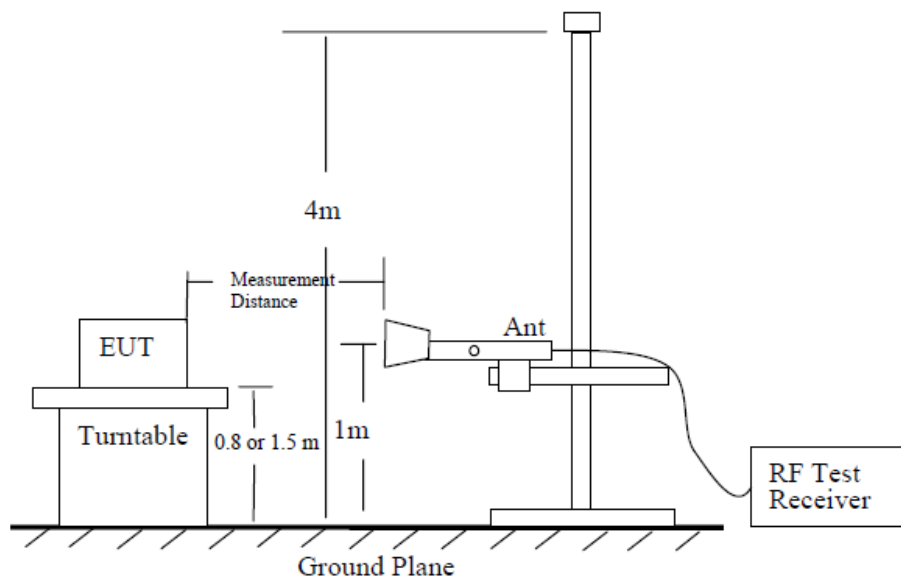


Figure 6 —Test site-up for radiated ERP and/or EIRP measurements

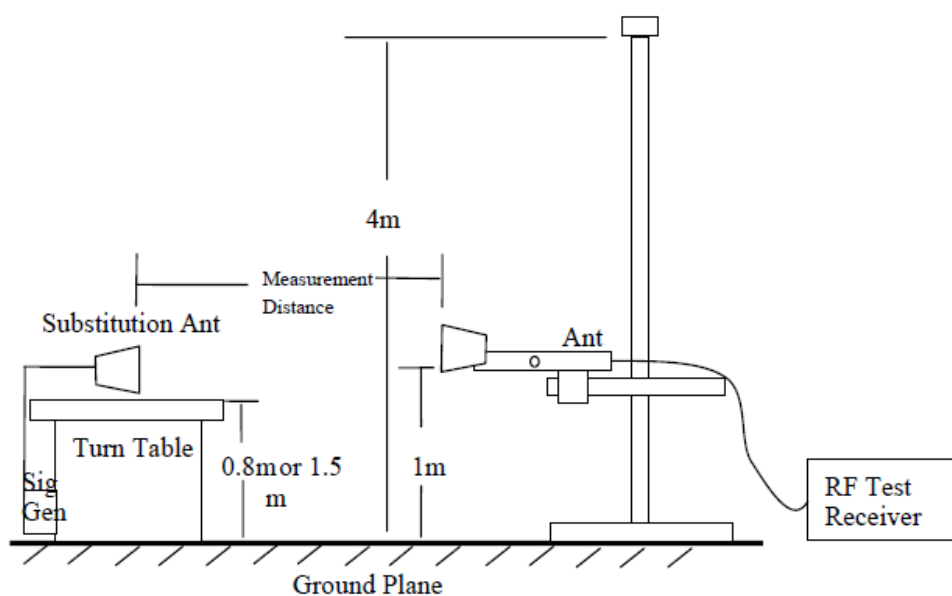


Figure 7 —Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	27KB-1	Test Date:	2023/7/1~2023/8/21
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~26.1	Relative Humidity: (%)	52~54	ATM Pressure: (kPa)	101.2~101.4
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2023/3/31	2024/3/30
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

Test Data:**FCC§2.1046;§ 22.913 (a):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	33.4	33.5	33.5	31.47	38.45
GPRS 1 Slot	33.34	33.5	33.47	31.47	38.45
GPRS 2 Slots	31.24	31.29	31.28	29.26	38.45
GPRS 3 Slots	29.3	29.33	29.28	27.3	38.45
GPRS 4 Slots	26.93	26.98	26.96	24.95	38.45
EDGE 1 Slot	26.01	26.22	26.34	24.31	38.45
EDGE 2 Slots	24.95	25.31	25.29	23.28	38.45
EDGE 3 Slots	22.98	23.22	23.41	21.38	38.45
EDGE 4 Slots	20.3	20.51	20.58	18.55	38.45
Note: $ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$ $G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$					
				Result:	Pass

FCC §2.1049, §22.917, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	242	244	242	314	318	318
EDGE	247	246	247	312	309	312
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--


FCC §2.1051, §22.917(a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---







FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	5	0.006	2.5
	-20	3.8	4	0.005	2.5
	-10	3.8	12	0.014	2.5
	0	3.8	9	0.011	2.5
	10	3.8	-1	-0.001	2.5
	20	3.8	2	0.002	2.5
	30	3.8	7	0.008	2.5
	40	3.8	3	0.004	2.5
	50	3.8	9	0.011	2.5
Frequency Stability vs. Voltage	20	3.3	13	0.016	2.5
	20	4.35	5	0.006	2.5
				Result:	Pass

Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	4	0.005	2.5
	-20	3.8	12	0.014	2.5
	-10	3.8	-4	-0.005	2.5
	0	3.8	2	0.002	2.5
	10	3.8	6	0.007	2.5
	20	3.8	-2	-0.002	2.5
	30	3.8	-7	-0.008	2.5
	40	3.8	12	0.014	2.5
	50	3.8	-4	-0.005	2.5
Frequency Stability vs. Voltage	20	3.3	1	0.001	2.5
	20	4.35	8	0.010	2.5
				Result:	Pass

Test Plots(Note: The 10dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):

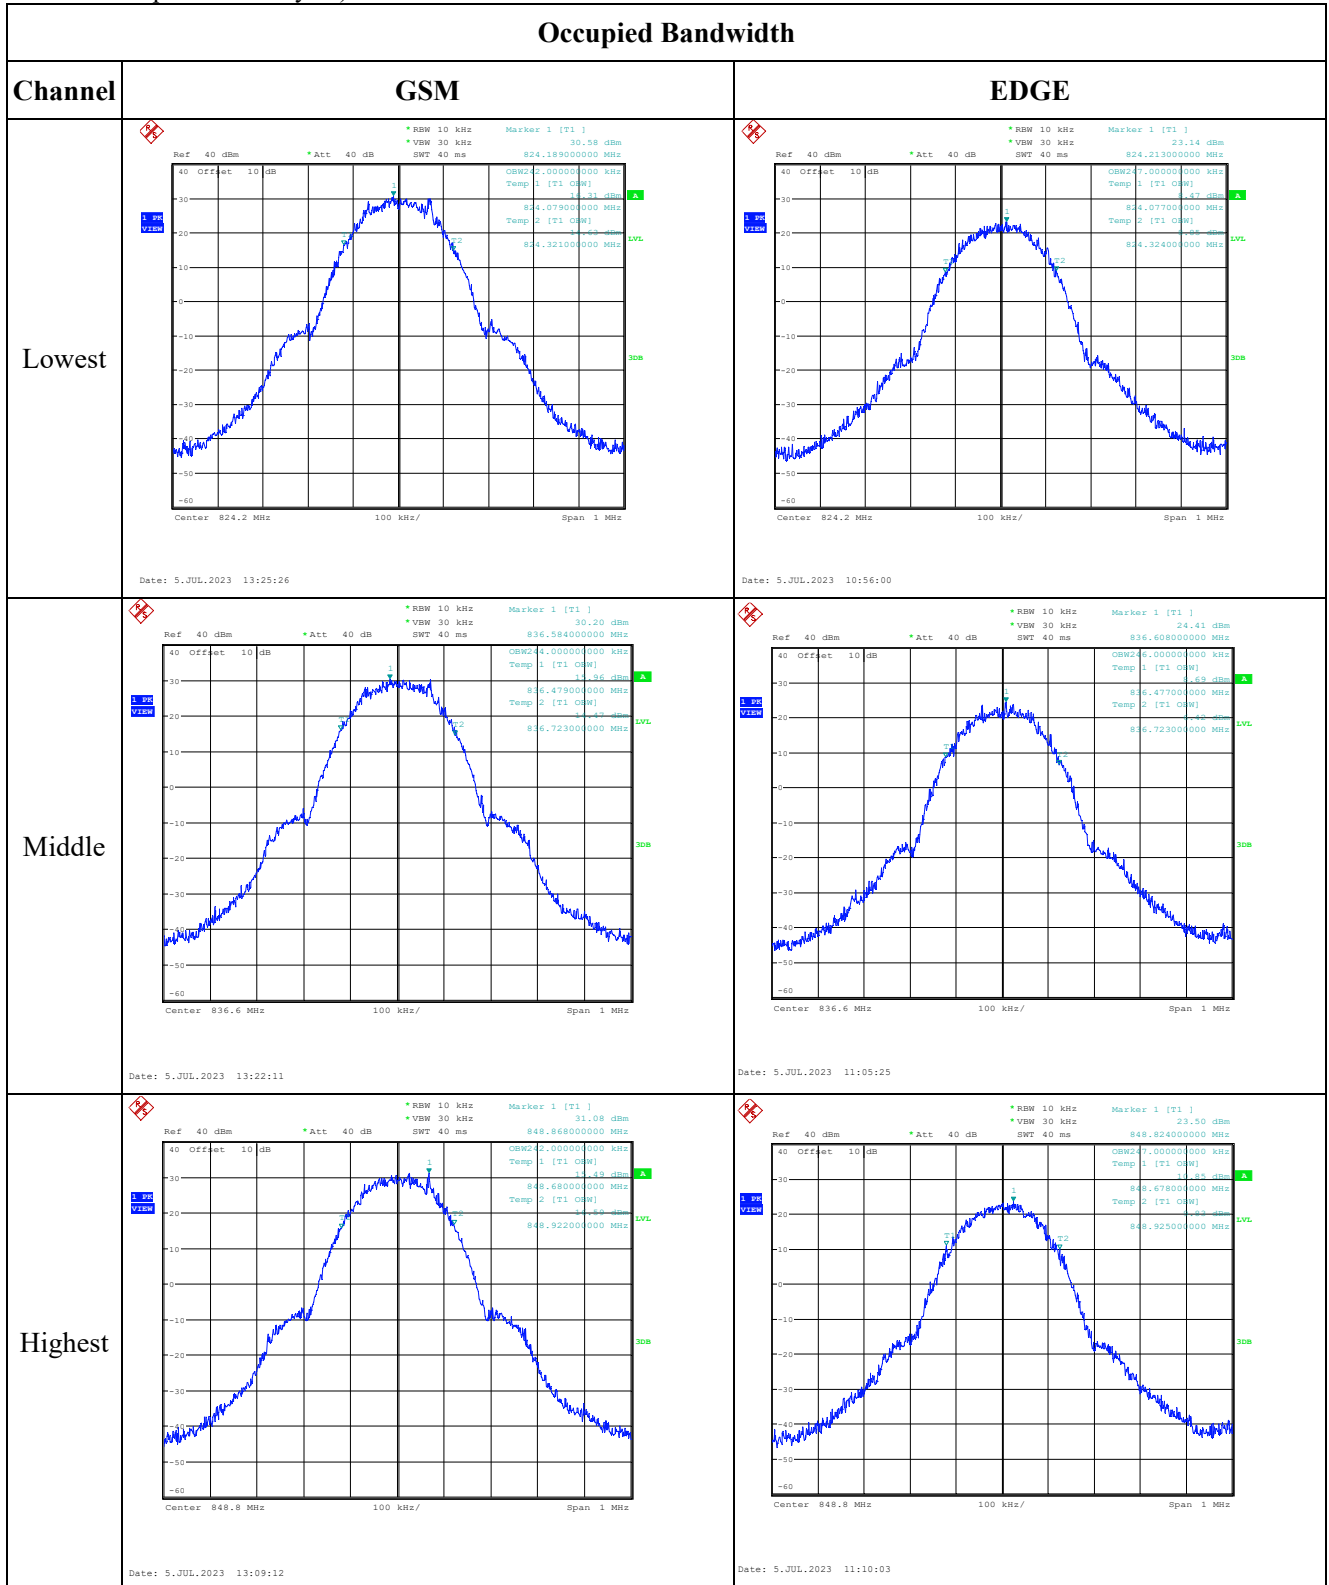

26dB Emission Bandwidth

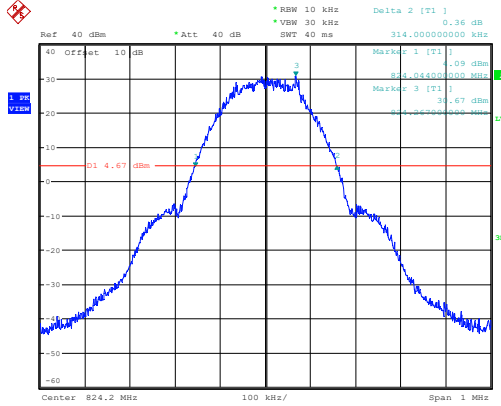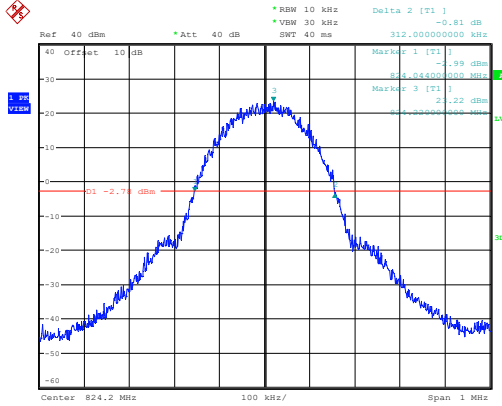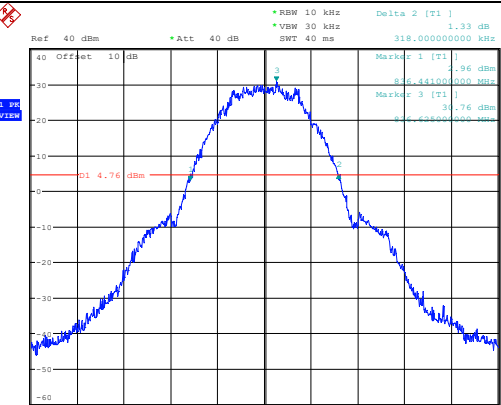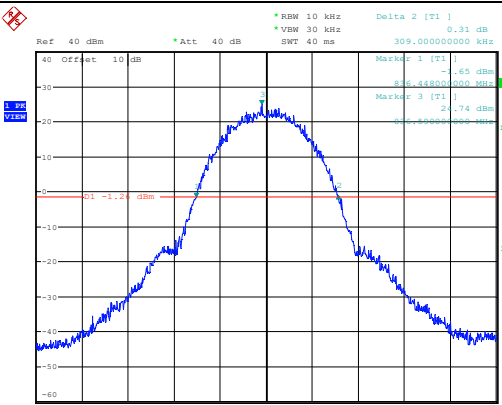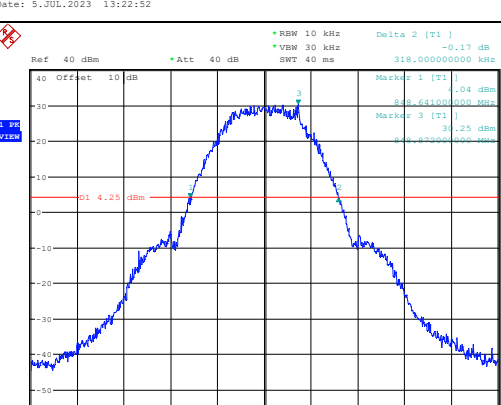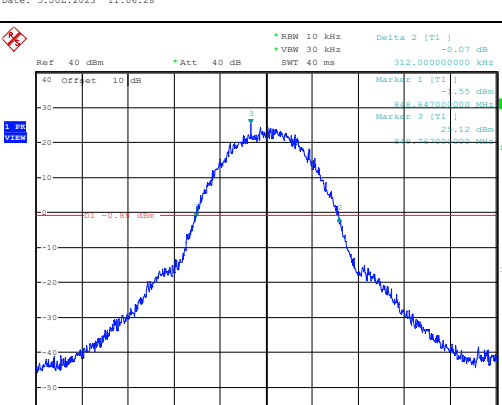
Channel	GSM	EDGE
Lowest	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] 0.36 dB *VSW 30 kHz SWT 40 ms 314.00000000 kHz Marker 1 [T1] 4.09 dBm Marker 2 [T1] 38.67 dBm Marker 3 [T1] 38.67 dBm D1 4.67 dBm Center 824.2 MHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 13:26:17	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -0.81 dB *VSW 30 kHz SWT 40 ms 312.00000000 kHz Marker 1 [T1] -2.99 dBm Marker 2 [T1] -2.99 dBm Marker 3 [T1] 23.22 dBm D1 -2.78 dBm Center 824.2 MHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 10:56:31
Middle	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] 1.33 dB *VSW 30 kHz SWT 40 ms 318.00000000 kHz Marker 1 [T1] 2.96 dBm Marker 2 [T1] 38.76 dBm Marker 3 [T1] 38.76 dBm D1 4.76 dBm Center 836.6 MHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 13:22:52	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -0.31 dB *VSW 30 kHz SWT 40 ms 309.00000000 kHz Marker 1 [T1] -1.65 dBm Marker 2 [T1] -1.65 dBm Marker 3 [T1] 24.74 dBm D1 -1.22 dBm Center 836.6 MHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 11:06:28
Highest	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -0.17 dB *VSW 30 kHz SWT 40 ms 318.00000000 kHz Marker 1 [T1] 2.04 dBm Marker 2 [T1] 38.25 dBm Marker 3 [T1] 38.25 dBm D1 4.25 dBm Center 848.8 MHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 13:10:03	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -0.07 dB *VSW 30 kHz SWT 40 ms 312.00000000 kHz Marker 1 [T1] -1.55 dBm Marker 2 [T1] -1.55 dBm Marker 3 [T1] 25.12 dBm D1 -0.84 dBm Center 848.8 MHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 11:10:55

Spurious Emissions at Antenna Terminal

Channel


GSM

Lowest

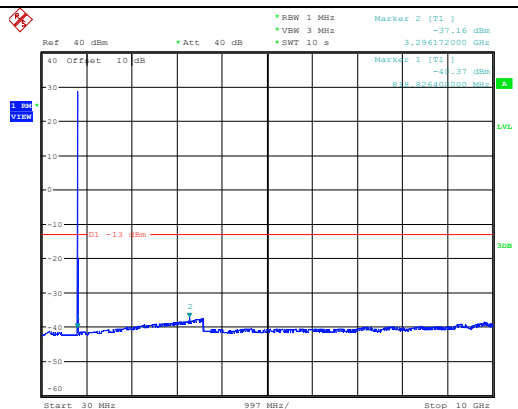


Date: 5.JUL.2023 13:27:50

Middle

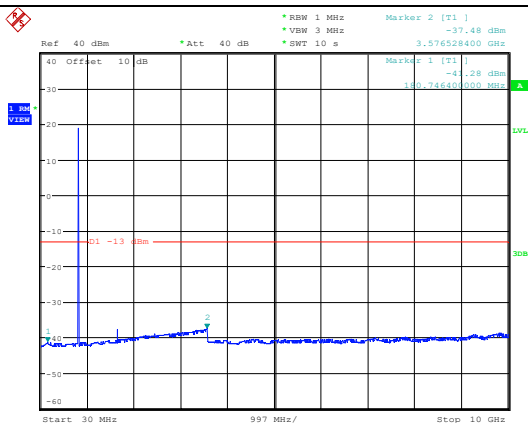

Date: 5.JUL.2023 13:23:28

Highest

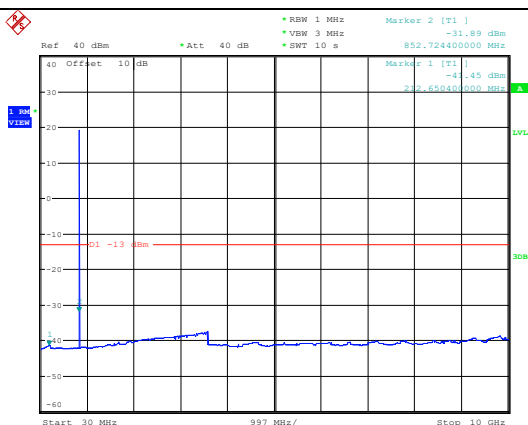

Date: 5.JUL.2023 15:39:46

Out of band emission, Band Edge

Mode	Lowest	Highest
GSM	Ref 40 dBm *Att 40 dB *RBW 10 kHz *VBW 30 kHz *SWT 20 s Marker 2 [T1] -24.68 dBm 824.000000000 MHz Marker 1 [T1] -22.74 dBm 823.880000000 MHz Start 823 MHz 200 kHz/ Stop 825 MHz Date: 5.JUL.2023 13:27:14	Ref 40 dBm *Att 40 dB *RBW 10 kHz *VBW 30 kHz *SWT 20 s Marker 2 [T1] -24.02 dBm 849.000000000 MHz Marker 1 [T1] -22.33 dBm 848.000000000 MHz Start 848 MHz 200 kHz/ Stop 850 MHz Date: 5.JUL.2023 13:13:25
EDGE	Ref 40 dBm *Att 40 dB *RBW 10 kHz *VBW 30 kHz *SWT 20 s Marker 2 [T1] -31.34 dBm 824.000000000 MHz Marker 1 [T1] -30.23 dBm 823.880000000 MHz Start 823 MHz 200 kHz/ Stop 825 MHz Date: 5.JUL.2023 10:58:03	Ref 30 dBm *Att 40 dB *RBW 10 kHz *VBW 30 kHz *SWT 20 s Marker 2 [T1] -33.20 dBm 849.000000000 MHz Marker 1 [T1] -31.51 dBm 848.000000000 MHz Start 848 MHz 200 kHz/ Stop 850 MHz Date: 5.JUL.2023 11:11:52

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	27KB-1	Test Date:	2023/7/1~2023/8/21
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~26.1	Relative Humidity: (%)	52~54	ATM Pressure: (kPa)	101.2~101.4
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

Test Data:**FCC§2.1046;§ 24.232 (c):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	30.7	30.7	30.71	31.68	33
GPRS 1 Slot	30.78	30.74	30.72	31.75	33
GPRS 2 Slots	28.4	28.2	27.98	29.37	33
GPRS 3 Slots	26.77	26.55	26.31	27.74	33
GPRS 4 Slots	25.39	25.25	25.02	26.36	33
EDGE 1 Slot	26.31	26.32	26.21	27.29	33
EDGE 2 Slots	24.76	24.59	24.6	25.73	33
EDGE 3 Slots	22.42	22.57	22.59	23.56	33
EDGE 4 Slots	21.39	21.5	21.69	22.66	33
Note: EIRP=Conducted Power(dBm) - L _c (dB) + G _T (dBi)					
				Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	245	245	245	309	320	314
EDGE	246	248	250	317	317	318
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--


FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---







FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.029	1850.000	1909.713	1910.000
	-20	3.8	1850.027	1850.000	1909.716	1910.000
	-10	3.8	1850.032	1850.000	1909.718	1910.000
	0	3.8	1850.030	1850.000	1909.712	1910.000
	10	3.8	1850.028	1850.000	1909.715	1910.000
	20	3.8	1850.026	1850.000	1909.719	1910.000
	30	3.8	1850.028	1850.000	1909.714	1910.000
	40	3.8	1850.025	1850.000	1909.717	1910.000
	50	3.8	1850.026	1850.000	1909.712	1910.000
Frequency Stability vs. Voltage	20	3.3	1850.027	1850.000	1909.718	1910.000
	20	4.35	1850.028	1850.000	1909.713	1910.000
					Result:	Pass

Test Mode:	8PSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.032	1850.000	1909.964	1910.000
	-20	3.8	1850.030	1850.000	1909.966	1910.000
	-10	3.8	1850.035	1850.000	1909.960	1910.000
	0	3.8	1850.033	1850.000	1909.962	1910.000
	10	3.8	1850.032	1850.000	1909.962	1910.000
	20	3.8	1850.036	1850.000	1909.964	1910.000
	30	3.8	1850.032	1850.000	1909.963	1910.000
	40	3.8	1850.035	1850.000	1909.961	1910.000
	50	3.8	1850.036	1850.000	1909.967	1910.000
Frequency Stability vs. Voltage	20	3.3	1850.030	1850.000	1909.965	1910.000
	20	4.35	1850.034	1850.000	1909.965	1910.000
					Result:	Pass


Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):

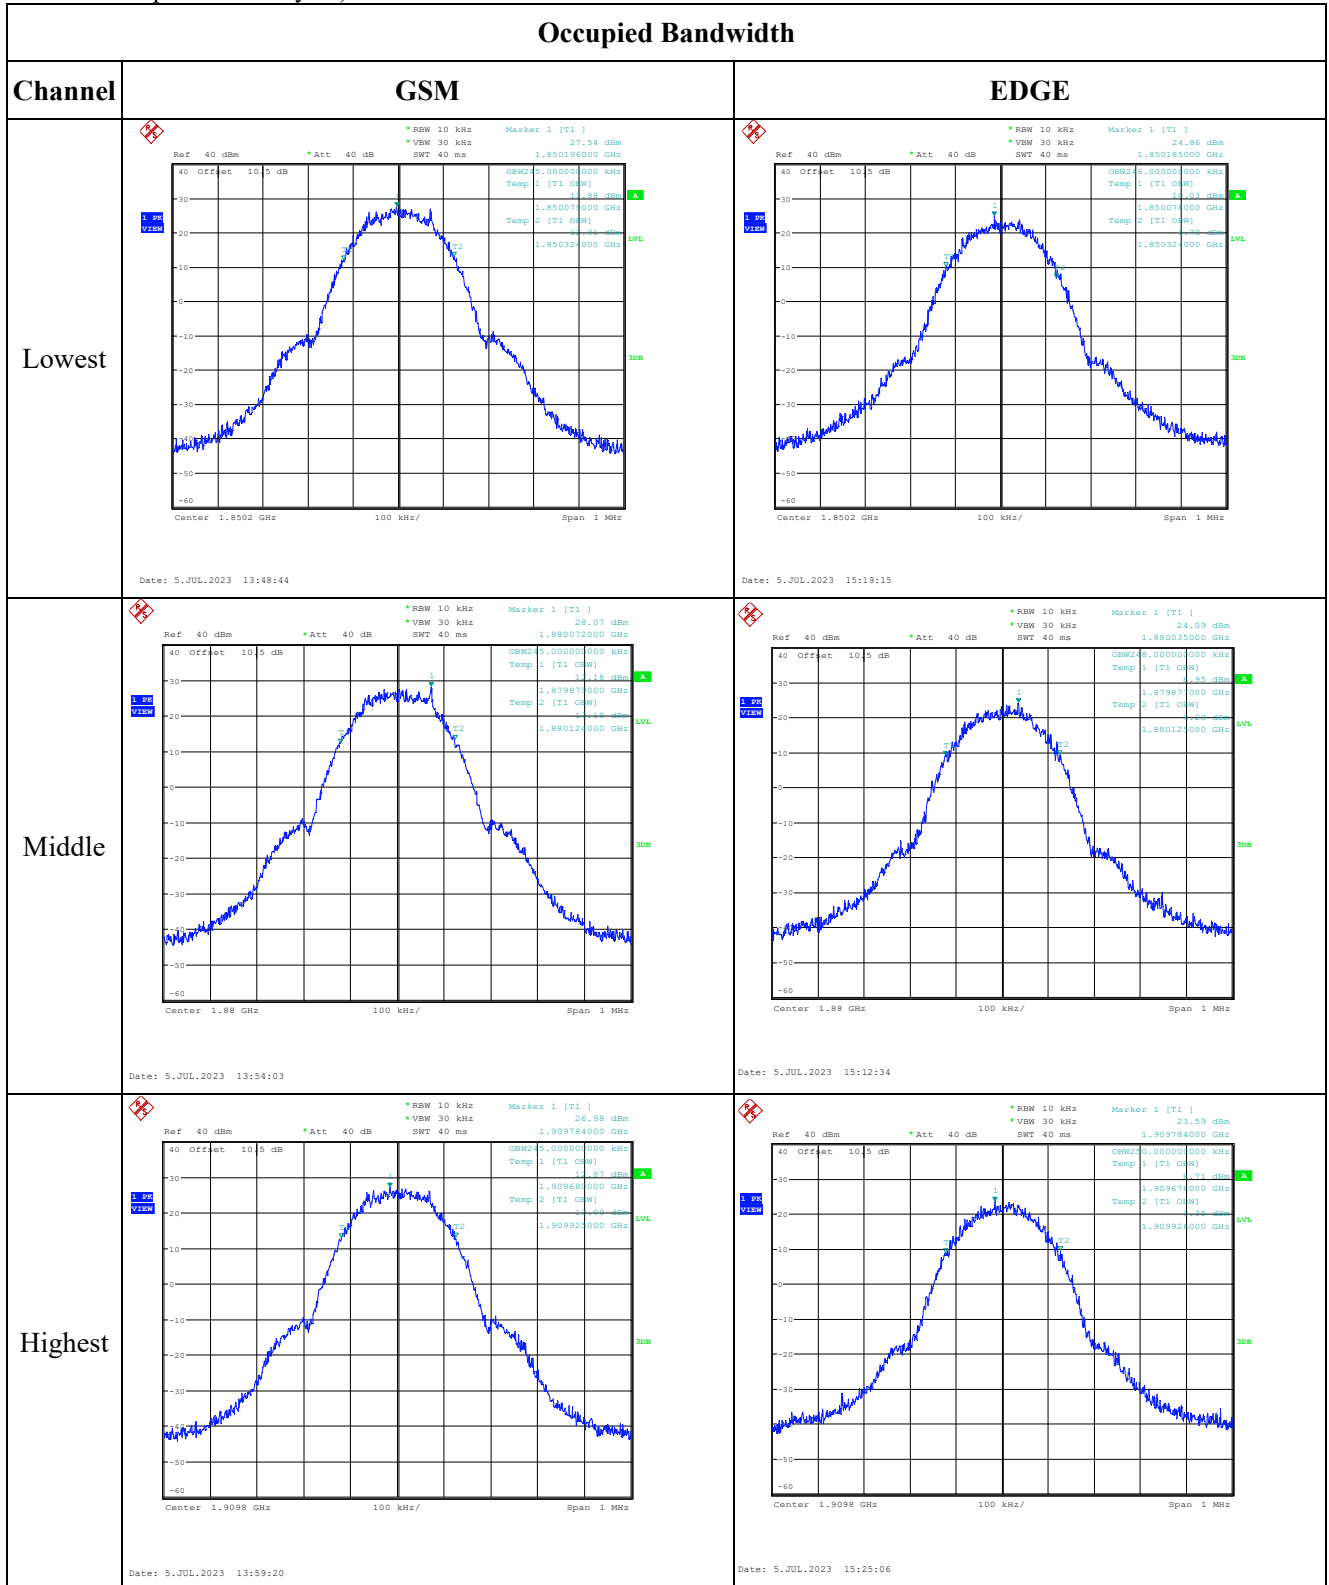





26dB Emission Bandwidth

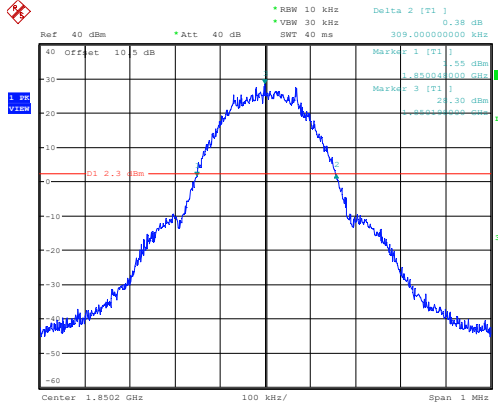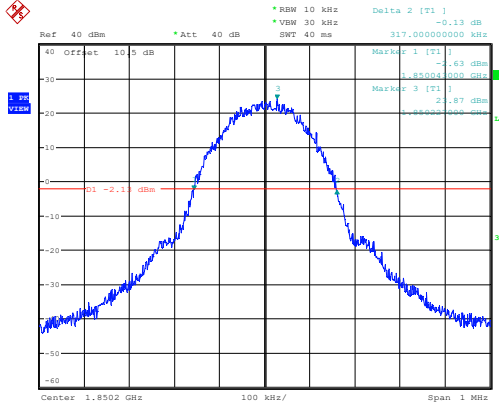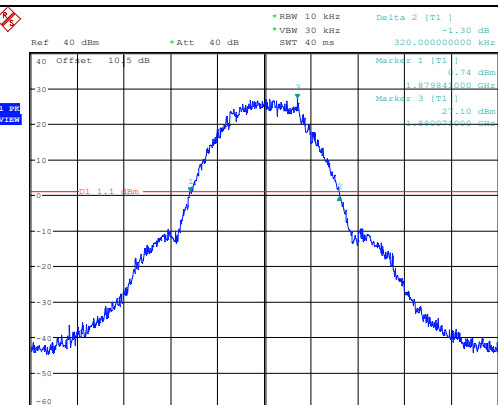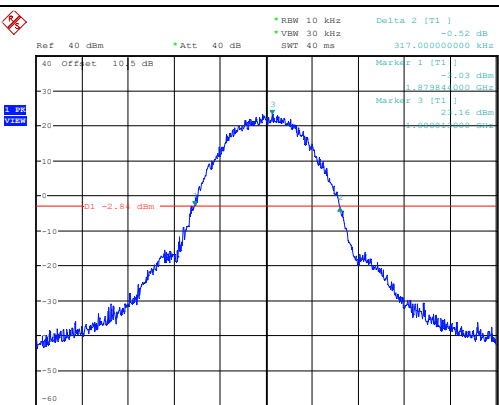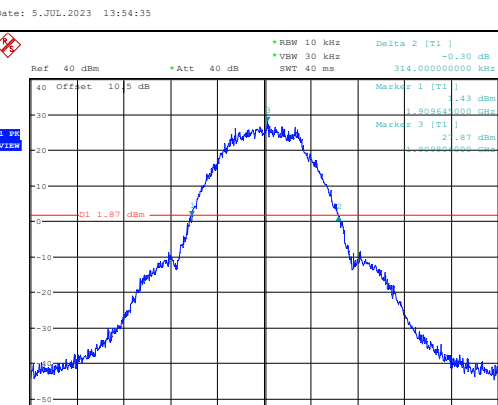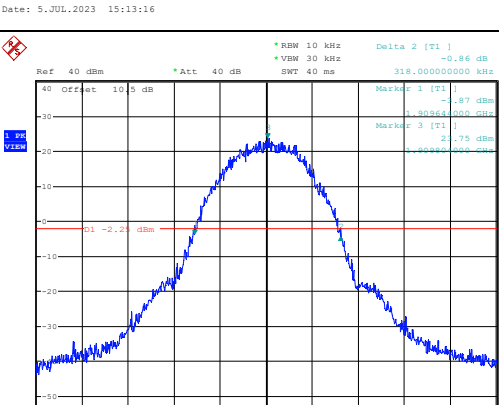Channel	GSM	EDGE
Lowest	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] 0.38 dB *VSW 30 kHz SWT 40 ms 309.000000000 kHz Marker 1 [T1] -1.55 dBm Marker 3 [T1] -2.30 dBm Center 1.8502 GHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 13:49:17	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -0.13 dB *VSW 30 kHz SWT 40 ms 317.000000000 kHz Marker 1 [T1] -1.63 dBm Marker 3 [T1] -2.87 dBm Center 1.8502 GHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 15:19:57
Middle	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -1.30 dB *VSW 30 kHz SWT 40 ms 320.000000000 kHz Marker 1 [T1] -0.74 dBm Marker 3 [T1] -2.10 dBm Center 1.88 GHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 13:54:35	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -0.52 dB *VSW 30 kHz SWT 40 ms 317.000000000 kHz Marker 1 [T1] -0.52 dBm Marker 3 [T1] -2.16 dBm Center 1.88 GHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 15:13:16
Highest	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -0.30 dB *VSW 30 kHz SWT 40 ms 314.000000000 kHz Marker 1 [T1] -0.43 dBm Marker 3 [T1] -2.87 dBm Center 1.9098 GHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 14:00:02	 Ref 40 dBm *Att 40 dB *RBW 10 kHz Delta 2 [T1] -0.86 dB *VSW 30 kHz SWT 40 ms 318.000000000 kHz Marker 1 [T1] -0.86 dBm Marker 3 [T1] -2.73 dBm Center 1.9098 GHz 100 kHz/ Span 1 MHz Date: 5.JUL.2023 15:25:38

Spurious Emissions at Antenna Terminal

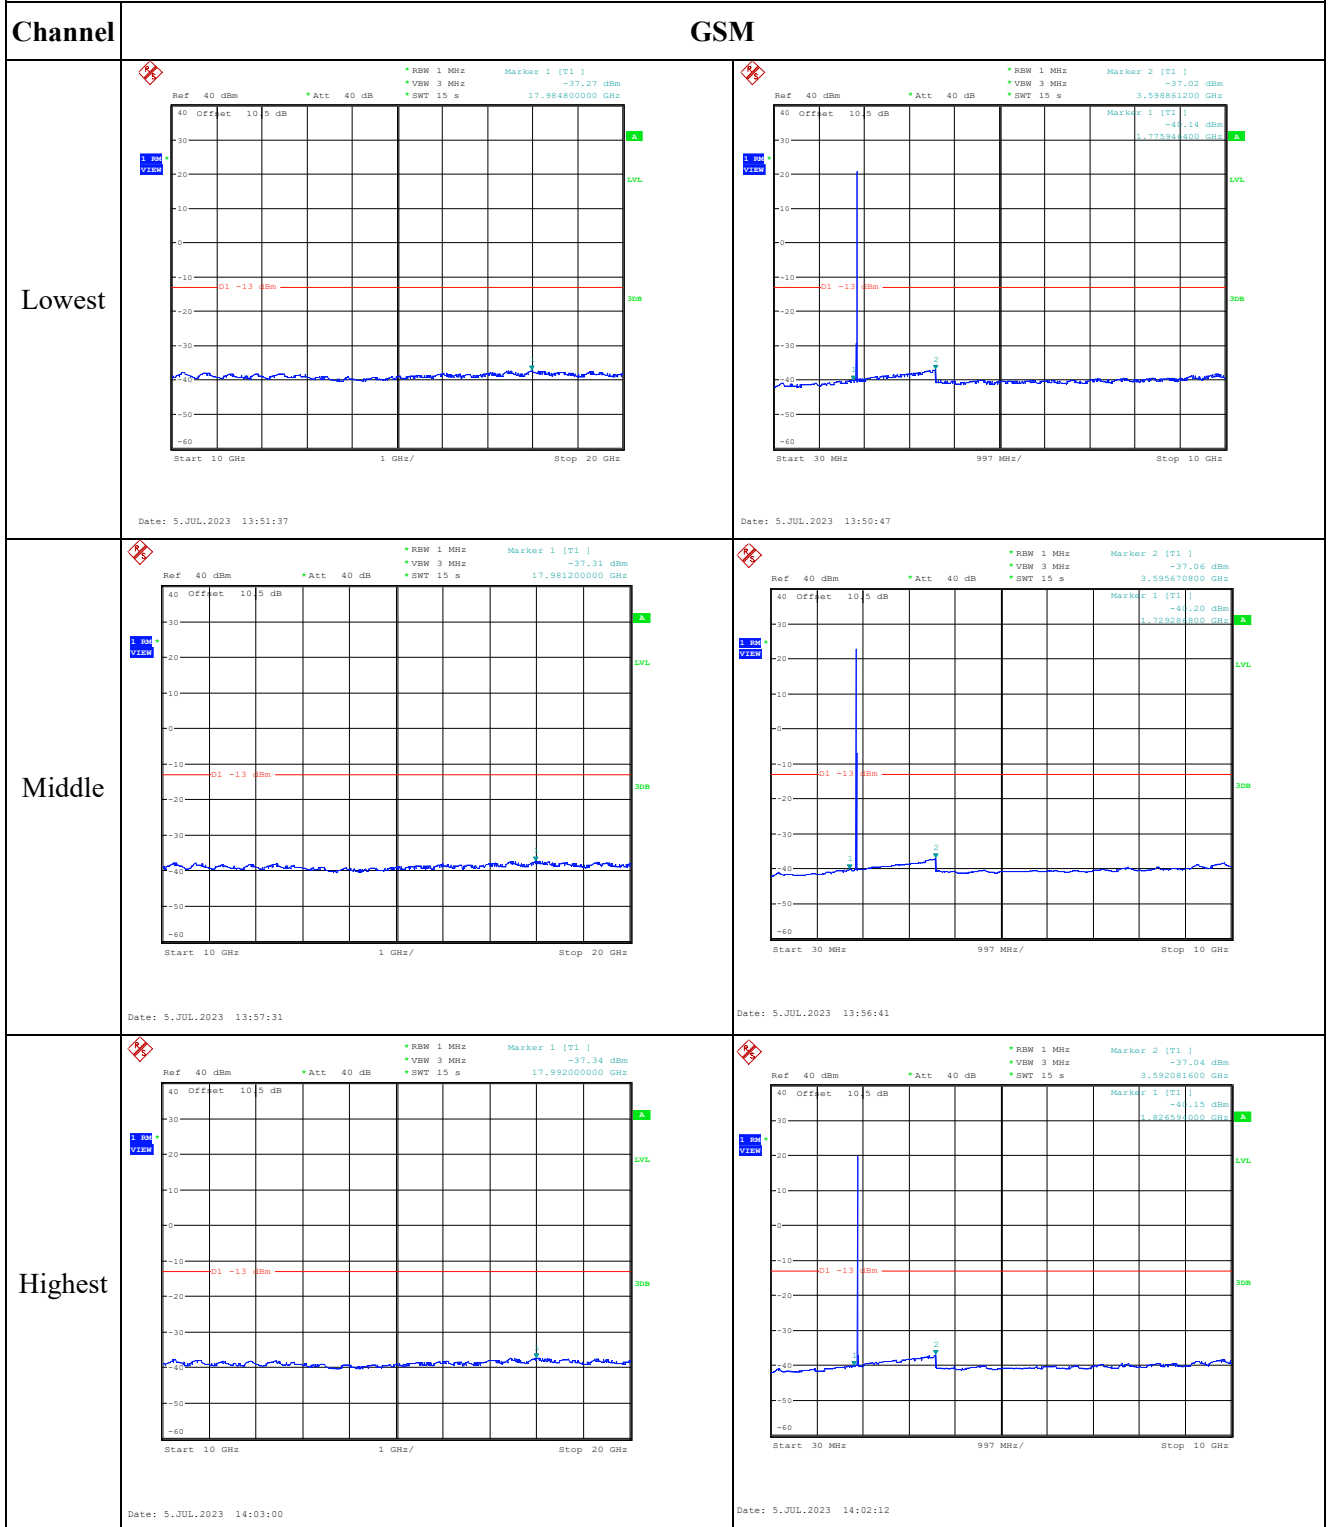

Out of band emission, Band Edge

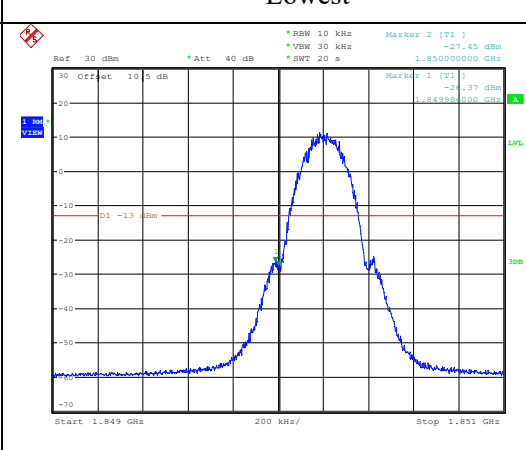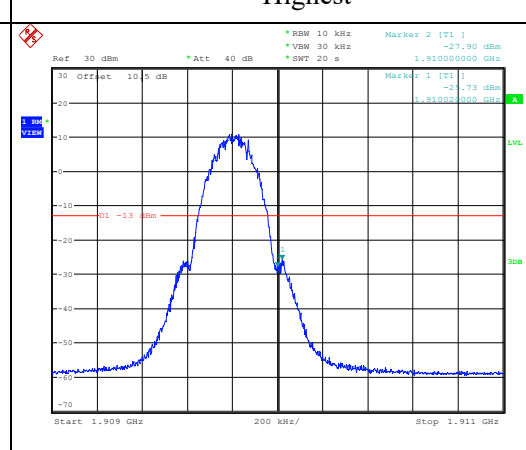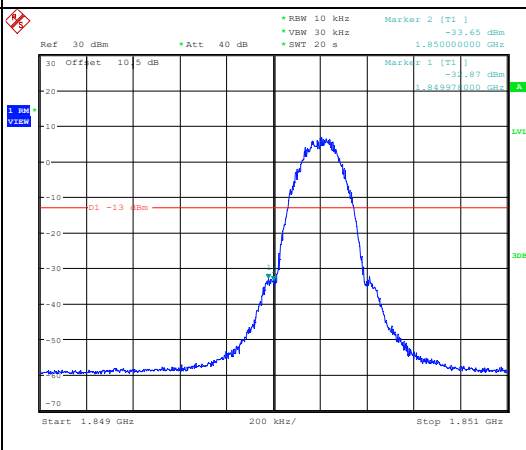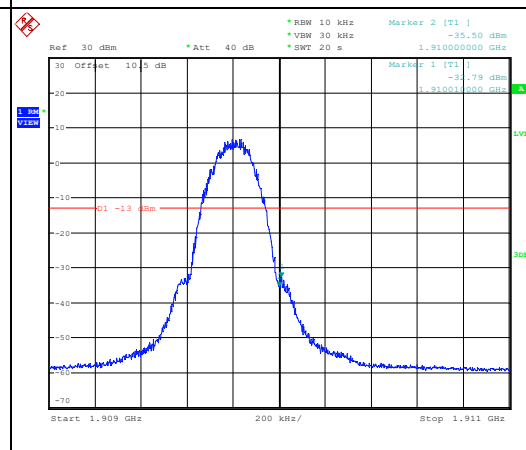Channel	Lowest	Highest
GSM	 Ref: 30 dBm, Att: 40 dB, RBW: 10 kHz, VBW: 30 kHz, SWT: 20 s, Marker 2 [T1]: 1.850000000 GHz, -24.37 dBm, Marker 1 [T1]: 1.849999999 GHz, -27.45 dBm, D1: -13 dBm, Start: 1.849 GHz, Stop: 1.851 GHz, Date: 5.JUL.2023 13:50:07	 Ref: 30 dBm, Att: 40 dB, RBW: 10 kHz, VBW: 30 kHz, SWT: 20 s, Marker 2 [T1]: 1.910000000 GHz, -25.73 dBm, Marker 1 [T1]: 1.910000000 GHz, -27.90 dBm, D1: -13 dBm, Start: 1.909 GHz, Stop: 1.911 GHz, Date: 5.JUL.2023 14:01:04
EDGE	 Ref: 30 dBm, Att: 40 dB, RBW: 10 kHz, VBW: 30 kHz, SWT: 20 s, Marker 2 [T1]: 1.850000000 GHz, -32.87 dBm, Marker 1 [T1]: 1.849999999 GHz, -33.65 dBm, D1: -13 dBm, Start: 1.849 GHz, Stop: 1.851 GHz, Date: 5.JUL.2023 15:21:24	 Ref: 30 dBm, Att: 40 dB, RBW: 10 kHz, VBW: 30 kHz, SWT: 20 s, Marker 2 [T1]: 1.910000000 GHz, -32.79 dBm, Marker 1 [T1]: 1.910000000 GHz, -35.50 dBm, D1: -13 dBm, Start: 1.909 GHz, Stop: 1.911 GHz, Date: 5.JUL.2023 15:26:48

4.3 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	27KB-1	Test Date:	2023/7/1~2023/8/21
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~26.1	Relative Humidity: (%)	52~54	ATM Pressure: (kPa)	101.2~101.4
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2023/3/31	2024/3/30
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.33	23.26	23.14	21.37	38.45
	RB1#3	23.29	23.28	23.26		
	RB1#5	23.29	23.22	23.24		
	RB3#0	23.4	23.31	23.23		
	RB3#3	23.37	23.32	23.37		
	RB6#0	22.32	22.37	22.26		
1.4MHz 16QAM	RB1#0	22.93	23.06	21.83	21.03	38.45
	RB1#3	22.89	22.95	21.97		
	RB1#5	22.9	22.92	21.92		
	RB3#0	22.52	22.11	22.4		
	RB3#3	22.52	22.19	22.36		
	RB6#0	21.54	21.29	21.53		
3MHz QPSK	RB1#0	23.35	23.32	23.15	21.32	38.45
	RB1#8	23.34	23.22	23.21		
	RB1#14	23.24	23.3	23.24		
	RB6#0	22.42	22.41	22.22		
	RB6#9	22.33	22.27	22.26		
	RB15#0	22.31	22.31	22.22		
3MHz 16QAM	RB1#0	23.08	22.12	22.48	21.05	38.45
	RB1#8	23.05	21.97	22.55		
	RB1#14	22.9	22.02	22.48		
	RB6#0	21.53	21.78	21.56		
	RB6#9	21.29	21.55	21.21		
	RB15#0	21.52	21.37	21.7		
5MHz QPSK	RB1#0	23.44	23.35	23.35	21.41	38.45
	RB1#13	23.21	23.25	23.21		
	RB1#24	23.19	23.24	23.17		
	RB15#0	22.39	22.38	22.3		
	RB15#10	22.16	22.25	22.18		
	RB25#0	22.28	22.26	22.16		
5MHz 16QAM	RB1#0	22.51	22.03	21.4	20.48	38.45
	RB1#13	22.36	21.94	21.3		
	RB1#24	22.28	21.93	21.31		
	RB15#0	21.33	21.61	21.27		
	RB15#10	21.08	21.33	21.66		
	RB25#0	21.24	21.24	21.72		
10MHz QPSK	RB1#0	23.51	23.15	23.19	21.48	38.45
	RB1#25	23.26	23.27	23.08		

	RB1#49	23.33	23.26	23.13		
	RB25#0	22.2	22.38	22.22		
	RB25#25	22.06	22.32	22.19		
	RB50#0	22.21	22.24	22.26		
10MHz 16QAM	RB1#0	22.57	21.56	22.39	20.54	38.45
	RB1#25	22.27	21.79	22.35		
	RB1#49	22.46	21.72	22.32		
	RB25#0	21.29	21.78	21.63		
	RB25#25	21.68	21.74	21.61		
	RB50#0	21.24	21.23	21.64		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)G_T(dBd)=G_T(dBi)-2.15**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	4.62	4.84	4.33	13
	RB50#0	5.42	5.35	5.64	13
10MHz 16QAM	RB1#0	5.67	5.74	5.71	13
	RB50#0	6.35	6.25	6.38	13
Result:					Pass

FCC §2.1049, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.098	1.104	1.254	1.260	1.260
1.4MHz 16QAM	1.110	1.092	1.104	1.260	1.254	1.254
3MHz QPSK	2.700	2.700	2.700	3.024	3.024	3.012
3MHz 16QAM	2.688	2.688	2.700	3.012	3.012	3.012
5MHz QPSK	4.520	4.520	4.520	4.980	4.980	5.000
5MHz 16QAM	4.540	4.540	4.520	5.000	5.000	5.000
10MHz QPSK	8.960	8.960	8.960	9.680	9.760	9.760
10MHz 16QAM	8.960	8.960	8.960	9.760	9.840	9.760

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §22.917(a):Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability

Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	4	0.005	2.5
	-20	3.8	10	0.012	2.5
	-10	3.8	14	0.017	2.5
	0	3.8	9	0.011	2.5
	10	3.8	7	0.008	2.5
	20	3.8	-2	-0.002	2.5
	30	3.8	-4	-0.005	2.5
	40	3.8	3	0.004	2.5
	50	3.8	-5	-0.006	2.5
Frequency Stability vs. Voltage	20	3.3	-7	-0.008	2.5
	20	4.35	5	0.006	2.5
Result:				Pass	

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	8	0.010	2.5
	-20	3.8	13	0.016	2.5
	-10	3.8	15	0.018	2.5
	0	3.8	-7	-0.008	2.5
	10	3.8	-5	-0.006	2.5
	20	3.8	7	0.008	2.5
	30	3.8	-11	-0.013	2.5
	40	3.8	1	0.001	2.5
	50	3.8	-4	-0.005	2.5
Frequency Stability vs. Voltage	20	3.3	9	0.011	2.5
	20	4.35	15	0.018	2.5
Result:				Pass	

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):

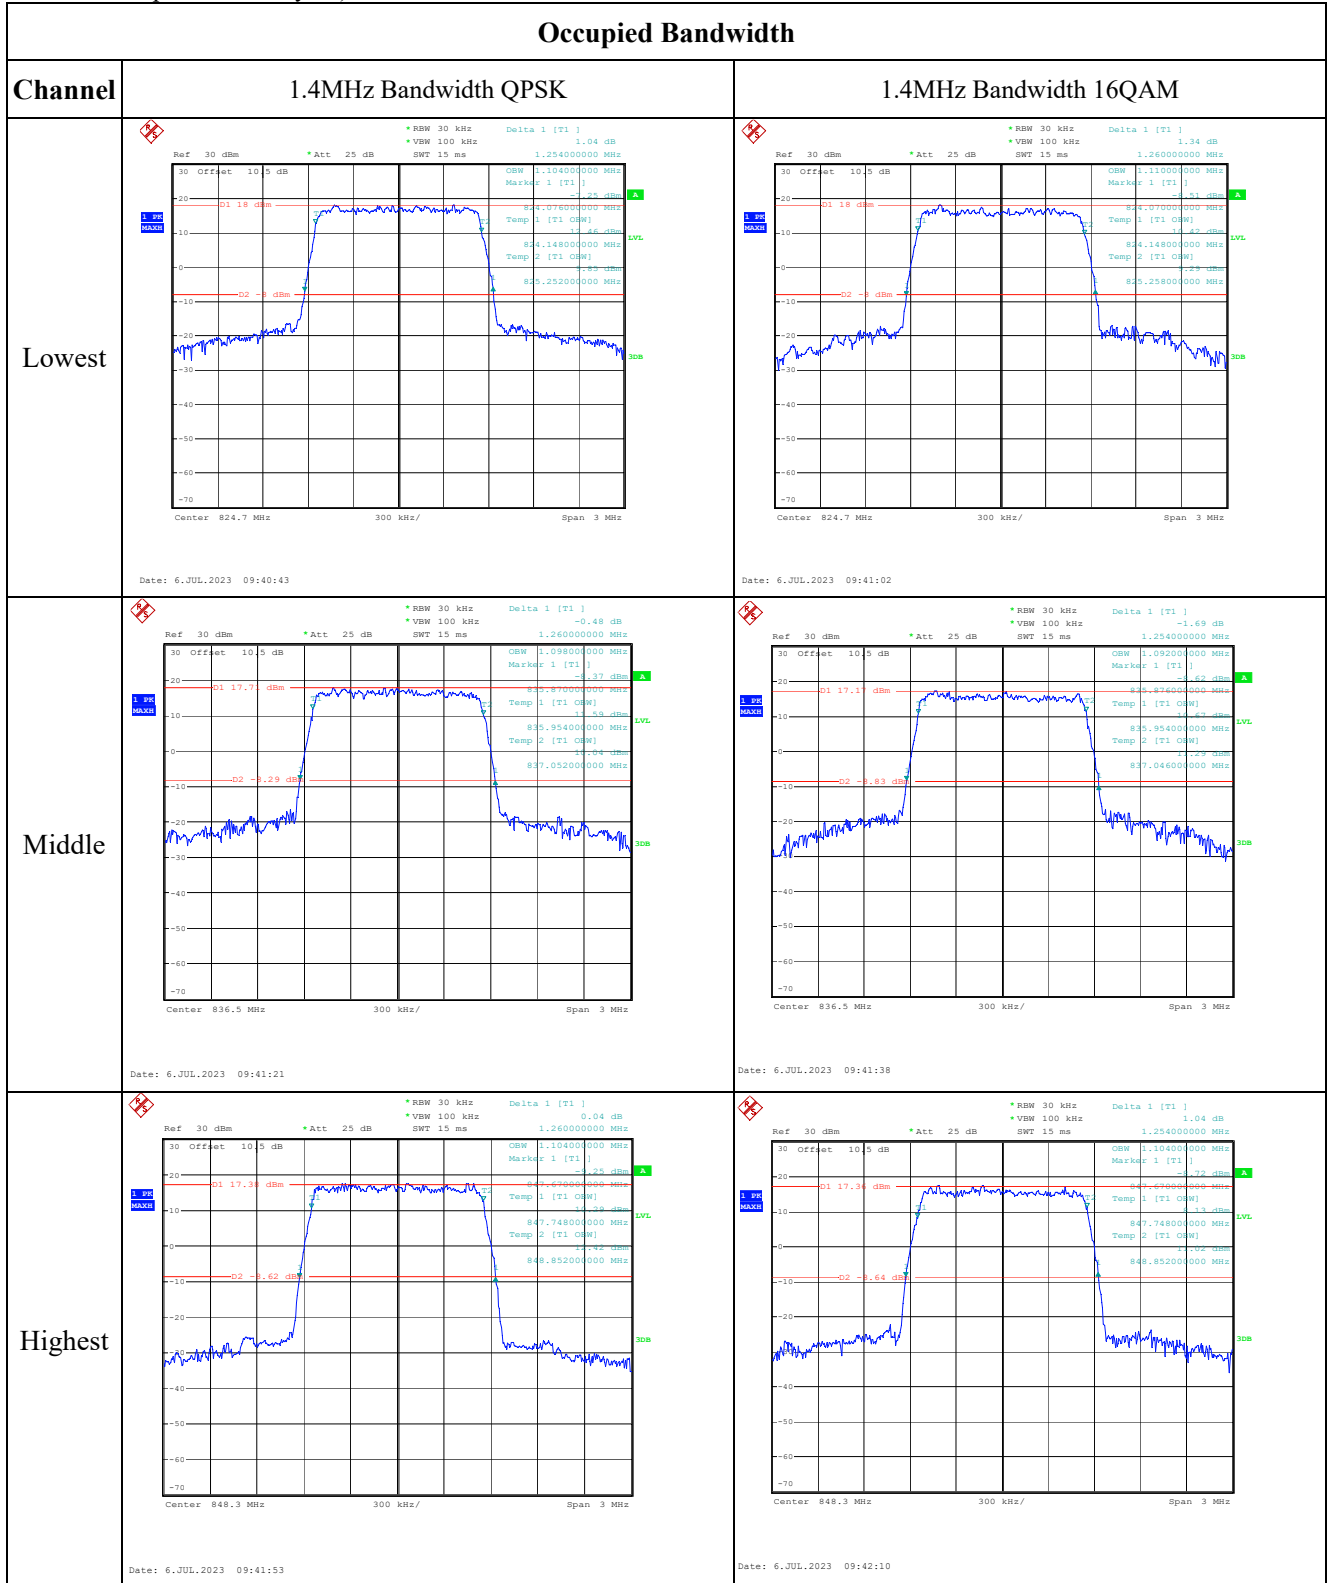



Occupied Bandwidth

Channel



3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM



Lowest

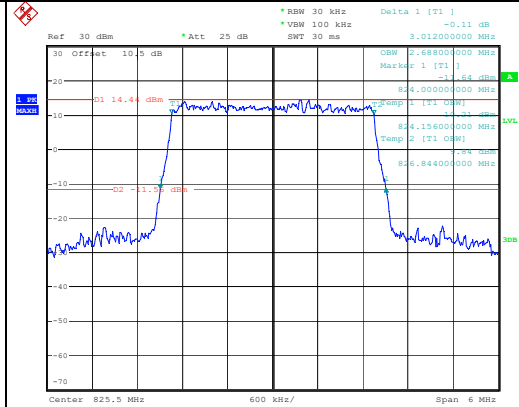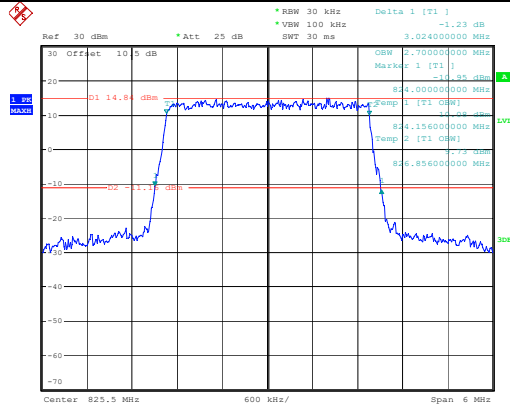







Middle

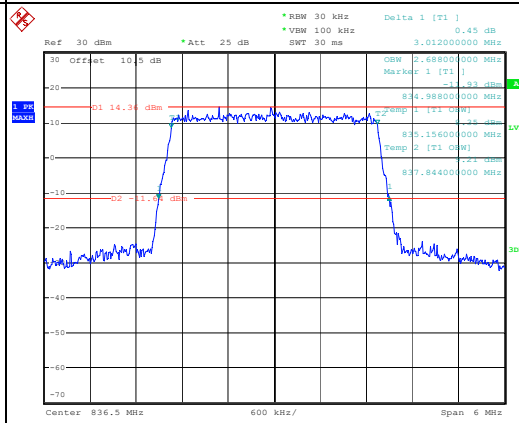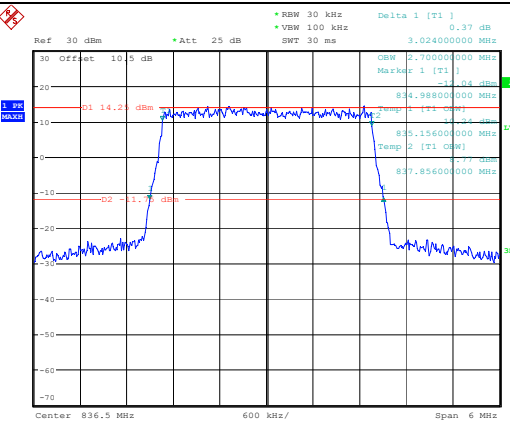

Highest

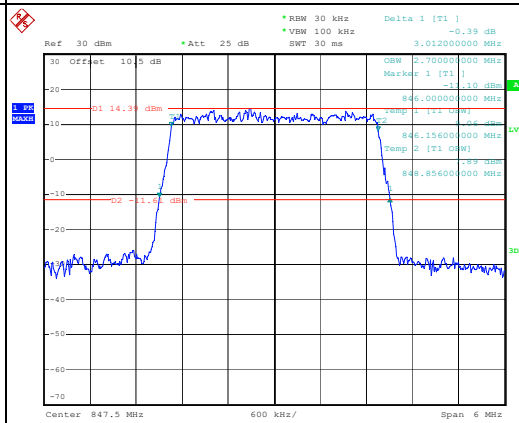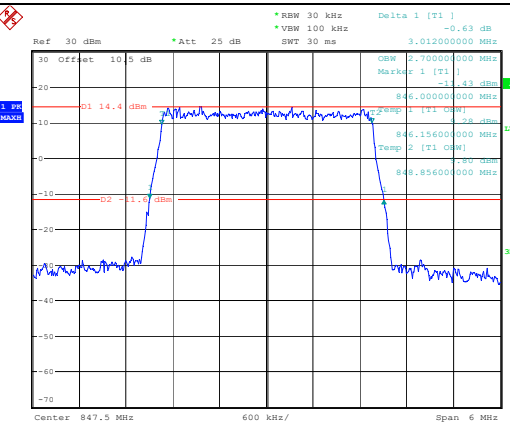

Occupied Bandwidth

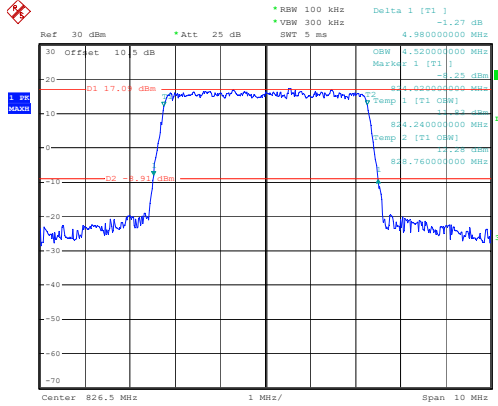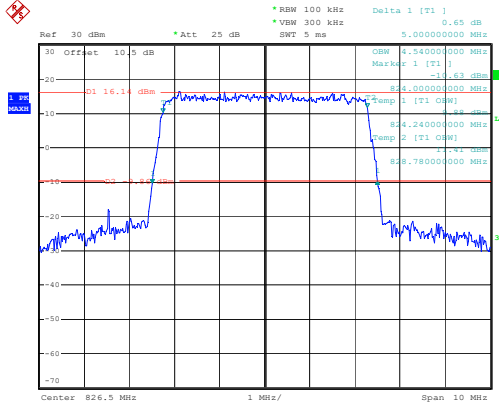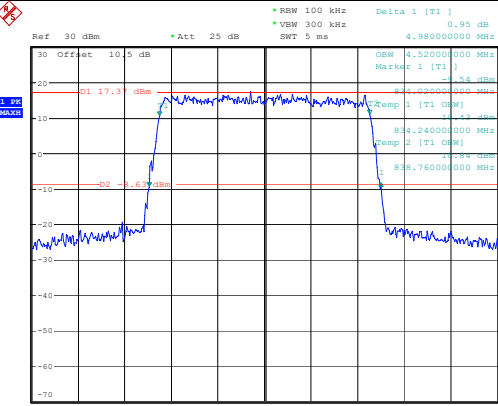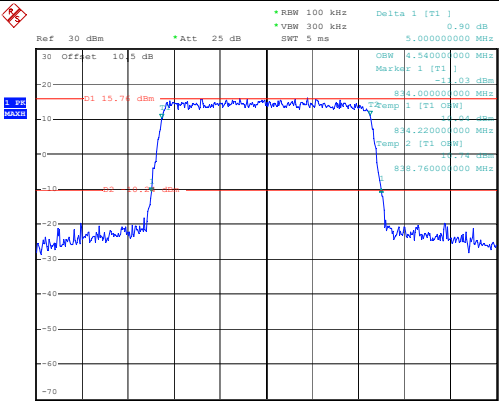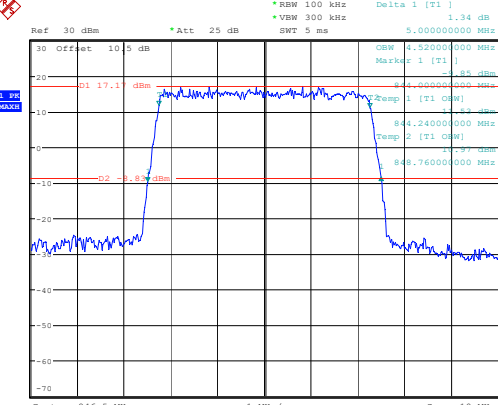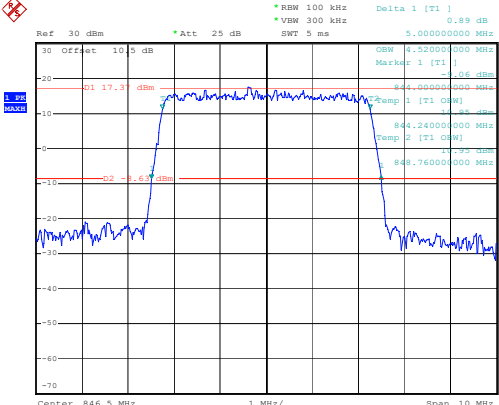Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -1.27 dB *VBW 300 kHz SWT 5 ms 4.980000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -1.27 dBm Temp 1 [T1 OSW] -1.27 dBm 824.240000000 MHz Temp 2 [T1 OSW] -1.27 dBm 828.760000000 MHz D1 17.09 dBm D2 -8.91 dBm D3 -10.63 dBm D4 -10.63 dBm Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 6.JUL.2023 09:44:14	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.85 dB *VBW 300 kHz SWT 5 ms 5.000000000 MHz OSW 4.540000000 MHz Marker 1 [T1] -0.85 dBm Temp 1 [T1 OSW] -0.85 dBm 824.300000000 MHz Temp 2 [T1 OSW] -0.85 dBm 828.780000000 MHz D1 16.14 dBm D2 -8.87 dBm D3 -10.63 dBm D4 -10.63 dBm Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 6.JUL.2023 09:44:32
Middle	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -1.34 dB *VBW 300 kHz SWT 5 ms 4.980000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -1.34 dBm Temp 1 [T1 OSW] -1.34 dBm 824.240000000 MHz Temp 2 [T1 OSW] -1.34 dBm 828.760000000 MHz D1 17.17 dBm D2 -8.63 dBm D3 -10.63 dBm D4 -10.63 dBm Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 6.JUL.2023 09:44:51	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.89 dB *VBW 300 kHz SWT 5 ms 5.000000000 MHz OSW 4.540000000 MHz Marker 1 [T1] -0.89 dBm Temp 1 [T1 OSW] -0.89 dBm 824.300000000 MHz Temp 2 [T1 OSW] -0.89 dBm 828.780000000 MHz D1 15.74 dBm D2 -8.87 dBm D3 -10.63 dBm D4 -10.63 dBm Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 6.JUL.2023 09:45:12
Highest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -1.34 dB *VBW 300 kHz SWT 5 ms 5.000000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -1.34 dBm Temp 1 [T1 OSW] -1.34 dBm 824.240000000 MHz Temp 2 [T1 OSW] -1.34 dBm 828.760000000 MHz D1 17.17 dBm D2 -8.63 dBm D3 -10.63 dBm D4 -10.63 dBm Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 6.JUL.2023 09:45:30	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.89 dB *VBW 300 kHz SWT 5 ms 5.000000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -0.89 dBm Temp 1 [T1 OSW] -0.89 dBm 824.300000000 MHz Temp 2 [T1 OSW] -0.89 dBm 828.780000000 MHz D1 17.17 dBm D2 -8.63 dBm D3 -10.63 dBm D4 -10.63 dBm Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 6.JUL.2023 09:45:51


Occupied Bandwidth

Channel


10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM

Lowest

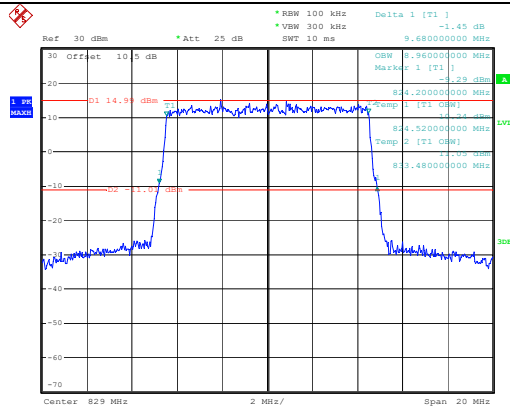


Date: 6.JUL.2023 09:46:14

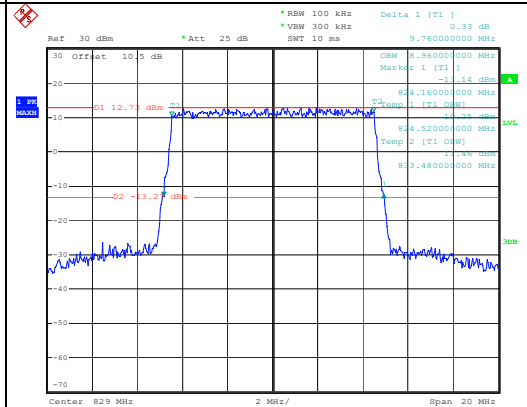


Date: 6.JUL.2023 09:46:33

Middle

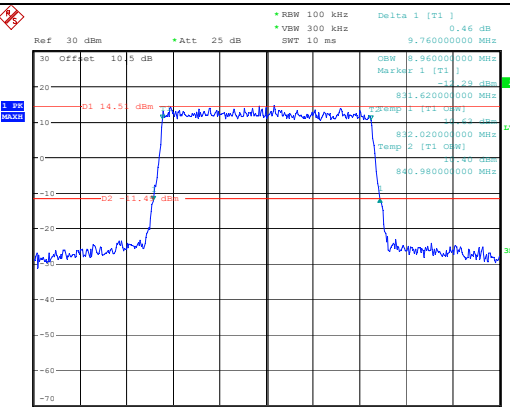


Date: 6.JUL.2023 09:46:53

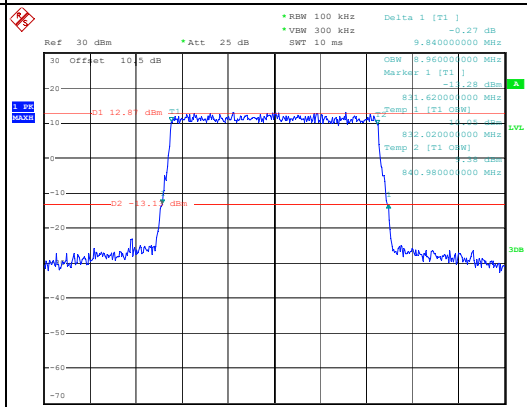


Date: 6.JUL.2023 09:47:11

Highest






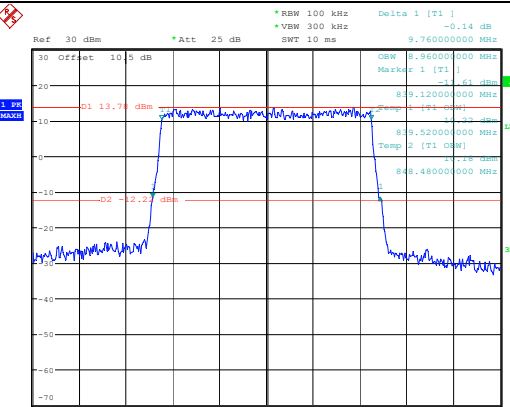


Date: 6.JUL.2023 09:47:31










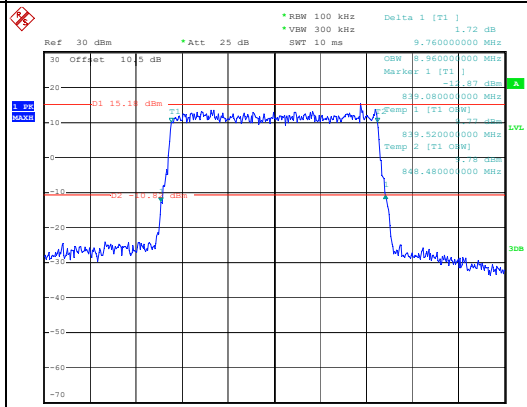


Date: 6.JUL.2023 09:47:49

Spurious Emissions at Antenna Terminal

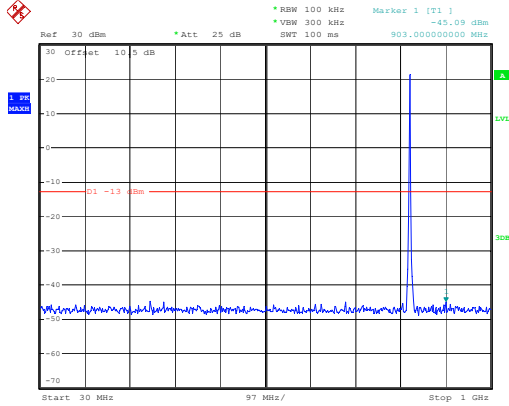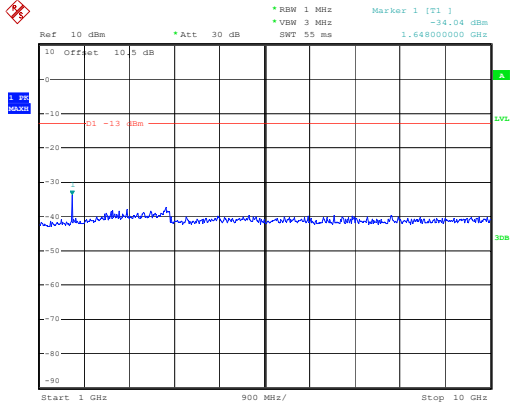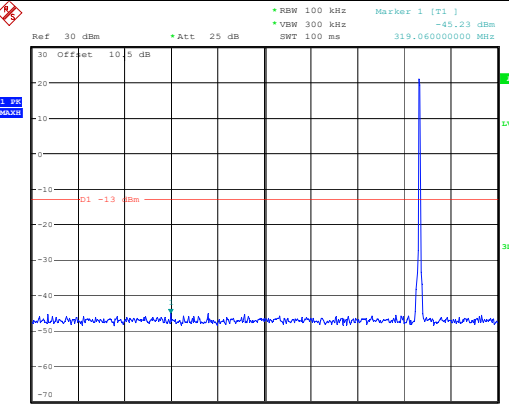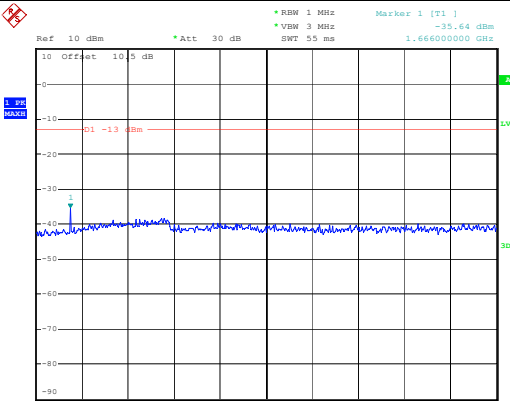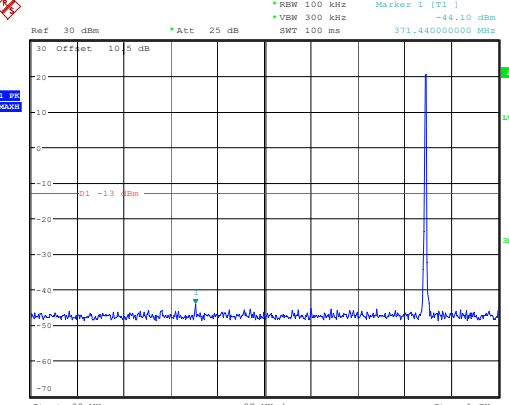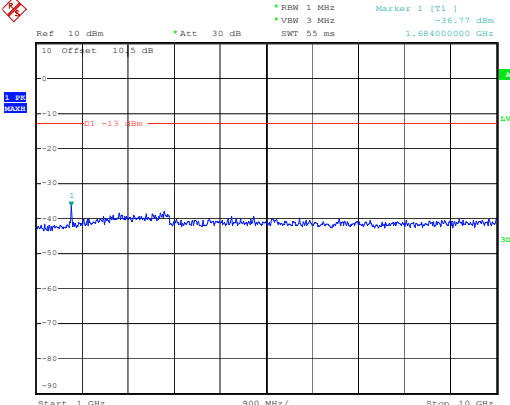Channel	1.4MHz Bandwidth QPSK	
Lowest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz SWT 100 ms Marker 1 [T1] -45.09 dBm 319.060000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz Date: 6.JUL.2023 09:59:06	 Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz SWT 55 ms Marker 1 [T1] -34.04 dBm 1.648000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz Date: 6.JUL.2023 09:59:19
Middle	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz SWT 100 ms Marker 1 [T1] -45.23 dBm 319.060000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz Date: 6.JUL.2023 09:59:36	 Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz SWT 55 ms Marker 1 [T1] -35.64 dBm 1.664000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz Date: 6.JUL.2023 09:59:46
Highest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz SWT 100 ms Marker 1 [T1] -44.10 dBm 371.440000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz Date: 6.JUL.2023 10:00:00	 Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz SWT 55 ms Marker 1 [T1] -36.77 dBm 1.684000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz Date: 6.JUL.2023 10:00:10

Spurious Emissions at Antenna Terminal

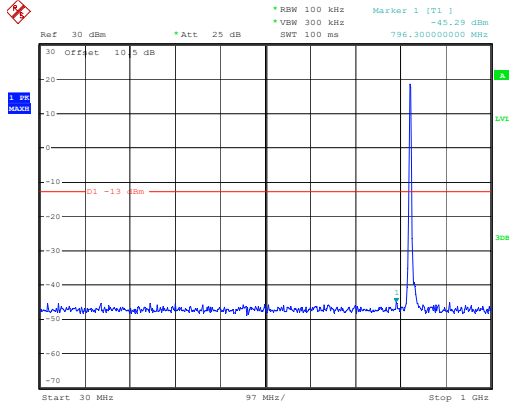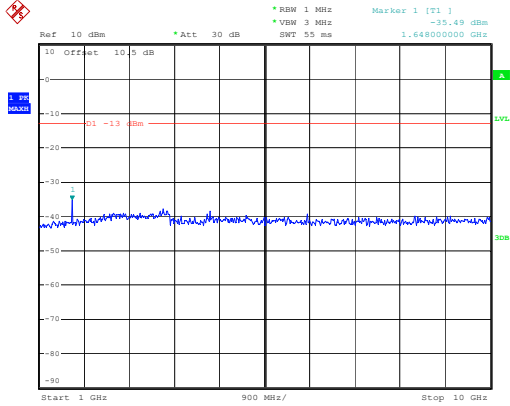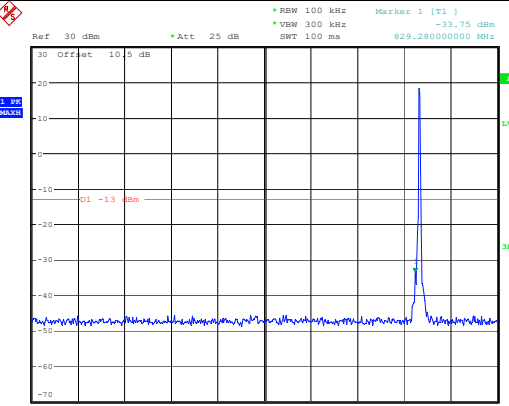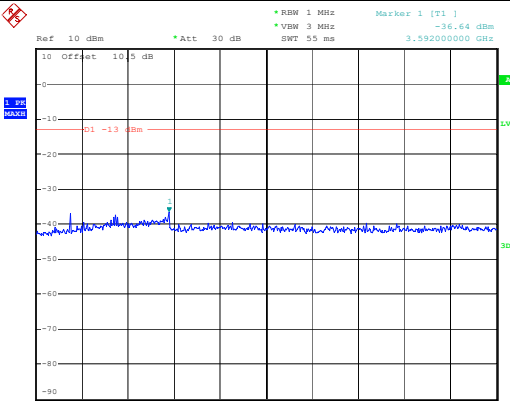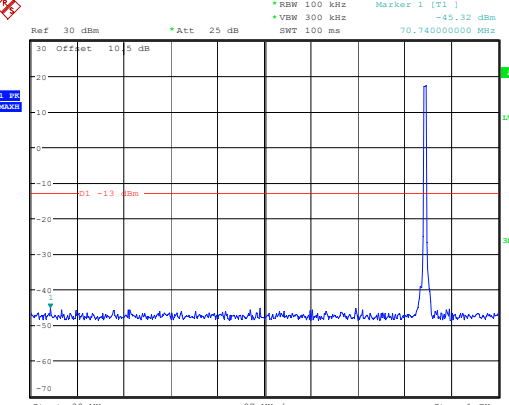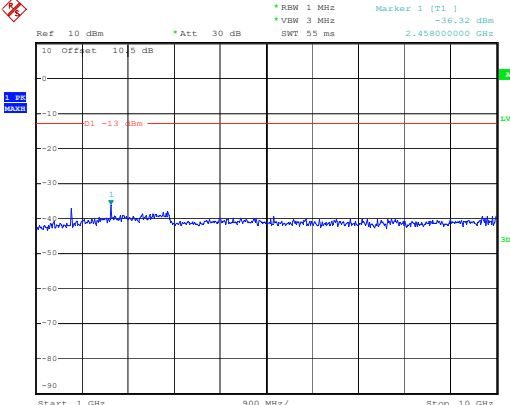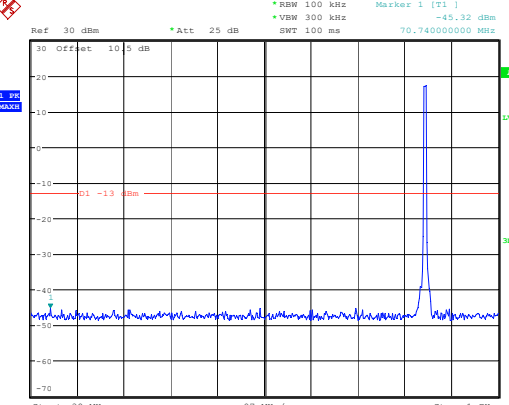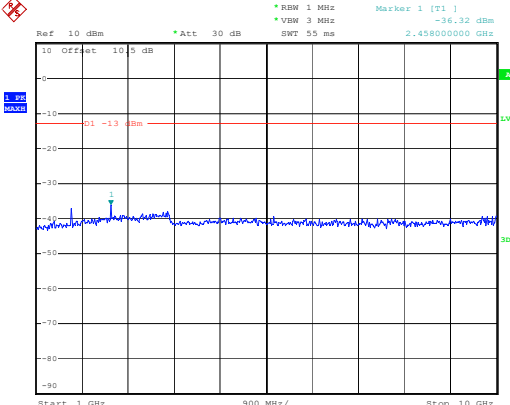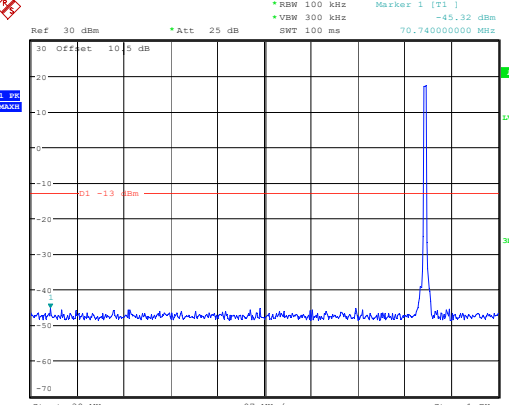
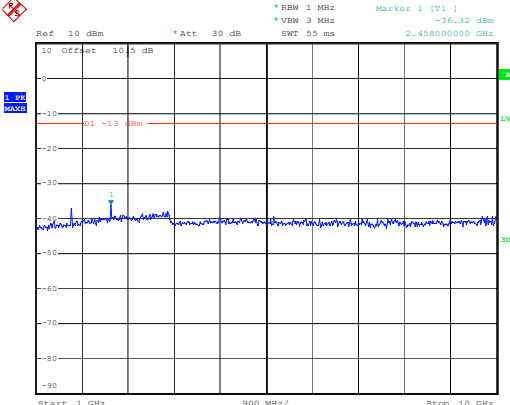
Channel	3MHz Bandwidth QPSK	
Lowest	 Ref 30 dBm Att 25 dB *RBW 100 kHz Marker 1 [T1] -45.25 dBm *VBW 300 kHz SWT 100 ms 796.300000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz Date: 6.JUL.2023 10:00:31	 Ref 10 dBm Att 30 dB *RBW 1 MHz Marker 1 [T1] -35.49 dBm *VBW 3 MHz SWT 55 ms 1.648000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz Date: 6.JUL.2023 10:00:41
	 Ref 30 dBm Att 25 dB *RBW 100 kHz Marker 1 [T1] -33.75 dBm *VBW 300 kHz SWT 100 ms 829.280000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz Date: 6.JUL.2023 10:00:55	 Ref 10 dBm Att 30 dB *RBW 1 MHz Marker 1 [T1] -36.64 dBm *VBW 3 MHz SWT 55 ms 3.592000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz Date: 6.JUL.2023 10:01:05
Middle	 Ref 30 dBm Att 25 dB *RBW 100 kHz Marker 1 [T1] -45.32 dBm *VBW 300 kHz SWT 100 ms 70.740000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz Date: 6.JUL.2023 10:01:19	 Ref 10 dBm Att 30 dB *RBW 1 MHz Marker 1 [T1] -36.32 dBm *VBW 3 MHz SWT 55 ms 2.458000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz Date: 6.JUL.2023 10:01:32
	 Ref 30 dBm Att 25 dB *RBW 100 kHz Marker 1 [T1] -45.32 dBm *VBW 300 kHz SWT 100 ms 70.740000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz Date: 6.JUL.2023 10:01:19	 Ref 10 dBm Att 30 dB *RBW 1 MHz Marker 1 [T1] -36.32 dBm *VBW 3 MHz SWT 55 ms 2.458000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz Date: 6.JUL.2023 10:01:32
Highest	 Ref 30 dBm Att 25 dB *RBW 100 kHz Marker 1 [T1] -45.32 dBm *VBW 300 kHz SWT 100 ms 70.740000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz Date: 6.JUL.2023 10:01:19	 Ref 10 dBm Att 30 dB *RBW 1 MHz Marker 1 [T1] -36.32 dBm *VBW 3 MHz SWT 55 ms 2.458000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz Date: 6.JUL.2023 10:01:32

Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

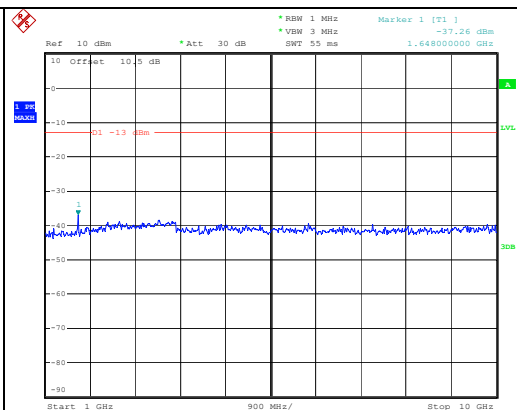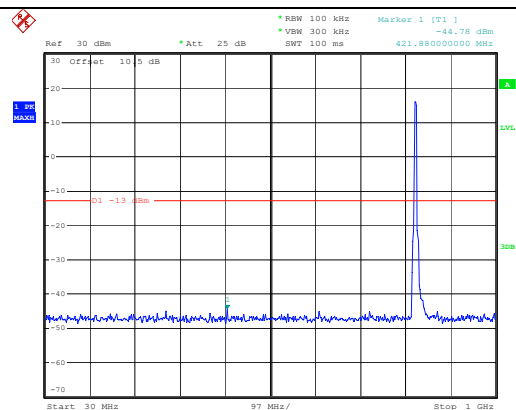

Middle

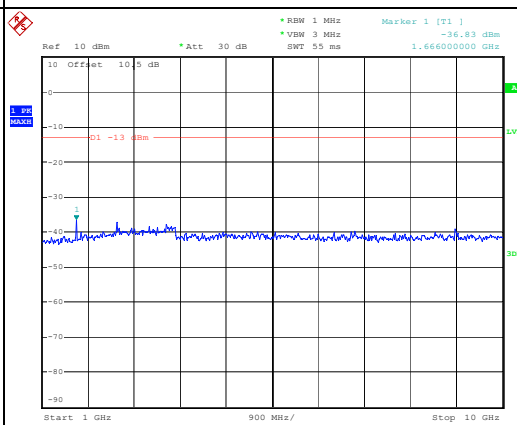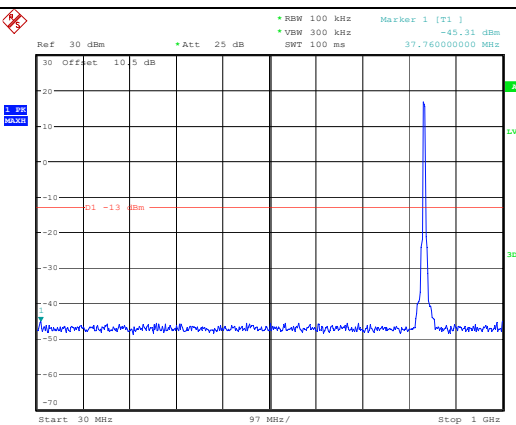

Highest

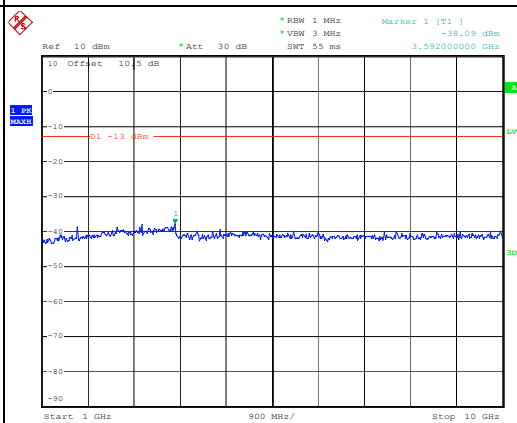
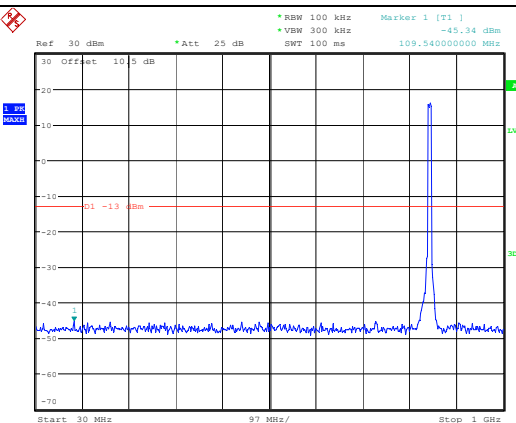


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

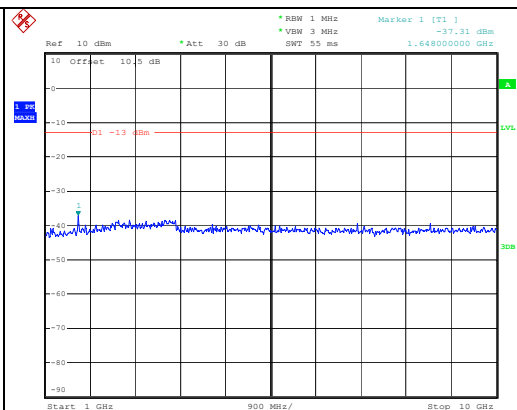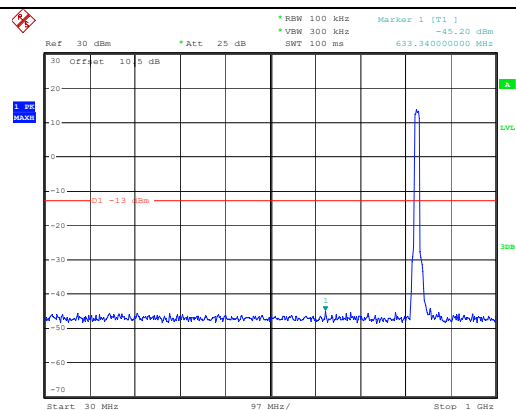







Middle

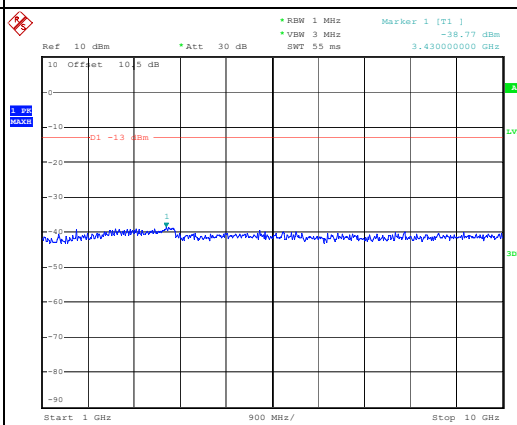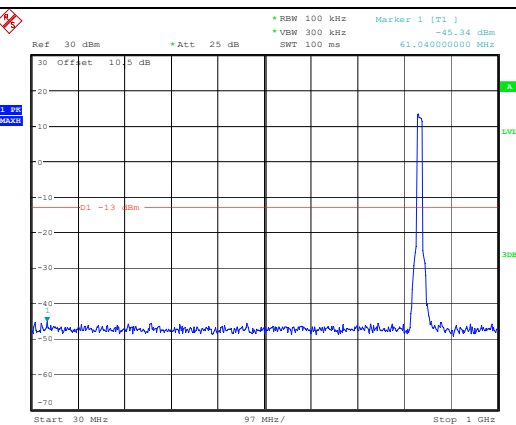


Highest





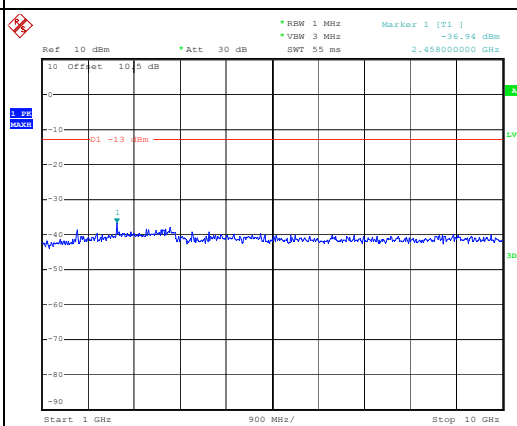
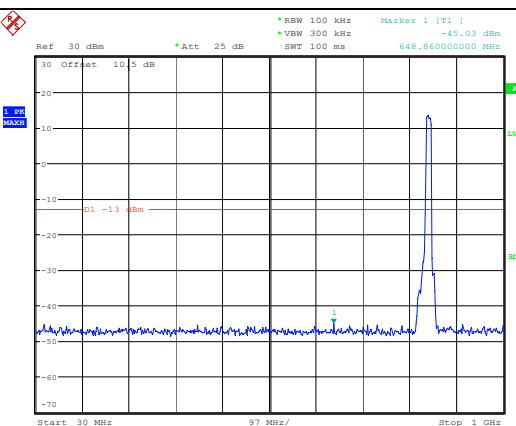


Out of band emission, Band Edge

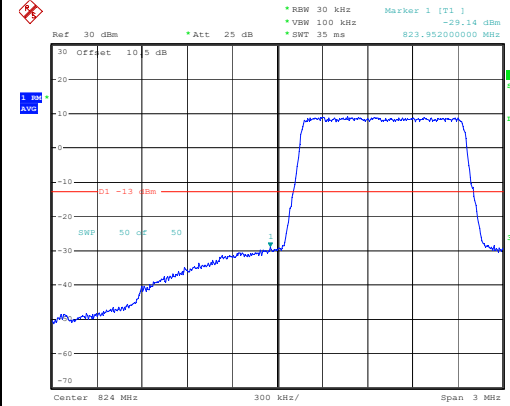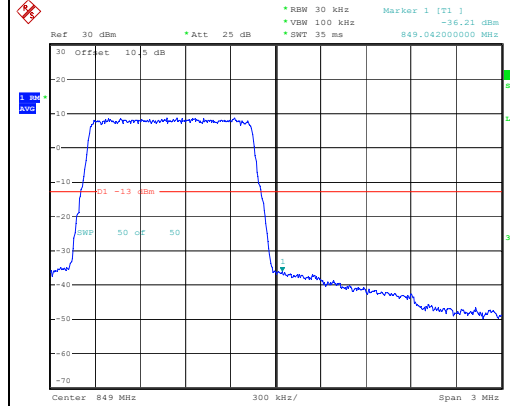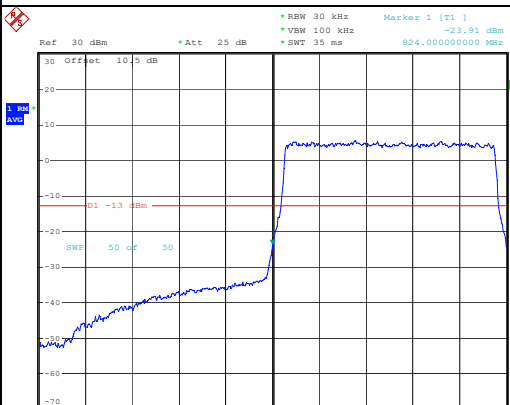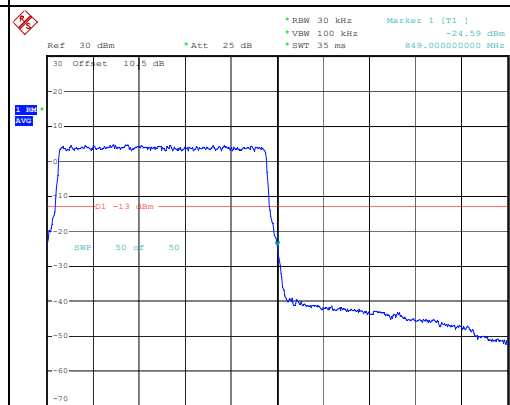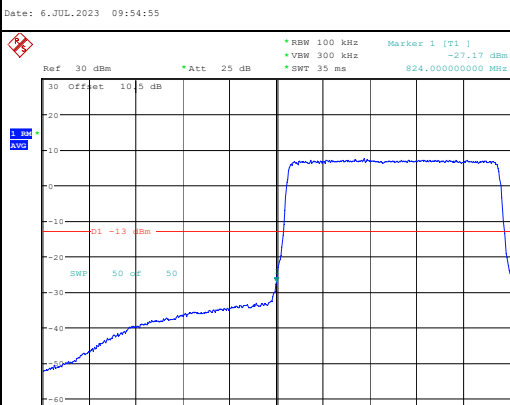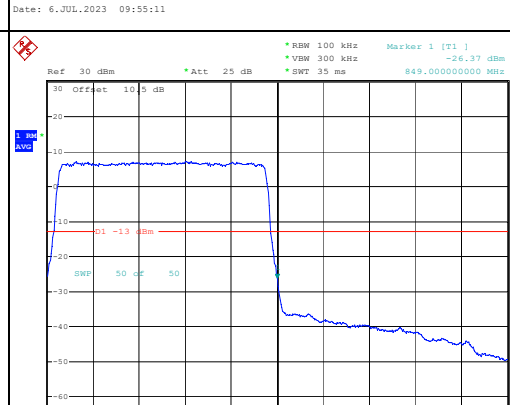
Mode	Lowest	Highest
QPSK 1.4MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -29.14 dBm, 823.952000000 MHz Center: 824 MHz, 300 kHz/, Span: 3 MHz Date: 6.JUL.2023 09:54:21	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -36.21 dBm, 849.042000000 MHz Center: 849 MHz, 300 kHz/, Span: 3 MHz Date: 6.JUL.2023 09:54:36
QPSK 3MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -23.91 dBm, 824.000000000 MHz Center: 824 MHz, 600 kHz/, Span: 6 MHz Date: 6.JUL.2023 09:54:55	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -24.59 dBm, 849.000000000 MHz Center: 849 MHz, 600 kHz/, Span: 6 MHz Date: 6.JUL.2023 09:55:11
QPSK 5MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 100 kHz, VSW: 500 kHz, SWT: 35 ms, Marker 1 [T1]: -27.17 dBm, 824.000000000 MHz Center: 824 MHz, 1 MHz/, Span: 10 MHz Date: 6.JUL.2023 09:55:30	 Ref: 30 dBm, Att: 25 dB, RBW: 100 kHz, VSW: 500 kHz, SWT: 35 ms, Marker 1 [T1]: -24.37 dBm, 849.000000000 MHz Center: 849 MHz, 1 MHz/, Span: 10 MHz Date: 6.JUL.2023 09:55:47

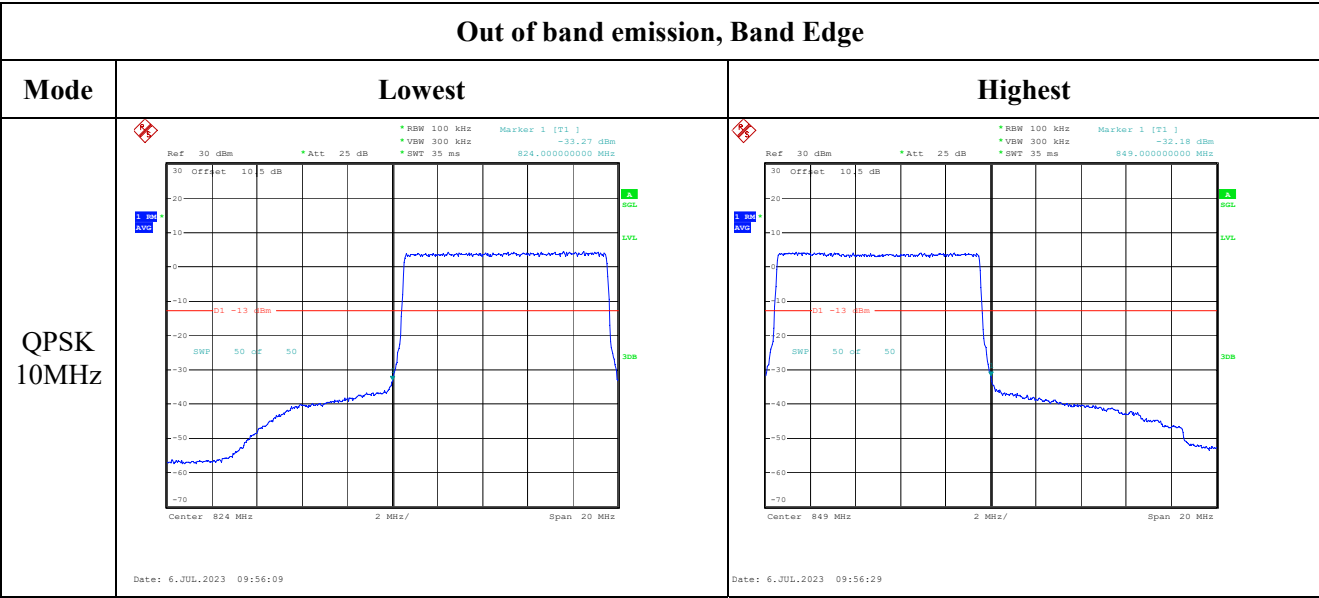

Out of band emission, Band Edge

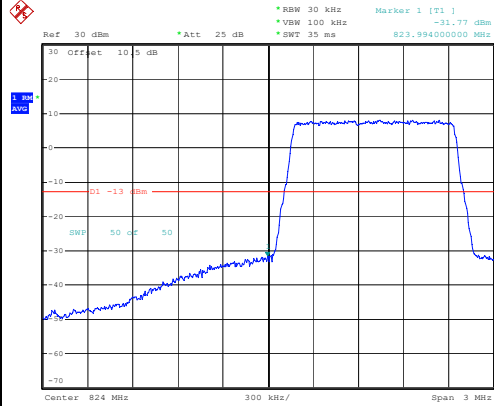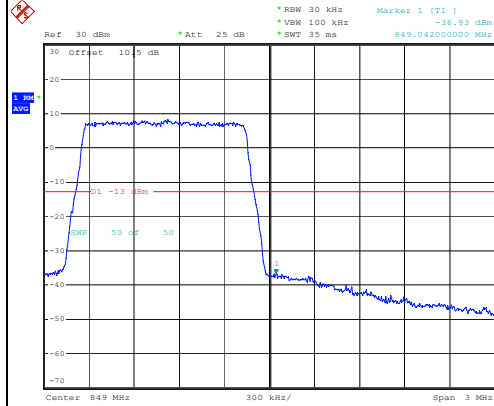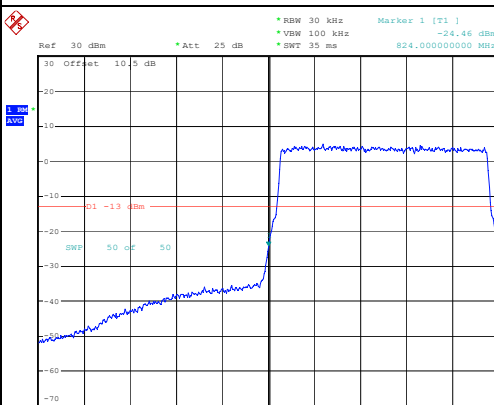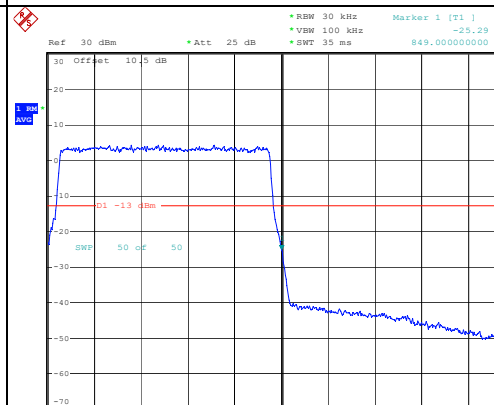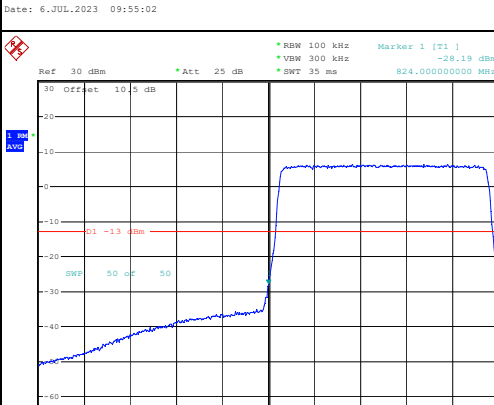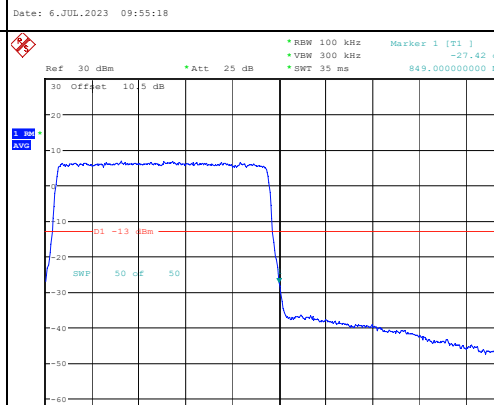Mode	Lowest	Highest
16QAM 1.4MHz	 Ref: 30 dBm *Att: 25 dB RBW 30 kHz Marker 1 [T1] VBW 100 kHz -31.77 dBm SWT 35 ms 823.994000000 MHz Center 824 MHz 300 kHz/ Span 3 MHz Date: 6.JUL.2023 09:54:28	 Ref: 30 dBm *Att: 25 dB RBW 30 kHz Marker 1 [T1] VBW 100 kHz -36.93 dBm SWT 35 ms 849.042000000 MHz Center 849 MHz 300 kHz/ Span 3 MHz Date: 6.JUL.2023 09:54:43
16QAM 3MHz	 Ref: 30 dBm *Att: 25 dB RBW 30 kHz Marker 1 [T1] VBW 100 kHz -24.46 dBm SWT 35 ms 824.000000000 MHz Center 824 MHz 600 kHz/ Span 6 MHz Date: 6.JUL.2023 09:55:02	 Ref: 30 dBm *Att: 25 dB RBW 30 kHz Marker 1 [T1] VBW 100 kHz -25.29 dBm SWT 35 ms 849.000000000 MHz Center 849 MHz 600 kHz/ Span 6 MHz Date: 6.JUL.2023 09:55:18
16QAM 5MHz	 Ref: 30 dBm *Att: 25 dB RBW 100 kHz Marker 1 [T1] VBW 300 kHz -28.19 dBm SWT 35 ms 824.000000000 MHz Center 824 MHz 1 MHz/ Span 10 MHz Date: 6.JUL.2023 09:55:38	 Ref: 30 dBm *Att: 25 dB RBW 100 kHz Marker 1 [T1] VBW 300 kHz -27.42 dBm SWT 35 ms 849.000000000 MHz Center 849 MHz 1 MHz/ Span 10 MHz Date: 6.JUL.2023 09:55:55

Out of band emission, Band Edge

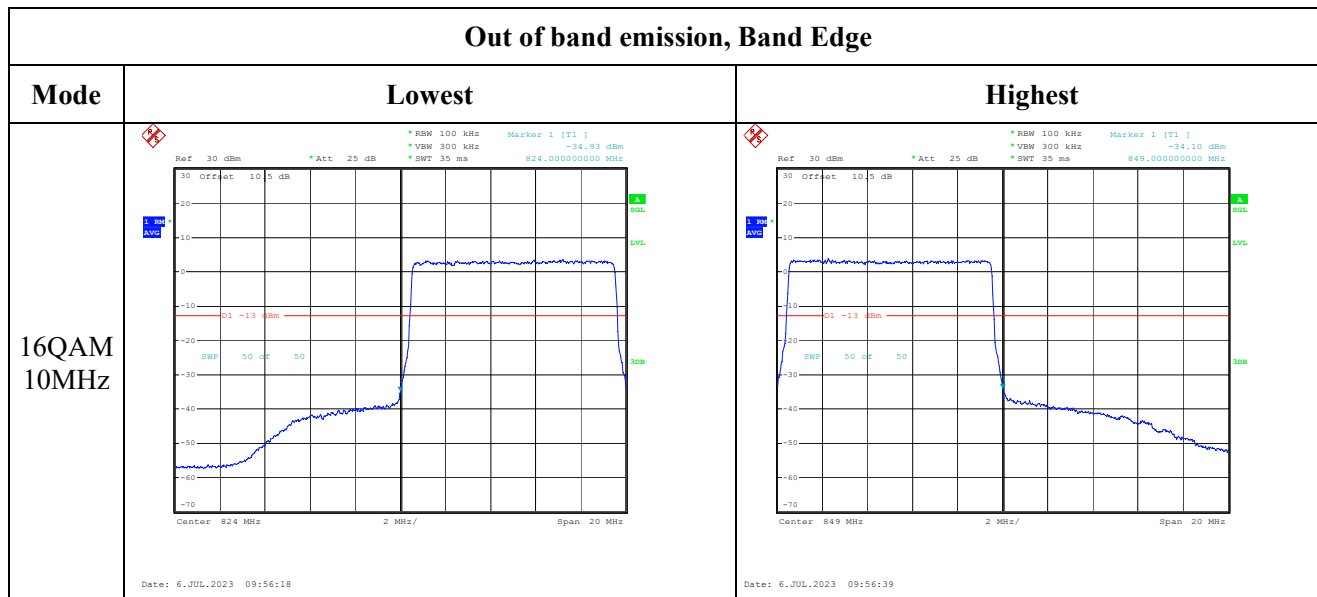

4.4 Antenna Port Test Data and Results for LTE Band 40

Serial Number:	27KB-1	Test Date:	2023/7/1~2023/8/21
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~26.1	Relative Humidity: (%)	52~54	ATM Pressure: (kPa)	101.2~101.4
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2023/3/31	2024/3/30
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Band	Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
LTE Band 40 Lower	5MHz	2307.5	2310	2312.5
	10MHz	/	2310	/
LTE Band 40 Upper	5MHz	2352.5	2355	2357.5
	10MHz	/	2355	/

Test Data:

(Note: Uplink Downlink configuration 3 was tested)

FCC§2.1046;§ 27.50(a)(3)**LTE Band 40 Lower:****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	22.8	22.99	22.96	23.24	24
	RB1#13	22.87	22.97	22.99		
	RB1#24	22.78	23.08	23		
	RB15#0	21.82	21.84	21.85		
	RB15#10	21.81	21.87	21.93		
	RB25#0	21.75	21.83	21.85		
5MHz 16QAM	RB1#0	21.82	22.09	22.21	22.4	24
	RB1#13	21.72	22.03	22.24		
	RB1#24	21.8	21.87	22.19		
	RB15#0	21.1	21.06	21.07		
	RB15#10	21.2	21.03	21.13		
	RB25#0	20.76	21.07	21.1		
10MHz QPSK	RB1#0	/	23.04	/	23.25	24
	RB1#25	/	23.02	/		
	RB1#49	/	23.09	/		
	RB25#0	/	21.78	/		
	RB25#25	/	21.86	/		
	RB50#0	/	21.85	/		
10MHz 16QAM	RB1#0	/	22.21	/	22.49	24
	RB1#25	/	22.33	/		
	RB1#49	/	22.24	/		
	RB25#0	/	21.04	/		
	RB25#25	/	21.15	/		
	RB50#0	/	21.15	/		

EIRP PSD in 5MHz:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted PSD(dBm/5MHz)			Maximum EIRP PSD (dBm/5MHz)	Limit (dBm/5MHz)
		Lowest Channel	Middle Channel	Highest Channel		
10MHz QPSK	RB1#0	/	/	/	0.16	24
	RB1#25	/	/	/		
	RB1#49	/	/	/		
	RB25#0	/	/	/		
	RB25#25	/	/	/		
	RB50#0	/	/	/		
10MHz 16QAM	RB1#0	/	/	/	0.16	24
	RB1#25	/	/	/		
	RB1#49	/	/	/		
	RB25#0	/	/	/		
	RB25#25	/	/	/		
	RB50#0	/	/	/		

Note:

For 5MHz mode, the channel power is equal to the test result in dBm/5MHz.

EIRP=Conducted Power(dBm) - Lc(dB) + Gt(dBi)

EIRP PSD=Conducted PSD(dBm/5MHz) - Lc(dB) + Gt(dBi)

LTE Band 40 Upper:**RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	22.99	23	22.86	23.19	24
	RB1#13	23.03	22.96	22.83		
	RB1#24	23.01	22.97	22.9		
	RB15#0	21.99	22	21.94		
	RB15#10	21.87	21.87	21.93		
	RB25#0	21.91	21.9	21.96		
5MHz 16QAM	RB1#0	22.15	22.3	21.75	22.51	24
	RB1#13	21.77	22.26	21.89		
	RB1#24	22.25	22.35	21.87		
	RB15#0	21.12	21.2	21.23		
	RB15#10	21.16	21.06	21.3		
	RB25#0	21.1	21.17	20.9		
10MHz QPSK	RB1#0	/	23.01	/	23.17	24
	RB1#25	/	22.91	/		
	RB1#49	/	23.01	/		
	RB25#0	/	21.98	/		
	RB25#25	/	21.88	/		
	RB50#0	/	21.92	/		
10MHz 16QAM	RB1#0	/	22.13	/	22.51	24

	RB1#25	/	22.35	/		
	RB1#49	/	22.27	/		
	RB25#0	/	21.16	/		
	RB25#25	/	21.07	/		
	RB50#0	/	21.09	/		
EIRP PSD in 5MHz:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted PSD(dBm/5MHz)			Maximum EIRP PSD (dBm/5MHz)	Limit (dBm/5MHz)
		Lowest Channel	Middle Channel	Highest Channel		
10MHz QPSK	RB1#0	/	/	/	0.16	24
	RB1#25	/	/	/		
	RB1#49	/	/	/		
	RB25#0	/	/	/		
	RB25#25	/	/	/		
	RB50#0	/	/	/		
10MHz 16QAM	RB1#0	/	/	/	0.16	24
	RB1#25	/	/	/		
	RB1#49	/	/	/		
	RB25#0	/	/	/		
	RB25#25	/	/	/		
	RB50#0	/	/	/		
Note: For 5MHz mode, the channel power is equal to the test result in dBm/5MHz. EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi) EIRP PSD=Conducted PSD(dBm/5MHz) - Lc(dB) + Gr(dBi)						
					Result:	Pass

Duty Cycle						
Operation Band	Modulation	Bandwidth	Ton(ms)	Ton+off(ms)	Duty Cycle(%)	Limit(%)
LTE Band 40 Lower	QPSK	5M	3.000	10.010	29.97	38
		10M	3.000	10.005	29.99	38
	16QAM	5M	3.000	10.005	29.99	38
		10M	3.005	10.010	30.02	38
LTE Band 40 Upper	QPSK	5M	2.995	10.000	29.95	38
		10M	3.000	10.005	29.99	38
	16QAM	5M	3.000	10.005	29.99	38
		10M	2.995	10.000	29.95	38
					Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth						
LTE Band 40 Lower:						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle channel	High Channel
5MHz QPSK	4.52	4.5	4.52	4.98	4.92	4.94
5MHz 16QAM	4.52	4.5	4.52	4.94	5	4.92
10MHz QPSK	/	/	/	/	/	/
10MHz 16QAM	/	/	/	/	/	/
LTE Band 40 Upper:						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle channel	High Channel
5MHz QPSK	4.52	4.5	4.54	5.06	4.94	4.9
5MHz 16QAM	4.5	4.52	4.5	4.92	4.94	4.98
10MHz QPSK	/	/	/	/	/	/
10MHz 16QAM	/	/	/	/	/	/
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability	
LTE Band 40 Lower:	

Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	2305.015	2305.000	2314.987	2315.000
	-20	3.8	2305.022	2305.000	2314.986	2315.000
	-10	3.8	2305.011	2305.000	2314.982	2315.000
	0	3.8	2305.023	2305.000	2314.988	2315.000
	10	3.8	2305.015	2305.000	2314.979	2315.000
	20	3.8	2305.013	2305.000	2314.980	2315.000
	30	3.8	2305.011	2305.000	2314.989	2315.000
	40	3.8	2305.015	2305.000	2314.987	2315.000
	50	3.8	2305.018	2305.000	2314.988	2315.000
Frequency Stability vs. Voltage	20	3.3	2305.011	2305.000	2314.981	2315.000
	20	4.35	2305.015	2305.000	2314.982	2315.000
					Result:	Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	2305.017	2305.000	2314.981	2315.000
	-20	3.8	2305.018	2305.000	2314.981	2315.000
	-10	3.8	2305.020	2305.000	2314.979	2315.000
	0	3.8	2305.011	2305.000	2314.984	2315.000
	10	3.8	2305.023	2305.000	2314.977	2315.000
	20	3.8	2305.015	2305.000	2314.977	2315.000
	30	3.8	2305.013	2305.000	2314.978	2315.000
	40	3.8	2305.014	2305.000	2314.989	2315.000
	50	3.8	2305.020	2305.000	2314.986	2315.000
Frequency Stability vs. Voltage	20	3.3	2305.012	2305.000	2314.982	2315.000
	20	4.35	2305.016	2305.000	2314.987	2315.000
					Result:	Pass

LTE Band 40 Upper:







Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	2350.016	2350.000	2359.981	2360.000
	-20	3.8	2350.011	2350.000	2359.982	2360.000
	-10	3.8	2350.018	2350.000	2359.983	2360.000
	0	3.8	2350.020	2350.000	2359.986	2360.000
	10	3.8	2350.016	2350.000	2359.989	2360.000

	20	3.8	2350.015	2350.000	2359.988	2360.000
	30	3.8	2350.023	2350.000	2359.984	2360.000
	40	3.8	2350.012	2350.000	2359.983	2360.000
	50	3.8	2350.011	2350.000	2359.987	2360.000
Frequency Stability vs. Voltage	20	3.3	2350.013	2350.000	2359.987	2360.000
	20	4.35	2350.023	2350.000	2359.984	2360.000
					Result:	Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	2350.022	2350.000	2359.979	2360.000
	-20	3.8	2350.014	2350.000	2359.983	2360.000
	-10	3.8	2350.013	2350.000	2359.984	2360.000
	0	3.8	2350.018	2350.000	2359.984	2360.000
	10	3.8	2350.022	2350.000	2359.987	2360.000
	20	3.8	2350.016	2350.000	2359.980	2360.000
	30	3.8	2350.012	2350.000	2359.989	2360.000
	40	3.8	2350.011	2350.000	2359.978	2360.000
	50	3.8	2350.020	2350.000	2359.987	2360.000
Frequency Stability vs. Voltage	20	3.3	2350.016	2350.000	2359.986	2360.000
	20	4.35	2350.016	2350.000	2359.987	2360.000
					Result:	Pass

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):
1)2305-2315Hz:

Occupied Bandwidth

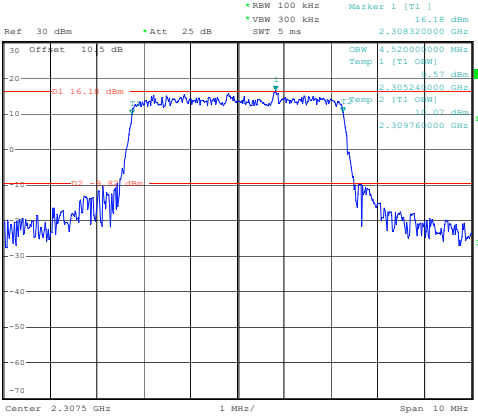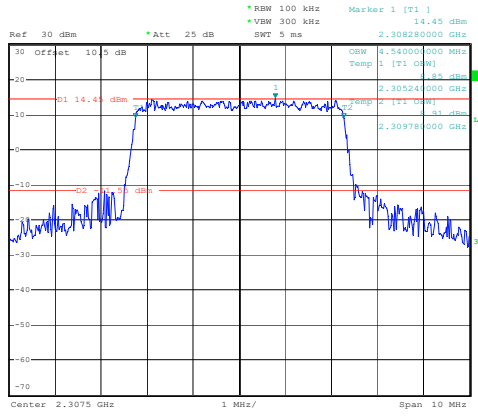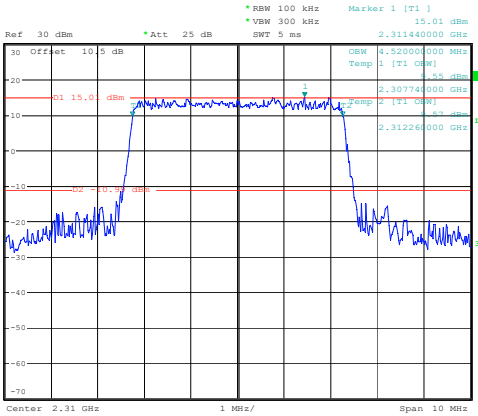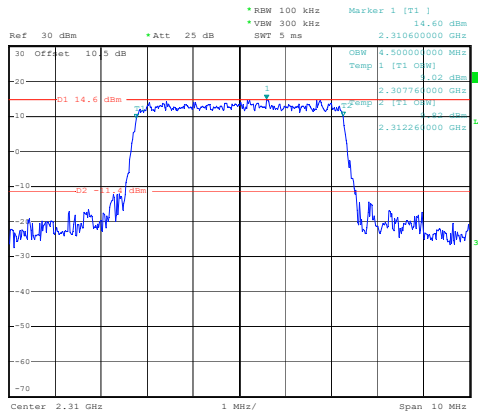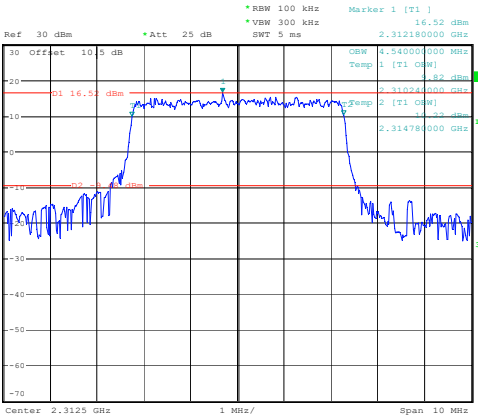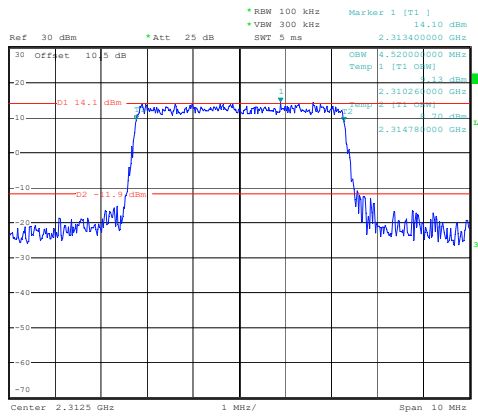Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 5 ms Marker 1 [T1] 16.18 dBm OSW 4.52000000 GHz Temp 1 [T1 OSW] 16.18 dBm D1 16.18 dBm D2 -10.12 dBm Center 2.3075 GHz 1 MHz/ Span 10 MHz Date: 8.JUL.2023 15:34:23	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 5 ms Marker 1 [T1] 14.45 dBm OSW 4.54000000 GHz Temp 1 [T1 OSW] 14.45 dBm D1 14.45 dBm D2 -10.12 dBm Center 2.3075 GHz 1 MHz/ Span 10 MHz Date: 8.JUL.2023 15:34:47
Middle	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 5 ms Marker 1 [T1] 15.01 dBm OSW 4.52000000 GHz Temp 1 [T1 OSW] 15.01 dBm D1 15.01 dBm D2 -10.12 dBm Center 2.31 GHz 1 MHz/ Span 10 MHz Date: 8.JUL.2023 15:35:06	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 5 ms Marker 1 [T1] 14.60 dBm OSW 4.52000000 GHz Temp 1 [T1 OSW] 14.60 dBm D1 14.6 dBm D2 -10.12 dBm Center 2.31 GHz 1 MHz/ Span 10 MHz Date: 8.JUL.2023 15:35:27
Highest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 5 ms Marker 1 [T1] 16.52 dBm OSW 4.52000000 GHz Temp 1 [T1 OSW] 16.52 dBm D1 16.52 dBm D2 -10.12 dBm Center 2.3125 GHz 1 MHz/ Span 10 MHz Date: 8.JUL.2023 15:36:05	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 5 ms Marker 1 [T1] 14.11 dBm OSW 4.52000000 GHz Temp 1 [T1 OSW] 14.11 dBm D1 14.1 dBm D2 -10.12 dBm Center 2.3125 GHz 1 MHz/ Span 10 MHz Date: 8.JUL.2023 15:36:22


Occupied Bandwidth

10MHz Bandwidth 16QAM


Date: 8.JUL.2023 15:37:09

2)2350-2360Hz:

Occupied Bandwidth

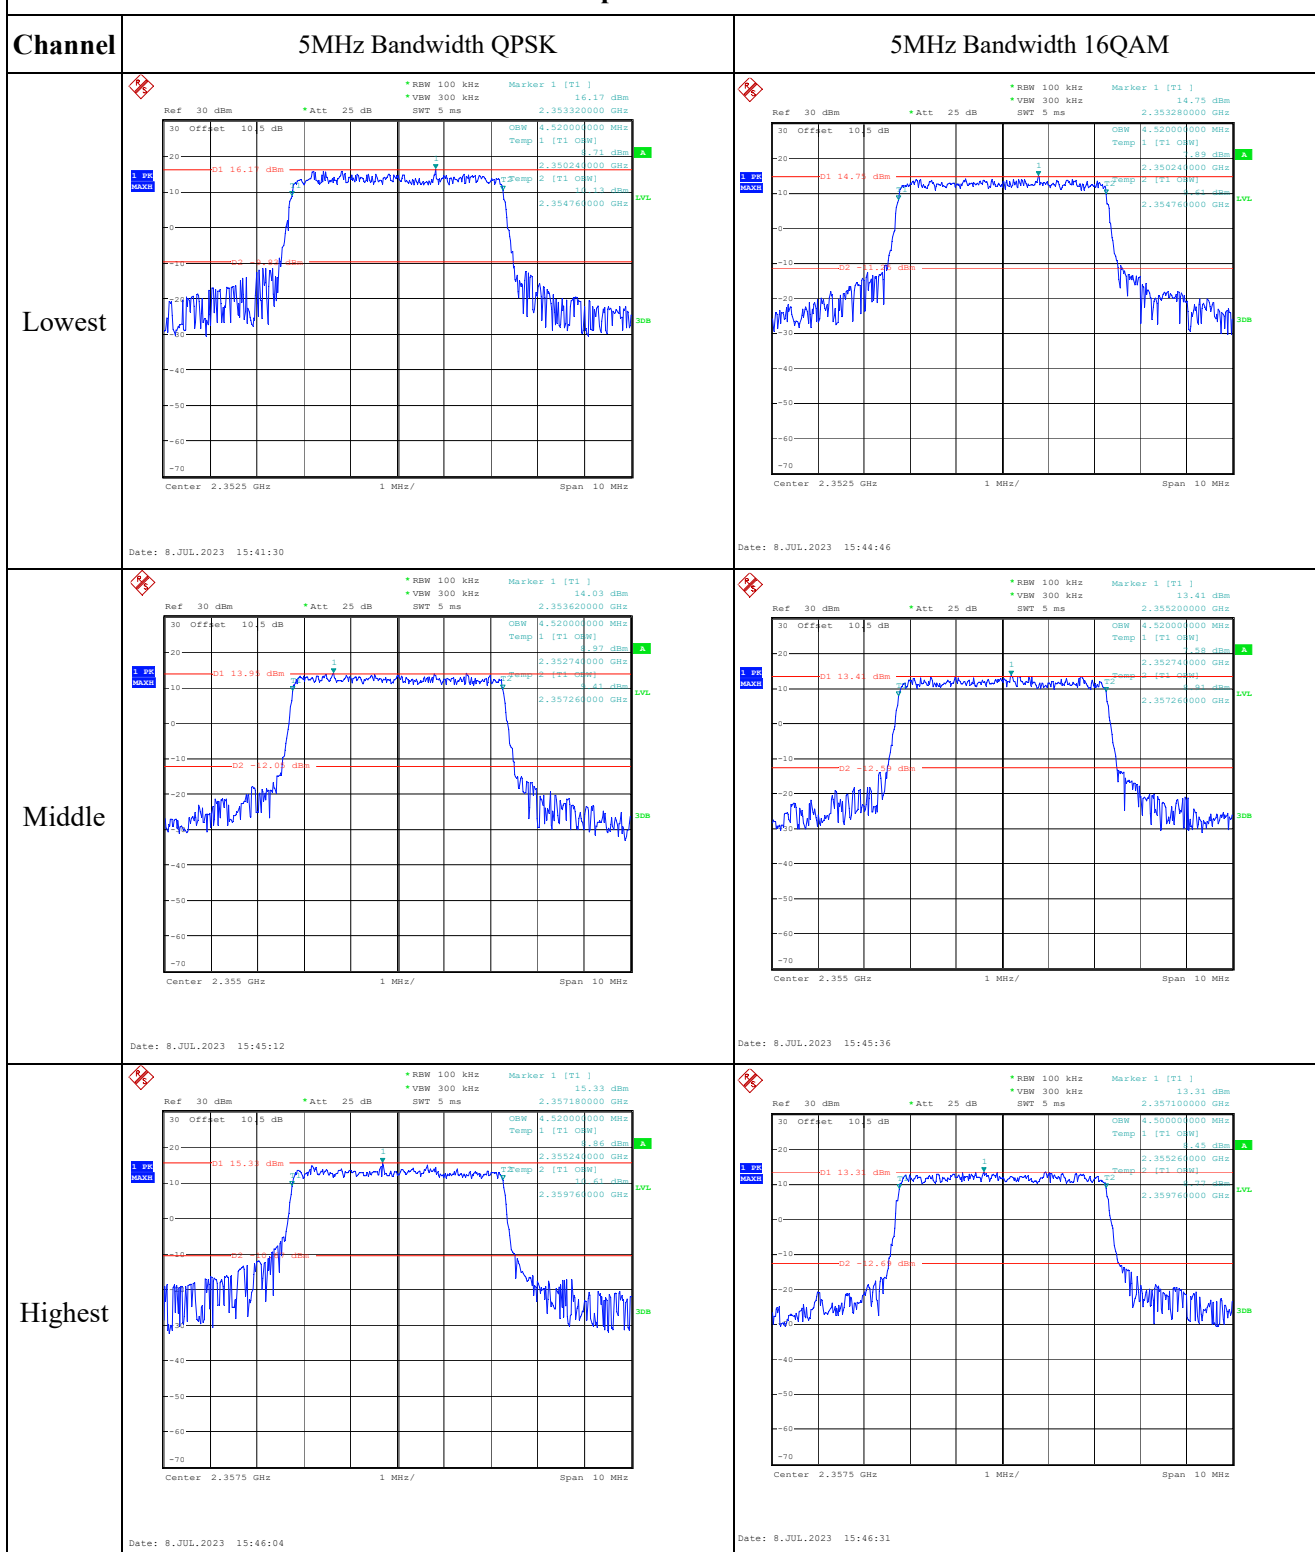

Occupied Bandwidth

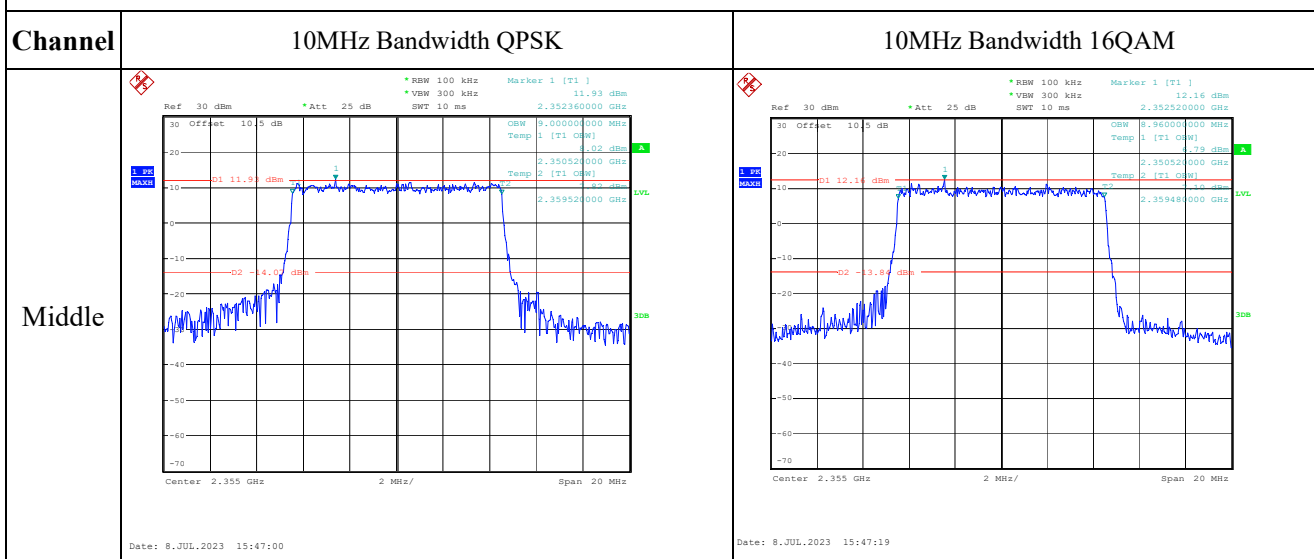


1)2305-2315:

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK


Lowest

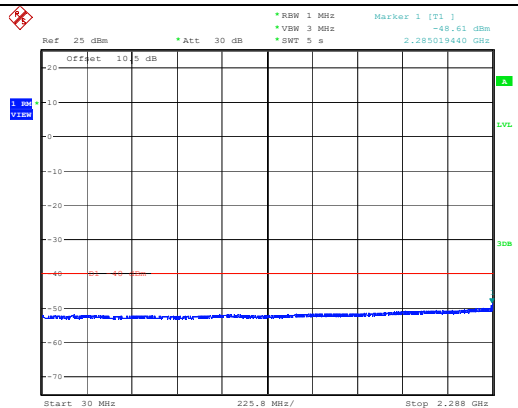

Date: 8.JUL.2023 16:34:35

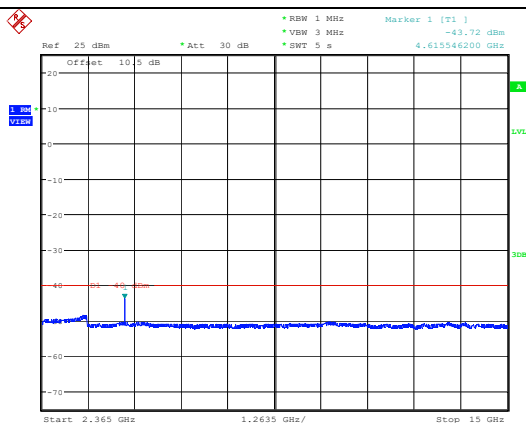

Date: 8.JUL.2023 16:35:15

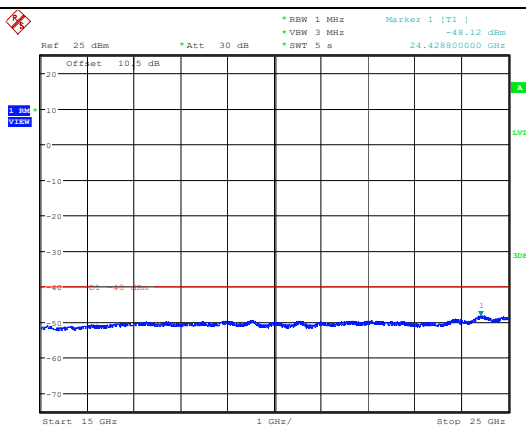




Date: 8.JUL.2023 16:35:55

Spurious Emissions at Antenna Terminal

Channel

5MHz Bandwidth QPSK




Middle

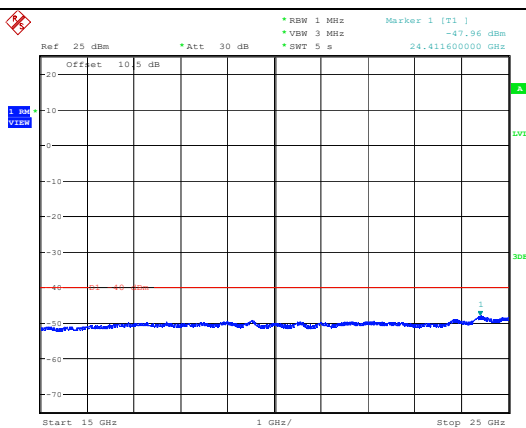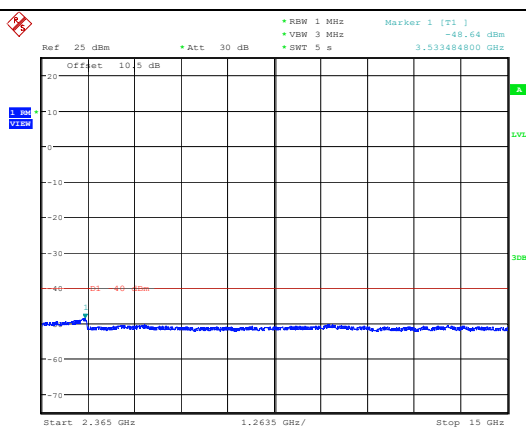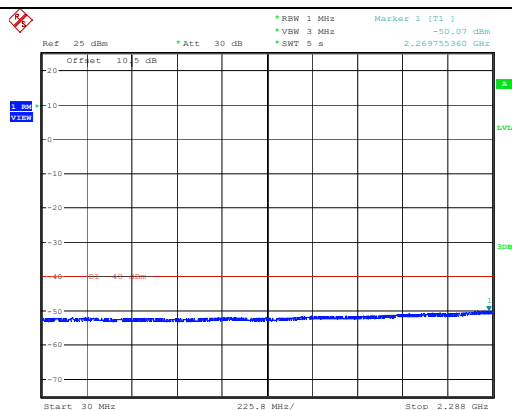

Spurious Emissions at Antenna Terminal

Channel

5MHz Bandwidth QPSK

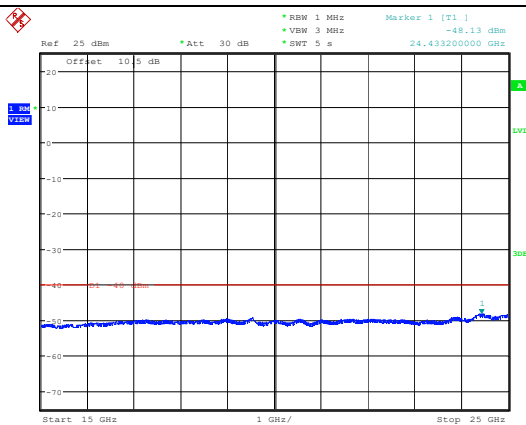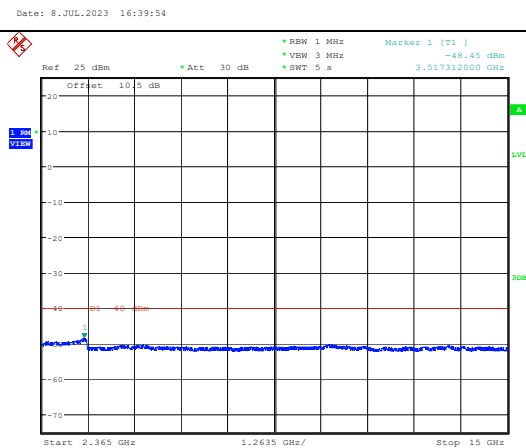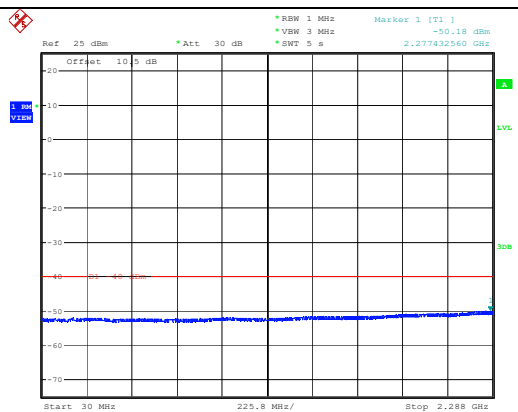


Highest


Spurious Emissions at Antenna Terminal

Channel


10MHz Bandwidth QPSK

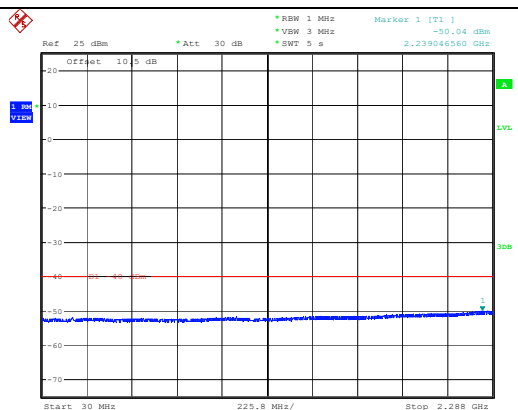

Date: 8.JUL.2023 16:42:22

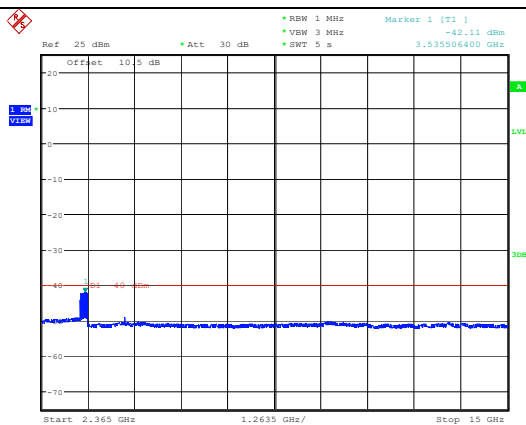

Date: 8.JUL.2023 16:47:01

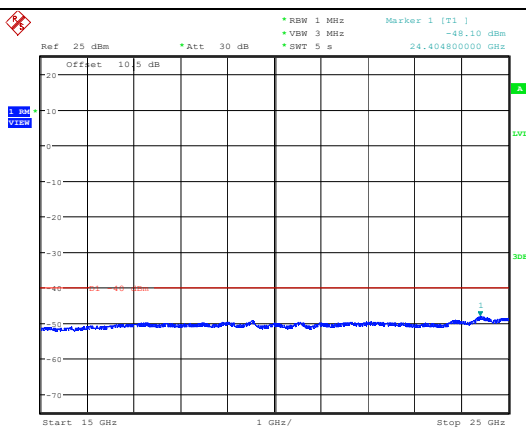

Date: 8.JUL.2023 16:47:41

Middle




1)2350-2360:

Spurious Emissions at Antenna Terminal

Channel

5MHz Bandwidth QPSK


Lowest

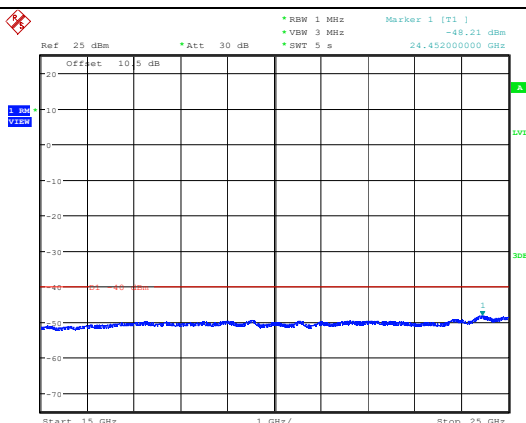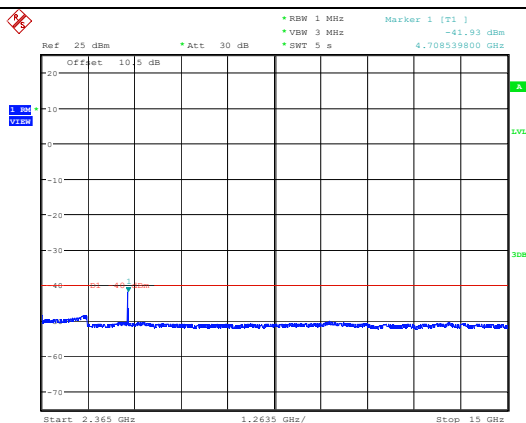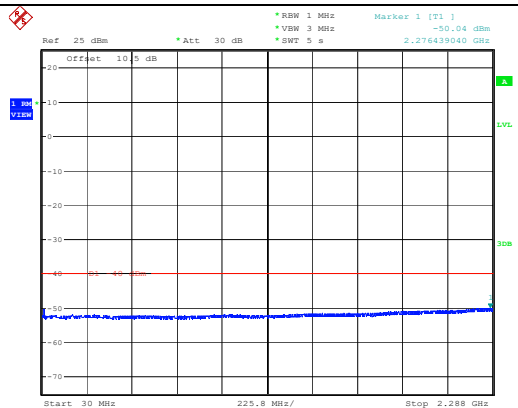


Spurious Emissions at Antenna Terminal

Channel


5MHz Bandwidth QPSK

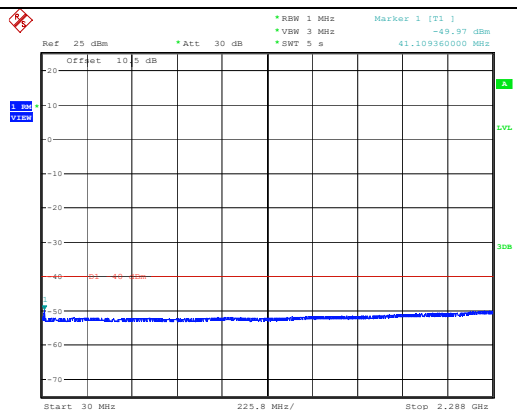

Date: 8.JUL.2023 16:52:08

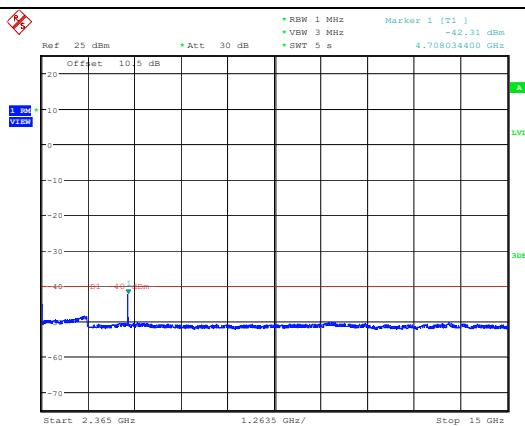

Date: 8.JUL.2023 16:52:48

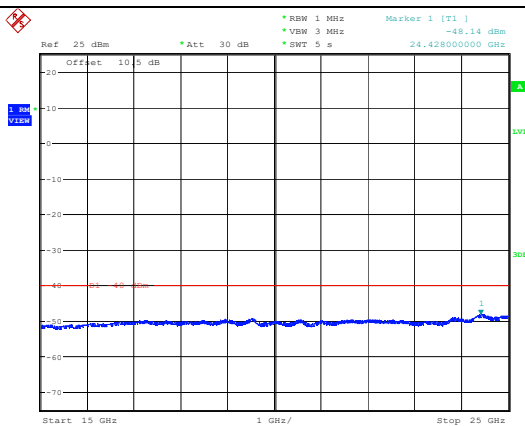

Date: 8.JUL.2023 16:53:28




Middle

Spurious Emissions at Antenna Terminal

Channel


10MHz Bandwidth QPSK


Middle

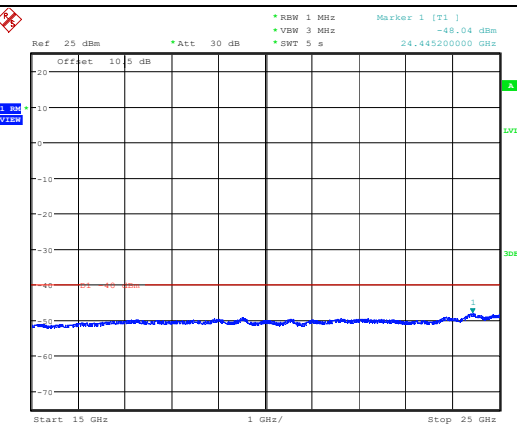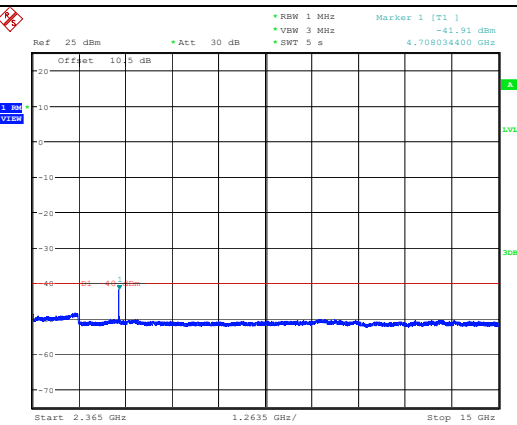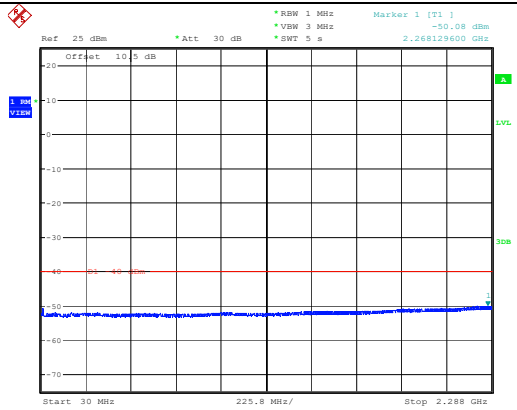

1)2305-2315:


Out of band emission, Band Edge

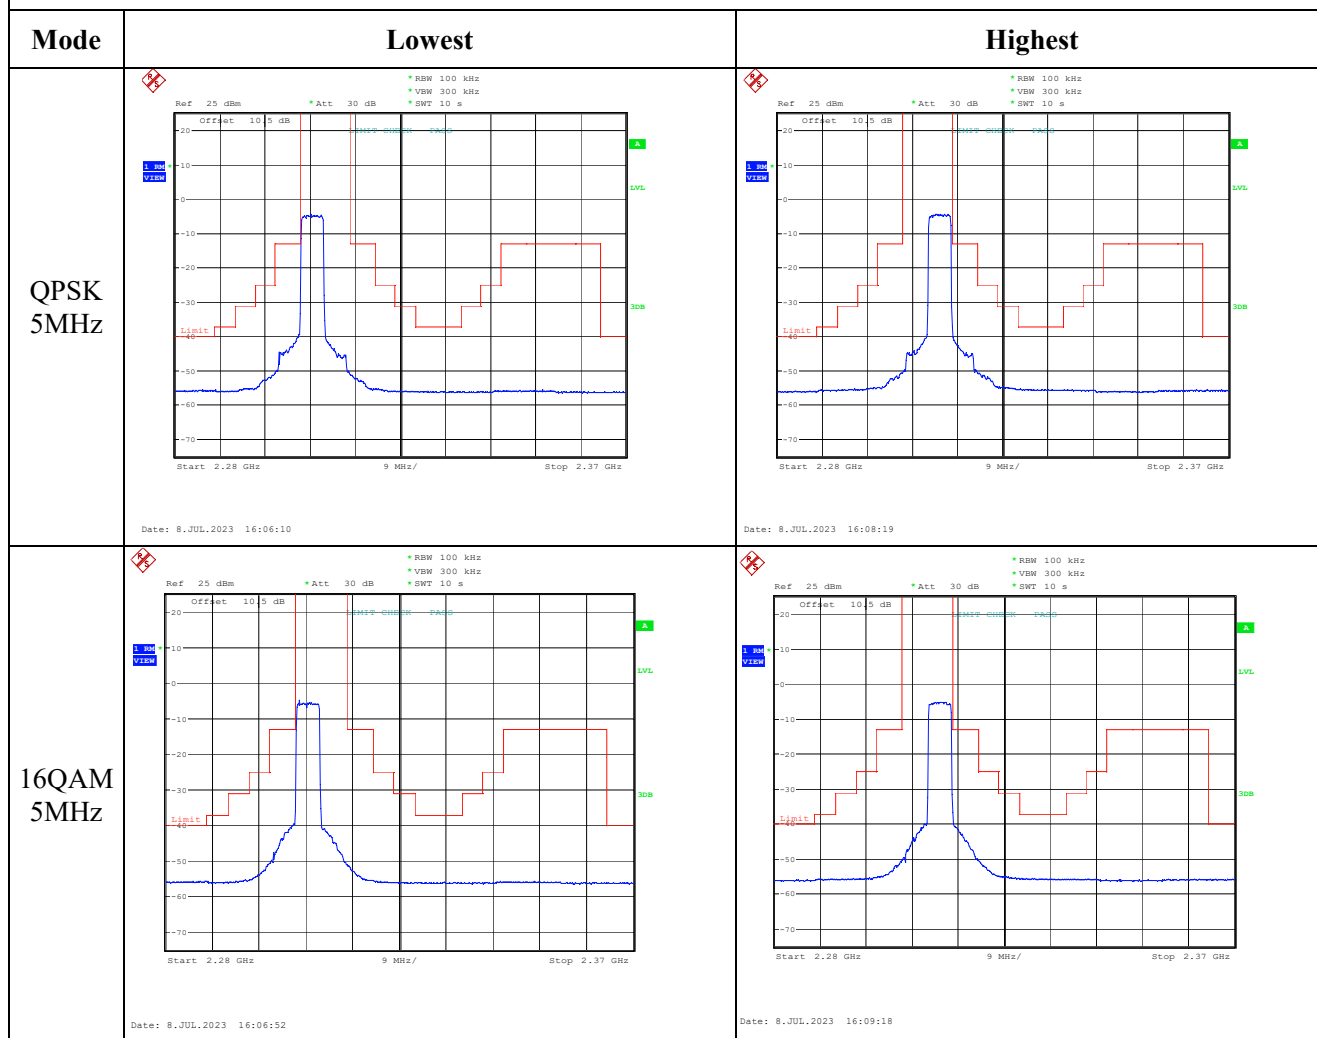


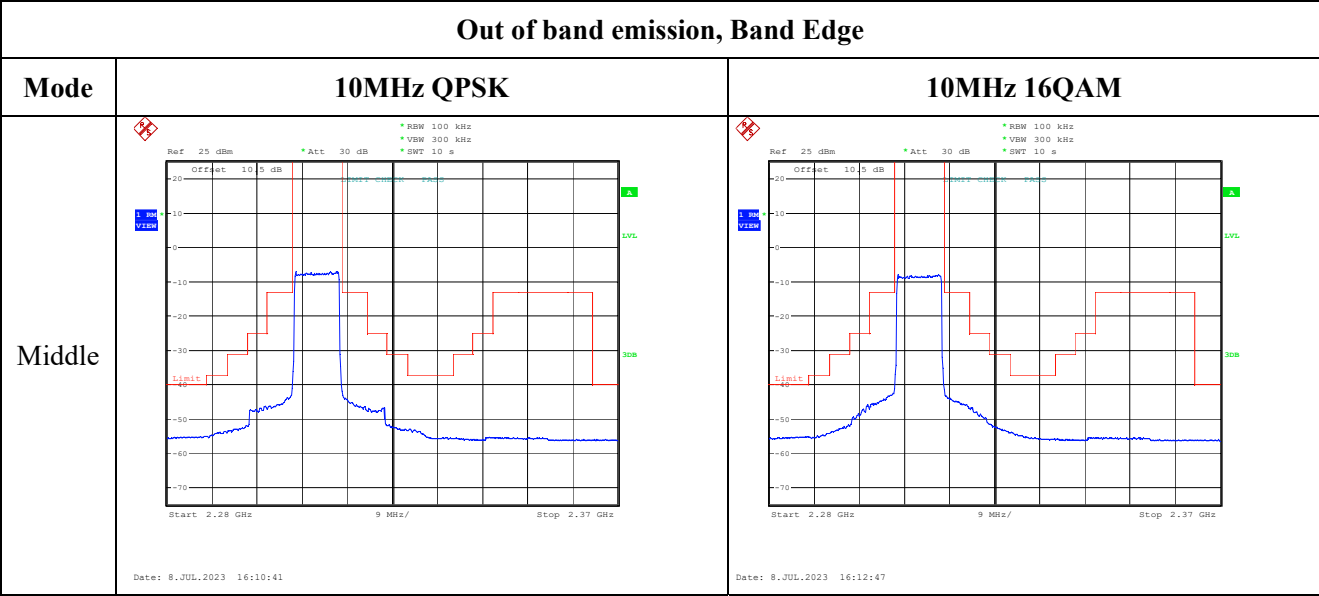


1)2350-2360:

Out of band emission, Band Edge

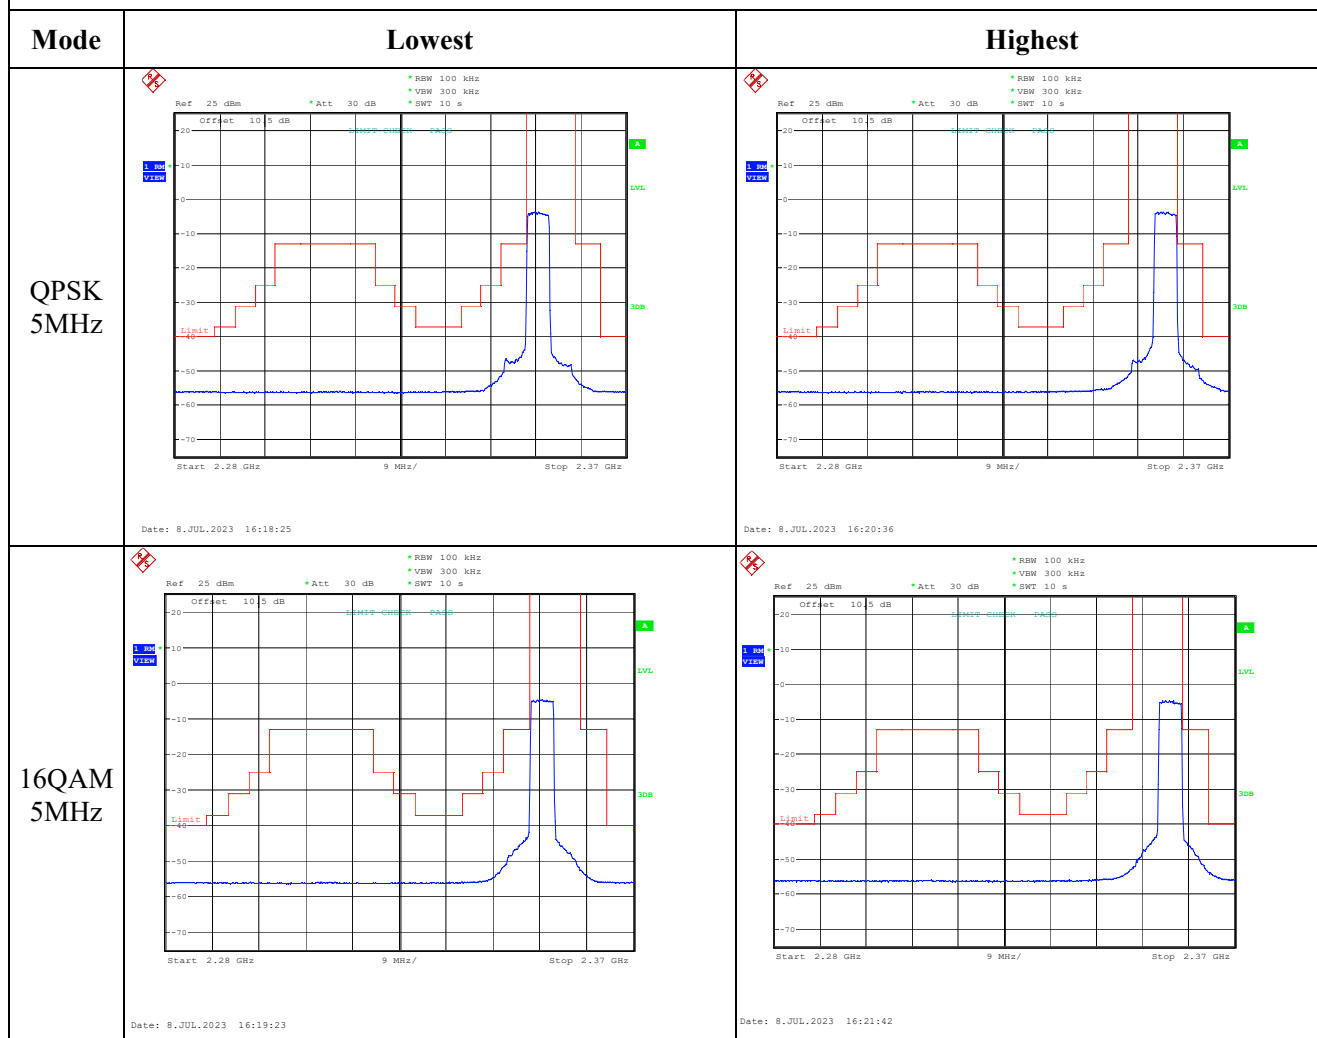


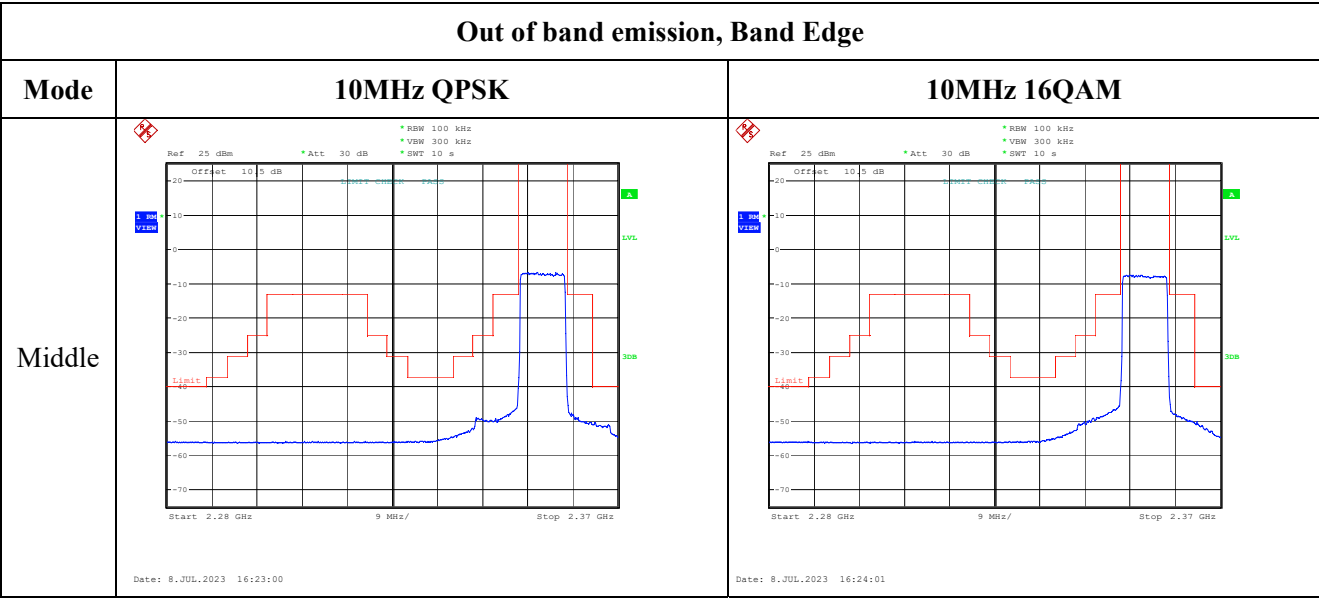

1)2305-2315:

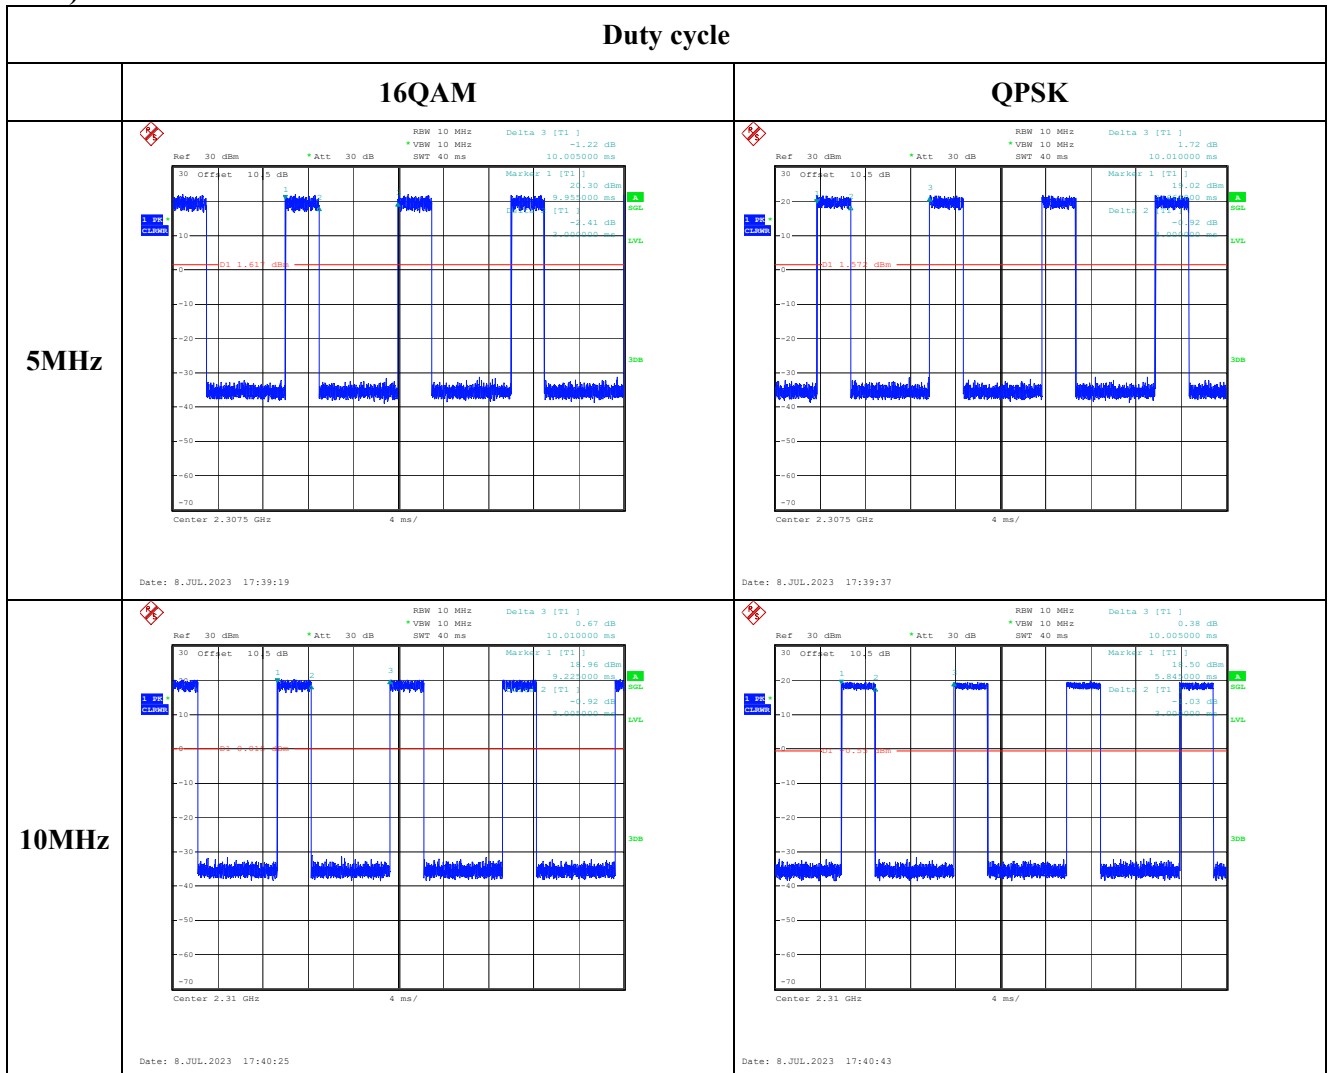

2)2350-2360:

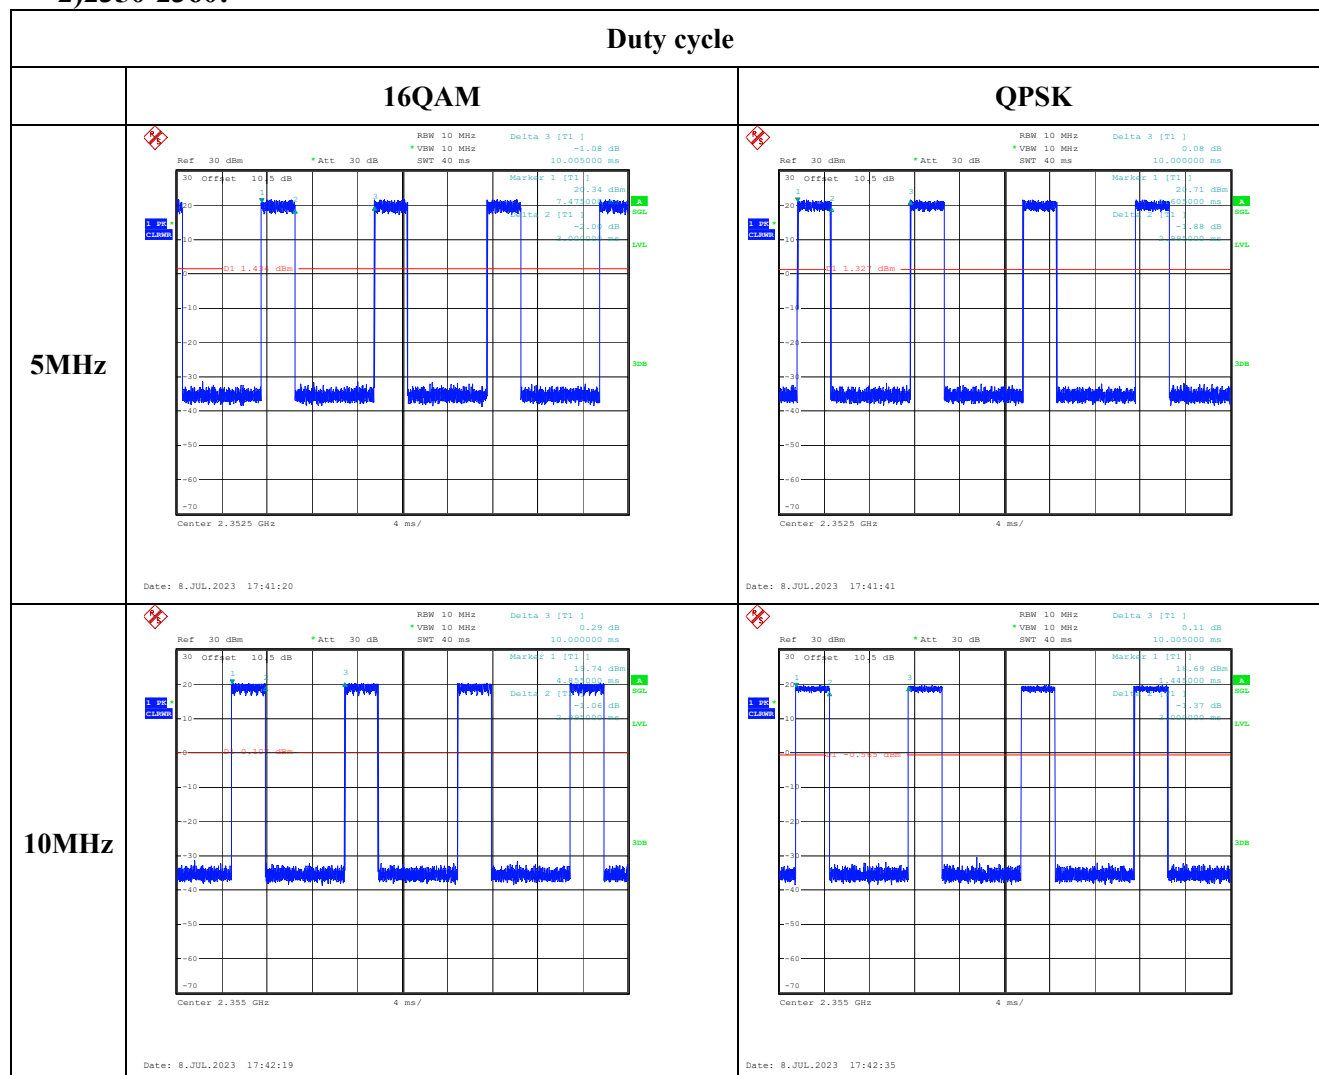

4.5 Antenna Port Test Data and Results for LTE Band 41

Serial Number:	27KB-1	Test Date:	2023/7/1~2023/8/21
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~26.1	Relative Humidity: (%)	52~54	ATM Pressure: (kPa)	101.2~101.4
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2023/3/31	2024/3/30
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2537.5	2595	2652.5
10MHz	2540	2595	2650
15MHz	2542.5	2595	2647.5
20MHz	2545	2595	2645

Test Data:**FCC§2.1046;§ 27.50(h)(2)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	22.31	22.28	22.44	23.28	33
	RB1#13	22.28	22.18	22.31		
	RB1#24	22.35	22.31	22.39		
	RB15#0	21.24	21.21	21.25		
	RB15#10	21.31	21.3	21.26		
	RB25#0	21.16	21.31	21.23		
5MHz 16QAM	RB1#0	21.51	21.15	21.06	22.61	33
	RB1#13	21.74	21.19	21.04		
	RB1#24	21.77	21.14	21.45		
	RB15#0	20.35	20.51	20.51		
	RB15#10	20.25	20.54	20.52		
	RB25#0	20.35	20.27	20.56		
10MHz QPSK	RB1#0	22.19	22.34	22.14	23.18	33
	RB1#25	22.15	22.26	22.17		
	RB1#49	22.17	22.31	22.21		
	RB25#0	21.06	21.28	21.17		
	RB25#25	21.15	21.33	21.2		
	RB50#0	20.79	21	20.81		
10MHz 16QAM	RB1#0	21.37	21.55	21.16	22.73	33
	RB1#25	21.89	21.61	21.26		
	RB1#49	21.79	21.88	21.16		
	RB25#0	20.41	20.6	20.32		
	RB25#25	20.31	20.55	20.28		
	RB50#0	19.92	20.06	20.09		
15MHz QPSK	RB1#0	22.14	22.03	22.32	23.27	33
	RB1#38	22.12	22.11	22.3		
	RB1#74	22.21	22.09	22.43		
	RB36#0	21.21	21.38	21.11		
	RB36#39	21.18	21.32	21.36		
	RB75#0	20.82	20.94	20.86		
15MHz 16QAM	RB1#0	21.47	21.57	21.16	22.41	33
	RB1#38	21.33	21.53	20.99		
	RB1#74	21.28	21.42	21.13		
	RB36#0	20.33	20.35	20.24		
	RB36#39	20.25	20.44	20.26		
	RB75#0	19.95	20.1	20.1		
20MHz QPSK	RB1#0	22.11	22.46	22.29	23.35	33
	RB1#50	22.2	22.49	22.32		

	RB1#99	22.23	22.51	22.41		
	RB50#0	21.19	21.28	21.26		
	RB50#50	21.23	21.21	21.35		
	RB100#0	20.89	20.93	20.98		
20MHz 16QAM	RB1#0	20.86	21.99	21.69	22.91	33
	RB1#50	20.85	21.93	21.65		
	RB1#99	20.93	22.07	21.87		
	RB50#0	20.33	20.53	20.69		
	RB50#50	20.38	20.42	20.63		
	RB100#0	19.87	20.11	20.03		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)						
					Result:	Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	9.33	8.64	9.19	13
	RB100#0	9.28	9.01	9.25	13
20MHz 16QAM	RB1#0	9.97	9.22	9.71	13
	RB100#0	10.03	9.77	10.2	13
				Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.520	4.520	4.520	5.040	5.000	5.140
5MHz 16QAM	4.540	4.500	4.520	5.260	5.040	4.980
10MHz QPSK	9.000	9.000	9.000	9.840	9.880	9.800
10MHz 16QAM	9.000	9.000	9.000	9.720	9.840	9.720
15MHz QPSK	13.560	13.500	13.560	15.120	15.420	15.060
15MHz 16QAM	13.620	13.620	13.560	17.940	16.620	16.500
20MHz QPSK	18.000	18.000	18.000	19.760	19.840	19.600
20MHz 16QAM	18.000	18.000	18.000	20.000	19.680	20.080
Note: The test plots please refer to the Plots of Occupied Bandwidth						


FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	2535.021	2535.00	2654.979	2655
	-20	3.8	2535.013	2535.00	2654.980	2655
	-10	3.8	2535.019	2535.00	2654.989	2655
	0	3.8	2535.011	2535.00	2654.987	2655
	10	3.8	2535.012	2535.00	2654.985	2655
	20	3.8	2535.015	2535.00	2654.985	2655
	30	3.8	2535.018	2535.00	2654.987	2655
	40	3.8	2535.017	2535.00	2654.986	2655
	50	3.8	2535.013	2535.00	2654.983	2655
Frequency Stability vs. Voltage	20	3.3	2535.012	2535.00	2654.981	2655
	20	4.35	2535.011	2535.00	2654.980	2655
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	2535.011	2535.00	2654.978	2655
	-20	3.8	2535.020	2535.00	2654.988	2655
	-10	3.8	2535.012	2535.00	2654.987	2655
	0	3.8	2535.013	2535.00	2654.980	2655
	10	3.8	2535.018	2535.00	2654.983	2655
	20	3.8	2535.021	2535.00	2654.983	2655
	30	3.8	2535.013	2535.00	2654.982	2655
	40	3.8	2535.022	2535.00	2654.982	2655
	50	3.8	2535.018	2535.00	2654.987	2655
Frequency Stability vs. Voltage	20	3.3	2535.022	2535.00	2654.979	2655
	20	4.35	2535.015	2535.00	2654.978	2655
					Result:	Pass

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):

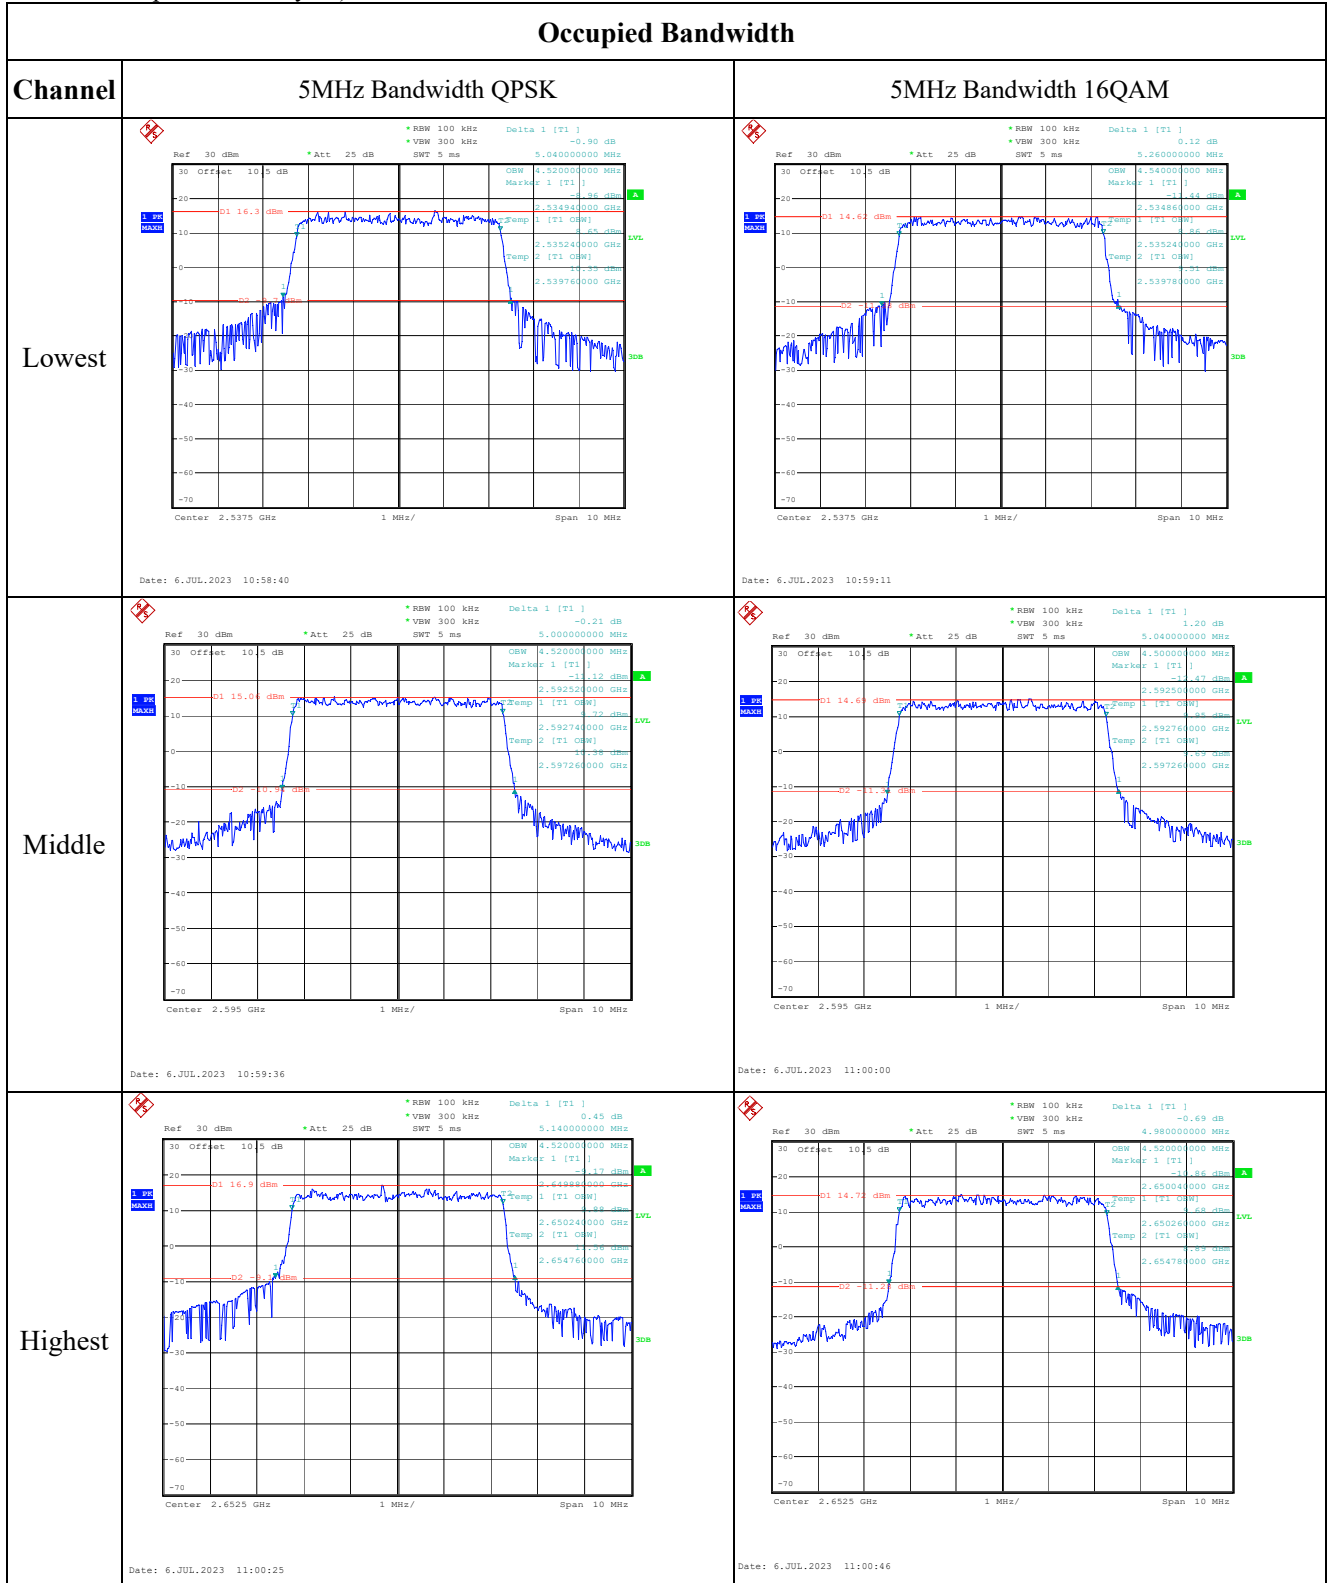



Occupied Bandwidth

Channel



10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM



Lowest

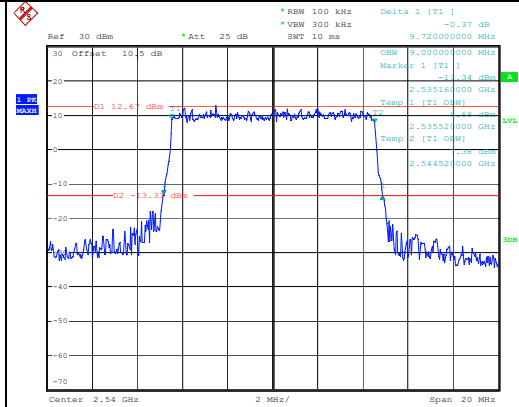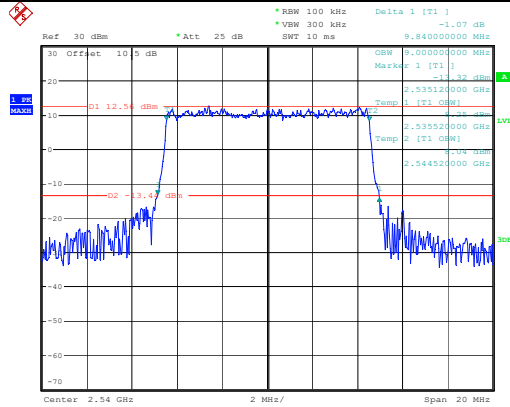







Middle

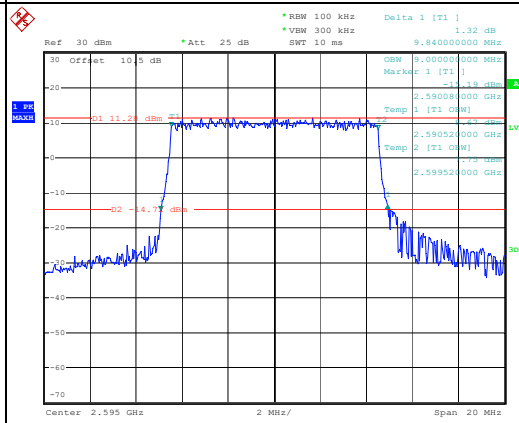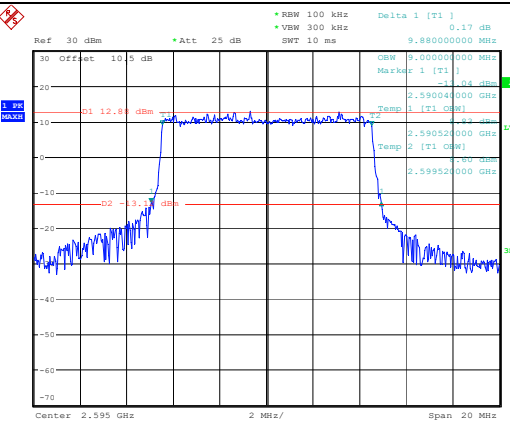

Highest

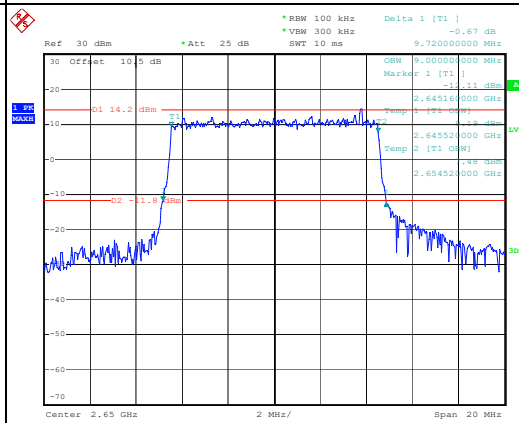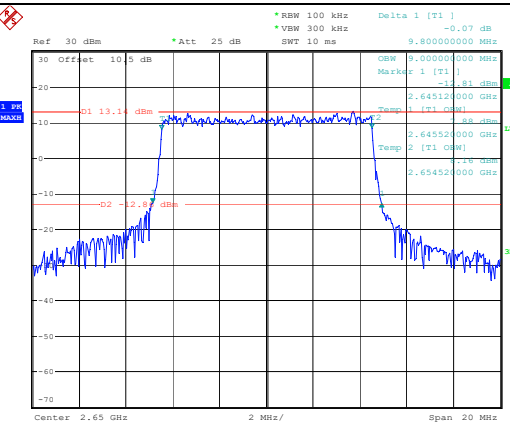

Occupied Bandwidth

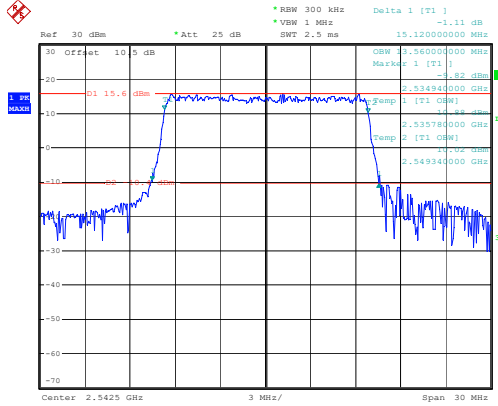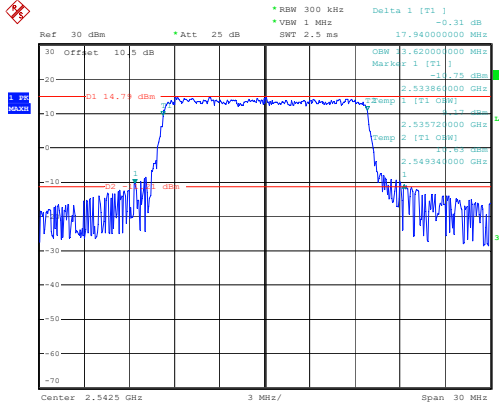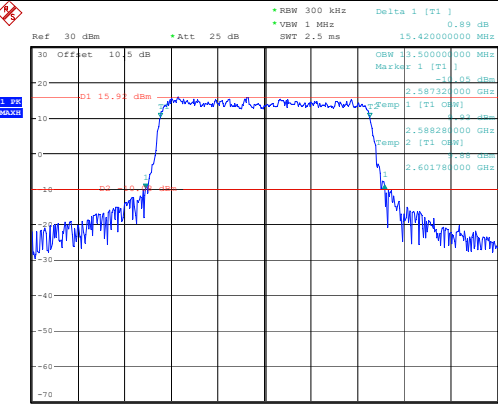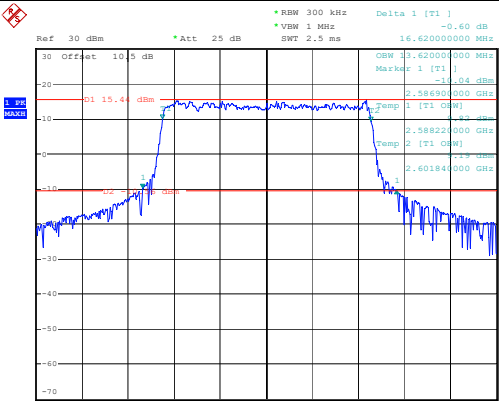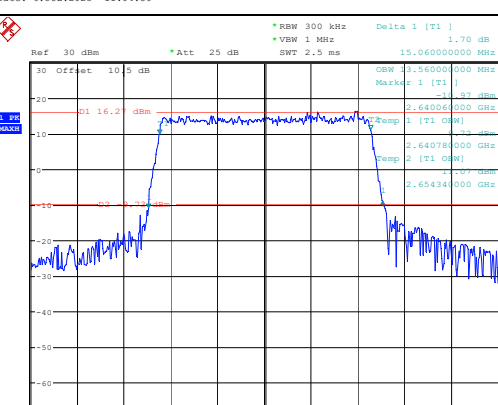
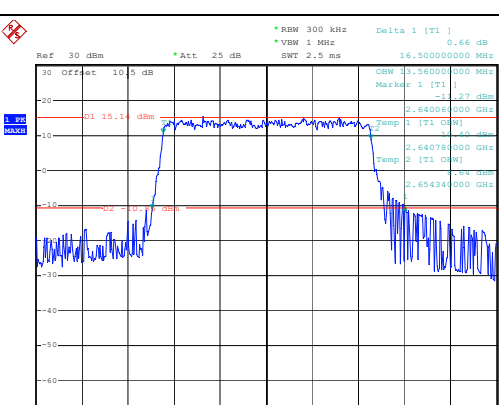
Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -1.11 dB *VBW 1 MHz SWT 2.5 ms 15.120000000 MHz Marker 1 [T1] -15.62 dBm Temp 1 [T1 QMW] 2.538840000 GHz Temp 2 [T1 QMW] 2.535780000 GHz Temp 3 [T1 QMW] 2.549340000 GHz Center 2.5425 GHz 3 MHz/ Span 30 MHz Date: 6.JUL.2023 11:03:54	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -0.31 dB *VBW 1 MHz SWT 2.5 ms 17.940000000 MHz Marker 1 [T1] -14.79 dBm Temp 1 [T1 QMW] 2.538860000 GHz Temp 2 [T1 QMW] 2.535720000 GHz Temp 3 [T1 QMW] 2.549340000 GHz Center 2.5425 GHz 3 MHz/ Span 30 MHz Date: 6.JUL.2023 11:04:24
Middle	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -0.89 dB *VBW 1 MHz SWT 2.5 ms 15.420000000 MHz Marker 1 [T1] -15.92 dBm Temp 1 [T1 QMW] 2.587320000 GHz Temp 2 [T1 QMW] 2.588280000 GHz Temp 3 [T1 QMW] 2.601780000 GHz Center 2.595 GHz 3 MHz/ Span 30 MHz Date: 6.JUL.2023 11:04:50	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -0.40 dB *VBW 1 MHz SWT 2.5 ms 16.620000000 MHz Marker 1 [T1] -15.44 dBm Temp 1 [T1 QMW] 2.586900000 GHz Temp 2 [T1 QMW] 2.588220000 GHz Temp 3 [T1 QMW] 2.601840000 GHz Center 2.595 GHz 3 MHz/ Span 30 MHz Date: 6.JUL.2023 11:05:33
Highest	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -1.70 dB *VBW 1 MHz SWT 2.5 ms 15.060000000 MHz Marker 1 [T1] -16.27 dBm Temp 1 [T1 QMW] 2.640060000 GHz Temp 2 [T1 QMW] 2.640780000 GHz Temp 3 [T1 QMW] 2.654340000 GHz Center 2.6475 GHz 3 MHz/ Span 30 MHz Date: 6.JUL.2023 11:06:01	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -0.66 dB *VBW 1 MHz SWT 2.5 ms 16.500000000 MHz Marker 1 [T1] -15.14 dBm Temp 1 [T1 QMW] 2.640060000 GHz Temp 2 [T1 QMW] 2.640780000 GHz Temp 3 [T1 QMW] 2.654340000 GHz Center 2.6475 GHz 3 MHz/ Span 30 MHz Date: 6.JUL.2023 11:06:26

Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

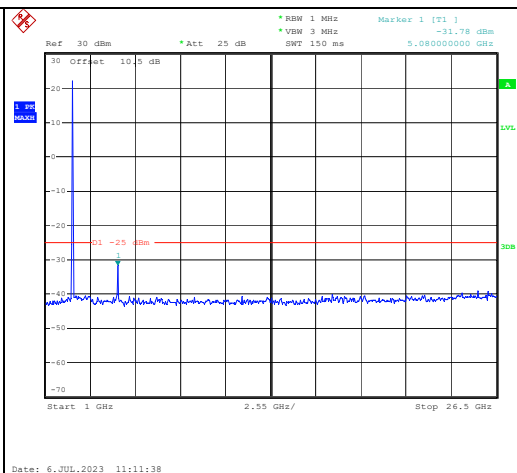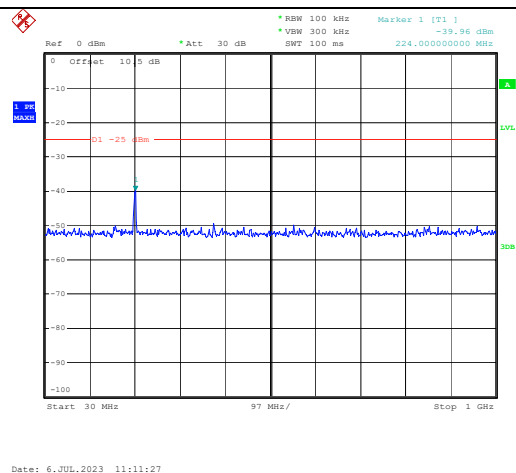

Middle

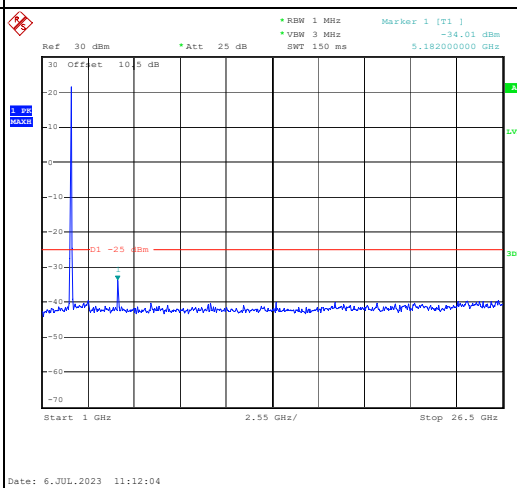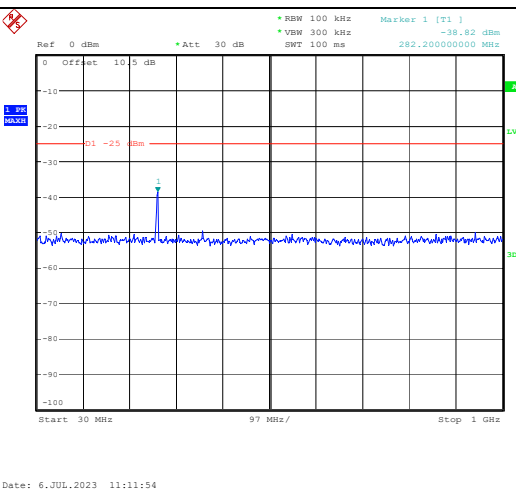

Highest

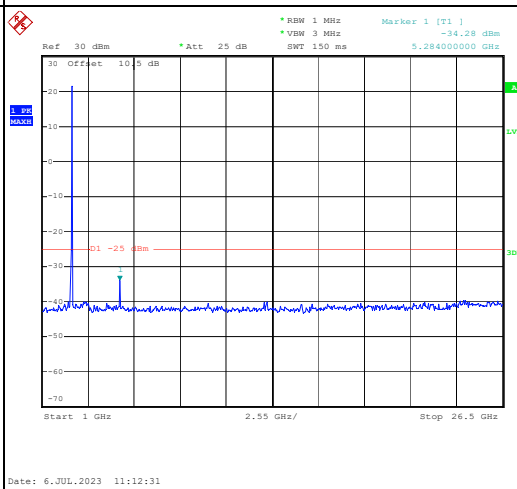
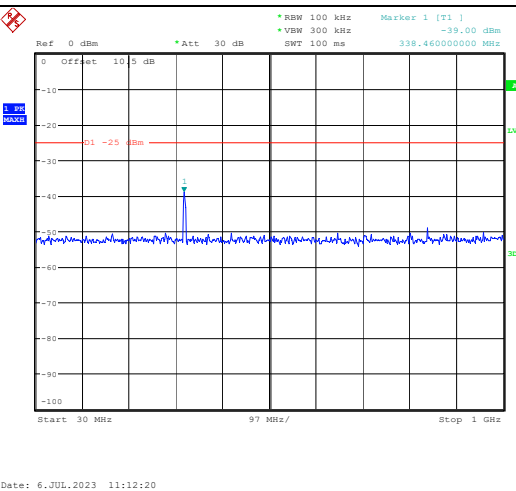


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

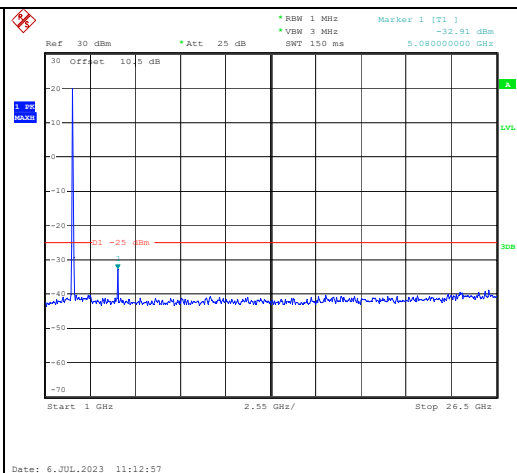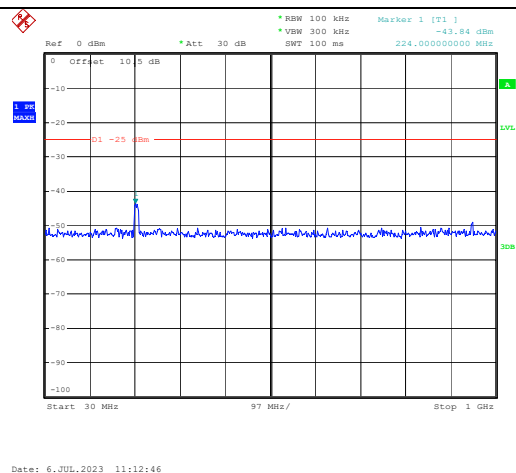

Middle

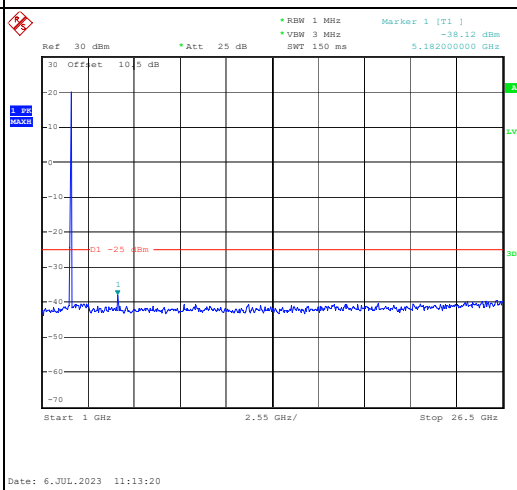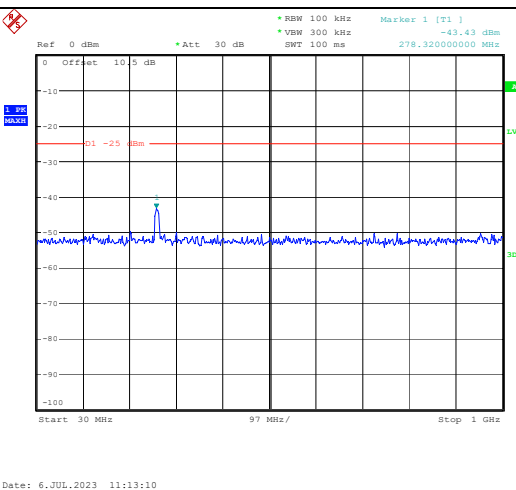

Highest

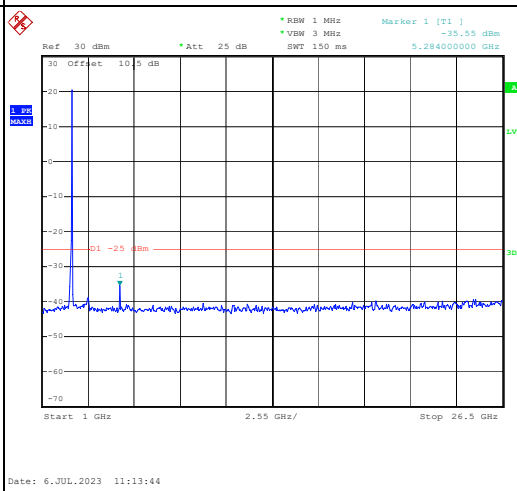
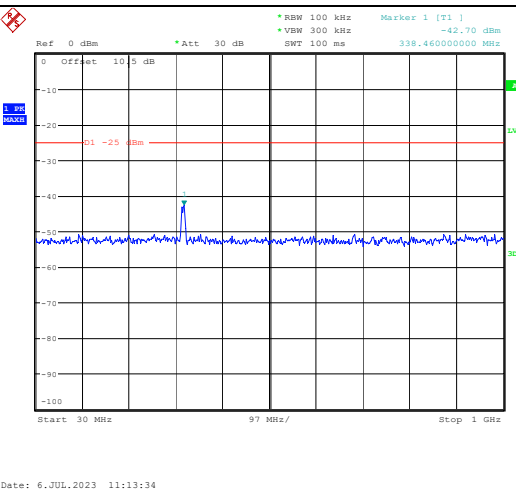


Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

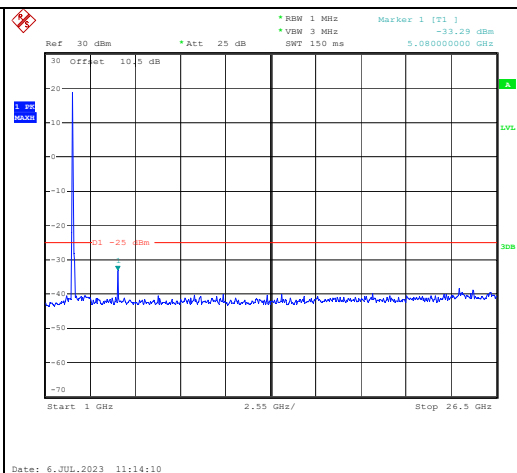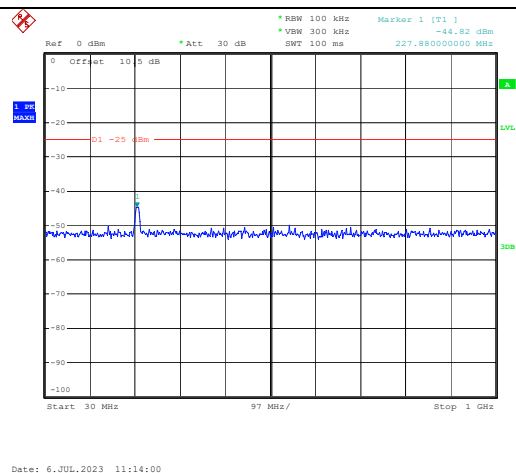

Middle

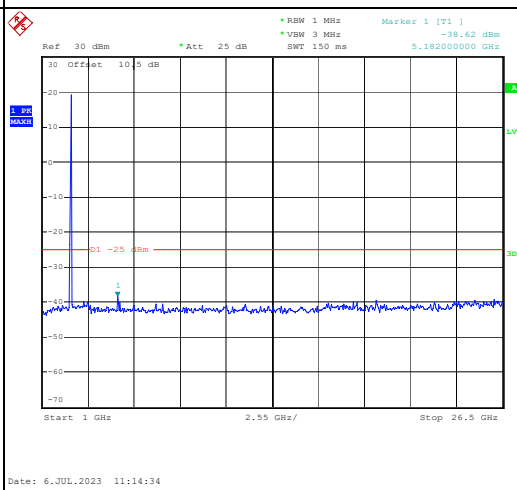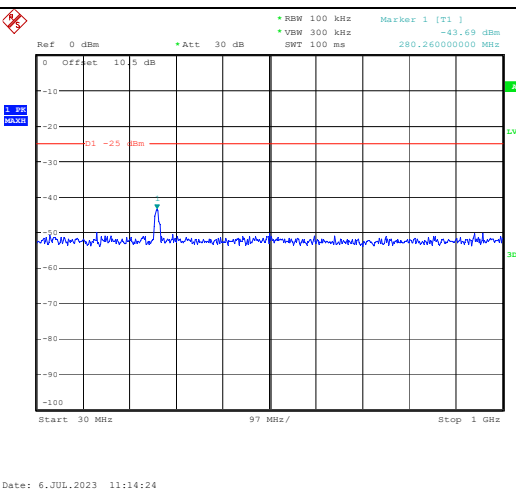

Highest

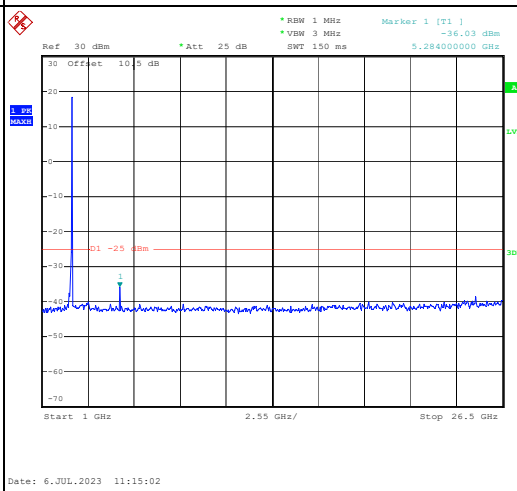
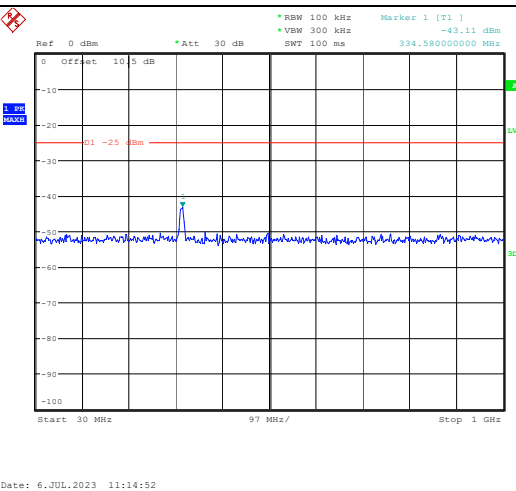


Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

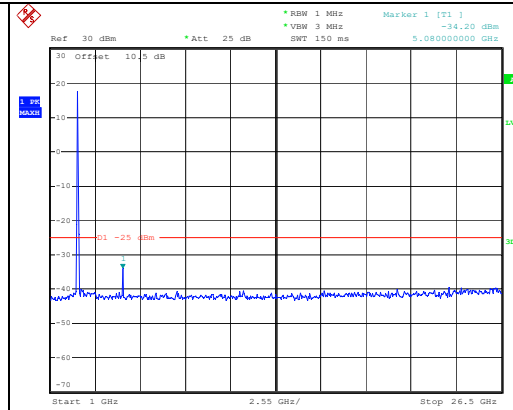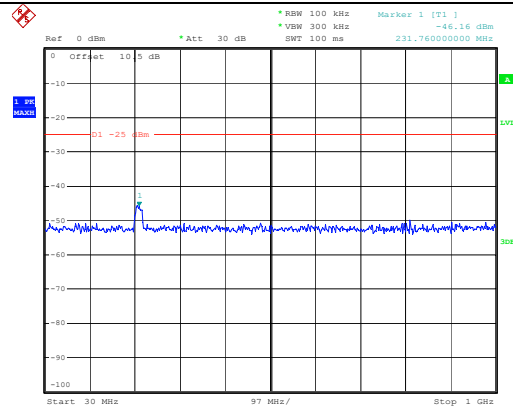







Middle

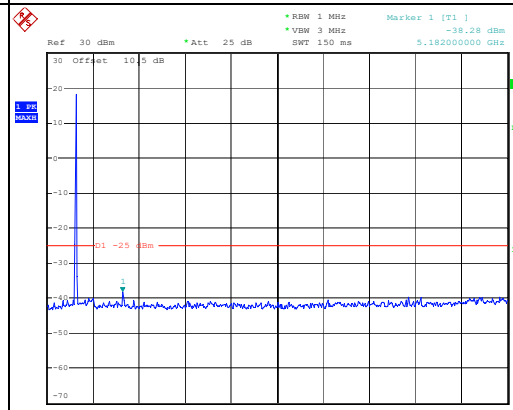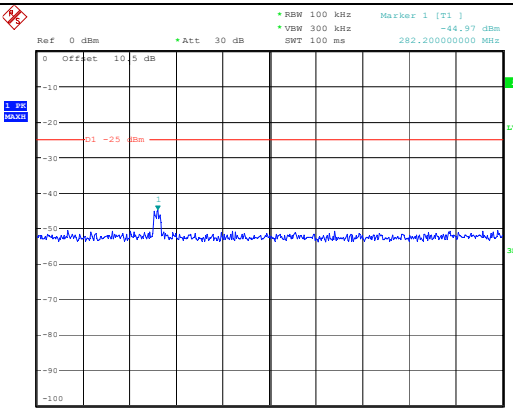


Highest

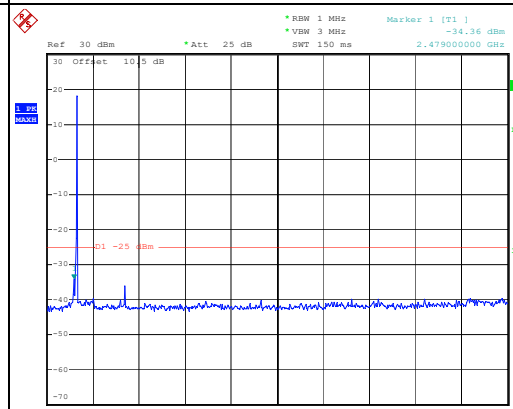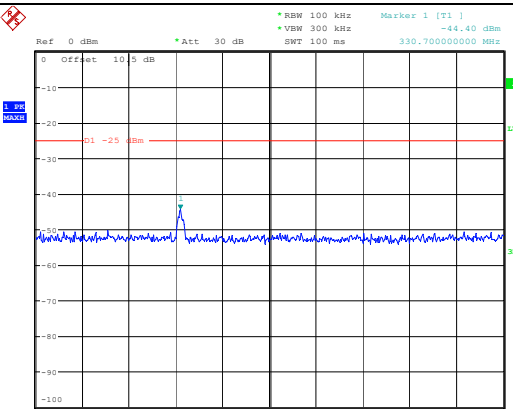


Out of band emission, Band Edge

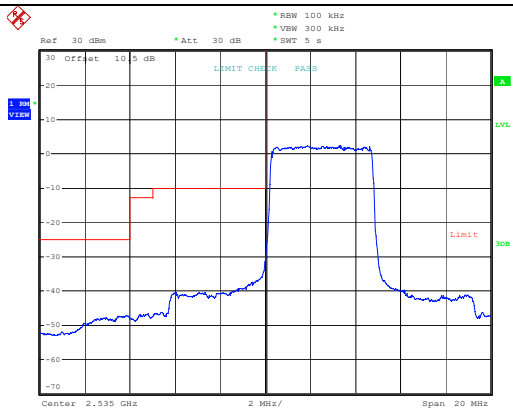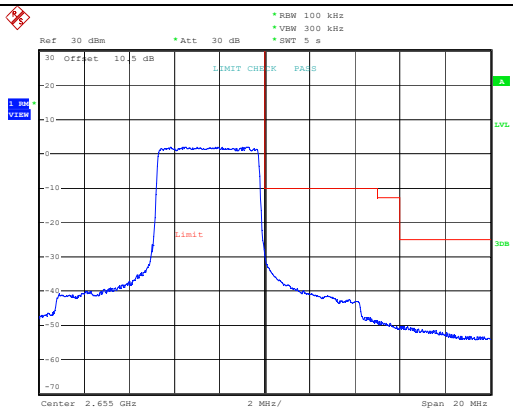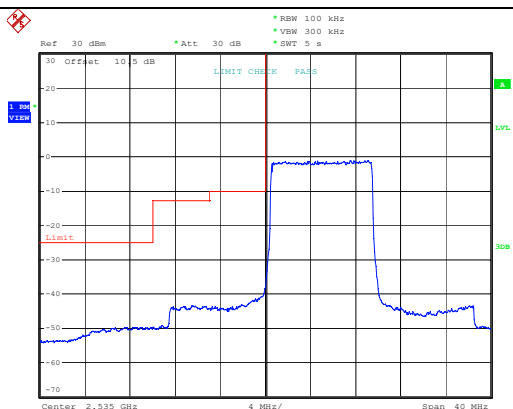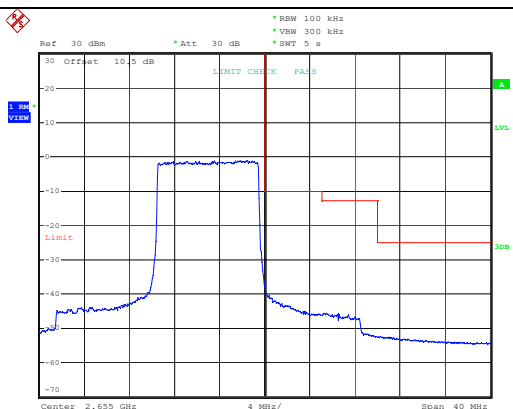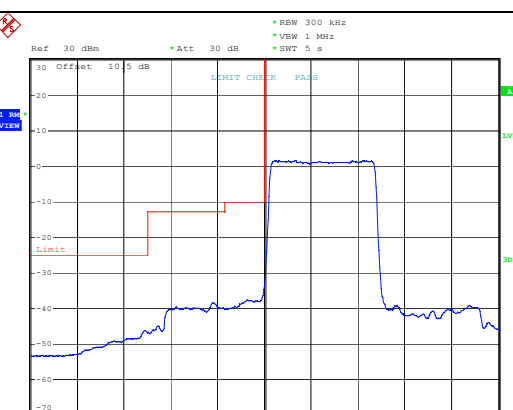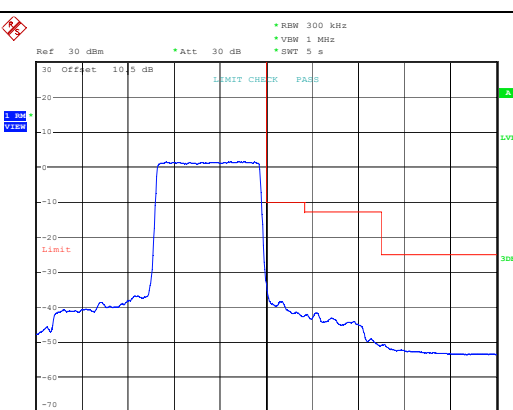Mode	Lowest	Highest
QPSK 5MHz	 Ref 30 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 s 30 Offset 10.5 dB LIMIT CHECK PASS Center 2.535 GHz 2 MHz/ Span 20 MHz Date: 6.JUL.2023 11:39:48	 Ref 30 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 s 30 Offset 10.5 dB LIMIT CHECK PASS Center 2.655 GHz 2 MHz/ Span 20 MHz Date: 6.JUL.2023 11:41:03
QPSK 10MHz	 Ref 30 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 s 30 Offset 10.5 dB LIMIT CHECK PASS Center 2.535 GHz 4 MHz/ Span 40 MHz Date: 6.JUL.2023 11:56:48	 Ref 30 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 s 30 Offset 10.5 dB LIMIT CHECK PASS Center 2.655 GHz 4 MHz/ Span 40 MHz Date: 6.JUL.2023 11:57:53
QPSK 15MHz	 Ref 30 dBm Att 30 dB RBW 300 kHz VBW 1 MHz SWT 5 s 30 Offset 10.5 dB LIMIT CHECK PASS Center 2.535 GHz 6 MHz/ Span 60 MHz Date: 6.JUL.2023 13:08:00	 Ref 30 dBm Att 30 dB RBW 300 kHz VBW 1 MHz SWT 5 s 30 Offset 10.5 dB LIMIT CHECK PASS Center 2.655 GHz 6 MHz/ Span 60 MHz Date: 6.JUL.2023 13:08:59






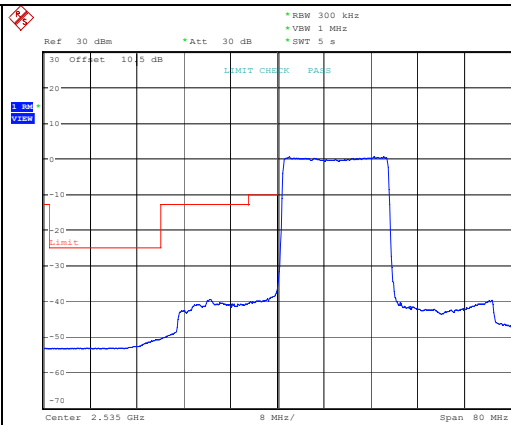
QPSK
20MHz

Date: 6.JUL.2023 13:16:04

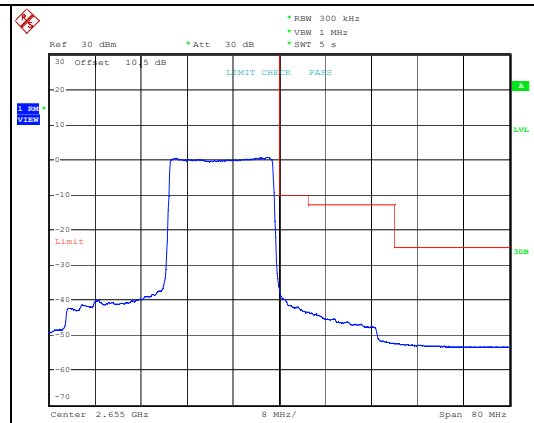


Date: 6.JUL.2023 13:16:59


Out of band emission, Band Edge

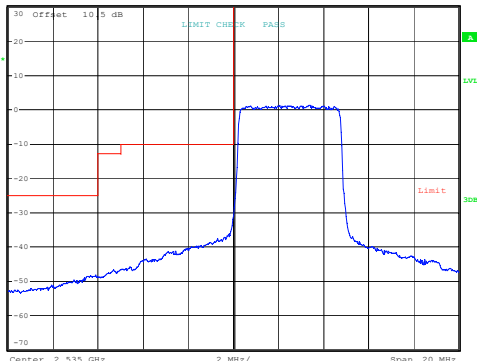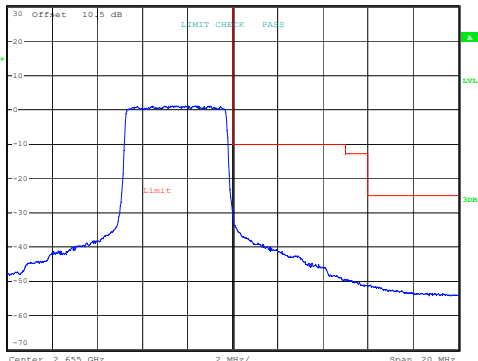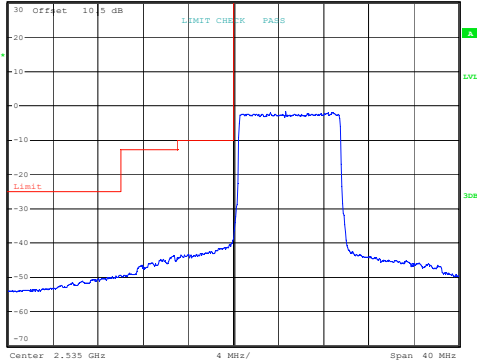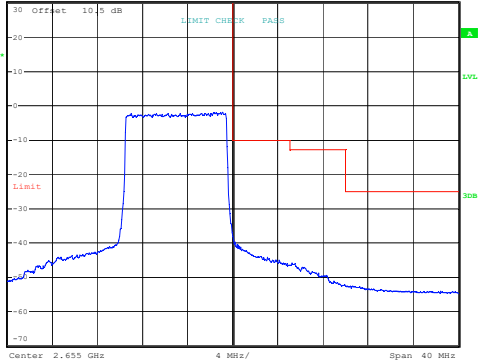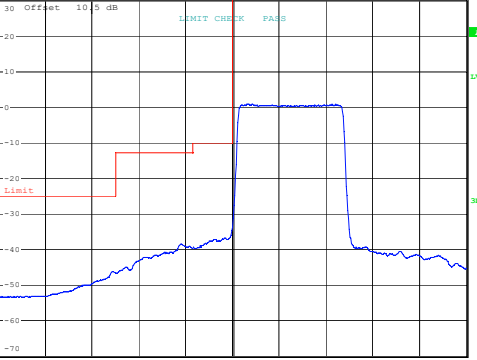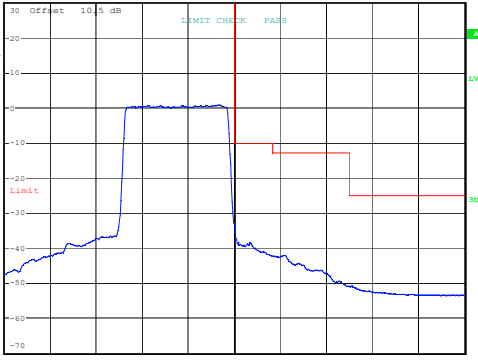Mode	Lowest	Highest
16QAM 5MHz	 Ref: 30 dBm, Att: 30 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 s Center: 2.535 GHz, Span: 20 MHz Date: 6.JUL.2023 11:50:54	 Ref: 30 dBm, Att: 30 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 s Center: 2.655 GHz, Span: 20 MHz Date: 6.JUL.2023 11:44:04
16QAM 10MHz	 Ref: 30 dBm, Att: 30 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 s Center: 2.535 GHz, Span: 40 MHz Date: 6.JUL.2023 13:03:25	 Ref: 30 dBm, Att: 30 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 s Center: 2.655 GHz, Span: 40 MHz Date: 6.JUL.2023 12:00:15
16QAM 15MHz	 Ref: 30 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 5 s Center: 2.535 GHz, Span: 60 MHz Date: 6.JUL.2023 13:09:53	 Ref: 30 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 5 s Center: 2.655 GHz, Span: 60 MHz Date: 6.JUL.2023 13:10:56

16QAM
20MHz

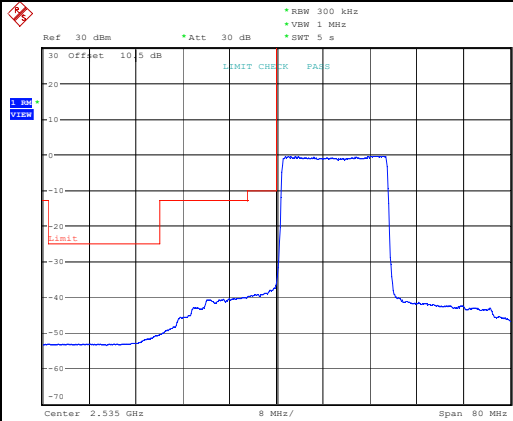

Date: 6.JUL.2023 13:18:18

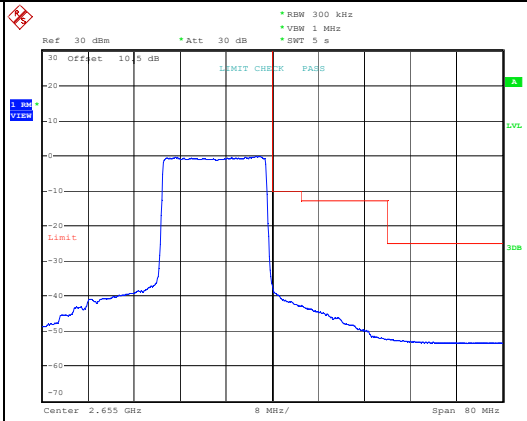

Date: 6.JUL.2023 13:19:39

4.6 Radiated Spurious Emissions

Serial Number:	27KB-1	Test Date:	2023/8/18~2023/8/22
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Carl Xue, Coco Tian	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.5~27.4	Relative Humidity: (%)	52~69	ATM Pressure: (kPa)	99.7~101
----------------------	-----------	---------------------------	-------	---------------------------	----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2022/7/16	2024/7/15
Agilent	Signal Generator	E8247C	MY43321352	2022/11/18	2023/11/17
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021/10/18	2024/10/17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2022/7/16	2024/7/15
Agilent	Signal Generator	E8247C	MY43321352	2022/11/18	2023/11/17
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
PASTERNAK	Horn Antenna	PE9852/2F-20	112001	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2022/9/16	2023/9/15
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4
PASTERNAK	Horn Antenna	PE9850/2F-20	072002	2021/2/5	2024/2/4
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.26 figure 5, the worst orientation was photographed and it's data was recorded.

Cellular Band (PART 22H)**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Frequency:824.2MHz								
729.58	H	20.99	-51.73	0.00	0.53	-52.26	-13.00	39.26
523.01	V	20.91	-50.70	0.00	0.42	-51.12	-13.00	38.12
1648.400	H	51.35	-52.98	8.68	0.80	-45.10	-13.00	32.10
1648.400	V	50.53	-53.88	8.68	0.80	-46.00	-13.00	33.00
2472.600	H	58.70	-42.08	9.38	1.00	-33.70	-13.00	20.70
2472.600	V	57.75	-42.98	9.38	1.00	-34.60	-13.00	21.60
3296.800	H	51.11	-45.57	10.32	1.15	-36.40	-13.00	23.40
3296.800	V	50.17	-46.27	10.32	1.15	-37.10	-13.00	24.10
GSM 850 Frequency:836.6MHz								
572.92	H	20.83	-53.56	0.00	0.46	-54.02	-13.00	41.02
719.36	V	20.75	-48.75	0.00	0.49	-49.24	-13.00	36.24
1673.200	H	53.85	-50.46	8.71	0.85	-42.60	-13.00	29.60
1673.200	V	53.05	-51.36	8.71	0.85	-43.50	-13.00	30.50
2509.800	H	59.20	-41.41	9.42	1.01	-33.00	-13.00	20.00
2509.800	V	57.81	-42.81	9.42	1.01	-34.40	-13.00	21.40
3346.400	H	52.09	-45.08	10.34	1.16	-35.90	-13.00	22.90
3346.400	V	51.15	-45.88	10.34	1.16	-36.70	-13.00	23.70
GSM 850 Frequency:848.8MHz								
706.93	H	20.87	-52.31	0.00	0.54	-52.85	-13.00	39.85
701.94	V	20.82	-49.06	0.00	0.55	-49.61	-13.00	36.61
1697.600	H	54.95	-49.34	8.74	0.90	-41.50	-13.00	28.50
1697.600	V	54.58	-49.84	8.74	0.90	-42.00	-13.00	29.00
2546.400	H	60.17	-40.16	9.47	1.01	-31.70	-13.00	18.70
2546.400	V	58.92	-41.36	9.47	1.01	-32.90	-13.00	19.90
3395.200	H	52.92	-44.77	10.36	1.19	-35.60	-13.00	22.60
3395.200	V	52.59	-45.07	10.36	1.19	-35.90	-13.00	22.90

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 1900 Frequency:1850.2MHz								
100.93	H	39.70	-72.66	0.00	0.19	-72.85	-13.00	59.85
100.58	V	45.89	-61.10	0.00	0.19	-61.29	-13.00	48.29
3700.400	H	64.07	-33.25	10.60	1.25	-23.90	-13.00	10.90
3700.400	V	63.05	-34.25	10.60	1.25	-24.90	-13.00	11.90
5550.600	H	60.01	-33.25	11.44	1.49	-23.30	-13.00	10.30
5550.600	V	58.85	-34.25	11.44	1.49	-24.30	-13.00	11.30
GSM 1900 Frequency:1880MHz								
102.71	H	39.79	-72.54	0.00	0.19	-72.73	-13.00	59.73
100.22	V	45.73	-61.29	0.00	0.19	-61.48	-13.00	48.48
3760.000	H	63.49	-32.92	10.66	1.24	-23.50	-13.00	10.50
3760.000	V	62.27	-34.02	10.66	1.24	-24.60	-13.00	11.60
5640.000	H	61.06	-32.39	11.33	1.54	-22.60	-13.00	9.60
5640.000	V	59.64	-33.69	11.33	1.54	-23.90	-13.00	10.90
GSM 1900 Frequency:1909.8MHz								
103.43	H	39.72	-72.60	0.00	0.19	-72.79	-13.00	59.79
100.58	V	45.64	-61.35	0.00	0.19	-61.54	-13.00	48.54
3819.600	H	64.53	-31.33	10.72	1.29	-21.90	-13.00	8.90
3819.600	V	63.29	-32.43	10.72	1.29	-23.00	-13.00	10.00
5729.400	H	62.65	-30.83	11.22	1.59	-21.20	-13.00	8.20
5729.400	V	61.53	-31.83	11.22	1.59	-22.20	-13.00	9.20

LTE Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 824.7 MHz								
719.42	H	20.74	-52.19	0.00	0.49	-52.68	-13.00	39.68
714.18	V	20.89	-48.72	0.00	0.50	-49.22	-13.00	36.22
1649.400	H	52.35	-51.98	8.68	0.80	-44.10	-13.00	31.10
1649.400	V	51.23	-53.18	8.68	0.80	-45.30	-13.00	32.30
2474.100	H	70.2	-30.58	9.38	1.00	-22.20	-13.00	9.20
2474.100	V	69.25	-31.48	9.38	1.00	-23.10	-13.00	10.10
3298.800	H	45.81	-50.87	10.32	1.15	-41.70	-13.00	28.70
3298.800	V	44.77	-51.67	10.32	1.15	-42.50	-13.00	29.50
QPSK, Frequency: 836.5 MHz								
443.65	H	21.02	-55.96	0.00	0.43	-56.39	-13.00	43.39
724.26	V	20.98	-48.41	0.00	0.51	-48.92	-13.00	35.92
1673.000	H	54.85	-49.46	8.71	0.85	-41.60	-13.00	28.60
1673.000	V	54.25	-50.16	8.71	0.85	-42.30	-13.00	29.30
2509.500	H	71.20	-29.41	9.42	1.01	-21.00	-13.00	8.00
2509.500	V	70.31	-30.31	9.42	1.01	-21.90	-13.00	8.90
3346.000	H	46.58	-50.58	10.34	1.16	-41.40	-13.00	28.40
3346.000	V	45.64	-51.38	10.34	1.16	-42.20	-13.00	29.20
QPSK, Frequency: 848.3 MHz								
699.54	H	20.82	-52.50	0.00	0.55	-53.05	-13.00	40.05
701.78	V	20.95	-48.93	0.00	0.55	-49.48	-13.00	36.48
1696.600	H	56.04	-48.25	8.74	0.89	-40.40	-13.00	27.40
1696.600	V	55.17	-49.25	8.74	0.89	-41.40	-13.00	28.40
2544.900	H	71.78	-28.56	9.47	1.01	-20.10	-13.00	7.10
2544.900	V	70.94	-29.36	9.47	1.01	-20.90	-13.00	7.90
3393.200	H	47.70	-49.97	10.36	1.19	-40.80	-13.00	27.80
3393.200	V	46.66	-50.97	10.36	1.19	-41.80	-13.00	28.80

LTE Band 40 Lower(2305MHz-2315MHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 2307.5MHz								
100.93	H	39.95	-72.41	0.00	0.19	-72.60	-40.00	32.60
101.64	V	45.87	-61.05	0.00	0.19	-61.24	-40.00	21.24
4615.000	H	38.43	-56.93	10.74	1.41	-47.60	-40.00	7.60
4615.000	V	38.79	-56.43	10.74	1.41	-47.10	-40.00	7.10
6922.500	H	37.08	-53.94	11.22	1.88	-44.60	-40.00	4.60
6922.500	V	36.25	-54.64	11.22	1.88	-45.30	-40.00	5.30
QPSK, Frequency:2312.5 MHz								
101.64	H	39.72	-72.63	0.00	0.19	-72.82	-40.00	32.82
100.58	V	45.90	-61.09	0.00	0.19	-61.28	-40.00	21.28
4625.000	H	39.95	-55.34	10.75	1.41	-46.00	-40.00	6.00
4625.000	V	40.53	-54.64	10.75	1.41	-45.30	-40.00	5.30
6937.500	H	38.27	-52.71	11.21	1.90	-43.40	-40.00	3.40
6937.500	V	37.43	-53.41	11.21	1.90	-44.10	-40.00	4.10

LTE Band 40 Upper (2350MHz-2360MHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 2352.5MHz								
67.91	H	39.37	-64.43	-6.11	0.15	-70.69	-40.00	30.69
100.58	V	45.85	-61.14	0.00	0.19	-61.33	-40.00	21.33
4705.000	H	37.14	-57.64	10.85	1.41	-48.20	-40.00	8.20
4705.000	V	38.16	-56.64	10.85	1.41	-47.20	-40.00	7.20
7057.500	H	35.66	-54.35	11.17	1.92	-45.10	-40.00	5.10
7057.500	V	35.55	-54.35	11.17	1.92	-45.10	-40.00	5.10
QPSK, Frequency:2357.5 MHz								
103.39	H	39.76	-72.56	0.00	0.19	-72.75	-40.00	32.75
99.87	V	45.95	-61.11	0.00	0.19	-61.30	-40.00	21.30
4715.000	H	38.66	-56.05	10.86	1.41	-46.60	-40.00	6.60
4715.000	V	39.76	-54.95	10.86	1.41	-45.50	-40.00	5.50
7072.500	H	36.55	-53.25	11.16	1.91	-44.00	-40.00	4.00
7072.500	V	36.36	-53.35	11.16	1.91	-44.10	-40.00	4.10

