

Bestway (Hong Kong) International Ltd.

RF TEST REPORT

Report Type:
FCC Part 15.247 & ISED RSS-247 RF report

Model:
S300206

Report Number:
2405B1901SHA-002

Issue Date:
June 6, 2024

Document Control Number:
TTRF15.247-02_V1 © 2018 Intertek



Applicant: Bestway (Hong Kong) International Ltd.
SUITE 713, 7/FLOOR, EAST WING, TSIM SHA TSUI CENTRE, 66 MODY
ROAD, KOWLOON, HONG KONG

Manufacturer: Bestway Inflatables & Material Corp.
No. 208 Jin Yuan Wu Road, Shanghai, 201812, China

Manufacturing site: Bestway (Nantong) Recreation Corp.
No. 8, West Huimin Road, Rugao Economic and Technology
Development Zone, Jiangsu, 226503, China

FCC ID: 2AS3R-300206R

IC: 26017-300206R

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of
Unlicensed Wireless Devices


RSS-247 Issue 3 (August 2023): Digital Transmission Systems (DTSs), Frequency Hopping
Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (February 2021) Amendment 2: General Requirements for Compliance of
Radio Apparatus

PREPARED BY:

Scout Gong
Project Engineer

REVIEWED BY:


Eric Li
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Content**

REVISION HISTORY	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION.....	7
1.3 ANTENNA INFORMATION.....	7
1.4 DESCRIPTION OF TEST FACILITY	8
2 TEST SPECIFICATIONS	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST	9
2.3 TEST SOFTWARE LIST.....	10
2.4 TEST PERIPHERALS LIST.....	10
2.5 TEST ENVIRONMENT CONDITION:	10
2.6 INSTRUMENT LIST	11
2.7 MEASUREMENT UNCERTAINTY	12
3 MINIMUM 6DB BANDWIDTH	13
3.1 LIMIT	13
3.2 MEASUREMENT PROCEDURE	13
3.3 TEST CONFIGURATION	13
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH	13
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.	14
4.1 LIMIT	14
4.2 MEASUREMENT PROCEDURE	14
4.3 TEST CONFIGURATION	14
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	14
5 POWER SPECTRUM DENSITY	15
5.1 LIMIT	15
5.2 MEASUREMENT PROCEDURE	15
5.3 TEST CONFIGURATION	15
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY.....	15
6 EMISSION OUTSIDE THE FREQUENCY BAND	16
6.1 LIMIT	16
6.2 MEASUREMENT PROCEDURE	16
6.3 TEST CONFIGURATION	17
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND	17
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS	18
7.1 LIMIT	18
7.2 MEASUREMENT PROCEDURE	18
7.3 TEST CONFIGURATION	20
7.4 TEST RESULTS OF RADIATED EMISSIONS	22
8 POWER LINE CONDUCTED EMISSION	25
8.1 LIMIT	25

TEST REPORT

8.2	TEST CONFIGURATION	25
8.3	MEASUREMENT PROCEDURE	26
8.4	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	27
9	OCCUPIED BANDWIDTH	29
9.1	LIMIT	29
9.2	MEASUREMENT PROCEDURE	29
9.3	TEST CONFIGURATION	29
9.4	THE RESULTS OF OCCUPIED BANDWIDTH.....	29
10	ANTENNA REQUIREMENT.....	30
11	APPENDIX A: TEST RESULTS	31
11.1	DTS BANDWIDTH.....	31
	<i>Test Data</i>	31
	<i>Test Plots</i>	31
11.2	OCCUPIED CHANNEL BANDWIDTH	33
	<i>Test Data</i>	33
	<i>Test Plots</i>	33
11.3	MAXIMUM CONDUCTED OUTPUT POWER.....	35
	<i>Test Data</i>	35
	<i>Test Plots</i>	35
11.4	MAXIMUM POWER SPECTRAL DENSITY.....	37
	<i>Test Data</i>	37
	<i>Test Plots</i>	37
11.5	BAND EDGE MEASUREMENTS	39
	<i>Test Data</i>	39
	<i>Test Plots</i>	39
11.6	CONDUCTED SPURIOUS EMISSION	40
	<i>Test Data</i>	40
	<i>Test Plots</i>	40
11.7	DUTY CYCLE	44
	<i>Test Data</i>	44
	<i>Test Plots</i>	44

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
2405B1901SHA-002	Rev. 01	Initial issue of report	June 6, 2024

TEST REPORT**Measurement Result Summary**

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 3 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 3 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 3 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 3 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes:

1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

TEST REPORT**1 General Information****1.1 Description of Equipment Under Test (EUT)**

Product name:	Electric Spas
Type/Model:	S300206
HVIN:	26017-300206R
Description of EUT:	EUT is a wireless Electric Spas with BLE and Wi-Fi module.
Rating:	110-120 VAC, 60Hz, 12A
Category of EUT:	Class B
EUT type:	<input type="checkbox"/> Tabletop <input checked="" type="checkbox"/> Floor standing
Software Version:	-
Hardware Version:	-
Sample Identification No.:	0240330-18-004
Sample received date:	March 30, 2024
Date of test:	March 30, 2024, to June 6, 2024

1.2 Technical Specification

Frequency Band:	2400MHz ~ 2483.5MHz
Support Standards:	Bluetooth Low Energy
Type of Modulation:	GFSK
Channel Number:	40
Data Rate:	1Mbps
Channel Separation:	2MHz

1.3 Antenna Information

No.	Antenna Type	Gain	Note
1	PCB antenna	2 dBi	Internal type

TEST REPORT**1.4 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 Test Specifications

2.1 Standards or Specification

47CFR Part 15 (2023)
ANSI C63.10 (2020)
KDB 558074 (v05or02)
RSS-247 Issue 3 (August 2023)
RSS-Gen Issue 5, (February 2021) Amendment 2

2.2 Mode of Operation During the Test

The lowest, middle and highest channels were tested as representatives.

Frequency Band (MHz)				2400 ~ 2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Data rate VS Power:

The test setting software is offered by the applicant. The pre-scan for the conducted power with all rates in each modulation and bands were used, and the worst case was found and used in all test cases.

Test software and Power Setting parameter			
Test Software		RTLBAPP	
Working Mode			BLE
Test Channel	2402MHz	2440MHz	2480MHz

While testing transmitting mode of EUT, the internal modulation and continuous transmission was applied.

Radiated test mode: EUT transmitted signal with antenna.

Conducted test mode: EUT transmitted signal from RF port connected to SPA directly.

TEST REPORT**2.3 Test Software List**

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test Peripherals List

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	100-240V AC, 50/60Hz

2.5 Test Environment Condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	20°C	50% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	21°C	52% RH
Power line conducted emission	21°C	52% RH

TEST REPORT
2.6 Instrument List

Conducted Emission						
Used	Equipment	Manufacturer	Type	Internal no.	Calibration date	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2024-02-08	2025-02-07
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2023-11-20	2024-11-19
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2023-12-08	2024-12-07
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2024-01-11	2025-01-10
Radiated Emission						
Used	Equipment	Manufacturer	Type	Internal no.	Calibration date	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2023-08-23	2024-08-22
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR	EC 6501	2023-09-25	2024-09-24
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2023-09-13	2024-09-12
<input checked="" type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2023-12-08	2024-12-07
<input checked="" type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2024-02-15	2025-02-14
<input checked="" type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2023-09-16	2024-09-15
<input checked="" type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2023-09-13	2024-09-12
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC 5262	2023-09-25	2024-09-24
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2023-07-13	2024-07-12
RF test						
Used	Equipment	Manufacturer	Type	Internal no.	Calibration date	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2024-03-08	2025-03-07
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2024-03-08	2025-03-07
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2024-03-08	2025-03-07
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2024-03-08	2025-03-07
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5182A	EC 6172	2023-08-09	2024-08-08
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5181A	EC 6171	2023-08-09	2024-08-08
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2024-03-08	2025-03-07
Additional instrument						
Used	Equipment	Manufacturer	Type	Internal no.	Calibration date	Due date
<input checked="" type="checkbox"/>	Thermo-Hygrometer	Testo	175h1	EC 6643	2023-08-29	2024-08-28
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2023-08-17	2024-08-16

TEST REPORT**2.7 Measurement Uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Power spectrum density	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB
Minimum 6dB Bandwidth	± 0.84×10^{-7}
Occupied bandwidth	± 0.84×10^{-7}

TEST REPORT

3 Minimum 6dB Bandwidth

Test Result: Pass

3.1 Limit

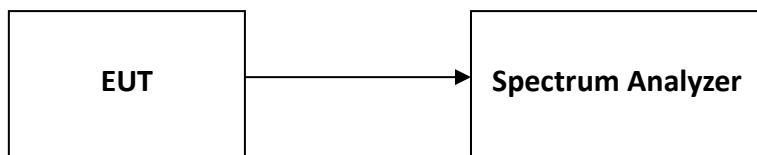
For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

The minimum 6dB bandwidth is measured using the Spectrum Analyzer according to DTS test procedure of "558074 D01 15.247 Meas Guidance v05r02" (clause 8.2) for compliance requirements.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration



3.4 Test Results of Minimum 6dB Bandwidth

Please refer to Appendix A.

TEST REPORT**4 Maximum Conducted Output Power and e.i.r.p.**

Test Result: Pass

4.1 Limit

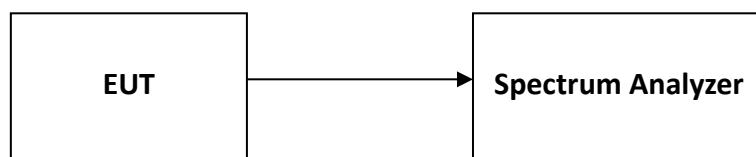
For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “558074 D01 15.247 Meas Guidance v05r02” (clause 8.3.1) for compliance requirements.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

4.3 Test Configuration**4.4 Test Results of Maximum Conducted Output Power**

Please refer to Appendix A.

TEST REPORT

5 Power Spectrum Density

Test Result: Pass

5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

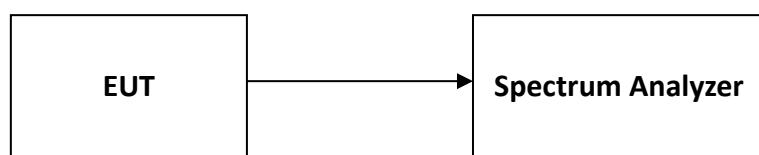
If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and 8+ (6 –antenna gain-beam forming gain).

5.2 Measurement Procedure

The power output was tested according to DTS test procedure of “558074 D01 15.247 Meas Guidance v05r02” (clause 8.4) for compliance requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Test Configuration



5.4 Test Results of Power Spectrum Density

Please refer to Appendix A.

TEST REPORT**6 Emission Outside the Frequency Band****Test Result:** Pass**6.1 Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “558074 D01 15.247 Meas Guidance v05r02” (clause 8.5) for compliance requirements.

Reference level measurement

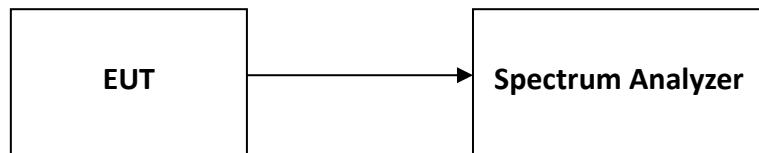
Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

TEST REPORT**6.3 Test Configuration****6.4 The Results of Emission Outside the Frequency Band**

Please refer to Appendix A.

TEST REPORT**7 Radiated Emissions in Restricted Frequency Bands****Test Result: Pass****7.1 Limit**

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure**For Radiated emission below 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.1 meters above the ground in a 3-meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

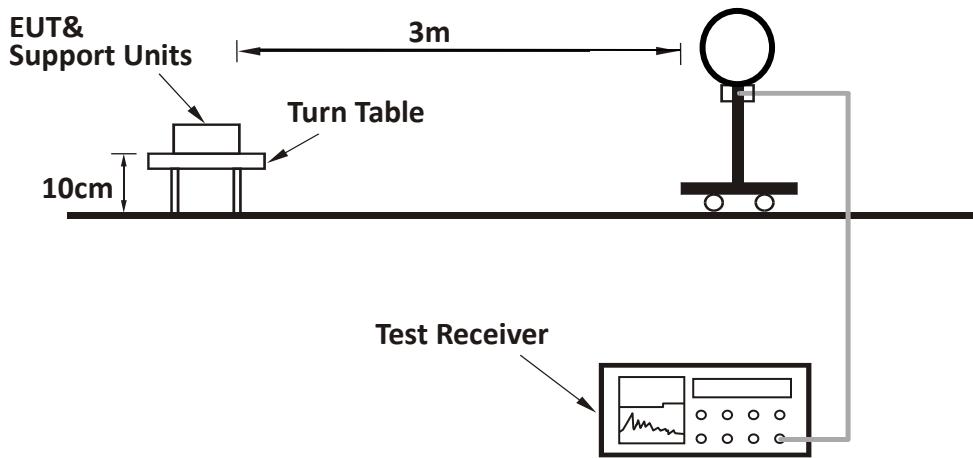
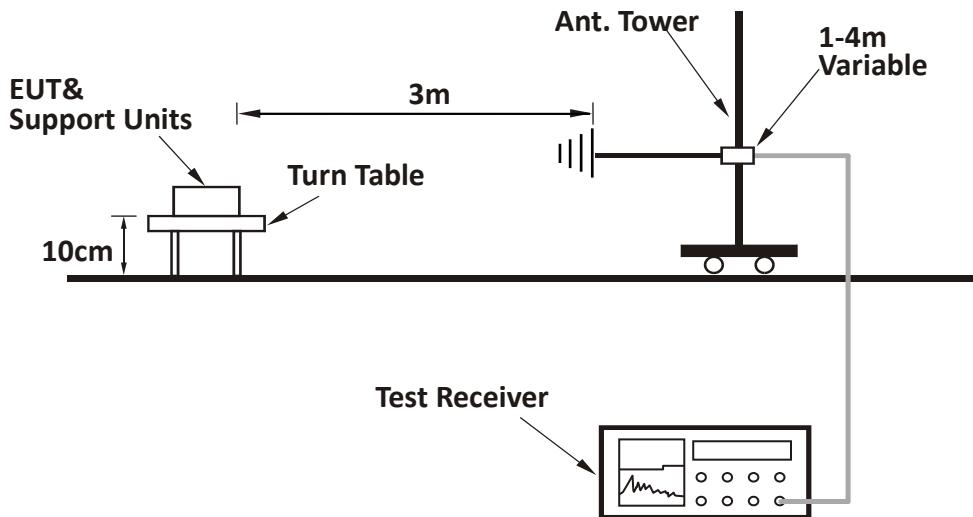
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

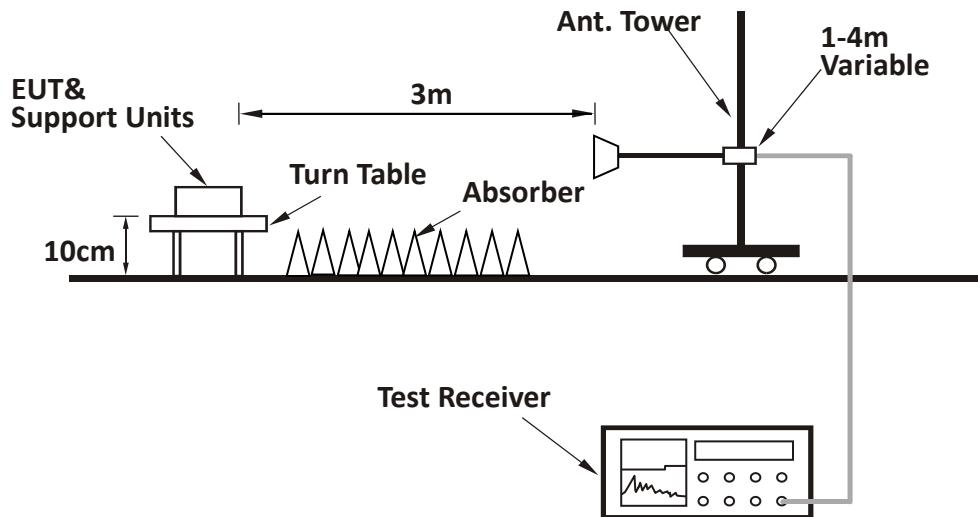
TEST REPORT**For Radiated emission above 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.1 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna varies from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

Note:

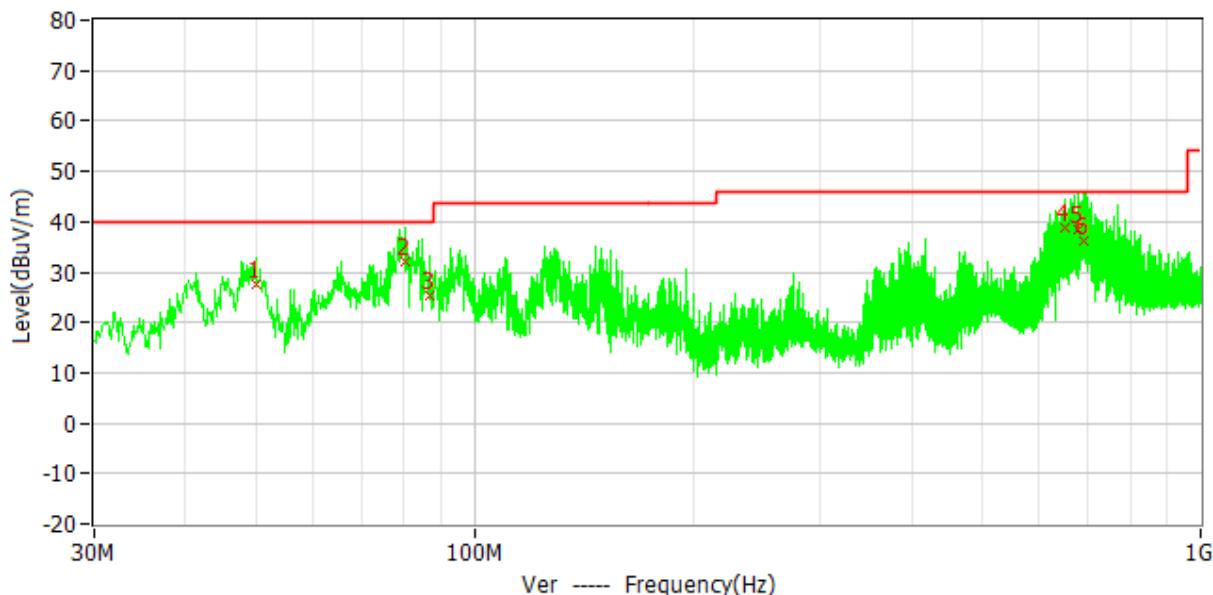
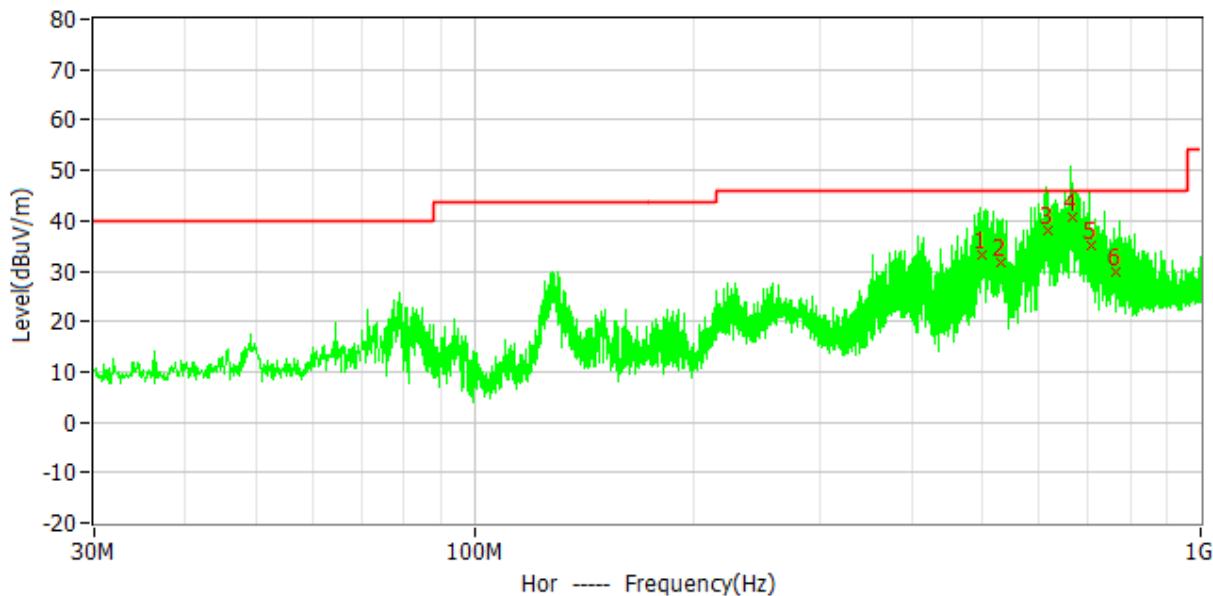
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz, and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz, and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or $3 \times RBW$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated, and the worst-case emissions are reported.

TEST REPORT**7.3 Test Configuration****For radiated emission below 30MHz:****For radiated emission 30MHz to 1GHz:**

TEST REPORT**For radiated emission above 1GHz:**

TEST REPORT**7.4 Test Results of Radiated Emissions**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported. The worst waveform from 30MHz to 1000MHz is listed as below:

Test Curve (30MHz to 1GHz):

TEST REPORT
Test Data:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Original Receiver Reading dBuV	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB/m)	Detector
H	499.348	33.20	12.60	20.60	46.00	12.80	QP
	531.664	31.80	10.60	21.20	46.00	14.20	QP
	617.401	38.20	15.30	22.90	46.00	7.80	QP
	664.431	40.50	16.90	23.60	46.00	5.50	QP
	705.777	35.00	10.80	24.20	46.00	11.00	QP
	763.739	29.90	4.70	25.20	46.00	16.10	QP
V	50.187	27.50	13.00	14.50	40.00	12.50	QP
	80.273	32.20	22.00	10.20	40.00	7.80	QP
	86.656	25.50	16.10	9.40	40.00	14.50	QP
	650.315	38.80	15.40	23.40	46.00	7.20	QP
	678.200	38.40	14.60	23.80	46.00	7.60	QP
	690.359	36.30	12.30	24.00	46.00	9.70	QP

Remark:

1. *Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.*
2. *Corrected Reading = Original Receiver Reading + Correct Factor*
3. *Margin = Limit - Corrected Reading*
4. *If the PK Corrected Reading is lower than AV limit, the AV test can be elided.*

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB, Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, Limit = 40.00dBuV/m.
Then Correct Factor = 30.20 + 2.00 - 32.00 = 0.20dB/m.
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m.
Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

TEST REPORT
Test Result Above 1GHz:

The emission was conducted from 1GHz to 25GHz.

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	31.70	46.50	74.00	27.50	PK
	V	2390.00	31.70	46.20	74.00	27.80	PK
	H	4804.00	-15.10	34.20	74.00	39.80	PK
	V	4804.00	-15.10	34.80	74.00	39.20	PK
M	H	4880.00	-15.00	34.90	74.00	39.10	PK
	V	4880.00	-15.00	34.50	74.00	39.50	PK
H	H	2483.50	31.90	45.10	74.00	28.90	PK
	V	2483.50	31.90	44.60	74.00	29.40	PK
	H	4960.00	-14.90	34.70	74.00	39.30	PK
	V	4960.00	-14.90	35.30	74.00	38.70	PK

Remark: 1. *Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.*
 2. *Corrected Reading = Original Receiver Reading + Correct Factor*
 3. *Margin = Limit - Corrected Reading*
 4. *If the PK Corrected Reading is lower than AV limit, the AV test can be elided.*

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

*Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.*

Then Correct Factor = 30.20 + 2.00 - 32.00 = 0.20dB/m.

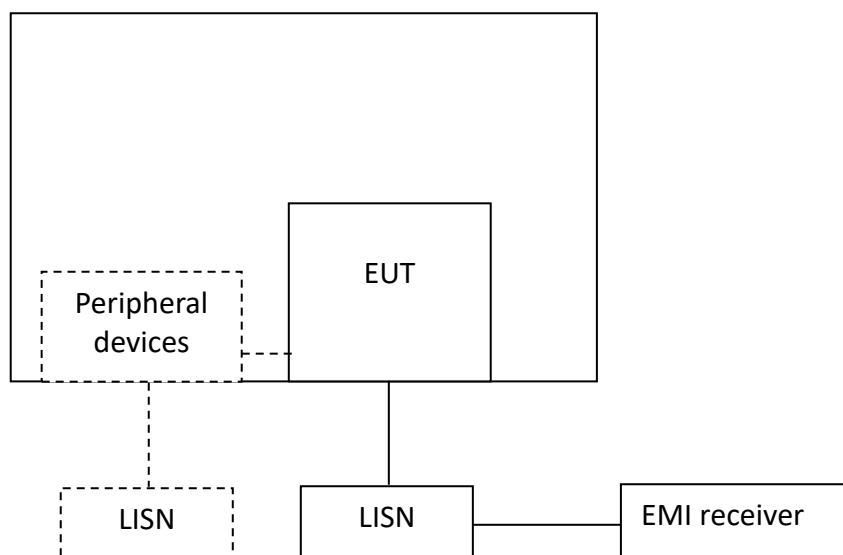
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m.

Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

TEST REPORT**8 Power Line Conducted Emission****Test Result: Pass****8.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

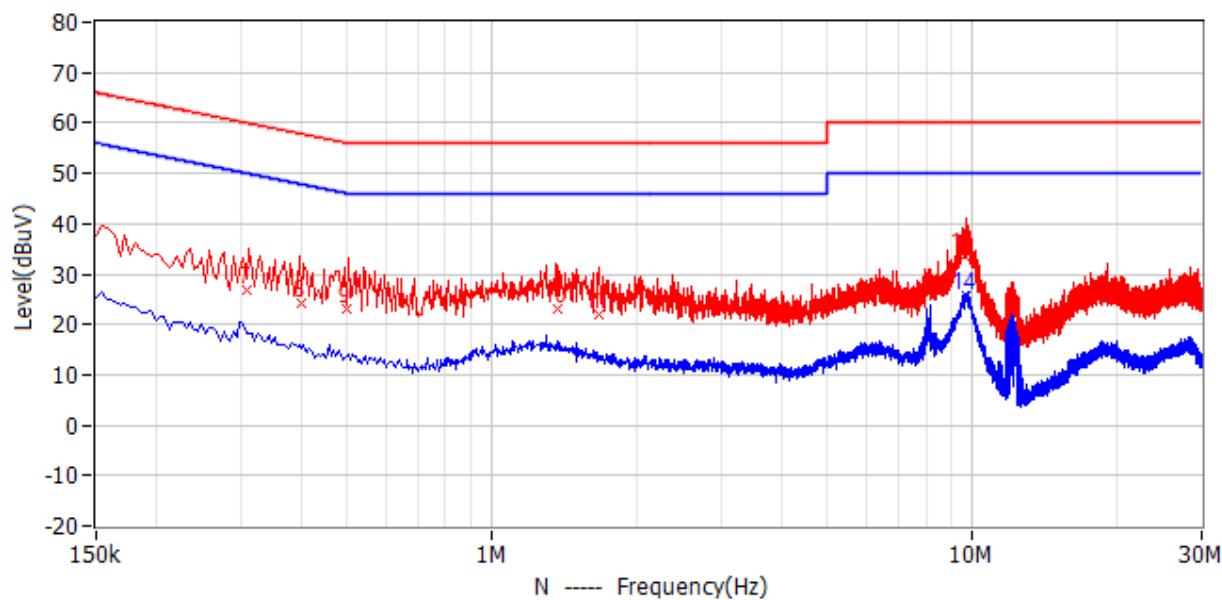
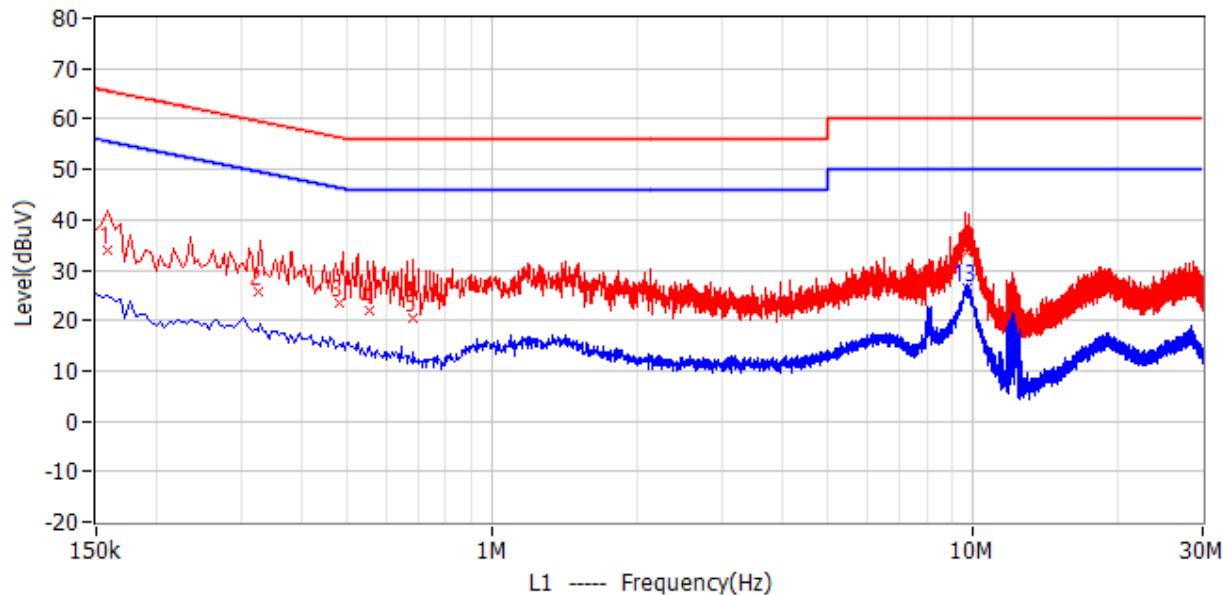
8.2 Test Configuration

TEST REPORT**8.3 Measurement Procedure**

Measured levels of ac powerline conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT**8.4 Test Results of Power Line Conducted Emission****Test Voltage: 120V AC / 60 Hz****Test Curve:**

TEST REPORT**Test Data:**

Frequency	Limit (dBuV)	Corrected Reading (dBuV)	Margin (dB)	Original Receiver Reading (dBuV)	Correct Factor (dB)	Detector	Phase
159.000kHz	65.50	34.10	31.40	27.90	6.20	QP	L1
325.500kHz	59.60	25.70	33.90	19.50	6.20	QP	L1
478.500kHz	56.40	23.50	32.90	17.30	6.20	QP	L1
555.000kHz	56.00	22.00	34.00	15.80	6.20	QP	L1
685.500kHz	56.00	20.50	35.50	14.30	6.20	QP	L1
9.695MHz	60.00	33.60	26.40	27.00	6.60	QP	L1
307.500kHz	60.00	26.70	33.30	20.50	6.20	QP	N
402.000kHz	57.80	24.30	33.50	18.10	6.20	QP	N
496.500kHz	56.10	23.10	33.00	16.90	6.20	QP	N
1.370MHz	56.00	23.20	32.80	17.00	6.20	QP	N
1.671MHz	56.00	21.80	34.20	15.60	6.20	QP	N
9.645MHz	60.00	33.40	26.60	26.80	6.60	QP	N
9.668MHz	50.00	26.40	23.60	19.80	6.60	CAV	L1
9.722MHz	50.00	25.80	24.20	19.20	6.60	CAV	N

Remark:

1. *Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.*
2. *Corrected Reading = Original Receiver Reading + Correct Factor*
3. *Margin = Limit - Corrected Reading*
4. *If the PK Corrected Reading is lower than AV limit, the AV test can be elided.*

TEST REPORT**9 Occupied Bandwidth**

Test Result: **Tested**

9.1 Limit

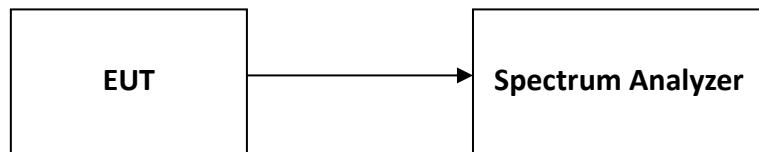
None.

9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration**9.4 The Results of Occupied Bandwidth**

Please refer to Appendix A.

TEST REPORT**10 Antenna Requirement****Requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

TEST REPORT

11 Appendix A: Test Results

11.1 DTS Bandwidth

Test Data

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.660	2401.656	2402.316	0.5	PASS
		2440	0.664	2439.656	2440.320	0.5	PASS
		2480	0.664	2479.648	2480.312	0.5	PASS

Test Plots



TEST REPORT

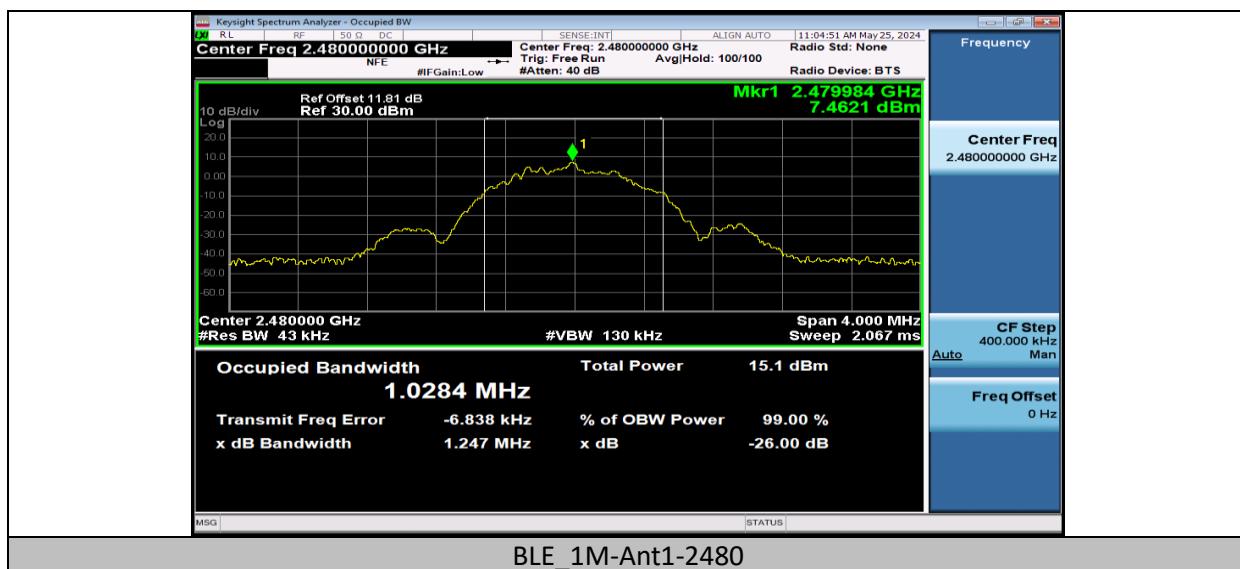


TEST REPORT
11.2 Occupied Channel Bandwidth
Test Data

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.0381	2401.4697	2402.5078	---	---
		2440	1.0367	2439.4702	2440.5069	---	---
		2480	1.0284	2479.4790	2480.5074	---	---

Test Plots


TEST REPORT



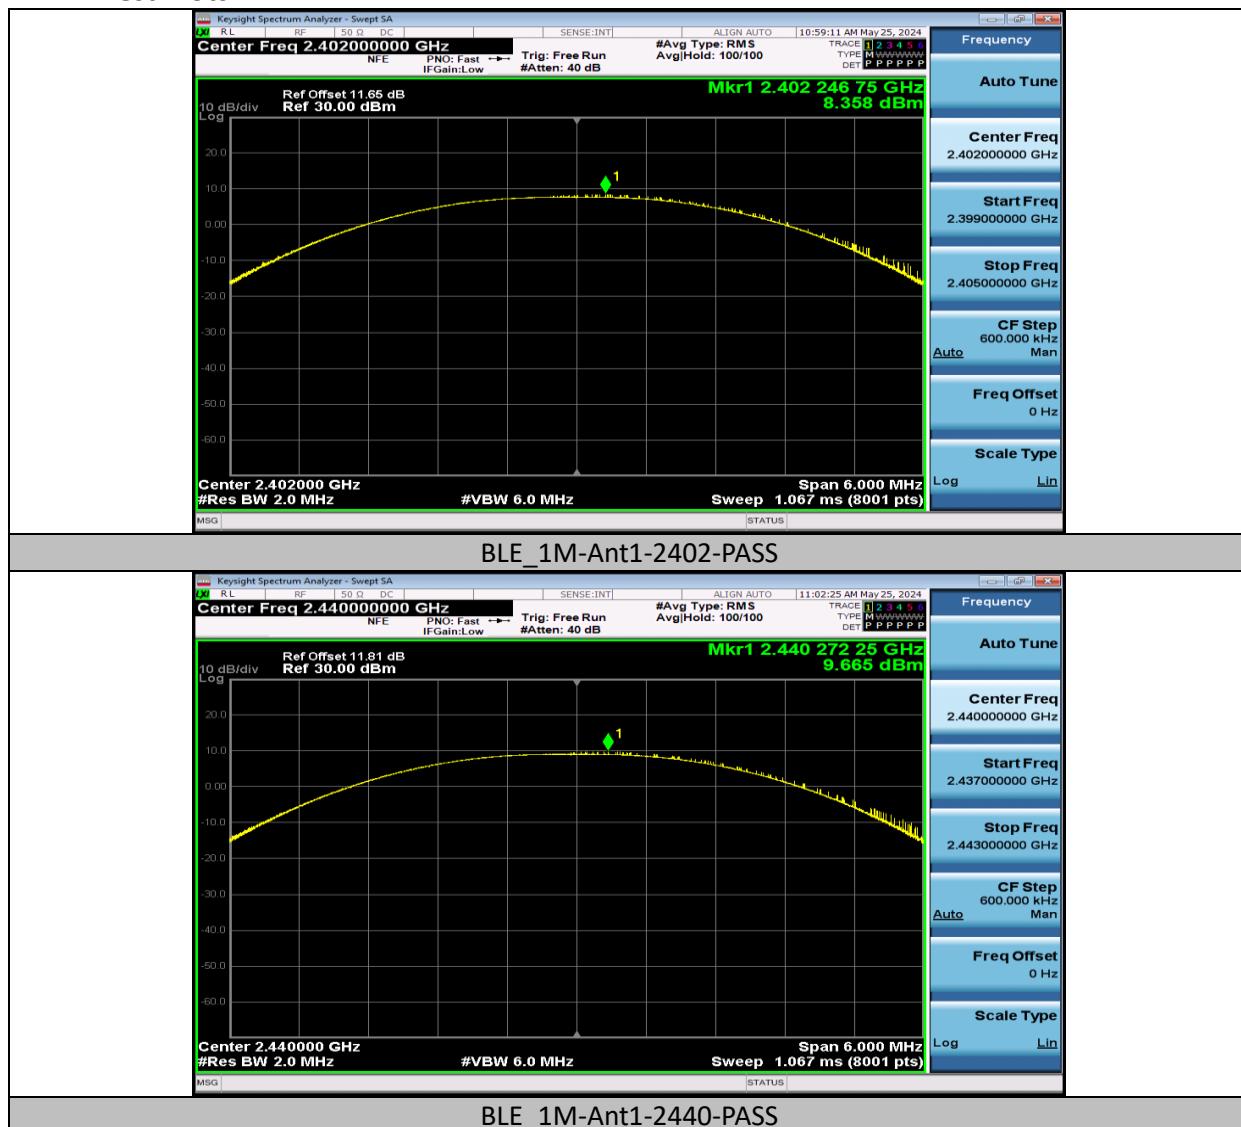
TEST REPORT

11.3 Maximum Conducted Output Power

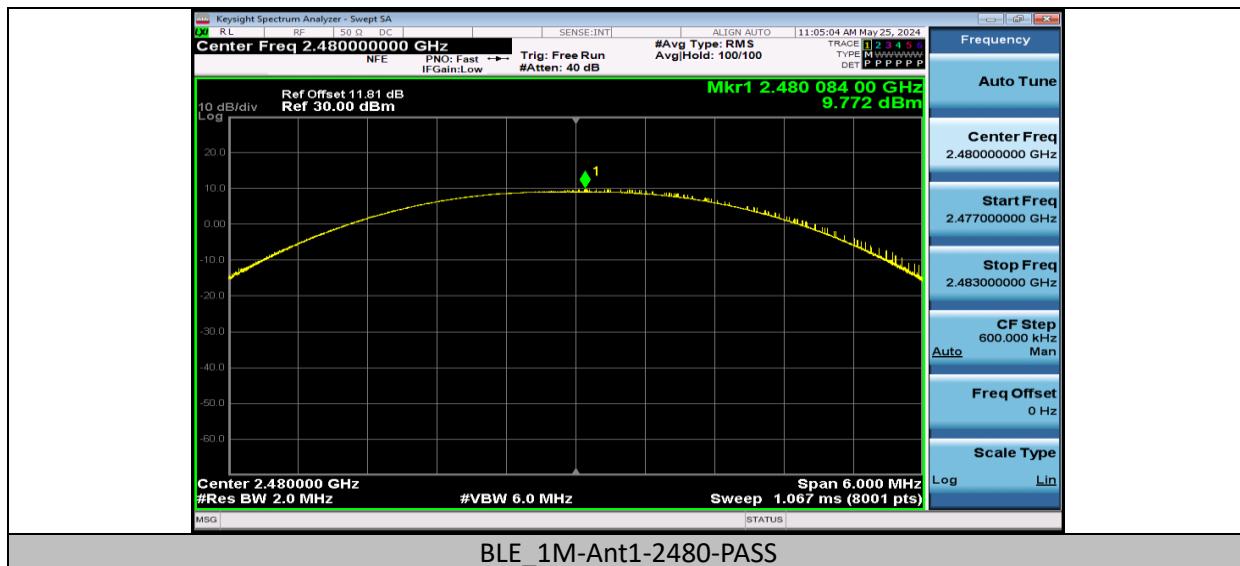
Test Data

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
BLE_1M	Ant1	2402	8.36	≤30	10.36	≤36	PASS
		2440	9.67	≤30	11.67	≤36	PASS
		2480	9.77	≤30	11.77	≤36	PASS

Test Plots

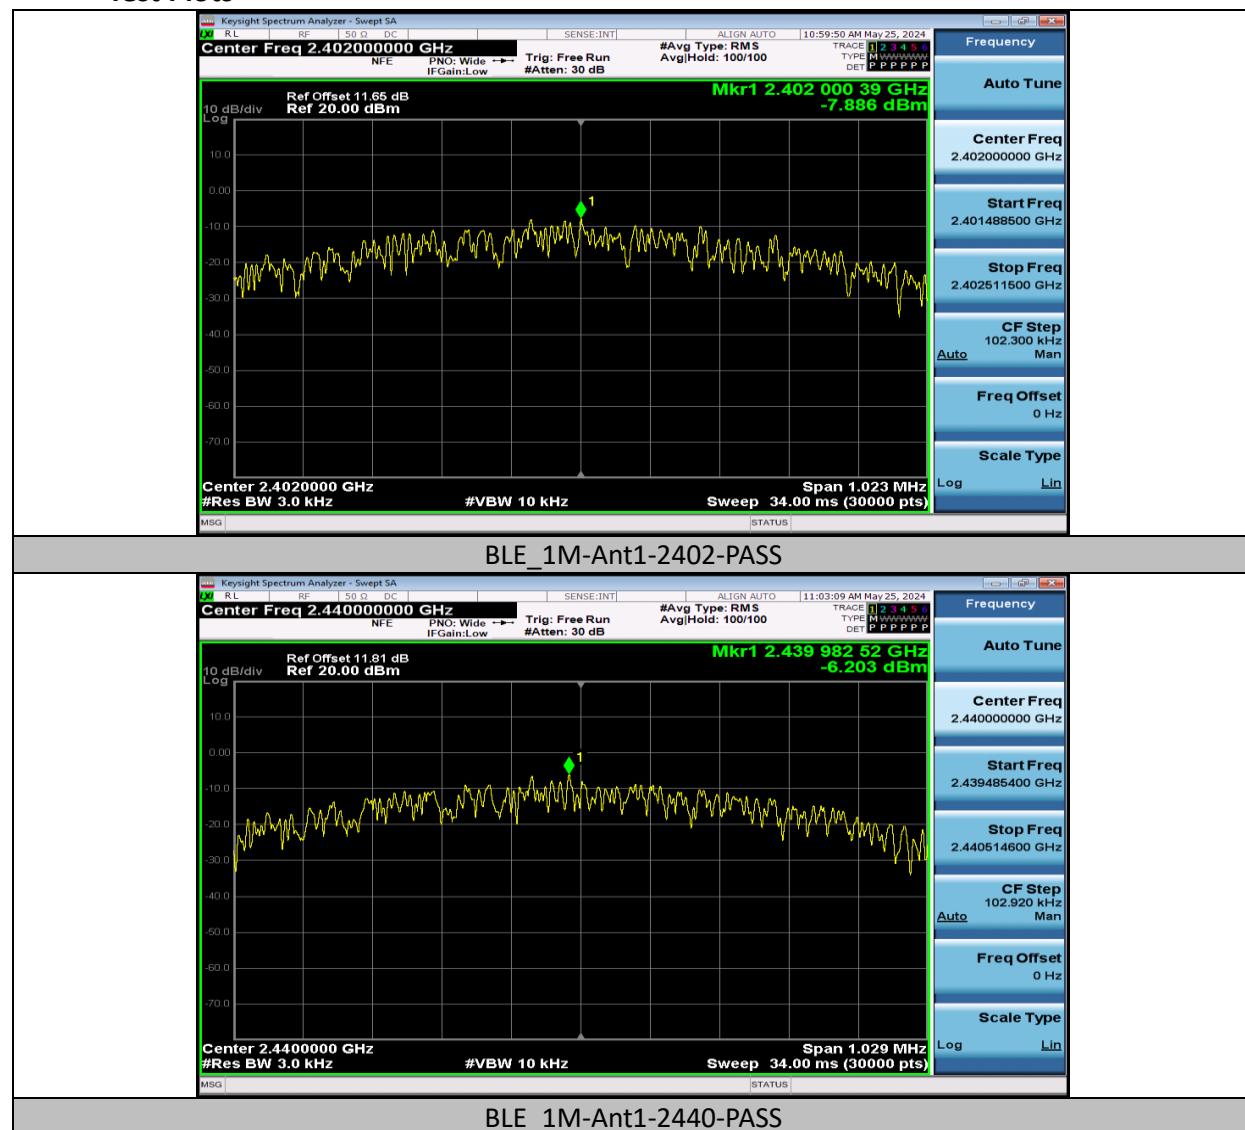


TEST REPORT

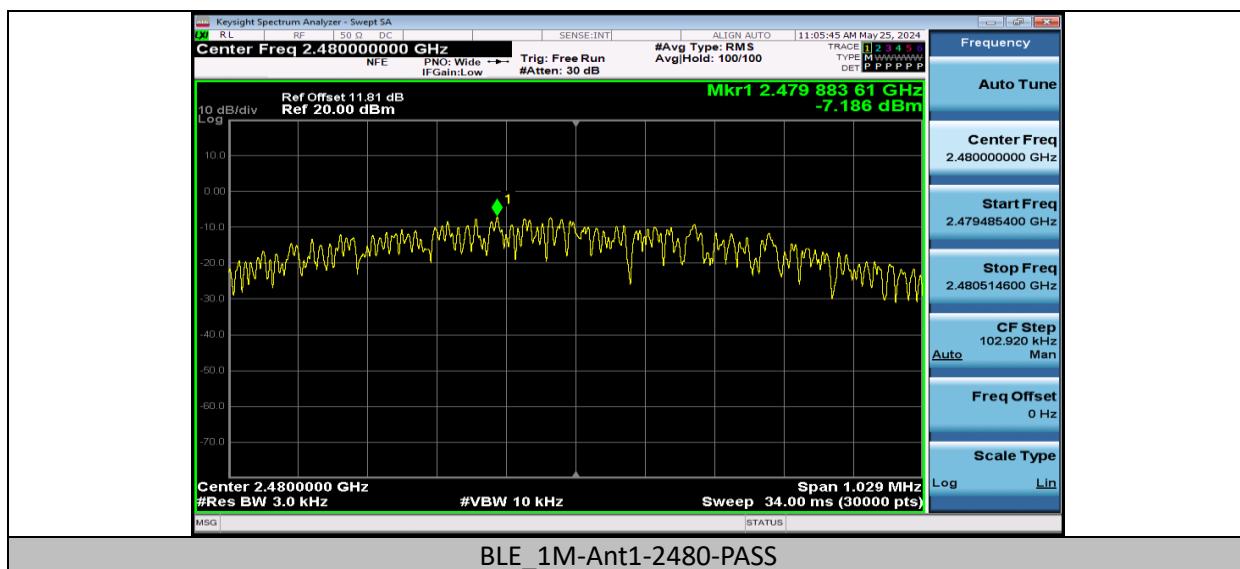


TEST REPORT
11.4 Maximum Power Spectral Density
Test Data

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-7.89	≤8.00	PASS
		2440	-6.20	≤8.00	PASS
		2480	-7.19	≤8.00	PASS

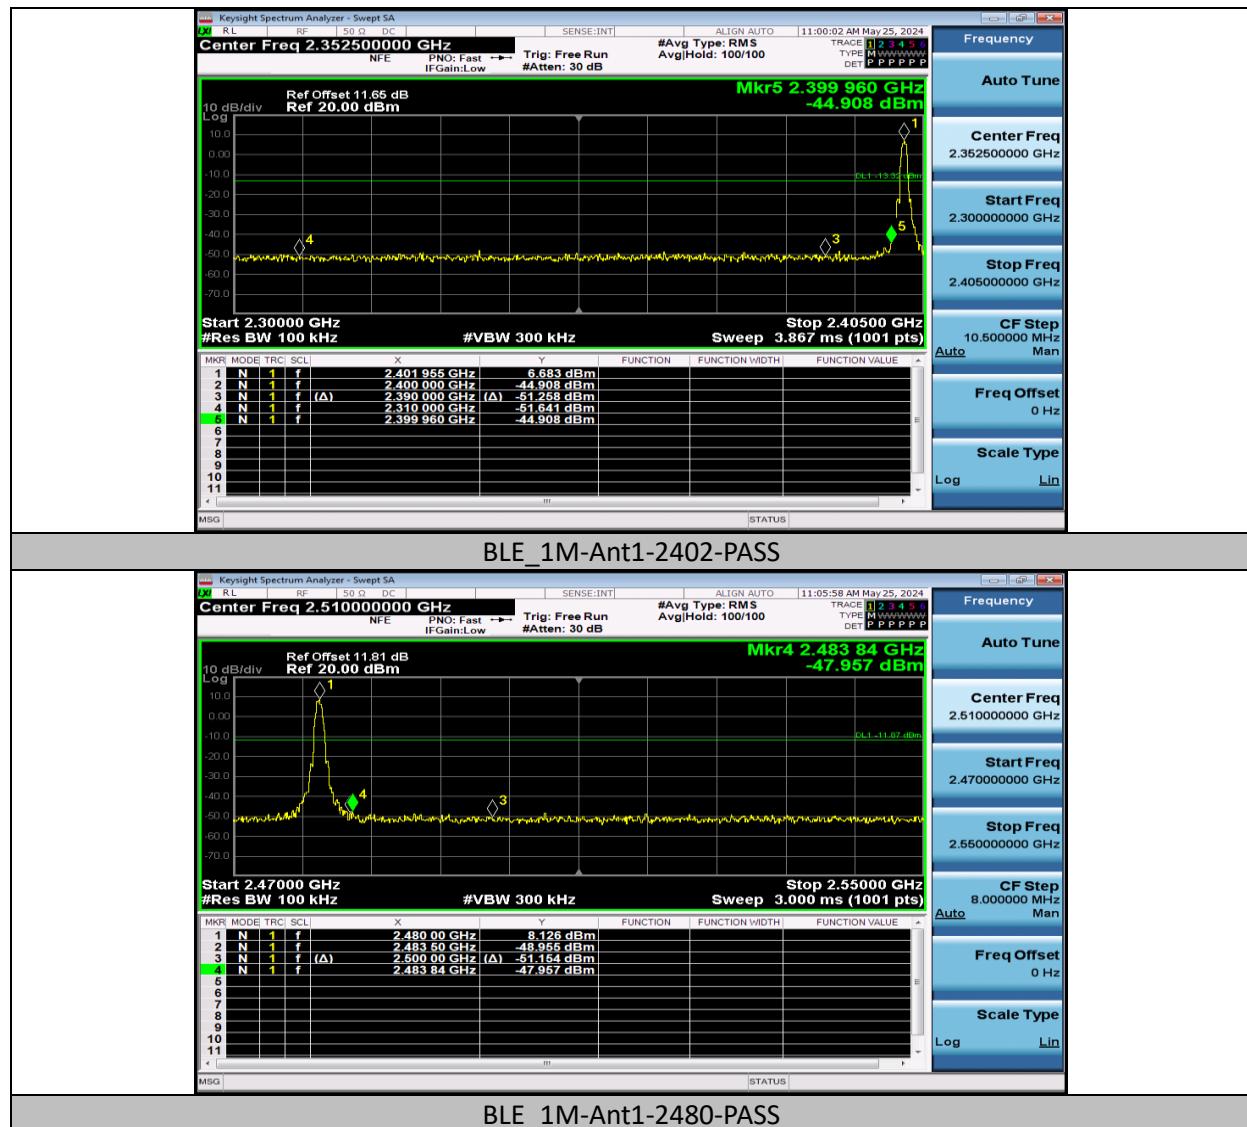
Test Plots


TEST REPORT



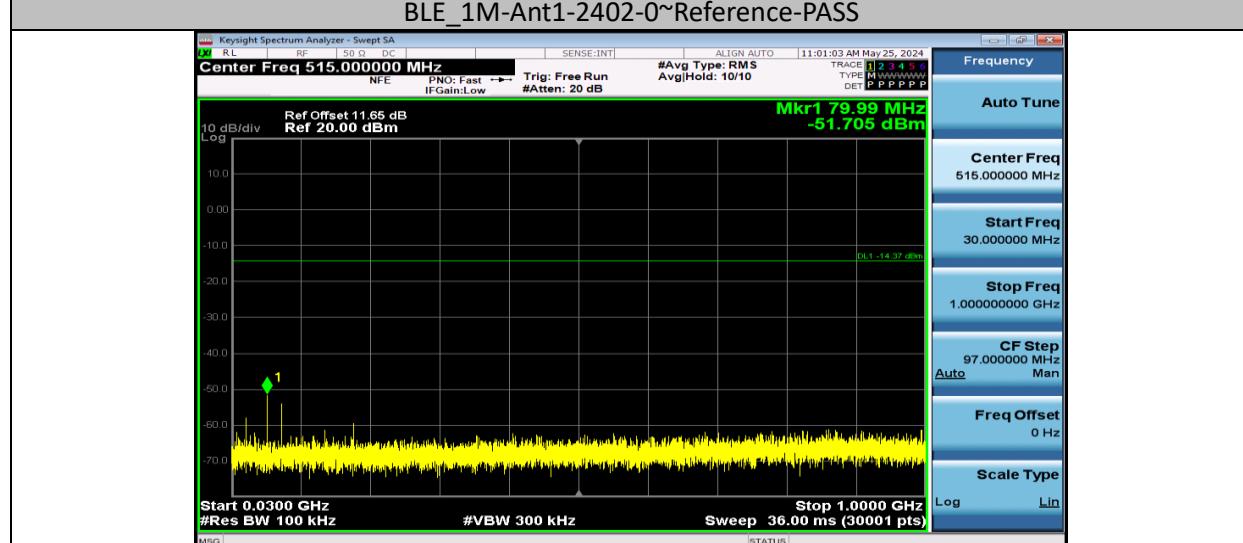
TEST REPORT
11.5 Band Edge Measurements
Test Data

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	6.68	-44.91	≤-13.32	PASS
		High	2480	8.13	-47.96	≤-11.87	PASS

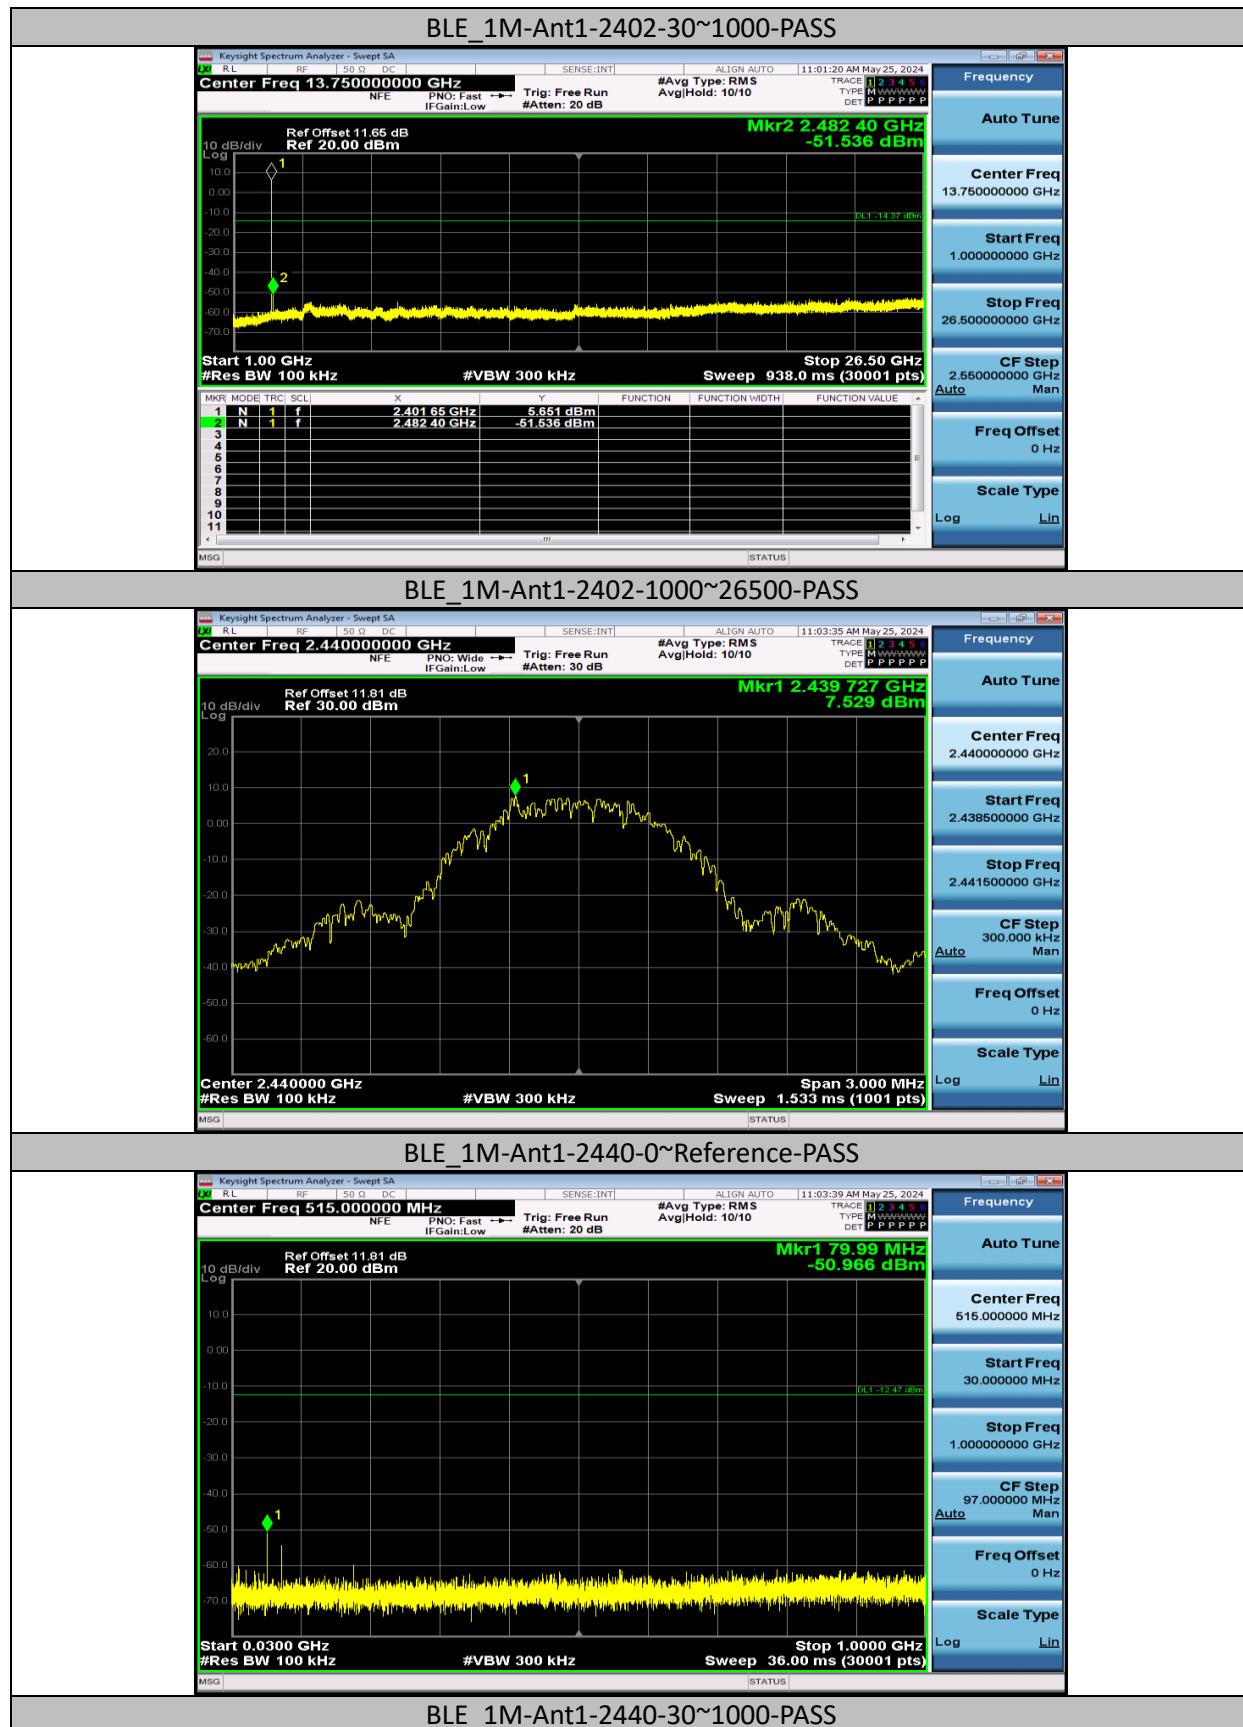
Test Plots


TEST REPORT
11.6 Conducted Spurious Emission
Test Data

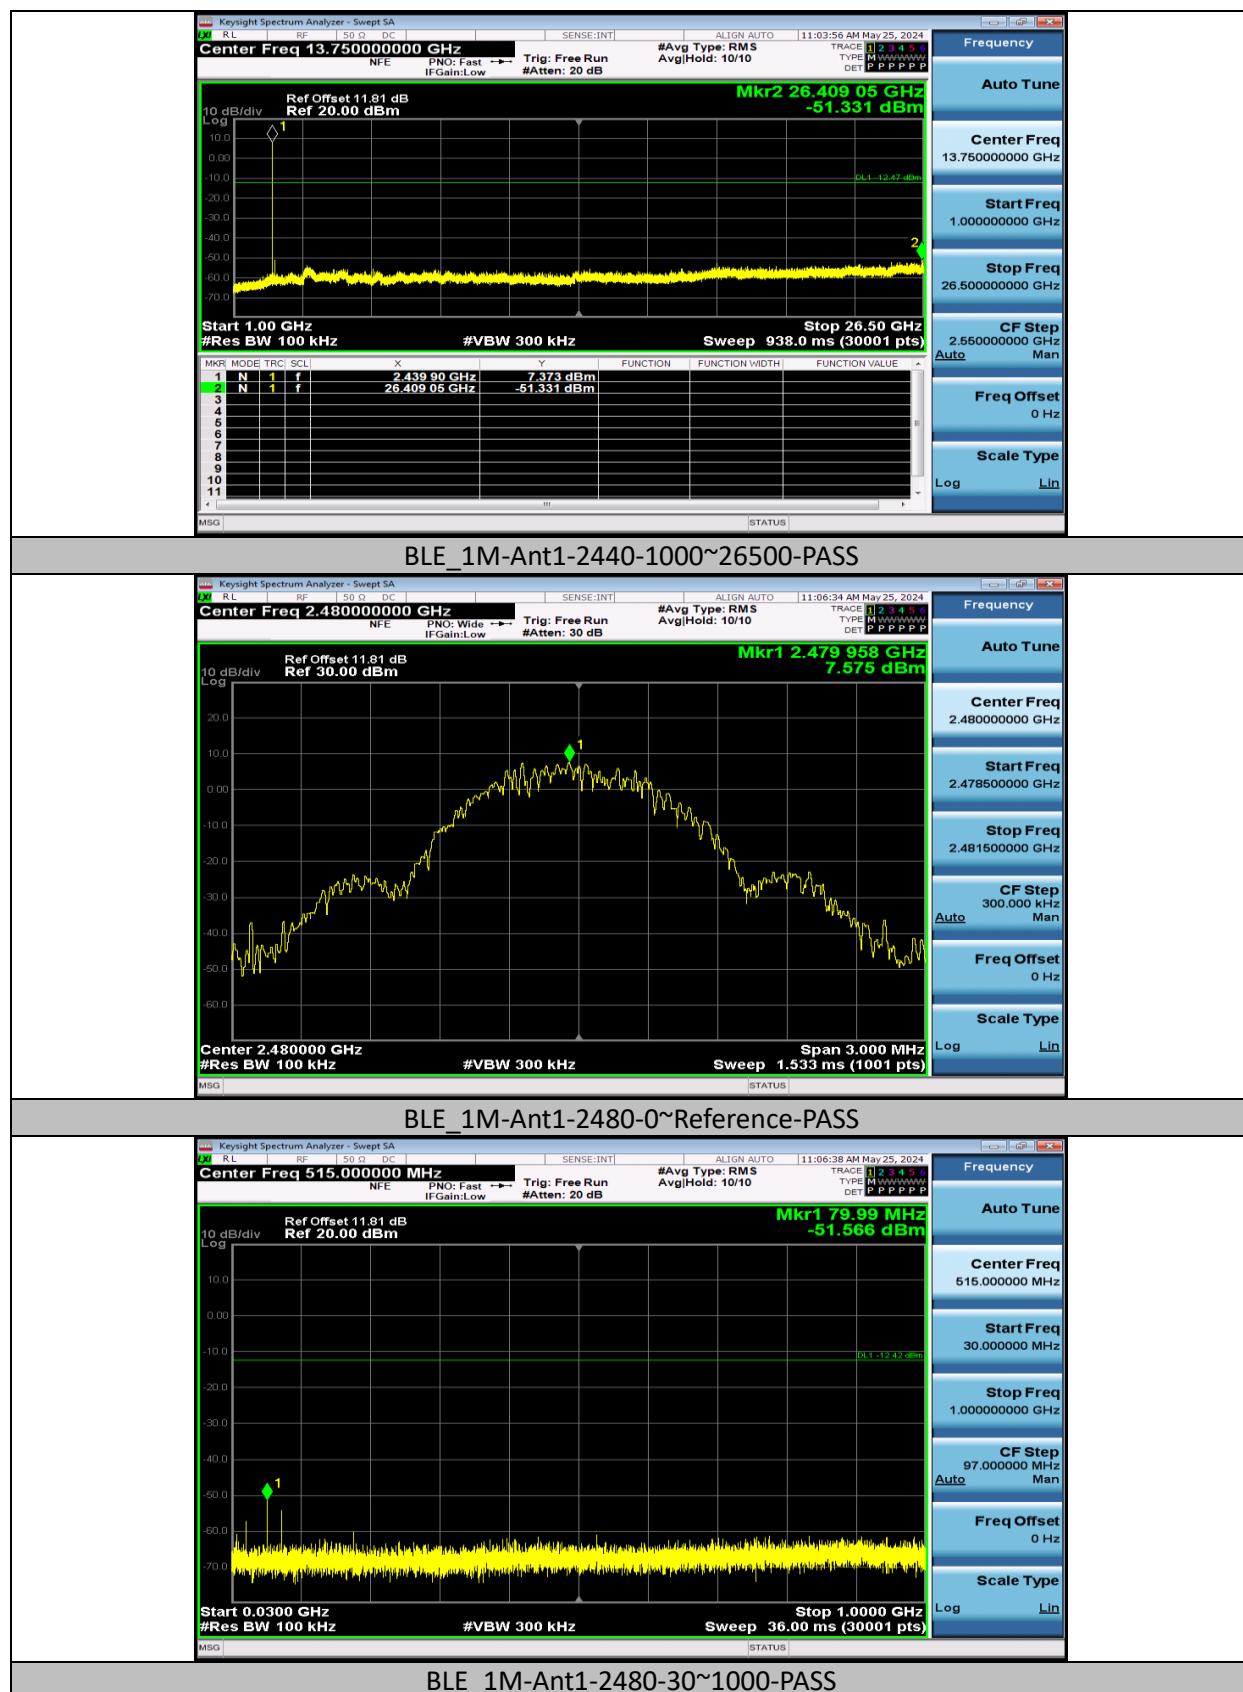
Test Mode	Antenna	Frequency [MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	5.63	5.63	---	PASS
			30~1000	5.63	-51.71	≤-14.37	PASS
			1000~26500	5.63	-51.54	≤-14.37	PASS
		2440	Reference	7.53	7.53	---	PASS
			30~1000	7.53	-50.97	≤-12.47	PASS
			1000~26500	7.53	-51.33	≤-12.47	PASS
		2480	Reference	7.58	7.58	---	PASS
			30~1000	7.58	-51.57	≤-12.42	PASS
			1000~26500	7.58	-52.55	≤-12.42	PASS

Test Plots


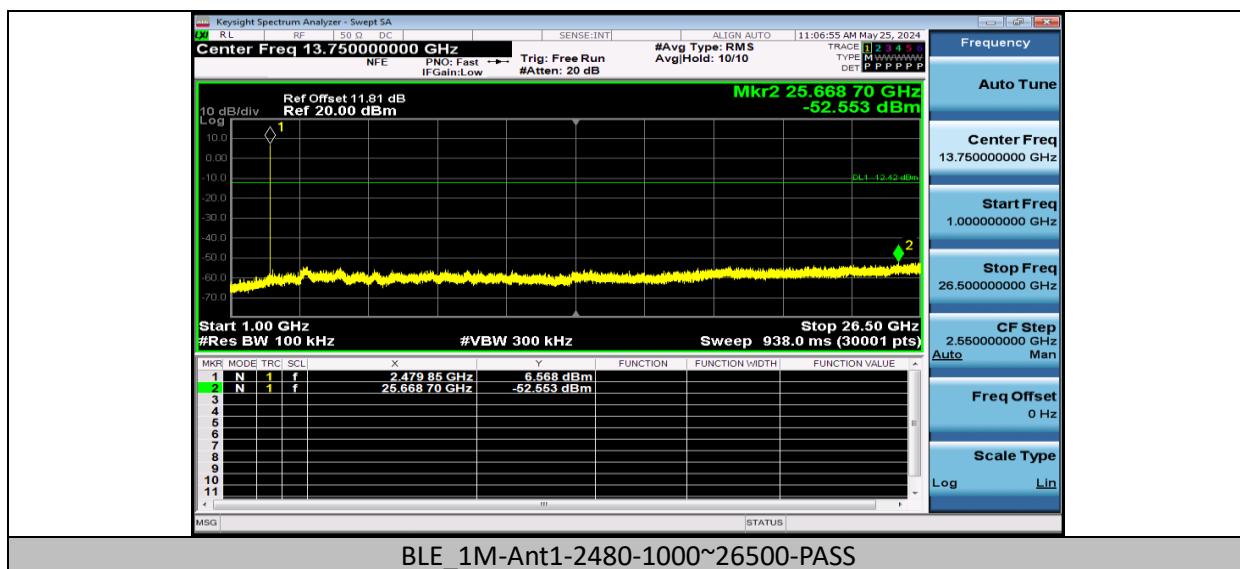
TEST REPORT



TEST REPORT

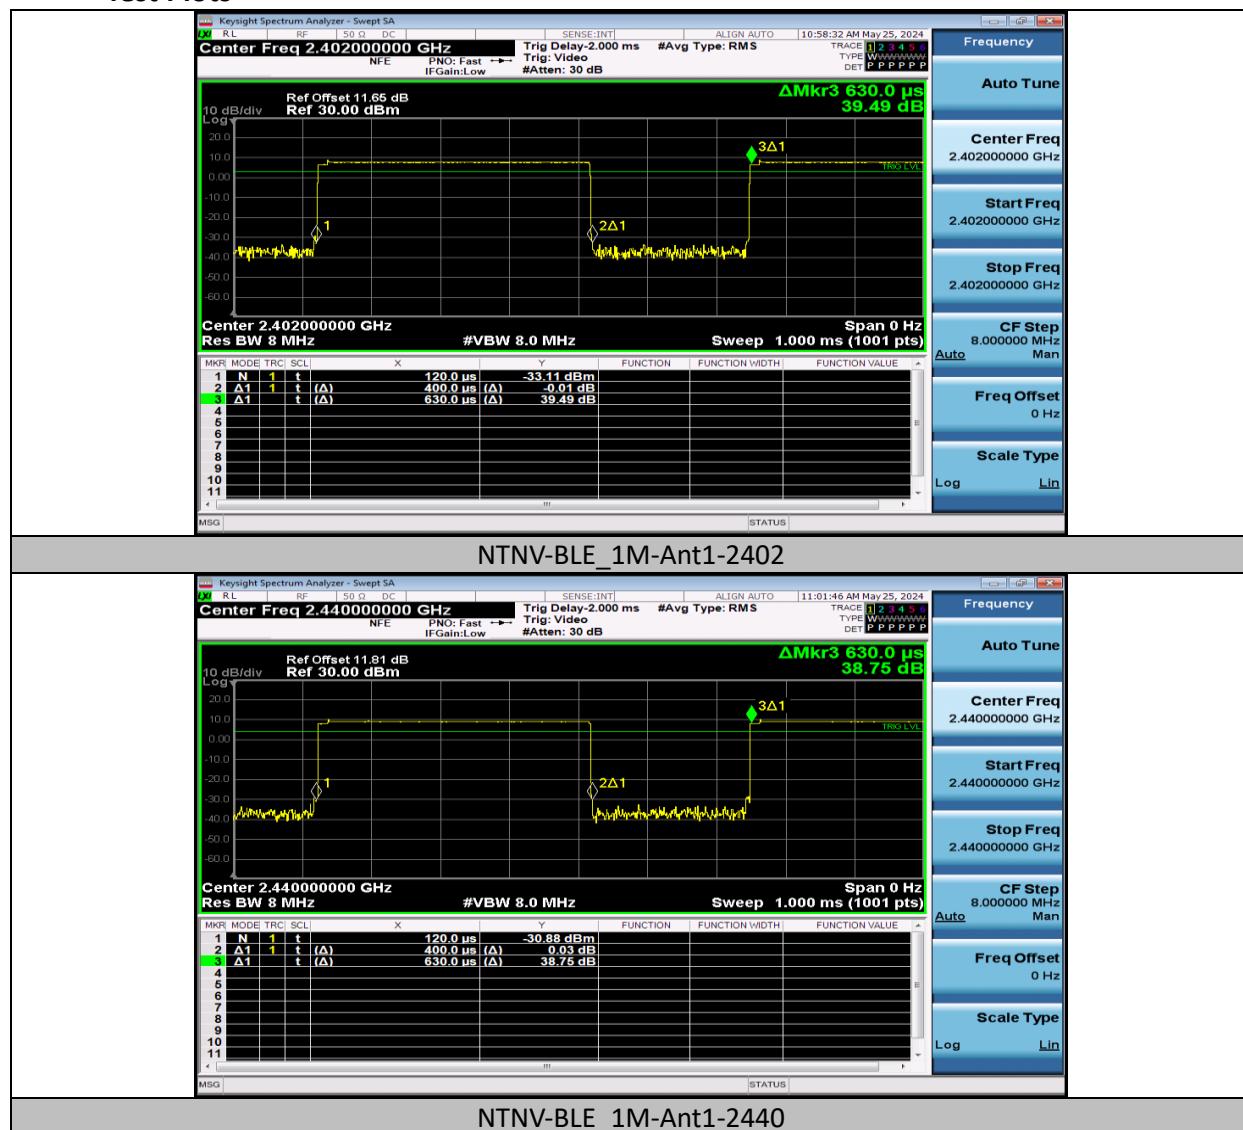


TEST REPORT

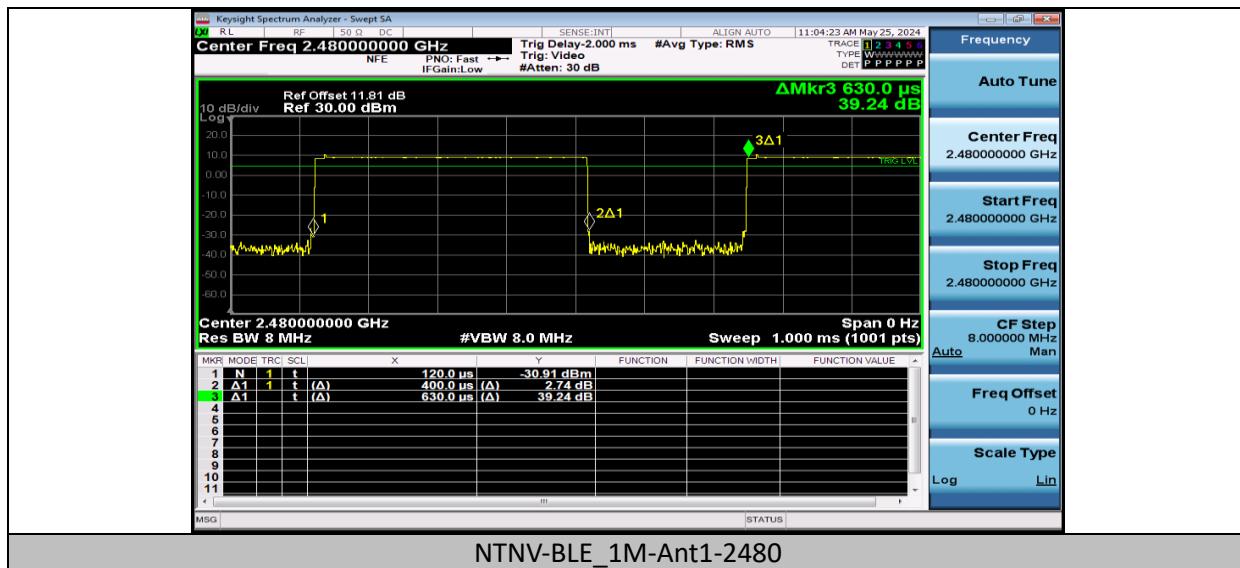


TEST REPORT
11.7 Duty Cycle
Test Data

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.40	0.63	63.49	1.97
		2440	0.40	0.63	63.49	1.97
		2480	0.40	0.63	63.49	1.97

Test Plots


TEST REPORT



***** END *****