

TEST REPORT**Report No.: 24020231HKG-001**

Yoto Ltd.

Application For Original Grant of 47 CFR Part 15 Certification

Single New of RSS-247 Issue 3 Certification

Yoto Player V3

FCC ID: 2AS6W-YP004**IC: 24624-YP004**

This report contains the data of Wi-Fi portion only

Prepared and Checked by:**Approved by:**

Signed on File

Leung Chun Ning, Peter

Assistant Engineer

Wong Cheuk Ho, Herbert

Assistant Manager

Date: October 07, 2024

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT**GENERAL INFORMATION**

Grantee:	Yoto Ltd.
Grantee Address:	124 City Road, London, EC1V 2NX, United Kingdom.
Manufacturer Name:	Victory Telecom (Huizhou) Ltd.
Manufacturer Address:	No. 101 Xintian, Dongya Village, Ruhu Town, Huicheng District, Huizhou City, Guangdong Province, 516021, P. R. China.
FCC Specification Standard:	FCC Part 15, October 1, 2023 Edition
FCC ID:	2AS6W-YP004
FCC Model(s):	YP004
IC Specification Standard:	RSS-247 Issue 3, August 2023 RSS-Gen Issue 5 Amendment 2, February 2021
IC:	24624-YP004
HVIN:	YP004
PMN:	YP004
Type of EUT:	Spread Spectrum Transmitter
Description of EUT:	Yoto Player V3
Brand Name:	Yoto
Sample Receipt Date:	February 06, 2024
Date of Test:	February 06, 2024 to June 19, 2024
Report Date:	October 07, 2024
Environmental Conditions:	Temperature: +10 to 40°C Relative Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-247 Issue 3 Certification.

This report contains the data of Wi-Fi portion only

TEST REPORT**SUMMARY OF TEST RESULT**

Test Items	FCC Part 15 Section	RSS-247 / RSS-Gen [#] Results Section	
Antenna Requirement	15.203	7.1.2 [#]	Complied
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	5.4(4)	Complied
Min. 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Complied
Max. Power Density (Average)	15.247(e)	5.2(2)	Complied
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Complied
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	5.5	Complied
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4 [#]	Complied

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

For all technical data, which can be referred to Annex B – Report cover sheet.

For electronic filing, the Annex B – Report cover sheet is saved with filename: Annex B.pdf.

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2023 Edition

RSS-247 Issue 3, August 2023

RSS-Gen Issue 5 Amendment 2, February 2021

TEST REPORT**TABLE OF CONTENTS**

EXHIBIT 1	GENERAL DESCRIPTION	5
1.1	Product Description.....	5
1.2	Test Methodology	5
1.3	Test Facility.....	6
1.4	Purpose of Report	6
EXHIBIT 2	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	EUT Exercising Software	8
2.3	Description of Accessories.....	9
2.4	Measurement Uncertainty	9
EXHIBIT 3	TEST RESULTS	10
3.1	Maximum Conducted (Peak) Output Power at Antenna Terminals	10
3.2	Minimum 6dB RF Bandwidth.....	12
3.3	Minimum Power Spectral Density	13
3.4	Out of Band Conducted Emissions	14
3.5	Field Strength Calculation	16
3.6	Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	17
3.7	Transmitter Duty Cycle Calculation	32
3.8	AC Power Line Conducted Emission	32
EXHIBIT 4	EQUIPMENT LIST	36

TEST REPORT

EXHIBIT 1 GENERAL DESCRIPTION

1.1 Product Description

The Equipment Under Test (EUT) is a Wi-Fi, BT, BLE and RFID Transceiver for an audio player.

For Wi-Fi portion, the Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels and 2422MHz to 2452MHz with 9 channels. For BT Portion, it operates at frequency range of 2402.000 MHz to 2480.000 MHz with 79 channels, the channels are separated with 1MHz spacing. For BLE Portion, it operates at frequency range of 2402.000 MHz to 2480.000 MHz with 40 channels, the channels are separated with 2MHz spacing. For RFID Portion, it operates at a single channel, 13.56MHz.

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 9 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 150Mbps.

Wi-Fi and RFID portions can be functioned simultaneously while BT and BLE portions are disabled when Wi-Fi and RFID portions are functioning and vice versa.

The EUT is powered by 1 x 3.7V Lithium-ion Battery or USB port.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

Peak Antenna Gain: 4.896dBi

The circuit description is saved with filename: descri.pdf.

1.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Justification Section"** of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No. 558074 D01 v05r02 (April 02, 2019) All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 Amendment 2, February 2021.

TEST REPORT**1.3 Test Facility**

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H, CABID is "HKAP01".

1.4 Purpose of Report

This is a performance report of a transceiver (WiFi Portion).

TEST REPORT

EXHIBIT 2 SYSTEM TEST CONFIGURATION

2.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered 3.7VDC (1 x 3.7V Lithium-ion Battery) or USB port during test.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable at 0.8m height from the ground plane for emission testing at or below 1GHz and 1.5m for emission measurements above 1GHz. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

TEST REPORT

2.1 Justification (Cont'd)

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC power line-conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst-case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM.

For simultaneous transmission, both Wi-Fi and RFID portions are also switched on when taking radiated emission for determining worst-case spurious emission.

2.2 EUT Exercising Software

The EUT exercise program (EspRFTestTool v3.6) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

2.3 Description of Accessories

Description	Remark
HP 820G1 Notebook	Provided by Intertek
1.5m USB Type-C Charging Cable	Provided by Applicant

2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

TEST REPORT

EXHIBIT 3 TEST RESULTS

3.1 Maximum Conducted (Peak) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 8.3.2.3 was used.
- The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Peak Antenna Gain = 4.896 dBi (Refer to Test Data1.pdf)

Frequency (MHz)	Output in dBm	Output in mW
Low Channel: 2412 (P.8)	17.1	51.3
Middle Channel: 2437 (P.32)	16.1	40.7
High Channel: 2462 (P.49)	16.8	47.9

IEEE 802.11g (OFDM, 6 Mbps) Peak Antenna Gain = 4.896 dBi (Refer to Test Data2.pdf)

Frequency (MHz)	Output in dBm	Output in mW
Low Channel: 2412 (P.8)	14.4	27.5
Middle Channel: 2437 (P.32)	14.0	25.1
High Channel: 2462 (P.51)	14.9	30.9

IEEE 802.11n (20MHz) (OFDM, MCS0) Peak Antenna Gain = 4.896 dBi (Refer to Test Data3.pdf)

Frequency (MHz)	Output in dBm	Output in mW
Low Channel: 2412 (P.8)	14.4	27.5
Middle Channel: 2437 (P.30)	13.0	20.0
High Channel: 2462 (P.47)	13.8	24.0

IEEE 802.11n (40MHz) (OFDM, MCS0) Peak Antenna Gain = 4.896 dBi (Refer to Test Data4.pdf)

Frequency (MHz)	Output in dBm	Output in mW
Low Channel: 2422 (P.8)	13.1	20.4
Middle Channel: 2437 (P.30)	12.7	18.6
High Channel: 2452 (P.47)	14.2	26.3

TEST REPORT**3.1 Maximum Conducted (Peak) Output Power at Antenna Terminals (Cont'd)**

Cable loss: 0.5 dB External Attenuation: 0 dB

Cable loss, external attenuation: included in OFFSET function
 added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)

Max. Conducted (Peak) Output Level = 17.1 dBm

IEEE 802.11g (OFDM, 6 Mbps)

Max. Conducted (Peak) Output Level = 14.9 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)

Max. Conducted (Peak) Output Level = 14.4 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)

Max. Conducted (Peak) Output Level = 14.2 dBm


Limits:

1W (30dBm) for antennas with gains of 6dBi or less.

TEST REPORT

3.2 Minimum 6dB RF Bandwidth

The figure below shows the test setup, which is utilized to make these measurements.

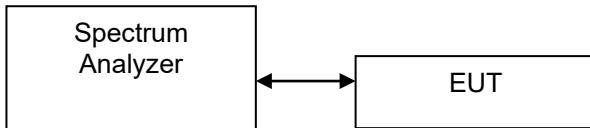

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps) (Refer to Test Data1.pdf)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412 (P.3)	9.7
Middle Channel: 2437 (P.30)	9.6
High Channel: 2462 (P.47)	9.7

IEEE 802.11g (OFDM, 6 Mbps) (Refer to Test Data2.pdf)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412 (P.3)	16.6
Middle Channel: 2437 (P.30)	16.6
High Channel: 2462 (P.49)	16.6

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data3.pdf)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412 (P.3)	17.6
Middle Channel: 2437 (P.28)	17.7
High Channel: 2462 (P.45)	17.5

IEEE 802.11n (40MHz) (OFDM, MCS0) (Refer to Test Data4.pdf)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2422 (P.3)	34.3
Middle Channel: 2437 (P.28)	33.3
High Channel: 2452 (P.45)	33.9


Limits:

6dB bandwidth shall be at least 500kHz.

TEST REPORT

3.3 Minimum Power Spectral Density

The figure below shows the test setup, which is utilized to make these measurements.

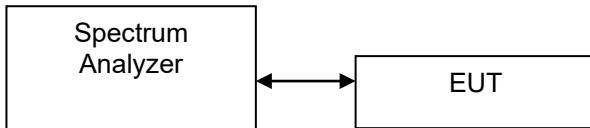

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps) (Refer to Test Data1.pdf)

Frequency (MHz)	PSD (dBm)
Low Channel: 2412 (P.9)	-6.170 (RBW=3k)
Middle Channel: 2437 (P.33)	7.609 (RBW=100k)
High Channel: 2462 (P.50)	7.367 (RBW=100k)

IEEE 802.11g (OFDM, 6 Mbps) (Refer to Test Data2.pdf)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412 (P.9)	0.154
Middle Channel: 2437 (P.33)	-0.313
High Channel: 2462 (P.52)	0.779

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data3.pdf)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412 (P.9)	0.792
Middle Channel: 2437 (P.31)	-1.001
High Channel: 2462 (P.48)	-0.125

IEEE 802.11n (40MHz) (OFDM, MCS0) (Refer to Test Data4.pdf)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2422 (P.9)	-3.976
Middle Channel: 2437 (P.31)	-3.767
High Channel: 2452 (P.48)	-2.896


Cable Loss: 0.5dB

Limit: 8dBm in 3kHz

TEST REPORT

3.4 Out of Band Conducted Emissions

The figure below shows the test setup, which is utilized to make these measurements.

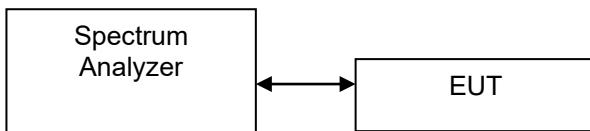

For IEEE 802.11b/g/n20MHz/n40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for IEEE 802.11b/g/n20MHz/n40MHz.

The measurement procedures under sections 11 of KDB558074 D01 v05r02 (April 2, 2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the maximum measured in-band peak PSD level for IEEE 802.11b/g/n20MHz/n40MHz.

IEEE 802.11b (DSSS, 1 Mbps) (Refer to Test Data1.pdf)

Frequency (MHz)	Out of Band Conducted Emissions	Band Edge
Low Channel: 2412	P.19	P.13
Middle Channel: 2437	P.36	N/A
High Channel: 2462	P.58	P.52

IEEE 802.11g (OFDM, 6 Mbps) (Refer to Test Data2.pdf)

Frequency (MHz)	Out of Band Conducted Emissions	Band Edge
Low Channel: 2412	P.17	P.11
Middle Channel: 2437	P.36	N/A
High Channel: 2462	P.60	P.54

TEST REPORT

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data3.pdf)

Frequency (MHz)	Out of Band Conducted Emissions	Band Edge
Low Channel: 2412	P.17	P.11
Middle Channel: 2437	P.34	N/A
High Channel: 2462	P.56	P.50

IEEE 802.11n (40MHz) (OFDM, MCS0) (Refer to Test Data4.pdf)

Frequency (MHz)	Out of Band Conducted Emissions	Band Edge
Low Channel: 2422	P.17	P.11
Middle Channel: 2437	P.34	N/A
High Channel: 2452	P.56	P.50

TEST REPORT

3.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$
 RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflects the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example:

Assume a receiver reading of 62.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ is converted to its corresponding level in $\mu\text{V}/\text{m}$.

RA = 62.0 $\text{dB}\mu\text{V}$
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10.0 dB
FS = $62.0 + 7.4 + 1.6 - 29.0 + 0.0 + -10.0 = 32.0 \text{ dB}\mu\text{V}/\text{m}$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

TEST REPORT

3.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

3.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission at 2483.5MHz and 4824MHz.

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: Setup Photos.pdf.

3.6.2 Radiated Emission Data



The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement – Passed by 3.0 dB margin

TEST REPORT

3.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

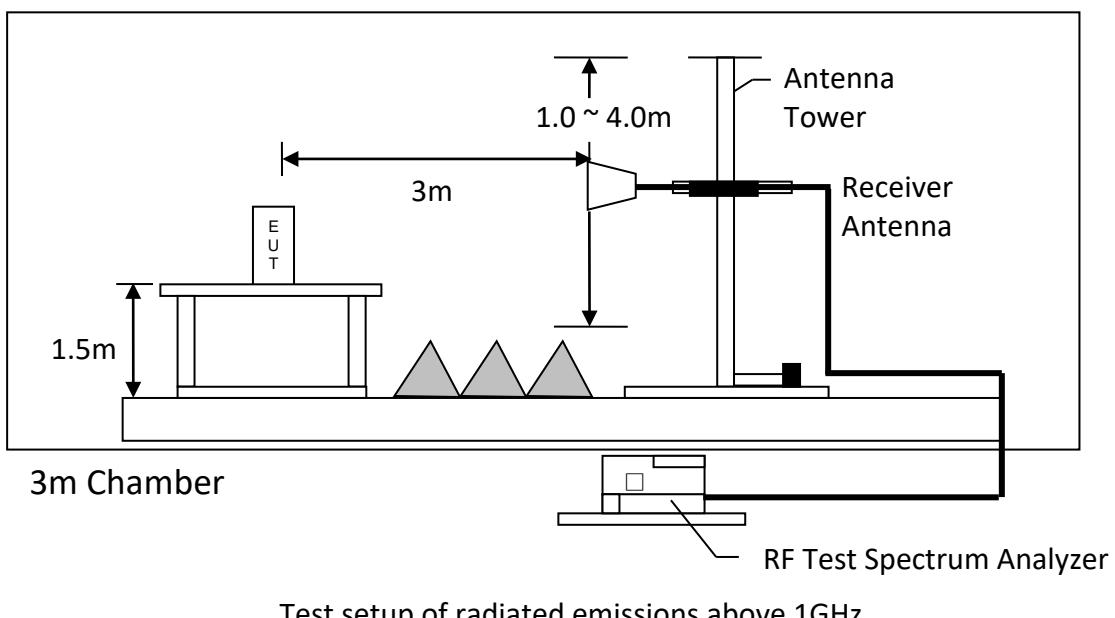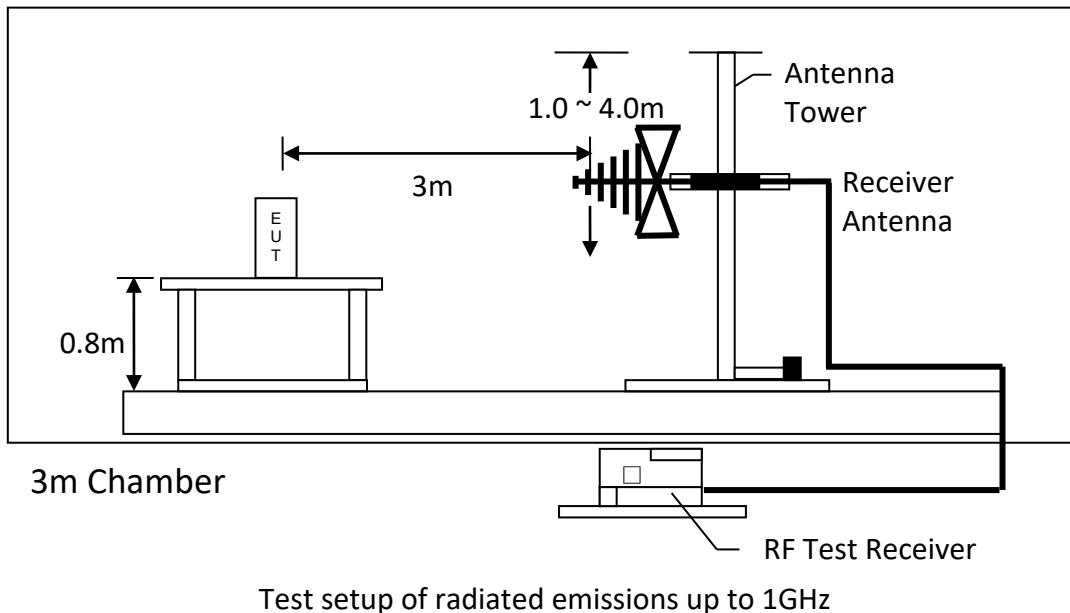

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 1, IEEE 802.11b DSSS 1Mbps

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	44.5	33	29.4	40.9	54.0	-13.1
V	4824.000	49.1	33	34.9	51.0	54.0	-3.0
V	7236.000	34.1	33	37.9	39.0	54.0	-15.0
H	9648.000	31.5	33	40.4	38.9	54.0	-15.1
V	12060.000	31.0	33	40.5	38.5	54.0	-15.5
H	14472.000	34.5	33	40.0	41.5	54.0	-12.5

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	57.9	33	29.4	54.3	74.0	-19.7
V	4824.000	54.5	33	34.9	56.4	74.0	-17.6
V	7236.000	45.1	33	37.9	50.0	74.0	-24.0
H	9648.000	42.0	33	40.4	49.4	74.0	-24.6
V	12060.000	43.3	33	40.5	50.8	74.0	-23.2
H	14472.000	47.8	33	40.0	54.8	74.0	-19.2

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 06

Table 2, IEEE 802.11b DSSS 1Mbps

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	4874.000	43.7	33	34.9	45.6	54.0	-8.4
H	7311.000	30.8	33	37.9	35.7	54.0	-18.3
H	9748.000	31.3	33	40.4	38.7	54.0	-15.3
H	12185.000	30.0	33	40.5	37.5	54.0	-16.5
H	14622.000	35.6	33	38.4	41.0	54.0	-13.0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	4874.000	50.9	33	34.9	52.8	74.0	-21.2
H	7311.000	43.9	33	37.9	48.8	74.0	-25.2
H	9748.000	43.2	33	40.4	50.6	74.0	-23.4
H	12185.000	43.2	33	40.5	50.7	74.0	-23.3
H	14622.000	49.4	33	38.4	54.8	74.0	-19.2

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 11

Table 3, IEEE 802.11b DSSS 1Mbps

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	46.4	33	29.4	42.8	54.0	-11.2
V	4924.000	46.6	33	34.9	48.5	54.0	-5.5
H	7386.000	30.3	33	37.9	35.2	54.0	-18.8
V	9848.000	29.0	33	40.4	36.4	54.0	-17.6
V	12310.000	30.4	33	40.5	37.9	54.0	-16.1
V	14772.000	35.1	33	38.4	40.5	54.0	-13.5

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	59.4	33	29.4	55.8	74.0	-18.2
V	4924.000	52.6	33	34.9	54.5	74.0	-19.5
H	7386.000	43.1	33	37.9	48.0	74.0	-26.0
V	9848.000	42.3	33	40.4	49.7	74.0	-24.3
V	12310.000	43.5	33	40.5	51.0	74.0	-23.0
V	14772.000	48.3	33	38.4	53.7	74.0	-20.3

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 4, IEEE 802.11g OFDM, 6 Mbps

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2390.000	47.3	33	29.4	43.7	54.0	-10.3
V	4824.000	36.5	33	34.9	38.4	54.0	-15.6
V	7236.000	30.2	33	37.9	35.1	54.0	-18.9
H	9648.000	31.1	33	40.4	38.5	54.0	-15.5
H	12060.000	33.2	33	40.5	40.7	54.0	-13.3
V	14472.000	39.0	33	40.0	46.0	54.0	-8.0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2390.000	66.6	33	29.4	63.0	74.0	-11.0
V	4824.000	49.2	33	34.9	51.1	74.0	-22.9
V	7236.000	45.1	33	37.9	50.0	74.0	-24.0
H	9648.000	36.7	33	40.4	44.1	74.0	-29.9
H	12060.000	39.8	33	40.5	47.3	74.0	-26.7
V	14472.000	44.5	33	40.0	51.5	74.0	-22.5

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 06

Table 5, IEEE 802.11g OFDM, 6 Mbps

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	4874.000	35.0	33	34.9	36.9	54.0	-17.1
H	7311.000	28.4	33	37.9	33.3	54.0	-20.7
H	9748.000	31.8	33	40.4	39.2	54.0	-14.8
V	12185.000	34.8	33	40.5	42.3	54.0	-11.7
V	14622.000	40.1	33	38.4	45.5	54.0	-8.5

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	4874.000	49.2	33	34.9	51.1	74.0	-22.9
H	7311.000	41.9	33	37.9	46.8	74.0	-27.2
H	9748.000	37.9	33	40.4	45.3	74.0	-28.7
V	12185.000	40.3	33	40.5	47.8	74.0	-26.2
V	14622.000	45.9	33	38.4	51.3	74.0	-22.7

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 11

Table 6, IEEE 802.11g OFDM, 6 Mbps

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	54.6	33	29.4	51.0	54.0	-3.0
H	4924.000	37.3	33	34.9	39.2	54.0	-14.8
H	7386.000	30.0	33	37.9	34.9	54.0	-19.1
V	9848.000	30.6	33	40.4	38.0	54.0	-16.0
V	12310.000	35.0	33	40.5	42.5	54.0	-11.5
V	14772.000	38.4	33	38.4	43.8	54.0	-10.2

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	73.7	33	29.4	70.1	74.0	-3.9
H	4924.000	49.4	33	34.9	51.3	74.0	-22.7
H	7386.000	45.2	33	37.9	50.1	74.0	-23.9
V	9848.000	36.7	33	40.4	44.1	74.0	-29.9
V	12310.000	40.5	33	40.5	48.0	74.0	-26.0
V	14772.000	44.5	33	38.4	49.9	74.0	-24.1

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 7, IEEE 802.11n (20MHz) OFDM, MCS0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	47.1	33	29.4	43.5	54.0	-10.5
H	4824.000	33.5	33	34.9	35.4	54.0	-18.6
V	7236.000	28.9	33	37.9	33.8	54.0	-20.2
V	9648.000	31.2	33	40.4	38.6	54.0	-15.4
H	12060.000	34.6	33	40.5	42.1	54.0	-11.9
V	14472.000	37.4	33	40.0	44.4	54.0	-9.6

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	69.2	33	29.4	65.6	74.0	-8.4
H	4824.000	47.9	33	34.9	49.8	74.0	-24.2
V	7236.000	43.3	33	37.9	48.2	74.0	-25.8
V	9648.000	37.3	33	40.4	44.7	74.0	-29.3
H	12060.000	40.2	33	40.5	47.7	74.0	-26.3
V	14472.000	43.8	33	40.0	50.8	74.0	-23.2

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 06

Table 8, IEEE 802.11n (20MHz) OFDM, MCS0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	4874.000	35.1	33	34.9	37.0	54.0	-17.0
H	7311.000	31.4	33	37.9	36.3	54.0	-17.7
V	9748.000	32.0	33	40.4	39.4	54.0	-14.6
V	12185.000	32.9	33	40.5	40.4	54.0	-13.6
H	14622.000	38.4	33	38.4	43.8	54.0	-10.2

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	4874.000	49.4	33	34.9	51.3	74.0	-22.7
H	7311.000	38.0	33	37.9	42.9	74.0	-31.1
V	9748.000	38.1	33	40.4	45.5	74.0	-28.5
V	12185.000	39.1	33	40.5	46.6	74.0	-27.4
H	14622.000	44.2	33	38.4	49.6	74.0	-24.4

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 11

Table 9, IEEE 802.11n (20MHz) OFDM, MCS0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	53.1	33	29.4	49.5	54.0	-4.5
H	4924.000	37.1	33	34.9	39.0	54.0	-15.0
H	7386.000	31.4	33	37.9	36.3	54.0	-17.7
V	9848.000	32.0	33	40.4	39.4	54.0	-14.6
H	12310.000	33.8	33	40.5	41.3	54.0	-12.7
V	14772.000	37.7	33	38.4	43.1	54.0	-10.9

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	74.2	33	29.4	70.6	74.0	-3.4
H	4924.000	51.7	33	34.9	53.6	74.0	-20.4
H	7386.000	37.3	33	37.9	42.2	74.0	-31.8
V	9848.000	37.7	33	40.4	45.1	74.0	-28.9
H	12310.000	39.6	33	40.5	47.1	74.0	-26.9
V	14772.000	44.3	33	38.4	49.7	74.0	-24.3

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 03

Table 10, IEEE 802.11n (HT40) OFDM, MCS0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	48.0	33	29.4	44.4	54.0	-9.6
H	4844.000	35.4	33	34.9	37.3	54.0	-16.7
H	7266.000	33.7	33	37.9	38.6	54.0	-15.4
V	9688.000	32.7	33	40.4	40.1	54.0	-13.9
H	12110.000	33.3	33	40.5	40.8	54.0	-13.2
H	14532.000	39.7	33	38.4	45.1	54.0	-8.9

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	67.8	33	29.4	64.2	74.0	-9.8
H	4844.000	48.8	33	34.9	50.7	74.0	-23.3
H	7266.000	39.6	33	37.9	44.5	74.0	-29.5
V	9688.000	39.3	33	40.4	46.7	74.0	-27.3
H	12110.000	39.8	33	40.5	47.3	74.0	-26.7
H	14532.000	45.2	33	38.4	50.6	74.0	-23.4

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 06

Table 11, IEEE 802.11n (HT40) OFDM, MCS0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	4874.000	32.8	33	34.9	34.7	54.0	-19.3
H	7311.000	32.2	33	37.9	37.1	54.0	-16.9
V	9748.000	31.3	33	40.4	38.7	54.0	-15.3
V	12185.000	34.6	33	40.5	42.1	54.0	-11.9
V	14622.000	38.8	33	38.4	44.2	54.0	-9.8

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	4874.000	46.8	33	34.9	48.7	74.0	-25.3
H	7311.000	38.2	33	37.9	43.1	74.0	-30.9
V	9748.000	37.6	33	40.4	45.0	74.0	-29.0
V	12185.000	40.7	33	40.5	48.2	74.0	-25.8
V	14622.000	45.0	33	38.4	50.4	74.0	-23.6

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 09

Table 12, IEEE 802.11n (HT40) OFDM, MCS0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	51.3	33	29.4	47.7	54.0	-6.3
H	4904.000	34.8	33	34.9	36.7	54.0	-17.3
V	7356.000	32.0	33	37.9	36.9	54.0	-17.1
H	9808.000	31.7	33	40.4	39.1	54.0	-14.9
V	12260.000	36.3	33	40.5	43.8	54.0	-10.2
V	14712.000	38.5	33	38.4	43.9	54.0	-10.1

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	70.2	33	29.4	66.6	74.0	-7.4
H	4904.000	47.3	33	34.9	49.2	74.0	-24.8
V	7356.000	38.5	33	37.9	43.4	74.0	-30.6
H	9808.000	38.0	33	40.4	45.4	74.0	-28.6
V	12260.000	42.2	33	40.5	49.7	74.0	-24.3
V	14712.000	44.5	33	38.4	49.9	74.0	-24.1

Notes:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT**RADIATED EMISSION DATA**

Mode: Wi-Fi and RFID Operating

Table 13

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	40.670	39.5	16	10.0	33.5	40.0	-6.5
V	78.985	40.7	16	6.0	30.7	40.0	-9.3
V	169.316	31.6	16	18.0	33.6	43.5	-9.9
V	372.531	34.2	16	24.0	42.2	46.0	-3.8
V	507.968	27.5	16	27.0	38.5	46.0	-7.5
V	800.059	24.9	16	31.0	39.9	46.0	-6.1

Notes:

1. Peak and Quasi-Peak detector are used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

3.7 Transmitter Duty Cycle Calculation

Not Applicable – No average factor is required

3.8 AC Power Line Conducted Emission

- Not Applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

3.8.1 AC Power Line Conducted Emission Configuration

Worst Case Line-Conducted Configuration at 0.1905 MHz.


For electronic filing, the worst-case line-conducted configuration photographs are saved with filename: Setup Photos.pdf.

3.8.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 13.7 dB margin

3.8.3 Conducted Emission Test Setup

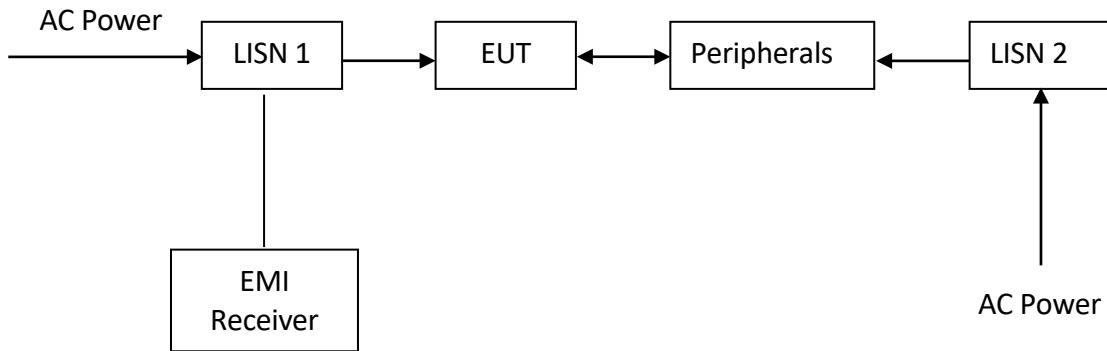


The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

TEST REPORT**AC POWER LINE CONDUCTED EMISSION**

Worst Case: Wi-Fi and RFID Operating

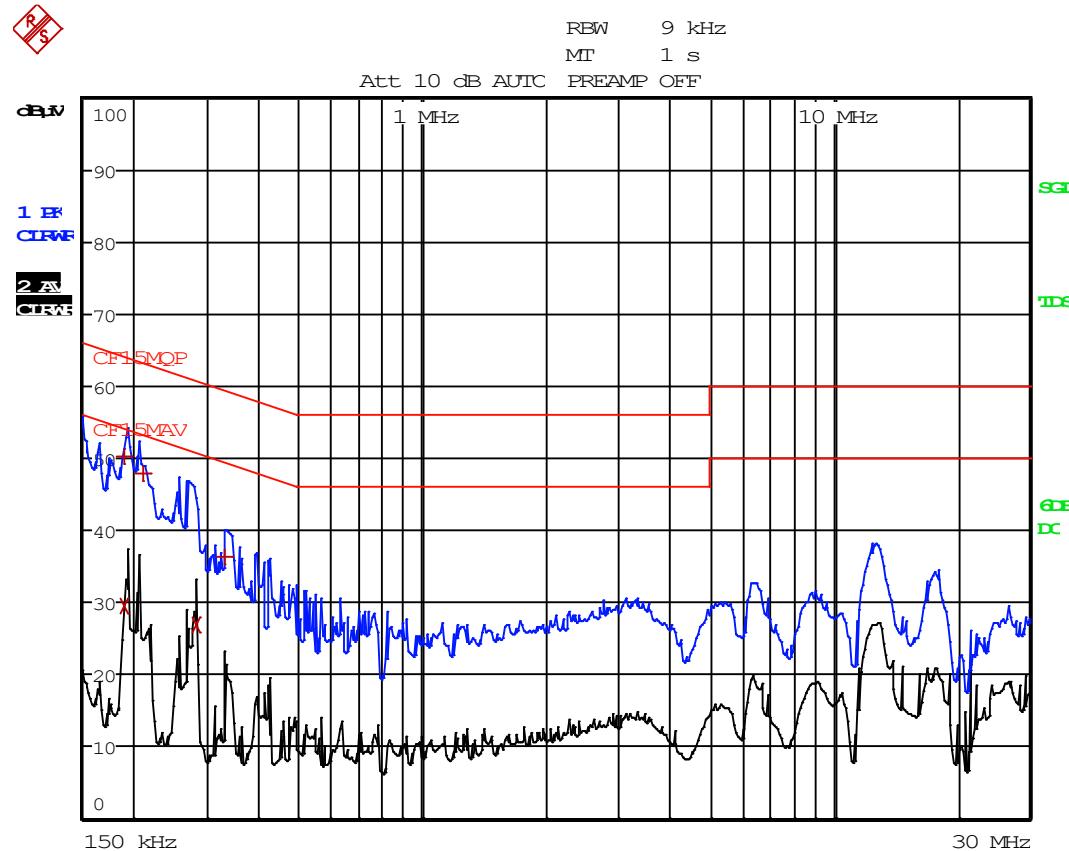

TEST REPORT**AC POWER LINE CONDUCTED EMISSION**


Worst Case: Wi-Fi and RFID Operating

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP	Trace2:	CF15MAV	Trace3:
TRACE	FREQUENCY	LEVEL dB _μ V	DELTA	LIMIT dB
1	Quasi Peak 190.5 kHz	50.31	N	-13.70
2	CISPR Average 190.5 kHz	29.56	N	-24.45
1	Quasi Peak 213 kHz	47.82	N	-15.26
2	CISPR Average 280.5 kHz	26.80	N	-23.99
1	Quasi Peak 330 kHz	36.39	N	-23.05

TEST REPORT

OCCUPIED BANDWIDTH

The figure below shows the test setup, which is utilized to make these measurements.

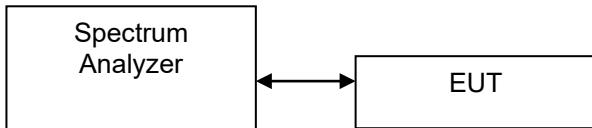

Occupied Bandwidth Results: (IEEE 802.11b) (Refer to Test Data1.pdf)

Frequency (MHz)	Occupied Bandwidth (MHz)
Low Channel: 2412 (P.5)	12.90
Middle Channel: 2437 (P.27)	12.90
High Channel: 2462 (P.44)	13.00

Occupied Bandwidth Results: (IEEE 802.11g) (Refer to Test Data2.pdf)

Frequency (MHz)	Occupied Bandwidth (MHz)
Low Channel: 2412 (P.5)	16.50
Middle Channel: 2437 (P.27)	16.60
High Channel: 2462 (P.46)	16.60

Occupied Bandwidth Results: (IEEE 802.11n (20MHz)) (Refer to Test Data3.pdf)

Frequency (MHz)	Occupied Bandwidth (MHz)
Low Channel: 2412 (P.5)	17.50
Middle Channel: 2437 (P.25)	17.40
High Channel: 2462 (P.42)	17.50

Occupied Bandwidth Results: (IEEE 802.11n (40MHz)) (Refer to Test Data4.pdf)

Frequency (MHz)	Occupied Bandwidth (MHz)
Low Channel: 2422 (P.5)	35.00
Middle Channel: 2437 (P.25)	34.75
High Channel: 2452 (P.42)	34.75

TEST REPORT

EXHIBIT 4 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Biconical Antenna (30MHz to 300MHz)	Log Periodic Antenna
Registration No.	EW-3156	EW-3242	EW-3243
Manufacturer	ROHDE SCHWARZ	EMCO	EMCO
Model No.	ESR26	3110C	3148B
Calibration Date	January 31, 2024	April 26, 2022	October 30, 2022
Calibration Due Date	January 31, 2025	July 26, 2024	July 30, 2024

Equipment	Double Ridged Guide Antenna (1GHz - 18GHz)	Active Loop Antenna (H-field) (9kHz to 30MHz)	RF Preamplifier (9kHz to 6000MHz)
Registration No.	EW-0194	EW-3326	EW-3006b
Manufacturer	EMCO	EMCO	SCHWARZBECK
Model No.	3115	6502	BBV9718
Calibration Date	May 10, 2023	January 05, 2024	October 20, 2023
Calibration Due Date	November 10, 2024	July 05, 2025	October 20, 2024

Equipment	2.4GHz Notch Filter	14m Double Shield RF Cable (9kHz - 6GHz)	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-3435	EW-2376	EW-2781
Manufacturer	MICROWAVE	RADIALL	GREATBILLION
Model No.	N0324413	n m/br56/bnc m 14m	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	September 26, 2023	September 19, 2023	January 16, 2024
Calibration Due Date	September 26, 2024	September 19, 2024	January 16, 2025

Equipment	12 metre RF Cable (1-40)GHz	Pyramidal Horn Antenna
Registration No.	EW-2774	EW-0905
Manufacturer	GREATBILLION	EMCO
Model No.	SMA m-m ra 12m 40G outdoor	3160-09
Calibration Date	January 16, 2024	December 15, 2023
Calibration Due Date	January 16, 2025	June 15, 2025

TEST REPORT**EXHIBIT 4 EQUIPMENT LIST (CONT'D)**

2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver (9kHz to 3GHz)
Registration No.	EW-2454	EW-3360	EW-3095
Manufacturer	RADIALL	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	Bnc m st / 142 / bnc mra 240cm	ENV-216	ESCI
Calibration Date	June 13, 2023	April 07, 2024	January 18, 2024
Calibration Due Date	September 13, 2024	April 07, 2025	January 18, 2025

3) Conductive Measurement Test

Equipment	RF Power Meter with Power Sensor (N1921A)	EMI Test Receiver (9kHz to 26.5GHz)
Registration No.	EW-3309	EW-3156
Manufacturer	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	NRP-Z81	ESR26
Calibration Date	February 14, 2023	January 31, 2024
Calibration Due Date	August 14, 2024	January 31, 2025

4) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDE SCHWARZ
Software version	10.50.40

END OF TEST REPORT