



FCC TEST REPORT

**Test report
On Behalf of
Shenzhen Sunshine Technological Co.,Ltd
For
WIFI camera
Model No.:
C808,S808,S17,IS989,IS890,IS898,LS807,IS809,A10,X18,A17,
A898,A808,IS8088,S10,S18,K228,E338,E608,P108,P208,P969,
EW9,H5,T1,S988,8S06,VW901,PS2,S6,S16,K10,IS908,IS9130,
G1,G2,G3,G4,3608S,EW6,IS989,VS911,W3,R1,R2,R3,R4E8,E6,
E16,E17,E18,E19,C8**

FCC ID: 2AS8B-C808

**Prepared for : Shenzhen Sunshine Technological Co.,Ltd
801B Zone, B building, 1 Tianyang 2nd Road, Dongfang Community, Songgang
Street, Bao' an District, Shenzhen , China**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China**

**Date of Test: Apr. 23, 2019 ~ Apr. 29, 2019
Date of Report: Apr. 29, 2019
Report Number: HK1904240848-E**



TEST RESULT CERTIFICATION

Applicant's name Shenzhen Sunshine Technological Co.,Ltd

Address 801B Zone, B building, 1 Tianyang 2nd Road, Dongfang Community, Songgang Street, Bao'an District, Shenzhen, China

Manufacture's Name .. Shenzhen Sunshine Technological Co.,Ltd

Address 801B Zone, B building, 1 Tianyang 2nd Road, Dongfang Community, Songgang Street, Bao'an District, Shenzhen, China

Product description

Trade Mark: N/A

Product name WIFI camera

Model and/or type IS8088,S10,S18,K228,E338,E608,P108,P208,P969,EW9,H5,T1,S988, reference 8S06,VW901,PS2,S6,S16,K10,IS908,IS9130,G1,G2,G3,G4,3608S,EW6, IS989,VS911,W3,R1,R2,R3,R4E8,E6,E16,E17,E18,E19,C8

Standards FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test


Date (s) of performance of tests Apr. 23, 2019 ~ Apr. 29, 2019

Date of Issue Apr. 29, 2019


Test Result..... **Pass**

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory : 

(Jason Zhou)



TABLE OF CONTENTS

1. Test Result Summary	4
1.1. TEST PROCEDURES AND RESULTS.....	4
1.2. TEST FACILITY	4
1.3. MEASUREMENT UNCERTAINTY	5
2. EUT Description.....	6
2.1. GENERAL DESCRIPTION OF EUT	6
2.2. CARRIER FREQUENCY OF CHANNELS	7
2.3. OPERATION OF EUT DURING TESTING	7
2.4. DESCRIPTION OF TEST SETUP	8
3. Genera Information.....	9
3.1. TEST ENVIRONMENT AND MODE	9
3.2. DESCRIPTION OF SUPPORT UNITS	10
4. Test Results and Measurement Data	11
4.1. CONDUCTED EMISSION	11
4.2. MAXIMUM CONDUCTED OUTPUT POWER	15
4.3. EMISSION BANDWIDTH.....	17
4.4. POWER SPECTRAL DENSITY	25
4.5. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	31
4.6. RADIATED SPURIOUS EMISSION MEASUREMENT	37
4.7. ANTENNA REQUIREMENT	71
4.8. PHOTOGRAPH OF TEST.....	73



1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	1§5.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: *Test item meets the requirement.*
2. Fail: *Test item does not meet the requirement.*
3. N/A: *Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	WIFI camera
Model Name	C808
Serial No.	C808,S808,S17,IS989,IS890,IS898,LS807,IS809,A10, X18,A17,A898,A808,IS8088,S10,S18,K228,E338,E608, P108,P208,P969,EW9,H5,T1,S988,8S06,VW901,PS2, S6,S16,K10,IS908,IS9130,G1,G2,G3,G4,3608S,EW6, IS989,VS911,W3,R1,R2,R3,R4E8,E6,E16,E17,E18, E19,C8
Model Difference	All model's the function, software and electric circuit are the same, only with Exterior and product color and model named different. Test sample model: C808.
Trade Mark	N/A
FCC ID	2AS8B-C808
Antenna Type	PCB Antenna
Antenna Gain	2dBi
Operation frequency	802.11b/g/n 20:2412~2462 MHz 802.11n 40: 2422~2452MHz
Number of Channels	802.11b/g/n20: 11CH 802.11n 40: 7CH
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Power Source	DC5V by Adapter AC 120V/60Hz
Power Rating	DC5V by Adapter AC 120V/60Hz



2.2. Carrier Frequency of Channels

Channel List for 802.11b/802.11g/802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List For 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
--	--	04	2427	07	2442	--	--
--	--	05	2432	08	2447	--	--
03	2422	06	2437	09	2452		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n (HT20)**

Low Channel: 2412MHz
Middle Channel: 2437MHz
High Channel: 2462MHz


The mode is used: **Transmitting mode for 802.11n (HT40)**

Low Channel: 2422MHz
Middle Channel: 2437MHz
High Channel: 2452MHz




2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted and Radiation testing:



Operation of EUT Above 1GHz Radiation testing:



- Adapter information

Model: RXZ-0515

Input: 100-240V, 50/60Hz, 0.3A

Output: 5VDC, 1500mA



3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.5Mbps

Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.
2. According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20), 13.5Mbps for 802.11n(H40). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.



3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/


Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

4. Test Results and Measurement Data

4.1. Conducted Emission

Test Specification

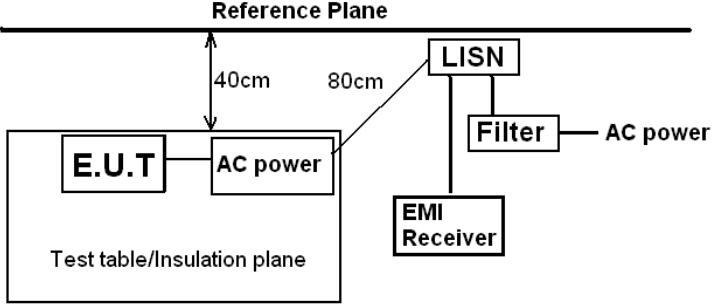Test Requirement:	FCC Part15 C Section 15.207																	
Test Method:	ANSI C63.10:2013																	
Frequency Range:	150 kHz to 30 MHz																	
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto																	
Limits:	<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th></th> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)			Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																	
	Quasi-peak	Average																
0.15-0.5	66 to 56*	56 to 46*																
0.5-5	56	46																
5-30	60	50																
Test Setup:	<p style="text-align: center;">Reference Plane</p>  <p><i>Remark:</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>																	
Test Mode:	Charging + transmitting with modulation																	
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 																	
Test Result:	PASS																	



Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2019
LISN	R&S	ENV216	HKE-002	Dec. 27, 2019
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




Test data

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

EUT :	WIFI camera	Model Name. :	C808
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2019-04-28
Test Mode :	802.11b Low Channel	Phase :	L
Test Voltage :	DC5V by Adapter AC 120V/60Hz		

Test Graph

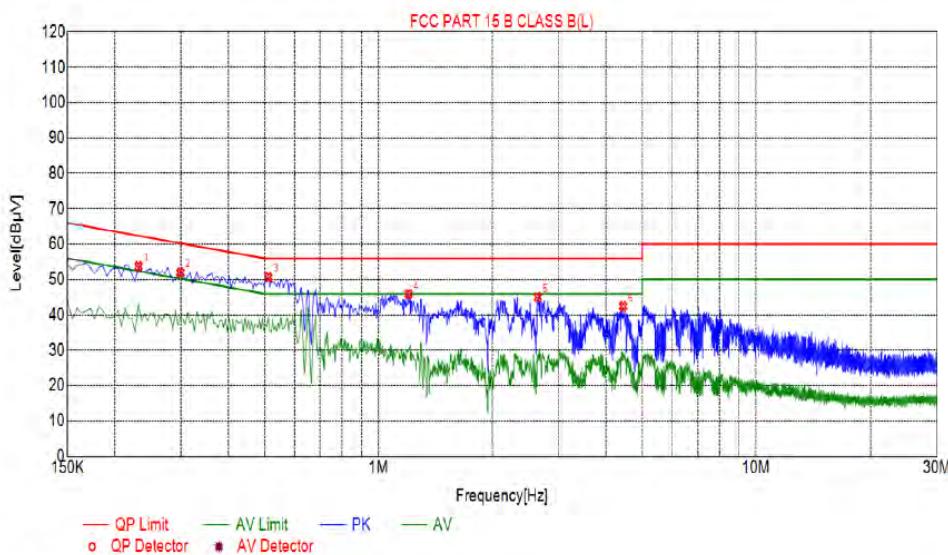

Suspected List						
NO	Freq. [MHz]	Level (dB μ V)	Factor [dB]	Limit (dB μ V)	Margin [dB]	Detector
1	0.2310	53.78	10.03	62.43	8.65	PK
2	0.2985	52.04	10.04	60.33	8.29	PK
3	0.5100	50.73	10.04	56.00	5.27	PK
4	1.1985	45.92	10.09	56.00	10.08	PK
5	2.6430	45.02	10.21	56.00	10.98	PK
6	4.4475	42.46	10.25	56.00	13.54	PK

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



EUT :	WIFI camera	Model Name. :	C808
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2019-04-28
Test Mode :	802.11b Low Channel	Phase :	N
Test Voltage :	DC5V by Adapter AC 120V/60Hz		

Test Graph

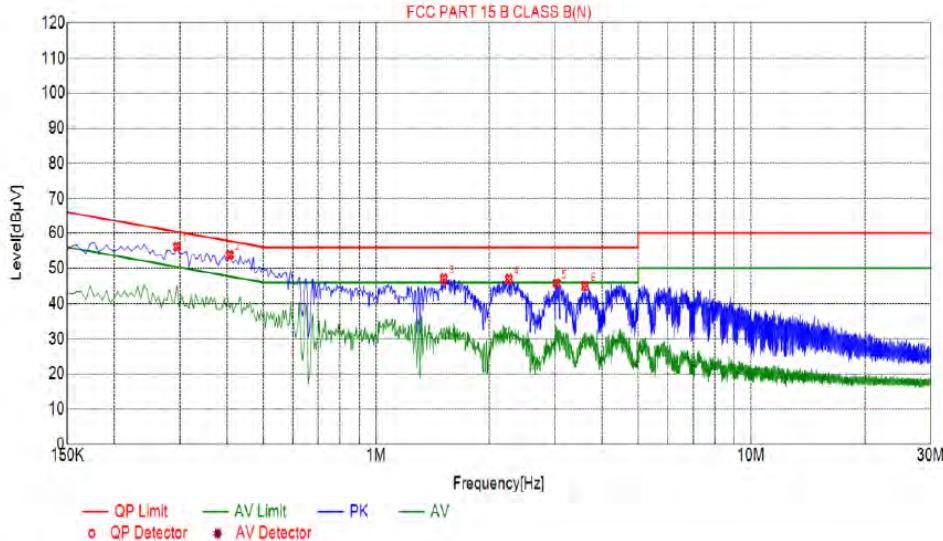

Suspected List						
NO	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.2940	56.09	10.03	60.42	4.33	PK
2	0.4065	53.80	10.03	57.74	3.94	PK
3	1.5135	47.06	10.11	56.00	8.94	PK
4	2.2605	46.98	10.18	56.00	9.02	PK
5	3.0300	45.78	10.22	56.00	10.22	PK
6	3.6105	44.90	10.25	56.00	11.10	PK

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



4.2. Maximum Conducted Output Power

Test Specification

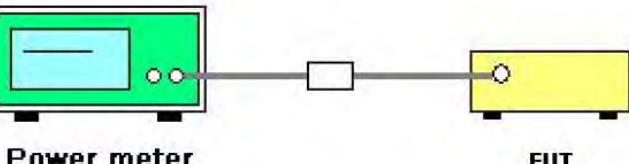Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB 558074
Limit:	30dBm
Test Setup:	 <p>The diagram illustrates the test setup. A green 'Power meter' is connected to a yellow 'EUT' (Equipment Under Test) through a grey 'RF cable' and a white 'attenuator' box. The power meter has a digital display and a keypad. The EUT is a simple rectangular box.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none">1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v05.2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.3. Set to the maximum power setting and enable the EUT transmit continuously.4. Measure the Peak output power and record the results in the test report.
Test Result:	PASS

Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power meter	Agilent	E4417B	HKE-107	Dec. 27, 2019
Power Sensor	Agilent	E9327A	HKE-113	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test Data**

TX 802.11b Mode			
Test Channel	Frequency	Maximum Peak Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	15.78	30
CH06	2437	15.69	30
CH11	2462	15.47	30

TX 802.11g Mode			
CH01	2412	14.19	30
CH06	2437	14.87	30
CH11	2462	14.56	30


TX 802.11n20 Mode			
CH01	2412	12.48	30
CH06	2437	12.20	30
CH11	2462	12.54	30

TX 802.11n40 Mode			
CH03	2422	11.87	30
CH06	2437	12.07	30
CH09	2452	11.89	30



4.3. Emission Bandwidth

Test Specification

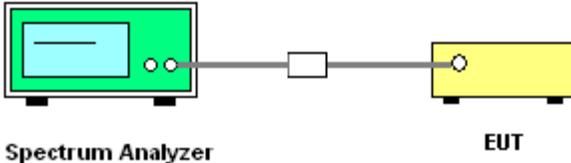Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB 558074
Limit:	>500kHz
Test Setup:	 <p>The diagram illustrates the test setup. A green 'Spectrum Analyzer' is connected to a yellow 'EUT' (Equipment Under Test) via a grey cable. A small white box is also connected between them.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none">1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v05.2. Set to the maximum power setting and enable the EUT transmit continuously.3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.4. Measure and record the results in the test report.
Test Result:	PASS

Test Instruments



RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test data**


Test channel	6dB Emission Bandwidth (MHz)			
	802.11b	802.11g	802.11n(H20)	802.11n(H40)
Lowest	10.13	16.47	17.72	35.19
Middle	9.099	15.78	16.38	35.07
Highest	9.626	16.16	16.43	35.98
Limit:	>500kHz			
Test Result:	PASS			

Test plots as follows:

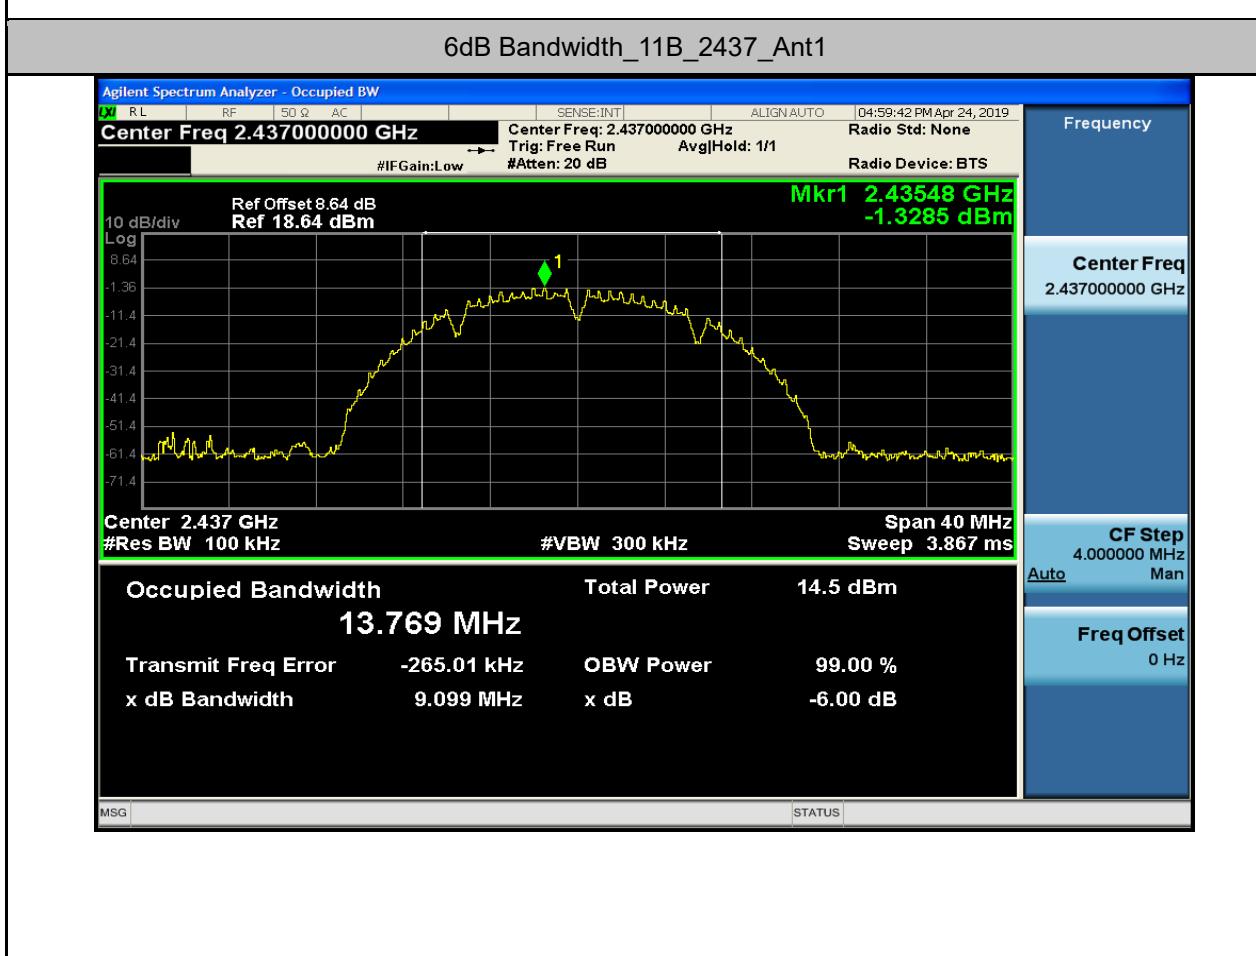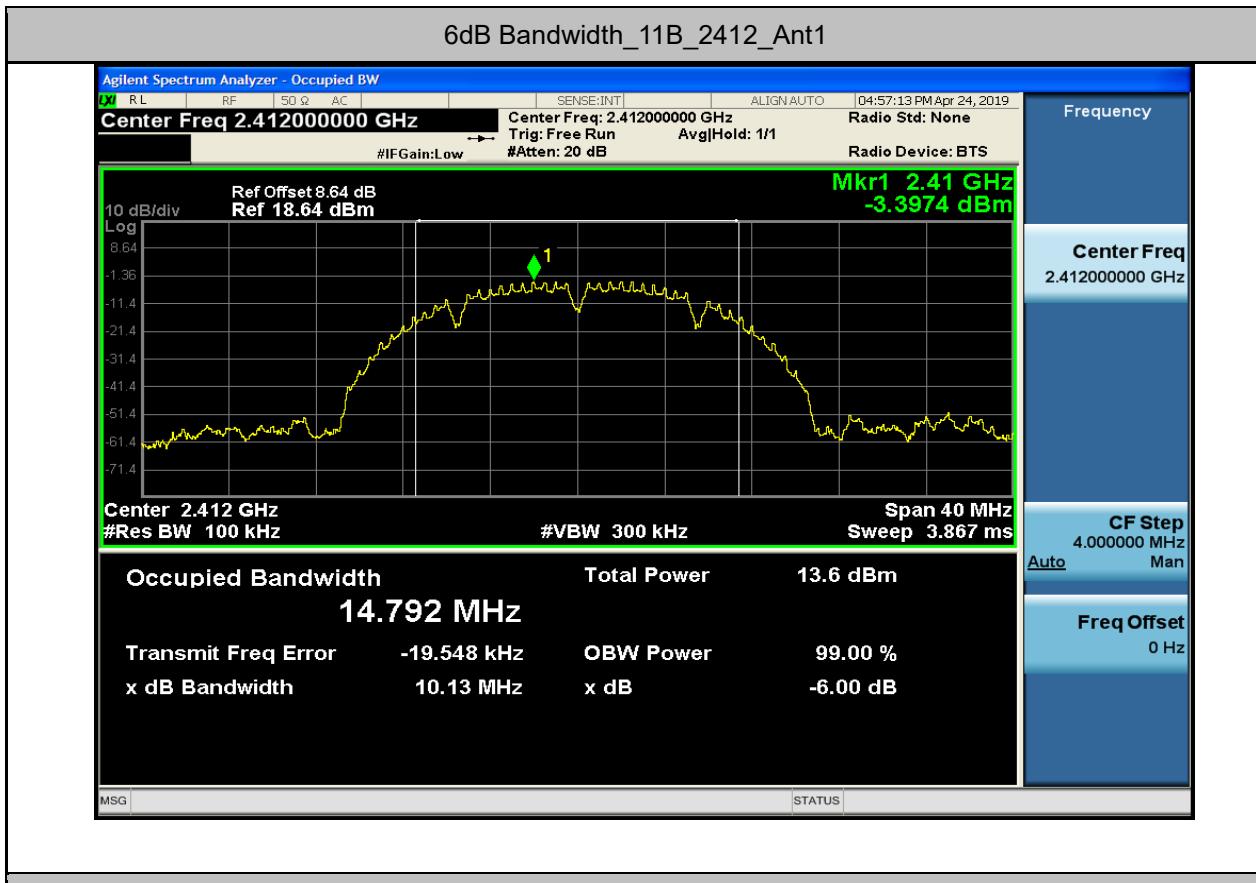




6dB Bandwidth_11B_2462_Ant1

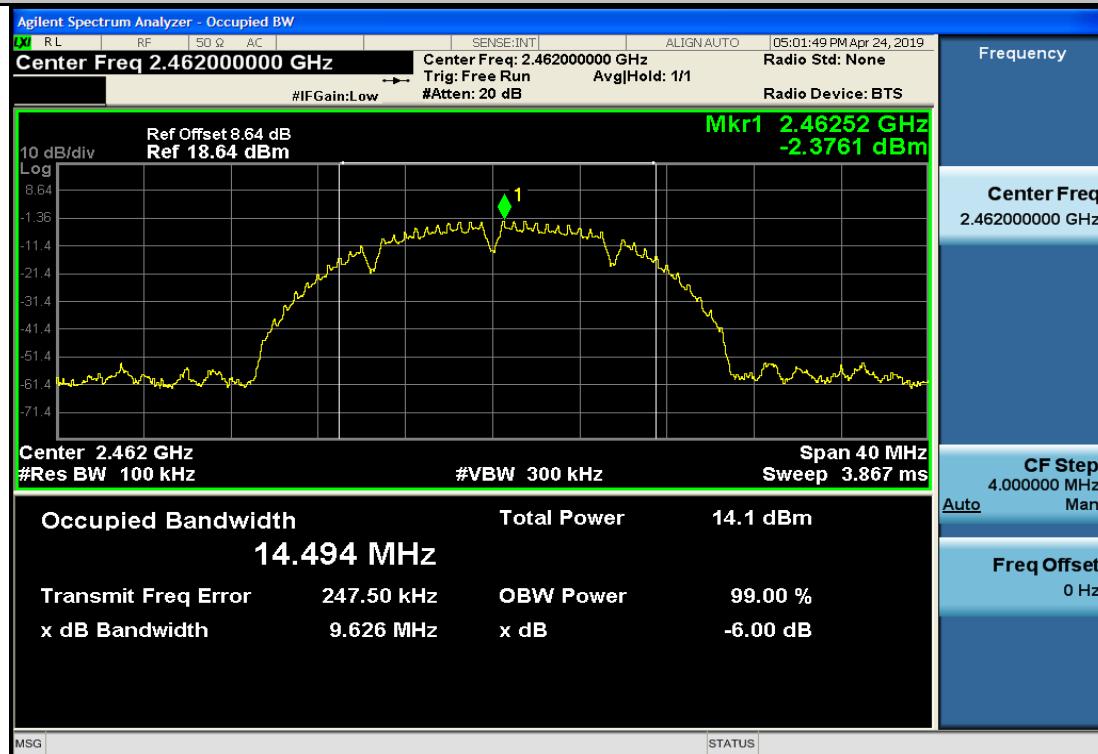


6dB Bandwidth_11G_2412_Ant1

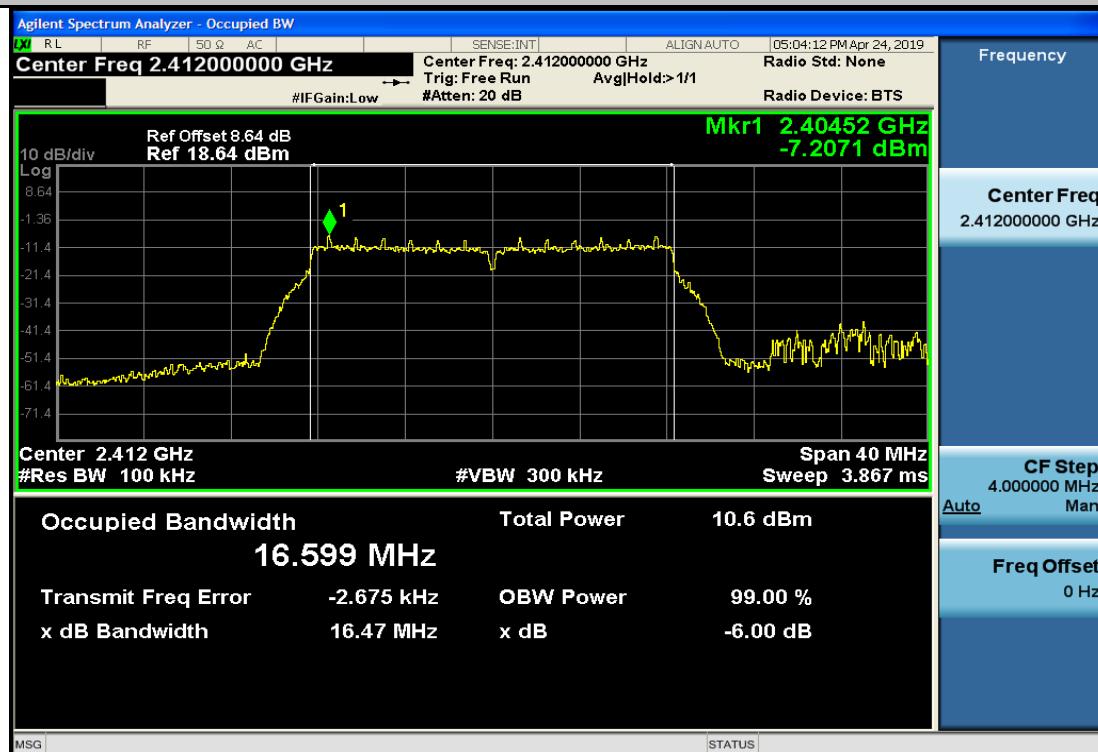



6dB Bandwidth_11G_2437_Ant1

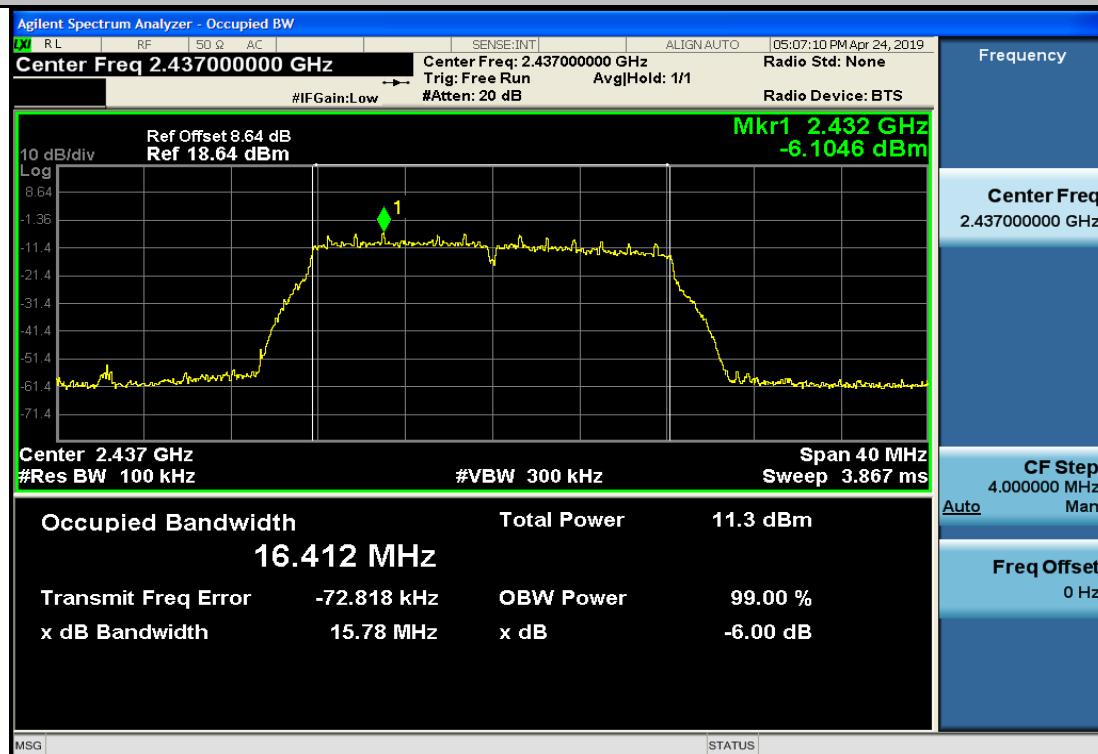


6dB Bandwidth_11G_2462_Ant1





6dB Bandwidth_11N20SISO_2412_Ant1

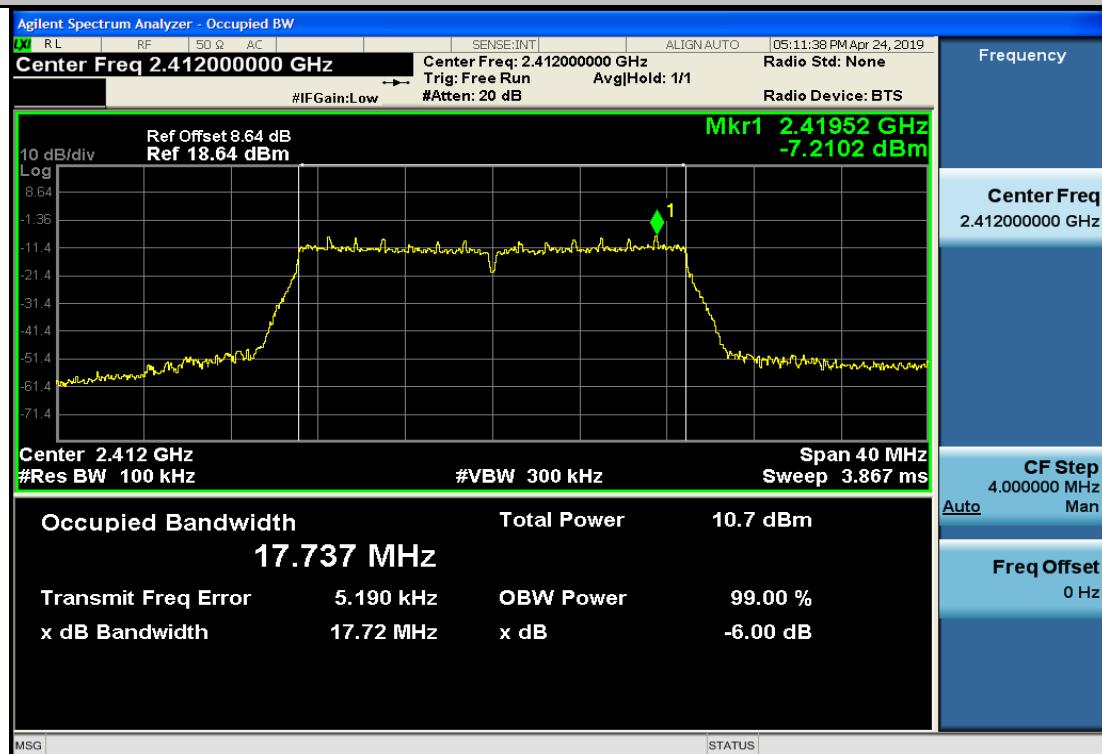


6dB Bandwidth_11N20SISO_2437_Ant1





6dB Bandwidth_11N20SISO_2462_Ant1

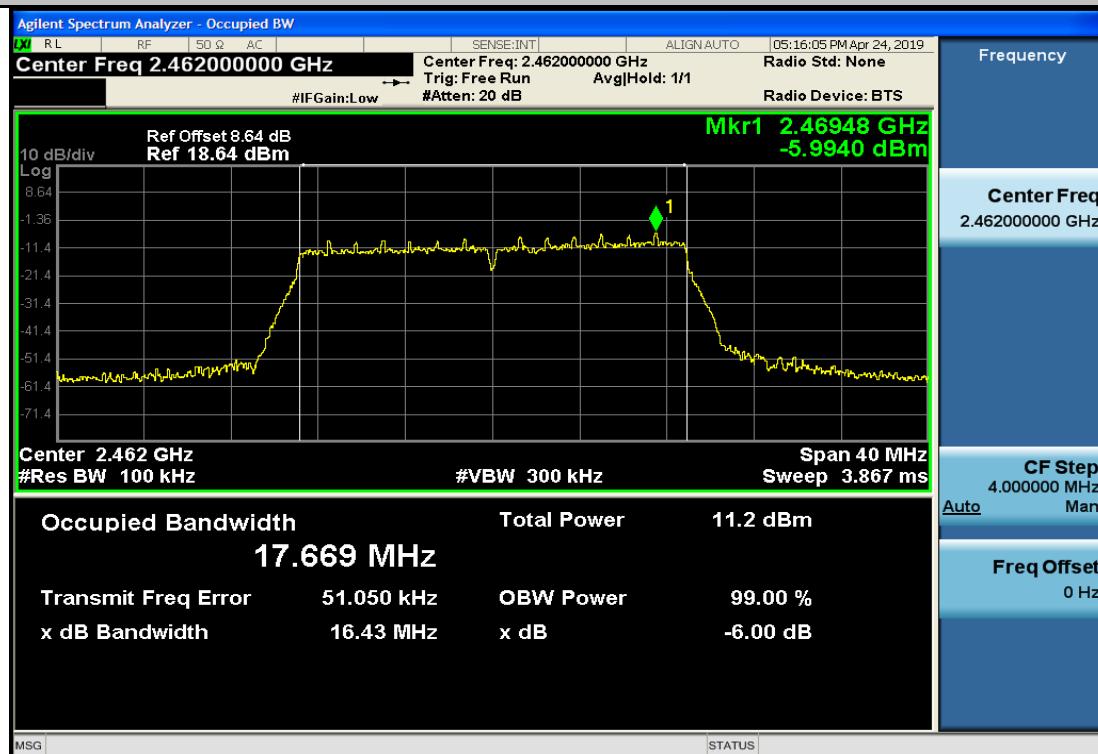


6dB Bandwidth_11N40SISO_2422_Ant1






6dB Bandwidth_11N40SISO_2437_Ant1

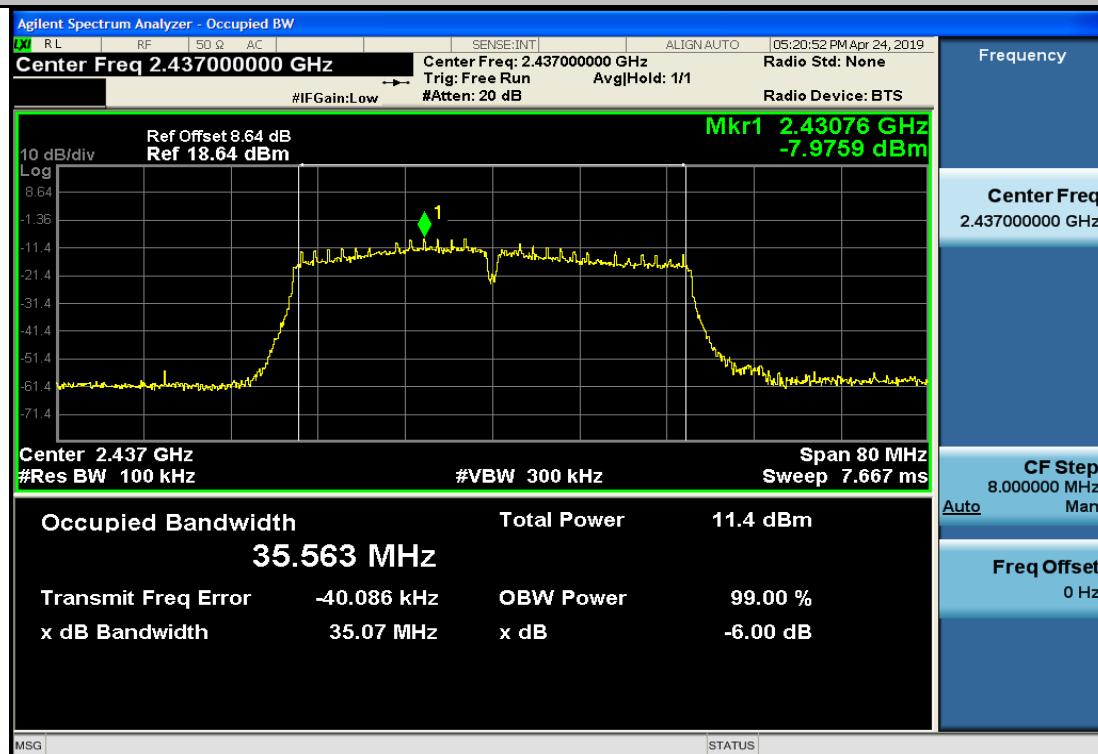

6dB Bandwidth_11N40SISO_2452_Ant1

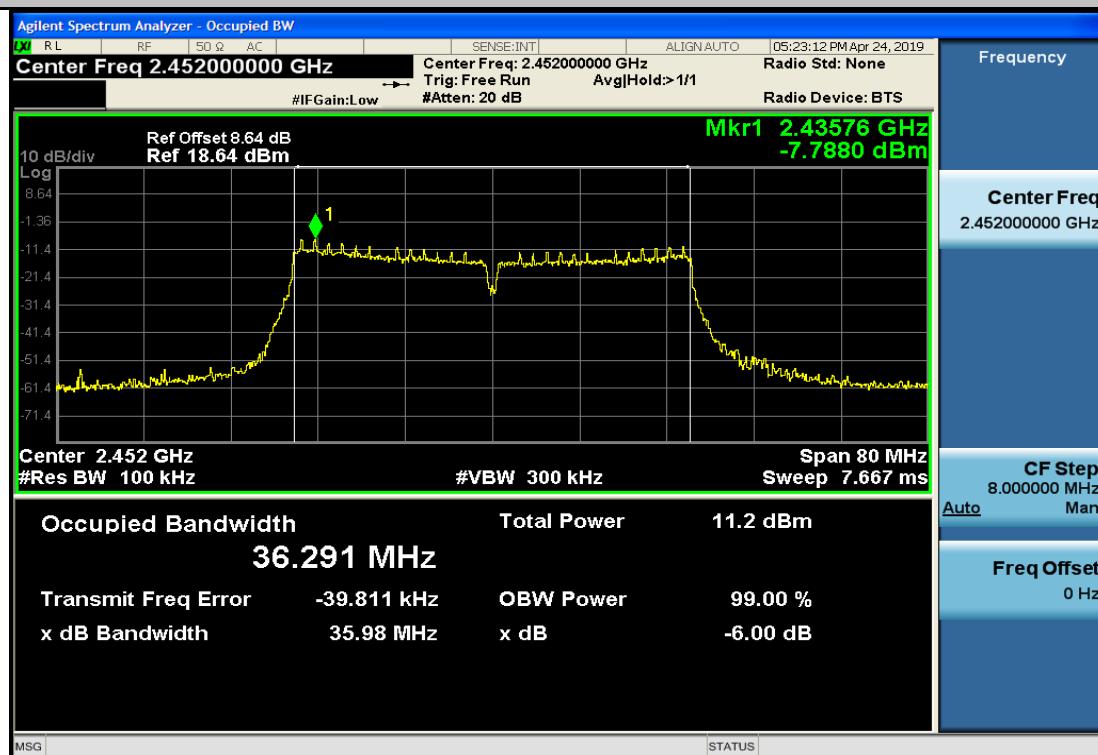



4.4. Power Spectral Density

Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none">1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v052. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.3. Set to the maximum power setting and enable the EUT transmit continuously.4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW.5. Detector = Peak, Sweep time = auto couple.6. Employ trace averaging (Peak) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.7. Measure and record the results in the test report.
Test Result:	PASS

Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test data**

EUT Set Mode	Channel	Result (dBm/30kHz)	Result (dBm/3kHz)
802.11b	Lowest	-7.51	-17.51
	Middle	-6.06	-16.06
	Highest	-6.42	-16.42
802.11g	Lowest	-11.19	-21.19
	Middle	-10.81	-20.81
	Highest	-11.19	-21.19
802.11n(H20)	Lowest	-11.89	-21.89
	Middle	-11.14	-21.14
	Highest	-10.5	-20.5
802.11n(H40)	Lowest	-13.75	-23.75
	Middle	-13.64	-23.64
	Highest	-13.92	-23.92
PSD test result (dBm/3kHz)= PSD test result (dBm/30kHz)-10			
Limit: 8dBm/3kHz			
Test Result:		PASS	

Test plots as follows:



802.11b Modulation

Lowest channel



Middle channel



Highest channel





802.11g Modulation

Lowest channel



Middle channel



Highest channel





802.11n (HT20) Modulation

Lowest channel



Middle channel



Highest channel





802.11n (HT40) Modulation


Lowest channel



Middle channel




Highest channel

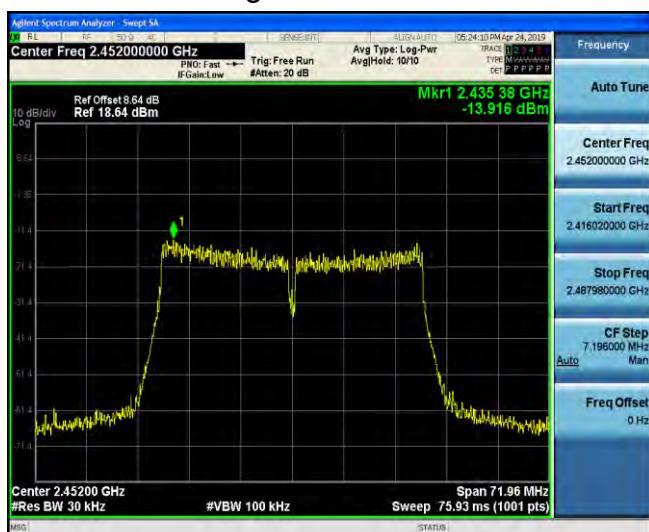



4.5. Conducted Band Edge and Spurious Emission Measurement

Test Specification

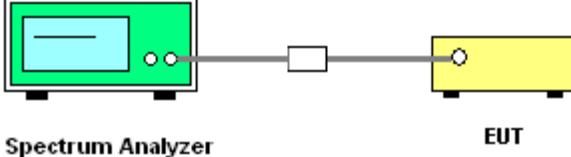Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none">1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.3. Set to the maximum power setting and enable the EUT transmit continuously.4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).5. Measure and record the results in the test report.6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



Test Instruments


RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Signal generator	Agilent	N5183A	HKE-071	Dec. 27, 2019
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




Test Data

802.11b Modulation

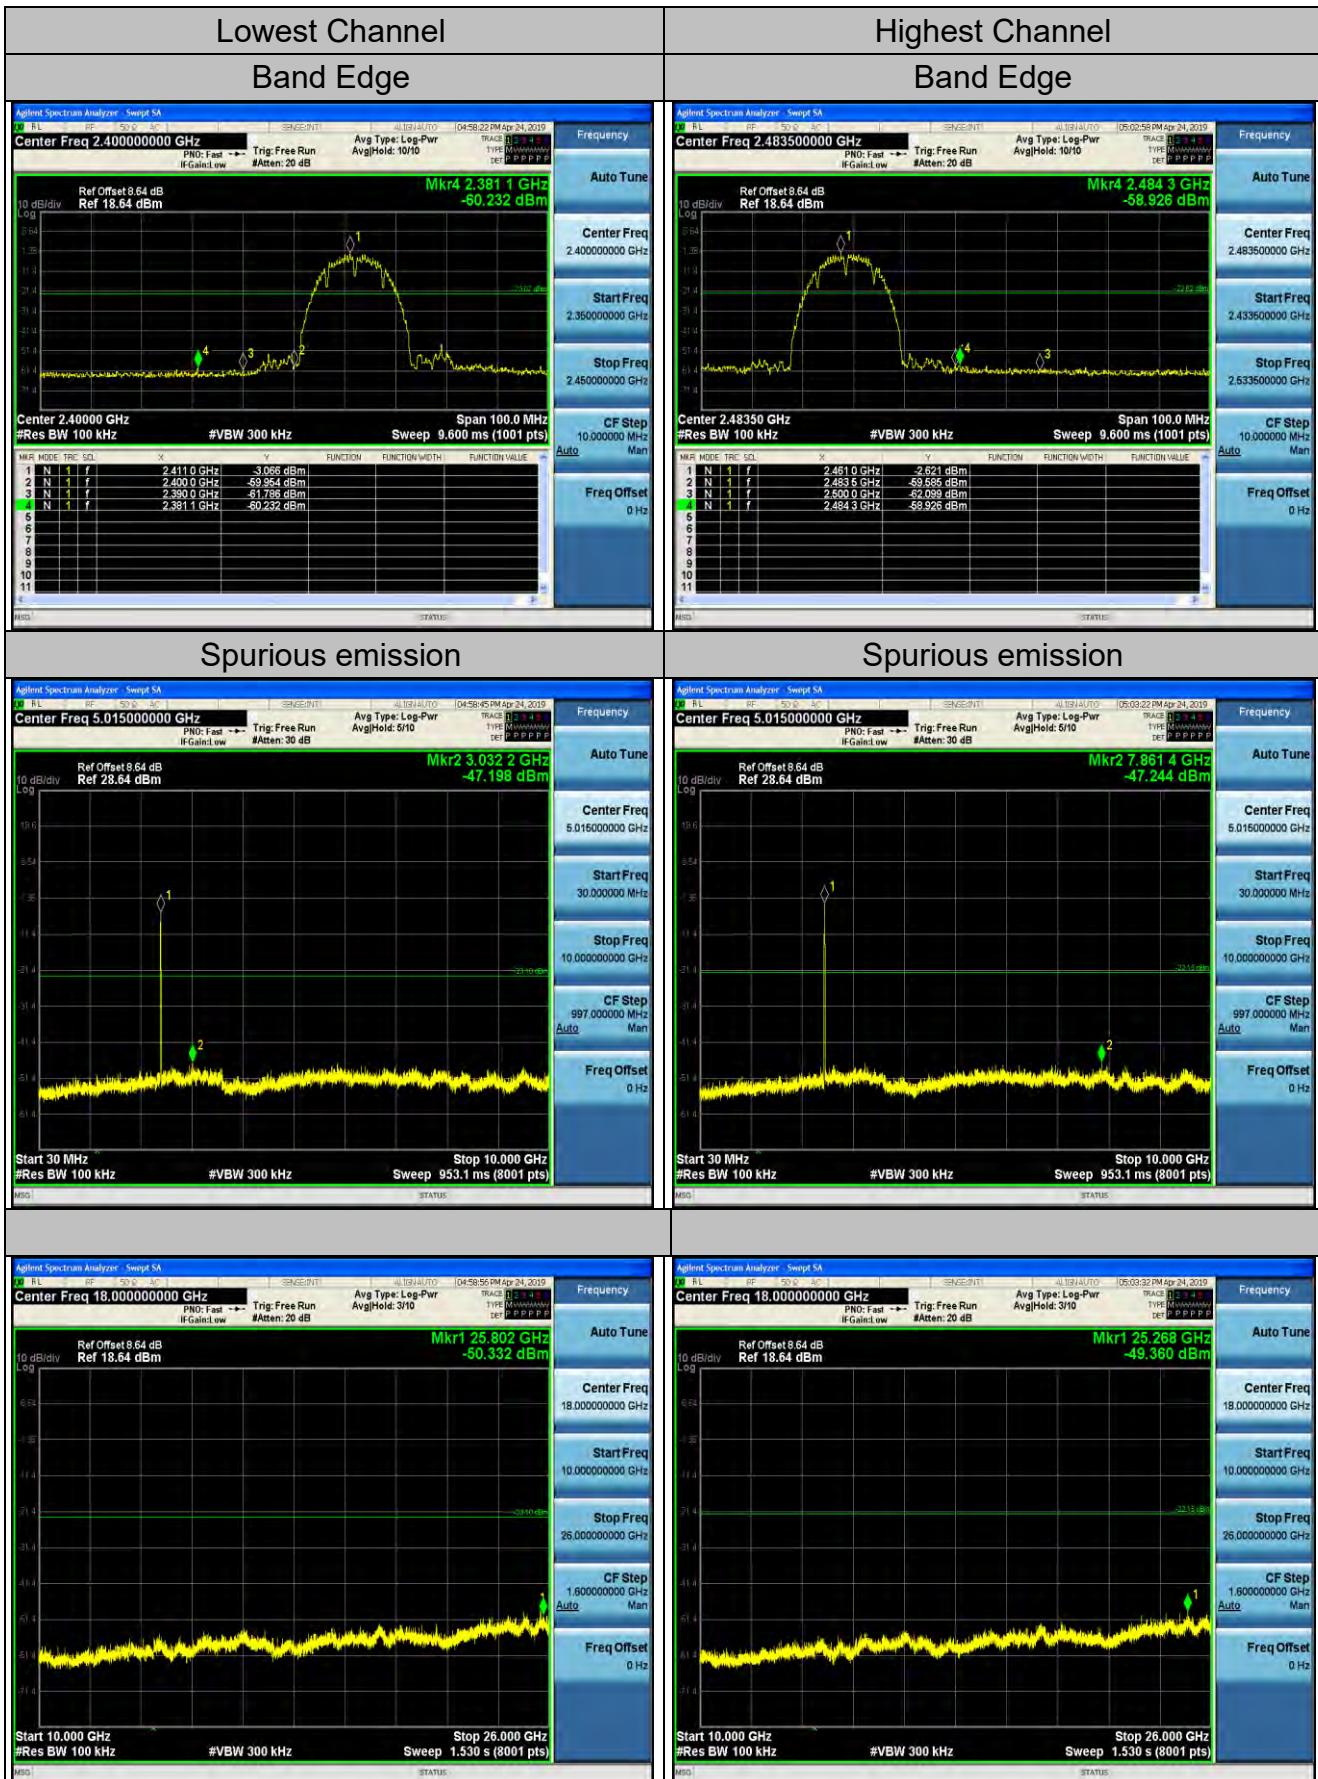




802.11g Modulation

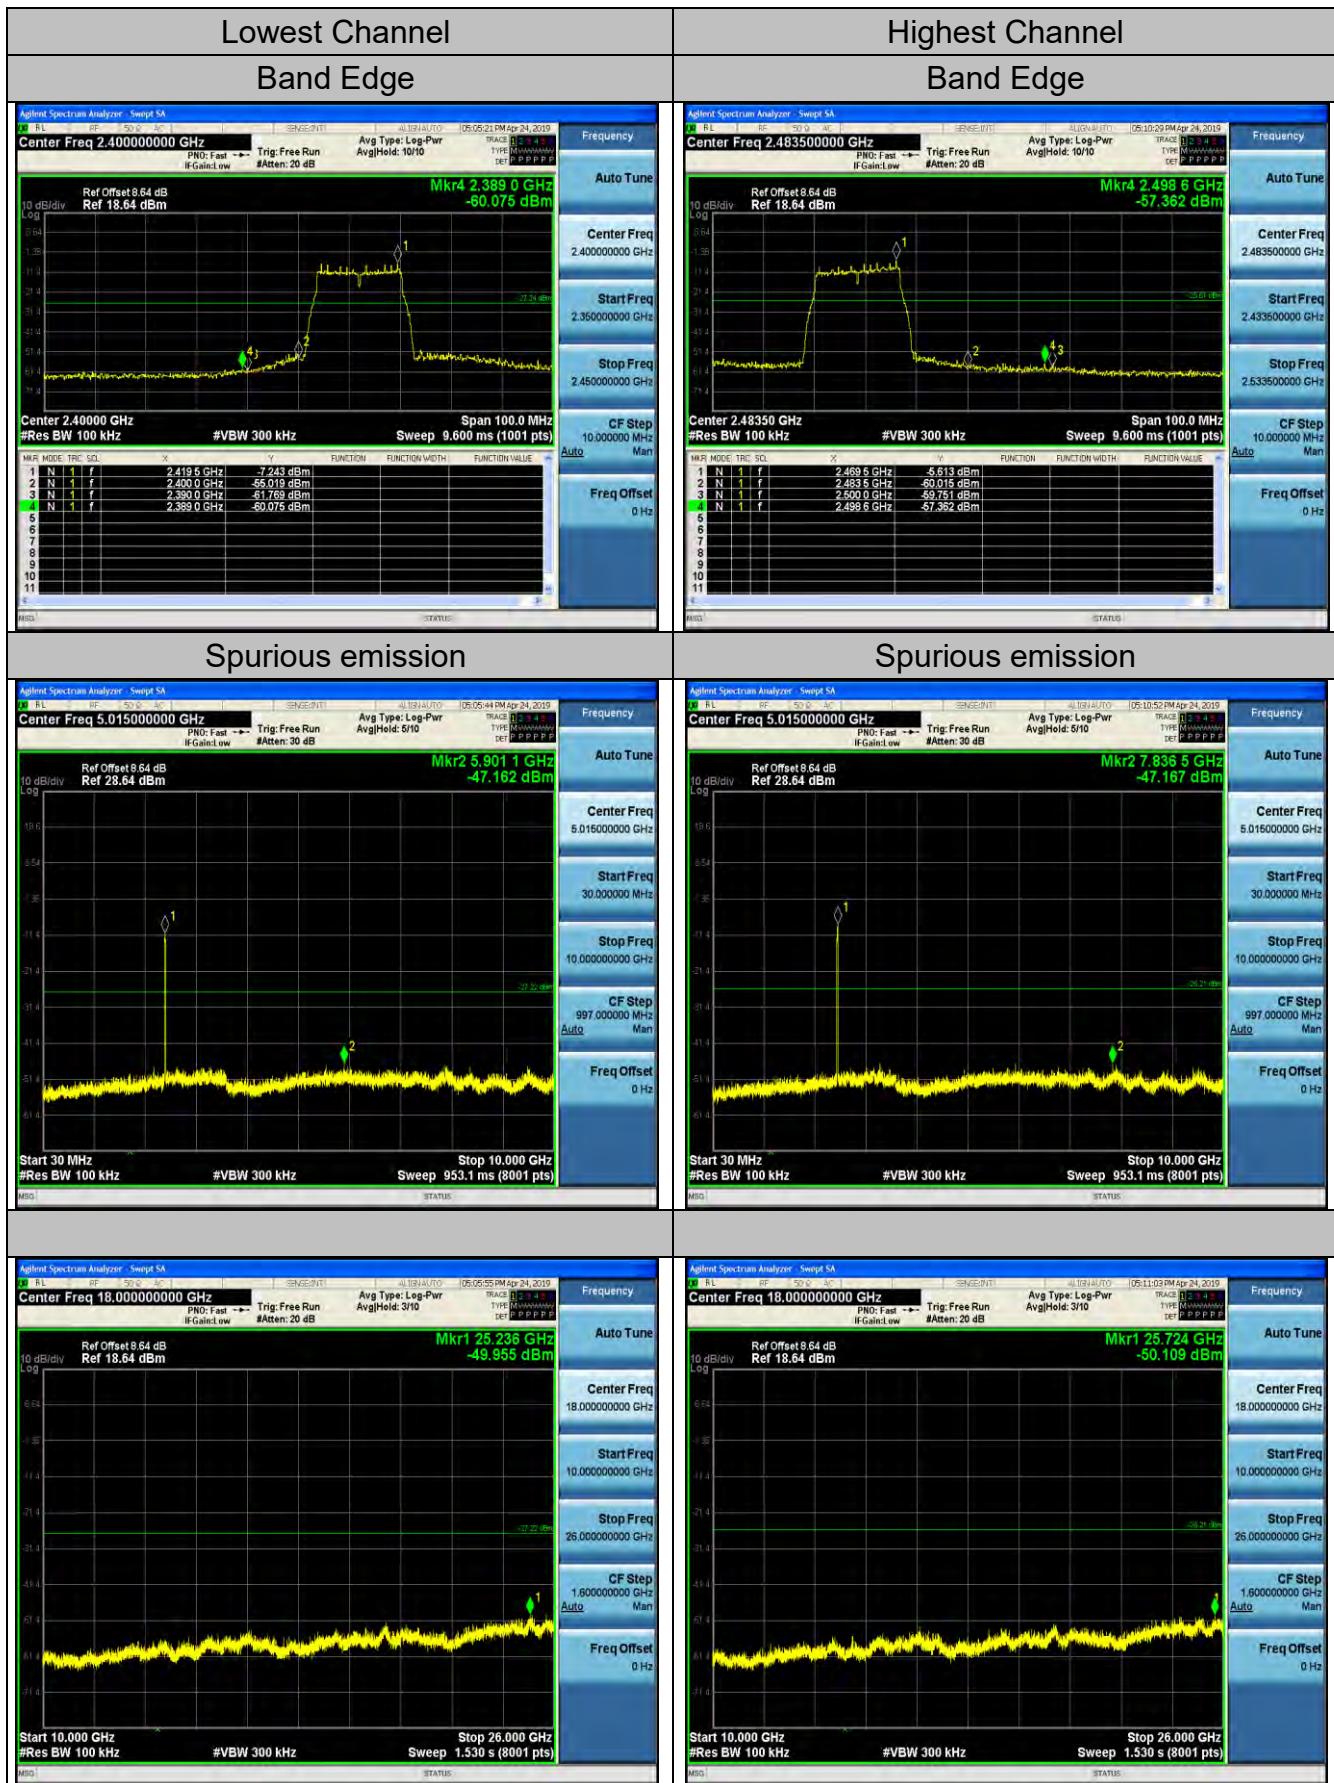




802.11n (HT20) Modulation

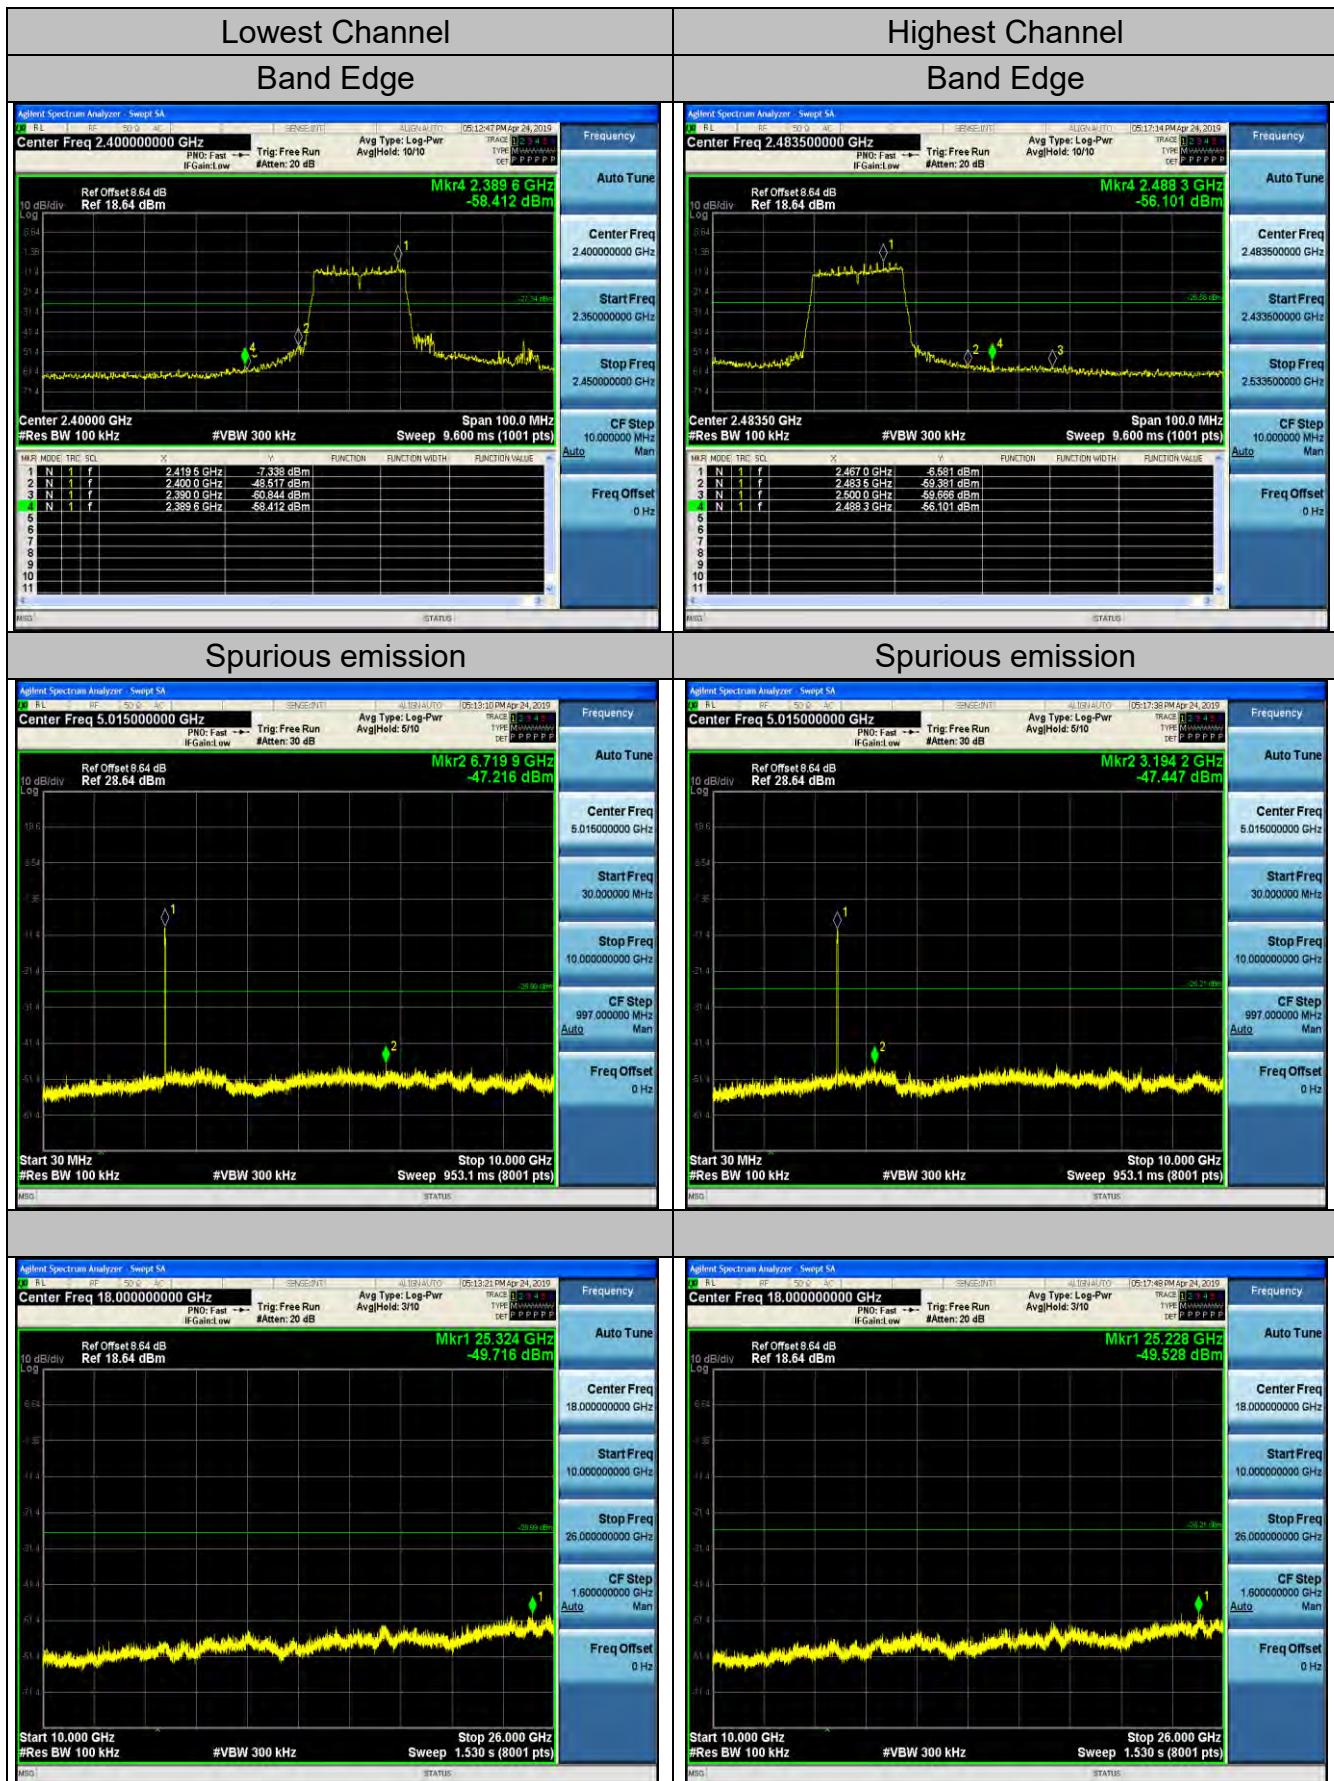




802.11n (HT40) Modulation

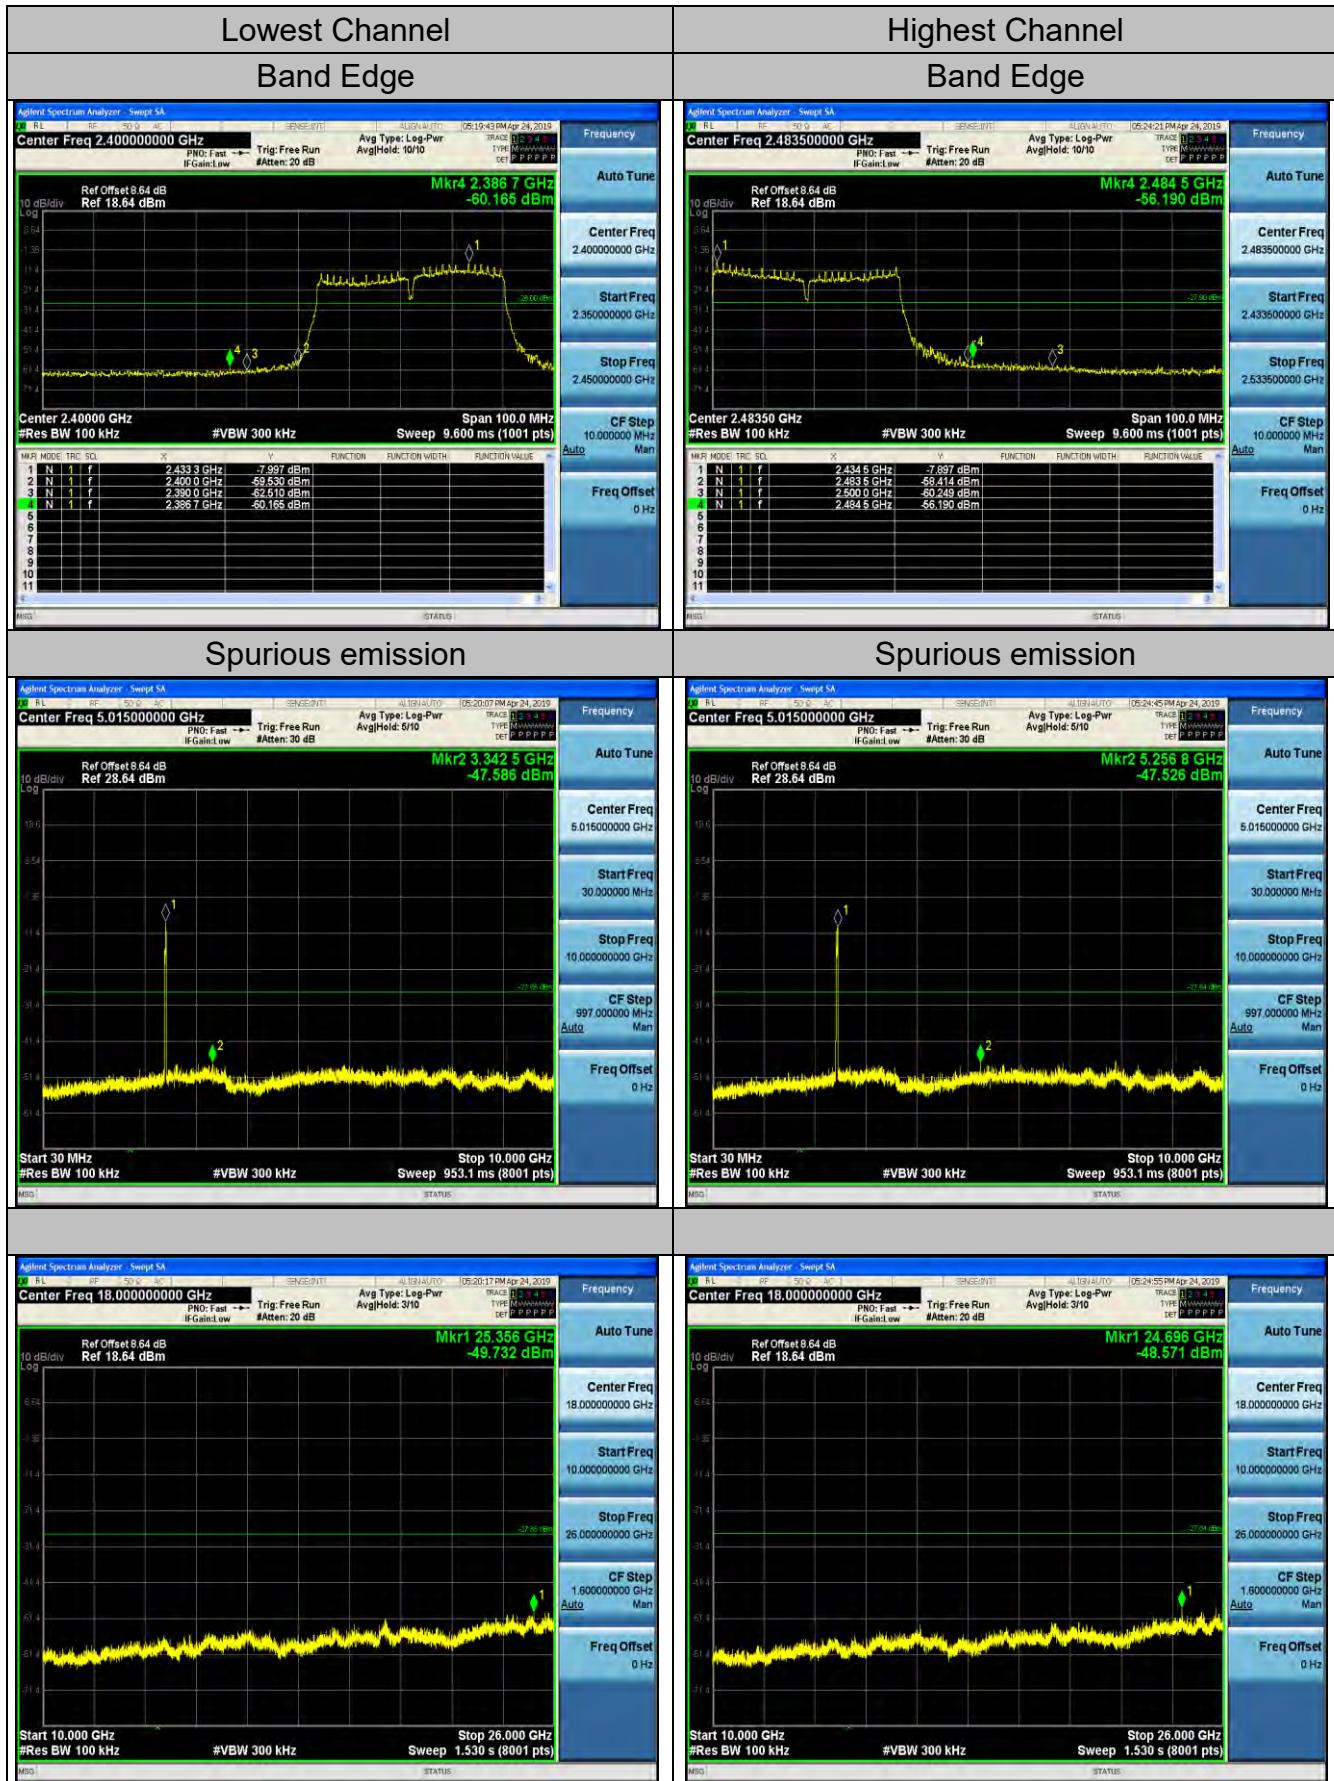


4.6. Radiated Spurious Emission Measurement

Test Specification

Test Requirement:	FCC Part15 C Section 15.209																																							
Test Method:	ANSI C63.10: 2013																																							
Frequency Range:	9 kHz to 25 GHz																																							
Measurement Distance:	3 m																																							
Antenna Polarization:	Horizontal & Vertical																																							
Operation mode:	Transmitting mode with modulation																																							
Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value						
Frequency	Detector	RBW	VBW	Remark																																				
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																				
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																				
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																																				
Above 1GHz	Peak	1MHz	3MHz	Peak Value																																				
	Peak	1MHz	10Hz	Average Value																																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td><td>500</td> <td>3</td> <td>Average</td> </tr> <tr> <td>5000</td> <td>3</td> <td>Peak</td> </tr> </tbody> </table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	Above 1GHz	500	3	Average	5000	3	Peak
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																																						
0.009-0.490	2400/F(KHz)	300																																						
0.490-1.705	24000/F(KHz)	30																																						
1.705-30	30	30																																						
30-88	100	3																																						
88-216	150	3																																						
216-960	200	3																																						
Above 960	500	3																																						
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector																																					
Above 1GHz	500	3	Average																																					
	5000	3	Peak																																					
Test setup:	<p>For radiated emissions below 30MHz</p> <p>Distance = 3m</p> <p>Turn table</p> <p>EUT</p> <p>Ground Plane</p> <p>30MHz to 1GHz</p>																																							

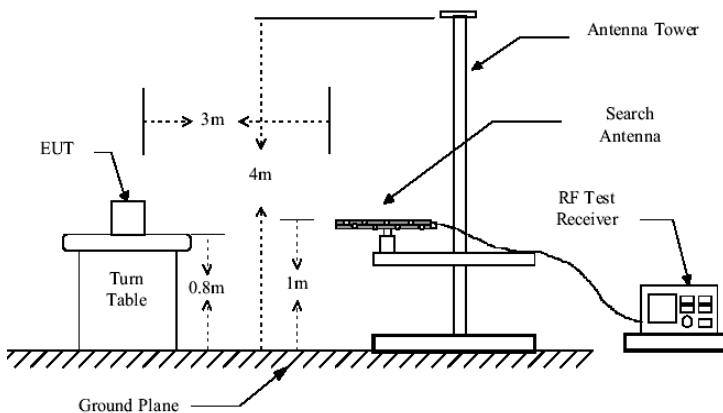

Above 1GHz

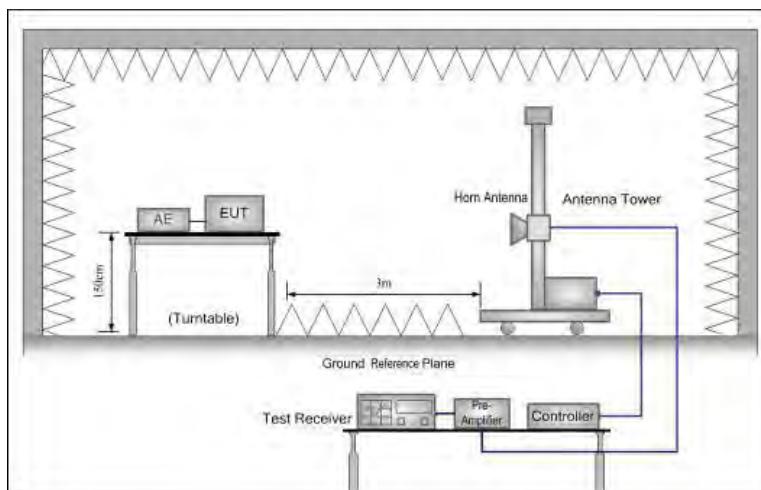

Test Procedure:

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which



	<p>maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none">(1) Span shall wide enough to fully capture the emission being measured;(2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;(3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test results:	PASS



Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI-7	HKE-010	Dec. 27, 2019
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Preamplifier	EMCI	EMC051845 SE	HKE-015	Dec. 27, 2019
Preamplifier	Agilent	83051A	HKE-016	Dec. 27, 2019
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2019
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2019
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




Test Data

Please refer to following diagram for individual
Below 1GHz

EUT :	WIFI camera	Model Name. :	C808
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2019-04-28
Test Mode :	802.11b Low Channel	Phase :	Horizontal
Test Voltage :	DC5V by Adapter AC 120V/60Hz		

Test Graph

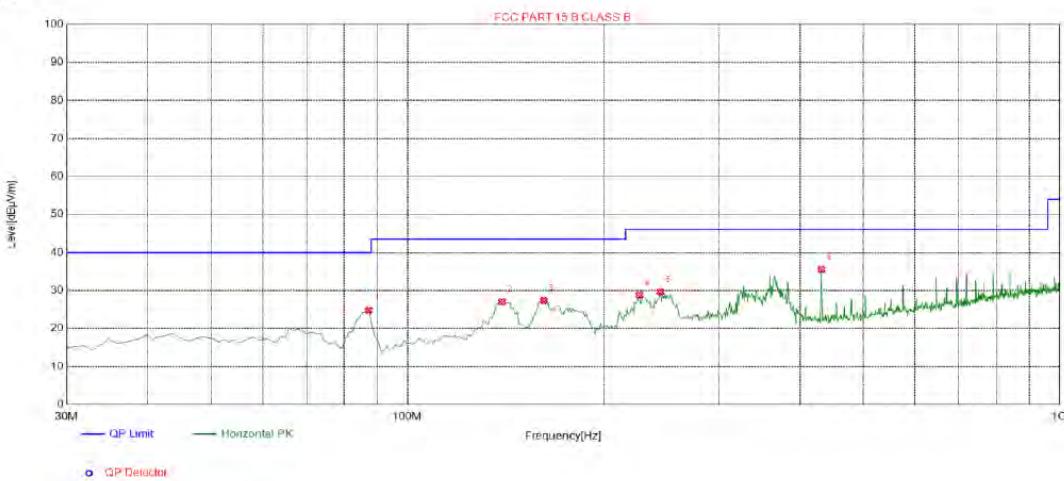

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	87.2300	24.84	-17.73	40.00	15.16	100	193	Horizontal
2	139.610	27.05	-19.16	43.50	16.45	100	193	Horizontal
3	161.920	27.41	-18.04	43.50	16.09	100	168	Horizontal
4	226.910	28.84	-14.39	46.00	17.16	100	120	Horizontal
5	244.370	29.69	-13.65	46.00	16.31	100	120	Horizontal
6	431.580	35.61	-9.78	46.00	10.39	100	291	Horizontal


Final Data List

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



EUT :	WIFI camera	Model Name. :	C808
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2019-04-28
Test Mode :	802.11b Low Channel	Phase :	Vertical
Test Voltage :	DC5V by Adapter AC 120V/60Hz		

Test Graph

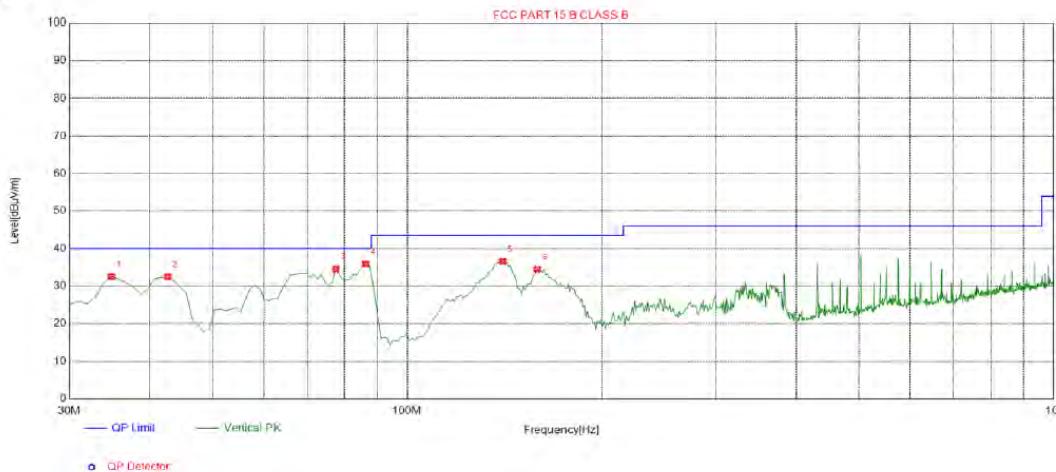

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.8500	32.53	-16.15	40.00	7.47	100	56	Vertical
2	42.6100	32.46	-14.08	40.00	7.54	100	284	Vertical
3	77.5300	34.56	-19.03	40.00	5.44	100	94	Vertical
4	86.2600	35.92	-17.97	40.00	4.08	100	122	Vertical
5	140.580	36.57	-19.17	43.50	6.93	100	293	Vertical
6	159.010	34.50	-18.29	43.50	9.00	100	300	Vertical

Final Data List

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

**Above 1GHz****RADIATED EMISSION TEST**

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4824	62.38	-3.64	58.74	74	-15.26	Peak
4824	41.17	-3.62	37.55	54	-16.45	AVG
7236	63.51	-0.95	62.56	74	-11.44	Peak
7236	40.96	-0.95	40.01	54	-13.99	AVG

Remark:Factor=Antenna Factor+Cable Loss+Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4824	63.16	-3.64	59.52	74	-14.48	Peak
4824	42.58	-3.62	38.96	54	-15.04	AVG
7236	61.09	-0.95	60.14	74	-13.86	Peak
7236	39.12	-0.95	38.17	54	-15.83	AVG

Remark:Factor=Antenna Factor+Cable Loss+Pre-amplifier



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4874	61.29	-3.51	57.78	74	-16.22	Peak
4874	40.56	-3.51	37.05	54	-16.95	AVG
7311	59.37	-0.82	58.55	74	-15.45	Peak
7311	38.26	-0.82	37.44	54	-16.56	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4874	59.24	-3.51	55.73	74	-18.27	Peak
4874	39.37	-3.51	35.86	54	-18.14	AVG
7311	57.28	-0.82	56.46	74	-17.54	Peak
7311	38.16	-0.82	37.34	54	-16.66	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier



HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4924	63.19	-3.43	59.76	74	-14.24	Peak
4924	42.56	-3.43	39.13	54	-14.87	AVG
7386	62.73	-0.75	61.98	74	-12.02	Peak
7386	40.27	-0.75	39.52	54	-14.48	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4924	62.83	-3.43	59.4	74	-14.6	Peak
4924	43.51	-3.43	40.08	54	-13.92	AVG
7386	61.73	-0.75	60.98	74	-13.02	Peak
7386	41.28	-0.75	40.53	54	-13.47	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4824	63.19	-3.64	59.55	74	-14.45	Peak
4824	42.06	-3.64	38.42	54	-15.58	AVG
7236	62.54	-0.95	61.59	74	-12.41	Peak
7236	40.87	-0.95	39.92	54	-14.08	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4824	61.76	-3.64	58.12	74	-15.88	Peak
4824	43.82	-3.64	40.18	54	-13.82	AVG
7236	60.71	-0.95	59.76	74	-14.24	Peak
7236	42.59	-0.95	41.64	54	-12.36	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4874	63.76	-3.51	60.25	74	-13.75	Peak
4874	44.58	-3.51	41.07	54	-12.93	AVG
7311	61.43	-0.82	60.61	74	-13.39	Peak
7311	43.19	-0.82	42.37	54	-11.63	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4874	62.76	-3.51	59.25	74	-14.75	Peak
4874	43.53	-3.51	40.02	54	-13.98	AVG
7311	60.71	-0.82	59.89	74	-14.11	Peak
7311	42.07	-0.82	41.25	54	-12.75	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier



HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4924	64.59	-3.43	61.16	74	-12.84	Peak
4924	44.57	-3.43	41.14	54	-12.86	AVG
7386	63.53	-0.75	62.78	74	-11.22	Peak
7386	43.17	-0.75	42.42	54	-11.58	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4924	64.13	-3.43	60.7	74	-13.3	Peak
4924	43.15	-3.43	39.72	54	-14.28	AVG
7386	62.97	-0.75	62.22	74	-11.78	Peak
7386	42.28	-0.75	41.53	54	-12.47	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits	Margin (dB)	Detector Type
4824	65.13	-3.64	61.49	74	-12.51	Peak
4824	46.12	-3.64	42.48	54	-11.52	AVG
7236	64.18	-0.95	63.23	74	-10.77	Peak
7236	45.27	-0.95	44.32	54	-9.68	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits	Margin (dB)	Detector Type
4824	64.75	-3.64	61.11	74	-12.89	Peak
4824	45.83	-3.64	42.19	54	-11.81	AVG
7236	64.51	-0.95	63.56	74	-10.44	Peak
7236	44.27	-0.95	43.32	54	-10.68	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4874	65.19	-3.51	61.68	74	-12.32	Peak
4874	43.92	-3.51	40.41	54	-13.59	AVG
7311	63.46	-0.82	62.64	74	-11.36	Peak
7311	42.69	-0.82	41.87	54	-12.13	AVG

Remark: Factor=Antenna Factor+Cable Loss+Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4874	63.12	-3.51	59.61	74	-14.39	Peak
4874	42.84	-3.51	39.33	54	-14.67	AVG
7311	61.87	-0.82	61.05	74	-12.95	Peak
7311	41.82	-0.82	41	54	-13	AVG

Remark: Factor=Antenna Factor+Cable Loss+Pre-amplifier



HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4924	62.85	-3.43	59.42	74	-14.58	Peak
4924	41.37	-3.43	37.94	54	-16.06	AVG
7386	60.96	-0.35	60.61	74	-13.39	Peak
7311	39.53	-0.35	39.18	54	-14.82	AVG

Remark: Factor=Antenna Factor+Cable Loss+Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4924	61.28	-3.43	57.85	74	-16.15	Peak
4924	40.72	-3.43	37.29	54	-16.71	AVG
7386	59.73	-0.35	59.38	74	-14.62	Peak
7311	38.16	-0.35	37.81	54	-16.19	AVG

Remark: Factor=Antenna Factor+Cable Loss+Pre-amplifier



LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4844	62.59	-3.63	58.96	74	-15.04	Peak
4844	42..37	-3.63	#VALUE!	54	#VALUE!	AVG
7266	61.27	-0.94	60.33	74	-13.67	Peak
7266	41.67	-0.94	40.73	54	-13.27	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4844	63.17	-3.63	59.54	74	-14.46	Peak
4844	43.63	-3.63	40	54	-14	AVG
7266	62.94	-0.94	62	74	-12	Peak
7266	42.27	-0.94	41.33	54	-12.67	AVG

Remark: Factor=Antenna Factor+Cable Loss-Pre-amplifier



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4874	62.38	-3.63	58.75	74	-15.25	Peak
4874	42.97	-3.63	39.34	54	-14.66	AVG
7311	61.73	-0.94	60.79	74	-13.21	Peak
7311	41.29	-0.94	40.35	54	-13.65	AVG

Remark: Factor=Antenna Factor+Cable Loss+Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4874	63.49	-3.63	59.86	74	-14.14	Peak
4874	41.57	-3.63	37.94	54	-16.06	AVG
7311	62.83	-0.94	61.89	74	-12.11	Peak
7311	41.85	-0.94	40.91	54	-13.09	AVG

Remark: Factor=Antenna Factor+Cable Loss+Pre-amplifier



HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4904	64.18	-3.43	60.75	74	-13.25	Peak
4904	43.79	-3.43	40.36	54	-13.64	AVG
7356	63.17	-0.75	62.42	74	-11.58	Peak
7356	42.05	-0.75	41.3	54	-12.7	AVG

Remark: Factor=Antenna Factor+Cable Loss+Pre-amplifier

Vertical:

Frequency (MHz)	Reading Result (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
4904	63.12	-3.43	59.69	74	-14.31	Peak
4904	42.18	-3.43	38.75	54	-15.25	AVG
7356	61.79	-0.75	61.04	74	-12.96	Peak
7356	40.16	-0.75	39.41	54	-14.59	AVG

Remark: Factor=Antenna Factor+Cable Loss+Pre-amplifier


Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Test Result of Radiated Spurious at Band edges**

Operation Mode:
802.11b Mode TX CH Low (2412MHz)


Horizontal

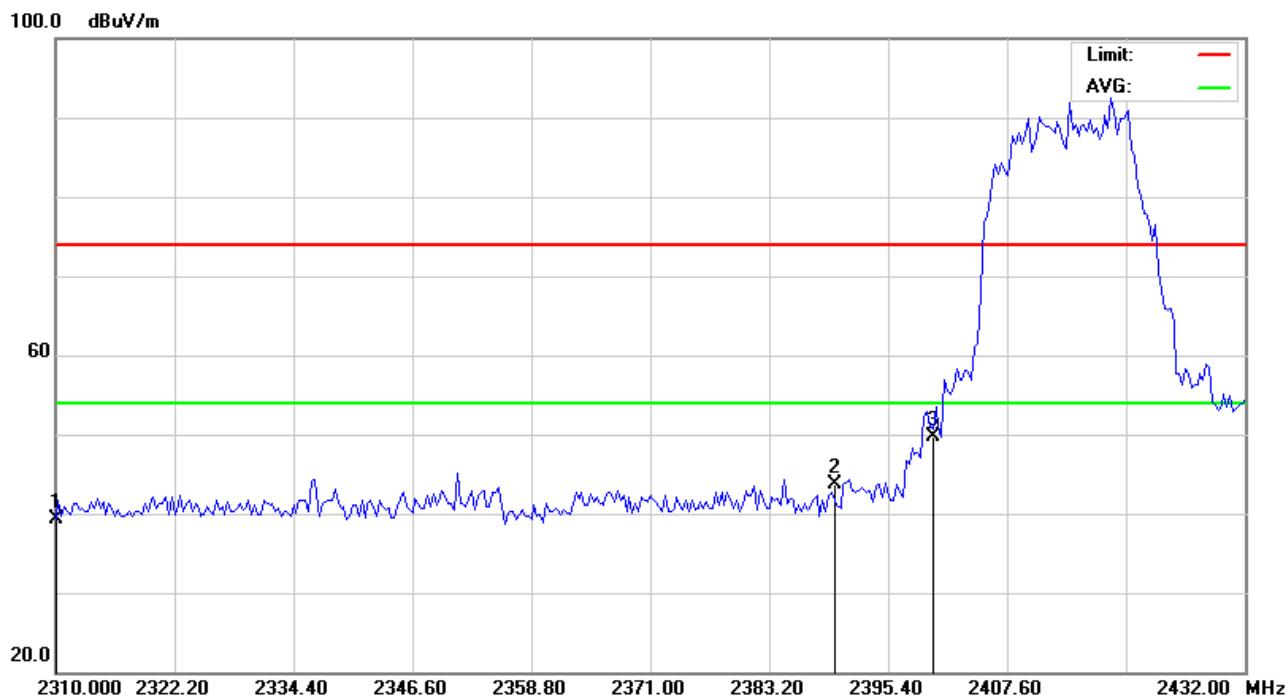

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Over Detector
1		2310.000	43.27	-3.87	39.40	74.00	-34.60	peak
2		2390.000	46.84	-3.14	43.70	74.00	-30.30	peak
3	*	2400.000	52.74	-3.04	49.70	74.00	-24.30	peak



Vertical:

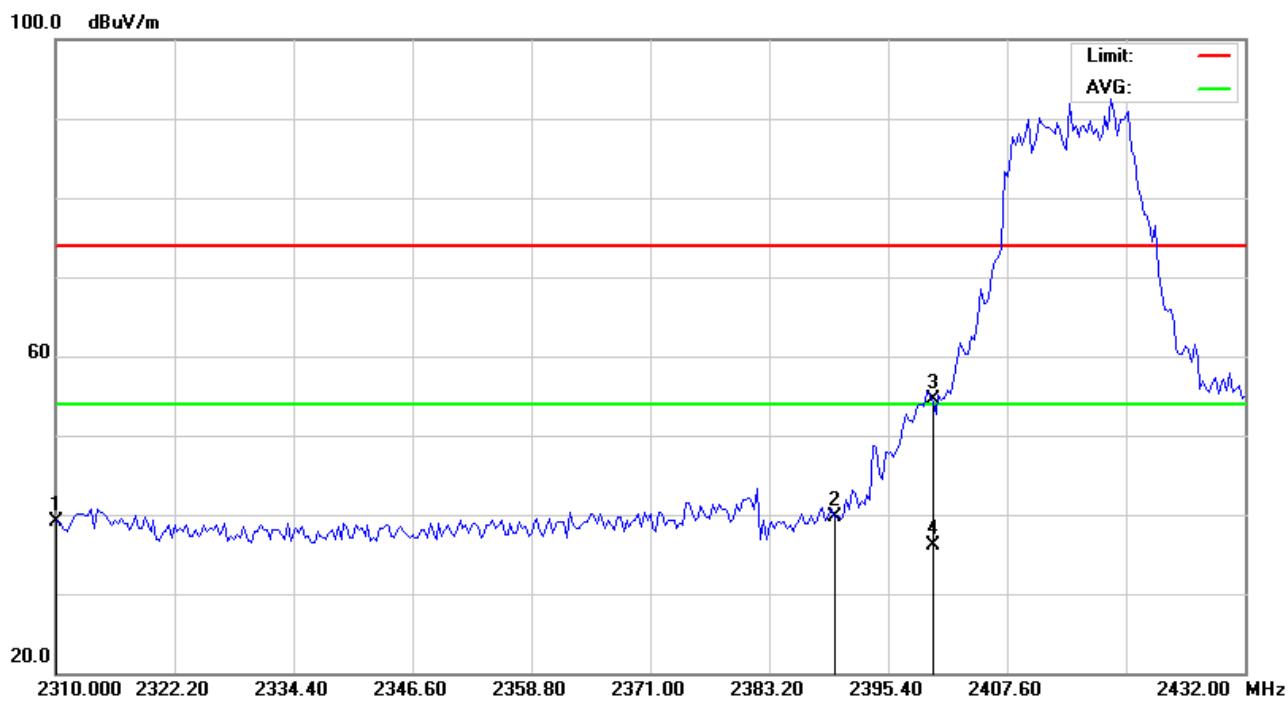


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	42.97	-3.87	39.10	74.00	-34.90	peak
2		2390.000	42.84	-3.14	39.70	74.00	-34.30	peak
3		2400.000	57.54	-3.04	54.50	74.00	-19.50	peak
4	*	2400.000	39.05	-3.04	36.01	54.00	-17.99	AVG



Operation Mode: TX CH High (2462MHz)


Horizontal

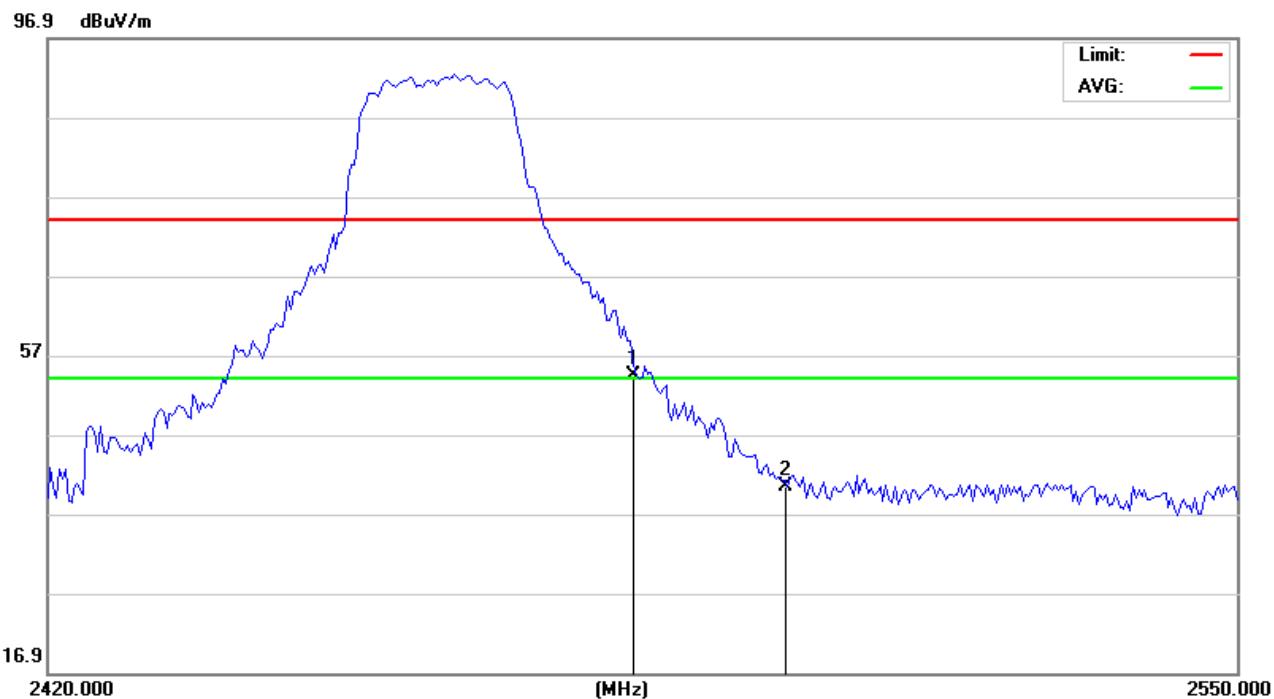

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit dBuV/m	Over dB	Over Detector
			Level dBuV	Factor dB	ment dBuV/m			
1	*	2483.500	71.82	-17.35	54.47	74.00	-19.53	peak
2		2500.000	57.74	-17.30	40.44	74.00	-33.56	peak



Vertical:

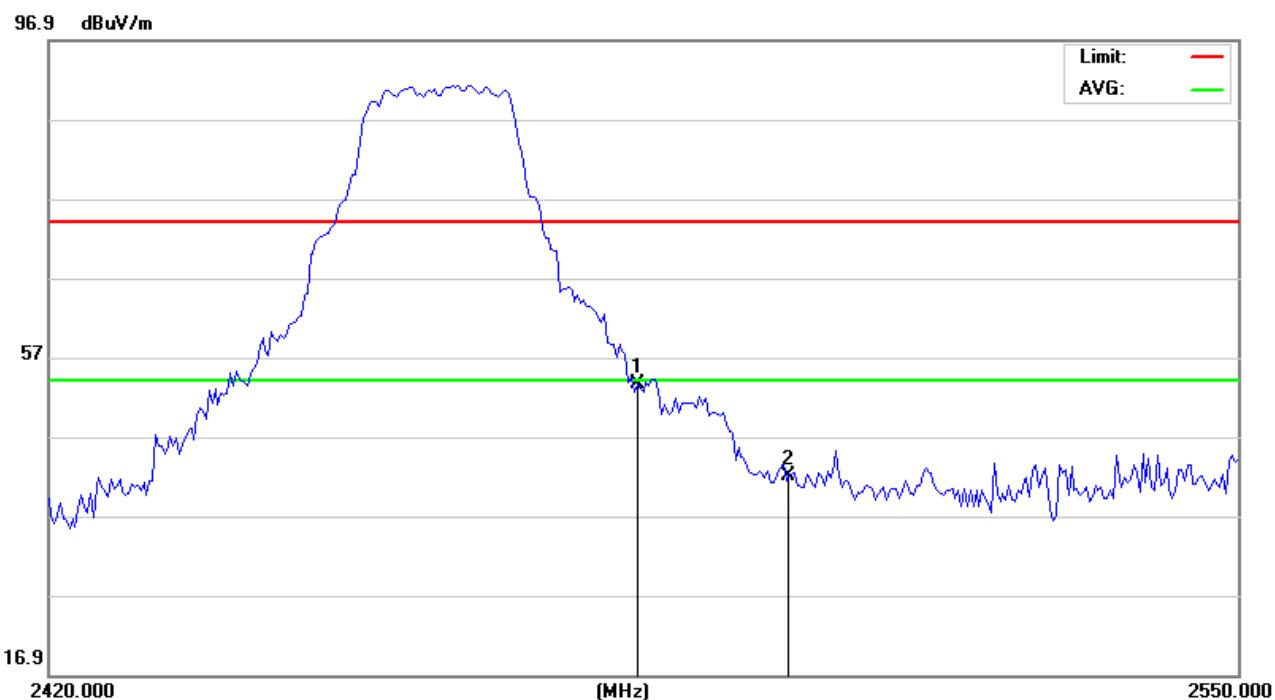


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Over Detector
1	*	2483.500	70.90	-17.35	53.55	74.00	-20.45	peak
2		2500.000	59.35	-17.30	42.05	74.00	-31.95	peak



Operation Mode: 802.11g Mode TX CH Low (2412MHz)


Horizontal

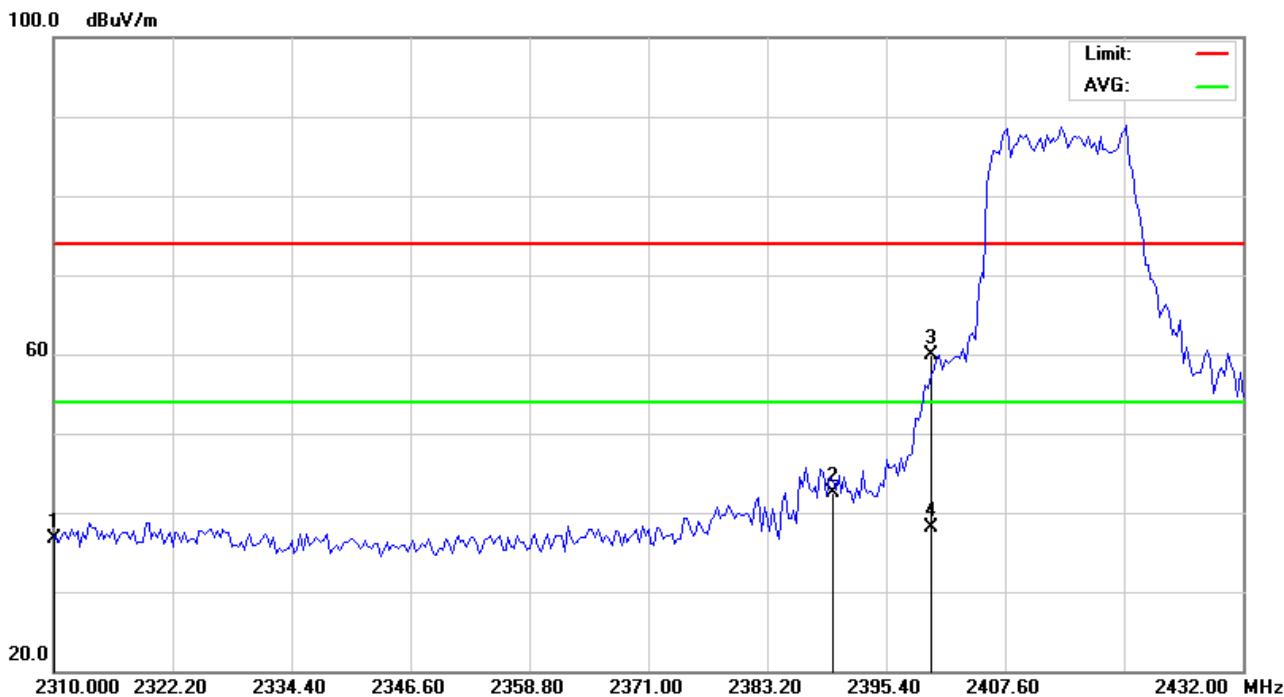

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over
			Level dBuV	Factor dB	ment dBuV/m		
1		2310.000	40.67	-3.87	36.80	74.00	-37.20 peak
2		2390.000	45.64	-3.14	42.50	74.00	-31.50 peak
3	*	2400.000	63.04	-3.04	60.00	74.00	-14.00 peak
4		2400.000	41.12	-3.04	38.08	54.00	-15.92 AVG



Vertical:

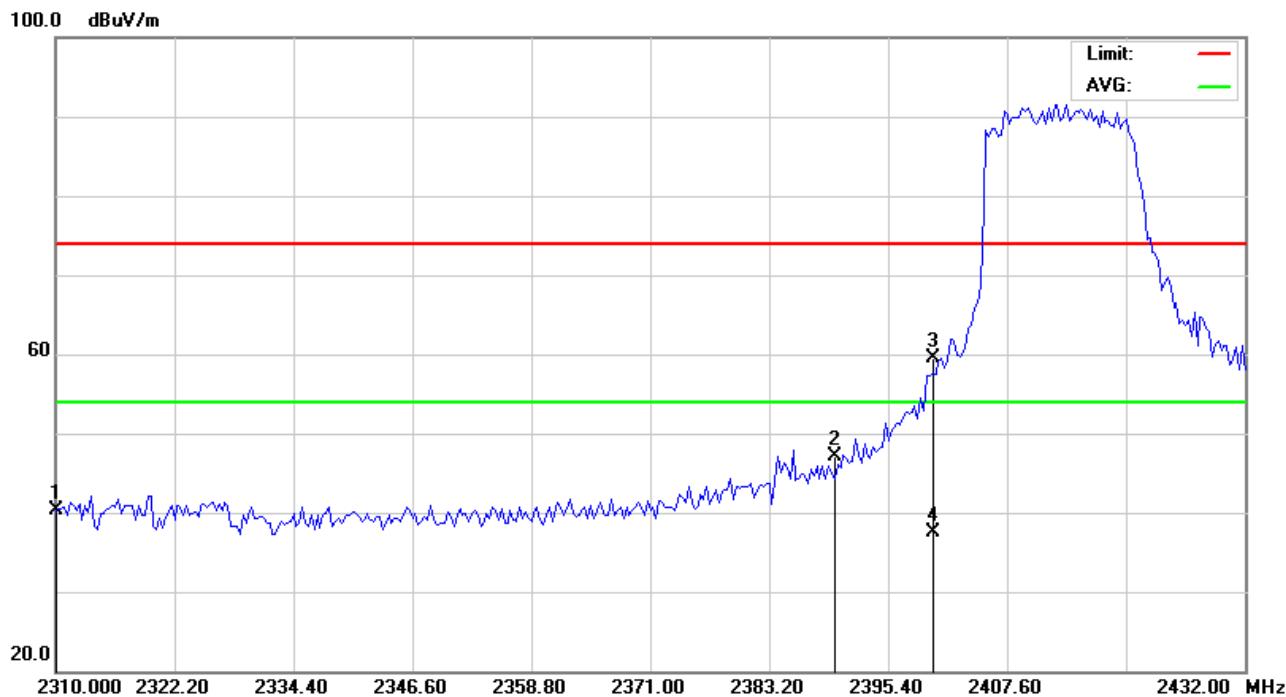


No.	Mk.	Freq. MHz	Reading Level dB _{uV}	Correct Factor dB	Measure- ment dB _{uV/m}	Limit dB _{uV/m}	Over dB	Detector
1		2310.000	44.07	-3.87	40.20	74.00	-33.80	peak
2		2390.000	50.34	-3.14	47.20	74.00	-26.80	peak
3	*	2400.000	62.54	-3.04	59.50	74.00	-14.50	peak
4		2400.000	40.56	-3.04	37.52	54.00	-16.48	AVG



Operation Mode: TX CH High (2462MHz)


Horizontal

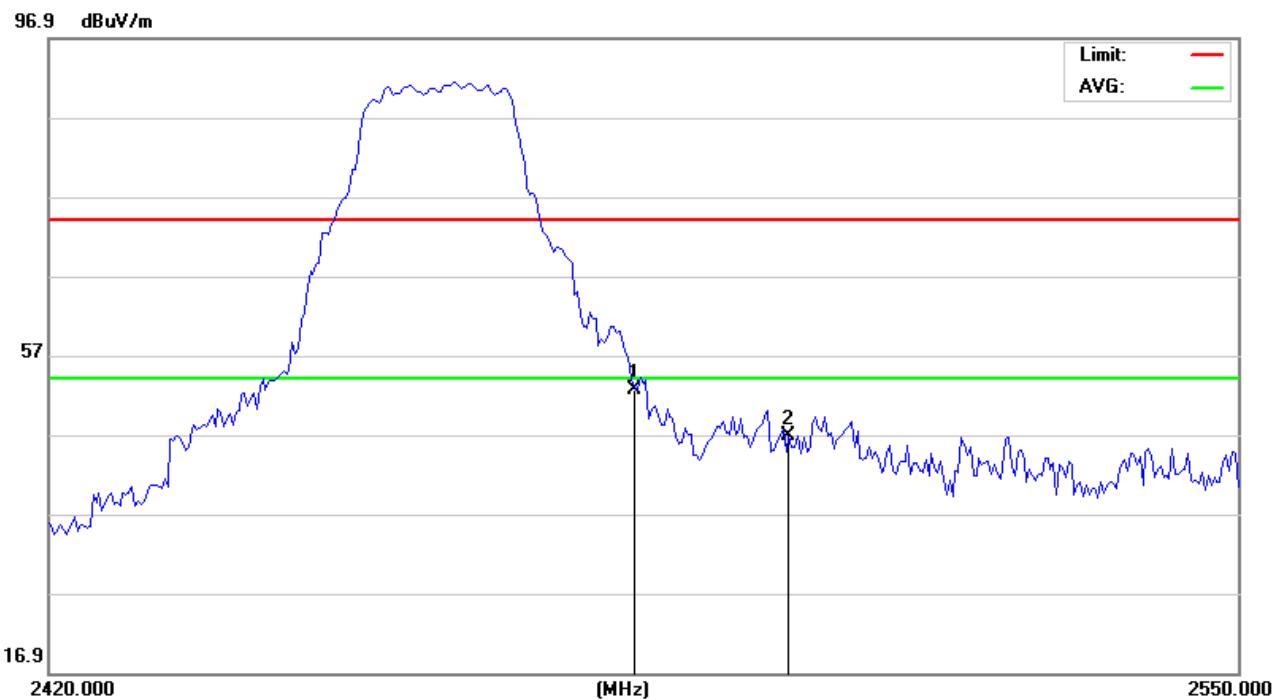

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	2483.500	70.00	-17.35	52.65	74.00	-21.35	peak
2		2500.000	64.05	-17.30	46.75	74.00	-27.25	peak



Vertical:

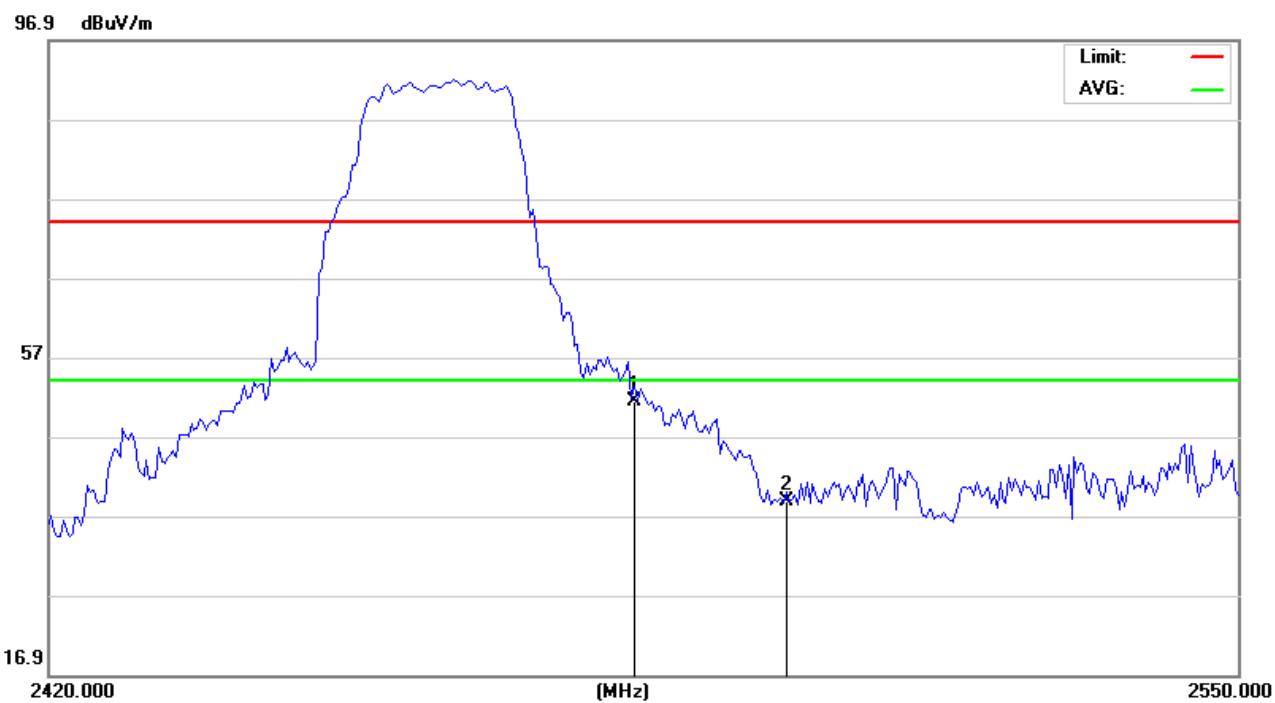


No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over	
			Level		ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	68.77	-17.35	51.42	74.00	-22.58	peak
2		2500.000	56.12	-17.30	38.82	74.00	-35.18	peak



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)


Horizontal

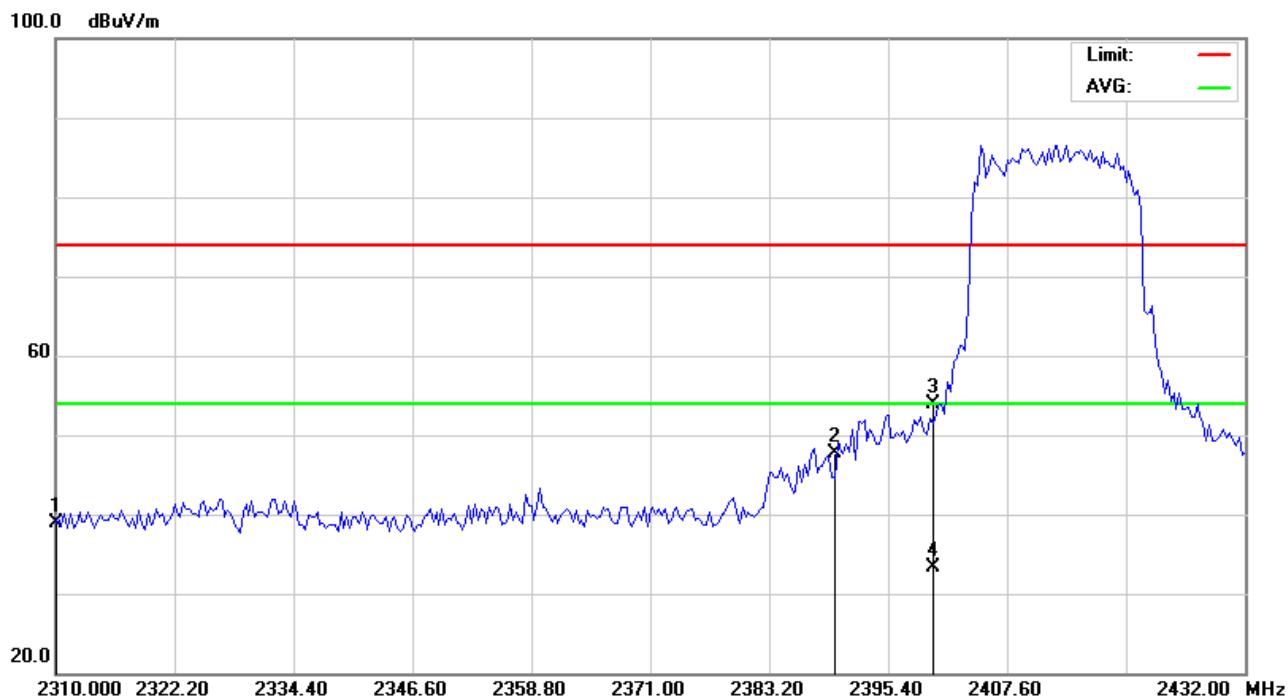

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over
			Level dBuV	Factor dB	ment dBuV/m		
1		2310.000	42.77	-3.87	38.90	74.00	-35.10 peak
2		2390.000	50.84	-3.14	47.70	74.00	-26.30 peak
3	*	2400.000	57.04	-3.04	54.00	74.00	-20.00 peak
4		2400.000	36.35	-3.04	33.31	54.00	-20.69 AVG



Vertical:

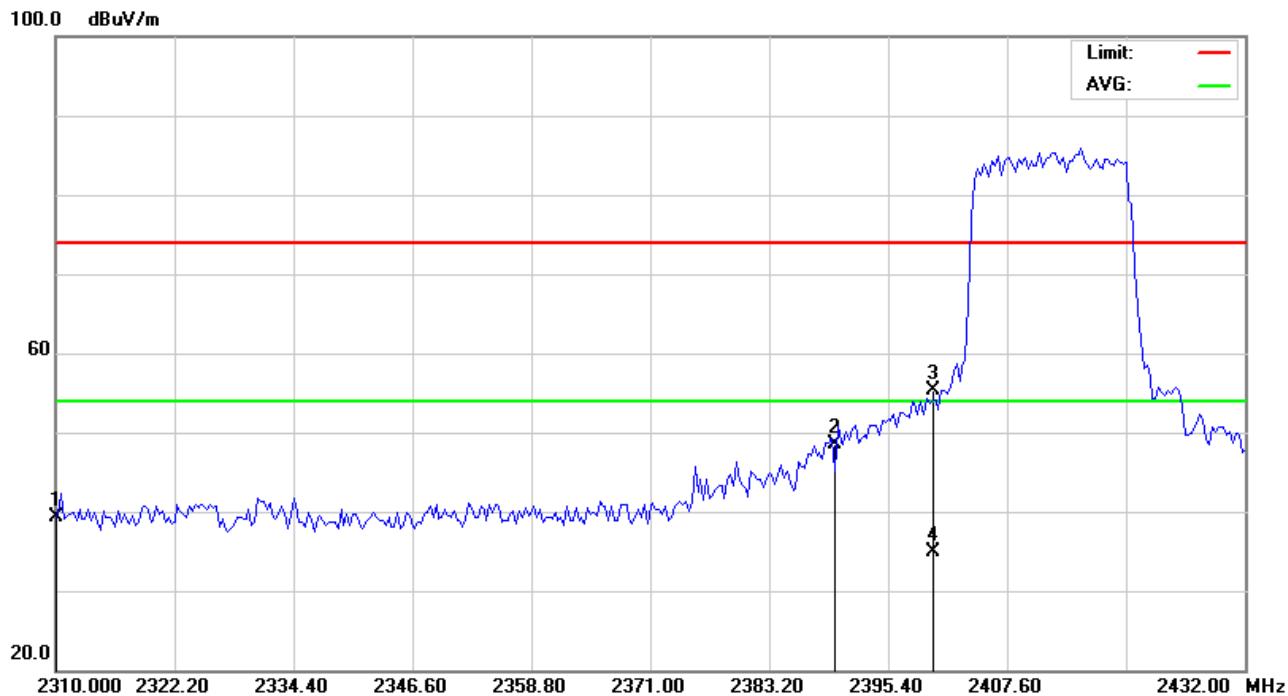


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Over Detector
1		2310.000	43.17	-3.87	39.30	74.00	-34.70	peak
2		2390.000	51.74	-3.14	48.60	74.00	-25.40	peak
3	*	2400.000	58.34	-3.04	55.30	74.00	-18.70	peak
4		2400.000	37.94	-3.04	34.90	54.00	-19.10	AVG



Operation Mode: TX CH High (2462MHz)


Horizontal

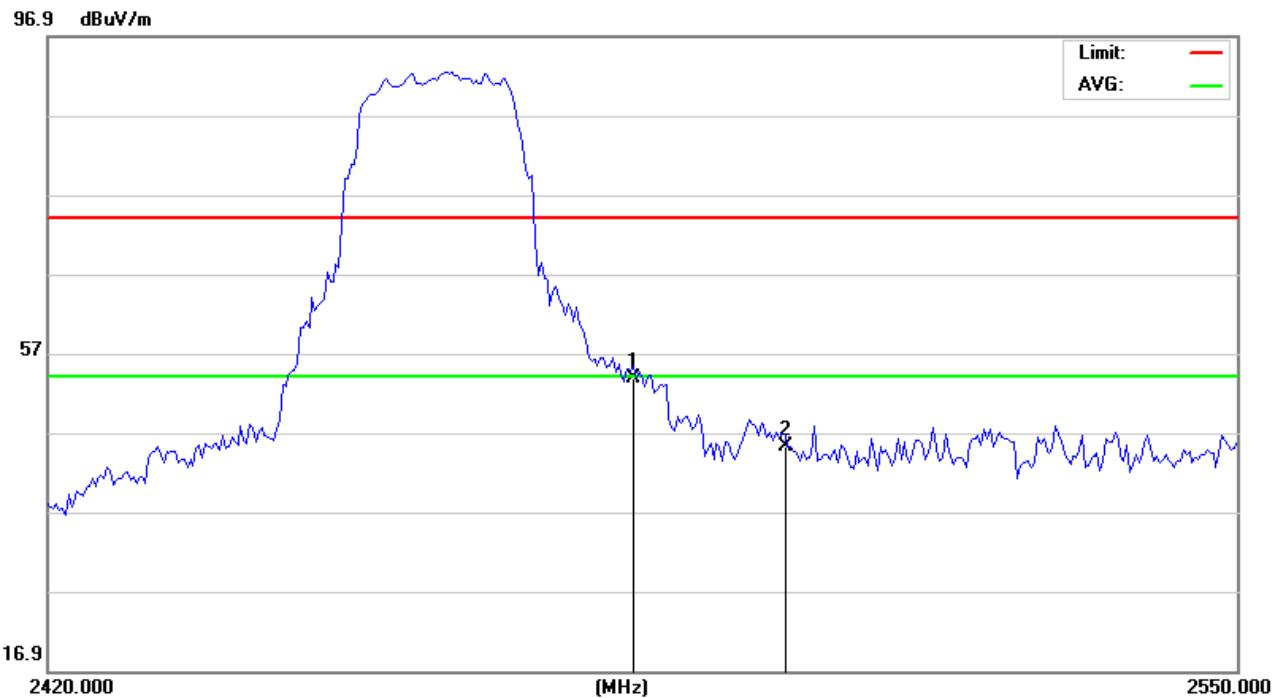

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	71.17	-17.35	53.82	74.00	-20.18	peak
2		2500.000	62.52	-17.30	45.22	74.00	-28.78	peak



Vertical:

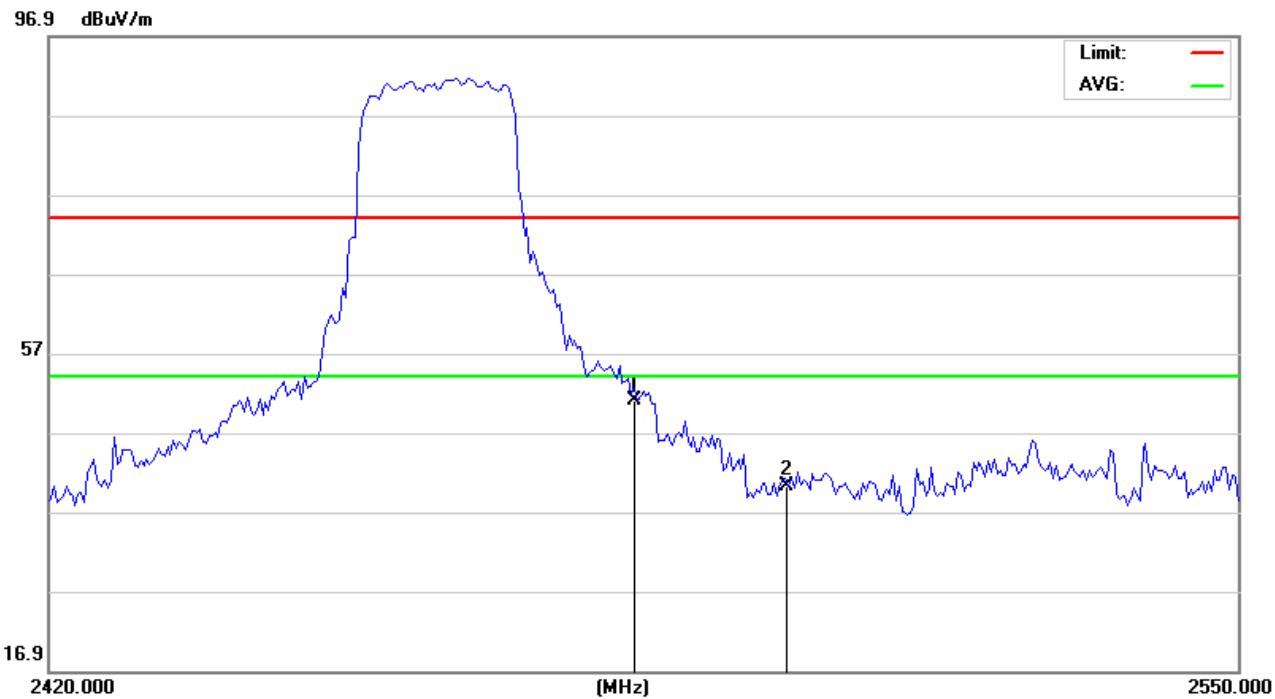


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	2483.500	68.28	-17.35	50.93	74.00	-23.07	peak
2		2500.000	57.53	-17.30	40.23	74.00	-33.77	peak



Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)


Horizontal

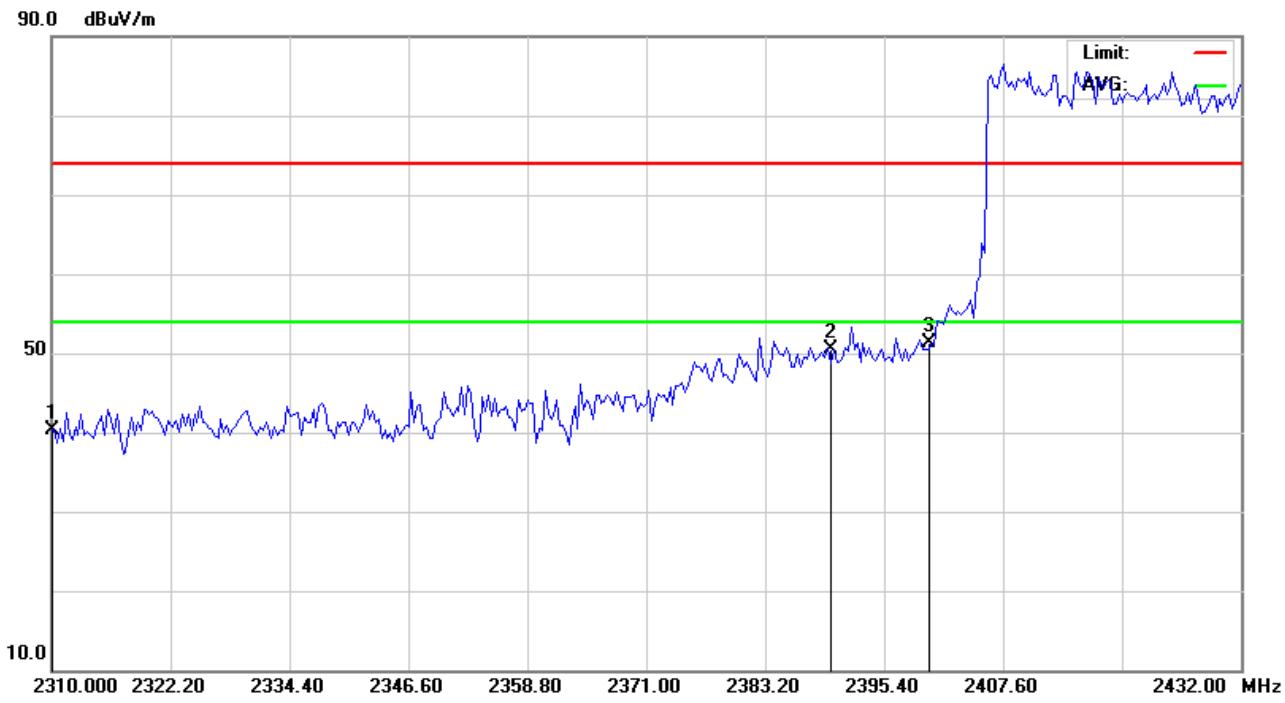

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Over Detector
1		2310.000	44.11	-3.87	40.24	74.00	-33.76	peak
2		2390.000	53.64	-3.14	50.50	74.00	-23.50	peak
3	*	2400.000	54.34	-3.04	51.30	74.00	-22.70	peak



Vertical:

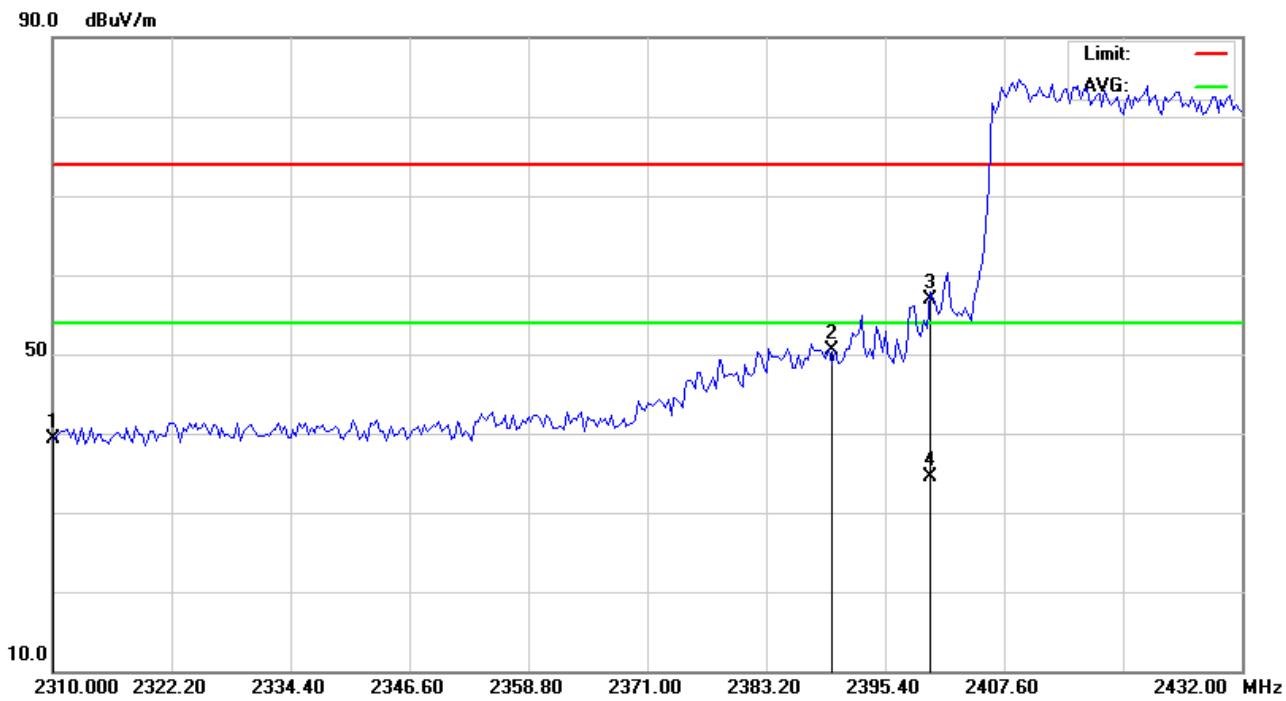


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Over Detector
1		2310.000	43.27	-3.87	39.40	74.00	-34.60	peak
2		2390.000	53.64	-3.14	50.50	74.00	-23.50	peak
3	*	2400.000	59.94	-3.04	56.90	74.00	-17.10	peak
4		2400.000	37.64	-3.04	34.60	54.00	-19.40	AVG



Operation Mode: TX CH High (2452MHz)

Horizontal


96.9 dBuV/m

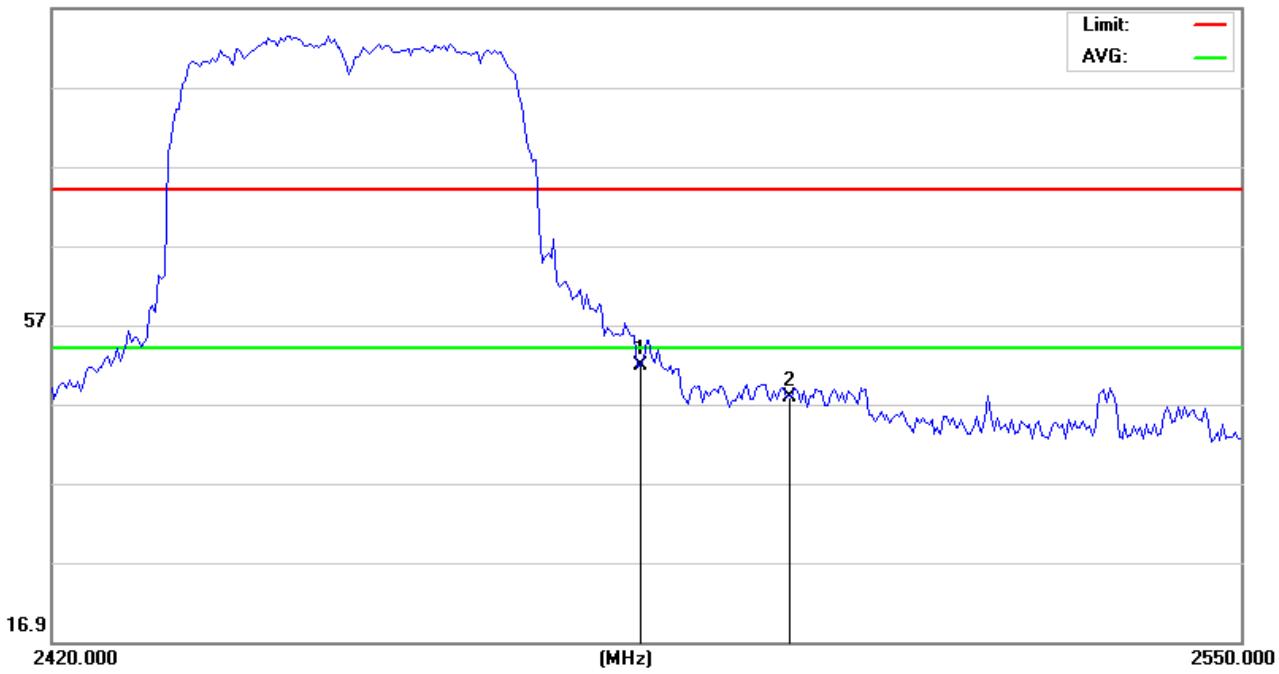

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	*	2483.500	69.22	-17.35	51.87	74.00	-22.13 peak
2		2500.000	65.07	-17.30	47.77	74.00	-26.23 peak



Vertical:

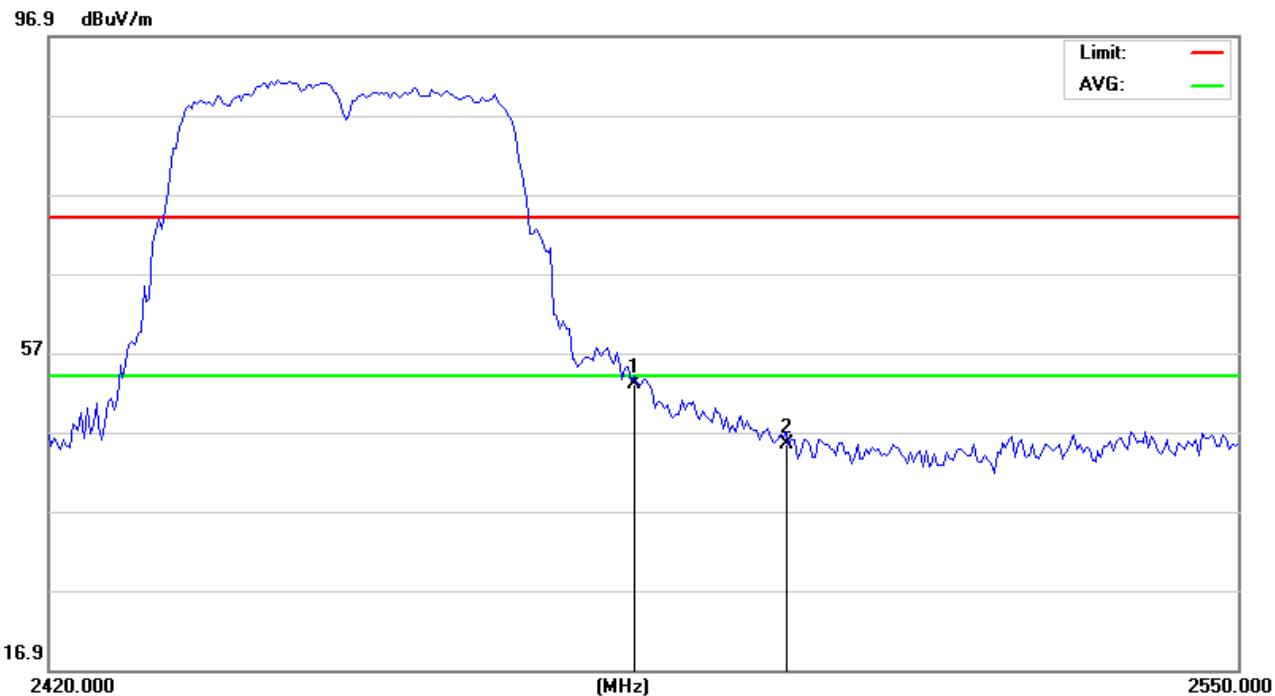

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	2483.500	70.31	-17.35	52.96	74.00	-21.04	peak
2		2500.000	62.66	-17.30	45.36	74.00	-28.64	peak



4.7. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 2dBi.




WIFI ANTENNA

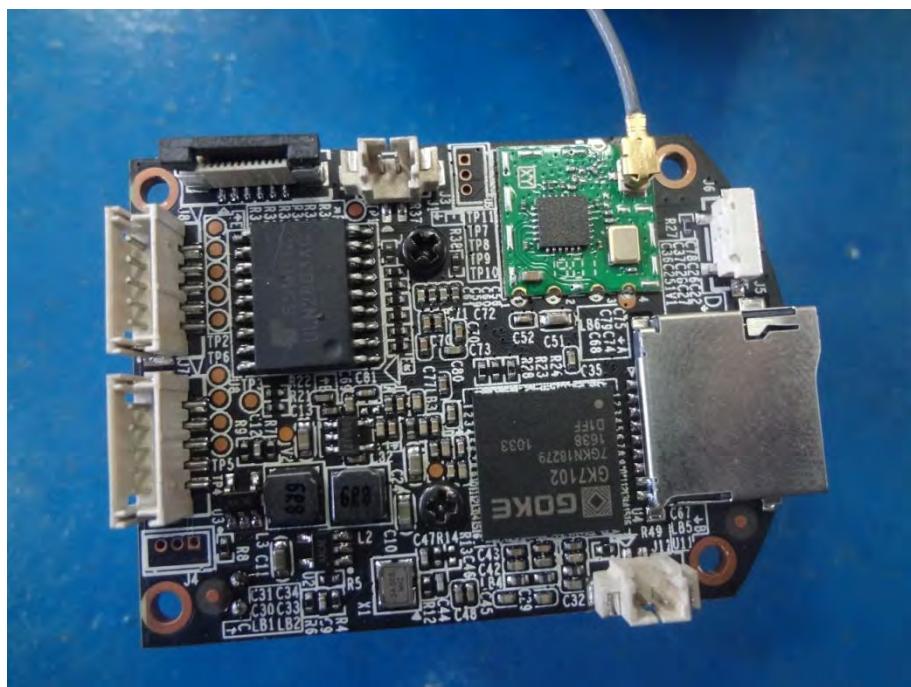

4.8. PHOTOGRAPH OF TEST

Radiated Emission

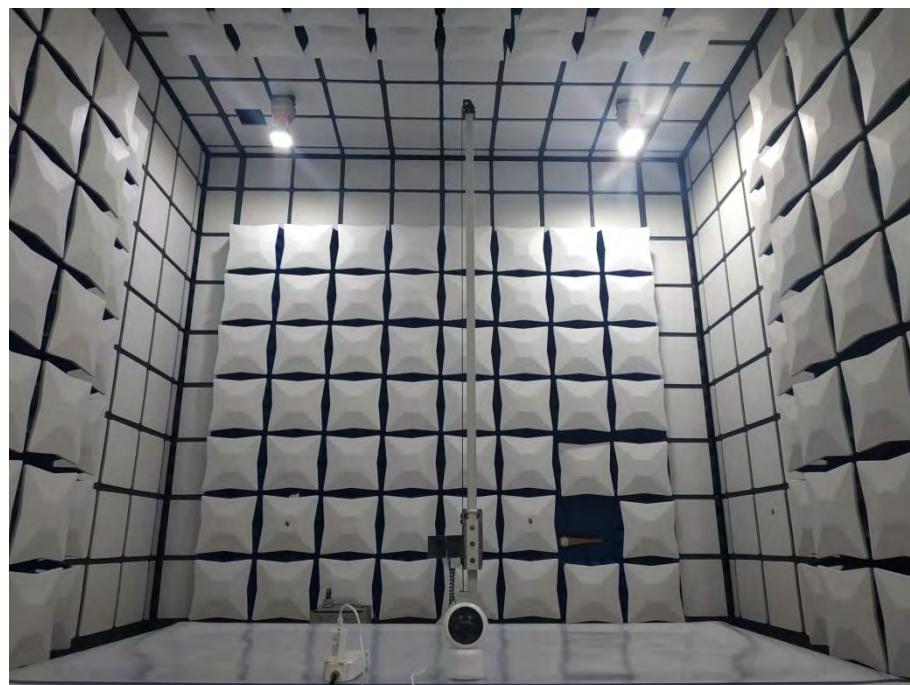





Conducted Emission









EUT

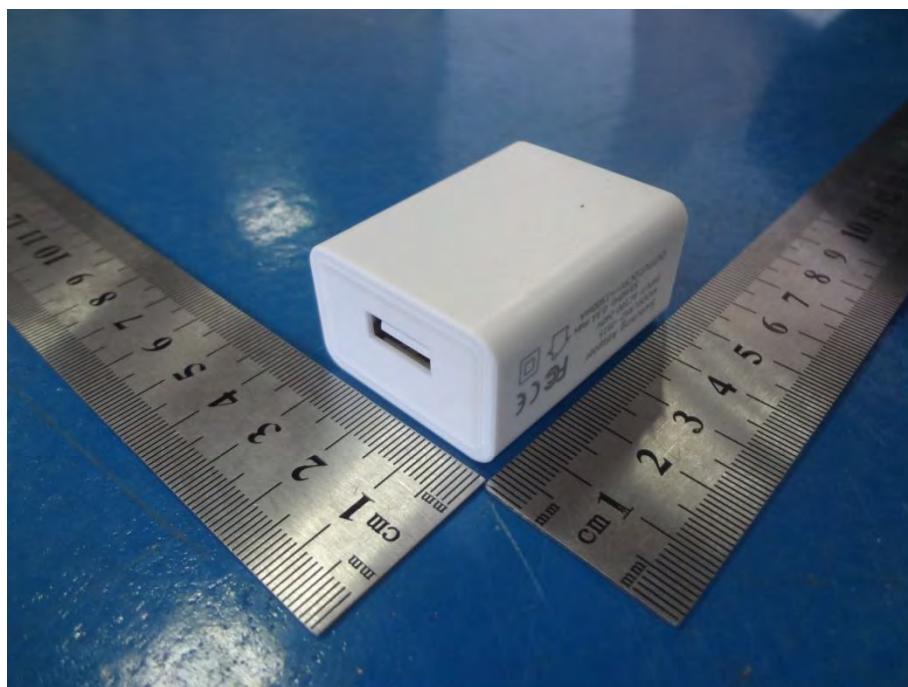


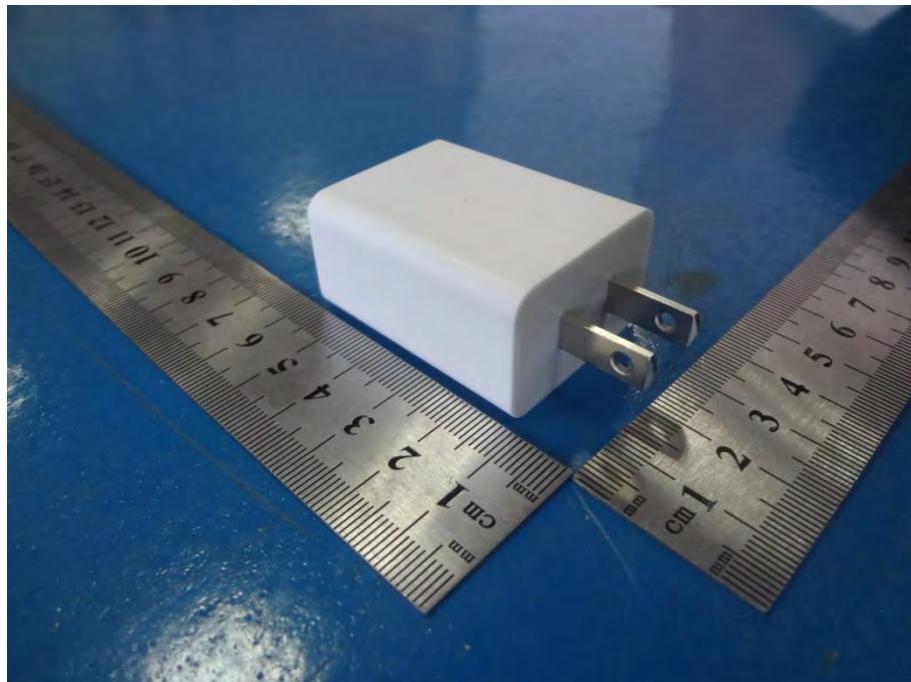


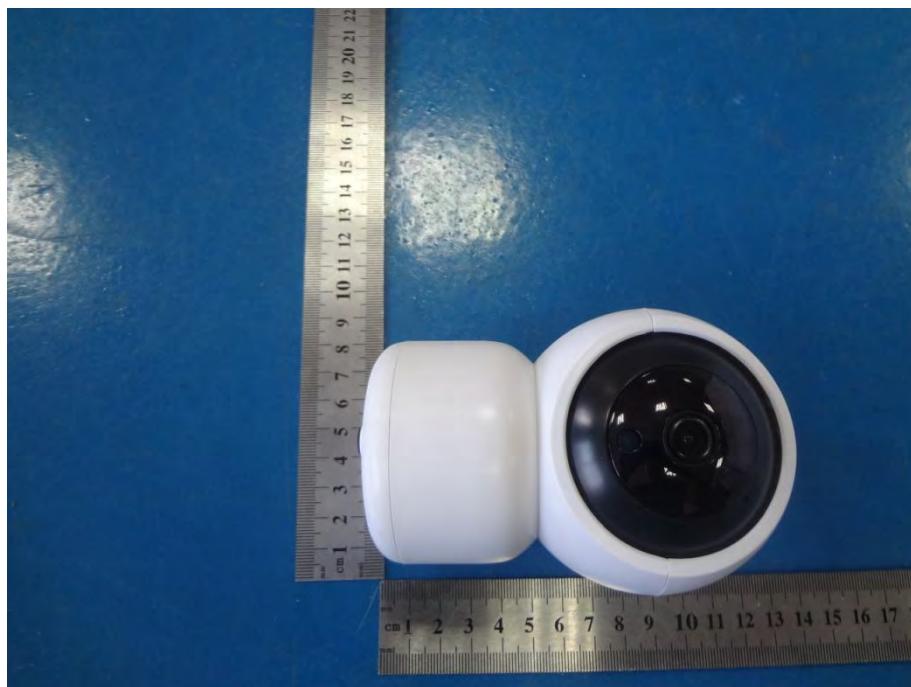
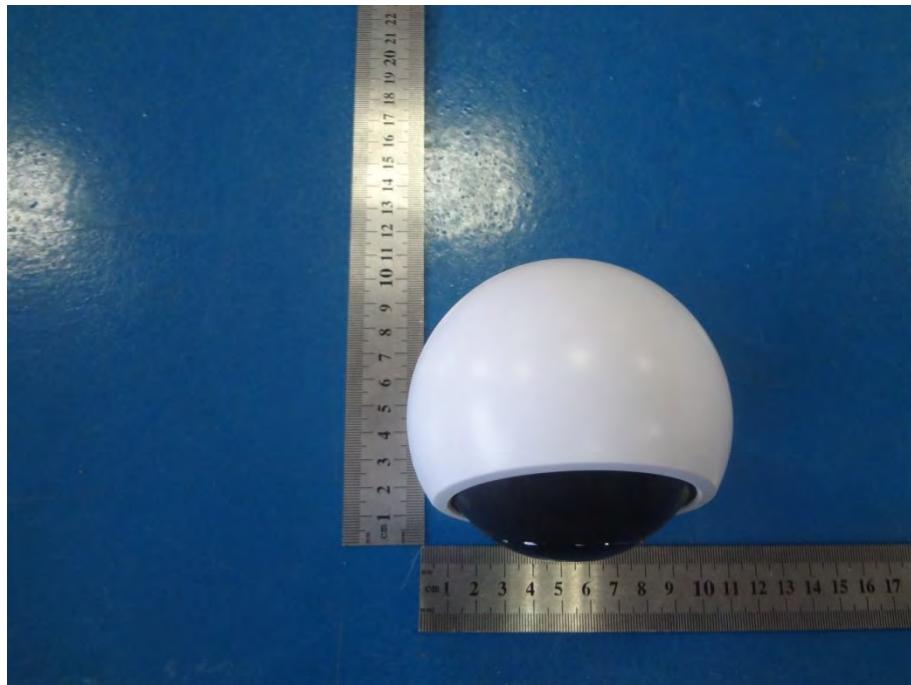






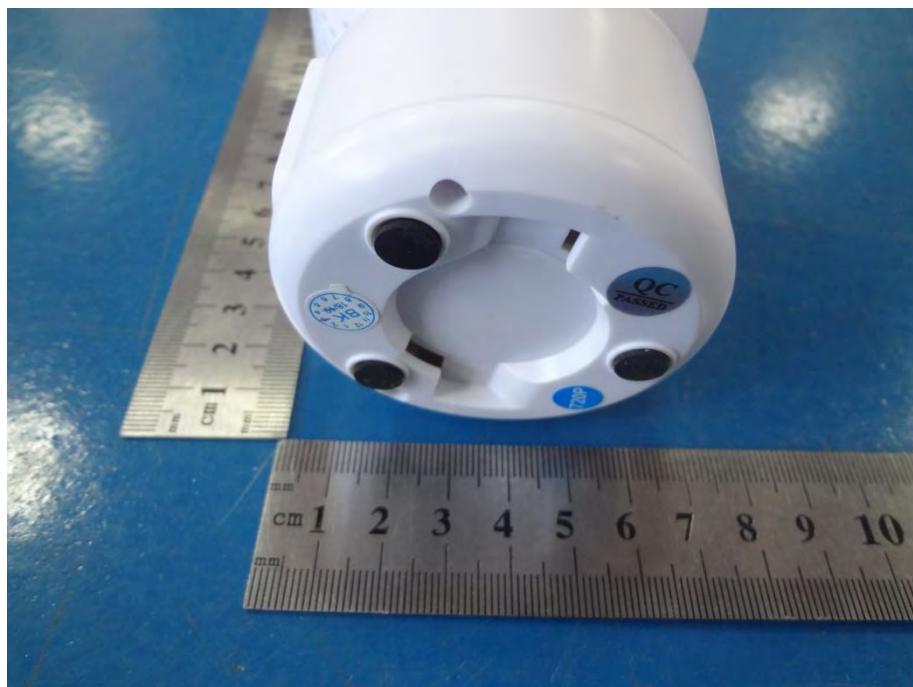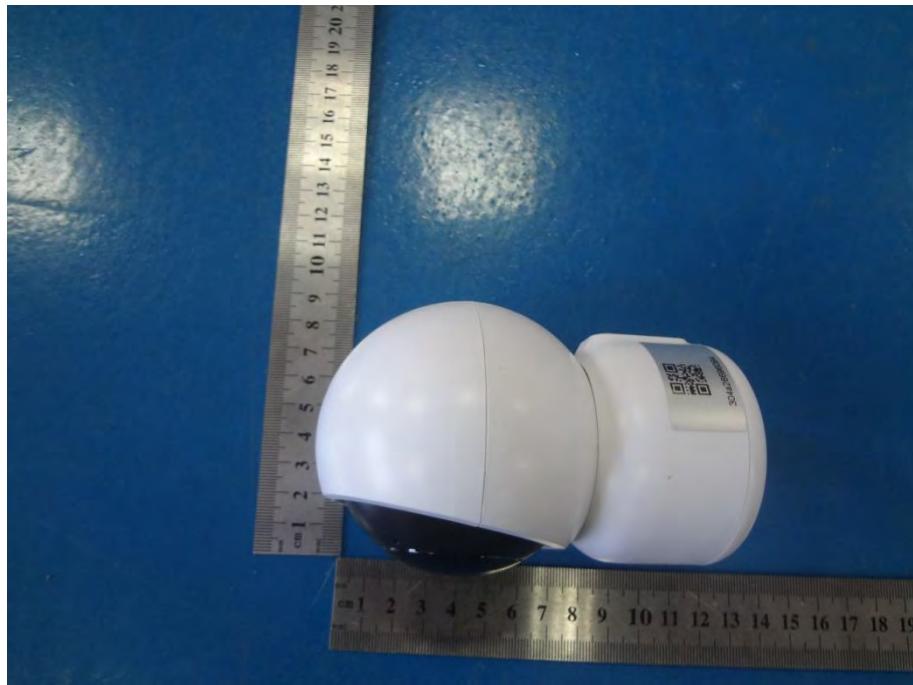



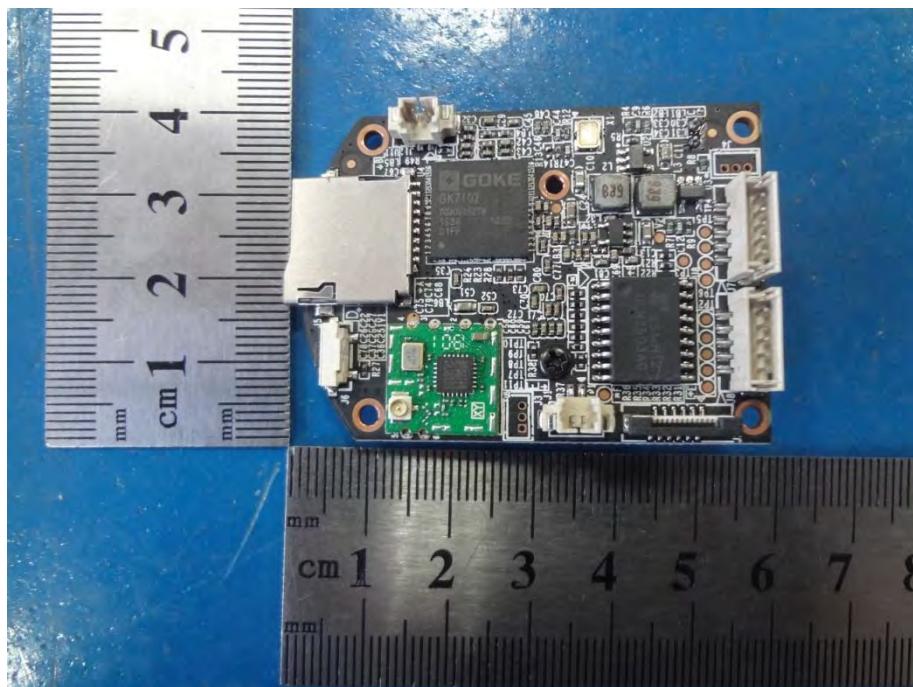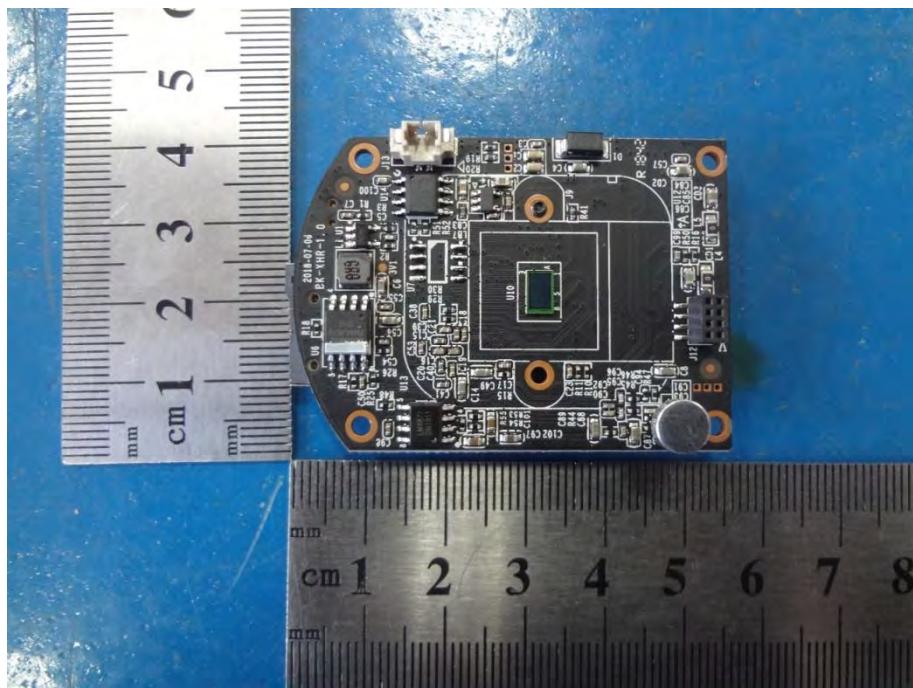

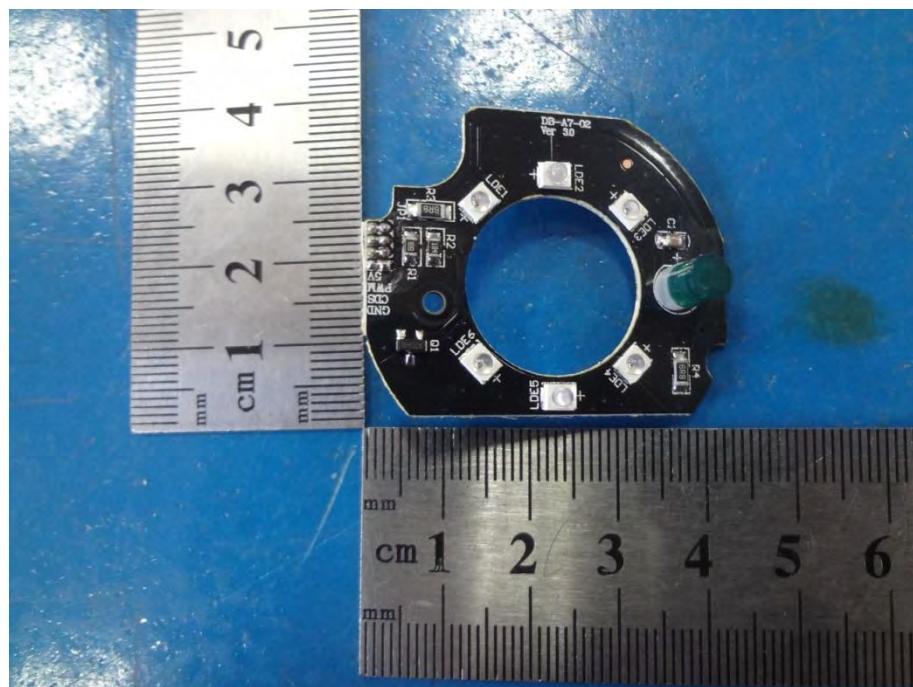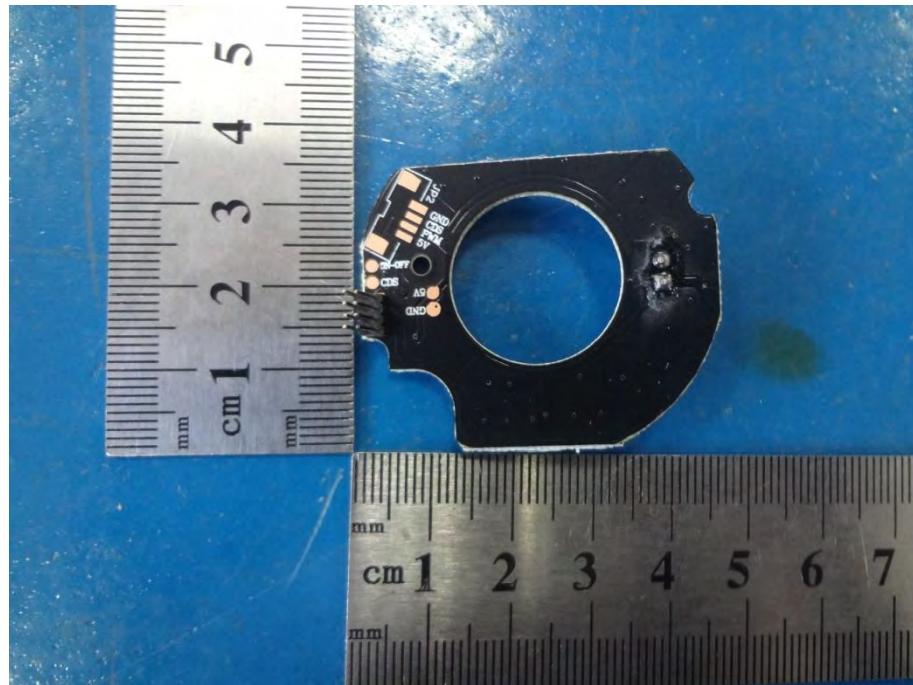

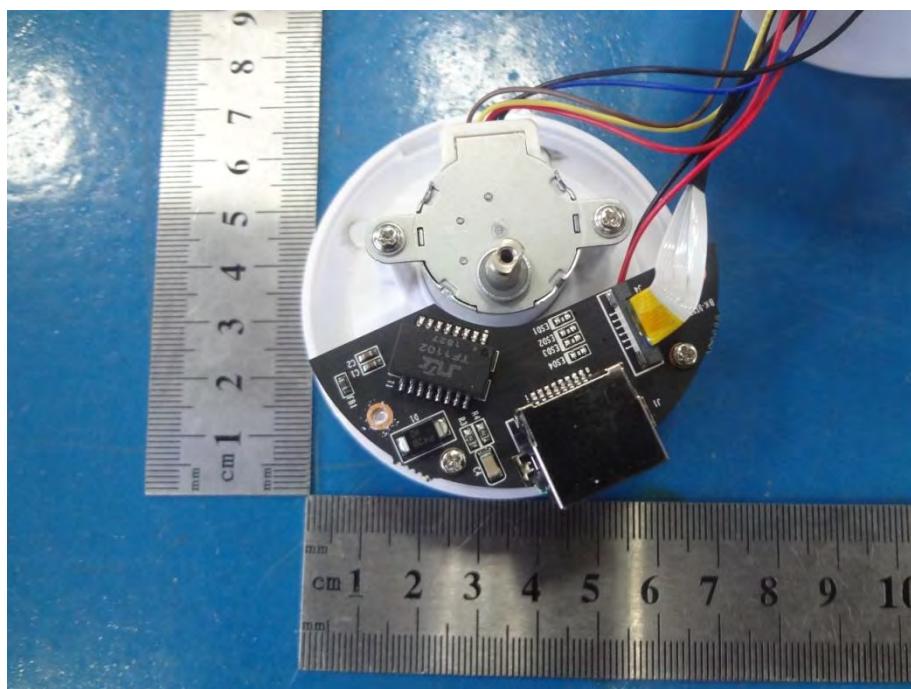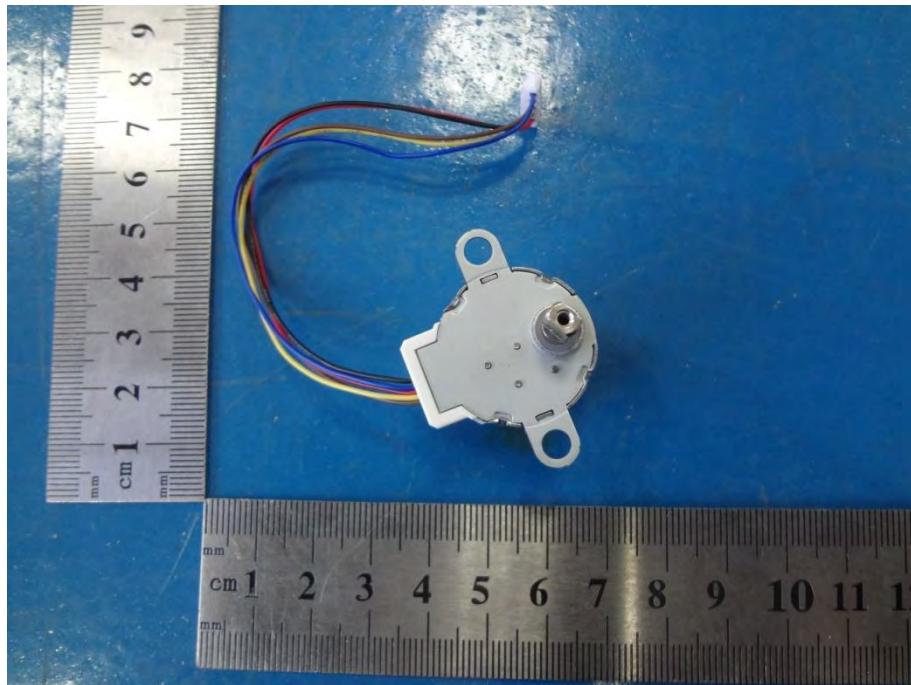

--The end of report--