

On your side



# TEST REPORT

FCC/IC DTS Test for SRM200A  
Certification

APPLICANT  
SEONG JI INDUSTRIAL CO.,LTD

REPORT NO.  
HCT-RF-1911-FI011

DATE OF ISSUE  
November 13, 2019

**HCT Co., Ltd.**


74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seocheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 634 6300 Fax. +82 31 645 6401

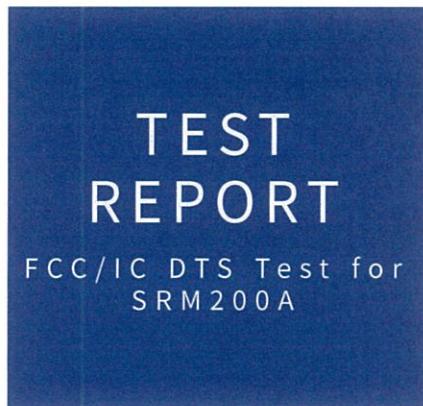

REPORT NO.  
HCT-RF-1911-FI011

DATE OF ISSUE  
November 13, 2019

FCC ID/IC  
2AS8LSRM200A / 25119-SRM200A

Applicant	SEONG JI INDUSTRIAL CO.,LTD 54-33, DongtanHana 1-gil, Hwaseong-si, Gyeonggi-do, 18423, Korea
Eut Type Model Name	Monarch Quad-mode module SRM200A
Modulation type	CCK/DSSS/OFDM
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s)	Part 15.247
IC Rule Part(s)	RSS-247 Issue 2 (February 2017), RSS-GEN Issue 5 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

Tested by  
Se Wook Park

(signature)

Technical Manager  
Jong Seok Lee

(signature)

HCT CO., LTD.  
Soo Chan Lee  
SooChan Lee / CEO

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	November 13, 2019	Initial Release

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance. measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance.

## CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	28
9. TEST RESULT	30
9.1 DUTY CYCLE	30
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	31
9.3 OUTPUT POWER	37
9.4 POWER SPECTRAL DENSITY	43
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	46
9.6 RADIATED SPURIOUS EMISSIONS	57
9.7 RADIATED RESTRICTED BAND EDGES	65
9.8 RECEIVER SPURIOUS EMISSIONS	69
9.9 POWERLINE CONDUCTED EMISSIONS	70
10. LIST OF TEST EQUIPMENT	74
11. ANNEX A_ TEST SETUP PHOTO	76

**1. EUT DESCRIPTION**

Model	SRM200A	
EUT Type	RF Module	
Power Supply	DC 5.0 ~ 12.0 V	
Frequency Range	2412 MHz - 2462 MHz	
Max. RF Output Power	<u>Peak Power</u>	802.11b: 17.38 dBm 802.11g: 20.05 dBm 802.11n(HT20): 19.91 dBm
	<u>Average Power</u>	802.11b: 11.55 dBm 802.11g: 12.17 dBm 802.11n(HT20): 12.09 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n(HT20)	
Number of Channels	11 Channels	
Antenna Specification	Antenna type: Dipole Antenna Peak Gain : 4.44 dBi	
Date(s) of Tests	September 09, 2019 ~ November 13, 2019	
PMN(Product Marketing Number)	SRM200A	
HVIN(Hardware Version Identification Number)	SRM200A	
FVIN(Firmware Version Identification Number)	N/A	
HMN(Host Marketing Name)	N/A	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032 ).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of  
ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

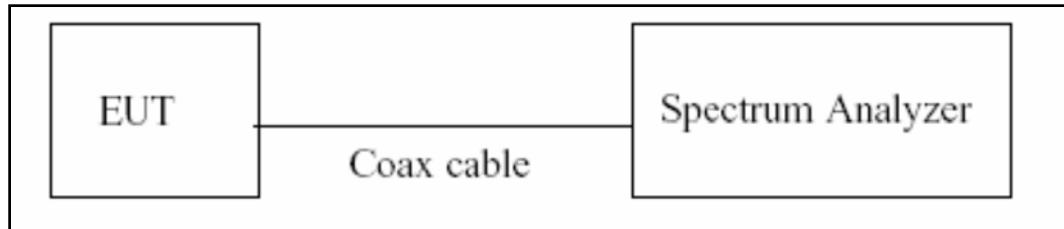

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6dB Bandwidth & 99 % Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration

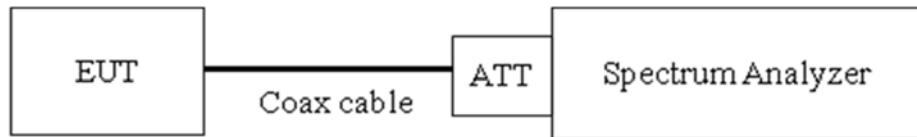

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### Test Procedure (99 % Bandwidth for IC)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\approx$  3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration

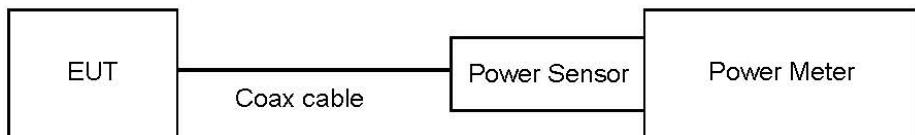

#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
  - : Measure the peak power of the transmitter.
  
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

#### 7.4. Power Spectral Density

##### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

##### Test Configuration

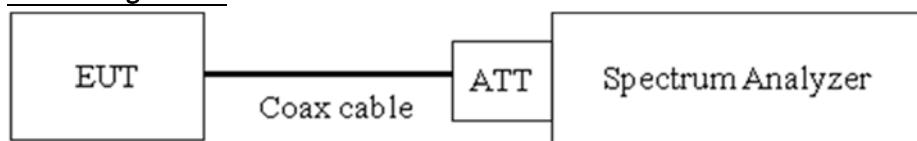

##### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3) RBW =  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- 4) VBW  $\geq 3 \times \text{RBW}$ .
- 5) Sweep = auto couple
- 6) Detector = peak
- 7) Trace Mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq$  2 x Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	21.30
100	19.83
200	20.19
300	20.13
400	20.23
500	20.25
600	20.32
700	20.35
800	20.35
900	20.34
1000	20.39
2000	20.44
2400	20.45
2500	20.57
3000	20.68
4000	20.89
5000	21.07
6000	21.06
7000	21.35
8000	21.32
9000	21.48
10000	21.56
11000	21.56
12000	21.68
13000	21.83
14000	21.90
15000	21.98
16000	22.04
17000	22.02
18000	22.08
19000	22.07
20000	22.14
21000	22.17
22000	22.31
23000	22.60
24000	22.34
25000	22.53
26000	21.07
Freq(MHz)	Factor(dB)

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

**7.6. Radiated Test****Limit****FCC**

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30

**IC**


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	$6.37/F(\text{kHz})$	300
0.490 – 1.705	$63.7/F(\text{kHz})$	30
1.705 – 30	0.08	30

**FCC&IC**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Configuration**


Below 30 MHz

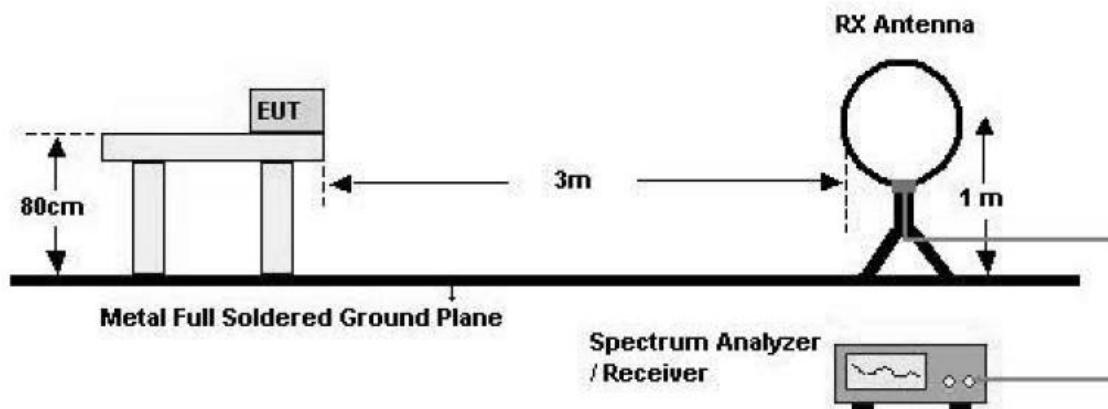

30 MHz - 1 GHz

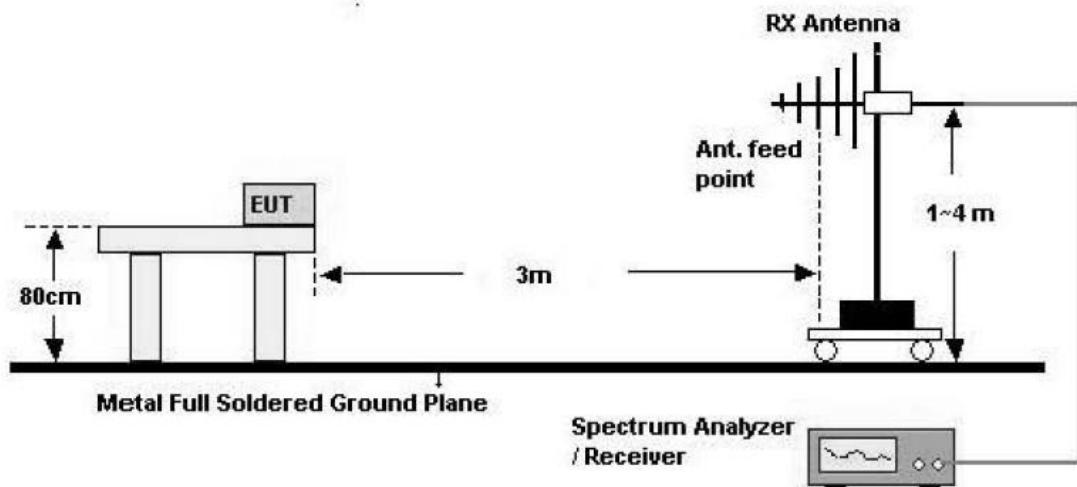

Above 1 GHz

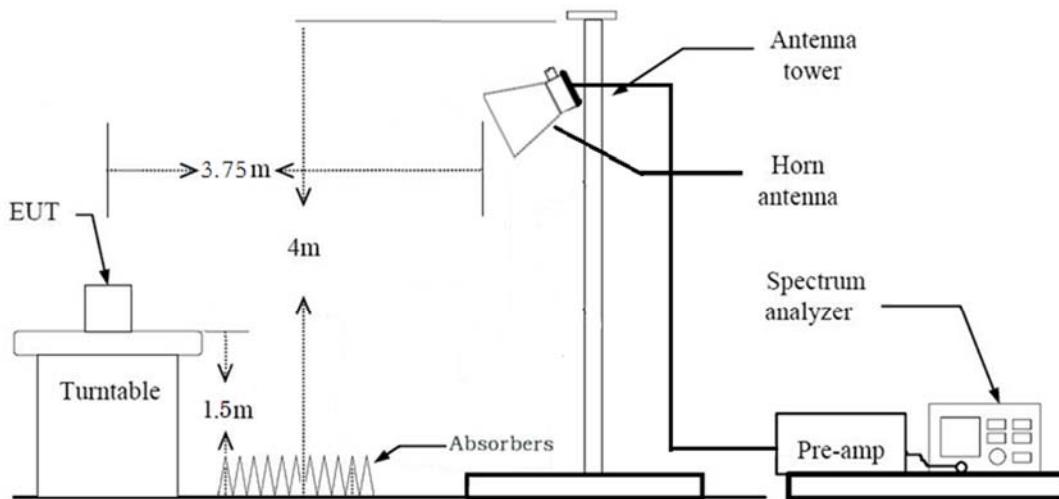

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor( $0.009 \text{ MHz} - 0.490 \text{ MHz}$ ) =  $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor( $0.490 \text{ MHz} - 30 \text{ MHz}$ ) =  $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times \text{RBW}$
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

**(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

**(2) Measurement Type(Quasi-peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Average): Duty cycle  $\geq 98\%$ 
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Total(Measurement Type : Peak)  
= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average): Duty cycle  $\geq$  98%,
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered

that's already beyond the background noise floor.

10. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.8. Receiver Spurious Emissions

### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

### Test Configuration


30 MHz - 1 GHz

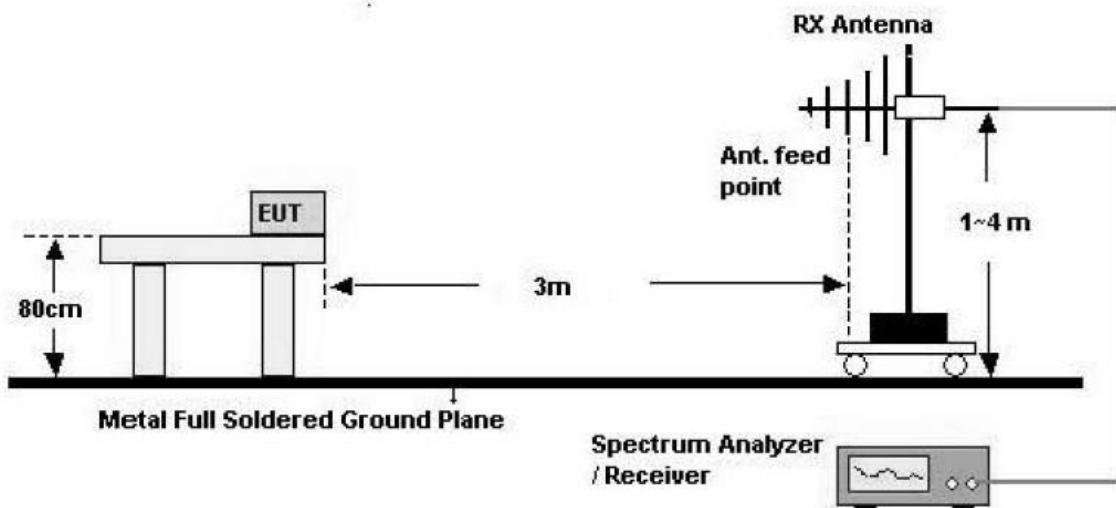

**Test Procedure of Receiver Spurious Emissions (Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

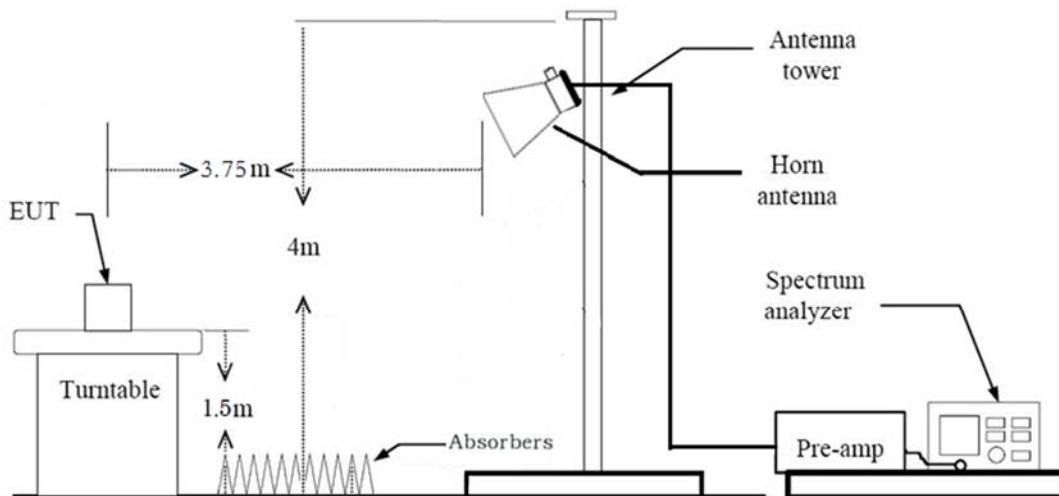

#### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold

- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  1/ $\tau$  Hz, where  $\tau$  = pulse width in seconds

The actual setting value of VBW = 1 kHz

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## 7.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone

### 2. EUT Axis

- Radiated Spurious Emissions : X

- Radiated Restricted Band Edge : X

3. All position of loop antenna were investigated and the test result is a no critical peak found at all

positions.

- Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

### Conducted test

1. The EUT was configured with data rate of highest power.

## 8. SUMMARY TEST OF RESULTS

### FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

**IC Part**

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS

## 9. TEST RESULT

### 9.1 DUTY CYCLE

Mode	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1.0	1.0	1.0	0.0
802.11g	1.0	1.0	1.0	0.0
802.11n (HT20)	1.0	1.0	1.0	0.0

**Note:**

1. Duty Cycle Factor =  $10 \times \log(1/\text{Duty Cycle})$ . where, Duty Cycle =  $T_{on} / T_{total}$
2. Test was performed with continuous Tx.

**9.2 6dB BANDWIDTH & 99 % BANDWIDTH**


802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	7.834	0.5
2437	6	7.800	0.5
2462	11	7.676	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.405	0.5
2437	6	16.407	0.5
2462	11	16.422	0.5

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.110	0.5
2437	6	17.118	0.5
2462	11	17.566	0.5

Test Plots


6dB Bandwidth plot (802.11b-CH 11)

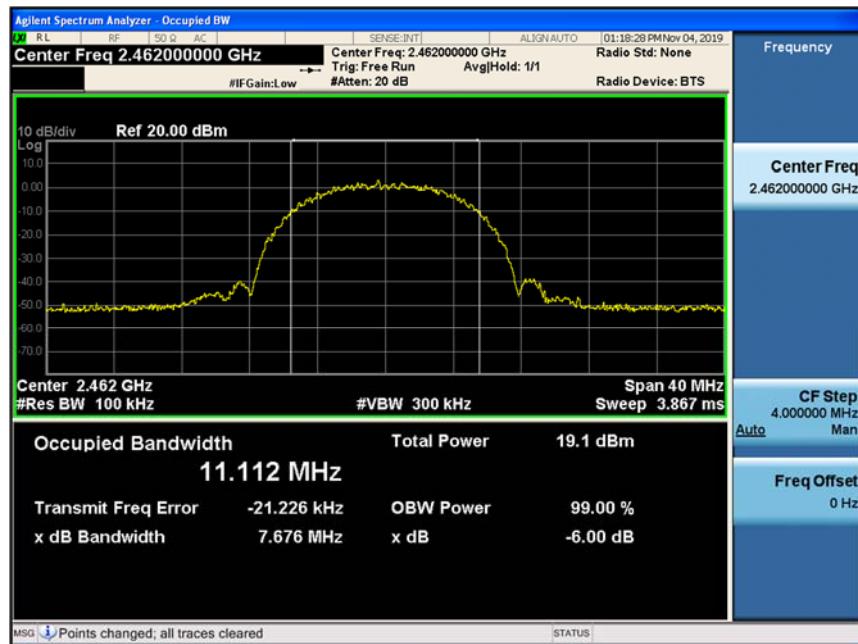

6dB Bandwidth plot (802.11g-CH 1)



## 6dB Bandwidth plot (802.11n\_HT20-CH 1)

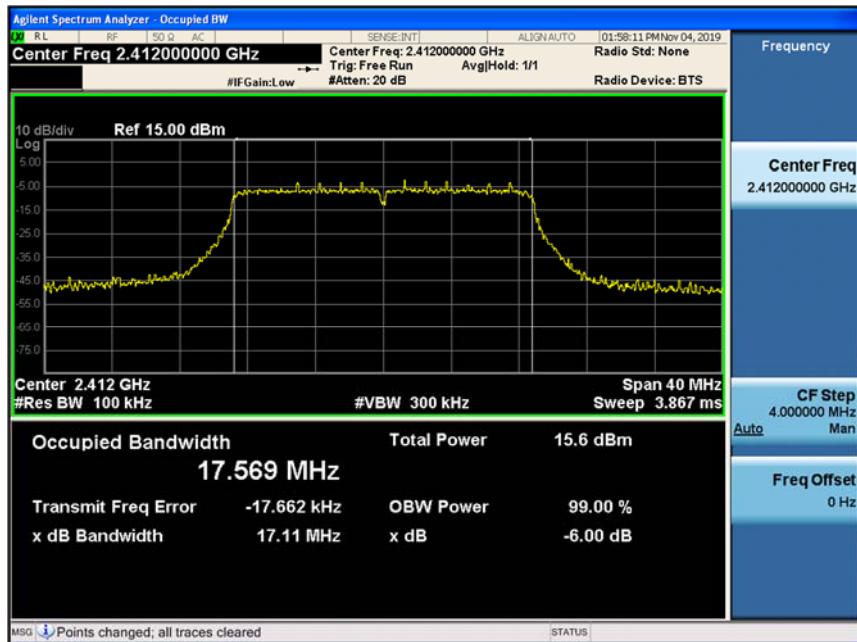**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

IC


802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	11.176	N/A
2437	6	11.205	N/A
2462	11	11.178	N/A

802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.852	N/A
2437	6	16.891	N/A
2462	11	16.889	N/A


802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.771	N/A
2437	6	17.798	N/A
2462	11	17.798	N/A

**□ Test Plots**


99% Bandwidth plot (802.11b-CH 6)

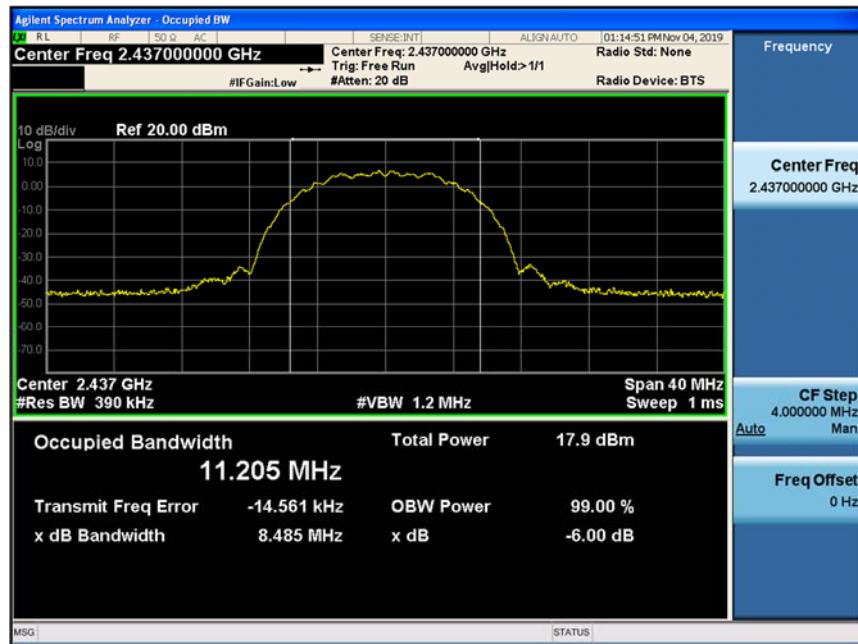

99% Bandwidth plot (802.11g-CH 6)

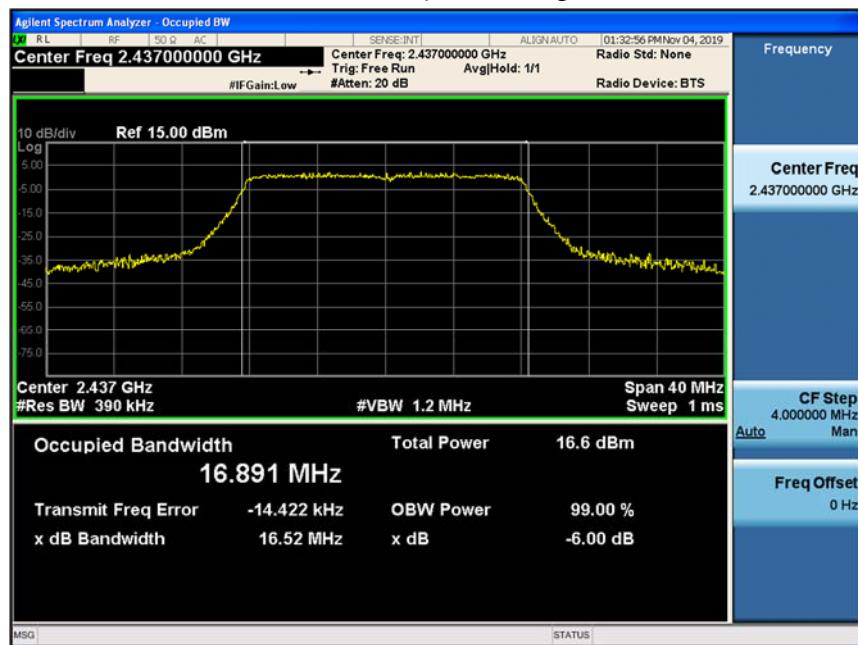

## 99% Bandwidth plot (802.11n\_HT20-CH 11)

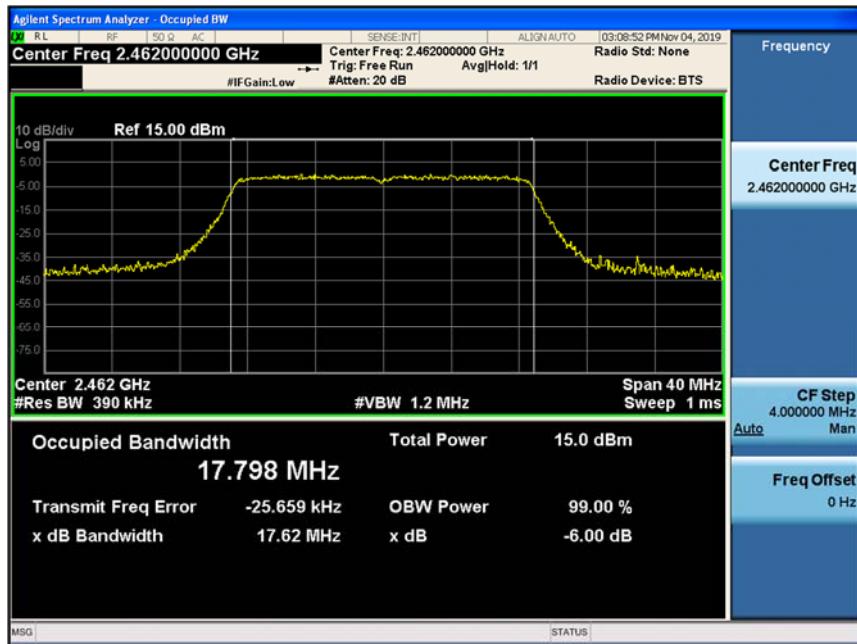**Note:**

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

### 9.3 OUTPUT POWER

#### Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.  
So, 21.05 dB is offset for 2.4 GHz Band

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	15.65	30	10
		2	15.67	30	
		5.5	15.67	30	
		11	17.38	30	
2437	6	1	15.30	30	10
		2	15.31	30	
		5.5	15.30	30	
		11	17.00	30	
2462	11	1	14.69	30	10
		2	14.72	30	
		5.5	14.70	30	
		11	16.40	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	16.98	30	16
		9	17.08	30	
		12	16.81	30	
		18	16.40	30	
		24	16.83	30	
		36	15.93	30	
		48	14.69	30	
		54	13.72	30	
2437	6	6	20.00	30	2
		9	20.05	30	
		12	19.91	30	
		18	18.99	30	
		24	19.50	30	
		36	18.41	30	
		48	17.29	30	
		54	16.43	30	
2462	11	6	16.21	30	18
		9	16.22	30	
		12	16.08	30	
		18	15.14	30	
		24	15.58	30	
		36	14.75	30	
		48	13.53	30	
		54	12.22	30	

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	16.39	30	16
		1	16.31	30	
		2	15.80	30	
		3	16.33	30	
		4	15.32	30	
		5	14.02	30	
		6	13.07	30	
		7	11.31	30	
2437	6	0	19.91	30	2
		1	19.78	30	
		2	18.90	30	
		3	19.42	30	
		4	18.35	30	
		5	17.06	30	
		6	16.27	30	
		7	14.52	30	
2462	11	0	15.77	30	18
		1	15.70	30	
		2	14.65	30	
		3	15.24	30	
		4	14.32	30	
		5	12.84	30	
		6	11.73	30	
		7	9.99	30	

**Average Power**

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.  
So, 21.05 dB is offset for 2.4 GHz Band.
3. Test was performed with continuous Tx.

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	11.49	0.000	11.49	10	10
		2	11.52	0.000	11.52	30	
		5.5	11.54	0.000	11.54	30	
		11	11.55	0.000	11.55	30	
2437	6	1	11.17	0.000	11.17	30	10
		2	11.14	0.000	11.14	30	
		5.5	11.16	0.000	11.16	30	
		11	11.19	0.000	11.19	30	
2462	11	1	10.59	0.000	10.59	30	10
		2	10.56	0.000	10.56	30	
		5.5	10.57	0.000	10.57	30	
		11	10.61	0.000	10.61	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	9.13	0.000	9.13	30	16
		9	9.11	0.000	9.11	30	
		12	9.12	0.000	9.12	30	
		18	8.59	0.000	8.59	30	
		24	8.57	0.000	8.57	30	
		36	7.58	0.000	7.58	30	
		48	6.17	0.000	6.17	30	
		54	5.18	0.000	5.18	30	
2437	6	6	12.16	0.000	12.16	30	2
		9	12.15	0.000	12.15	30	
		12	12.17	0.000	12.17	30	
		18	11.29	0.000	11.29	30	
		24	11.28	0.000	11.28	30	
		36	10.15	0.000	10.15	30	
		48	8.75	0.000	8.75	30	
		54	7.93	0.000	7.93	30	
2462	11	6	8.33	0.000	8.33	30	18
		9	8.31	0.000	8.31	30	
		12	8.31	0.000	8.31	30	
		18	7.34	0.000	7.34	30	
		24	7.36	0.000	7.36	30	
		36	6.42	0.000	6.42	30	
		48	4.93	0.000	4.93	30	
		54	3.76	0.000	3.76	30	

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	8.54	0.000	8.54	30	16
		1	8.51	0.000	8.51	30	
		2	8.05	0.000	8.05	30	
		3	8.06	0.000	8.06	30	
		4	7.03	0.000	7.03	30	
		5	5.60	0.000	5.60	30	
		6	4.62	0.000	4.62	30	
		7	2.94	0.000	2.94	30	
2437	6	0	12.09	0.000	12.09	30	2
		1	12.07	0.000	12.07	30	
		2	11.21	0.000	11.21	30	
		3	11.19	0.000	11.19	30	
		4	10.05	0.000	10.05	30	
		5	8.69	0.000	8.69	30	
		6	7.84	0.000	7.84	30	
		7	6.13	0.000	6.13	30	
2462	11	0	7.87	0.000	7.87	30	18
		1	7.86	0.000	7.86	30	
		2	6.86	0.000	6.86	30	
		3	6.85	0.000	6.85	30	
		4	5.93	0.000	5.93	30	
		5	4.40	0.000	4.40	30	
		6	3.24	0.000	3.24	30	
		7	1.50	0.000	1.50	30	

#### 9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm)	Limit (dBm)
802.11b	2412	1	-11.112	8
	2437	6	-11.473	
	2462	11	-12.753	
802.11g	2412	1	-15.596	8
	2437	6	-12.357	
	2462	11	-17.140	
802.11n(HT20)	2412	1	-16.492	8
	2437	6	-12.740	
	2462	11	-16.224	

**Note :**

1. Spectrum reading values are not plot data.


The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss


3. 20.55 dB is offset for 2.4 GHz Band.

**□ Test Plots**


Power Spectral Density (802.11b-CH 1)

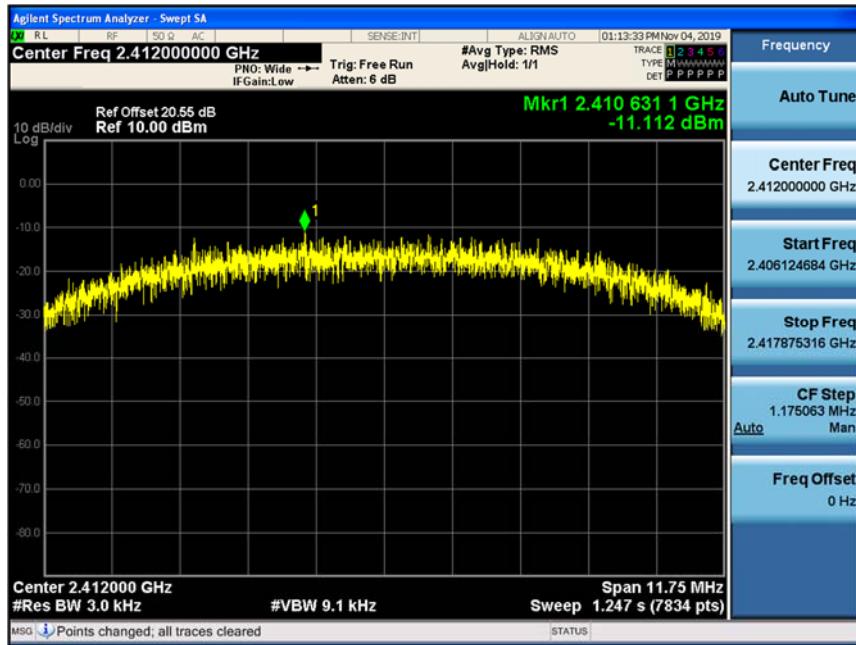

Power Spectral Density (802.11g-CH 6)

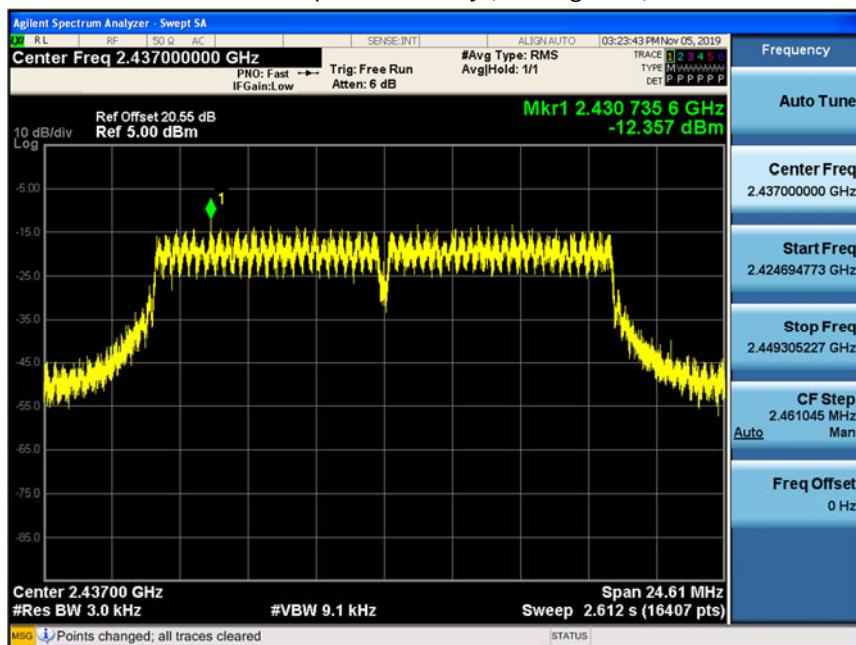

## Power Spectral Density (802.11n\_HT20 -CH 6)

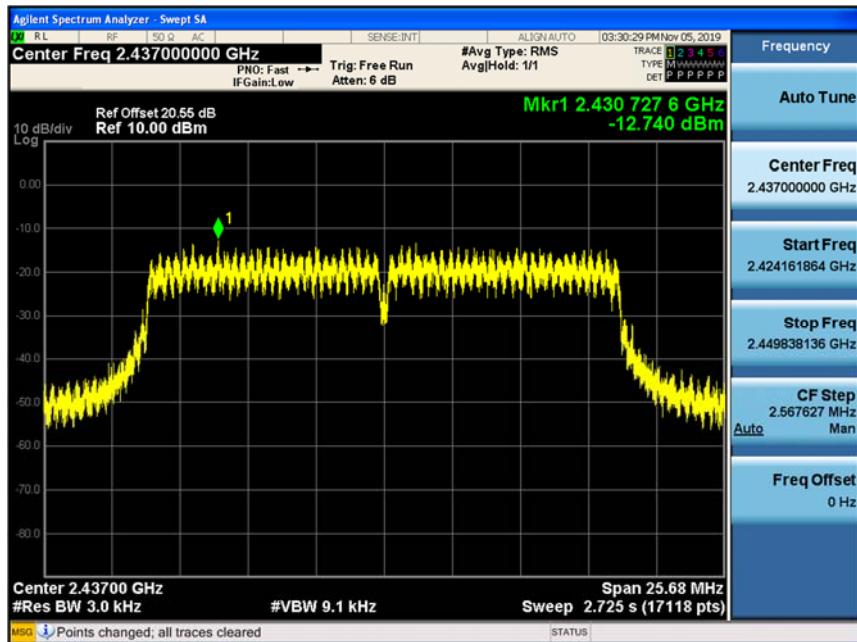**Note :**

In order to simplify the report, attached plots were only the worstcase PSD channel.


**9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS**

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

**■ Test Plots(BandEdge)**


Band Edge (802.11b-CH1)

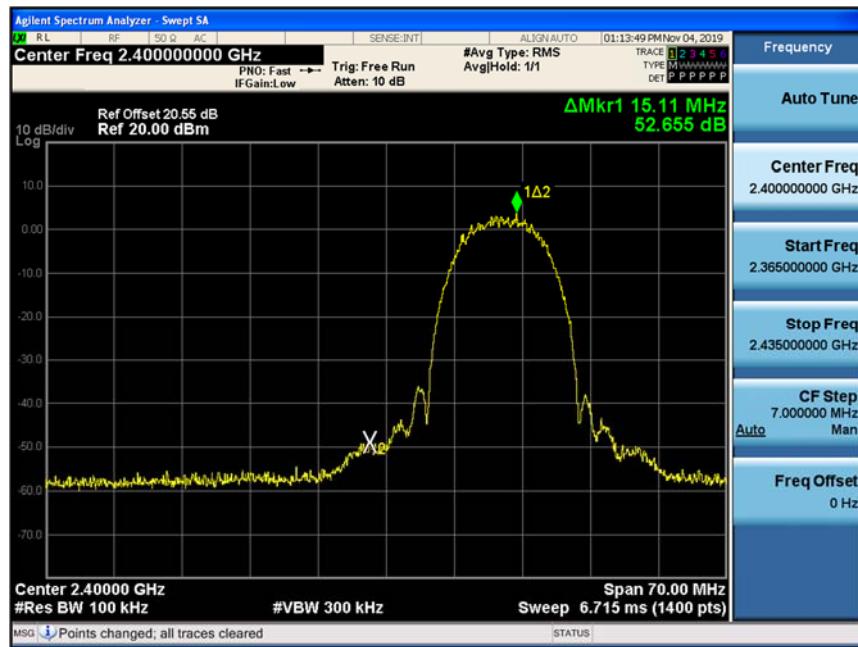


Band Edge (802.11b-CH11)

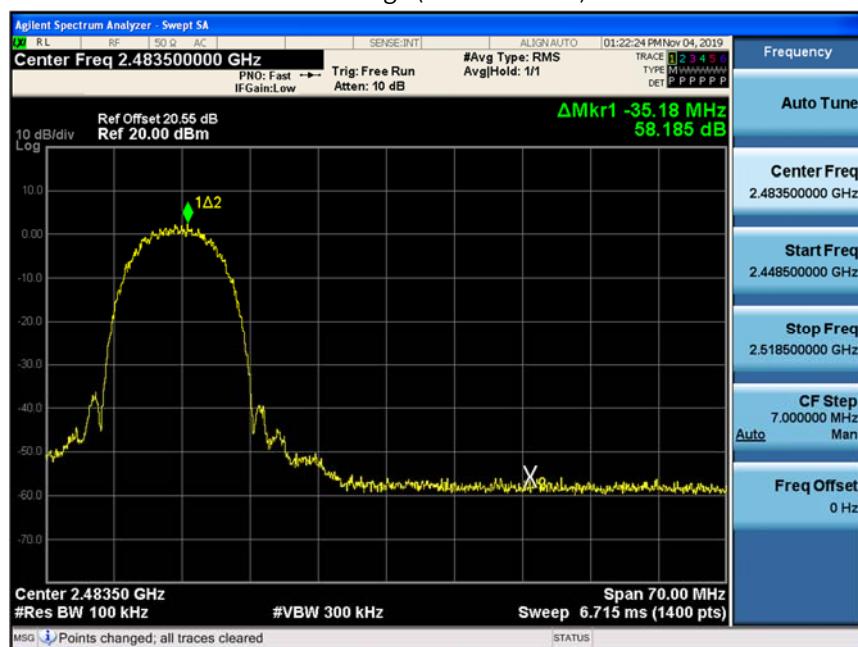


## Band Edge (802.11g-CH1)

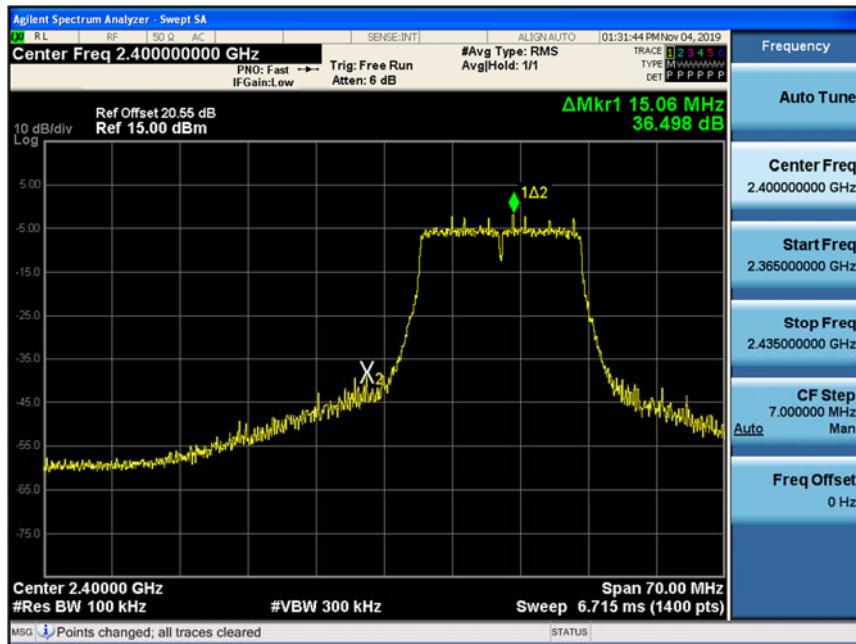


## Band Edge (802.11g-CH11)

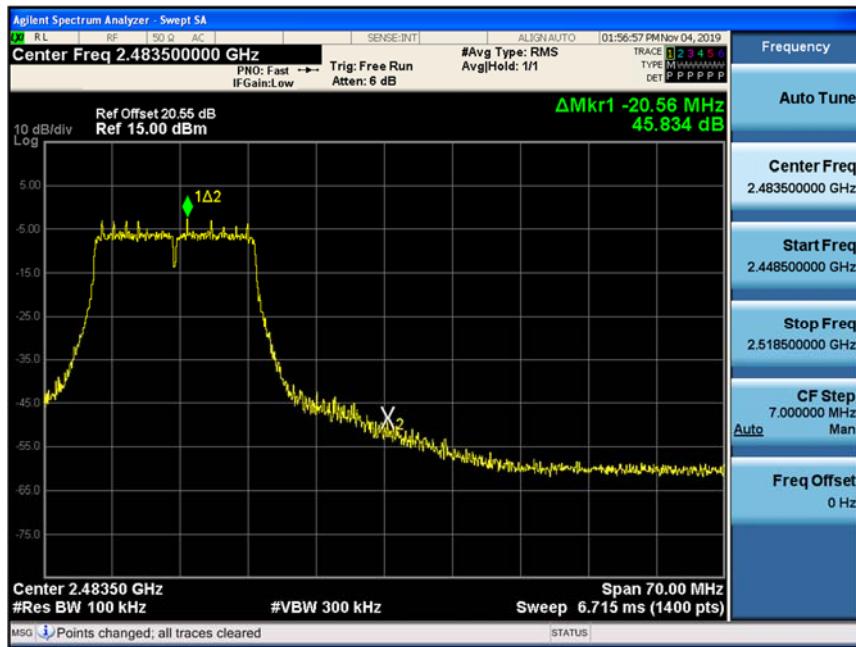

### Band Edge (802.11n\_HT20 -CH1)

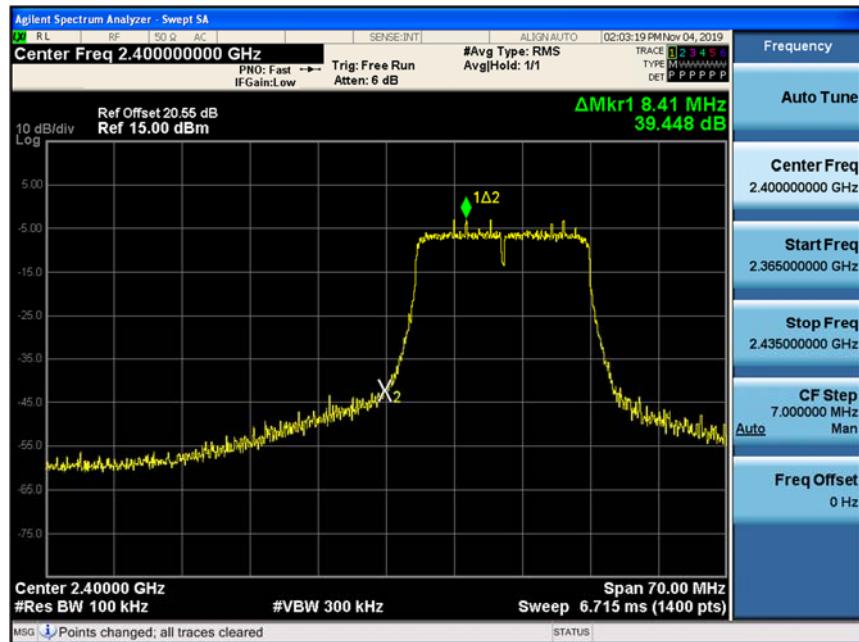


### Band Edge (802.11n\_HT20 -CH11)

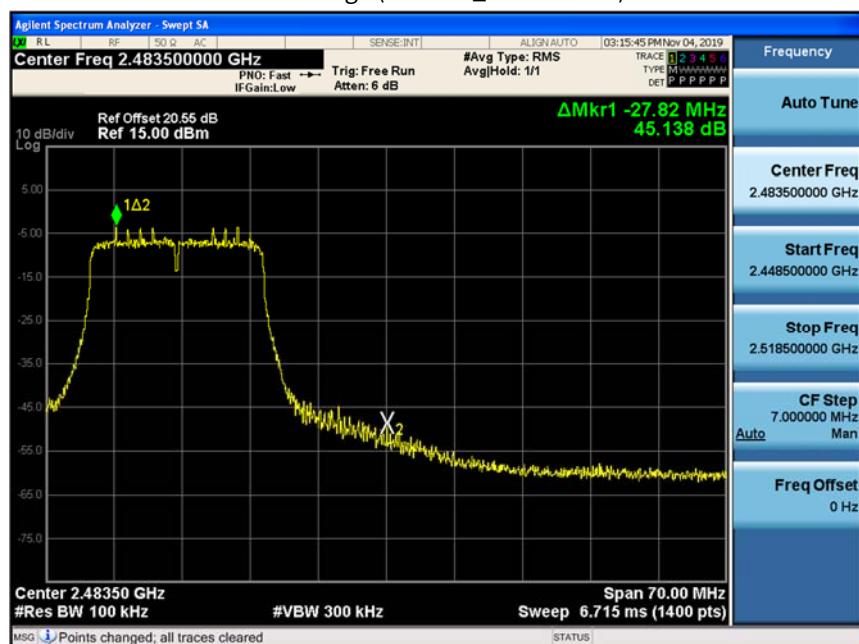

## Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g\_Ch.6)

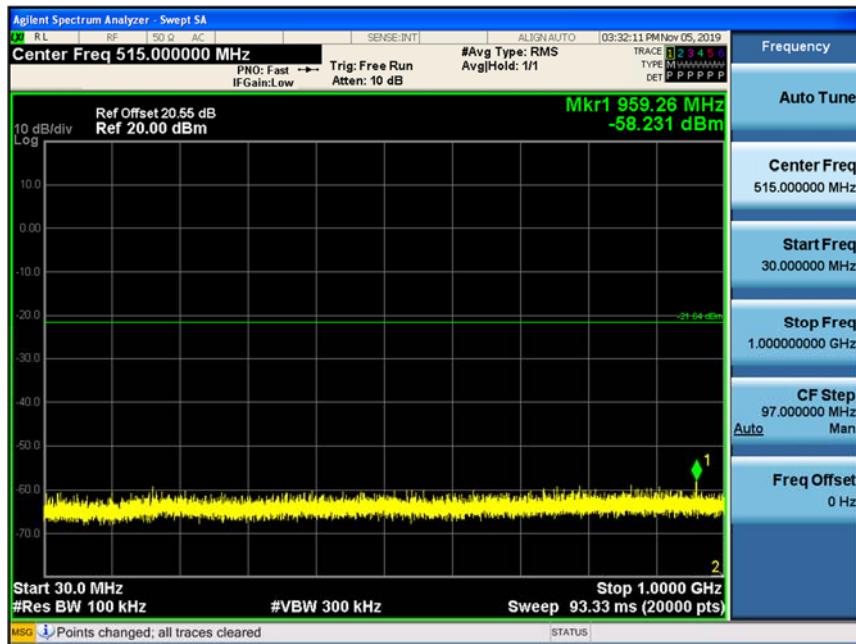


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g\_Ch.6)

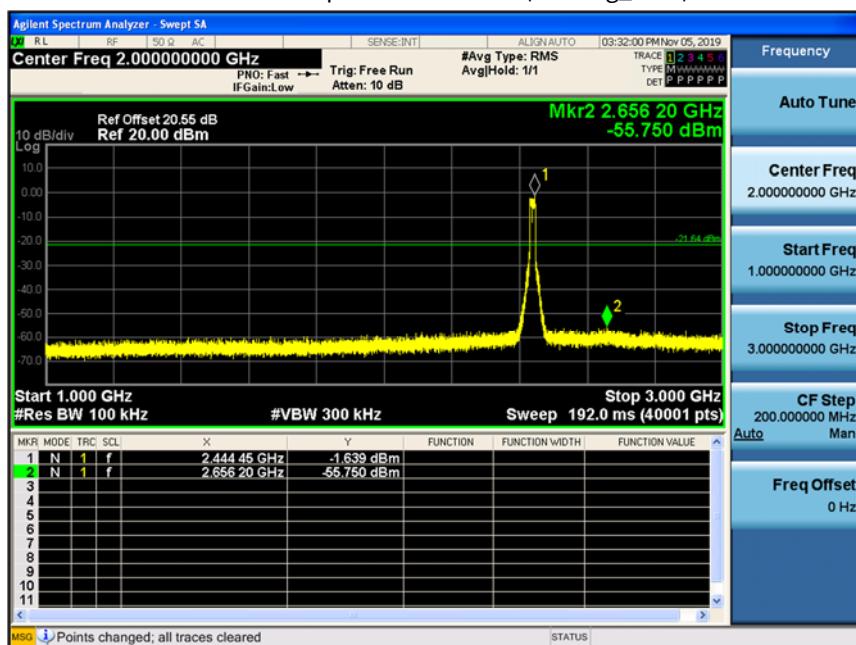


3 GHz ~ 5 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

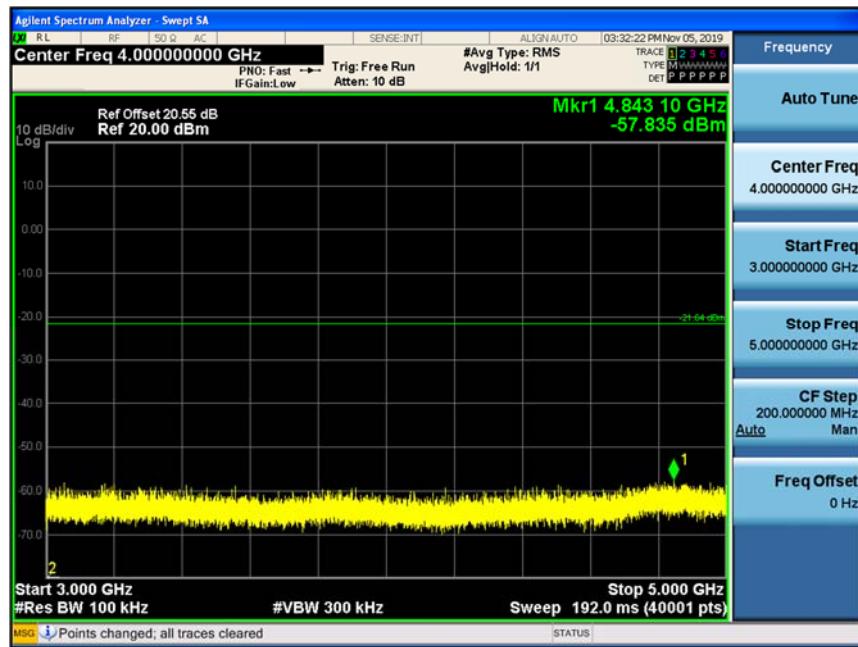


5 GHz ~ 7 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

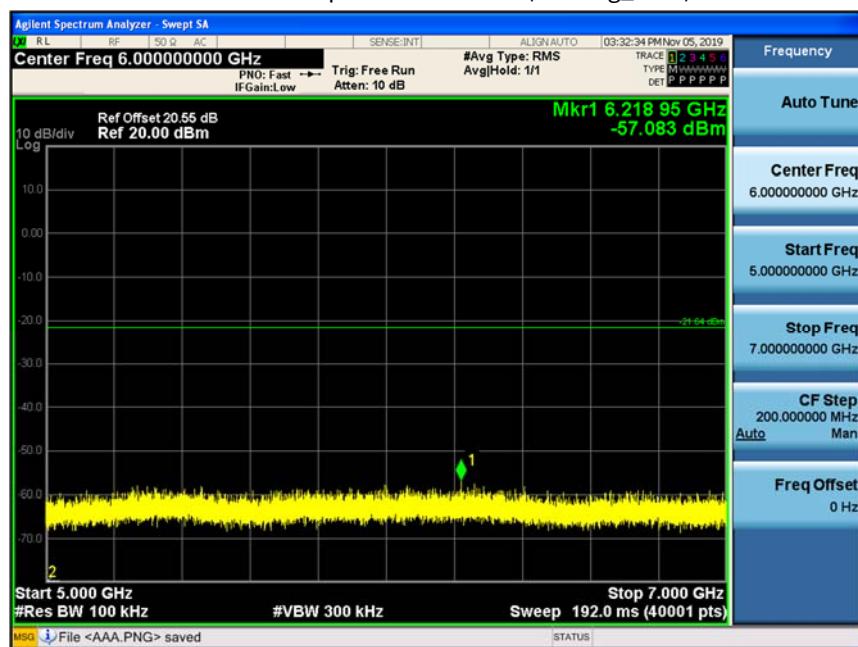


7 GHz ~ 9 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

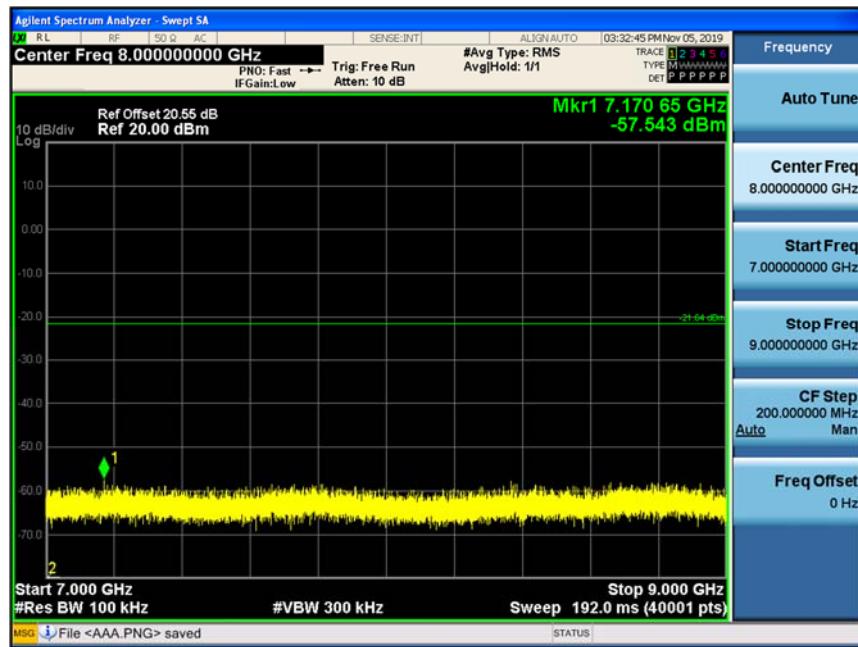


9 GHz ~ 11 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

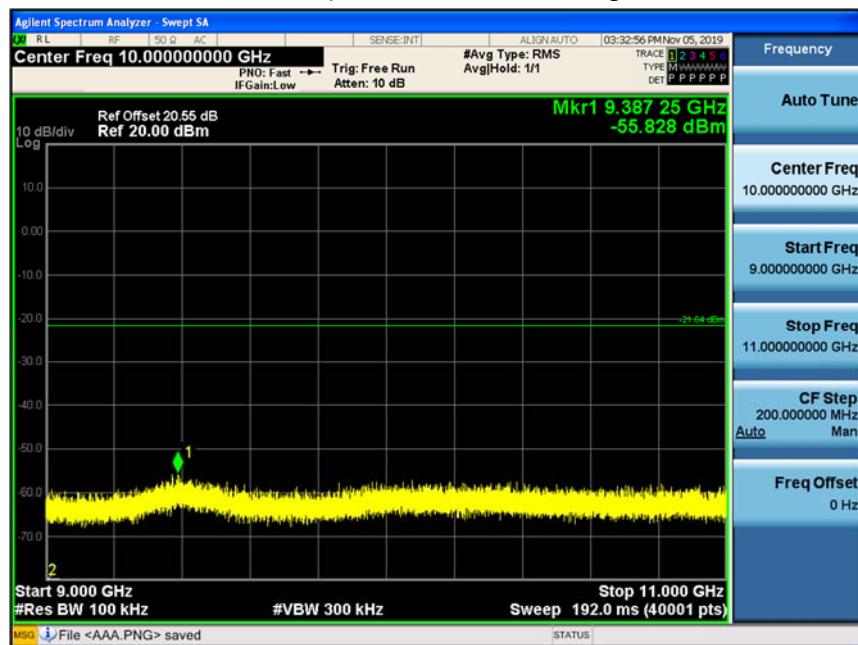


11 GHz ~ 13 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

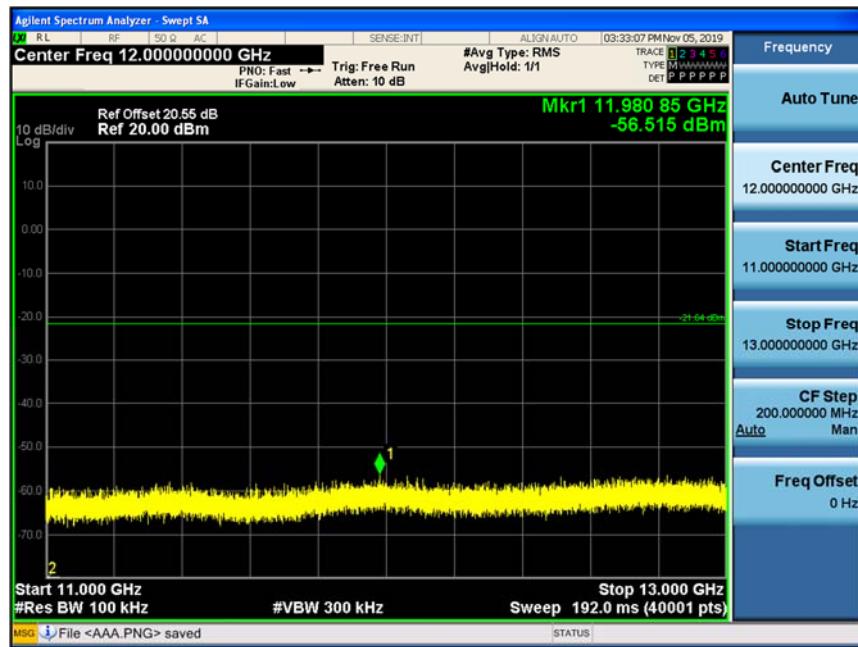


13 GHz ~ 15 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

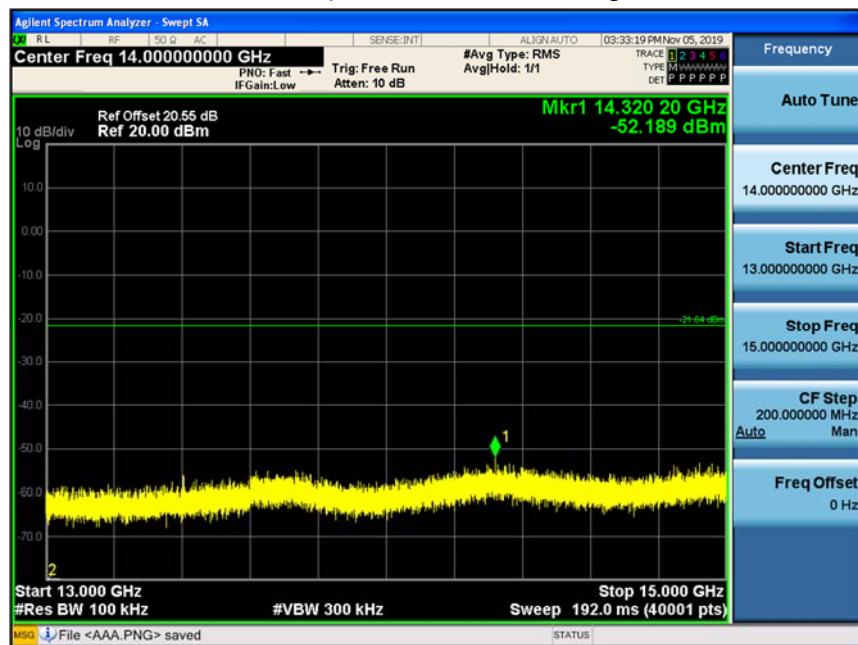


15 GHz ~ 17 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

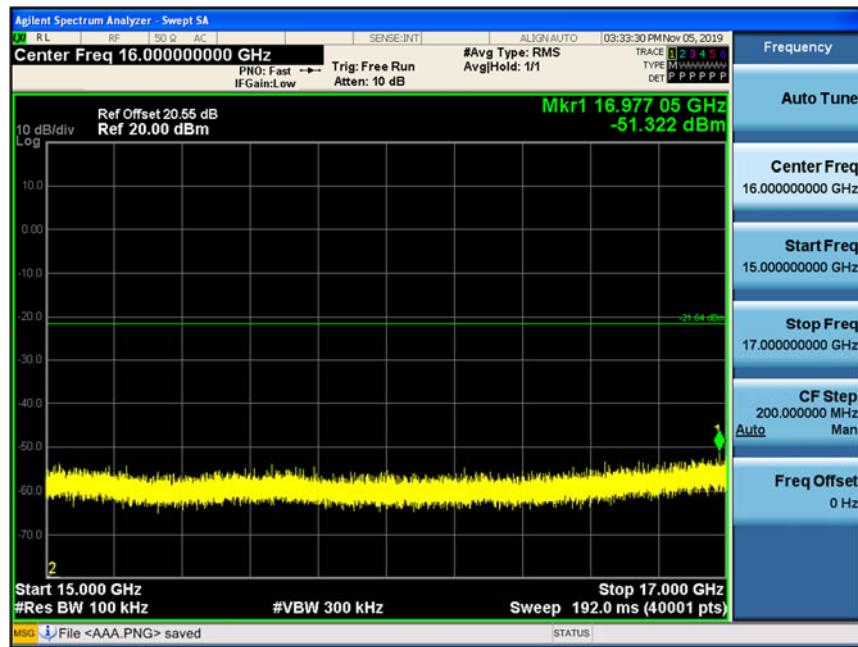


17 GHz ~ 19 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

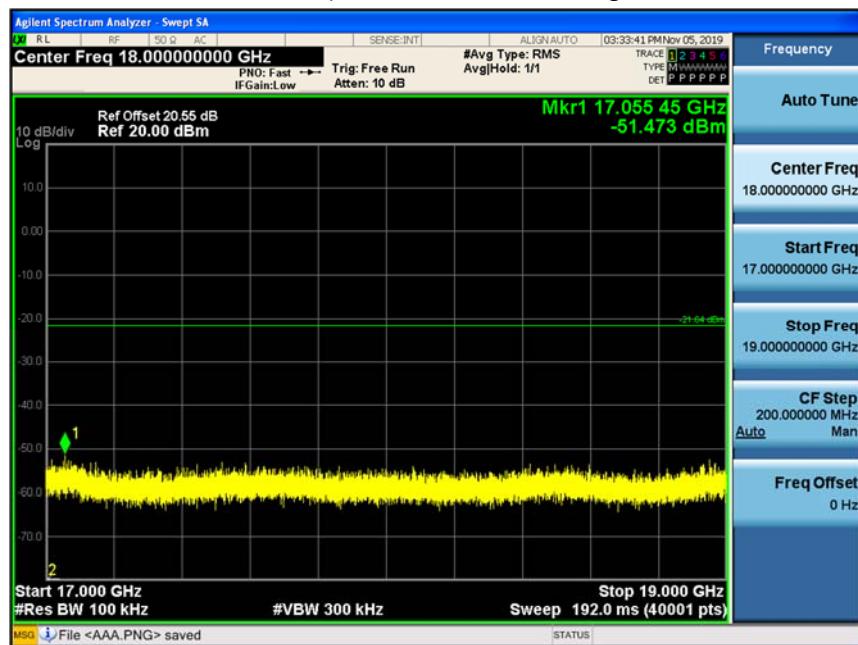


19 GHz ~ 21 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

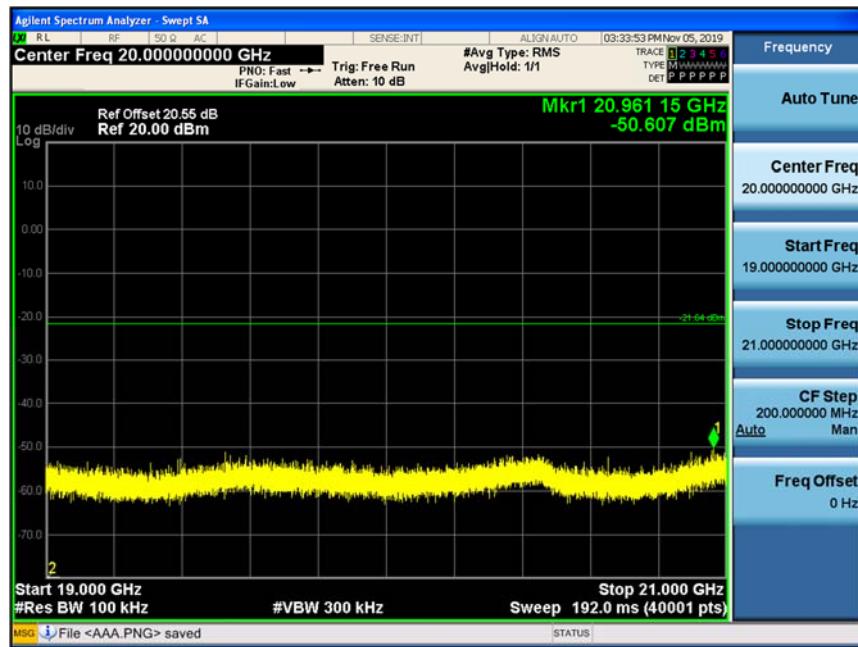


21 GHz ~ 23 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

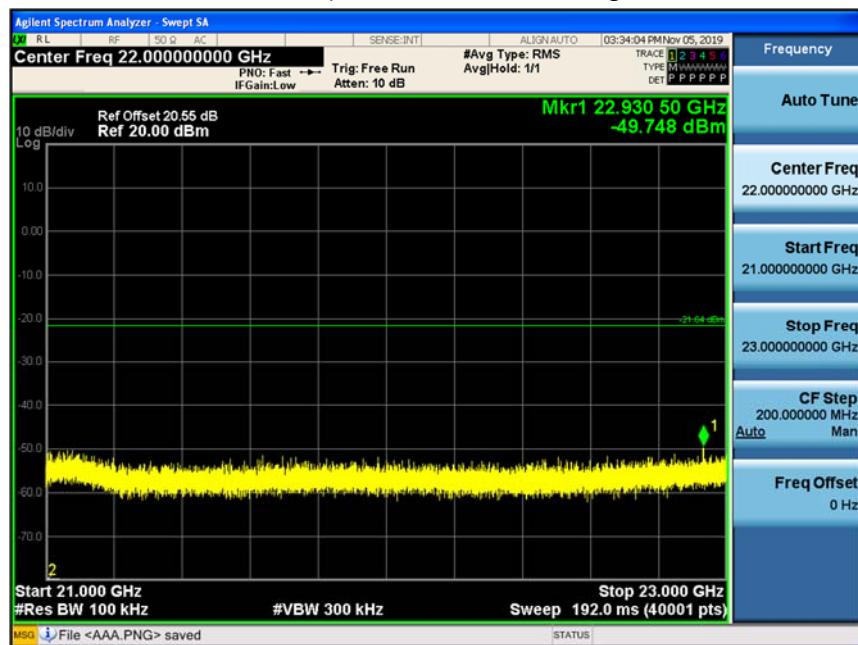

23 GHz ~ 25 GHz

## Conducted Spurious Emission (802.11g\_Ch.6)

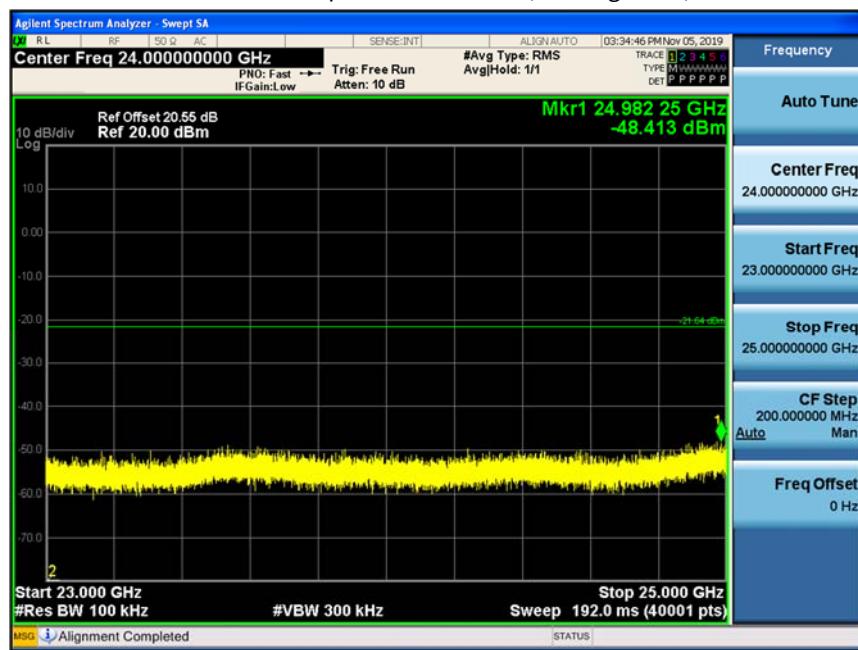

## 9.6 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

Operation Mode:	802.11b
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	53.42	1.95	V	55.37	73.98	18.61	PK
4824	47.12	1.95	V	49.07	53.98	4.91	AV
7236	49.98	9.86	V	59.84	73.98	14.14	PK
7236	37.66	9.86	V	47.52	53.98	6.46	AV
4824	53.76	1.95	H	55.71	73.98	18.27	PK
4824	47.73	1.95	H	49.68	53.98	4.30	AV
7236	50.61	9.86	H	60.47	73.98	13.51	PK
7236	38.09	9.86	H	47.95	53.98	6.03	AV

Operation Mode:	802.11b
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	53.20	2.33	V	55.53	73.98	18.45	PK
4874	45.91	2.33	V	48.24	53.98	5.74	AV
7311	49.86	10.14	V	60.00	73.98	13.98	PK
7311	37.75	10.14	V	47.89	53.98	6.09	AV
4874	53.28	2.33	H	55.61	73.98	18.37	PK
4874	45.97	2.33	H	48.30	53.98	5.68	AV
7311	50.16	10.14	H	60.30	73.98	13.68	PK
7311	38.02	10.14	H	48.16	53.98	5.82	AV

Operation Mode: 802.11b  
Operating Frequency 2462  
Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	53.48	2.28	V	55.76	73.98	18.22	PK
4924	47.16	2.28	V	49.44	53.98	4.54	AV
7386	49.21	9.81	V	59.02	73.98	14.96	PK
7386	36.89	9.81	V	46.70	53.98	7.28	AV
4924	53.64	2.28	H	55.92	73.98	18.06	PK
4924	47.21	2.28	H	49.49	53.98	4.49	AV
7386	49.38	9.81	H	59.19	73.98	14.79	PK
7386	37.07	9.81	H	46.88	53.98	7.10	AV

Operation Mode: 802.11g  
Operating Frequency 2412  
Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4824	51.11	1.95	V	53.06	73.98	20.92	PK
4824	42.23	1.95	V	44.18	53.98	9.80	AV
7236	49.84	9.86	V	59.70	73.98	14.28	PK
7236	37.84	9.86	V	47.70	53.98	6.28	AV
4824	51.23	1.95	H	53.18	73.98	20.80	PK
4824	42.36	1.95	H	44.31	53.98	9.67	AV
7236	49.91	9.86	H	59.77	73.98	14.21	PK
7236	37.96	9.86	H	47.82	53.98	6.16	AV

Operation Mode: 802.11g  
Operating Frequency 2437  
Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4874	51.42	2.33	V	53.75	73.98	20.23	PK
4874	38.80	2.33	V	41.13	53.98	12.85	AV
7311	49.26	10.14	V	59.40	73.98	14.58	PK
7311	37.49	10.14	V	47.63	53.98	6.35	AV
4874	51.70	2.33	H	54.03	73.98	19.95	PK
4874	38.81	2.33	H	41.14	53.98	12.84	AV
7311	49.49	10.14	H	59.63	73.98	14.35	PK
7311	37.79	10.14	H	47.93	53.98	6.05	AV

Operation Mode: 802.11g  
Operating Frequency 2462  
Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4924	49.84	2.28	V	52.12	73.98	21.86	PK
4924	37.75	2.28	V	40.03	53.98	13.95	AV
7386	49.30	9.81	V	59.11	73.98	14.87	PK
7386	36.89	9.81	V	46.70	53.98	7.28	AV
4924	49.96	2.28	H	52.24	73.98	21.74	PK
4924	37.99	2.28	H	40.27	53.98	13.71	AV
7386	49.49	9.81	H	59.30	73.98	14.68	PK
7386	37.09	9.81	H	46.90	53.98	7.08	AV

Operation Mode: 802.11n (HT20)  
Operating Frequency 2412  
Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4824	51.08	1.95	V	53.03	73.98	20.95	PK
4824	42.21	1.95	V	44.16	53.98	9.82	AV
7236	48.96	9.86	V	58.82	73.98	15.16	PK
7236	37.55	9.86	V	47.41	53.98	6.57	AV
4824	51.28	1.95	H	53.23	73.98	20.75	PK
4824	42.31	1.95	H	44.26	53.98	9.72	AV
7236	49.88	9.86	H	59.74	73.98	14.24	PK
7236	37.65	9.86	H	47.51	53.98	6.47	AV

Operation Mode: 802.11n (HT20)  
Operating Frequency 2437  
Channel No. 06 Ch


Frequency [MHz]	Reading [dBuV]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4874	51.42	2.33	V	53.75	73.98	20.23	PK
4874	38.60	2.33	V	40.93	53.98	13.05	AV
7311	49.38	10.14	V	59.52	73.98	14.46	PK
7311	37.46	10.14	V	47.60	53.98	6.38	AV
4874	51.46	2.33	H	53.79	73.98	20.19	PK
4874	38.76	2.33	H	41.09	53.98	12.89	AV
7311	49.42	10.14	H	59.56	73.98	14.42	PK
7311	37.56	10.14	H	47.70	53.98	6.28	AV

Operation Mode: 802.11n (HT20)  
Operating Frequency 2462  
Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4924	49.72	2.28	V	52.00	73.98	21.98	PK
4924	37.65	2.28	V	39.93	53.98	14.05	AV
7386	49.18	9.81	V	58.99	73.98	14.99	PK
7386	37.01	9.81	V	46.82	53.98	7.16	AV
4924	49.87	2.28	H	52.15	73.98	21.83	PK
4924	37.78	2.28	H	40.06	53.98	13.92	AV
7386	49.23	9.81	H	59.04	73.98	14.94	PK
7386	37.04	9.81	H	46.85	53.98	7.13	AV


**■ Test Plots (Worst case : X-H)**

Radiated Spurious Emissions plot – Average Reading (802.11b\_1Mbps, Ch.1 2nd Harmonic)

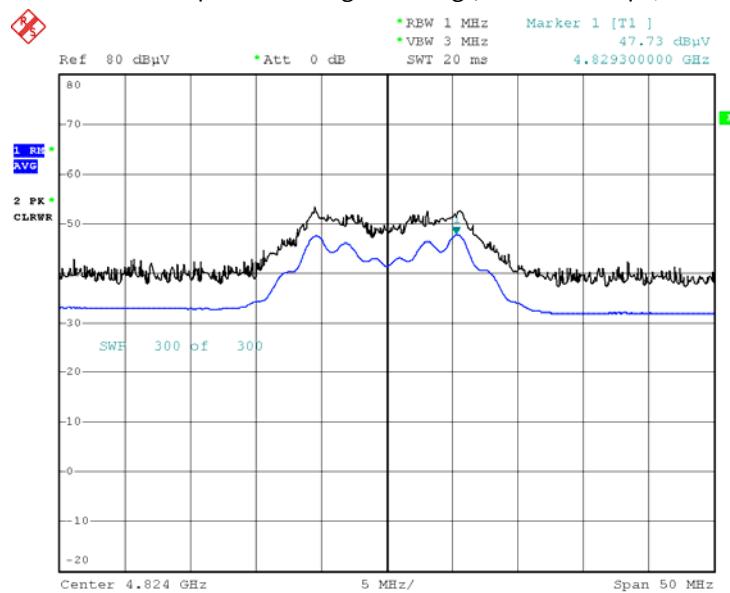

Date: 4.NOV.2019 01:58:49

Radiated Spurious Emissions plot – Peak Reading (802.11b\_1Mbps, Ch.1 2nd Harmonic)

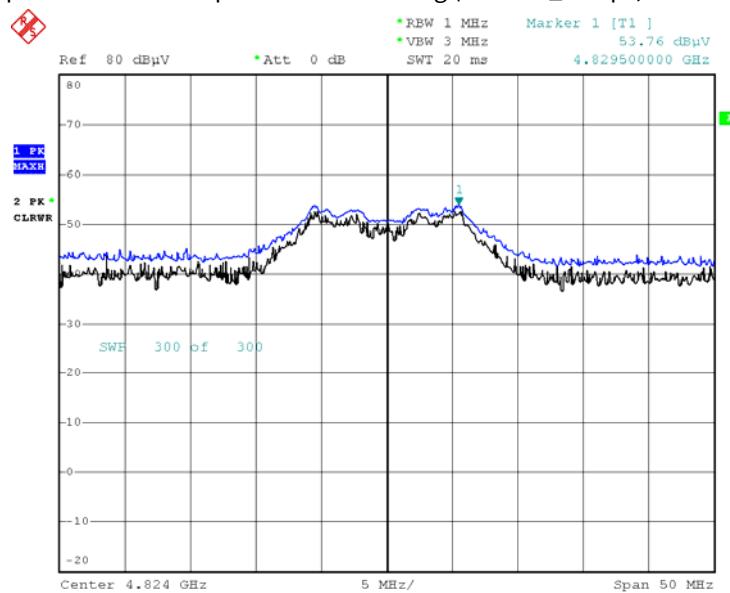

Date: 4.NOV.2019 01:54:38

**Note:**

Plot of worst case are only reported.

**9.7 RADIATED RESTRICTED BAND EDGES**

Operation Mode:	802.11b
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL + AMP + ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	49.14	0.85	H	49.99	73.98	23.99	PK
2390.0	41.00	0.85	H	41.85	53.98	12.13	AV
2390.0	48.99	0.85	V	49.84	73.98	24.14	PK
2390.0	40.96	0.85	V	41.81	53.98	12.17	AV
2483.5	50.96	1.13	H	52.09	73.98	21.89	PK
2483.5	42.73	1.13	H	43.86	53.98	10.12	AV
2483.5	50.48	1.13	V	51.61	73.98	22.37	PK
2483.5	42.58	1.13	V	43.71	53.98	10.27	AV

Operation Mode:	802.11g
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch


Frequency [MHz]	Reading [dBuV]	A.F.+CL + AMP + ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	61.23	0.85	H	62.08	73.98	11.90	PK
2390.0	49.41	0.85	H	50.26	53.98	3.72	AV
2390.0	61.11	0.85	V	61.96	73.98	12.02	PK
2390.0	49.18	0.85	V	50.03	53.98	3.95	AV
2483.5	61.42	1.13	H	62.55	73.98	11.43	PK
2483.5	49.58	1.13	H	50.71	53.98	3.27	AV
2483.5	61.25	1.13	V	62.38	73.98	11.60	PK
2483.5	49.11	1.13	V	50.24	53.98	3.74	AV

Operation Mode: 802.11n (HT20)  
Operating Frequency 2412 MHz, 2462 MHz  
Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL + AMP + ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	61.89	0.85	H	62.74	73.98	11.24	PK
2390.0	49.70	0.85	H	50.55	53.98	3.43	AV
2390.0	61.58	0.85	V	62.43	73.98	11.55	PK
2390.0	49.39	0.85	V	50.24	53.98	3.74	AV
2483.5	61.90	1.13	H	63.03	73.98	10.95	PK
2483.5	49.85	1.13	H	50.98	53.98	3.00	AV
2483.5	61.76	1.13	V	62.89	73.98	11.09	PK
2483.5	49.56	1.13	V	50.69	53.98	3.29	AV

**■ Test Plots (Worst case : X-H)**

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.11)

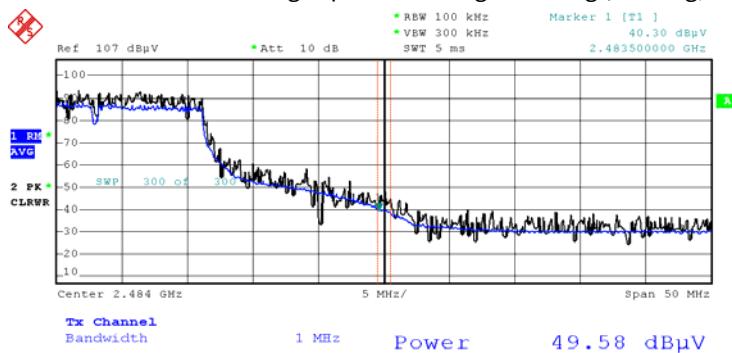


Date: 4.NOV.2019 02:40:43

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.11)




Date: 4.NOV.2019 02:43:28

## Radiated Restricted Band Edges plot – Average Reading (802.11 n(20M), Ch.11)

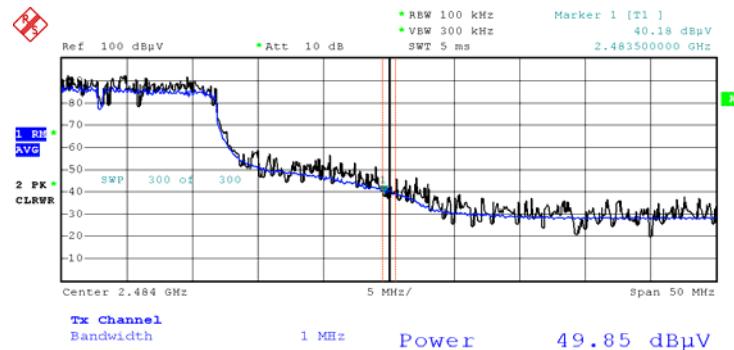

Date: 4.NOV.2019 02:52:47

## Radiated Restricted Band Edges plot – Peak Reading (802.11 n(20M), Ch.11)

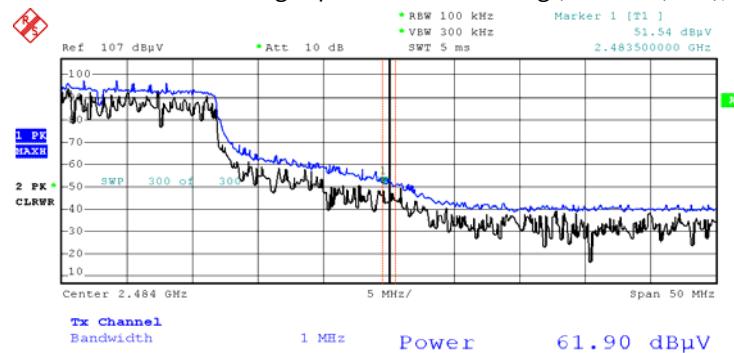

Date: 4.NOV.2019 02:53:37

**Note:**

Plot of worst case are only reported.

## 9.8 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

## 9.9 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: SRM200A  
Manufacturer: SEONG JI INDUSTRIAL CO.,LTD  
Test Site: SHIELD ROOM  
Operating Conditions: WLAN 2.4G\_L1

FCC CLASS B

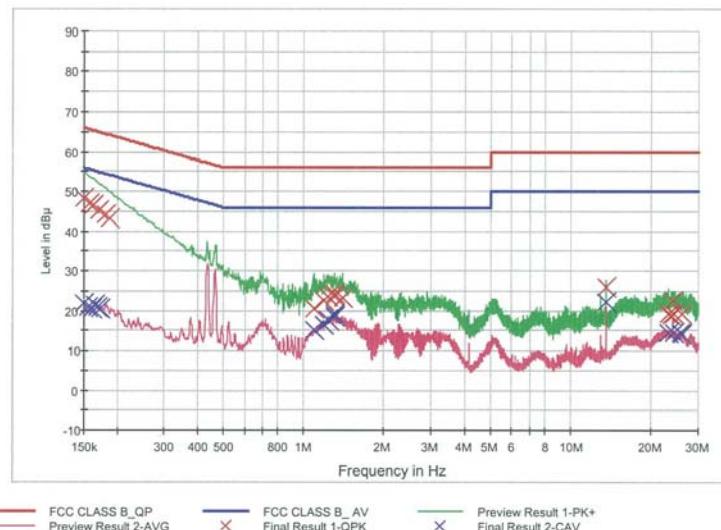

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	48.2	9.000	Off	L1	9.7	17.8	66.0
0.158000	47.0	9.000	Off	L1	9.7	18.5	65.6
0.162000	46.5	9.000	Off	L1	9.7	18.9	65.4
0.170000	45.4	9.000	Off	L1	9.7	19.6	65.0
0.180000	44.3	9.000	Off	L1	9.7	20.2	64.5
0.188000	43.1	9.000	Off	L1	9.7	21.0	64.1
1.090000	20.7	9.000	Off	L1	9.8	35.3	56.0
1.186000	22.6	9.000	Off	L1	9.8	33.4	56.0
1.230000	23.4	9.000	Off	L1	9.8	32.6	56.0
1.300000	23.5	9.000	Off	L1	9.8	32.5	56.0
1.306000	24.2	9.000	Off	L1	9.8	31.8	56.0
1.396000	23.2	9.000	Off	L1	9.8	32.8	56.0
13.562000	26.0	9.000	Off	L1	10.1	34.0	60.0
23.098000	19.2	9.000	Off	L1	10.2	40.8	60.0
23.660000	18.9	9.000	Off	L1	10.2	41.1	60.0
24.050000	22.4	9.000	Off	L1	10.2	37.6	60.0
24.198000	19.1	9.000	Off	L1	10.2	40.9	60.0
25.958000	19.1	9.000	Off	L1	10.2	40.9	60.0

2019-10-31

오후 2:04:27

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	21.8	9.000	Off	L1	9.7	34.2	56.0
0.156000	20.9	9.000	Off	L1	9.7	34.8	55.7
0.160000	20.4	9.000	Off	L1	9.7	35.0	55.5
0.164000	21.4	9.000	Off	L1	9.7	33.8	55.3
0.168000	20.7	9.000	Off	L1	9.7	34.4	55.1
0.172000	20.5	9.000	Off	L1	9.7	34.4	54.9
1.090000	15.1	9.000	Off	L1	9.8	30.9	46.0
1.186000	16.4	9.000	Off	L1	9.8	29.6	46.0
1.230000	17.9	9.000	Off	L1	9.8	28.1	46.0
1.244000	17.6	9.000	Off	L1	9.8	28.4	46.0
1.300000	18.5	9.000	Off	L1	9.8	27.5	46.0
1.306000	19.2	9.000	Off	L1	9.8	26.8	46.0
13.560000	22.3	9.000	Off	L1	10.1	27.7	50.0
23.098000	14.4	9.000	Off	L1	10.2	35.6	50.0
23.108000	14.4	9.000	Off	L1	10.2	35.6	50.0
24.198000	14.4	9.000	Off	L1	10.2	35.6	50.0
25.888000	14.4	9.000	Off	L1	10.2	35.6	50.0
25.958000	14.1	9.000	Off	L1	10.2	35.9	50.0

2019-10-31

오후 2:04:27

Conducted Emissions (Line 2)


Test

1 / 2

**HCT TEST Report****Common Information**

EUT: SRM200A  
Manufacturer: SEONG JI INDUSTRIAL CO.,LTD  
Test Site: SHIELD ROOM  
Operating Conditions: WLAN 2.4G\_N

FCC CLASS B

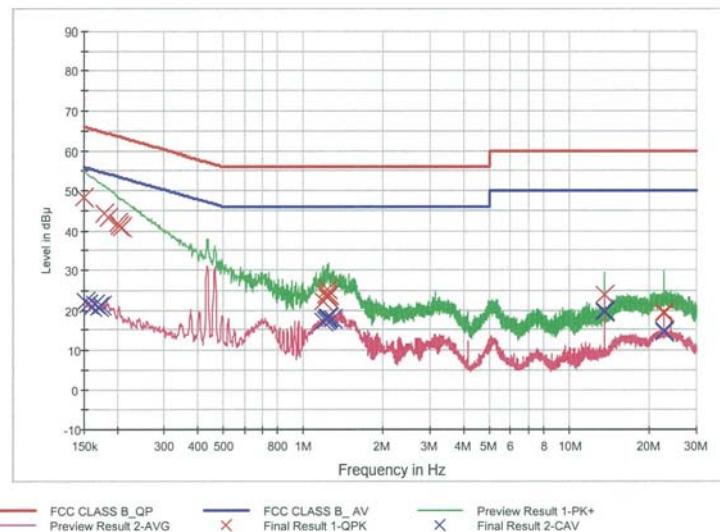**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	48.2	9.000	Off	N	9.7	17.8	66.0
0.178000	44.4	9.000	Off	N	9.7	20.2	64.6
0.186000	43.4	9.000	Off	N	9.7	20.9	64.2
0.200000	41.8	9.000	Off	N	9.7	21.8	63.6
0.204000	41.3	9.000	Off	N	9.7	22.1	63.4
0.208000	40.9	9.000	Off	N	9.7	22.4	63.3
1.184000	22.3	9.000	Off	N	9.8	33.7	56.0
1.216000	23.9	9.000	Off	N	9.8	32.1	56.0
1.226000	23.1	9.000	Off	N	9.8	32.9	56.0
1.230000	23.7	9.000	Off	N	9.8	32.3	56.0
1.234000	25.2	9.000	Off	N	9.8	30.8	56.0
1.248000	23.9	9.000	Off	N	9.8	32.1	56.0
13.558000	24.0	9.000	Off	N	10.1	36.0	60.0
22.722000	19.5	9.000	Off	N	10.2	40.5	60.0
22.744000	19.2	9.000	Off	N	10.2	40.8	60.0
22.748000	19.3	9.000	Off	N	10.2	40.7	60.0
22.766000	19.5	9.000	Off	N	10.2	40.5	60.0
22.770000	19.5	9.000	Off	N	10.2	40.5	60.0

2019-10-31

오후 1:49:29

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	22.3	9.000	Off	N	9.7	33.6	55.9
0.156000	21.4	9.000	Off	N	9.7	34.3	55.7
0.160000	20.7	9.000	Off	N	9.7	34.8	55.5
0.164000	21.6	9.000	Off	N	9.7	33.6	55.3
0.170000	21.0	9.000	Off	N	9.7	34.0	55.0
0.174000	21.1	9.000	Off	N	9.7	33.7	54.8
1.186000	17.0	9.000	Off	N	9.8	29.0	46.0
1.216000	17.6	9.000	Off	N	9.8	28.4	46.0
1.230000	17.7	9.000	Off	N	9.8	28.3	46.0
1.234000	18.0	9.000	Off	N	9.8	28.0	46.0
1.248000	18.2	9.000	Off	N	9.8	27.8	46.0
1.288000	17.7	9.000	Off	N	9.8	28.3	46.0
13.558000	19.4	9.000	Off	N	10.1	30.6	50.0
13.562000	19.7	9.000	Off	N	10.1	30.3	50.0
22.724000	14.7	9.000	Off	N	10.2	35.3	50.0
22.736000	14.6	9.000	Off	N	10.2	35.4	50.0
22.740000	14.5	9.000	Off	N	10.2	35.5	50.0
22.770000	14.6	9.000	Off	N	10.2	35.4	50.0

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100033
ESPACE	SU-642 /Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/20/2018	Annual	MY49431210
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	5001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	01/18/2019	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/09/2019	Biennial	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	11/21/2017	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/11/2019	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/26/2019	Annual	101068-SZ
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	01/03/2019	Annual	4
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	01/03/2019	Annual	5
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/04/2019	Annual	2
WEINSCHEL	56-10 / Attenuator(10 dB)	10/08/2019	Annual	72316
CERNEX	CBLU1183540B-01/Broadband Bench Top LNA	01/03/2019	Annual	28549
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	01/03/2019	Annual	24615
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/26/2019	Annual	3000C000276

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1911-FI011-P