

**RSS-247 Issue 3, RSS-Gen Issue 5
CFR 47 FCC PART 15 SUBPART C**

TEST REPORT

For

LoRa Module

MODEL NUMBER: HPNI01

REPORT NUMBER: E04A24110246I00101

ISSUE DATE: April 14, 2025

FCC ID: 2ASEO-HPNI01

IC: 24999-HPNI01

Prepared for

Shenzhen HOPE Microelectronics Co., Ltd

**30th floor of 8th Building, C Zone Vanke Cloud City, Xili Sub-district, Nanshan,
Shenzhen, Guangdong, China**

Prepared by

Guangdong Global Testing Technology Co., Ltd.

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park,
Dongguan city, Guangdong, People's Republic of China, 523808**

**This report is based on a single evaluation of the submitted sample(s) of the above
mentioned product, it does not imply an assessment of the production of the products.**

**This report shall not be reproduced, except in full, without the written approval of
Guangdong Global Testing Technology Co., Ltd.**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 14, 2025	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-Gen Issue 5, Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	N/A
Conducted Output Power	ANSI C63.10-2020, Clause 11.9.1.3	FCC Part 15.247 (b)(1) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020, Clause 11.8.1	FCC Part 15.247 (a)(1) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2020, Clause 11.10.2	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2020, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020, Clause 11.11 & Clause 11.12	FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2020, Clause 12.2	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C, ISED RSS-247 ISSUE 3> when <Accuracy Method> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2. <i>CHANNEL LIST.....</i>	<i>8</i>
5.3. <i>MAXIMUM EIRP</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>9</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>9</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>9</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>9</i>
5.8. <i>SETUP DIAGRAM</i>	<i>10</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	11
7. ANTENNA PORT TEST RESULTS	13
7.1. <i>Conducted Peak Output Power.....</i>	<i>13</i>
7.2. <i>6dB Bandwidth AND 99% OCCUPIED BANDWIDTH</i>	<i>14</i>
7.3. <i>Power Spectral Density.....</i>	<i>16</i>
7.4. <i>Conducted Out of Band Emission</i>	<i>17</i>
7.5. <i>Duty Cycle</i>	<i>19</i>
8. RADIATED TEST RESULTS.....	20
8.1. <i>RADIATED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>26</i>
9. ANTENNA REQUIREMENT	58
10. AC POWER LINE CONDUCTED EMISSION	59
11. TEST DATA - Appendix A.....	60

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Shenzhen HOPE Microelectronics Co., Ltd
 Address: 30th floor of 8th Building, C Zone Vanke Cloud City, Xili Sub-district, Nanshan, Shenzhen, Guangdong, China

Manufacturer Information

Company Name: Shenzhen HOPE Microelectronics Co., Ltd
 Address: 30th floor of 8th Building, C Zone Vanke Cloud City, Xili Sub-district, Nanshan, Shenzhen, Guangdong, China

EUT Information

Product Description: LoRa Module
 Model: HPNI01
 Series Model: N/A
 Brand: HOPERF
 Sample Received Date: March 19, 2025
 Sample Status: Normal
 Sample ID: A24110246 002
 Date of Tested: March 19, 2025 to April 11, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ISED RSS-247 ISSUE 3, RSS-Gen Issue 5	Pass

Prepared By:

Win Huang

Win Huang

Project Engineer

Checked By:

Alan He

Alan He

Laboratory Leader

Approved By:

Shawn Wen

Shawn Wen

Laboratory Manager



2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C, ISED RSS-247 ISSUE 3, RSS-Gen Issue 5 (DTS)

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 6947.01) Guangdong Global Testing Technology Co., Ltd. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1343) Guangdong Global Testing Technology Co., Ltd. has been recognized to perform compliance testing on equipment subject to Supplier's Declaration of Conformity (SDoC) and Certification rules</p> <p>ISED (Company No.: 30714) Guangdong Global Testing Technology Co., Ltd. has been registered and fully described in a report filed with ISED. The Company Number is 30714 and the test lab Conformity Assessment Body Identifier (CABID) is CN0148.</p>
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at
Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city,
Guangdong, People's Republic of China, 523808

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Items	k	Uncertainty
DTS Bandwidth	1.96	±9.2 PPM
20dB Emission Bandwidth	1.96	±9.2 PPM
Carrier Frequency Separation	1.96	±9.2 PPM
Time of Occupancy	1.96	±0.57%
Conducted Output Power	1.96	±1.5 dB
Power Spectral Density Level	1.96	±1.9 dB
Conducted Spurious Emission	1.96	9 kHz-30 MHz: ± 0.95 dB 30 MHz-1 GHz: ± 1.5 dB 1GHz-12.75GHz: ± 1.8 dB 12.75 GHz-26.5 GHz: ± 2.1dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions from the AC mains power ports (AMN)	150 kHz ~ 30 MHz	2	3.37
Radiated emissions	9 kHz ~ 30 MHz	2	4.16
Radiated emissions	30 MHz ~ 1 GHz	2	3.79
Radiated emissions	1 GHz ~ 18 GHz	2	5.62
Radiated emissions	18 GHz ~ 40 GHz	2	5.54

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name		LoRa Module
Model		HPNI01
Series Model		N/A
Model Difference		N/A
Hardware Version		V1.0
Software Version		V1.0
Ratings		DC 3.3V, 500mA
Power Supply	DC	3.3V

Frequency Band:	902.0 MHz to 928.0 MHz
Frequency Range:	902.0 MHz to 928.0 MHz
Type of Modulation:	LoRa
Number of Channels:	53
Maximum Peak Power:	17.33dBm
Antenna Type:	External Antenna
Antenna Gain:	2.15 dBi
Normal Test Voltage:	3.3 Vdc
EUT Test software:	EUT factory mode
Note:	The Antenna Gain was provided by customer, and this information may affect the validity of the results, customer should be responsible for this.

5.2. CHANNEL LIST

Channel	Frequency (MHz)						
0	902.0	14	909.0	28	916.0	42	923.0
1	902.5	15	909.5	29	916.5	43	923.5
2	903.0	16	910.0	30	917.0	44	924.0
3	903.5	17	910.5	31	917.5	45	924.5
4	904.0	18	911.0	32	918.0	46	925.0
5	904.5	19	911.5	33	918.5	47	925.5
6	905.0	20	912.0	34	919.0	48	926.0
7	905.5	21	912.5	35	919.5	49	926.5
8	906.0	22	913.0	36	920.0	50	927.0
9	906.5	23	913.5	37	920.5	51	927.5
10	907.0	24	914.0	38	921.0	52	928.0
11	907.5	25	914.5	39	921.5		
12	908.0	26	915.0	40	922.0		

13	908.5	27	915.5	41	922.5		
----	-------	----	-------	----	-------	--	--

5.3. MAXIMUM EIRP

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
LoRa(Antenna 1)	902.0 ~ 928.0	0-52[53]	13.18	15.33
LoRa(Antenna 2)	902.0 ~ 928.0	0-52[53]	17.33	19.48

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LoRa	CH 0(Low Channel), CH 26(MID Channel), CH 52(High Channel)	902.0 MHz, 915.0 MHz, 928.0 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 902.0 MHz to 928.0 MHz Band				
Test Software Version		EUT factory mode		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 64	CH 72	CH 79
LoRa	1	10	10	10
LoRa	2	10	10	10

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	902.0 ~ 928.0	External	2.15
2	902.0 ~ 928.0	External	2.15

Test Mode	Transmit and Receive Mode	Description
LoRa	<input checked="" type="checkbox"/> 1TX	Antenna 1 can be used as transmitting antenna.
LoRa	<input checked="" type="checkbox"/> 1TX	Antenna 2 can be used as transmitting antenna.
Note:		

5.7. SUPPORT UNITS FOR SYSTEM TEST

The following support units or accessories were used to form a representative test configuration during the tests.


Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	PC	Lenovo	B4650-D002	M90601U3	GTG Support

The following cables were used to form a representative test configuration during the tests.

Item	Type of cable	Shielded Type	Ferrite Core	Length
C-1	USB cable	Unshielded	without ferrite	1.0 m

5.8. SETUP DIAGRAM

Radiated emissions & AC Power Line Conducted Emission:



6. MEASURING EQUIPMENT AND SOFTWARE USED

Test Equipment of Conducted RF					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40	102257	2024/09/14	2025/09/13
Spectrum Analyzer	KEYSIGHT	N9020A	MY51285127	2024/09/14	2025/09/13
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61253075	2024/09/14	2025/09/13
Vector Signal Generator	Rohde & Schwarz	SMM100A	101899	2024/09/14	2025/09/13
RF Control box	MWRF-test	MW100-RFCB	MW220926GTG	2024/09/14	2025/09/13
Wideband Radio Communication Tester	Rohde & Schwarz	CMW270	102792	2024/09/14	2025/09/13
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	103235	2024/09/14	2025/09/13
temperature humidity chamber	Espec	SH-241	SH-241-2014	2024/09/14	2025/09/13
RF Test Software	MWRF-test	MTS8310E (Ver. V2/0)	N/A	N/A	N/A

Test Equipment of Radiated emissions below 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2146	2022/08/30	2025/08/29
EMI Test Receiver	Rohde & Schwarz	ESCI3	101409	2024/09/14	2025/09/13
Spectrum Analyzer	KEYSIGHT	N9020A	MY51283932	2024/09/14	2025/09/13
Pre-Amplifier	HzEMC	HPA-9K0130	HYPA21001	2024/09/14	2025/09/13
Biconilog Antenna	Schwarzbeck	VULB 9168	01315	2022/10/10	2025/10/09
Biconilog Antenna	ETS	3142E	00243651	2025/02/22	2028/02/21
Loop Antenna	ETS	6502	00243668	2025/02/22	2028/02/21
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE)	N/A	N/A	N/A

Test Equipment of Radiated emissions above 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2149	2022/08/30	2025/08/29
Spectrum Analyzer	Rohde & Schwarz	FSV40	101413	2024/09/14	2025/09/13
Spectrum Analyzer	KEYSIGHT	N9020A	MY51283932	2024/09/14	2025/09/13
Pre-Amplifier	HzEMC	HPA-1G1850	HYPA21003	2024/09/14	2025/09/13
Horn antenna	ETS	3117	00246069	2025/02/22	2028/02/21
Pre-Amplifier	HzEMC	HPA-184057	HYPA21004	2024/09/14	2025/09/13

Horn antenna	ETS	3116C	00246265	2025/02/22	2028/02/21
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE+)	N/A	N/A	N/A

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED PEAK OUTPUT POWER

LIMITS


ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
ISED RSS-247 5.4 (d)	Peak Conduct Output Power	1 watt or 30 dBm	902-928

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP

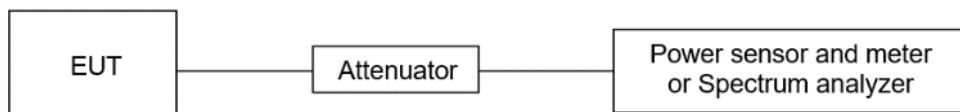

TEST ENVIRONMENT

Temperature	24.1°C	Relative Humidity	53.8%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	902-928
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	902-928

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

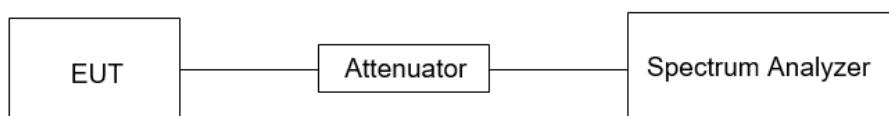

TEST ENVIRONMENT

Temperature	24.1 °C	Relative Humidity	53.8%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.3. POWER SPECTRAL DENSITY

LIMITS

ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	902-928

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

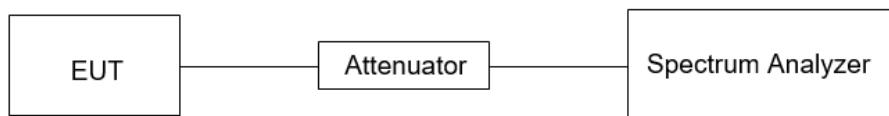

TEST ENVIRONMENT

Temperature	24.1 °C	Relative Humidity	53.8%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.4. CONDUCTED OUT OF BAND EMISSION

LIMITS

ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

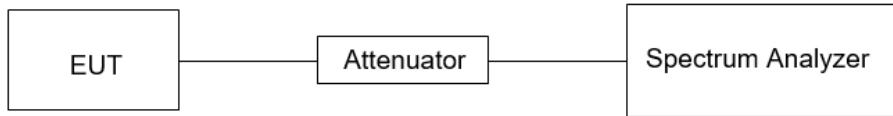TEST SETUP**TEST ENVIRONMENT**

Temperature	24.1 °C	Relative Humidity	53.8%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

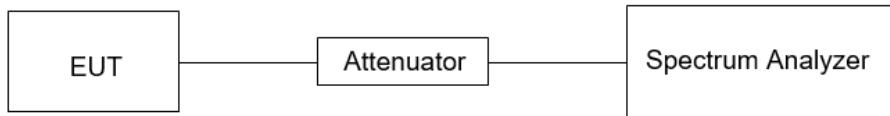

TEST ENVIRONMENT

Temperature	24.1 °C	Relative Humidity	53.8%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz			
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	
0.009-0.490	2400/F(kHz)	300	
0.490-1.705	24000/F(kHz)	30	
1.705-30.0	30	30	

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.28775 - 6.28825	980 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 38.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38875	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57875 - 12.57725	2655 - 2900	
13.36 - 13.41	3280 - 3287	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
26.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5480	
73 - 74.8	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1G

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold


1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.


X axis, Y axis, Z axis positions:

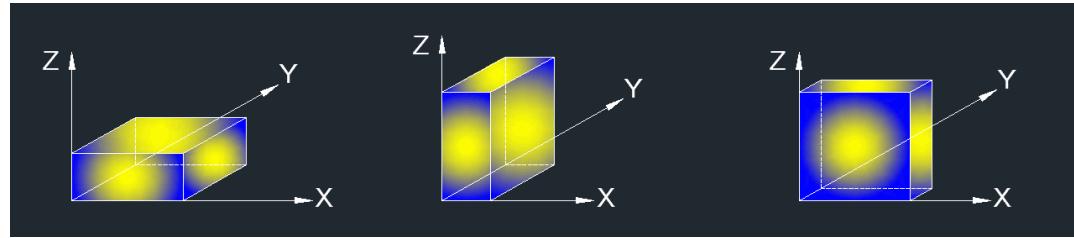

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

TEST SETUP

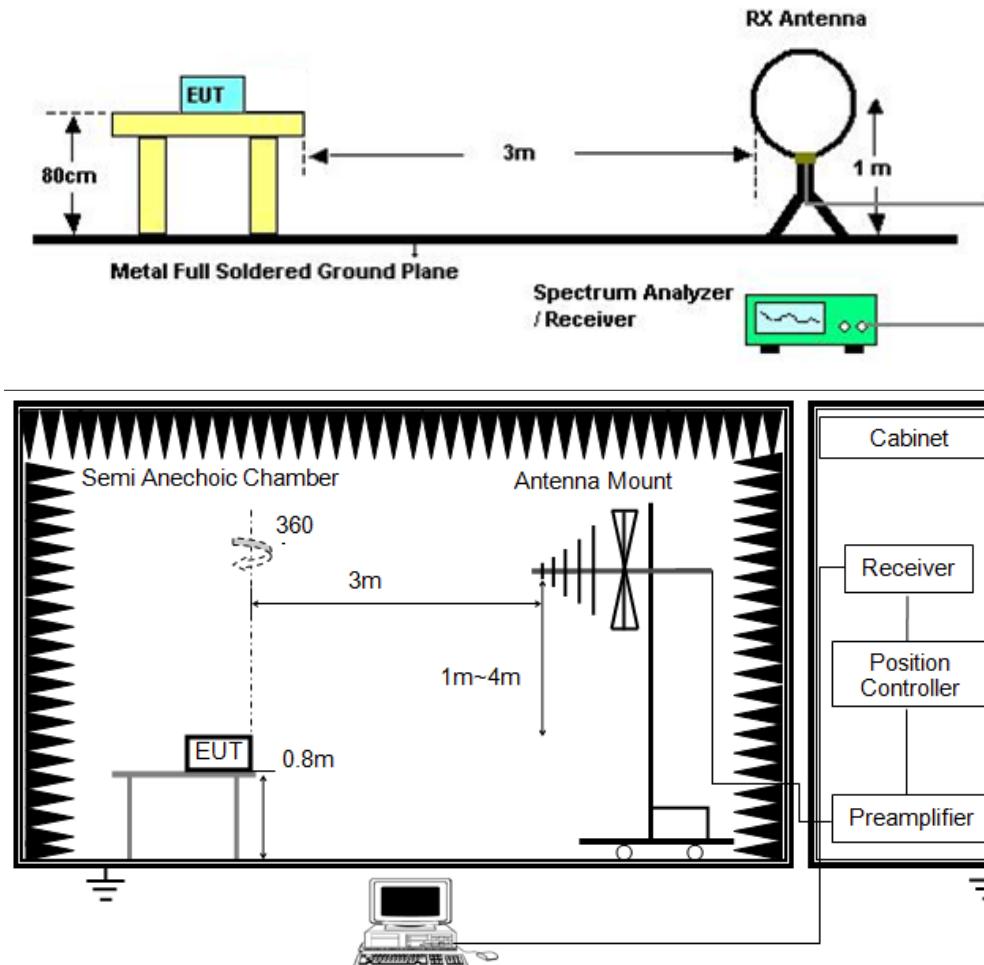

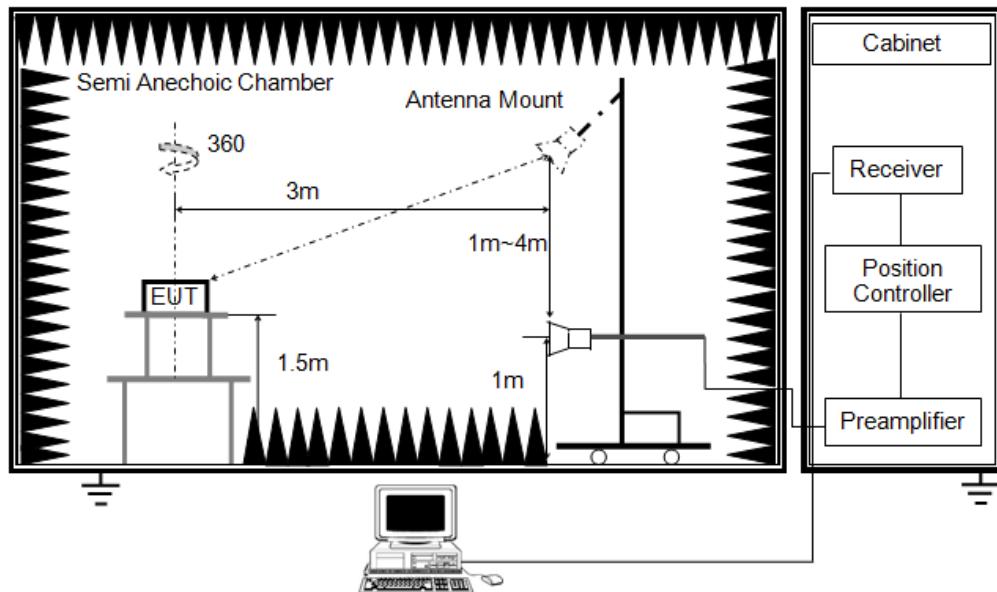

TEST ENVIRONMENT

Temperature	23.8°C	Relative Humidity	53%
Atmosphere Pressure	101kPa		


TEST RESULTS

8.1. RADIATED BAND EDGE AND SPURIOUS EMISSION

- Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

All modes have been tested and the worst result as bellow:


Mode:	902
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

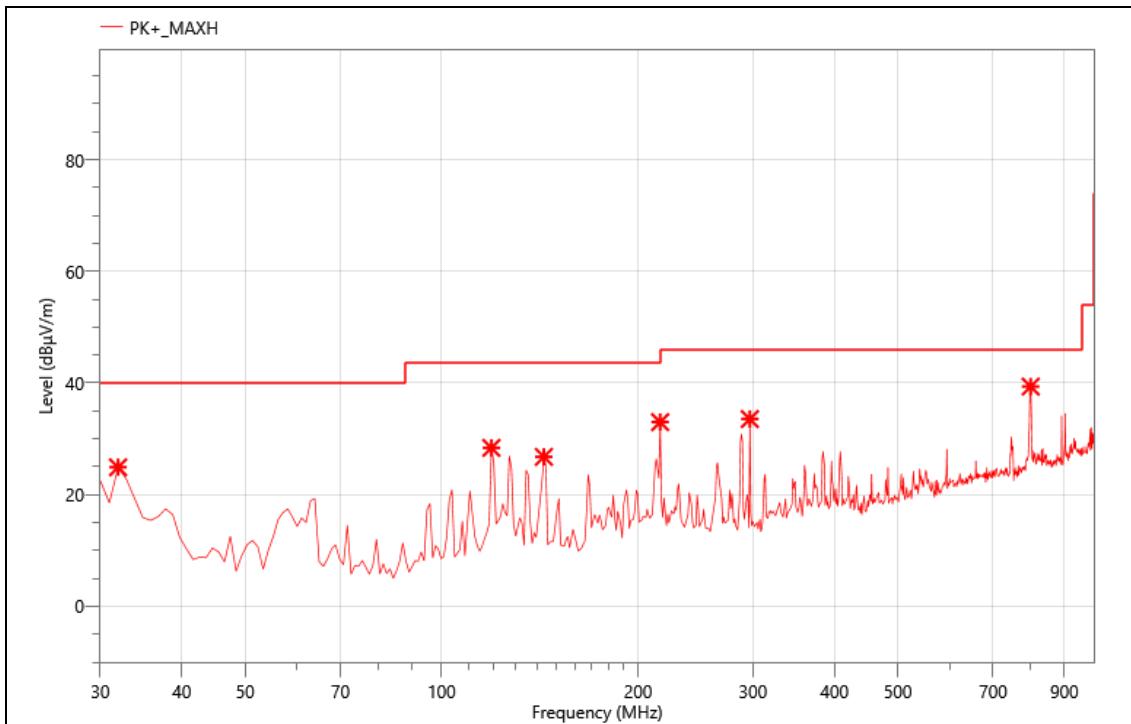

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	31.940	40.33	-15.44	24.89	40.00	15.11	PK+	H
2	119.240	52.92	-24.55	28.37	43.50	15.13	PK+	H
3	143.490	49.77	-23.01	26.76	43.50	16.74	PK+	H
4	216.240	53.72	-20.73	32.99	46.00	13.01	PK+	H
5	296.750	52.44	-18.9	33.54	46.00	12.46	PK+	H
6	799.210	45.14	-5.79	39.35	46.00	6.65	PK+	H


Mode:	902
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

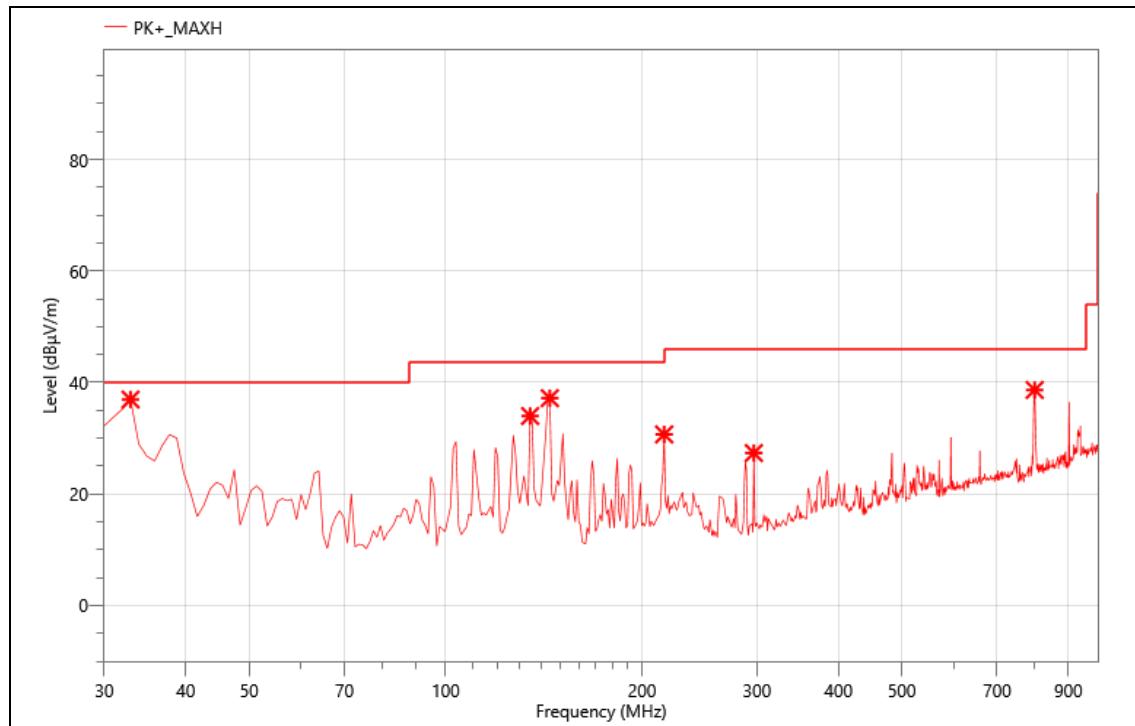

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	32.910	52.98	-16.04	36.94	40.00	3.06	PK+	V
2	134.760	57.54	-23.57	33.97	43.50	9.53	PK+	V
3	144.460	60.13	-22.95	37.18	43.50	6.32	PK+	V
4	216.240	51.41	-20.73	30.68	46.00	15.32	PK+	V
5	296.750	46.23	-18.9	27.33	46.00	18.67	PK+	V
6	799.210	44.44	-5.79	38.65	46.00	7.35	PK+	V


Mode:	915
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

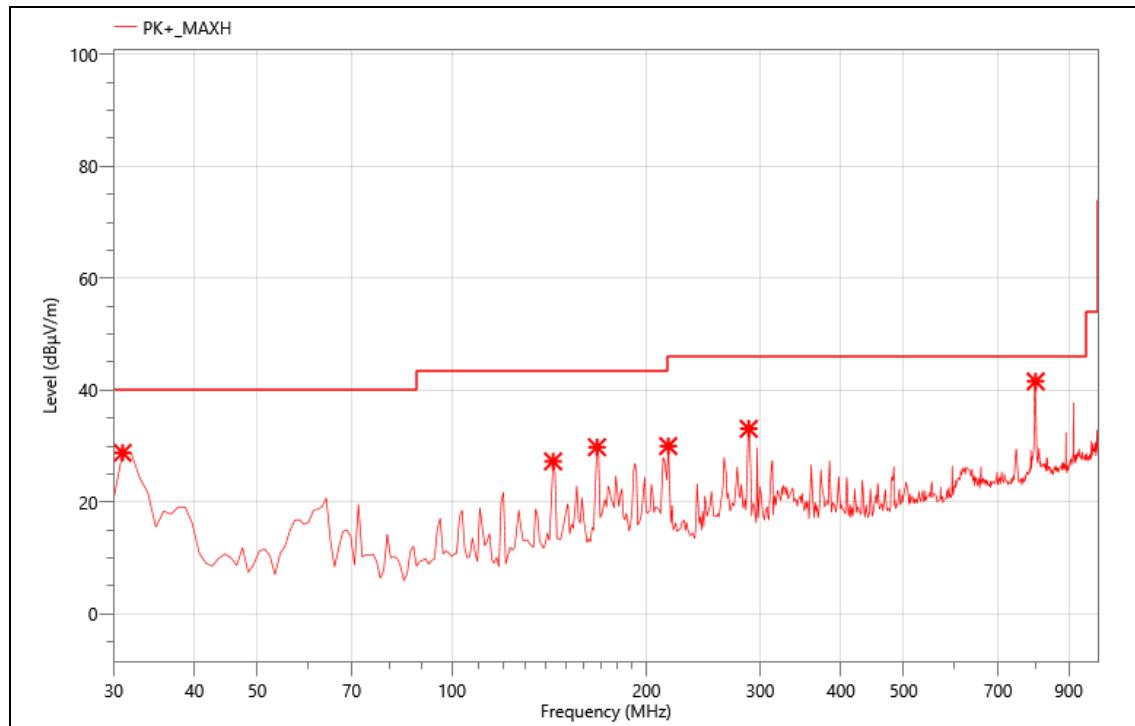

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	30.970	43.66	-14.87	28.79	40.00	11.21	PK+	H
2	143.490	50.28	-23.01	27.27	43.50	16.23	PK+	H
3	167.740	52.10	-22.3	29.80	43.50	13.70	PK+	H
4	216.240	50.73	-20.73	30.00	46.00	16.00	PK+	H
5	288.020	52.50	-19.4	33.10	46.00	12.90	PK+	H
6	800.180	47.32	-5.76	41.56	46.00	4.44	PK+	H


Mode:	915
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

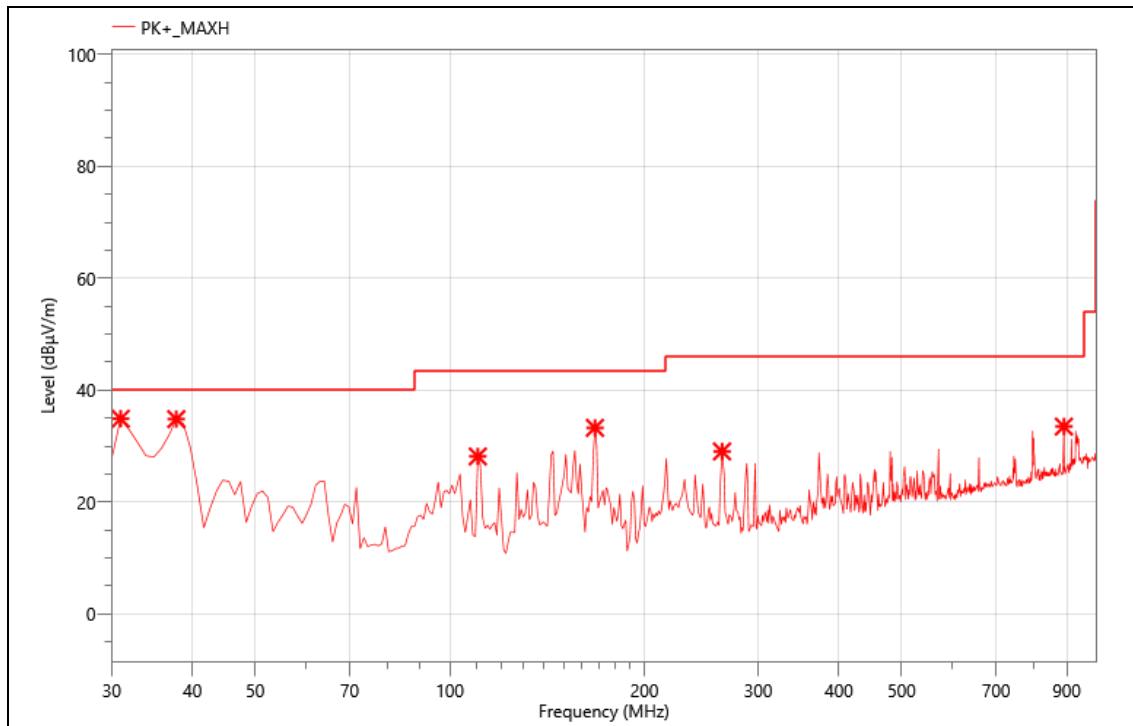

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	30.970	49.76	-14.87	34.89	40.00	5.11	PK+	V
2	37.760	53.68	-18.85	34.83	40.00	5.17	PK+	V
3	110.510	52.21	-24.06	28.15	43.50	15.35	PK+	V
4	167.740	55.56	-22.3	33.26	43.50	10.24	PK+	V
5	263.770	47.19	-18.14	29.05	46.00	16.95	PK+	V
6	891.360	37.85	-4.36	33.49	46.00	12.51	PK+	V


Mode:	928
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

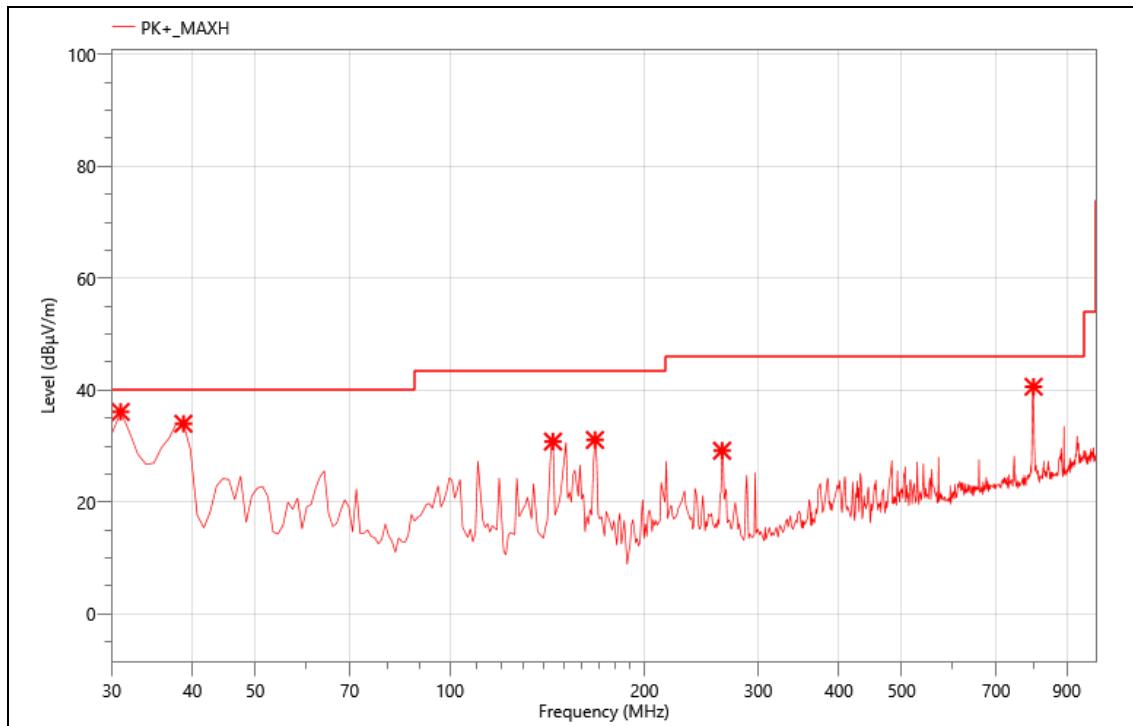

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	30.970	50.98	-14.87	36.11	40.00	3.89	PK+	V
2	38.730	53.38	-19.38	34.00	40.00	6.00	PK+	V
3	144.460	53.76	-22.95	30.81	43.50	12.69	PK+	V
4	167.740	53.40	-22.3	31.10	43.50	12.40	PK+	V
5	263.770	47.31	-18.14	29.17	46.00	16.83	PK+	V
6	800.180	46.37	-5.76	40.61	46.00	5.39	PK+	V


Mode:	928
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

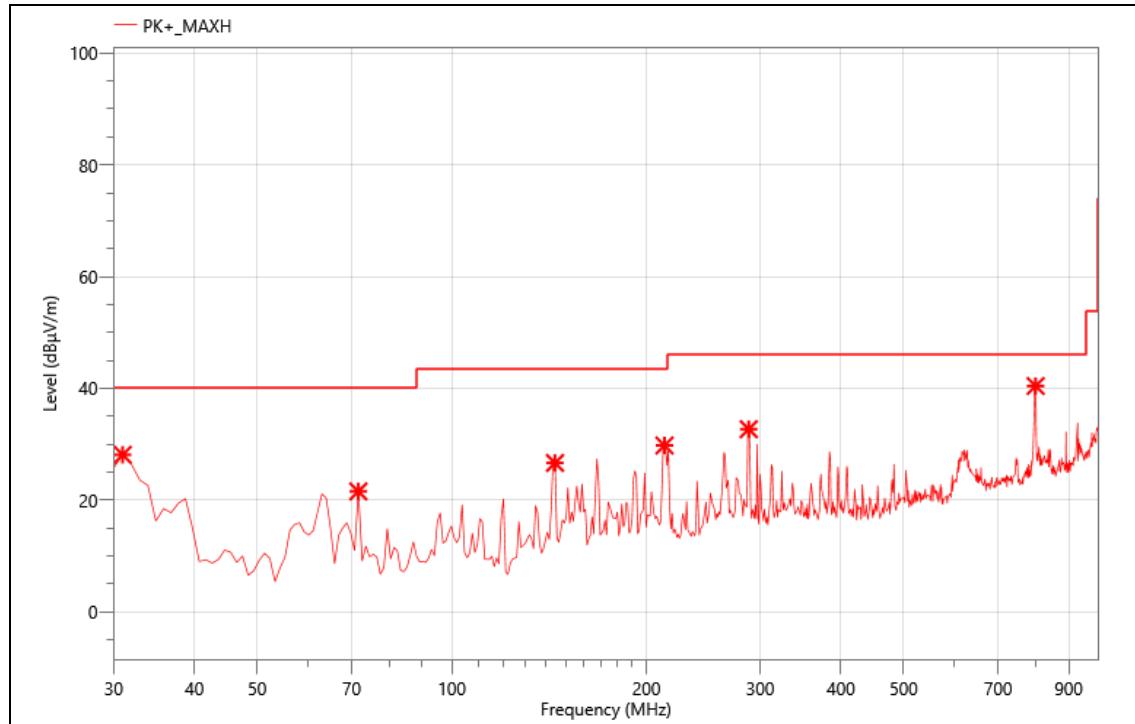

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	30.970	43.00	-14.87	28.13	40.00	11.87	PK+	H
2	71.710	46.37	-24.79	21.58	40.00	18.42	PK+	H
3	144.460	49.62	-22.95	26.67	43.50	16.83	PK+	H
4	213.330	50.73	-20.94	29.79	43.50	13.71	PK+	H
5	288.020	52.11	-19.4	32.71	46.00	13.29	PK+	H
6	800.180	46.19	-5.76	40.43	46.00	5.57	PK+	H


Mode:	902
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

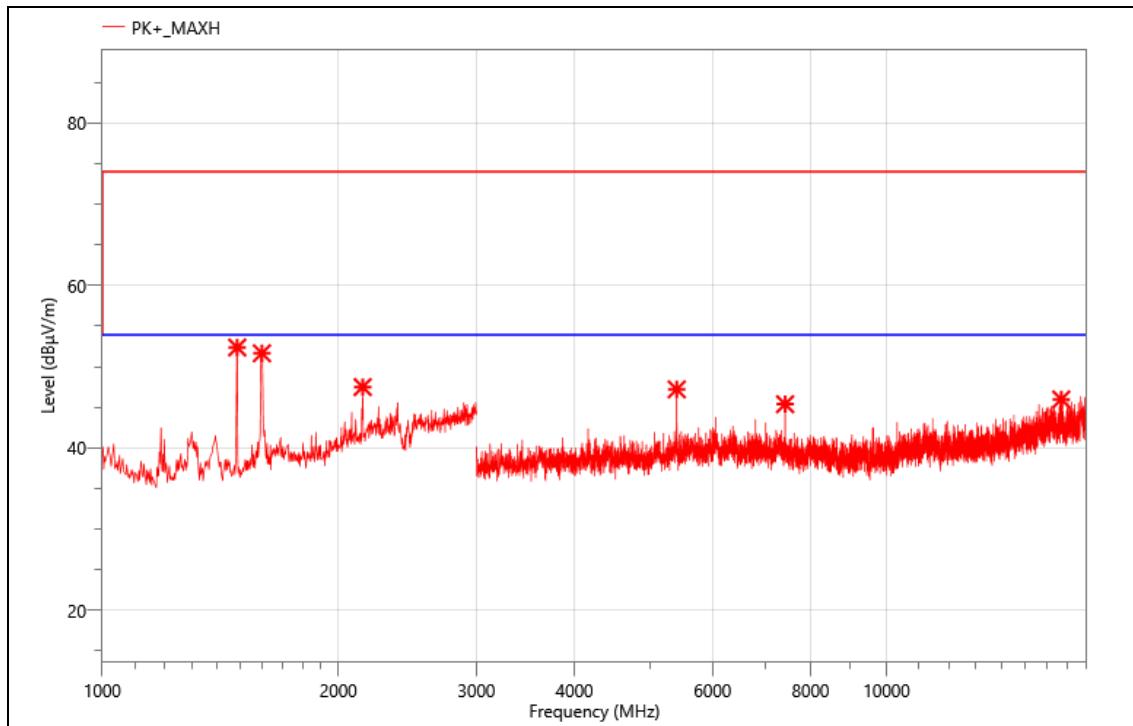

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1486.000	66.20	-13.83	52.37	74.00	21.63	PK+	H
2	1598.000	64.49	-12.83	51.66	74.00	22.34	PK+	H
3	2148.000	56.54	-9.05	47.49	74.00	26.51	PK+	H
4	5400.000	56.62	-9.41	47.21	74.00	26.79	PK+	H
5	7425.000	53.35	-7.97	45.38	74.00	28.62	PK+	H
6	16701.000	46.52	-0.55	45.97	74.00	28.03	PK+	H


Mode:	902
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

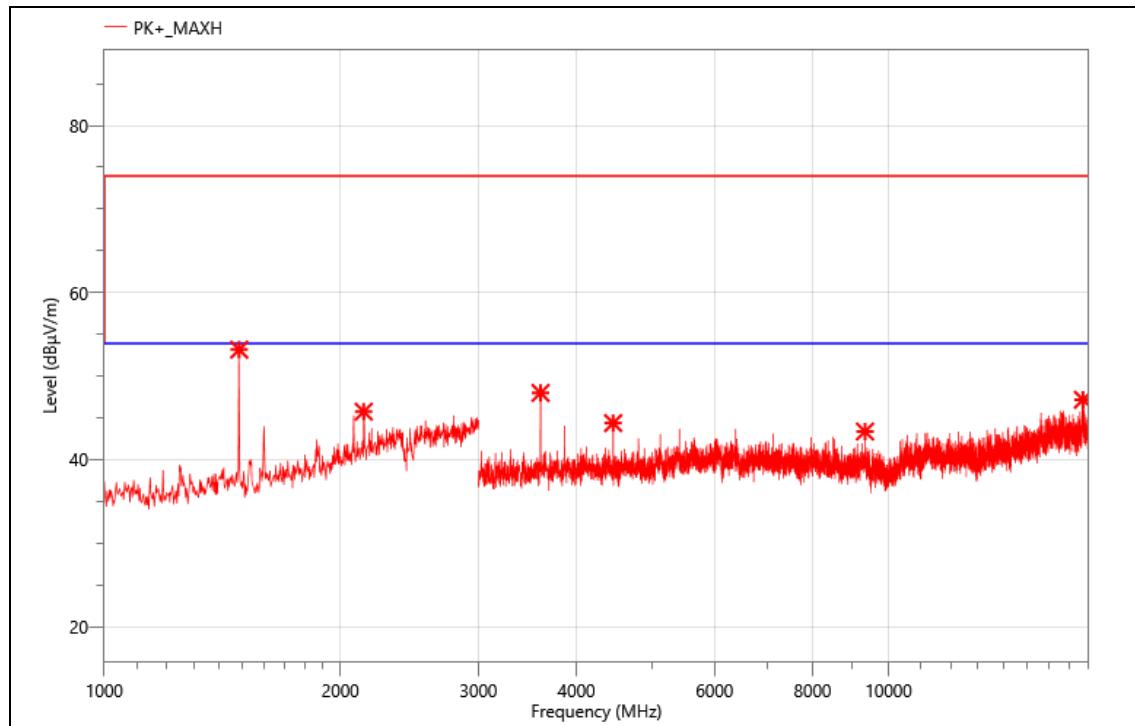

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	66.99	-13.83	53.16	74.00	20.84	PK+	V
2	2142.000	54.79	-9.05	45.74	74.00	28.26	PK+	V
3	3600.000	61.71	-13.73	47.98	74.00	26.02	PK+	V
4	4455.000	56.56	-12.19	44.37	74.00	29.63	PK+	V
5	9331.500	50.48	-7.12	43.36	74.00	30.64	PK+	V
6	17697.000	46.96	0.2	47.16	74.00	26.84	PK+	V


Mode:	915
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

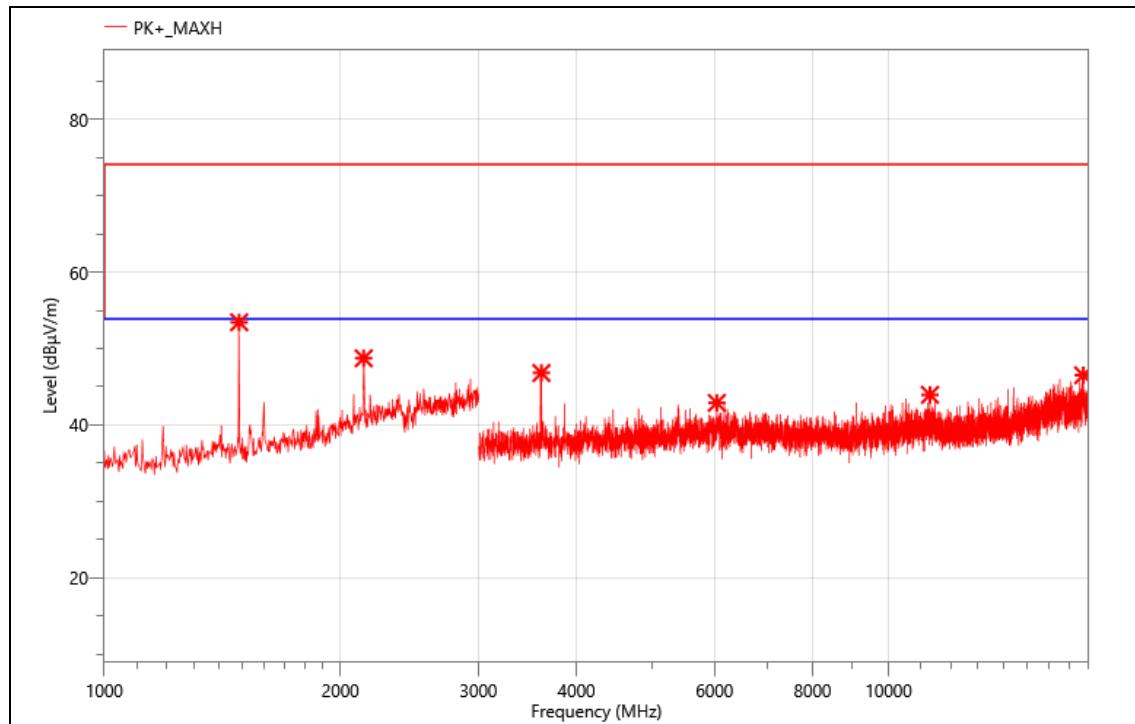

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	67.27	-13.83	53.44	74.00	20.56	PK+	V
2	2142.000	57.78	-9.05	48.73	74.00	25.27	PK+	V
3	3609.000	60.43	-13.62	46.81	74.00	27.19	PK+	V
4	6039.000	51.22	-8.32	42.90	74.00	31.10	PK+	V
5	11293.500	48.18	-4.23	43.95	74.00	30.05	PK+	V
6	17710.500	46.56	-0.05	46.51	74.00	27.49	PK+	V


Mode:	915
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

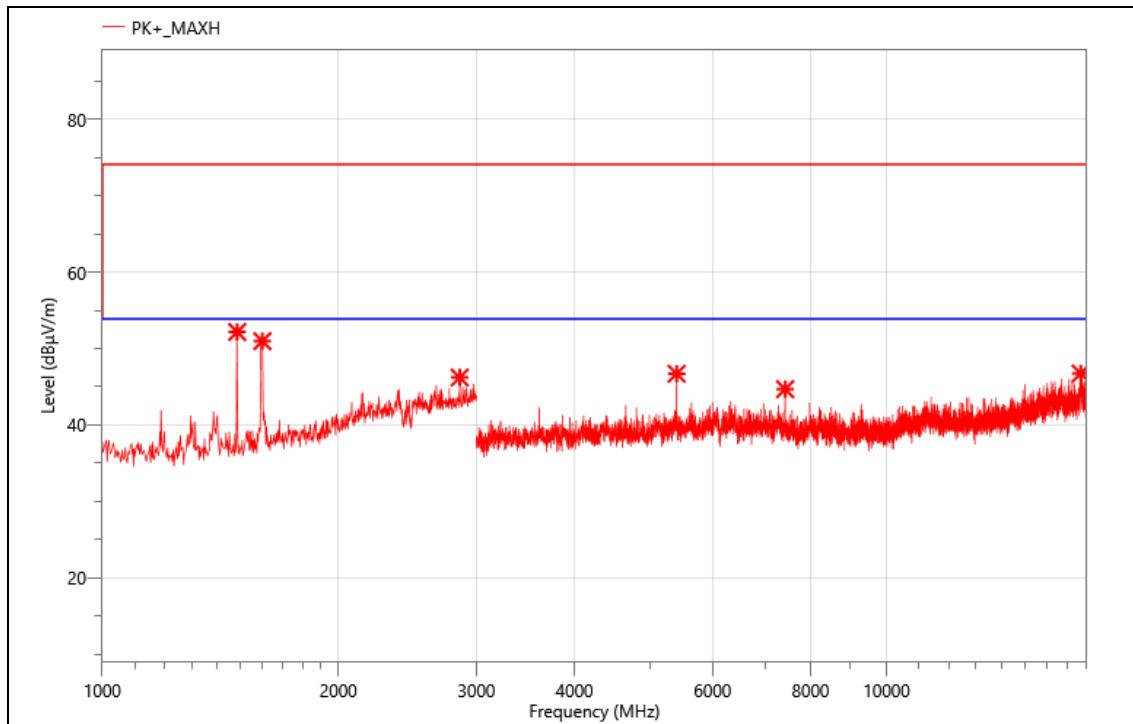

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	66.00	-13.83	52.17	74.00	21.83	PK+	H
2	1600.000	63.78	-12.81	50.97	74.00	23.03	PK+	H
3	2856.000	54.44	-8.22	46.22	74.00	27.78	PK+	H
4	5400.000	56.12	-9.41	46.71	74.00	27.29	PK+	H
5	7425.000	52.66	-7.97	44.69	74.00	29.31	PK+	H
6	17682.000	46.46	0.28	46.74	74.00	27.26	PK+	H


Mode:	928
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

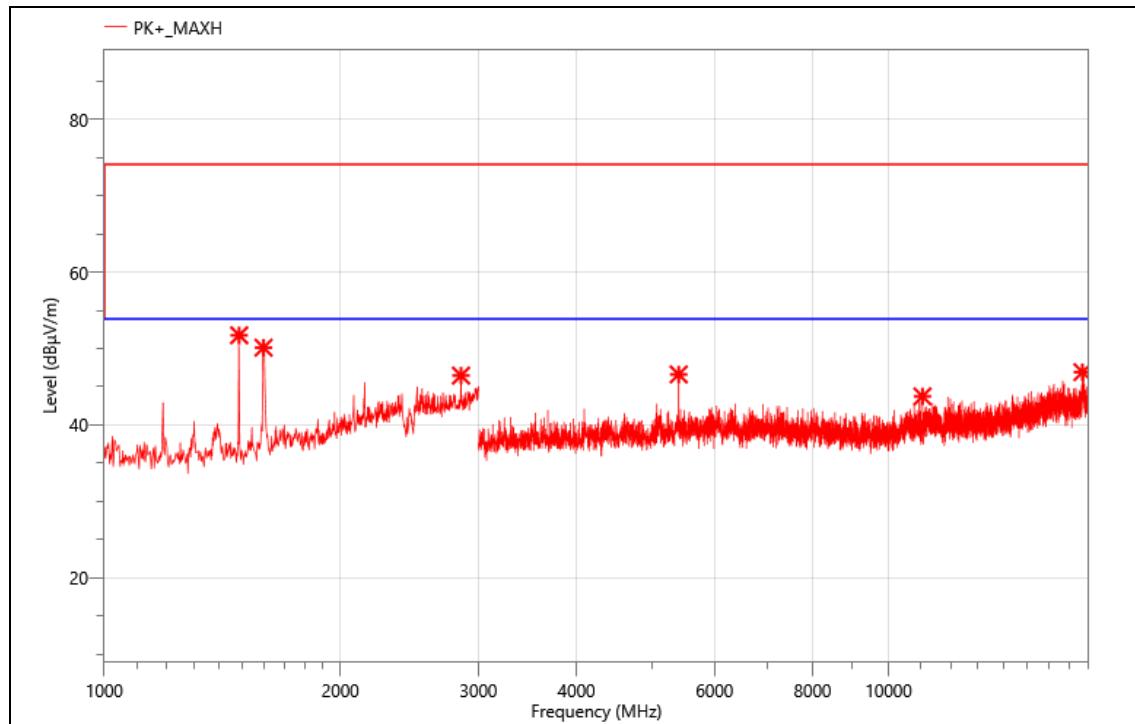

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	65.57	-13.83	51.74	74.00	22.26	PK+	H
2	1596.000	62.97	-12.85	50.12	74.00	23.88	PK+	H
3	2850.000	54.57	-8.1	46.47	74.00	27.53	PK+	H
4	5400.000	56.03	-9.41	46.62	74.00	27.38	PK+	H
5	11046.000	48.85	-5.1	43.75	74.00	30.25	PK+	H
6	17670.000	46.66	0.26	46.92	74.00	27.08	PK+	H


Mode:	928
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

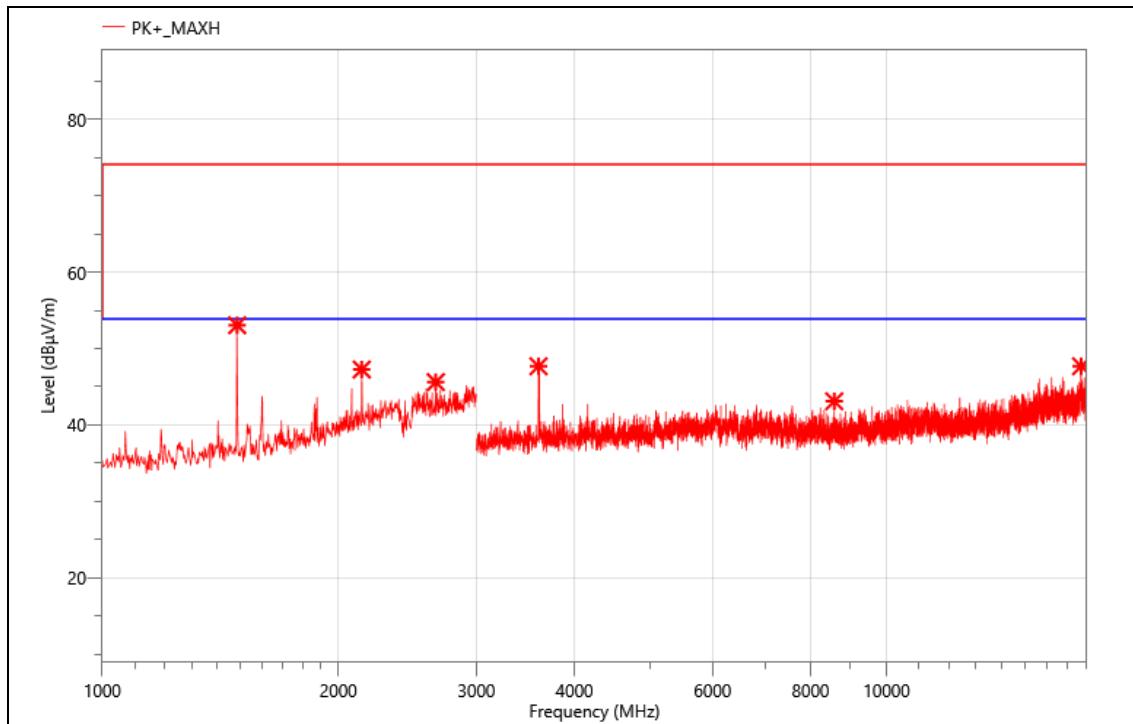

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	66.88	-13.83	53.05	74.00	20.95	PK+	V
2	2142.000	56.31	-9.05	47.26	74.00	26.74	PK+	V
3	2662.000	54.28	-8.66	45.62	74.00	28.38	PK+	V
4	3600.000	61.42	-13.73	47.69	74.00	26.31	PK+	V
5	8577.000	51.01	-7.9	43.11	74.00	30.89	PK+	V
6	17706.000	47.64	0.05	47.69	74.00	26.31	PK+	V


Mode:	902
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

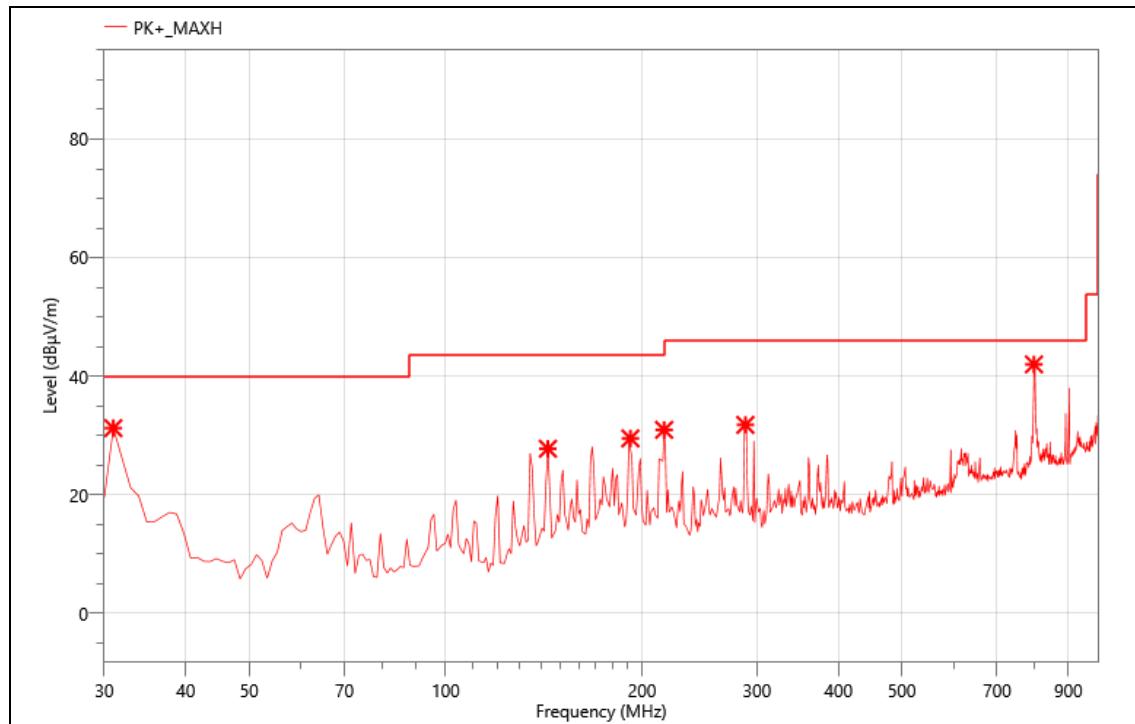

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	30.970	46.08	-14.87	31.21	40.00	8.79	PK+	H
2	143.490	50.75	-23.01	27.74	43.50	15.76	PK+	H
3	191.990	52.07	-22.59	29.48	43.50	14.02	PK+	H
4	216.240	51.65	-20.73	30.92	46.00	15.08	PK+	H
5	288.020	51.16	-19.4	31.76	46.00	14.24	PK+	H
6	797.270	47.88	-5.9	41.98	46.00	4.02	PK+	H


Mode:	902
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

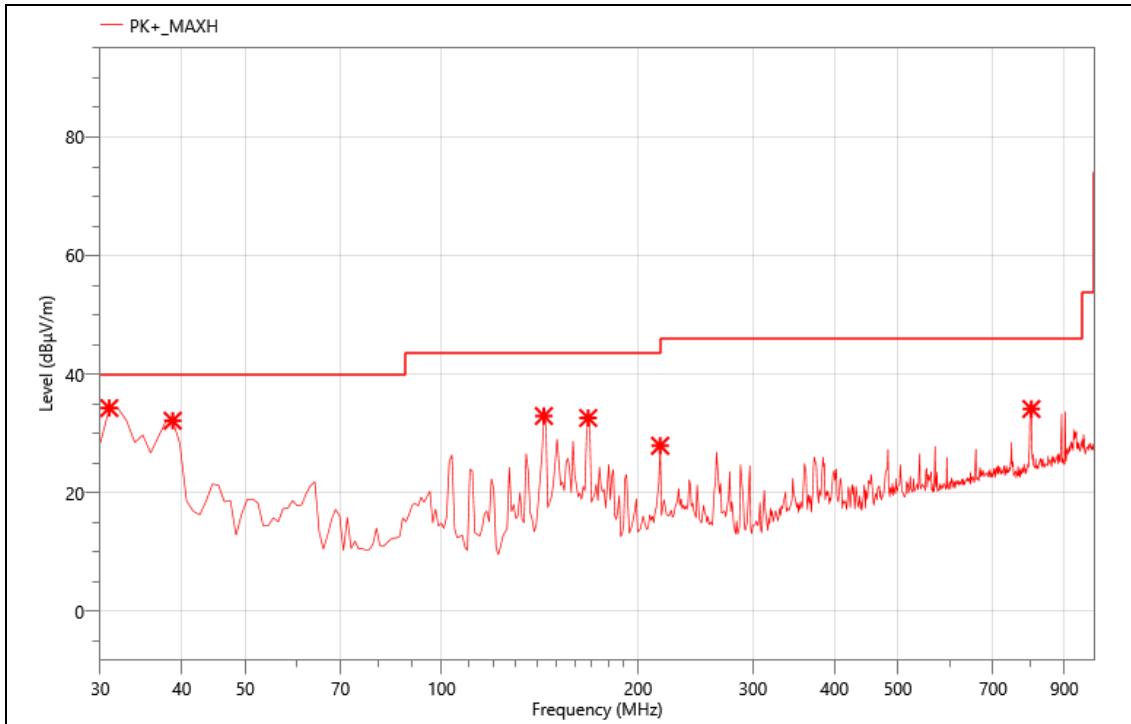

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	30.970	49.13	-14.87	34.26	40.00	5.74	PK+	V
2	38.730	51.51	-19.38	32.13	40.00	7.87	PK+	V
3	143.490	55.94	-23.01	32.93	43.50	10.57	PK+	V
4	167.740	54.89	-22.3	32.59	43.50	10.91	PK+	V
5	216.240	48.62	-20.73	27.89	46.00	18.11	PK+	V
6	801.150	39.81	-5.7	34.11	46.00	11.89	PK+	V


Mode:	915
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

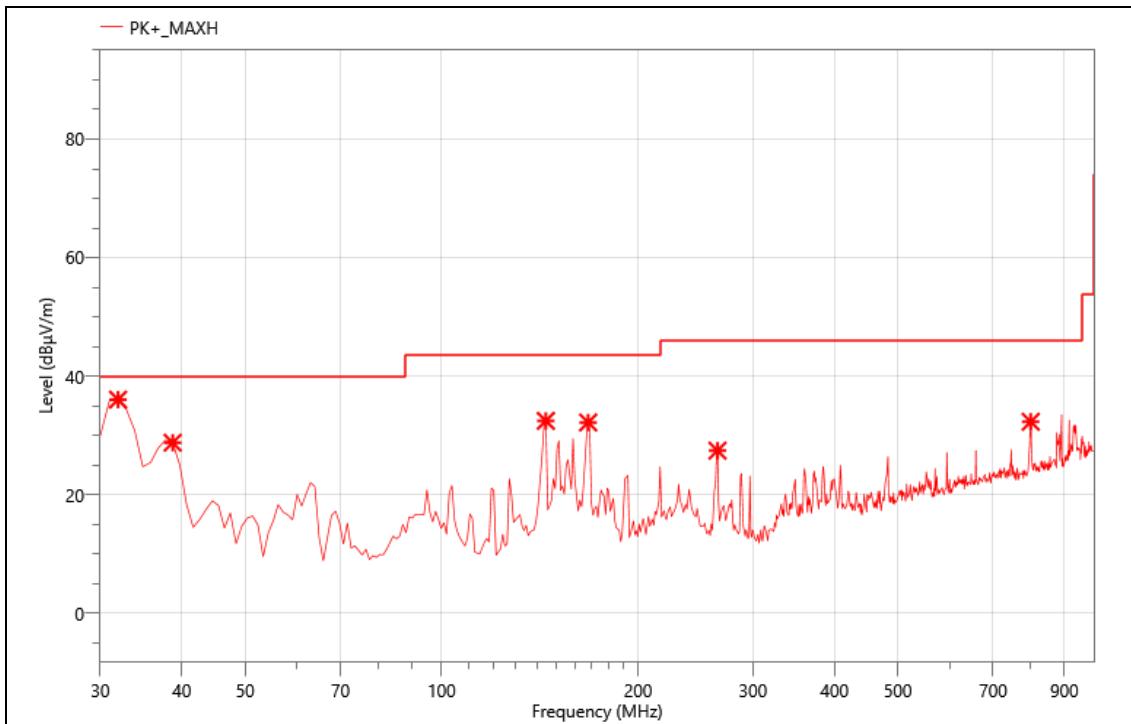

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	31.940	51.47	-15.44	36.03	40.00	3.97	PK+	V
2	38.730	48.13	-19.38	28.75	40.00	11.25	PK+	V
3	144.460	55.39	-22.95	32.44	43.50	11.06	PK+	V
4	167.740	54.47	-22.3	32.17	43.50	11.33	PK+	V
5	264.740	45.48	-18.07	27.41	46.00	18.59	PK+	V
6	799.210	38.08	-5.79	32.29	46.00	13.71	PK+	V


Mode:	915
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

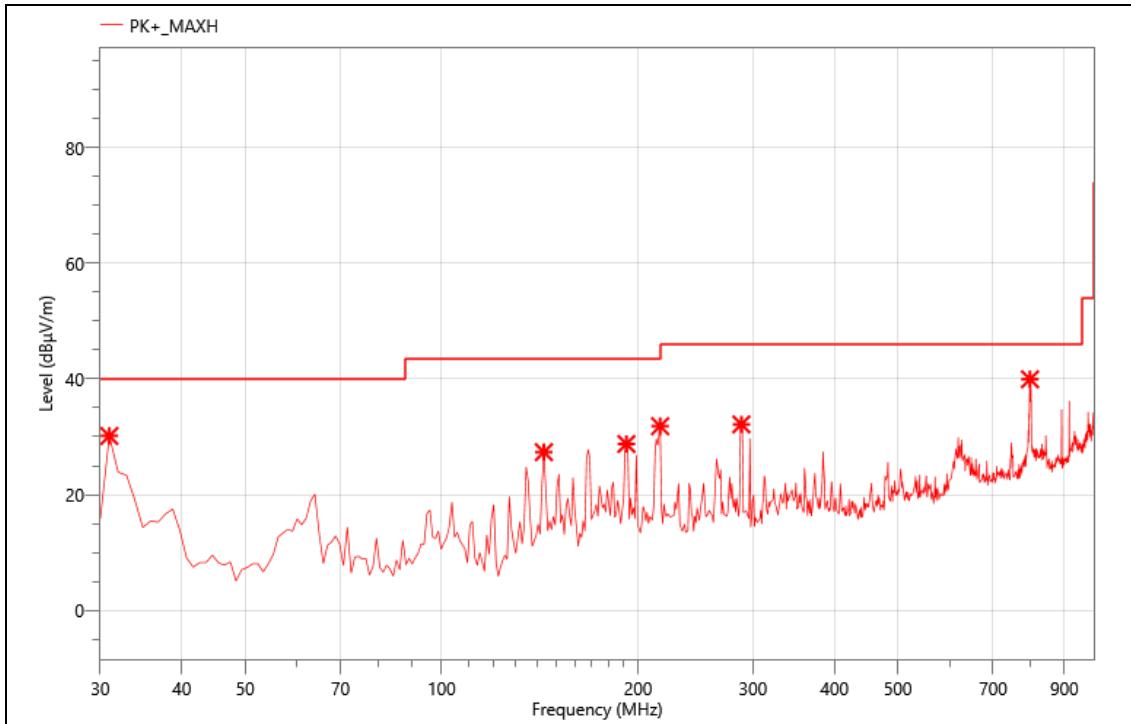

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	30.970	45.02	-14.87	30.15	40.00	9.85	PK+	H
2	143.490	50.36	-23.01	27.35	43.50	16.15	PK+	H
3	191.990	51.35	-22.59	28.76	43.50	14.74	PK+	H
4	216.240	52.57	-20.73	31.84	46.00	14.16	PK+	H
5	288.020	51.54	-19.4	32.14	46.00	13.86	PK+	H
6	797.270	45.85	-5.9	39.95	46.00	6.05	PK+	H


Mode:	928
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

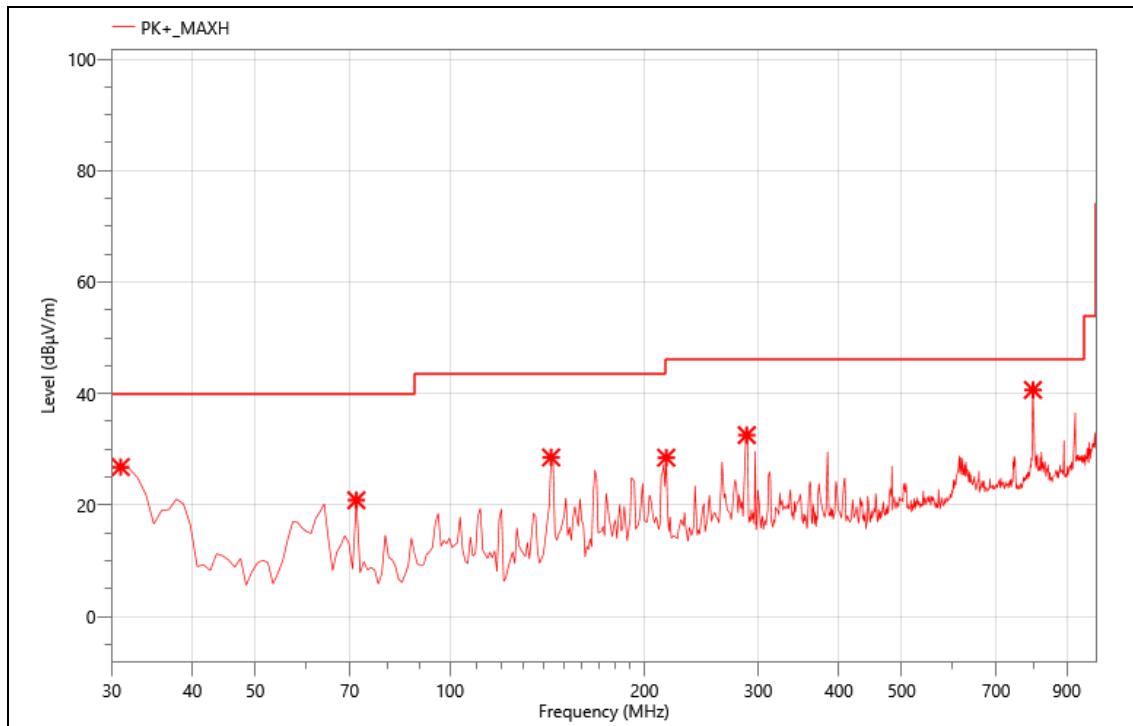

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	30.970	41.68	-14.87	26.81	40.00	13.19	PK+	H
2	71.710	45.65	-24.79	20.86	40.00	19.14	PK+	H
3	143.490	51.55	-23.01	28.54	43.50	14.96	PK+	H
4	216.240	49.22	-20.73	28.49	46.00	17.51	PK+	H
5	288.020	51.94	-19.4	32.54	46.00	13.46	PK+	H
6	798.240	46.47	-5.83	40.64	46.00	5.36	PK+	H


Mode:	928
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

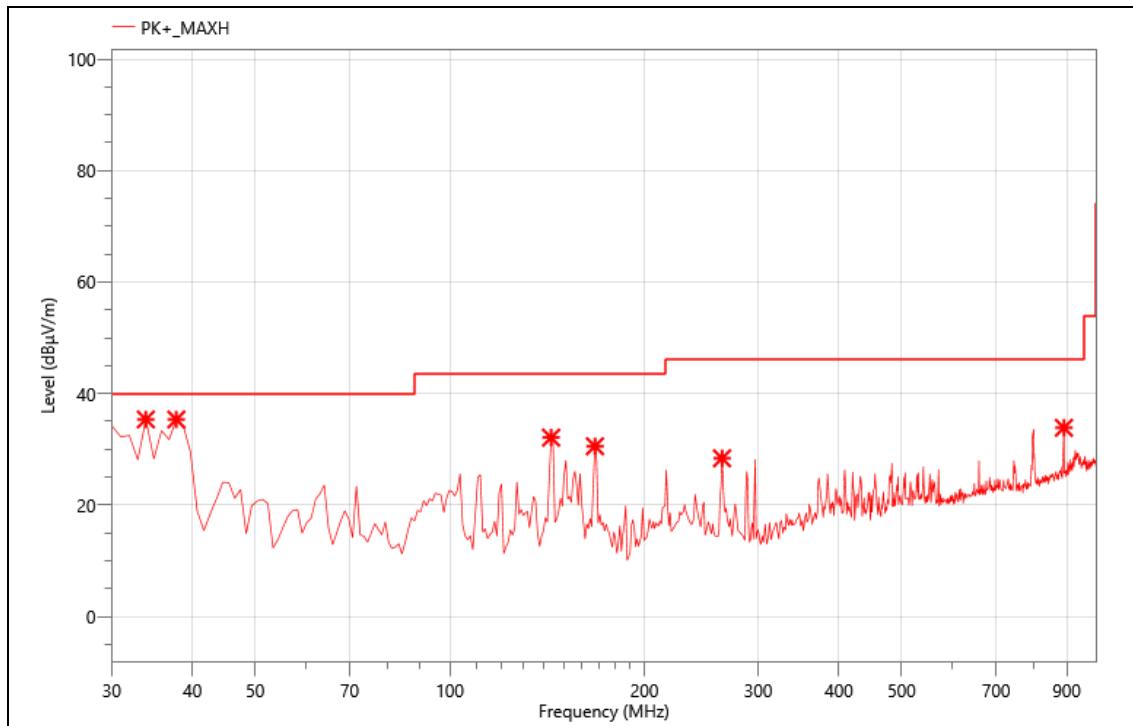

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	33.880	51.99	-16.63	35.36	40.00	4.64	PK+	V
2	37.760	54.19	-18.85	35.34	40.00	4.66	PK+	V
3	143.490	55.11	-23.01	32.10	43.50	11.40	PK+	V
4	167.740	52.84	-22.3	30.54	43.50	12.96	PK+	V
5	263.770	46.53	-18.14	28.39	46.00	17.61	PK+	V
6	891.360	38.21	-4.36	33.85	46.00	12.15	PK+	V


Mode:	902
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

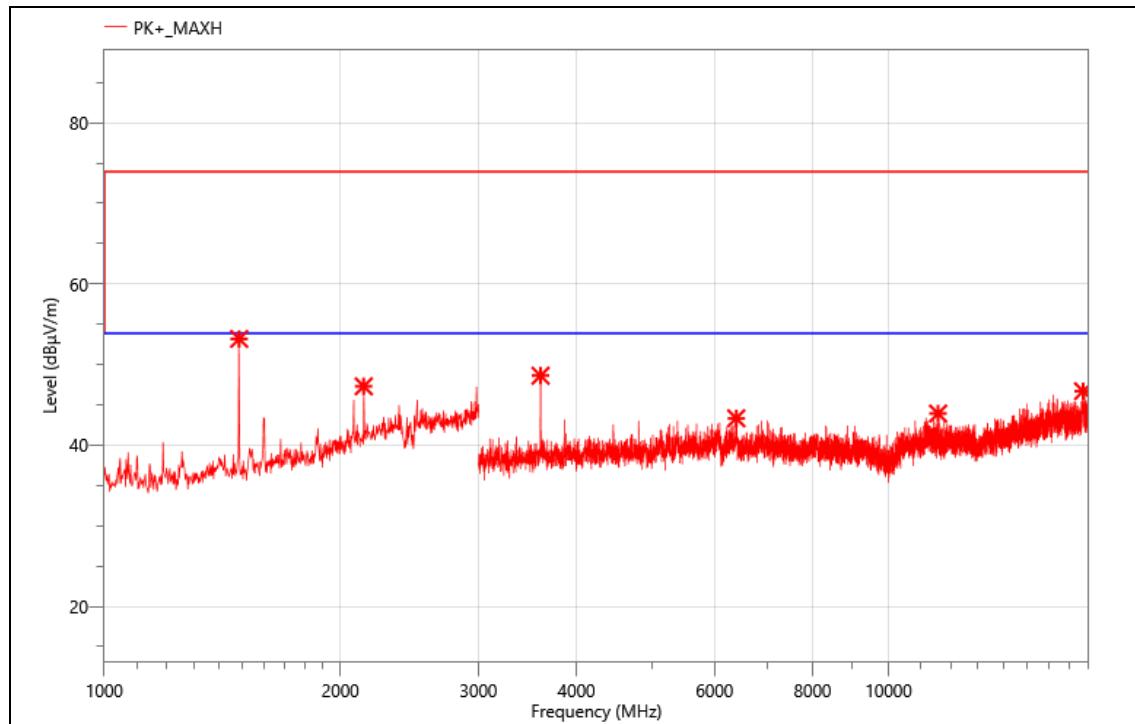

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	67.02	-13.83	53.19	74.00	20.81	PK+	V
2	2142.000	56.36	-9.05	47.31	74.00	26.69	PK+	V
3	3600.000	62.36	-13.73	48.63	74.00	25.37	PK+	V
4	6394.500	51.39	-8.05	43.34	74.00	30.66	PK+	V
5	11565.000	48.25	-4.32	43.93	74.00	30.07	PK+	V
6	17703.000	46.59	0.11	46.70	74.00	27.30	PK+	V


Mode:	902
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

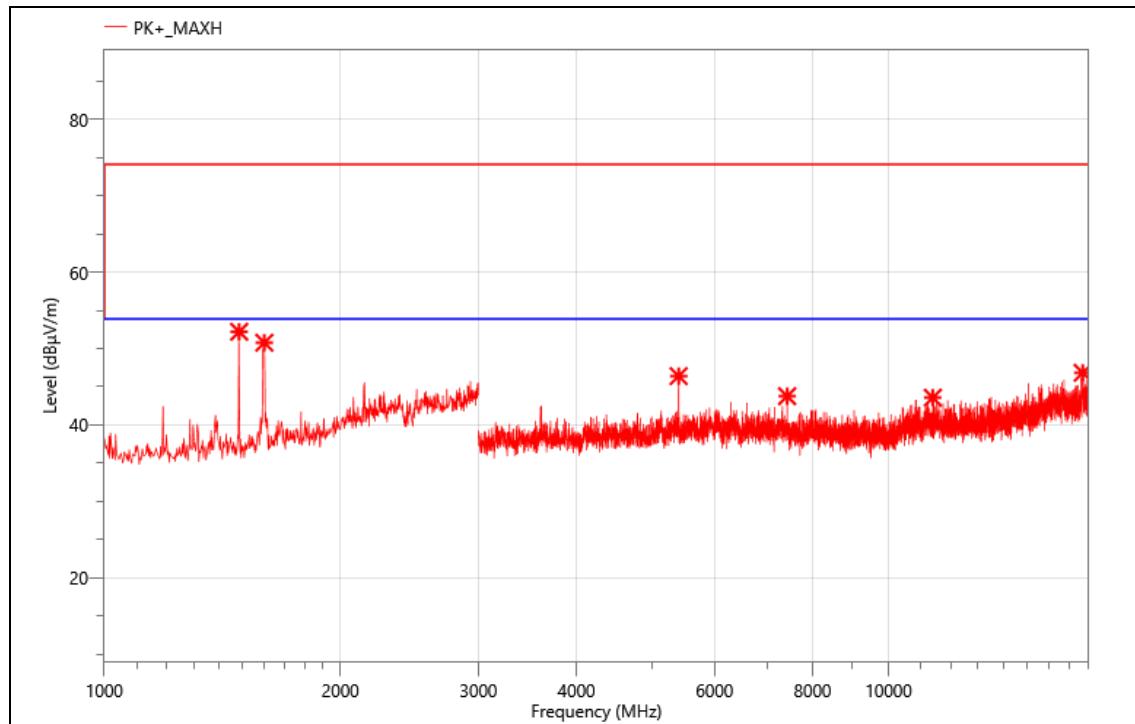

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	66.03	-13.83	52.20	74.00	21.80	PK+	H
2	1600.000	63.58	-12.81	50.77	74.00	23.23	PK+	H
3	5400.000	55.81	-9.41	46.40	74.00	27.60	PK+	H
4	7425.000	51.75	-7.97	43.78	74.00	30.22	PK+	H
5	11386.500	47.93	-4.35	43.58	74.00	30.42	PK+	H
6	17683.500	46.56	0.27	46.83	74.00	27.17	PK+	H


Mode:	915
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

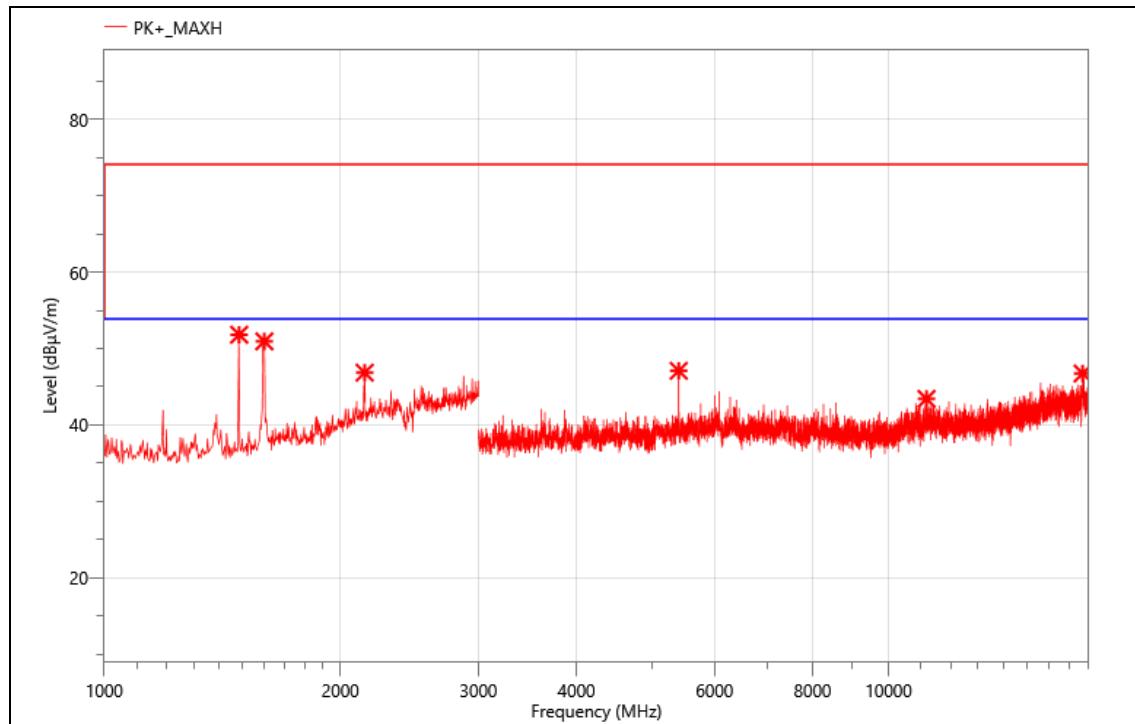

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	65.64	-13.83	51.81	74.00	22.19	PK+	H
2	1600.000	63.75	-12.81	50.94	74.00	23.06	PK+	H
3	2148.000	55.90	-9.05	46.85	74.00	27.15	PK+	H
4	5400.000	56.51	-9.41	47.10	74.00	26.90	PK+	H
5	11178.000	47.90	-4.48	43.42	74.00	30.58	PK+	H
6	17680.500	46.45	0.29	46.74	74.00	27.26	PK+	H


Mode:	915
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

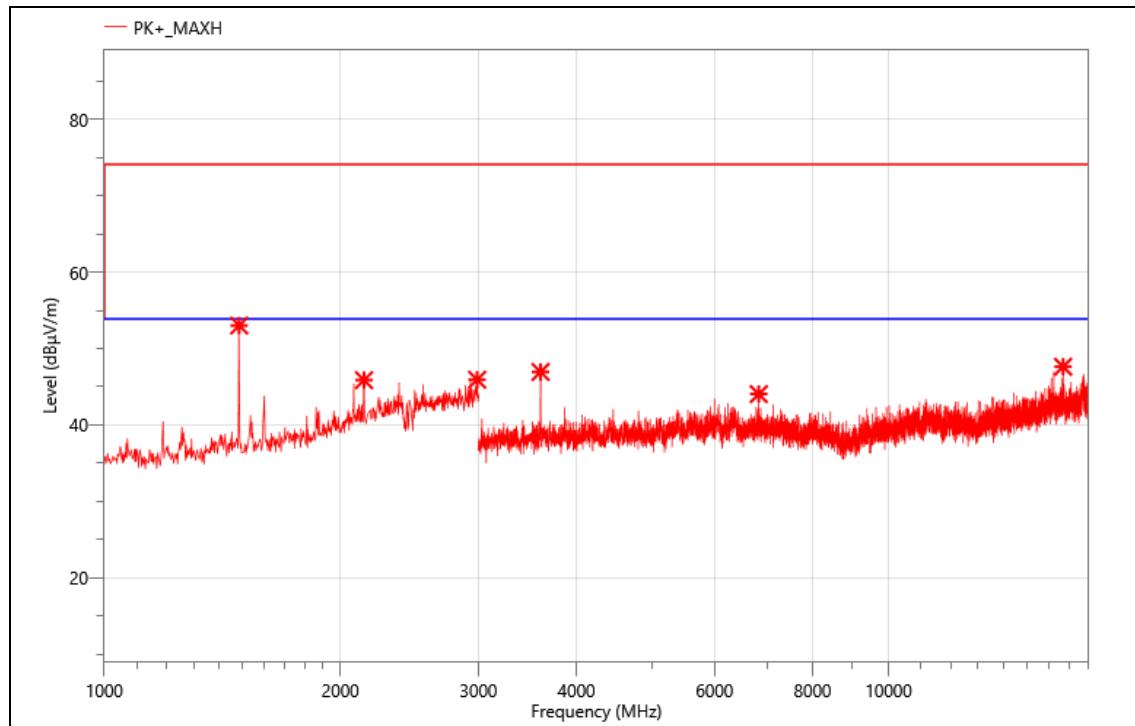

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	66.84	-13.83	53.01	74.00	20.99	PK+	V
2	2144.000	54.92	-9.05	45.87	74.00	28.13	PK+	V
3	2988.000	52.90	-6.97	45.93	74.00	28.07	PK+	V
4	3600.000	60.68	-13.73	46.95	74.00	27.05	PK+	V
5	6831.000	52.19	-8.14	44.05	74.00	29.95	PK+	V
6	16692.000	48.11	-0.49	47.62	74.00	26.38	PK+	V


Mode:	928
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

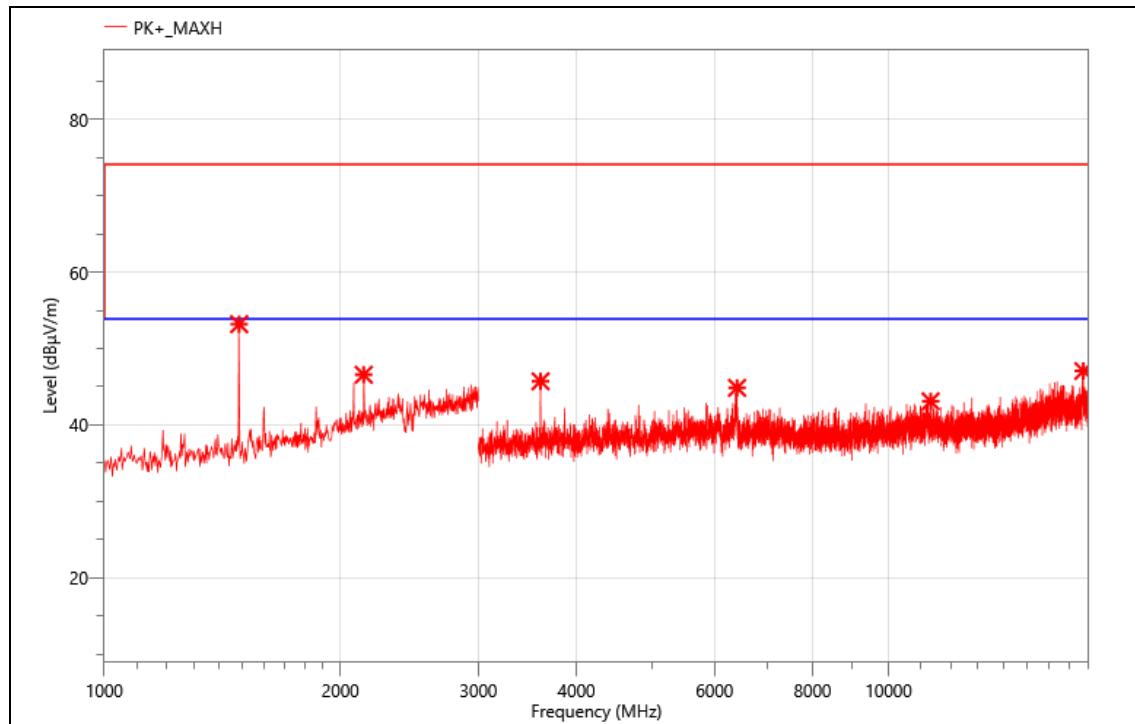

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	1486.000	67.02	-13.83	53.19	74.00	20.81	PK+	V
2	2142.000	55.63	-9.05	46.58	74.00	27.42	PK+	V
3	3600.000	59.45	-13.73	45.72	74.00	28.28	PK+	V
4	6409.500	53.11	-8.25	44.86	74.00	29.14	PK+	V
5	11314.500	47.72	-4.62	43.10	74.00	30.90	PK+	V
6	17716.500	47.25	-0.18	47.07	74.00	26.93	PK+	V

Mode:	928
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

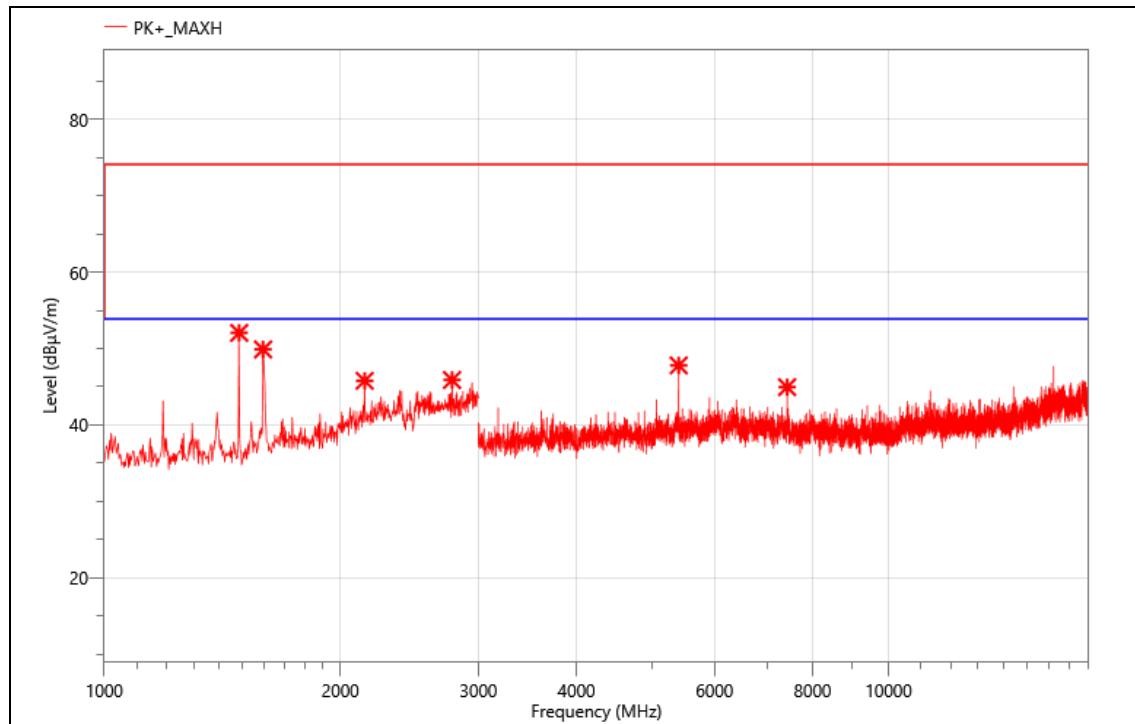


Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	1486.000	65.88	-13.83	52.05	74.00	21.95	PK+	H
2	1594.000	62.75	-12.86	49.89	74.00	24.11	PK+	H
3	2148.000	54.84	-9.05	45.79	74.00	28.21	PK+	H
4	2776.000	54.23	-8.34	45.89	74.00	28.11	PK+	H
5	5400.000	57.21	-9.41	47.80	74.00	26.20	PK+	H
6	7425.000	52.93	-7.97	44.96	74.00	29.04	PK+	H

Note : [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

For the frequency above 18 GHz, a pre-scan was performed, and the result was 20 dB lower than the limit line, the test data was not shown in the report.


- Band Edge

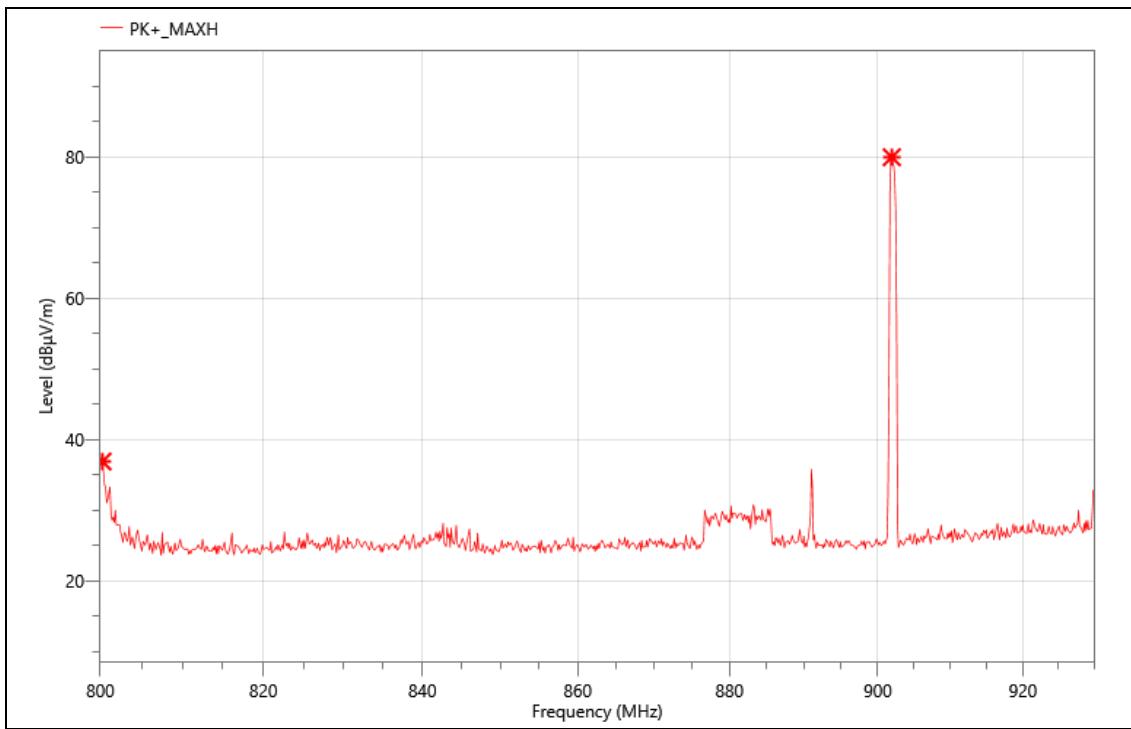

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	800.260	42.62	-5.75	36.87	Delta=79.95- 36.87=43.08dBc	PK+ V	PK+ V	V
2	901.920	84.22	-4.27	79.95				


Mode:	902
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

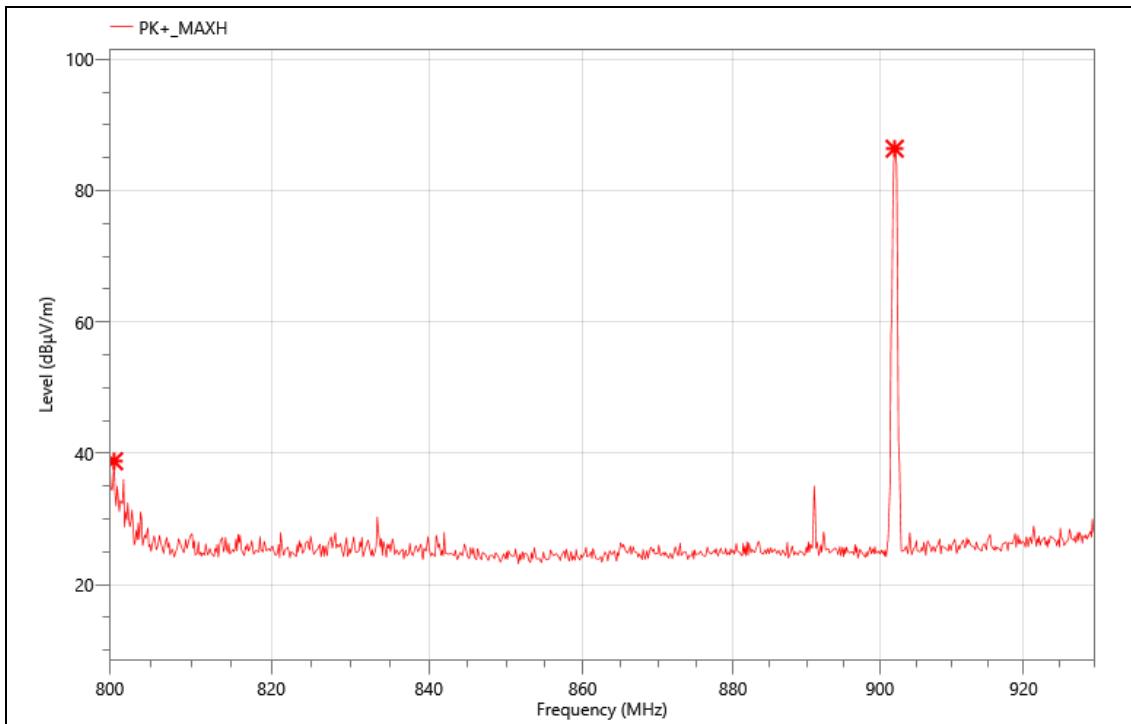

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	800.520	44.52	-5.74	38.78	Delta=86.38-	PK+	H	
2	902.050	90.64	-4.26	86.38	38.78=47.6dBc	PK+	H	


Mode:	928
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

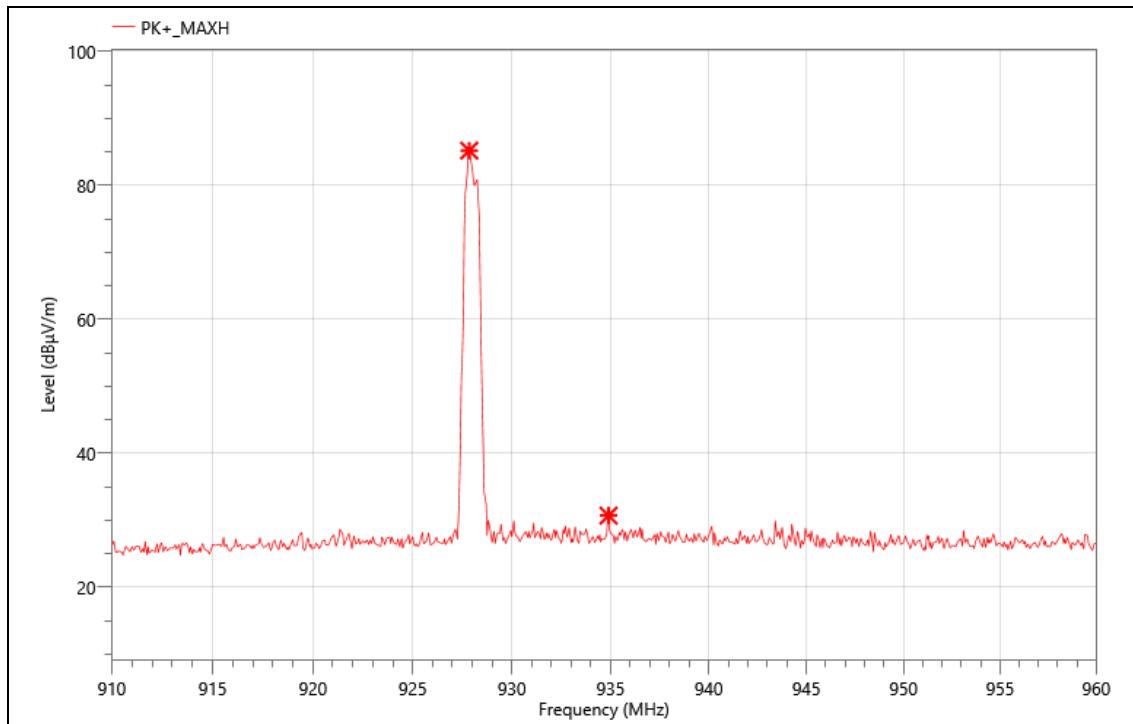

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	927.850	88.29	-3.1	85.19	Delta=85.19-	PK+	H	
2	934.900	33.77	-3.08	30.69	30.69=54.5dBc	PK+	H	


Mode:	928
Power:	DC 3.3V
Note:	ANT1
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

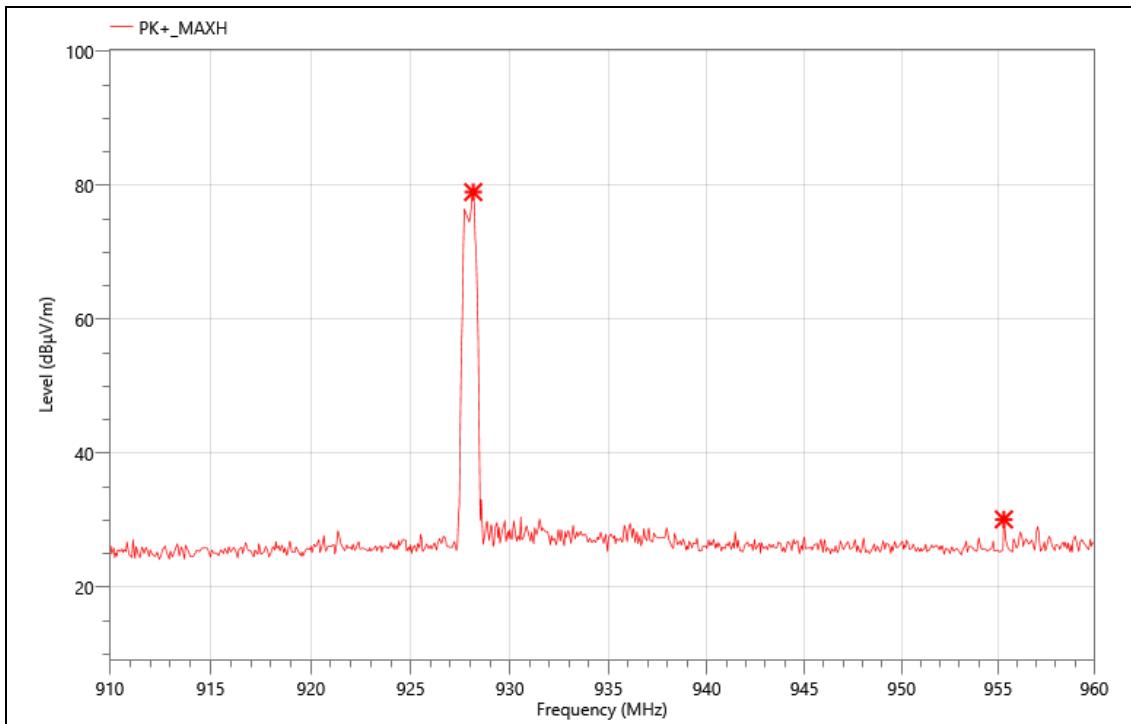

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	928.150	82.09	-3.09	79.00	Delta=79.00-	PK+	V	
2	955.300	33.76	-3.64	30.12	30.12=48.88dBc	PK+	V	


Mode:	902
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

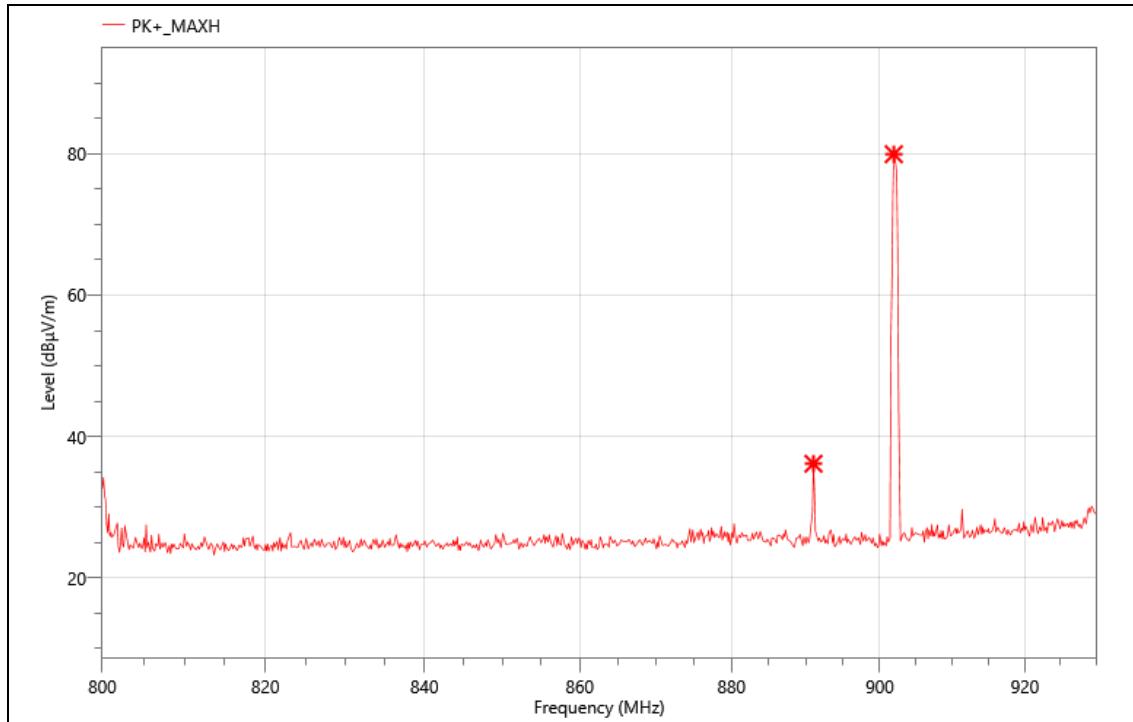

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	891.000	40.53	-4.37	36.16	Delta=79.95- 36.16=43.79dBc	PK+	V	V
2	901.920	84.22	-4.27	79.95				


Mode:	902
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

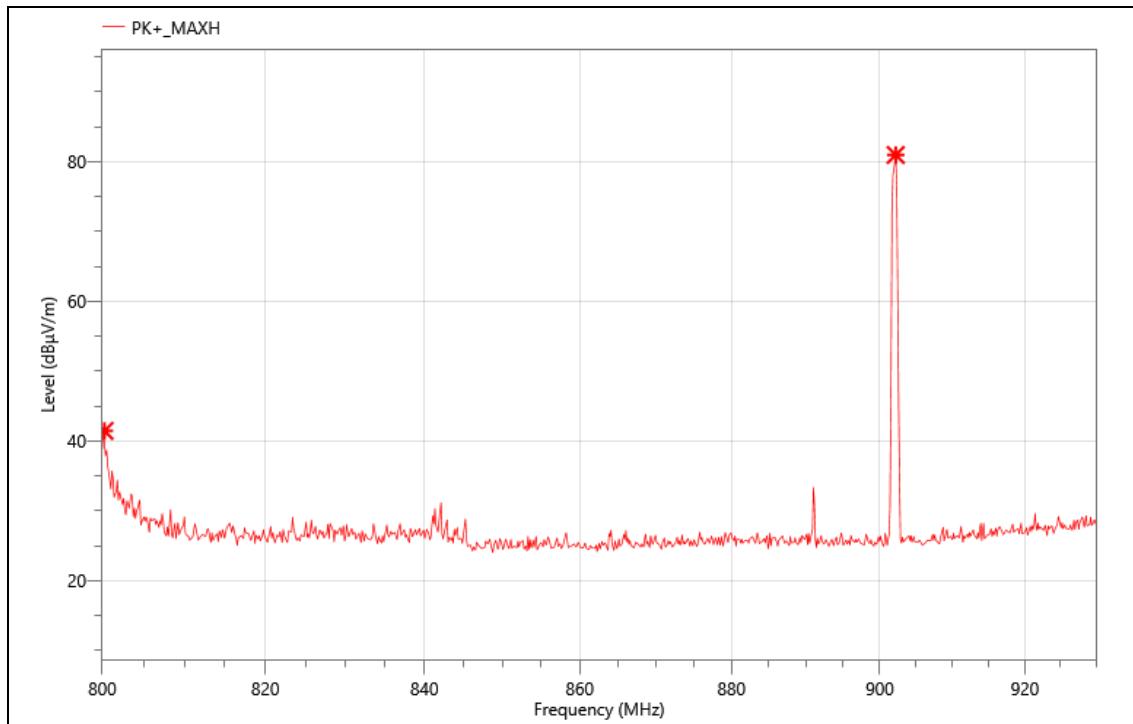

Critical_Freqs

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Pol.
1	800.260	47.20	-5.75	41.45	Delta=80.94-		PK+	H
2	902.180	85.19	-4.25	80.94	41.45=39.49dBc		PK+	H


Mode:	928
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

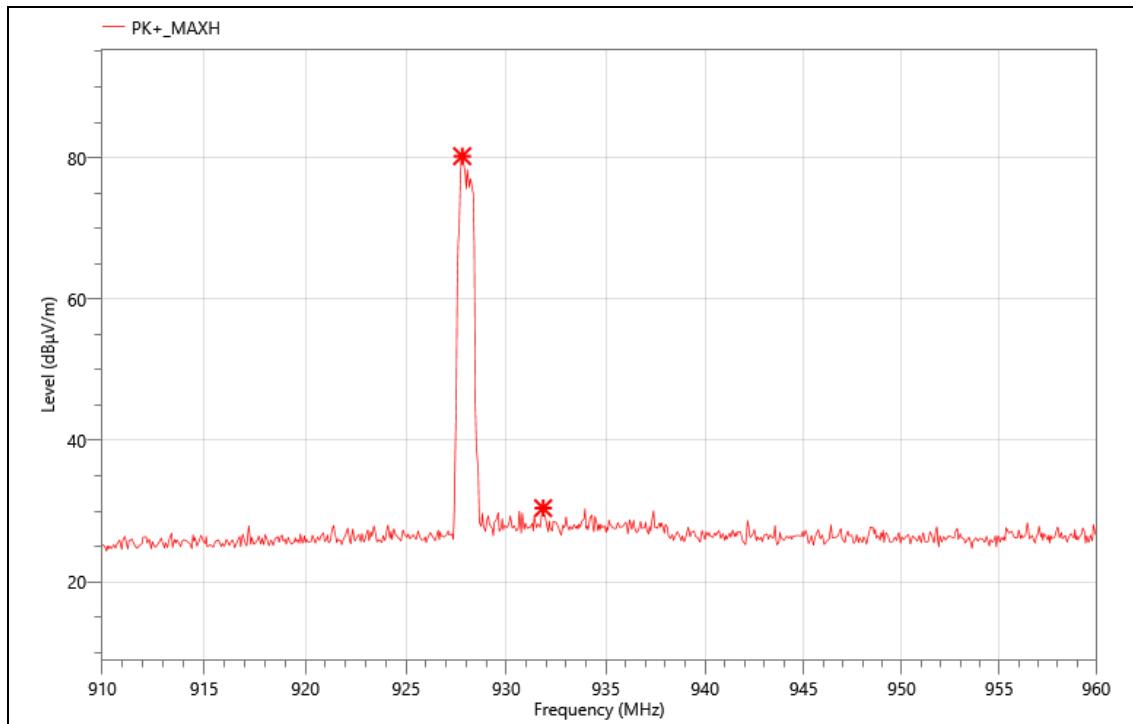

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	927.800	83.31	-3.1	80.21	Delta=80.21-	PK+	V	
2	931.850	33.42	-3	30.42	30.42=49.79dBc	PK+	V	

Mode:	928
Power:	DC 3.3V
Note:	ANT2
TE:	Big
Date	2025/04/07
T/A/P	21.5°C/49%/101Kpa

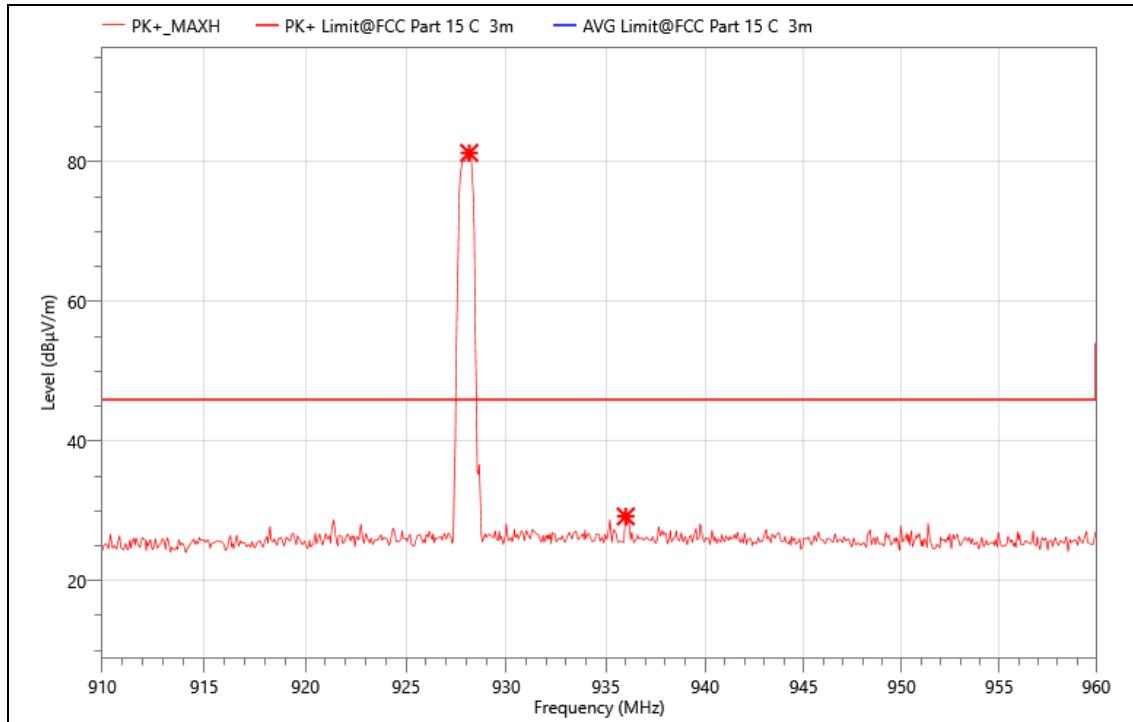

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	928.150	84.37	-3.09	81.28	Delta=81.28-	PK+	H	
2	936.000	32.33	-3.12	29.21	29.21=52.07dBc	PK+	H	

Note : [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

9. ANTENNA REQUIREMENT

REQUIREMENT

RSS-Gen Issue 5 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

DESCRIPTION

Pass.

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

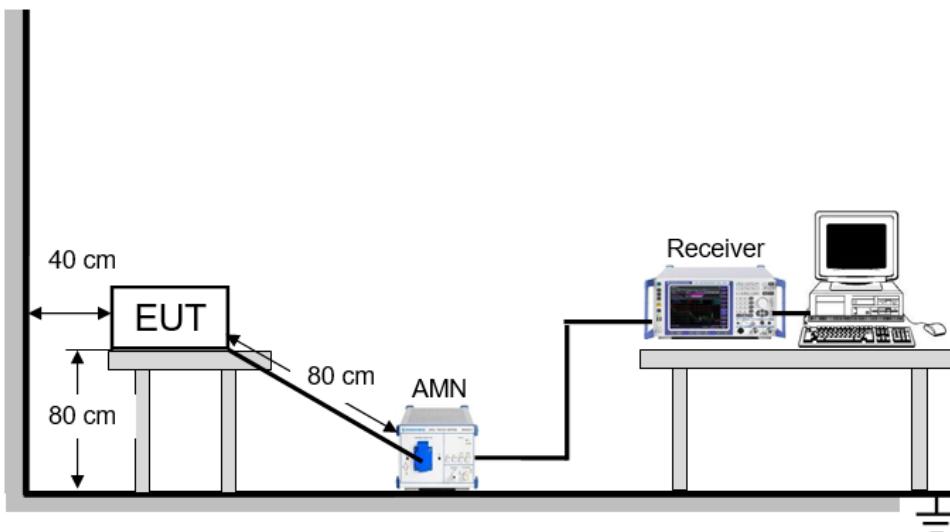

TEST ENVIRONMENT

Temperature	/	Relative Humidity	/
Atmosphere Pressure	/		


TEST RESULTS

N/A

11. TEST DATA - Appendix A

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Final setting For VBW (kHz)
NVNT	LoRa	902	Ant1	12	524.4	2.29	16.4	0.08	1
NVNT	LoRa	902	Ant2	12	524.4	2.29	16.4	0.08	1

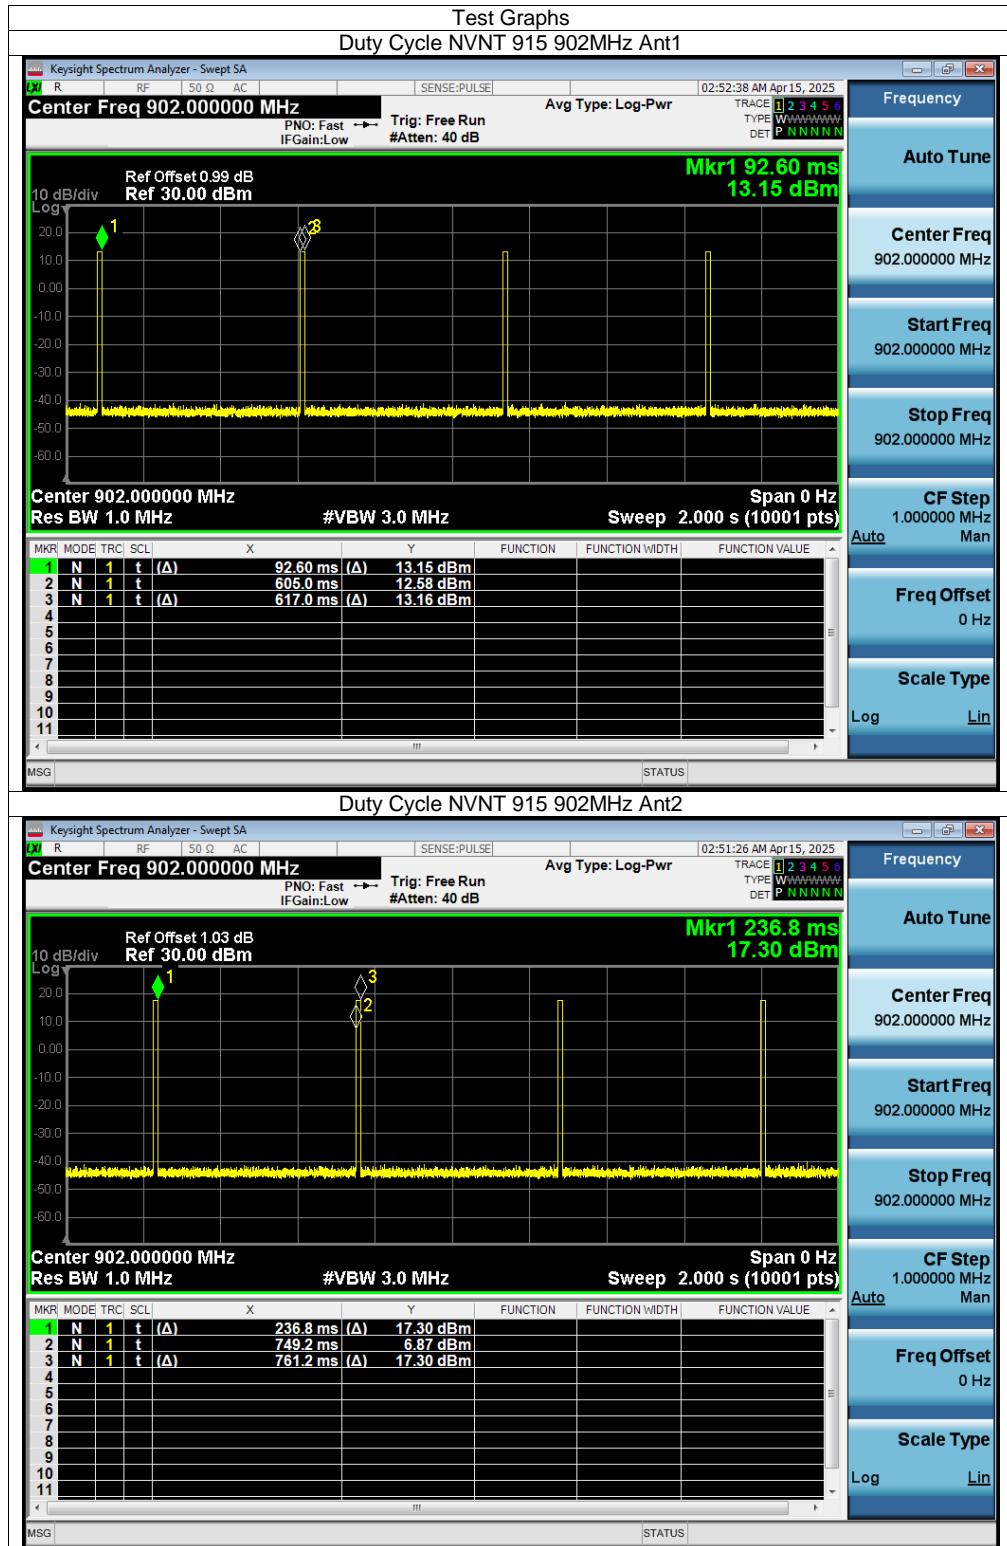


Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	LoRa	902	Ant1	13.18	0	13.18	30	Pass
NVNT	LoRa	915	Ant1	12.83	0	12.83	30	Pass
NVNT	LoRa	928	Ant1	13.02	0	13.02	30	Pass
NVNT	LoRa	902	Ant2	17.33	0	17.33	30	Pass
NVNT	LoRa	915	Ant2	16.95	0	16.95	30	Pass
NVNT	LoRa	928	Ant2	16.46	0	16.46	30	Pass


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	E.I.R.P (dBm)	E.I.R.P. Limit (dBm)	Verdict
NVNT	LoRa	902	Ant1	13.18	0	13.18	15.33	36.02	Pass
NVNT	LoRa	915	Ant1	12.83	0	12.83	14.98	36.02	Pass
NVNT	LoRa	928	Ant1	13.02	0	13.02	15.17	36.02	Pass
NVNT	LoRa	902	Ant2	17.33	0	17.33	19.48	36.02	Pass
NVNT	LoRa	915	Ant2	16.95	0	16.95	19.1	36.02	Pass
NVNT	LoRa	928	Ant2	16.46	0	16.46	18.61	36.02	Pass

Note1: Antenna Gain: 2.15dBi;

Note2: E.I.R.P = Total Power + Antenna Gain

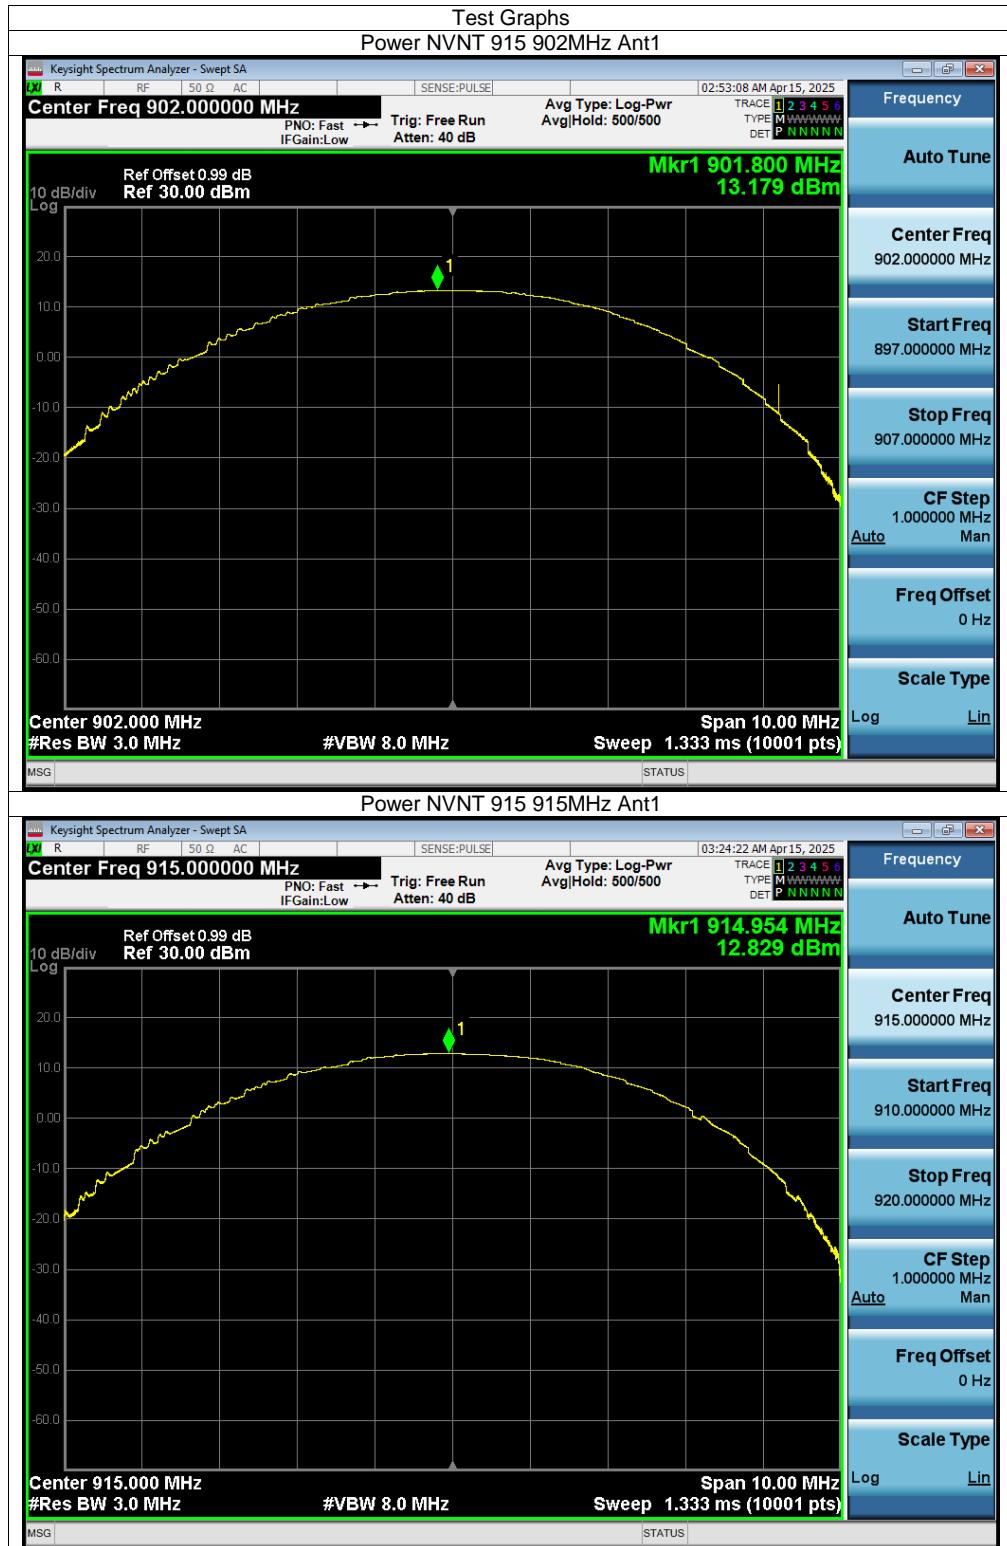


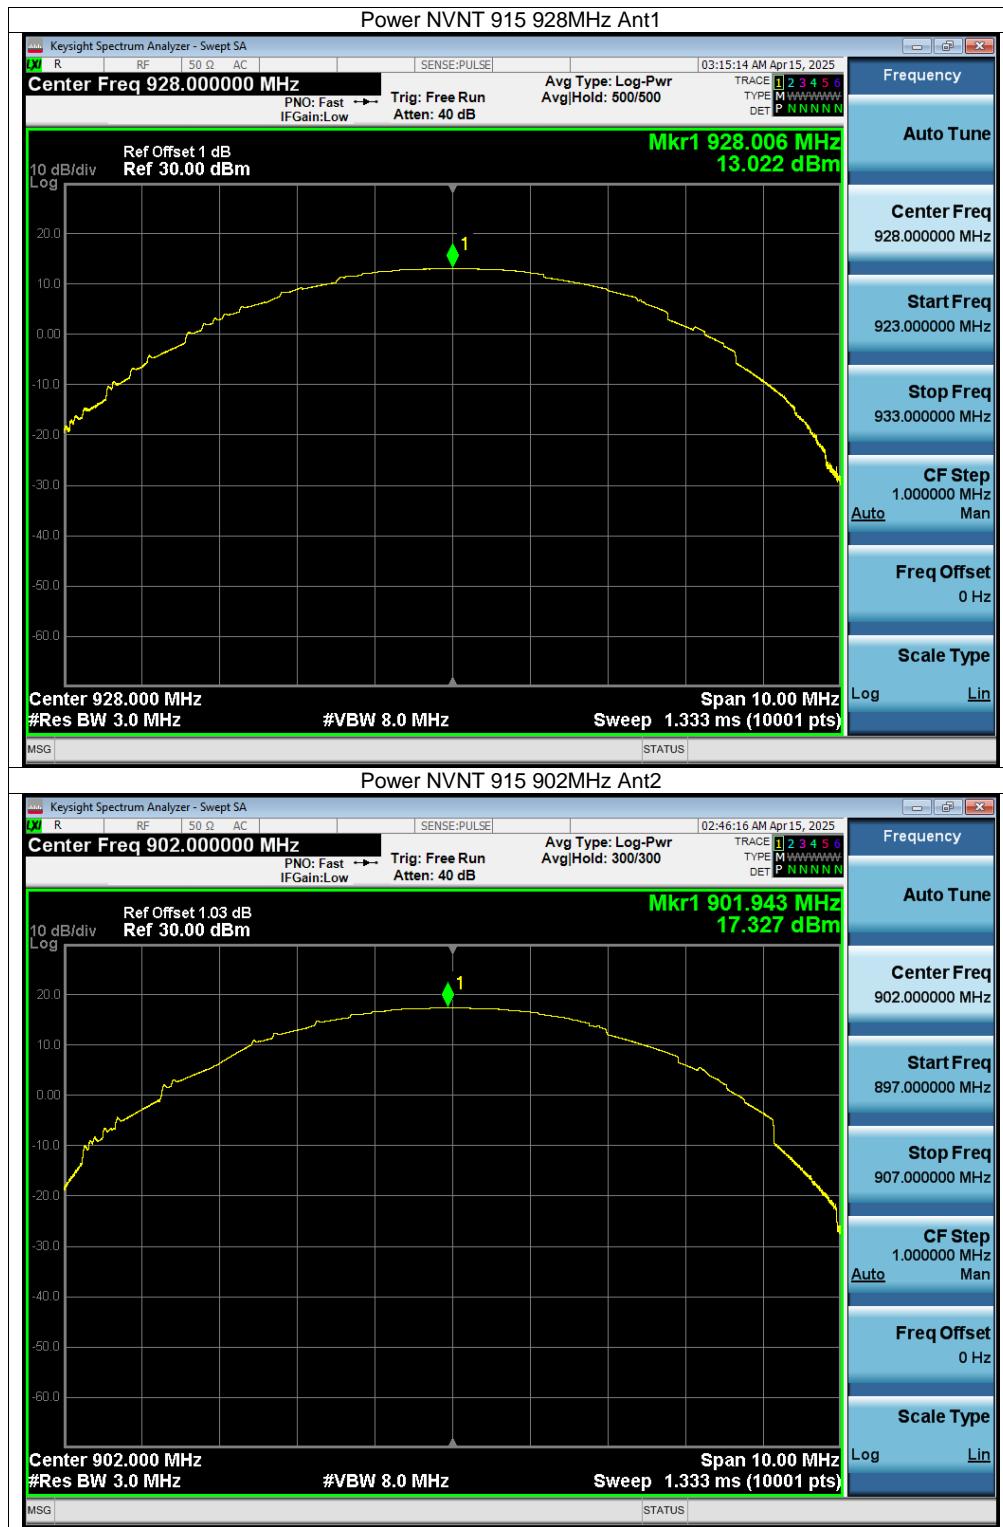


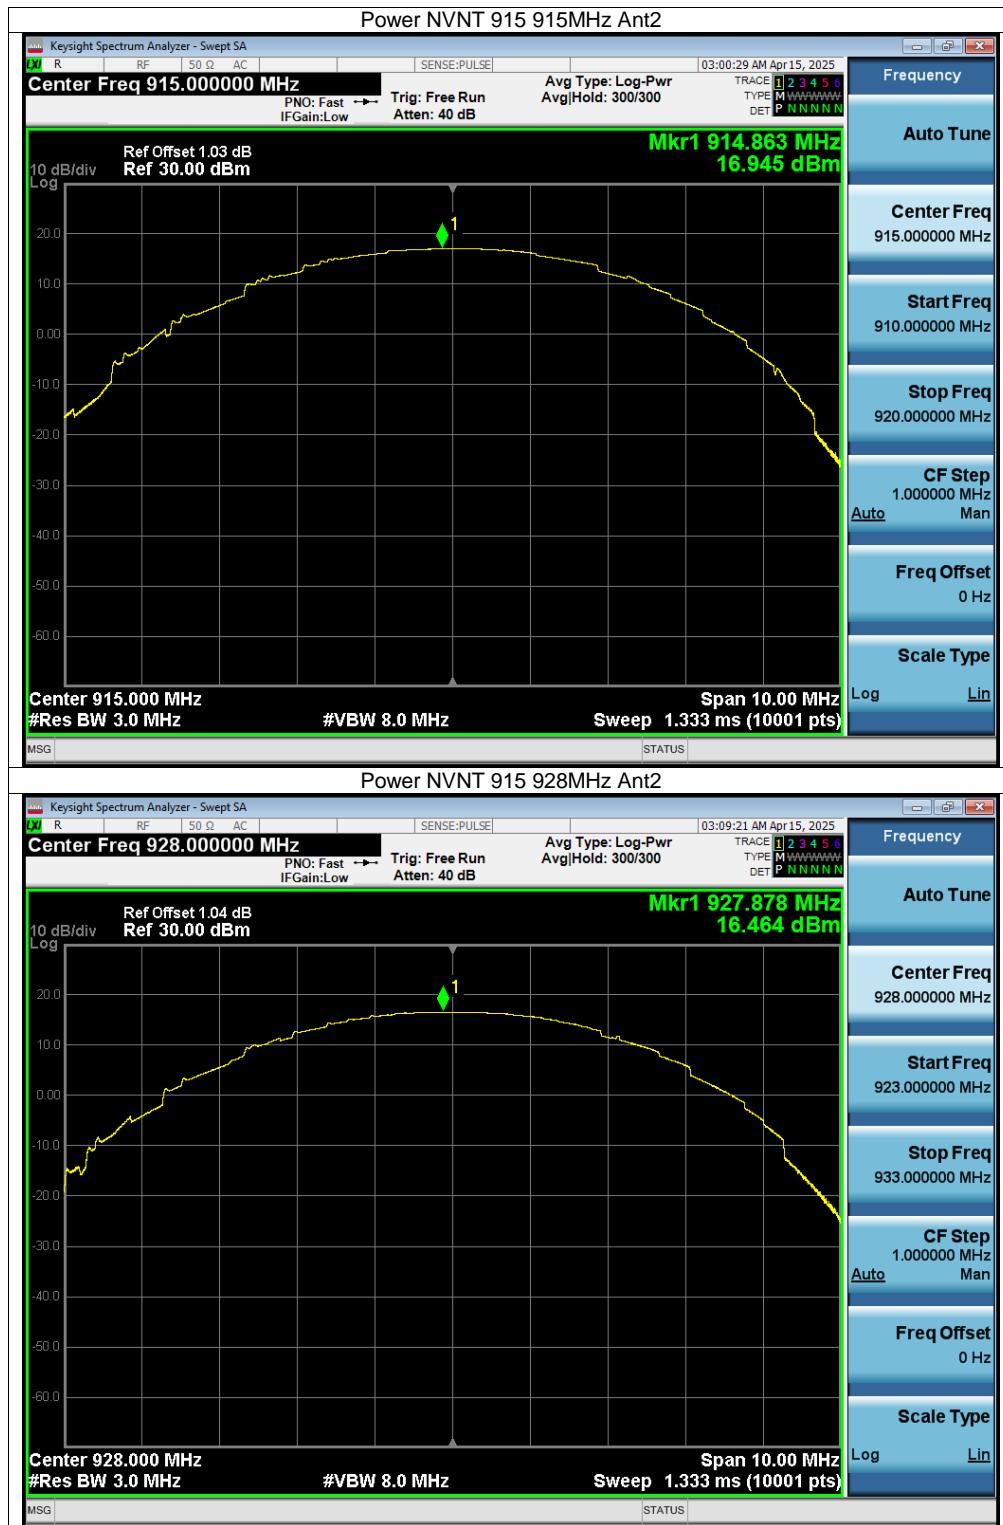


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	LoRa	902	Ant1	0.7	0.5	Pass
NVNT	LoRa	915	Ant1	0.7	0.5	Pass
NVNT	LoRa	928	Ant1	0.69	0.5	Pass
NVNT	LoRa	902	Ant2	0.69	0.5	Pass
NVNT	LoRa	915	Ant2	0.69	0.5	Pass
NVNT	LoRa	928	Ant2	0.68	0.5	Pass

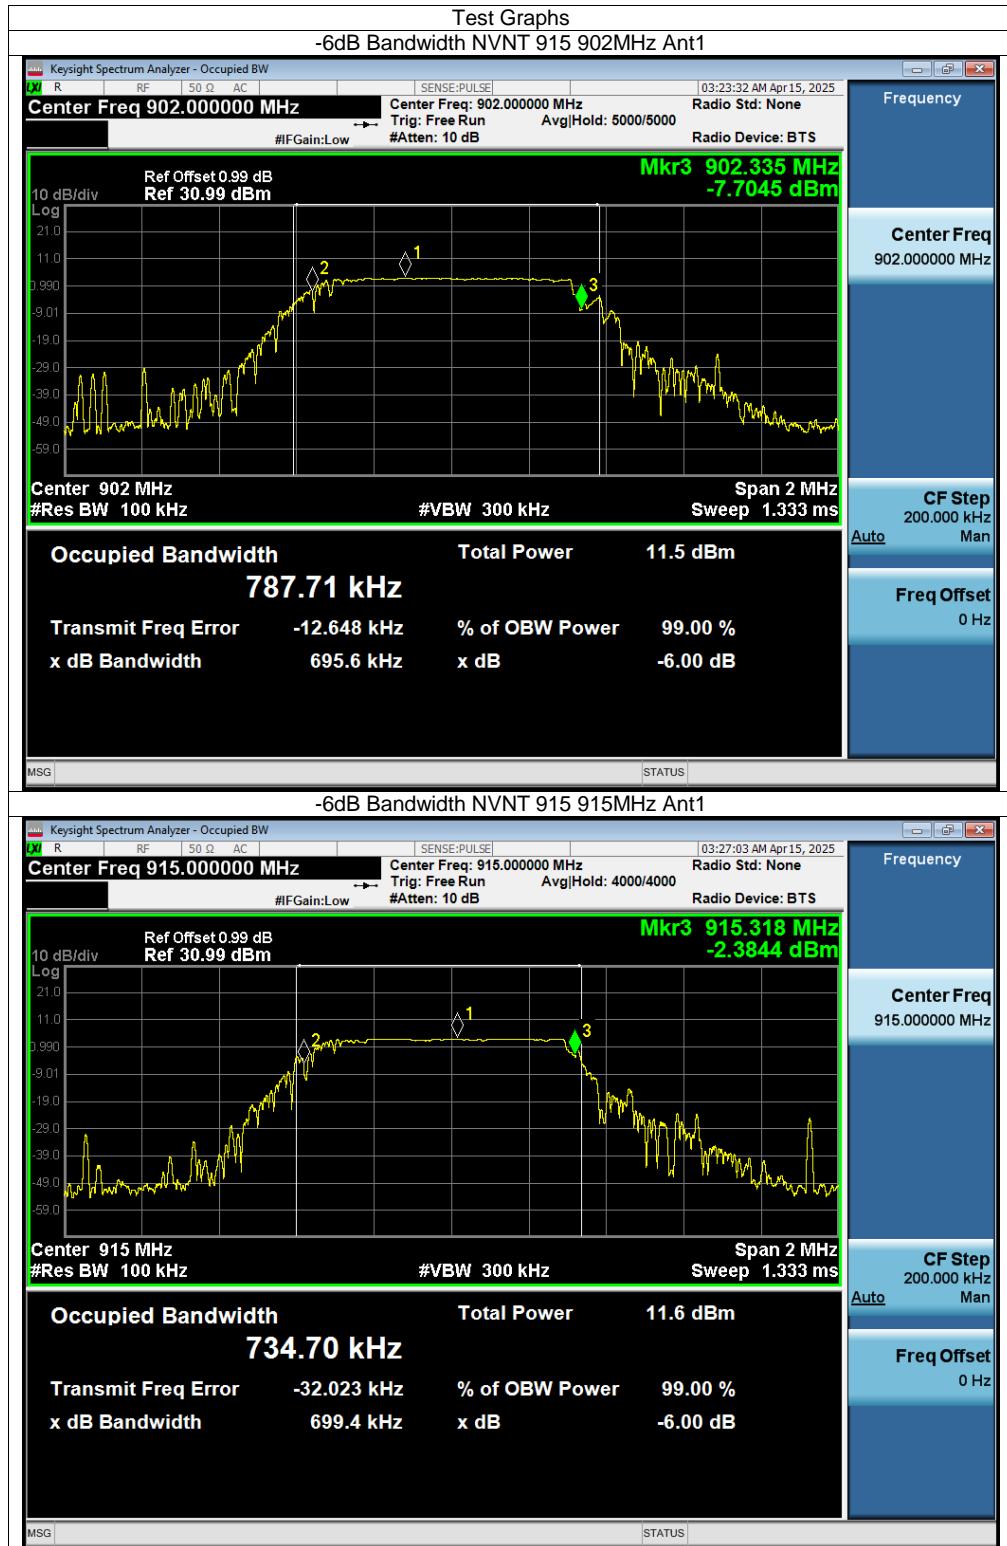


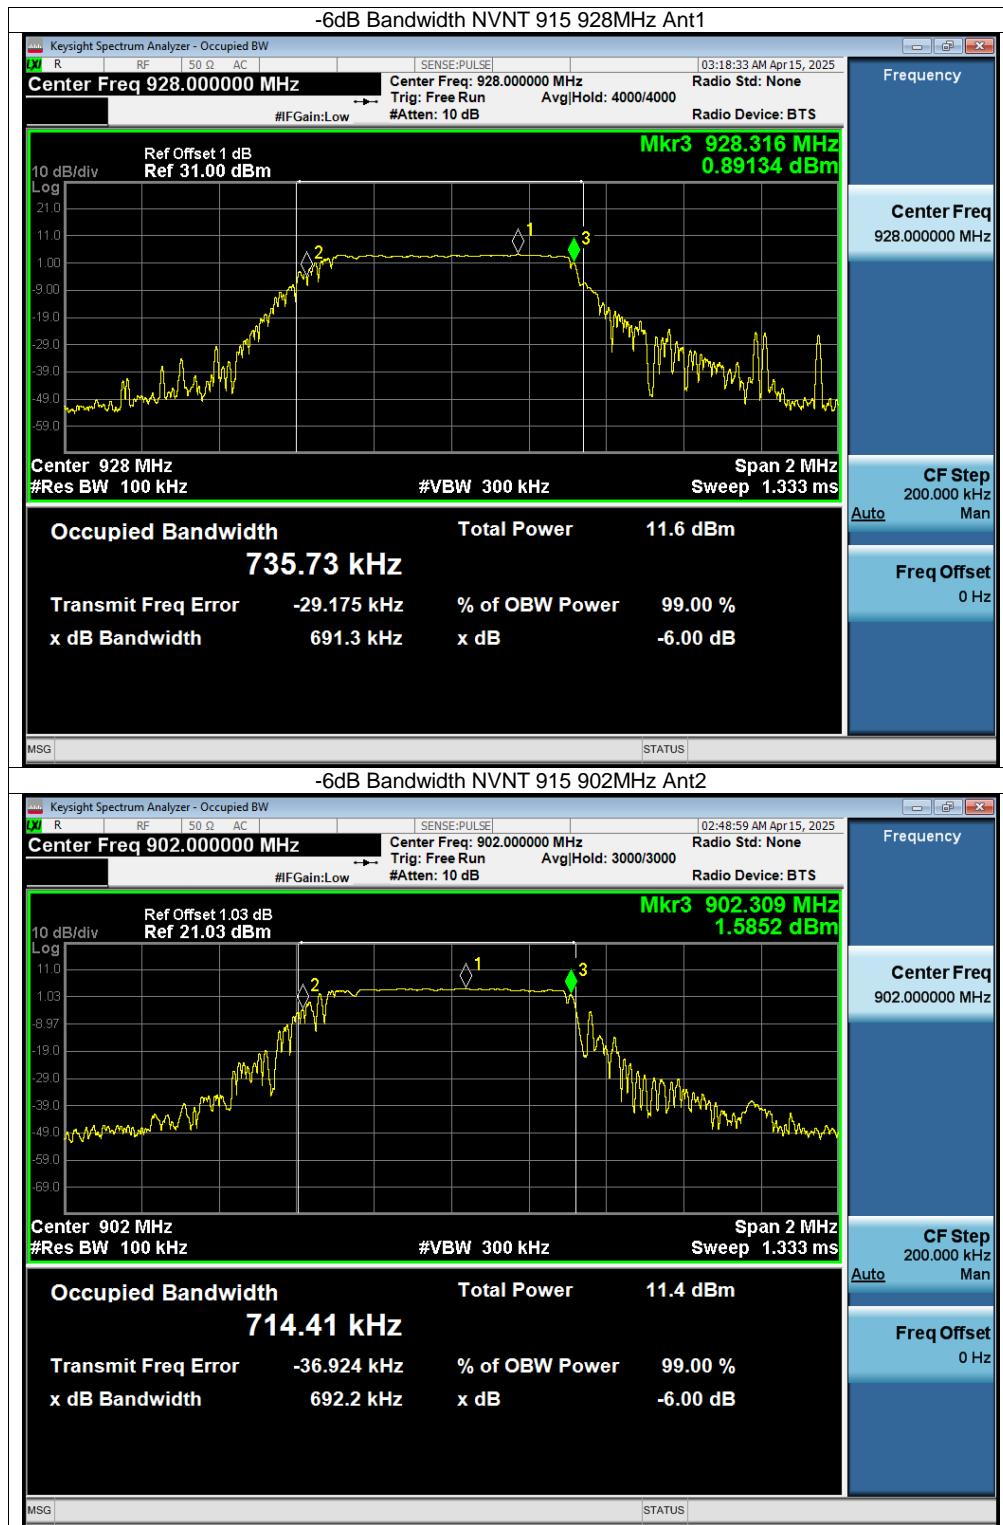


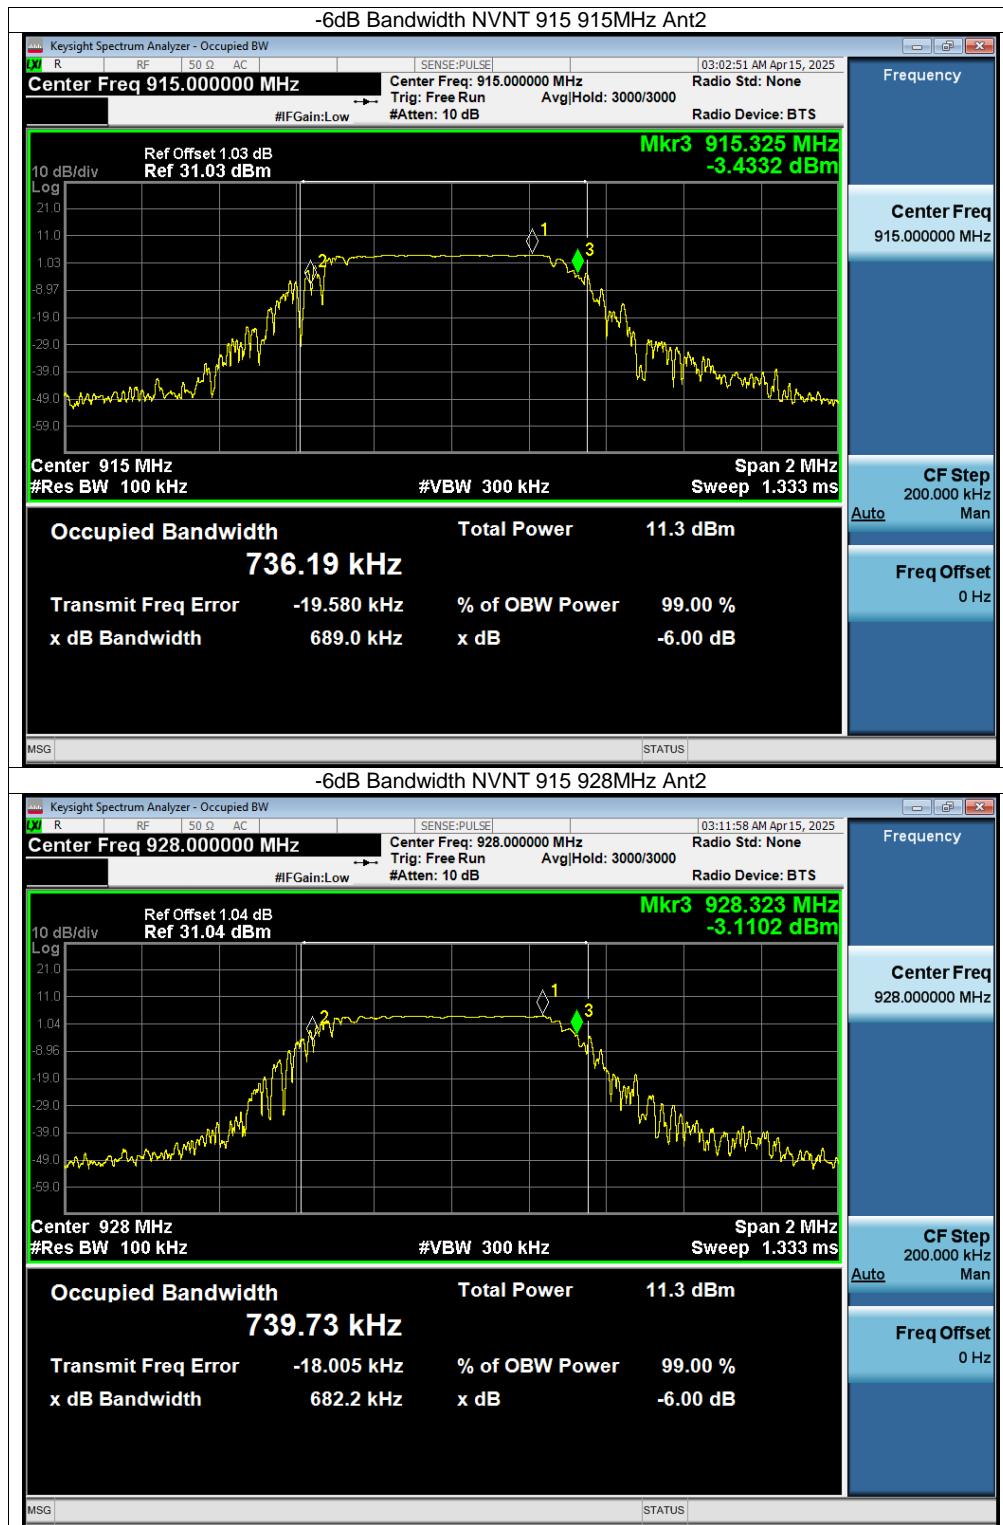


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	LoRa	902	Ant1	0.652
NVNT	LoRa	915	Ant1	0.655
NVNT	LoRa	928	Ant1	0.595
NVNT	LoRa	902	Ant2	0.685
NVNT	LoRa	915	Ant2	0.657
NVNT	LoRa	928	Ant2	0.654

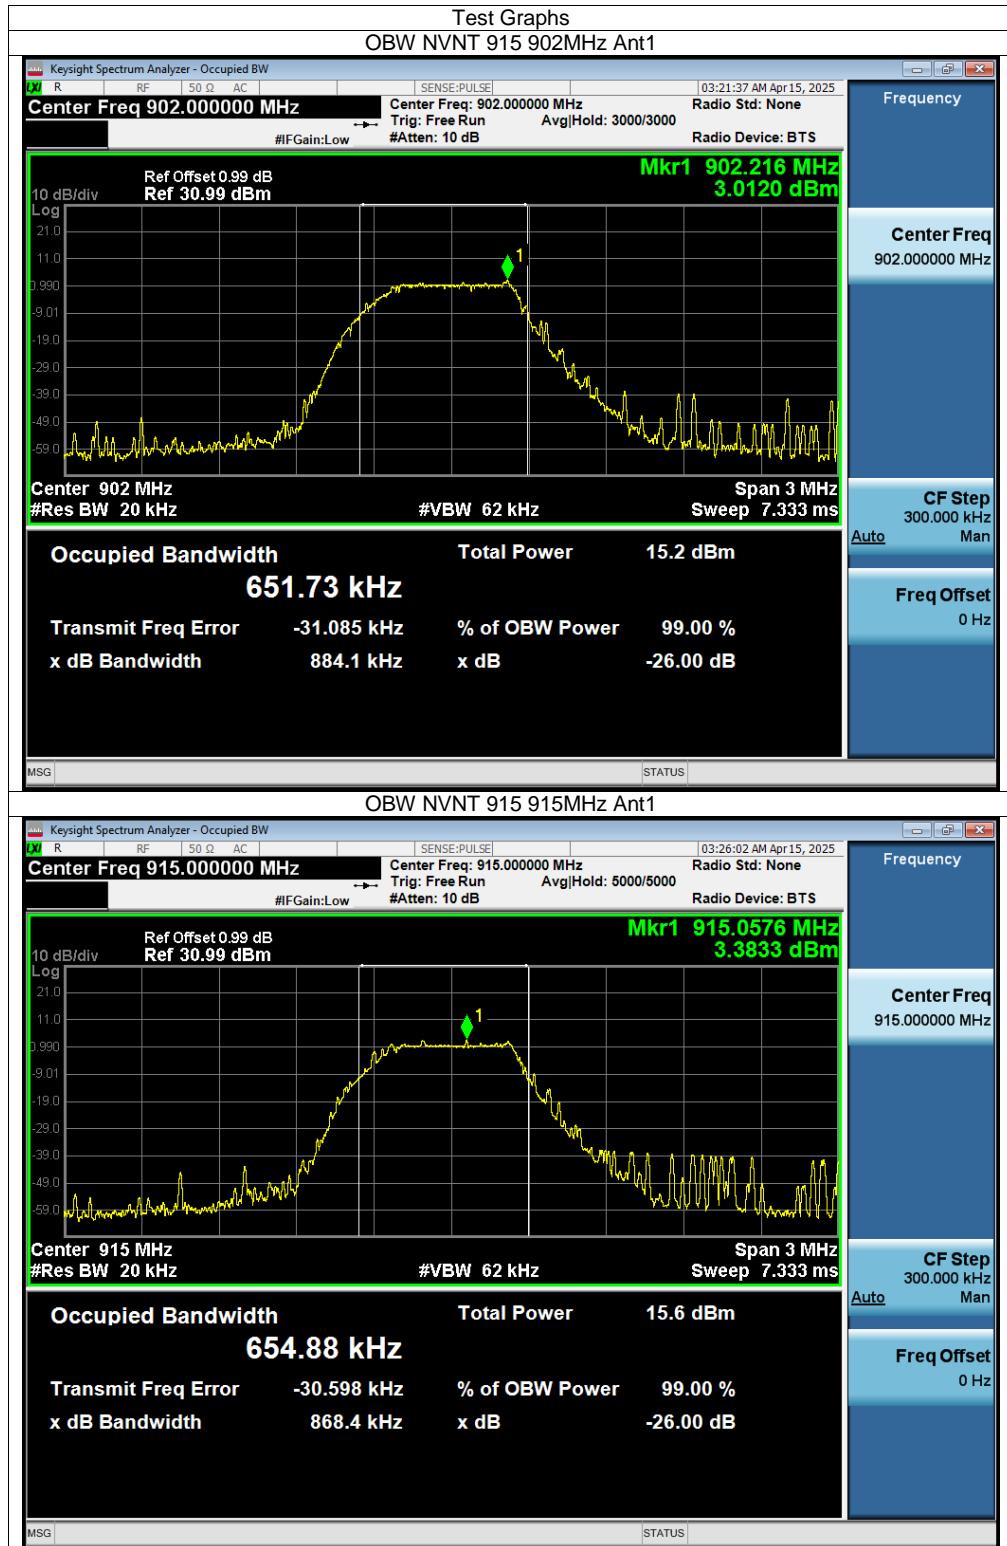


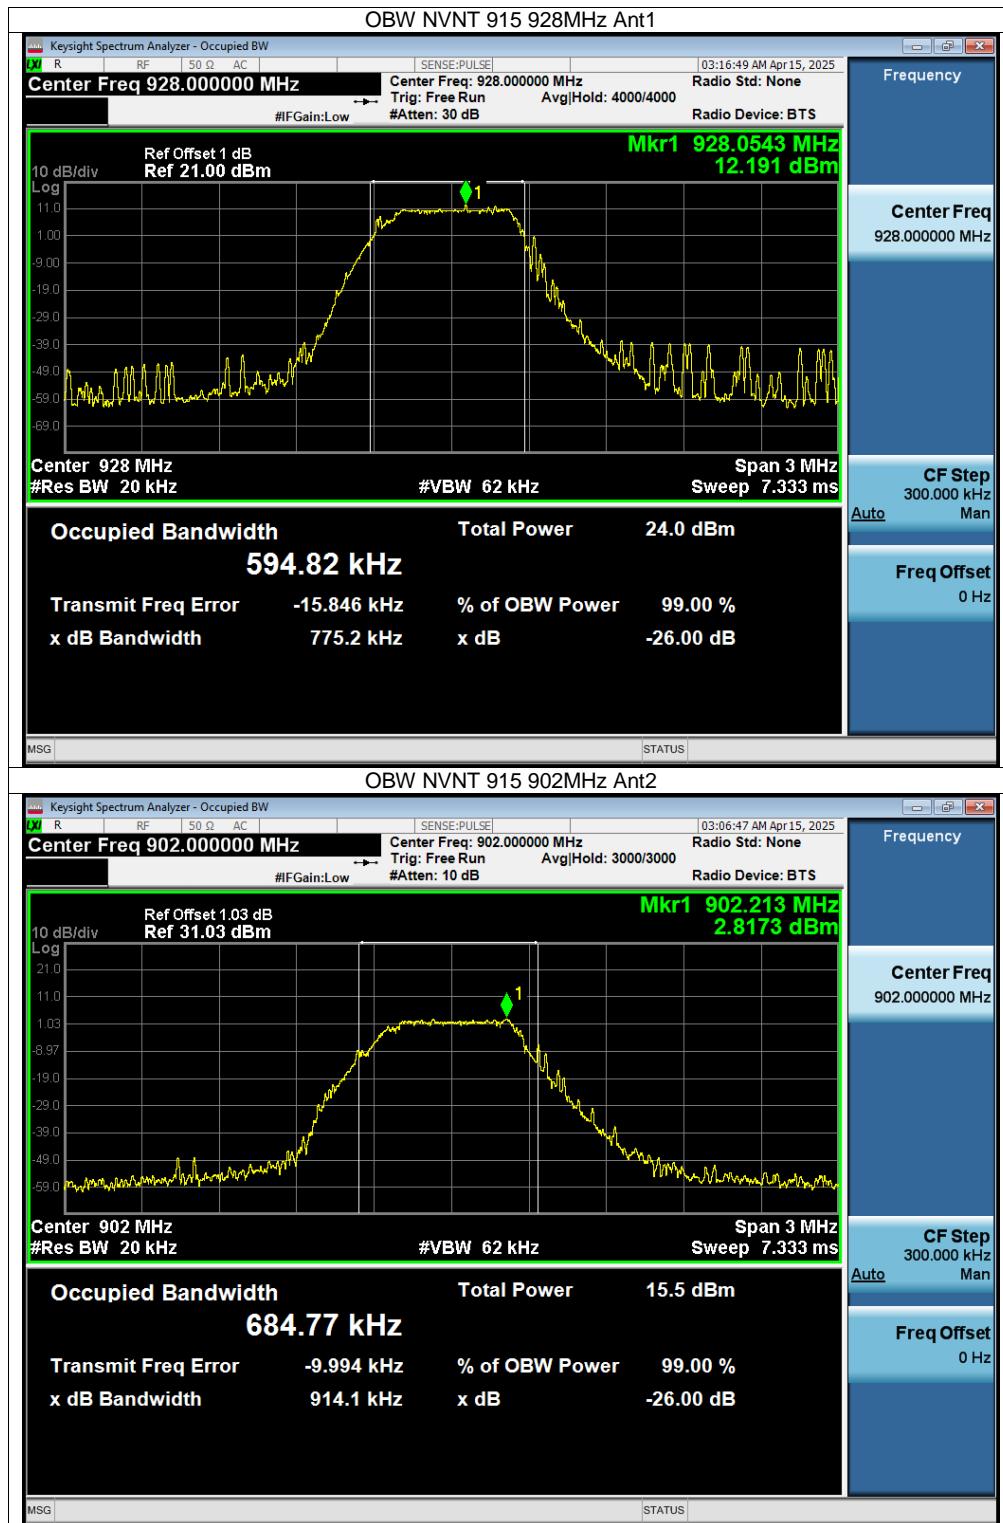

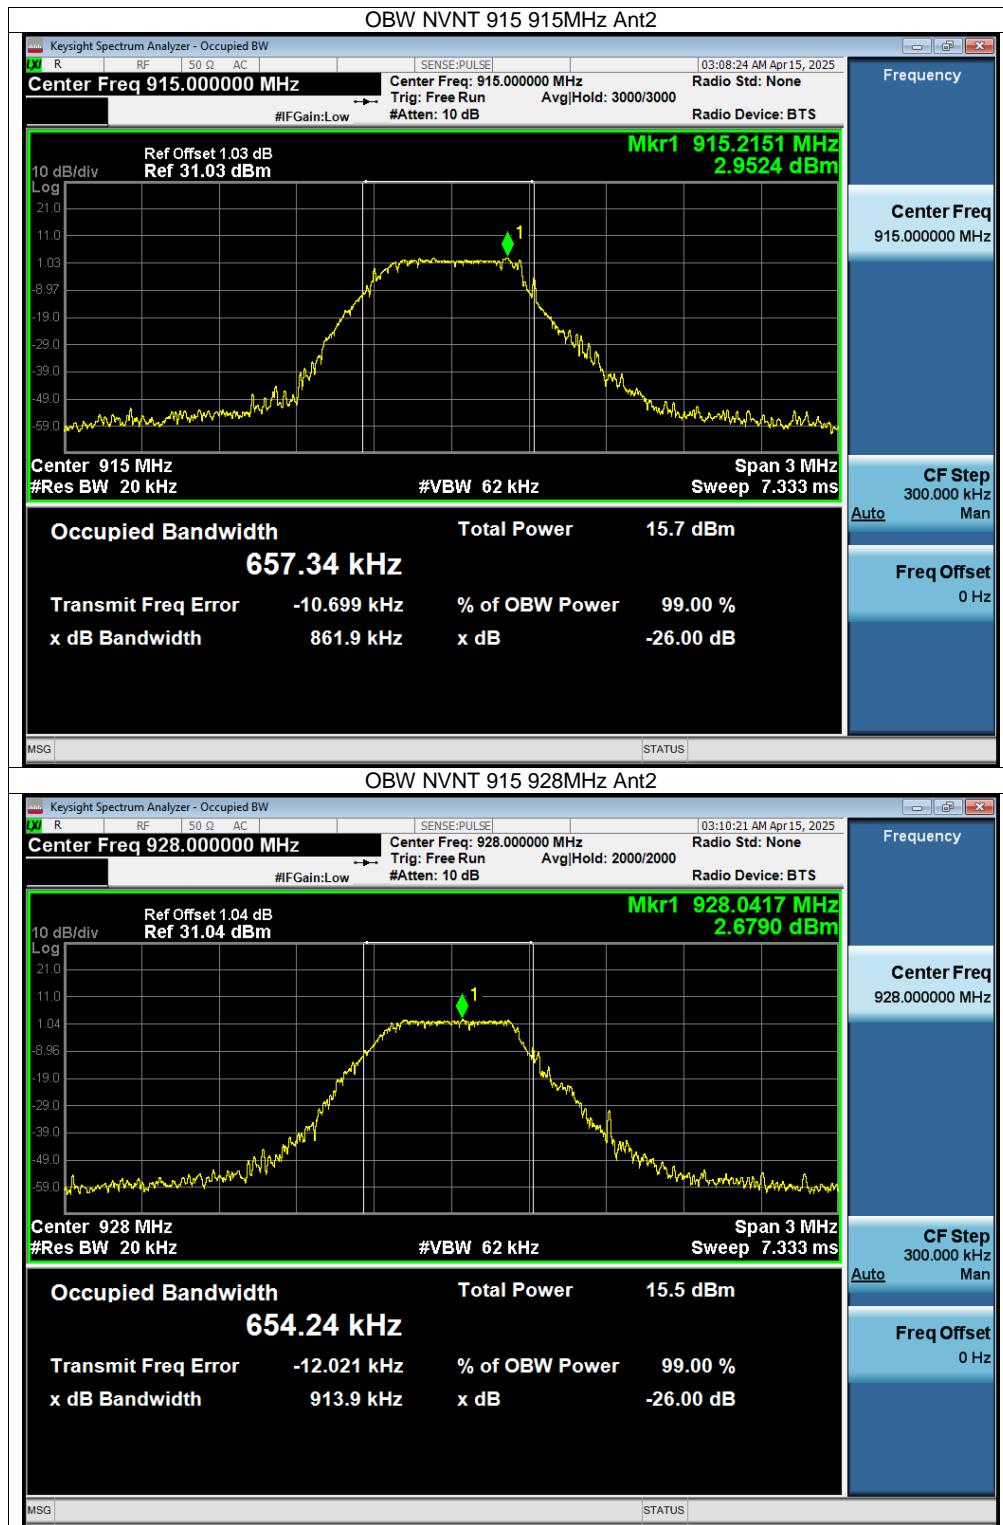


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	LoRa	902	Ant1	1	0	1	8	Pass
NVNT	LoRa	915	Ant1	-0.08	0	-0.08	8	Pass
NVNT	LoRa	928	Ant1	0.33	0	0.33	8	Pass
NVNT	LoRa	902	Ant2	5.14	0	5.14	8	Pass
NVNT	LoRa	915	Ant2	3.98	0	3.98	8	Pass
NVNT	LoRa	928	Ant2	4.1	0	4.1	8	Pass

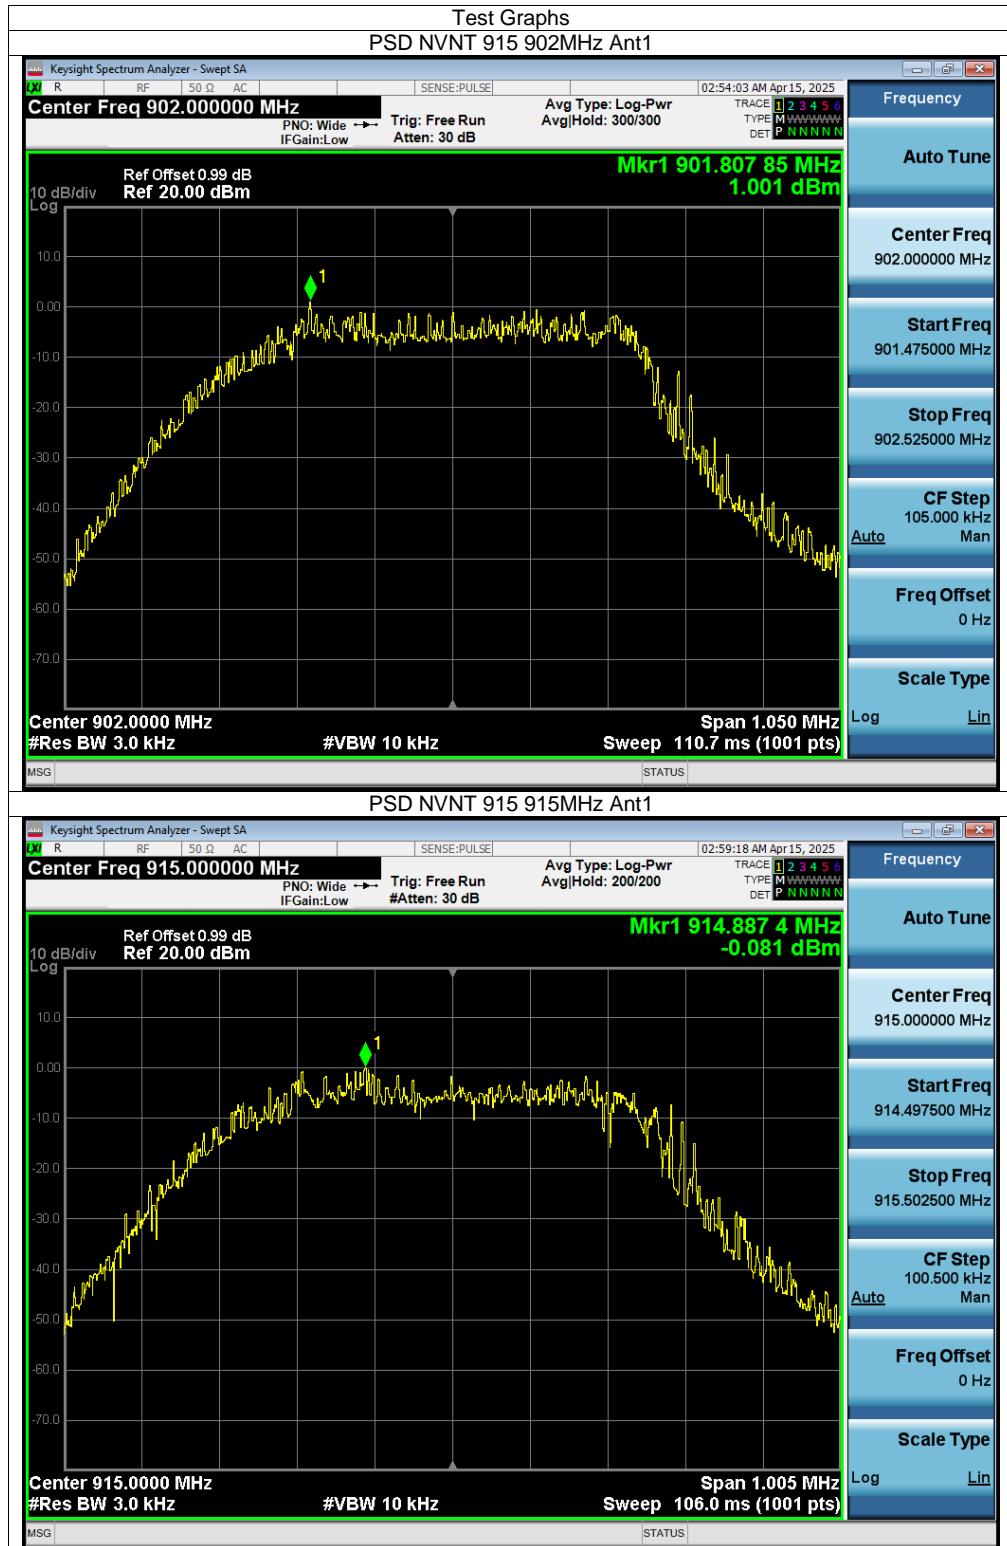



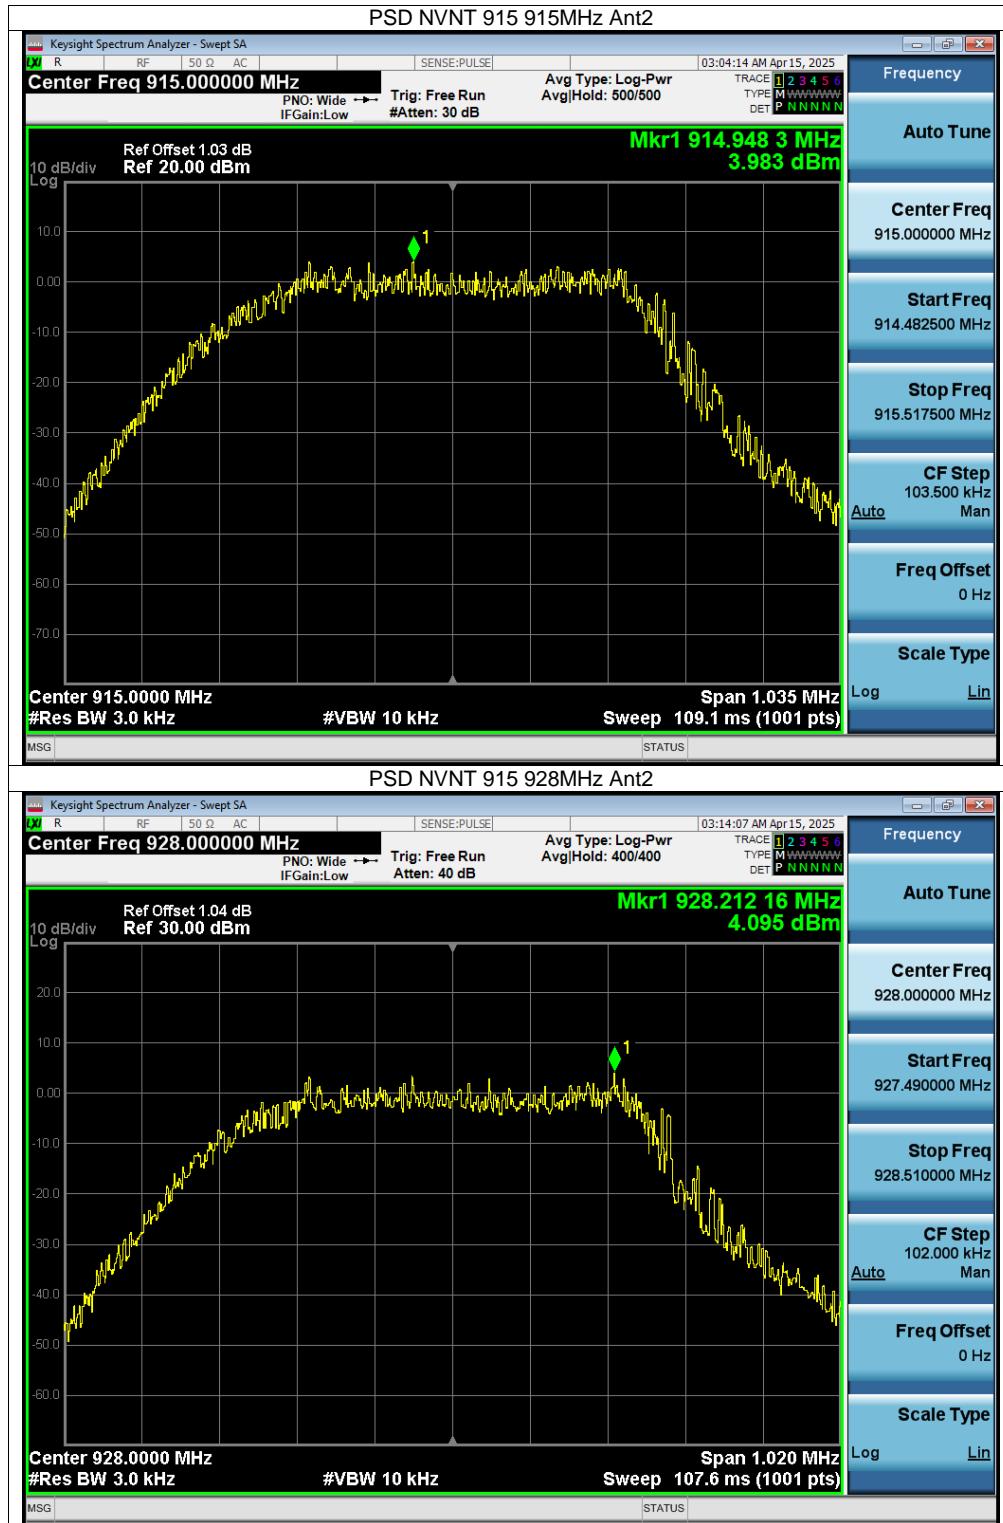

END OF REPORT