

RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

CERTIFICATE OF COMPLIANCE SAR EVALUATION

AVIWest, a Haivision Company

Parc Edonia, Bat X1, Rue de la Terre de Feu

35760 Saint-Gregoire

France

Dates of Test:

June 12 – 22, 2023

Test Report Number:

SAR.20230608

Revision A

Lab Designation Number: US1195 (FCC); US0194 (ISED)

FCC ID:	2ASIK-EM91 & 2ASIK-CB178NF
IC Certificate:	21415-EM91 & 21415-CB178NF
HVIN/Model(s):	Pro360-5G
Contains Cellular Module:	Aviwest Model EM9191
Contains WiFi Module:	Aviwest Model AW-CB178NF
Test Sample:	Engineering Unit Same as Production
Serial Number:	AVWPRO31222008399
Equipment Type:	Wireless Video Transceiver
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	663 – 698 MHz, 699 – 716 MHz, 824 – 849 MHz, 1710 – 1780 MHz, 1850 – 1915 MHz, 2500 – 2570 MHz, 2570 – 2620 MHz, 3550 – 3700 MHz, 3300 – 4200 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	600 MHz (FR1) – 24.5 dBm, 750 MHz (FR1) – 24.5 dBm, 850 MHz (FR1) – 24.5 dBm, 1750 MHz (FR1) – 24.5 dBm, 1900 MHz (FR1) – 24.5 dBm, 2550 MHz (FR1) – 24.5 dBm, 3600 MHz (FR1) – 24.5 dBm, 3700 MHz (FR1) – 24.5 dBm Conducted
Signal Modulation:	DFT-s-OFDM/CP-OFDM, Pi2 BPSK
Antenna Type:	Internal
Application Type:	Certification
FCC Rule Parts:	Part 2, 22, 24, 27, 90
KDB Test Methodology:	KDB 447498 D01 v06, KDB 941225 D05 v02r05
Industry Canada:	RSS-102 Issue 6, Safety Code 6
Max. Stand Alone SAR Value:	1.30 W/kg Reported
Max. Simultaneous Value:	0.04 Separation Ratio
Separation Distance:	15 mm

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-1528:2020 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Jay M. Moulton
Vice President



Testing Cert. # 2387.01

Table of Contents

1. Introduction	4
SAR Definition [5]	6
2. SAR Measurement Setup	7
Robotic System	7
System Hardware	7
System Electronics	8
Probe Measurement System	8
3. Probe and Dipole Calibration	15
4. Phantom & Simulating Tissue Specifications	16
Head & Body Simulating Mixture Characterization.....	16
5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]	17
Uncontrolled Environment.....	17
Controlled Environment	17
6. Measurement Uncertainty	18
7. System Validation	19
Tissue Verification	19
Test System Verification	19
8. SAR Test Data Summary.....	20
Procedures Used To Establish Test Signal.....	20
Device Test Condition.....	20
9. SAR Test Results	44
10. Simultaneous Transmission Analysis	48
11. Test Equipment List	58
12. Conclusion	59
13. References	60
Appendix A – System Validation Plots and Data.....	61
Appendix B – SAR Test Data Plots.....	75
Appendix C – SAR Test Setup Photos.....	85
Appendix D – Probe Calibration Data Sheets	90
Appendix E – Dipole Calibration Data Sheets.....	113
Appendix F – DAE Calibration Data Sheets.....	174
Appendix G – Phantom Calibration Data Sheets	180
Appendix H – Validation Summary	182

Comment/Revision	Date
Original Release	July 6, 2023
Revision A – Replace Sierra Wireless & Azureware with Aviwest on page 1, evaluated report to RSS-102 Issue 6, add 'The 15 mm gap is the thickness of the backpack' on page 20, add exclusion of BT testing on page 20 and correct type of Extremity to Body on page 49	June 13, 2024

Note: The latest version supersedes all previous versions listed in the above table. The latest version shall be used.

1. Introduction

This measurement report shows compliance of the AVIWest, a Haivision Company Model Pro360-5G FCC ID: 2ASIK-EM91 & 2ASIK-CB178NF with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 21415-EM91 & 21415-CB178NF with RSS102 Issue 6 & Safety Code 6. The FCC/ISED have adopted the guidelines for evaluating the environmental effects of radio frequency radiation to protect the public and workers from the potential hazards of RF emissions due to FCC/ISED regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of AVIWest, a Haivision Company Model Pro360-5G and therefore apply only to the tested sample.

The testing in this report was conducted on two transmit antennas. One in each plane of the device. The two remaining antennas on the same plane with the same distance were spot checked to verify the values were similar. Antenna M1 and M3 were chosen to do a full evaluation. Antennas M2, M4, M5 and M6 were spot checked. Both of the WiFi antennas had a full evaluation conducted on each antenna.

The test procedures and limits, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2013 Recommended Practice [4], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the Pro360-5G Wireless Video Transceiver. The table also shows the tolerance for the power level for each mode.

Band	Technology	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band n2	FR1	23.7	23.7	+0.8/-2.2	21.5	24.5
Band n5	FR1	23.7	23.7	+0.8/-2.2	21.5	24.5
Band n7	FR1	23.0	23.0	+1.5/-1.5	21.5	24.5
Band n12	FR1	23.0	23.0	+1.5/-1.5	21.5	24.5
Band n25	FR1	23.0	23.0	+1.5/-1.5	21.5	24.5
Band n38	FR1	23.0	23.0	+1.5/-1.5	21.5	24.5
Band n48	FR1	23.7	23.7	+0.8/-2.2	21.5	24.5
Band n66	FR1	23.7	23.7	+0.8/-2.2	21.5	24.5
Band n71	FR1	23.0	23.0	+1.5/-1.5	21.5	24.5
Band n77	FR1	23.7	23.7	+0.8/-2.2	21.5	24.5
Band n78	FR1	23.0	23.0	+1.5/-1.5	21.5	24.5

LTE UL CA Combinations (Aggregate Power)

Band UL 2CA Combination	Technology	Class	Nominal dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
12A-4A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
12A-2A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
13A-2A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
13A-4A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
5A-2A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
5A-4A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
66A-2A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
66A-5A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
7A-5A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0

FR1 NSA UL ENDC Combinations (Aggregate Power)

Band UL ENDC Combination	Technology	Class	Nominal dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
12A-n66A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
12A-n2A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
13A-n66A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
13A-n2A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
2A-n5A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
2A-n71A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
41A-n77A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
5A-n66A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
5A-n2A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
66A-n5A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
66A-n71A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
7A-n5A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
7A-n71A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5

SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

2. SAR Measurement Setup

Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

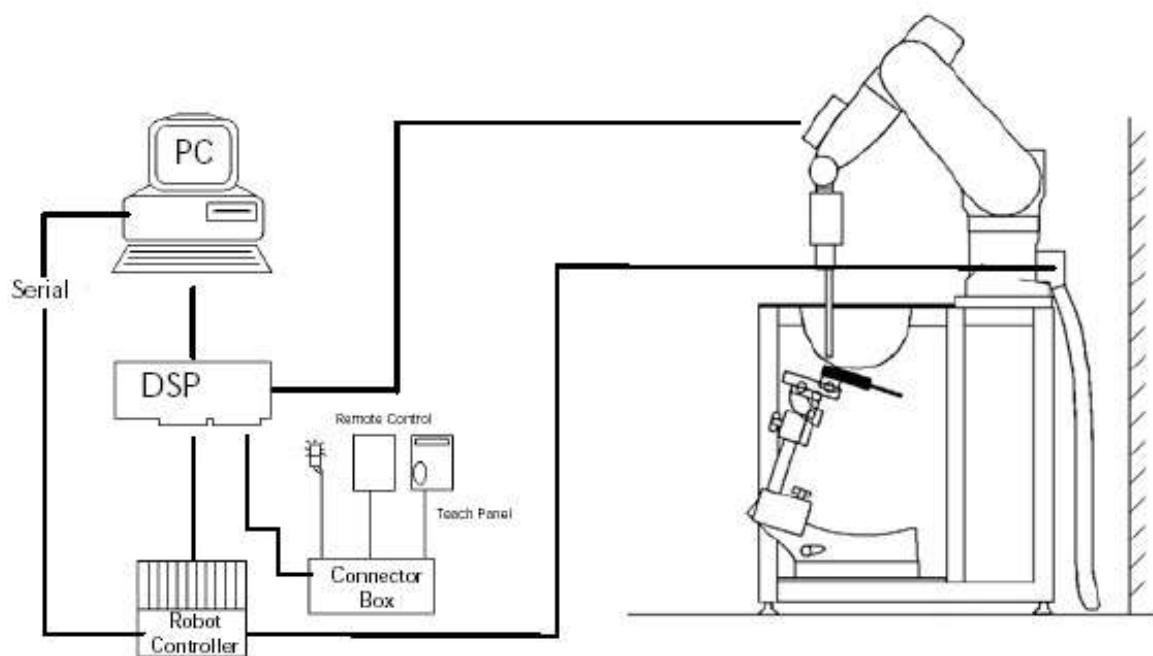


Figure 2.1 SAR Measurement System Setup

System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.



DAE System

Probe Specifications

Calibration: In air from 10 MHz to 6.0 GHz
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

Frequency: 10 MHz to 6 GHz

Linearity: $\pm 0.2\text{dB}$ (30 MHz to 6 GHz)

Dynamic: 10 mW/kg to 100 W/kg

Range: Linearity: $\pm 0.2\text{dB}$

Dimensions: Overall length: 330 mm

Tip length: 20 mm

Body diameter: 12 mm

Tip diameter: 2.5 mm

Distance from probe tip to sensor center: 1 mm

Application: SAR Dosimetry Testing
Compliance tests of wireless device




Figure 2.2 Triangular Probe Configurations



Figure 2.3 Probe Thick-Film Technique

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

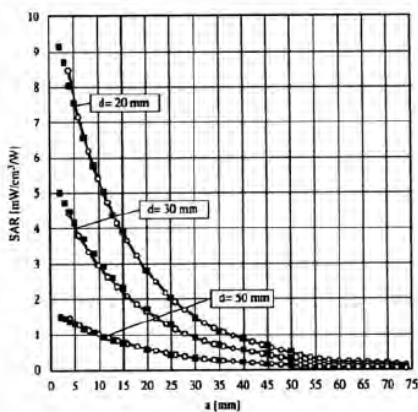


Figure 2.4 E-Field and Temperature Measurements at 900MHz

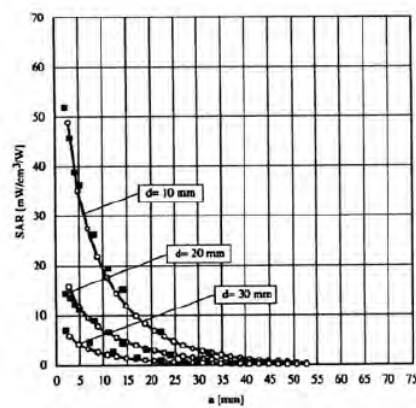


Figure 2.5 E-Field and Temperature Measurements at 1800MHz

Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges ≤ 2 GHz is 15 mm in x - and y- dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
≤ 2 GHz	≤ 15 mm
2 – 4 GHz	≤ 12 mm
4 – 6 GHz	≤ 10 mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

Zoom scan grid spacing and volume for different frequency ranges			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
≤ 2 GHz	≤ 8 mm	≤ 5 mm	≥ 30 mm
2 – 3 GHz	≤ 5 mm	≤ 5 mm	≥ 28 mm
3 – 4 GHz	≤ 5 mm	≤ 4 mm	≥ 28 mm
4 – 5 GHz	≤ 4 mm	≤ 3 mm	≥ 25 mm
5 – 6 GHz	≤ 4 mm	≤ 2 mm	≥ 22 mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

SAM PHANTOM

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

Phantom Specification

Phantom: SAM Twin Phantom (V4.0)
Shell Material: Vivac Composite
Thickness: 2.0 ± 0.2 mm

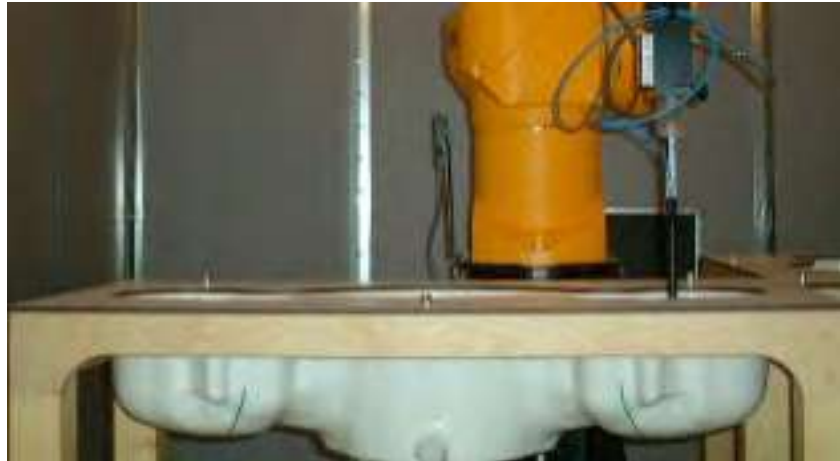


Figure 2.6 SAM Twin Phantom

Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeat ably be positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 2.7 Mounting Device

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

3. Probe and Dipole Calibration

See Appendix D and E.

4. Phantom & Simulating Tissue Specifications

Head & Body Simulating Mixture Characterization

The head mixture consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue.

Table 4.1 Typical Composition of Ingredients for Tissue

Ingredients		Simulating Tissue				
		750 MHz Head	900 MHz Head	1750 MHz Head	1900 MHz Head	2300 MHz Head
Mixing Percentage						
Water		Proprietary Purchased From Speag				
Sugar						
Salt						
HEC						
Bactericide						
DGBE						
Dielectric Constant	Target	41.94	41.50	40.08	40.00	39.47
Conductivity (S/m)	Target	0.89	0.97	1.37	1.40	1.67

Ingredients		Simulating Tissue					
		2550 MHz Head	3300 MHz Head	3500 MHz Head	3700 MHz Head	3900 MHz Head	4200 MHz Head
Mixing Percentage							
Water		Proprietary Purchased From Speag					
Sugar							
Salt							
HEC							
Bactericide							
DGBE							
Dielectric Constant	Target	39.07	38.16	37.93	37.70	37.47	36.55
Conductivity (S/m)	Target	1.91	2.70	2.91	3.12	3.34	3.68

5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Head	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

6. Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in the SAR report only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported value is less than 1.5 W/kg. Therefore, the measurement uncertainty table is not required.

7. System Validation

Tissue Verification

Table 7.1 Measured Tissue Parameters

		750 MHz Head		900 MHz Head		1750 MHz Head	
Date(s)		Jun. 12, 2023		Jun. 13, 2023		Jun. 15, 2023	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		41.94	40.97	41.50	40.96	40.08	39.06
Conductivity: σ		0.89	0.93	0.97	1.01	1.37	1.39
		1900 MHz Head		2550 MHz Head		3300 MHz Head	
Date(s)		Jun. 16, 2023		Jun. 19, 2023		Jun. 20, 2023	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		40.00	39.55	39.07	38.74	38.16	37.59
Conductivity: σ		1.40	1.42	1.91	1.92	2.70	2.73
		3500 MHz Head		3700 MHz Head		3900 MHz Head	
Date(s)		Jun. 20, 2023		Jun. 20, 2023		Jun. 20, 2023	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		37.93	37.36	37.70	37.13	37.47	36.90
Conductivity: σ		2.91	2.94	3.12	3.15	3.34	3.37
		4200 MHz Head					
Date(s)		Jun. 20, 2023					
Liquid Temperature (°C)	20.0	Target	Measured				
Dielectric Constant: ϵ		37.12	36.55				
Conductivity: σ		3.65	3.68				

See Appendix A for data printout.

Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

Table 7.2 System Dipole Validation Target & Measured

	Test Frequency	Targeted SAR _{1g} (W/kg)	Measure SAR _{1g} (W/kg)	Tissue Used for Verification	Deviation (%)	Plot Number
12-Jun-2023	750 MHz	8.57	8.66	Head	+ 1.05	1
13-Jun-2023	900 MHz	11.20	11.60	Head	+ 3.57	2
15-Jun-2023	1750 MHz	37.70	38.10	Head	+ 1.06	3
16-Jun-2023	1900 MHz	40.40	41.20	Head	+ 1.98	4
19-Jun-2023	2550 MHz	55.30	56.60	Head	+ 2.35	5
20-Jun-2023	3300 MHz	64.90	65.90	Head	+ 1.54	6
20-Jun-2023	3500 MHz	67.00	68.20	Head	+ 1.79	7
20-Jun-2023	3700 MHz	68.30	69.80	Head	+ 2.20	8
20-Jun-2023	3900 MHz	69.90	70.90	Head	+ 1.43	9
20-Jun-2023	4200 MHz	66.30	67.40	Head	+ 1.66	10

See Appendix A for data plots.

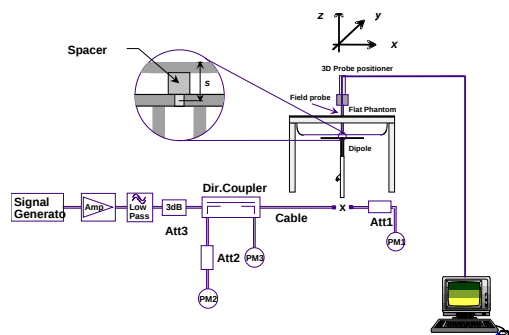


Figure 7.1 Dipole Validation Test Setup

8. SAR Test Data Summary

See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
See Appendix C for SAR Test Setup Photos.

Procedures Used To Establish Test Signal

The device was either placed into simulated transmit mode using the manufacturer's test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Condition

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula $((\text{end/start})-1)*100$ and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

Required Test Positions						
Antenna	Top	Back	Front	Left	Right	Bottom
Ant M1	No	Yes	No	No	No	No
Ant M3	No	Yes	No	No	No	No
Ant M2	No	Yes	No	No	No	No
Ant M4	No	Yes	No	No	No	No
Ant M5	No	Yes	No	No	No	No
Ant M6	No	Yes	No	No	No	No
WiFi W1	No	Yes	No	No	No	No
WiFi W2	No	Yes	No	No	No	No

All testing was conducted with a 15 mm gap. The 15 mm gap was used to simulate the case the device is carried in when in use by the user. The 15 mm gap is the thickness of the backpack.

The Bluetooth testing was excluded from SAR testing due to the low power of the transmitter. The maximum power of the Bluetooth transmitter is 4 dBm (2.5 mW).

For the FCC, the exclusion was based on the calculation in KDB447498 v06 section 4.3.1 a). The following is the formula for the Bluetooth transmitter.

$$[(2.5 \text{ mW})/(5 \text{ mm})]^{\sqrt{2.48}}=0.79 \text{ which is equal to or less than } 3.0$$

For ISED, the exclusion is based on RSS-102 Issue 6 section 6.3 table 11. Therefore, for a separation distance of 5 mm in the table, the exclusion limit is 3 mW. The Bluetooth transmitter have a maximum transmit power of 2.5 mW which is below the 3 mW threshold. Therefore, the Bluetooth transmitter is excluded from SAR testing.

FR1 Conducted Power

GENERAL NOTE:

1. NR implementation of n2, n5, n66, n71 and n77 is limited to EN-DC operations only (NSA), with LTE Bands 2/5/7/12/13/25/66/41 acting as anchor bands, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors. the detail EN-DC combination are included.
2. 5G NR support SCS 15KHz / 30KHz, DFT-s/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM and supported Bandwidths
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 2 and 3, the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s-Pi/2 BPSK and the reported SAR for the DFT-s-Pi/2 BPSK configuration is ≤ 1.45 W/kg; CP-OFDM measurement is unnecessary.
 - b. For DFT-s-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, full measurement on Pi/2 BPSK/QPSK/16QAM/64QMA/256QAM with larger bandwidth, for smaller bandwidth output power also spot check 1RB 1offset configuration at Pi/2 BPSK to ensure output power will not ½ dB higher than largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for Pi/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - d. 50% RB allocation for Pi/2 BPSK SAR testing follows 1RB Pi/2 BPSK allocation procedure
 - e. Pi/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - f. QPSK/16QAM/64QAM/256QAM output powers are not ½ dB higher than the same configuration in Pi/2 BPSK, also reported SAR for the Pi/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device.
4. FR1 band 2/38/78 SAR test was covered by Band 25/77; according to April 2015 TCB workshop, SAR test for overlapping FR1 bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is ≤ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
5. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% duty cycle. The Qualcomm QRCT program was used to establish the connection.
6. All conducted measurements were conducted on antenna M1 and M3. For antennas M2, M4, M5 and M6, only the channel and configuration tested had the conduct power measured. See the data sheets below.

3GPP 38.101 MPR FOR EN-DC

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5 ¹	≤ 1.2 ¹	≤ 0.2 ²
		≤ 0.5 ²	≤ 0.5 ²	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM		≤ 2.5	
CP-OFDM	256 QAM		≤ 4.5	
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability powerBoosting-pi2BPSK and if the IE powerBoostPi2BPSK is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE powerBoostPi2BPSK is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5		≤ 2.5
	256 QAM		≤ 4.5	
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

Table 9.1 FR1 Full Power Measurements

< n2 Ant M1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				372000	376000	380000	Tune-up limit (dBm)	MPR (dB)
				1860	1880	1900		
20	PI/2 BPSK	1	1	24.29	24.46	24.43	24.5	0.0
20	PI/2 BPSK	1	53	24.03	24.41	24.04		
20	PI/2 BPSK	1	104	24.42	24.15	24.32		
20	PI/2 BPSK	50	0	23.38	23.40	23.35	23.5	1.0
20	PI/2 BPSK	50	28	23.24	23.27	23.07		
20	PI/2 BPSK	50	56	23.05	23.21	23.11		
20	PI/2 BPSK	100	0	23.18	23.06	23.19	23.5	1.0
20	QPSK	1	1	24.45	24.07	24.32	24.5	0.0
20	QPSK	1	53	24.03	24.00	24.25		
20	QPSK	1	104	24.43	24.39	24.20		
20	QPSK	50	0	23.44	23.28	23.19	23.5	1.0
20	QPSK	50	28	23.20	23.30	23.41		
20	QPSK	50	56	23.39	23.38	23.26		
20	QPSK	100	0	23.26	23.27	23.14	23.5	1.0
20	16QAM	1	1	24.45	24.34	24.17	24.5	0.0
20	16QAM	1	53	24.35	24.46	24.21		
20	16QAM	1	104	24.35	24.15	24.48		
20	16QAM	50	0	23.44	23.19	23.12	23.5	1.0
20	16QAM	50	28	23.41	23.02	23.33		
20	16QAM	50	56	23.19	23.43	23.36		
20	16QAM	100	0	23.10	23.39	23.22	23.5	1.0
20	64QAM	1	1	24.27	24.20	24.30	24.5	0.0
20	64QAM	1	53	24.03	24.00	24.32		
20	64QAM	1	104	24.00	24.06	24.37		
20	64QAM	50	0	23.47	23.37	23.09	23.5	1.0
20	64QAM	50	28	23.11	23.50	23.43		
20	64QAM	50	56	23.11	23.09	23.13		
20	64QAM	100	0	23.39	23.23	23.06	23.5	1.0
20	256QAM	1	1	24.31	24.12	24.19	24.5	0.0
20	256QAM	1	53	24.20	24.49	24.46		
20	256QAM	1	104	24.15	24.08	24.10		
20	256QAM	50	0	23.33	23.43	23.19	23.5	1.0
20	256QAM	50	28	23.29	23.03	23.15		
20	256QAM	50	56	23.05	23.46	23.33		
20	256QAM	100	0	23.42	23.15	23.22	23.5	1.0
Channel Frequency (MHz)				371500	376000	380500	Tune-up limit (dBm)	MPR (dB)
				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	24.46	24.25	24.38	24.5	0.0
Channel Frequency (MHz)				371000	376000	381000	Tune-up limit (dBm)	MPR (dB)
				1855	1880	1905		
10	PI/2 BPSK	1	1	24.49	24.14	24.08	24.5	0.0
Channel Frequency (MHz)				370500	376000	381500	Tune-up limit (dBm)	MPR (dB)
				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	24.18	24.09	24.06	24.5	0.0

<n2 Ant M3>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				372000	376000	380000	Tune-up limit (dBm)	MPR (dB)
				1860	1880	1900		
20	PI/2 BPSK	1	1	24.31	24.28	24.42	24.5	0.0
20	PI/2 BPSK	1	53	24.43	24.46	24.47		
20	PI/2 BPSK	1	104	24.40	24.01	24.42		
20	PI/2 BPSK	50	0	23.10	23.21	23.33	23.5	1.0
20	PI/2 BPSK	50	28	23.18	23.36	23.20		
20	PI/2 BPSK	50	56	23.14	23.22	23.04		
20	PI/2 BPSK	100	0	23.03	23.31	23.15	23.5	1.0
20	QPSK	1	1	24.08	24.14	24.11	24.5	0.0
20	QPSK	1	53	24.01	24.28	24.45		
20	QPSK	1	104	24.00	24.06	24.30		
20	QPSK	50	0	23.39	23.12	23.25	23.5	1.0
20	QPSK	50	28	23.05	23.09	23.06		
20	QPSK	50	56	23.08	23.28	23.10		
20	QPSK	100	0	23.22	23.29	23.08	23.5	1.0
20	16QAM	1	1	24.04	24.07	24.02	24.5	0.0
20	16QAM	1	53	24.23	24.40	24.49		
20	16QAM	1	104	24.42	24.41	24.07		
20	16QAM	50	0	23.12	23.37	23.48	23.5	1.0
20	16QAM	50	28	23.14	23.11	23.36		
20	16QAM	50	56	23.46	23.26	23.05		
20	16QAM	100	0	23.23	23.06	23.03	23.5	1.0
20	64QAM	1	1	24.35	24.14	24.00	24.5	0.0
20	64QAM	1	53	24.46	24.23	24.34		
20	64QAM	1	104	24.24	24.19	24.13		
20	64QAM	50	0	23.17	23.03	23.02	23.5	1.0
20	64QAM	50	28	23.33	23.17	23.18		
20	64QAM	50	56	23.43	23.09	23.26		
20	64QAM	100	0	23.02	23.06	23.22	23.5	1.0
20	256QAM	1	1	24.02	24.45	24.24	24.5	0.0
20	256QAM	1	53	24.04	24.44	24.34		
20	256QAM	1	104	24.43	24.33	24.23		
20	256QAM	50	0	23.02	23.17	23.06	23.5	1.0
20	256QAM	50	28	23.20	23.10	23.19		
20	256QAM	50	56	23.15	23.04	23.48		
20	256QAM	100	0	23.47	23.19	23.48	23.5	1.0
Channel Frequency (MHz)				371500	376000	380500	Tune-up limit (dBm)	MPR (dB)
				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	24.44	24.02	24.17	24.5	0.0
Channel Frequency (MHz)				371000	376000	381000	Tune-up limit (dBm)	MPR (dB)
				1855	1880	1905		
10	PI/2 BPSK	1	1	24.38	24.24	24.44	24.5	0.0
Channel Frequency (MHz)				370500	376000	381500	Tune-up limit (dBm)	MPR (dB)
				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	24.31	24.00	24.45	24.5	0.0

<n5 Ant M1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				166800	167300	167300	Tune-up limit (dBm)	MPR (dB)
				834	836.5	839		
20	PI/2 BPSK	1	1	24.41	24.37	24.04	24.5	0.0
20	PI/2 BPSK	1	53	24.50	24.26	24.07		
20	PI/2 BPSK	1	104	24.17	24.09	24.04		
20	PI/2 BPSK	50	0	23.13	23.02	23.10	23.5	1.0
20	PI/2 BPSK	50	28	23.18	23.05	23.35		
20	PI/2 BPSK	50	56	23.03	23.48	23.38		
20	PI/2 BPSK	100	0	23.03	23.30	23.48	23.5	1.0
20	QPSK	1	1	24.03	24.45	24.32	24.5	0.0
20	QPSK	1	53	24.37	24.13	24.11		
20	QPSK	1	104	24.28	24.43	24.39		
20	QPSK	50	0	23.32	23.41	23.34	23.5	1.0
20	QPSK	50	28	23.32	23.19	23.25		
20	QPSK	50	56	23.00	23.04	23.07		
20	QPSK	100	0	23.09	23.22	23.17	23.5	1.0
20	16QAM	1	1	24.06	24.19	24.07	24.5	0.0
20	16QAM	1	53	24.17	24.30	24.12		
20	16QAM	1	104	24.15	24.06	24.36		
20	16QAM	50	0	23.31	23.46	23.05	23.5	1.0
20	16QAM	50	28	23.04	23.03	23.45		
20	16QAM	50	56	23.31	23.04	23.38		
20	16QAM	100	0	23.35	23.45	23.43	23.5	1.0
20	64QAM	1	1	24.02	24.19	24.37	24.5	0.0
20	64QAM	1	53	24.00	24.46	24.18		
20	64QAM	1	104	24.07	24.46	24.06		
20	64QAM	50	0	23.26	23.09	23.38	23.5	1.0
20	64QAM	50	28	23.11	23.09	23.05		
20	64QAM	50	56	23.13	23.49	23.15		
20	64QAM	100	0	23.36	23.48	23.47	23.5	1.0
20	256QAM	1	1	24.32	24.02	24.04	24.5	0.0
20	256QAM	1	53	24.17	24.30	24.14		
20	256QAM	1	104	24.31	24.32	24.42		
20	256QAM	50	0	23.40	23.20	23.15	23.5	1.0
20	256QAM	50	28	23.04	23.29	23.07		
20	256QAM	50	56	23.07	23.27	23.31		
20	256QAM	100	0	23.17	23.21	23.11	23.5	1.0
Channel Frequency (MHz)				166300	167300	167800	Tune-up limit (dBm)	MPR (dB)
				831.5	836.5	841.5		
15	PI/2 BPSK	1	1	24.39	24.19	24.03	24.5	0.0
Channel Frequency (MHz)				165800	167300	168200	Tune-up limit (dBm)	MPR (dB)
				829	836.5	844		
10	PI/2 BPSK	1	1	24.16	24.42	24.14	24.5	0.0
Channel Frequency (MHz)				165300	167300	168700	Tune-up limit (dBm)	MPR (dB)
				826.5	836.5	846.5		
5	PI/2 BPSK	1	1	24.33	24.15	24.40	24.5	0.0

<n5 Ant M3>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				166800	167300	167300	Tune-up limit (dBm)	MPR (dB)
				834	836.5	839		
20	PI/2 BPSK	1	1	24.41	24.13	24.04	24.5	0.0
20	PI/2 BPSK	1	53	24.06	24.42	24.19		
20	PI/2 BPSK	1	104	24.17	24.39	24.18		
20	PI/2 BPSK	50	0	23.05	23.36	23.35	23.5	1.0
20	PI/2 BPSK	50	28	23.10	23.42	23.24		
20	PI/2 BPSK	50	56	23.22	23.12	23.25		
20	PI/2 BPSK	100	0	23.30	23.01	23.28	23.5	1.0
20	QPSK	1	1	24.16	24.24	24.42	24.5	0.0
20	QPSK	1	53	24.07	24.43	24.47		
20	QPSK	1	104	24.40	24.21	24.06		
20	QPSK	50	0	23.36	23.07	23.01	23.5	1.0
20	QPSK	50	28	23.42	23.05	23.19		
20	QPSK	50	56	23.47	23.08	23.02		
20	QPSK	100	0	23.00	23.08	23.48	23.5	1.0
20	16QAM	1	1	24.50	24.46	24.02	24.5	0.0
20	16QAM	1	53	24.15	24.38	24.48		
20	16QAM	1	104	24.36	24.30	24.30		
20	16QAM	50	0	23.07	23.05	23.10	23.5	1.0
20	16QAM	50	28	23.26	23.11	23.45		
20	16QAM	50	56	23.11	23.38	23.28		
20	16QAM	100	0	23.35	23.47	23.02	23.5	1.0
20	64QAM	1	1	24.32	24.40	24.43	24.5	0.0
20	64QAM	1	53	24.31	24.19	24.30		
20	64QAM	1	104	24.03	24.03	24.25		
20	64QAM	50	0	23.32	23.25	23.26	23.5	1.0
20	64QAM	50	28	23.34	23.25	23.11		
20	64QAM	50	56	23.32	23.32	23.27		
20	64QAM	100	0	23.48	23.13	23.44	23.5	1.0
20	256QAM	1	1	24.28	24.20	24.32	24.5	0.0
20	256QAM	1	53	24.07	24.49	24.31		
20	256QAM	1	104	24.49	24.27	24.24		
20	256QAM	50	0	23.22	23.26	23.08	23.5	1.0
20	256QAM	50	28	23.24	23.35	23.19		
20	256QAM	50	56	23.02	23.45	23.11		
20	256QAM	100	0	23.07	23.02	23.19	23.5	1.0
Channel Frequency (MHz)				166300	167300	167800	Tune-up limit (dBm)	MPR (dB)
				831.5	836.5	841.5		
15	PI/2 BPSK	1	1	24.05	24.34	24.27	24.5	0.0
Channel Frequency (MHz)				165800	167300	168200	Tune-up limit (dBm)	MPR (dB)
				829	836.5	844		
10	PI/2 BPSK	1	1	24.15	24.11	24.12	24.5	0.0
Channel Frequency (MHz)				165300	167300	168700	Tune-up limit (dBm)	MPR (dB)
				826.5	836.5	846.5		
5	PI/2 BPSK	1	1	24.12	24.35	24.23	24.5	0.0

<n7 Ant M1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				502000	507000	512000	Tune-up limit (dBm)	MPR (dB)
				2510	2535	2560		
20	PI/2 BPSK	1	1	24.19	24.35	24.40	24.5	0.0
20	PI/2 BPSK	1	53	24.28	24.07	24.26		
20	PI/2 BPSK	1	104	24.45	24.24	24.24		
20	PI/2 BPSK	50	0	23.26	23.27	23.19	23.5	1.0
20	PI/2 BPSK	50	28	23.45	23.12	23.01		
20	PI/2 BPSK	50	56	23.12	23.12	23.13		
20	PI/2 BPSK	100	0	23.16	23.31	23.43	23.5	1.0
20	QPSK	1	1	24.24	24.15	24.47	24.5	0.0
20	QPSK	1	53	24.11	24.01	24.39		
20	QPSK	1	104	24.29	24.16	24.36		
20	QPSK	50	0	23.02	23.35	23.33	23.5	1.0
20	QPSK	50	28	23.37	23.08	23.24		
20	QPSK	50	56	23.48	23.08	23.26		
20	QPSK	100	0	23.29	23.43	23.17	23.5	1.0
20	16QAM	1	1	24.06	24.16	24.36	24.5	0.0
20	16QAM	1	53	24.04	24.24	24.07		
20	16QAM	1	104	24.05	24.03	24.26		
20	16QAM	50	0	23.06	23.06	23.43	23.5	1.0
20	16QAM	50	28	23.48	23.40	23.47		
20	16QAM	50	56	23.10	23.40	23.35		
20	16QAM	100	0	23.24	23.34	23.10	23.5	1.0
20	64QAM	1	1	24.26	24.23	24.40	24.5	0.0
20	64QAM	1	53	24.31	24.15	24.21		
20	64QAM	1	104	24.26	24.14	24.05		
20	64QAM	50	0	23.43	23.13	23.07	23.5	1.0
20	64QAM	50	28	23.45	23.12	23.19		
20	64QAM	50	56	23.23	23.33	23.10		
20	64QAM	100	0	23.46	23.23	23.23	23.5	1.0
20	256QAM	1	1	24.29	24.18	24.17	24.5	0.0
20	256QAM	1	53	24.32	24.37	24.37		
20	256QAM	1	104	24.02	24.06	24.21		
20	256QAM	50	0	23.19	23.38	23.12	23.5	1.0
20	256QAM	50	28	23.18	23.32	23.34		
20	256QAM	50	56	23.32	23.45	23.23		
20	256QAM	100	0	23.33	23.34	23.38	23.5	1.0
Channel Frequency (MHz)				501500	507000	511500	Tune-up limit (dBm)	MPR (dB)
				2507.5	2535	2562.5		
15	PI/2 BPSK	1	1	24.26	24.37	24.09	24.5	0.0
Channel Frequency (MHz)				501000	507000	511000	Tune-up limit (dBm)	MPR (dB)
				2505	2535	2565		
10	PI/2 BPSK	1	1	24.07	24.10	24.37	24.5	0.0
Channel Frequency (MHz)				500500	507000	510500	Tune-up limit (dBm)	MPR (dB)
				2502.5	2535	2567.5		
5	PI/2 BPSK	1	1	24.47	24.07	24.05	24.5	0.0

<n7 Ant M3>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				502000	507000	512000	Tune-up limit (dBm)	MPR (dB)
				2510	2535	2560		
20	PI/2 BPSK	1	1	24.07	24.07	24.21	24.5	0.0
20	PI/2 BPSK	1	53	24.20	24.38	24.01		
20	PI/2 BPSK	1	104	24.43	24.17	24.23		
20	PI/2 BPSK	50	0	23.15	23.15	23.21	23.5	1.0
20	PI/2 BPSK	50	28	23.40	23.38	23.01		
20	PI/2 BPSK	50	56	23.07	23.13	23.11		
20	PI/2 BPSK	100	0	23.35	23.09	23.26	23.5	1.0
20	QPSK	1	1	24.48	24.08	24.27	24.5	0.0
20	QPSK	1	53	24.13	24.06	24.20		
20	QPSK	1	104	24.06	24.26	24.21		
20	QPSK	50	0	23.44	23.20	23.39	23.5	1.0
20	QPSK	50	28	23.42	23.31	23.22		
20	QPSK	50	56	23.15	23.28	23.23		
20	QPSK	100	0	23.15	23.26	23.33	23.5	1.0
20	16QAM	1	1	24.20	24.29	24.06	24.5	0.0
20	16QAM	1	53	24.33	24.49	24.07		
20	16QAM	1	104	24.41	24.38	24.21		
20	16QAM	50	0	23.03	23.04	23.29	23.5	1.0
20	16QAM	50	28	23.04	23.14	23.23		
20	16QAM	50	56	23.11	23.09	23.11		
20	16QAM	100	0	23.11	23.39	23.20	23.5	1.0
20	64QAM	1	1	24.10	24.30	24.28	24.5	0.0
20	64QAM	1	53	24.10	24.17	24.28		
20	64QAM	1	104	24.07	24.12	24.00		
20	64QAM	50	0	23.06	23.35	23.41	23.5	1.0
20	64QAM	50	28	23.29	23.24	23.34		
20	64QAM	50	56	23.47	23.47	23.13		
20	64QAM	100	0	23.31	23.33	23.47	23.5	1.0
20	256QAM	1	1	24.22	24.37	24.03	24.5	0.0
20	256QAM	1	53	24.10	24.47	24.43		
20	256QAM	1	104	24.32	24.48	24.13		
20	256QAM	50	0	23.30	23.39	23.20	23.5	1.0
20	256QAM	50	28	23.05	23.07	23.49		
20	256QAM	50	56	23.27	23.37	23.50		
20	256QAM	100	0	23.43	23.13	23.10	23.5	1.0
Channel Frequency (MHz)				501500	507000	511500	Tune-up limit (dBm)	MPR (dB)
				2507.5	2535	2562.5		
15	PI/2 BPSK	1	1	24.11	24.13	24.17	24.5	0.0
Channel Frequency (MHz)				501000	507000	511000	Tune-up limit (dBm)	MPR (dB)
				2505	2535	2565		
10	PI/2 BPSK	1	1	24.31	24.09	24.40	24.5	0.0
Channel Frequency (MHz)				500500	507000	510500	Tune-up limit (dBm)	MPR (dB)
				2502.5	2535	2567.5		
5	PI/2 BPSK	1	1	24.22	24.31	24.13	24.5	0.0

< n12 Ant M1 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				141300	141500	141700	Tune-up limit (dBm)	MPR (dB)
				706.5	707.5	708.5		
15	PI/2 BPSK	1	1	24.08	24.30	24.29	24.5	0.0
15	PI/2 BPSK	1	40	24.20	24.23	24.27		
15	PI/2 BPSK	1	78	24.45	24.03	24.48		
15	PI/2 BPSK	37	0	23.16	23.48	23.40	23.5	1.0
15	PI/2 BPSK	37	21	23.23	23.15	23.03		
15	PI/2 BPSK	37	42	23.02	23.03	23.22		
15	PI/2 BPSK	75	0	23.45	23.13	23.42	23.5	1.0
15	QPSK	1	1	24.42	24.46	24.12	24.5	0.0
15	QPSK	1	40	24.12	24.36	24.33		
15	QPSK	1	78	24.05	24.06	24.01		
15	QPSK	37	0	23.41	23.27	23.45	23.5	1.0
15	QPSK	37	21	23.37	23.16	23.06		
15	QPSK	37	42	23.14	23.27	23.31		
15	QPSK	75	0	23.32	23.14	23.33	23.5	1.0
15	16QAM	1	1	24.05	24.12	24.06	24.5	0.0
15	16QAM	1	40	24.43	24.16	24.38		
15	16QAM	1	78	24.47	24.22	24.44		
15	16QAM	37	0	23.05	23.42	23.44	23.5	1.0
15	16QAM	37	21	23.11	23.21	23.06		
15	16QAM	37	42	23.09	23.06	23.42		
15	16QAM	75	0	23.10	23.43	23.28	23.5	1.0
15	64QAM	1	1	24.29	24.08	24.12	24.5	0.0
15	64QAM	1	40	24.30	24.43	24.03		
15	64QAM	1	78	24.01	24.24	24.00		
15	64QAM	37	0	23.01	23.45	23.13	23.5	1.0
15	64QAM	37	21	23.36	23.02	23.12		
15	64QAM	37	42	23.17	23.09	23.16		
15	64QAM	75	0	23.28	23.44	23.28	23.5	1.0
15	256QAM	1	1	24.47	24.13	24.29	24.5	0.0
15	256QAM	1	40	24.18	24.27	24.36		
15	256QAM	1	78	24.27	24.33	24.26		
15	256QAM	37	0	23.10	23.46	23.37	23.5	1.0
15	256QAM	37	21	23.22	23.43	23.45		
15	256QAM	37	42	23.01	23.42	23.40		
15	256QAM	75	0	23.06	23.44	23.02	23.5	1.0
Channel Frequency (MHz)				140920	141500	142080	Tune-up limit (dBm)	MPR (dB)
				704.6	707.5	710.4		
10	PI/2 BPSK	1	1	24.35	24.05	24.33	24.5	0.0
Channel Frequency (MHz)				140560	141500	142440	Tune-up limit (dBm)	MPR (dB)
				702.8	707.5	712.2		
5	PI/2 BPSK	1	1	24.03	24.35	24.43	24.5	0.0

< n12 Ant M3 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				141300	141500	141700	Tune-up limit (dBm)	MPR (dB)
				706.5	707.5	708.5		
15	PI/2 BPSK	1	1	24.47	24.16	24.37	24.5	0.0
15	PI/2 BPSK	1	40	24.28	24.22	24.40		
15	PI/2 BPSK	1	78	24.06	24.04	24.34		
15	PI/2 BPSK	37	0	23.13	23.49	23.24	23.5	1.0
15	PI/2 BPSK	37	21	23.04	23.36	23.03		
15	PI/2 BPSK	37	42	23.20	23.08	23.10		
15	PI/2 BPSK	75	0	23.46	23.15	23.30	23.5	1.0
15	QPSK	1	1	24.24	24.40	24.27	24.5	0.0
15	QPSK	1	40	24.07	24.22	24.19		
15	QPSK	1	78	24.26	24.22	24.18		
15	QPSK	37	0	23.44	23.07	23.41	23.5	1.0
15	QPSK	37	21	23.33	23.37	23.06		
15	QPSK	37	42	23.15	23.16	23.48		
15	QPSK	75	0	23.11	23.03	23.24	23.5	1.0
15	16QAM	1	1	24.43	24.24	24.22	24.5	0.0
15	16QAM	1	40	24.08	24.27	24.46		
15	16QAM	1	78	24.23	24.09	24.50		
15	16QAM	37	0	23.41	23.40	23.40	23.5	1.0
15	16QAM	37	21	23.40	23.35	23.16		
15	16QAM	37	42	23.19	23.22	23.44		
15	16QAM	75	0	23.36	23.09	23.07	23.5	1.0
15	64QAM	1	1	24.03	24.38	24.11	24.5	0.0
15	64QAM	1	40	24.23	24.11	24.14		
15	64QAM	1	78	24.15	24.12	24.32		
15	64QAM	37	0	23.01	23.01	23.33	23.5	1.0
15	64QAM	37	21	23.35	23.46	23.16		
15	64QAM	37	42	23.36	23.04	23.32		
15	64QAM	75	0	23.48	23.41	23.40	23.5	1.0
15	256QAM	1	1	24.08	24.37	24.26	24.5	0.0
15	256QAM	1	40	24.48	24.18	24.11		
15	256QAM	1	78	24.45	24.41	24.22		
15	256QAM	37	0	23.08	23.08	23.42	23.5	1.0
15	256QAM	37	21	23.27	23.20	23.43		
15	256QAM	37	42	23.18	23.45	23.43		
15	256QAM	75	0	23.07	23.10	23.30	23.5	1.0
Channel Frequency (MHz)				140920	141500	142080	Tune-up limit (dBm)	MPR (dB)
				704.6	707.5	710.4		
10	PI/2 BPSK	1	1	24.40	24.35	24.26	24.5	0.0
Channel Frequency (MHz)				140560	141500	142440	Tune-up limit (dBm)	MPR (dB)
				702.8	707.5	712.2		
5	PI/2 BPSK	1	1	24.46	24.31	24.47	24.5	0.0

< n25 Ant M1 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				372000	376500	381000	Tune-up limit (dBm)	MPR (dB)
				1860	1882.5	1905		
20	PI/2 BPSK	1	1	24.16	24.35	24.46	24.5	0.0
20	PI/2 BPSK	1	53	24.44	24.46	24.10		
20	PI/2 BPSK	1	104	24.12	24.40	24.09		
20	PI/2 BPSK	50	0	23.42	23.23	23.17	23.5	1.0
20	PI/2 BPSK	50	28	23.23	23.17	23.34		
20	PI/2 BPSK	50	56	23.28	23.10	23.05		
20	PI/2 BPSK	100	0	23.20	23.10	23.50	23.5	1.0
20	QPSK	1	1	24.17	24.16	24.21	24.5	0.0
20	QPSK	1	53	24.34	24.28	24.24		
20	QPSK	1	104	24.05	24.44	24.04		
20	QPSK	50	0	23.37	23.13	23.26	23.5	1.0
20	QPSK	50	28	23.38	23.42	23.43		
20	QPSK	50	56	23.42	23.33	23.24		
20	QPSK	100	0	23.39	23.44	23.21	23.5	1.0
20	16QAM	1	1	24.01	24.44	24.30	24.5	0.0
20	16QAM	1	53	24.24	24.30	24.43		
20	16QAM	1	104	24.10	24.32	24.45		
20	16QAM	50	0	23.05	23.15	23.22	23.5	1.0
20	16QAM	50	28	23.20	23.36	23.37		
20	16QAM	50	56	23.29	23.47	23.08		
20	16QAM	100	0	23.05	23.45	23.23	23.5	1.0
20	64QAM	1	1	24.33	24.17	24.17	24.5	0.0
20	64QAM	1	53	24.23	24.18	24.16		
20	64QAM	1	104	24.34	24.16	24.03		
20	64QAM	50	0	23.24	23.19	23.15	23.5	1.0
20	64QAM	50	28	23.02	23.09	23.41		
20	64QAM	50	56	23.06	23.48	23.00		
20	64QAM	100	0	23.28	23.20	23.49	23.5	1.0
20	256QAM	1	1	24.10	24.29	24.01	24.5	0.0
20	256QAM	1	53	24.24	24.04	24.24		
20	256QAM	1	104	24.07	24.39	24.03		
20	256QAM	50	0	23.26	23.47	23.05	23.5	1.0
20	256QAM	50	28	23.31	23.28	23.00		
20	256QAM	50	56	23.34	23.05	23.45		
20	256QAM	100	0	23.04	23.30	23.04	23.5	1.0
Channel Frequency (MHz)				371500	376500	381500	Tune-up limit (dBm)	MPR (dB)
				1857.5	1882.5	1907.5		
15	PI/2 BPSK	1	1	24.48	24.17	24.36	24.5	0.0
Channel Frequency (MHz)				371000	376500	382000	Tune-up limit (dBm)	MPR (dB)
				1855	1882.5	1910		
10	PI/2 BPSK	1	1	24.29	24.13	24.17	24.5	0.0
Channel Frequency (MHz)				370500	376500	382500	Tune-up limit (dBm)	MPR (dB)
				1852.5	1882.5	1912.5		
5	PI/2 BPSK	1	1	24.18	24.08	24.46	24.5	0.0

< n25 Ant M3 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				372000	376500	381000	Tune-up limit (dBm)	MPR (dB)
				1860	1882.5	1905		
20	PI/2 BPSK	1	1	24.39	24.46	24.28	24.5	0.0
20	PI/2 BPSK	1	53	24.30	24.41	24.01		
20	PI/2 BPSK	1	104	24.20	24.03	24.24		
20	PI/2 BPSK	50	0	23.36	23.07	23.02	23.5	1.0
20	PI/2 BPSK	50	28	23.20	23.02	23.14		
20	PI/2 BPSK	50	56	23.09	23.37	23.06		
20	PI/2 BPSK	100	0	23.50	23.35	23.04	23.5	1.0
20	QPSK	1	1	24.27	24.46	24.30	24.5	0.0
20	QPSK	1	53	24.31	24.14	24.42		
20	QPSK	1	104	24.01	24.05	24.48		
20	QPSK	50	0	23.03	23.19	23.25	23.5	1.0
20	QPSK	50	28	23.44	23.40	23.50		
20	QPSK	50	56	23.41	23.45	23.37		
20	QPSK	100	0	23.44	23.36	23.26	23.5	1.0
20	16QAM	1	1	24.02	24.45	24.10	24.5	0.0
20	16QAM	1	53	24.46	24.06	24.39		
20	16QAM	1	104	24.41	24.31	24.03		
20	16QAM	50	0	23.48	23.03	23.39	23.5	1.0
20	16QAM	50	28	23.38	23.19	23.11		
20	16QAM	50	56	23.26	23.27	23.46		
20	16QAM	100	0	23.10	23.17	23.38	23.5	1.0
20	64QAM	1	1	24.19	24.37	24.22	24.5	0.0
20	64QAM	1	53	24.39	24.21	24.26		
20	64QAM	1	104	24.42	24.32	24.38		
20	64QAM	50	0	23.49	23.23	23.48	23.5	1.0
20	64QAM	50	28	23.41	23.39	23.28		
20	64QAM	50	56	23.38	23.31	23.42		
20	64QAM	100	0	23.17	23.38	23.06	23.5	1.0
20	256QAM	1	1	24.45	24.32	24.41	24.5	0.0
20	256QAM	1	53	24.19	24.24	24.39		
20	256QAM	1	104	24.14	24.38	24.40		
20	256QAM	50	0	23.22	23.22	23.44	23.5	1.0
20	256QAM	50	28	23.30	23.42	23.33		
20	256QAM	50	56	23.04	23.27	23.38		
20	256QAM	100	0	23.21	23.47	23.07	23.5	1.0
Channel Frequency (MHz)				371500	376500	381500	Tune-up limit (dBm)	MPR (dB)
				1857.5	1882.5	1907.5		
15	PI/2 BPSK	1	1	24.06	24.15	24.04	24.5	0.0
Channel Frequency (MHz)				371000	376500	382000	Tune-up limit (dBm)	MPR (dB)
				1855	1882.5	1910		
10	PI/2 BPSK	1	1	24.27	24.00	24.01	24.5	0.0
Channel Frequency (MHz)				370500	376500	382500	Tune-up limit (dBm)	MPR (dB)
				1852.5	1882.5	1912.5		
5	PI/2 BPSK	1	1	24.35	24.42	24.33	24.5	0.0

<n38 Ant M1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				516000	519000	522000	Tune-up limit (dBm)	MPR (dB)
				2580	2595	2610		
20	PI/2 BPSK	1	1	24.01	24.09	24.24	24.5	0.0
20	PI/2 BPSK	1	53	24.33	24.40	24.38		
20	PI/2 BPSK	1	104	24.34	24.01	24.37		
20	PI/2 BPSK	50	0	23.23	23.25	23.28	23.5	1.0
20	PI/2 BPSK	50	28	23.20	23.18	23.18		
20	PI/2 BPSK	50	56	23.08	23.07	23.37		
20	PI/2 BPSK	100	0	23.16	23.36	23.43	23.5	1.0
20	QPSK	1	1	24.21	24.45	24.49	24.5	0.0
20	QPSK	1	53	24.18	24.09	24.17		
20	QPSK	1	104	24.04	24.05	24.29		
20	QPSK	50	0	23.19	23.05	23.25	23.5	1.0
20	QPSK	50	28	23.24	23.45	23.09		
20	QPSK	50	56	23.38	23.12	23.25		
20	QPSK	100	0	23.01	23.16	23.06	23.5	1.0
20	16QAM	1	1	24.13	24.19	24.15	24.5	0.0
20	16QAM	1	53	24.14	24.09	24.32		
20	16QAM	1	104	24.05	24.01	24.46		
20	16QAM	50	0	23.43	23.35	23.33	23.5	1.0
20	16QAM	50	28	23.25	23.27	23.48		
20	16QAM	50	56	23.12	23.35	23.31		
20	16QAM	100	0	23.34	23.35	23.34	23.5	1.0
20	64QAM	1	1	24.07	24.23	24.21	24.5	0.0
20	64QAM	1	53	24.01	24.07	24.13		
20	64QAM	1	104	24.49	24.27	24.10		
20	64QAM	50	0	23.44	23.18	23.49	23.5	1.0
20	64QAM	50	28	23.22	23.18	23.28		
20	64QAM	50	56	23.48	23.08	23.43		
20	64QAM	100	0	23.26	23.24	23.18	23.5	1.0
20	256QAM	1	1	24.26	24.07	24.48	24.5	0.0
20	256QAM	1	53	24.27	24.08	24.10		
20	256QAM	1	104	24.19	24.18	24.25		
20	256QAM	50	0	23.49	23.50	23.22	23.5	1.0
20	256QAM	50	28	23.29	23.49	23.49		
20	256QAM	50	56	23.27	23.10	23.01		
20	256QAM	100	0	23.18	23.04	23.29	23.5	1.0
Channel Frequency (MHz)				515500	519000	522500	Tune-up limit (dBm)	MPR (dB)
				2577.5	2595	2612.5		
15	PI/2 BPSK	1	1	24.20	24.13	24.44	24.5	0.0
Channel Frequency (MHz)				515000	519000	523000	Tune-up limit (dBm)	MPR (dB)
				2575	2595	2615		
10	PI/2 BPSK	1	1	24.01	24.34	24.17	24.5	0.0
Channel Frequency (MHz)				514500	519000	523500	Tune-up limit (dBm)	MPR (dB)
				2572.5	2595	2617.5		
5	PI/2 BPSK	1	1	24.38	24.10	24.49	24.5	0.0

<n38 Ant M3>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				516000	519000	522000	Tune-up limit (dBm)	MPR (dB)
				2580	2595	2610		
20	PI/2 BPSK	1	1	24.19	24.48	24.26	24.5	0.0
20	PI/2 BPSK	1	53	24.27	24.48	24.49		
20	PI/2 BPSK	1	104	24.33	24.22	24.13		
20	PI/2 BPSK	50	0	23.26	23.42	23.49	23.5	1.0
20	PI/2 BPSK	50	28	23.08	23.24	23.49		
20	PI/2 BPSK	50	56	23.01	23.42	23.42		
20	PI/2 BPSK	100	0	23.27	23.39	23.09	23.5	1.0
20	QPSK	1	1	24.23	24.09	24.30	24.5	0.0
20	QPSK	1	53	24.31	24.10	24.01		
20	QPSK	1	104	24.49	24.29	24.46		
20	QPSK	50	0	23.43	23.43	23.17	23.5	1.0
20	QPSK	50	28	23.32	23.43	23.31		
20	QPSK	50	56	23.33	23.06	23.10		
20	QPSK	100	0	23.10	23.43	23.32	23.5	1.0
20	16QAM	1	1	24.31	24.22	24.20	24.5	0.0
20	16QAM	1	53	24.44	24.13	24.44		
20	16QAM	1	104	24.23	24.37	24.07		
20	16QAM	50	0	23.31	23.38	23.34	23.5	1.0
20	16QAM	50	28	23.08	23.30	23.09		
20	16QAM	50	56	23.11	23.48	23.38		
20	16QAM	100	0	23.12	23.42	23.44	23.5	1.0
20	64QAM	1	1	24.35	24.32	24.02	24.5	0.0
20	64QAM	1	53	24.02	24.24	24.50		
20	64QAM	1	104	24.06	24.38	24.20		
20	64QAM	50	0	23.00	23.01	23.41	23.5	1.0
20	64QAM	50	28	23.41	23.14	23.25		
20	64QAM	50	56	23.04	23.32	23.13		
20	64QAM	100	0	23.34	23.49	23.15	23.5	1.0
20	256QAM	1	1	24.25	24.06	24.36	24.5	0.0
20	256QAM	1	53	24.05	24.39	24.36		
20	256QAM	1	104	24.15	24.40	24.36		
20	256QAM	50	0	23.46	23.13	23.38	23.5	1.0
20	256QAM	50	28	23.36	23.29	23.31		
20	256QAM	50	56	23.41	23.21	23.40		
20	256QAM	100	0	23.41	23.15	23.43	23.5	1.0
Channel Frequency (MHz)				515500	519000	522500	Tune-up limit (dBm)	MPR (dB)
				2577.5	2595	2612.5		
15	PI/2 BPSK	1	1	24.49	24.23	24.24	24.5	0.0
Channel Frequency (MHz)				515000	519000	523000	Tune-up limit (dBm)	MPR (dB)
				2575	2595	2615		
10	PI/2 BPSK	1	1	24.23	24.30	24.06	24.5	0.0
Channel Frequency (MHz)				514500	519000	523500	Tune-up limit (dBm)	MPR (dB)
				2572.5	2595	2617.5		
5	PI/2 BPSK	1	1	24.43	24.31	24.25	24.5	0.0

<n48 Ant M1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				637333	641666	646000	Tune-up limit (dBm)	MPR (dB)
				3560	3625	3690		
20	PI/2 BPSK	1	1	24.39	24.46	24.28	24.5	0.0
20	PI/2 BPSK	1	53	24.30	24.41	24.01		
20	PI/2 BPSK	1	104	24.20	24.03	24.24		
20	PI/2 BPSK	50	0	23.36	23.07	23.02	23.5	1.0
20	PI/2 BPSK	50	28	23.20	23.02	23.14		
20	PI/2 BPSK	50	56	23.09	23.37	23.06		
20	PI/2 BPSK	100	0	23.50	23.35	23.04	23.5	1.0
20	QPSK	1	1	24.27	24.46	24.30	24.5	0.0
20	QPSK	1	53	24.31	24.14	24.42		
20	QPSK	1	104	24.01	24.05	24.48		
20	QPSK	50	0	23.03	23.19	23.25	23.5	1.0
20	QPSK	50	28	23.44	23.40	23.50		
20	QPSK	50	56	23.41	23.45	23.37		
20	QPSK	100	0	23.44	23.36	23.26	23.5	1.0
20	16QAM	1	1	24.02	24.45	24.10	24.5	0.0
20	16QAM	1	53	24.46	24.06	24.39		
20	16QAM	1	104	24.41	24.31	24.03		
20	16QAM	50	0	23.48	23.03	23.39	23.5	1.0
20	16QAM	50	28	23.38	23.19	23.11		
20	16QAM	50	56	23.26	23.27	23.46		
20	16QAM	100	0	23.10	23.17	23.38	23.5	1.0
20	64QAM	1	1	24.19	24.37	24.22	24.5	0.0
20	64QAM	1	53	24.39	24.21	24.26		
20	64QAM	1	104	24.42	24.32	24.38		
20	64QAM	50	0	23.49	23.23	23.48	23.5	1.0
20	64QAM	50	28	23.41	23.39	23.28		
20	64QAM	50	56	23.38	23.31	23.42		
20	64QAM	100	0	23.17	23.38	23.06	23.5	1.0
20	256QAM	1	1	24.45	24.32	24.41	24.5	0.0
20	256QAM	1	53	24.19	24.24	24.39		
20	256QAM	1	104	24.14	24.38	24.40		
20	256QAM	50	0	23.22	23.22	23.44	23.5	1.0
20	256QAM	50	28	23.30	23.42	23.33		
20	256QAM	50	56	23.04	23.27	23.38		
20	256QAM	100	0	23.21	23.47	23.07	23.5	1.0
Channel Frequency (MHz)				371500	376500	381500	Tune-up limit (dBm)	MPR (dB)
				1857.5	1882.5	1907.5		
15	PI/2 BPSK	1	1	24.06	24.15	24.04	24.5	0.0
Channel Frequency (MHz)				371000	376500	382000	Tune-up limit (dBm)	MPR (dB)
				1855	1882.5	1910		
10	PI/2 BPSK	1	1	24.27	24.00	24.01	24.5	0.0
Channel Frequency (MHz)				370500	376500	382500	Tune-up limit (dBm)	MPR (dB)
				1852.5	1882.5	1912.5		
5	PI/2 BPSK	1	1	24.35	24.42	24.33	24.5	0.0

< n48 Ant M3 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				637333	641666	646000	Tune-up limit (dBm)	MPR (dB)
20	PI/2 BPSK	1	1	3560	3625	3690		
20	PI/2 BPSK	1	53	24.40	24.09	24.34	24.5	0.0
20	PI/2 BPSK	1	104	24.23	24.07	24.05		
20	PI/2 BPSK	1	0	24.33	24.22	24.38		
20	PI/2 BPSK	50	0	23.01	23.12	23.08	23.5	1.0
20	PI/2 BPSK	50	28	23.46	23.17	23.02		
20	PI/2 BPSK	50	56	23.23	23.26	23.40		
20	PI/2 BPSK	100	0	23.10	23.35	23.45	23.5	1.0
20	QPSK	1	1	24.08	24.19	24.35	24.5	0.0
20	QPSK	1	53	24.18	24.28	24.23		
20	QPSK	1	104	24.46	24.50	24.14		
20	QPSK	50	0	23.42	23.04	23.01	23.5	1.0
20	QPSK	50	28	23.27	23.00	23.15		
20	QPSK	50	56	23.33	23.04	23.41		
20	QPSK	100	0	23.50	23.41	23.35	23.5	1.0
20	16QAM	1	1	24.37	24.01	24.12	24.5	0.0
20	16QAM	1	53	24.08	24.39	24.37		
20	16QAM	1	104	24.12	24.25	24.16		
20	16QAM	50	0	23.23	23.06	23.16	23.5	1.0
20	16QAM	50	28	23.22	23.00	23.26		
20	16QAM	50	56	23.32	23.49	23.27		
20	16QAM	100	0	23.44	23.36	23.16	23.5	1.0
20	64QAM	1	1	24.23	24.09	24.24	24.5	0.0
20	64QAM	1	53	24.26	24.39	24.38		
20	64QAM	1	104	24.17	24.41	24.33		
20	64QAM	50	0	23.42	23.37	23.42	23.5	1.0
20	64QAM	50	28	23.30	23.29	23.49		
20	64QAM	50	56	23.33	23.44	23.33		
20	64QAM	100	0	23.50	23.26	23.31	23.5	1.0
20	256QAM	1	1	24.01	24.35	24.43	24.5	0.0
20	256QAM	1	53	24.19	24.36	24.21		
20	256QAM	1	104	24.20	24.37	24.30		
20	256QAM	50	0	23.27	23.21	23.10	23.5	1.0
20	256QAM	50	28	23.06	23.01	23.21		
20	256QAM	50	56	23.39	23.40	23.25		
20	256QAM	100	0	23.08	23.42	23.08	23.5	1.0
Channel Frequency (MHz)				371500	376500	381500	Tune-up limit (dBm)	MPR (dB)
15	PI/2 BPSK	1	1	1857.5	1882.5	1907.5		
	Channel Frequency (MHz)			371000	376500	382000	Tune-up limit (dBm)	MPR (dB)
10	PI/2 BPSK	1	1	1855	1882.5	1910		
	Channel Frequency (MHz)			370500	376500	382500	Tune-up limit (dBm)	MPR (dB)
5	PI/2 BPSK	1	1	1852.5	1882.5	1912.5		
	Channel Frequency (MHz)			24.23	24.45	24.06	24.5	0.0

<n66 Ant M1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				344000	349000	354000	Tune-up limit (dBm)	MPR (dB)
				1720	1745	1770		
20	PI/2 BPSK	1	1	24.42	24.49	24.32	24.5	0.0
20	PI/2 BPSK	1	53	24.13	24.37	24.33		
20	PI/2 BPSK	1	104	24.22	24.34	24.34		
20	PI/2 BPSK	50	0	23.14	23.14	23.42	23.5	1.0
20	PI/2 BPSK	50	28	23.25	23.05	23.40		
20	PI/2 BPSK	50	56	23.28	23.01	23.26		
20	PI/2 BPSK	100	0	23.34	23.49	23.32	23.5	1.0
20	QPSK	1	1	24.16	24.29	24.05	24.5	0.0
20	QPSK	1	53	24.27	24.46	24.08		
20	QPSK	1	104	24.04	24.26	24.17		
20	QPSK	50	0	23.47	23.13	23.14	23.5	1.0
20	QPSK	50	28	23.21	23.13	23.42		
20	QPSK	50	56	23.32	23.23	23.34		
20	QPSK	100	0	23.22	23.24	23.32	23.5	1.0
20	16QAM	1	1	24.45	24.31	24.04	24.5	0.0
20	16QAM	1	53	24.14	24.11	24.24		
20	16QAM	1	104	24.30	24.50	24.35		
20	16QAM	50	0	23.29	23.41	23.23	23.5	1.0
20	16QAM	50	28	23.01	23.08	23.46		
20	16QAM	50	56	23.21	23.30	23.02		
20	16QAM	100	0	23.37	23.47	23.12	23.5	1.0
20	64QAM	1	1	24.04	24.05	24.05	24.5	0.0
20	64QAM	1	53	24.41	24.44	24.48		
20	64QAM	1	104	24.01	24.39	24.46		
20	64QAM	50	0	23.13	23.34	23.14	23.5	1.0
20	64QAM	50	28	23.50	23.43	23.20		
20	64QAM	50	56	23.18	23.27	23.42		
20	64QAM	100	0	23.10	23.11	23.48	23.5	1.0
20	256QAM	1	1	24.26	24.01	24.18	24.5	0.0
20	256QAM	1	53	24.34	24.30	24.41		
20	256QAM	1	104	24.40	24.03	24.44		
20	256QAM	50	0	23.15	23.21	23.40	23.5	1.0
20	256QAM	50	28	23.29	23.08	23.05		
20	256QAM	50	56	23.32	23.01	23.28		
20	256QAM	100	0	23.25	23.47	23.00	23.5	1.0
Channel Frequency (MHz)				343500	349000	354500	Tune-up limit (dBm)	MPR (dB)
				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	24.14	24.14	24.36	24.5	0.0
Channel Frequency (MHz)				343000	349000	355000	Tune-up limit (dBm)	MPR (dB)
				1715	1745	1775		
10	PI/2 BPSK	1	1	24.19	24.38	24.27	24.5	0.0
Channel Frequency (MHz)				342500	349000	355500	Tune-up limit (dBm)	MPR (dB)
				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	24.44	24.40	24.02	24.5	0.0

<n66 Ant M3>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				344000	349000	354000	Tune-up limit (dBm)	MPR (dB)
				1720	1745	1770		
20	PI/2 BPSK	1	1	24.19	24.16	24.11	24.5	0.0
20	PI/2 BPSK	1	53	24.06	24.06	24.22		
20	PI/2 BPSK	1	104	24.15	24.22	24.26		
20	PI/2 BPSK	50	0	23.01	23.15	23.10	23.5	1.0
20	PI/2 BPSK	50	28	23.05	23.15	23.11		
20	PI/2 BPSK	50	56	23.15	23.27	23.24		
20	PI/2 BPSK	100	0	23.14	23.35	23.27	23.5	1.0
20	QPSK	1	1	24.34	24.45	24.21	24.5	0.0
20	QPSK	1	53	24.22	24.18	24.22		
20	QPSK	1	104	24.42	24.12	24.19		
20	QPSK	50	0	23.40	23.30	23.30	23.5	1.0
20	QPSK	50	28	23.18	23.45	23.05		
20	QPSK	50	56	23.46	23.24	23.24		
20	QPSK	100	0	23.16	23.49	23.25	23.5	1.0
20	16QAM	1	1	24.23	24.21	24.26	24.5	0.0
20	16QAM	1	53	24.17	24.47	24.33		
20	16QAM	1	104	24.24	24.31	24.43		
20	16QAM	50	0	23.49	23.19	23.46	23.5	1.0
20	16QAM	50	28	23.05	23.32	23.47		
20	16QAM	50	56	23.14	23.39	23.31		
20	16QAM	100	0	23.48	23.08	23.47	23.5	1.0
20	64QAM	1	1	24.11	24.45	24.16	24.5	0.0
20	64QAM	1	53	24.24	24.11	24.14		
20	64QAM	1	104	24.25	24.19	24.03		
20	64QAM	50	0	23.31	23.22	23.48	23.5	1.0
20	64QAM	50	28	23.40	23.34	23.45		
20	64QAM	50	56	23.08	23.15	23.32		
20	64QAM	100	0	23.47	23.36	23.26	23.5	1.0
20	256QAM	1	1	24.21	24.06	24.02	24.5	0.0
20	256QAM	1	53	24.50	24.04	24.43		
20	256QAM	1	104	24.07	24.33	24.40		
20	256QAM	50	0	23.19	23.09	23.20	23.5	1.0
20	256QAM	50	28	23.29	23.46	23.45		
20	256QAM	50	56	23.02	23.10	23.34		
20	256QAM	100	0	23.36	23.28	23.18	23.5	1.0
Channel Frequency (MHz)				343500	349000	354500	Tune-up limit (dBm)	MPR (dB)
				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	24.20	24.29	24.49	24.5	0.0
Channel Frequency (MHz)				343000	349000	355000	Tune-up limit (dBm)	MPR (dB)
				1715	1745	1775		
10	PI/2 BPSK	1	1	24.19	24.08	24.44	24.5	0.0
Channel Frequency (MHz)				342500	349000	355500	Tune-up limit (dBm)	MPR (dB)
				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	24.14	24.35	24.48	24.5	0.0

< n71 Ant M1 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				134600	136100	137600	Tune-up limit (dBm)	MPR (dB)
				673	680.5	688		
20	PI/2 BPSK	1	1	24.39	24.24	24.50	24.5	0.0
20	PI/2 BPSK	1	53	24.31	24.10	24.37		
20	PI/2 BPSK	1	104	24.05	24.01	24.41		
20	PI/2 BPSK	50	0	23.32	23.43	23.09	23.5	1.0
20	PI/2 BPSK	50	28	23.38	23.06	23.23		
20	PI/2 BPSK	50	56	23.38	23.35	23.44		
20	PI/2 BPSK	100	0	23.28	23.19	23.12	23.5	1.0
20	QPSK	1	1	24.02	24.20	24.41	24.5	0.0
20	QPSK	1	53	24.07	24.47	24.23		
20	QPSK	1	104	24.35	24.40	24.12		
20	QPSK	50	0	23.43	23.28	23.49	23.5	1.0
20	QPSK	50	28	23.02	23.21	23.50		
20	QPSK	50	56	23.14	23.22	23.38		
20	QPSK	100	0	23.06	23.20	23.05	23.5	1.0
20	16QAM	1	1	24.30	24.02	24.40	24.5	0.0
20	16QAM	1	53	24.15	24.23	24.41		
20	16QAM	1	104	24.05	24.24	24.31		
20	16QAM	50	0	23.09	23.28	23.01	23.5	1.0
20	16QAM	50	28	23.11	23.50	23.44		
20	16QAM	50	56	23.01	23.28	23.49		
20	16QAM	100	0	23.39	23.36	23.03	23.5	1.0
20	64QAM	1	1	24.08	24.05	24.13	24.5	0.0
20	64QAM	1	53	24.44	24.30	24.37		
20	64QAM	1	104	24.22	24.04	24.20		
20	64QAM	50	0	23.07	23.30	23.07	23.5	1.0
20	64QAM	50	28	23.08	23.25	23.28		
20	64QAM	50	56	23.26	23.39	23.45		
20	64QAM	100	0	23.21	23.07	23.45	23.5	1.0
20	256QAM	1	1	24.37	24.04	24.05	24.5	0.0
20	256QAM	1	53	24.45	24.32	24.08		
20	256QAM	1	104	24.34	24.38	24.48		
20	256QAM	50	0	23.03	23.24	23.14	23.5	1.0
20	256QAM	50	28	23.18	23.12	23.10		
20	256QAM	50	56	23.39	23.21	23.06		
20	256QAM	100	0	23.03	23.23	23.44	23.5	1.0
Channel Frequency (MHz)				134100	136100	138100	Tune-up limit (dBm)	MPR (dB)
				670.5	680.5	690.5		
15	PI/2 BPSK	1	1	24.16	24.08	24.49	24.5	0.0
Channel Frequency (MHz)				133600	136100	138600	Tune-up limit (dBm)	MPR (dB)
				668	680.5	693		
10	PI/2 BPSK	1	1	24.20	24.06	24.49	24.5	0.0
Channel Frequency (MHz)				133100	136100	139100	Tune-up limit (dBm)	MPR (dB)
				665.5	680.5	685.5		
5	PI/2 BPSK	1	1	24.33	24.37	24.45	24.5	0.0

<n71 Ant M3>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				134600	136100	137600	Tune-up limit (dBm)	MPR (dB)
				673	680.5	688		
20	PI/2 BPSK	1	1	24.10	24.39	24.11	24.5	0.0
20	PI/2 BPSK	1	53	24.08	24.17	24.30		
20	PI/2 BPSK	1	104	24.03	24.39	24.30		
20	PI/2 BPSK	50	0	23.02	23.25	23.20	23.5	1.0
20	PI/2 BPSK	50	28	23.33	23.39	23.23		
20	PI/2 BPSK	50	56	23.11	23.34	23.05		
20	PI/2 BPSK	100	0	23.10	23.21	23.07	23.5	1.0
20	QPSK	1	1	24.32	24.30	24.49	24.5	0.0
20	QPSK	1	53	24.45	24.21	24.38		
20	QPSK	1	104	24.01	24.17	24.18		
20	QPSK	50	0	23.14	23.24	23.07	23.5	1.0
20	QPSK	50	28	23.35	23.37	23.40		
20	QPSK	50	56	23.22	23.39	23.07		
20	QPSK	100	0	23.17	23.00	23.48	23.5	1.0
20	16QAM	1	1	24.32	24.21	24.27	24.5	0.0
20	16QAM	1	53	24.02	24.37	24.11		
20	16QAM	1	104	24.36	24.46	24.48		
20	16QAM	50	0	23.27	23.17	23.23	23.5	1.0
20	16QAM	50	28	23.20	23.42	23.46		
20	16QAM	50	56	23.20	23.13	23.37		
20	16QAM	100	0	23.28	23.29	23.20	23.5	1.0
20	64QAM	1	1	24.46	24.04	24.48	24.5	0.0
20	64QAM	1	53	24.30	24.35	24.44		
20	64QAM	1	104	24.22	24.00	24.41		
20	64QAM	50	0	23.31	23.19	23.26	23.5	1.0
20	64QAM	50	28	23.44	23.36	23.16		
20	64QAM	50	56	23.35	23.50	23.35		
20	64QAM	100	0	23.02	23.16	23.16	23.5	1.0
20	256QAM	1	1	24.41	24.06	24.34	24.5	0.0
20	256QAM	1	53	24.44	24.46	24.49		
20	256QAM	1	104	24.44	24.20	24.46		
20	256QAM	50	0	23.13	23.39	23.31	23.5	1.0
20	256QAM	50	28	23.08	23.31	23.42		
20	256QAM	50	56	23.02	23.03	23.49		
20	256QAM	100	0	23.26	23.20	23.20	23.5	1.0
Channel Frequency (MHz)				134100	136100	138100	Tune-up limit (dBm)	MPR (dB)
				670.5	680.5	690.5		
15	PI/2 BPSK	1	1	24.14	24.10	24.29	24.5	0.0
Channel Frequency (MHz)				133600	136100	138600	Tune-up limit (dBm)	MPR (dB)
				668	680.5	693		
10	PI/2 BPSK	1	1	24.10	24.16	24.41	24.5	0.0
Channel Frequency (MHz)				133100	136100	139100	Tune-up limit (dBm)	MPR (dB)
				665.5	680.5	685.5		
5	PI/2 BPSK	1	1	24.29	24.22	24.23	24.5	0.0

< n77 Ant M1 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				620666	646720	679333	Tune-up limit (dBm)	MPR (dB)
				3310	3750	4190		
20	PI/2 BPSK	1	1	24.17	24.47	24.47	24.5	0.0
20	PI/2 BPSK	1	53	24.14	24.40	24.14		
20	PI/2 BPSK	1	104	24.27	24.14	24.44		
20	PI/2 BPSK	50	0	23.00	23.39	23.31	23.5	1.0
20	PI/2 BPSK	50	28	23.49	23.27	23.01		
20	PI/2 BPSK	50	56	23.12	23.04	23.34		
20	PI/2 BPSK	100	0	23.46	23.36	23.13	23.5	1.0
20	QPSK	1	1	24.21	24.37	24.30	24.5	0.0
20	QPSK	1	53	24.37	24.41	24.10		
20	QPSK	1	104	24.40	24.48	24.38		
20	QPSK	50	0	23.39	23.21	23.31	23.5	1.0
20	QPSK	50	28	23.14	23.13	23.18		
20	QPSK	50	56	23.17	23.27	23.45		
20	QPSK	100	0	23.19	23.49	23.36	23.5	1.0
20	16QAM	1	1	24.42	24.11	24.34	24.5	0.0
20	16QAM	1	53	24.28	24.18	24.15		
20	16QAM	1	104	24.09	24.09	24.33		
20	16QAM	50	0	23.33	23.09	23.14	23.5	1.0
20	16QAM	50	28	23.36	23.23	23.20		
20	16QAM	50	56	23.07	23.47	23.17		
20	16QAM	100	0	23.07	23.36	23.14	23.5	1.0
20	64QAM	1	1	24.04	24.26	24.39	24.5	0.0
20	64QAM	1	53	24.41	24.48	24.45		
20	64QAM	1	104	24.36	24.07	24.37		
20	64QAM	50	0	23.12	23.05	23.22	23.5	1.0
20	64QAM	50	28	23.14	23.16	23.49		
20	64QAM	50	56	23.20	23.50	23.48		
20	64QAM	100	0	23.20	23.23	23.36	23.5	1.0
20	256QAM	1	1	24.00	24.17	24.31	24.5	0.0
20	256QAM	1	53	24.40	24.03	24.08		
20	256QAM	1	104	24.30	24.05	24.16		
20	256QAM	50	0	23.40	23.47	23.34	23.5	1.0
20	256QAM	50	28	23.04	23.19	23.42		
20	256QAM	50	56	23.03	23.01	23.20		
20	256QAM	100	0	23.15	23.41	23.03	23.5	1.0
Channel Frequency (MHz)				620166	646720	679833	Tune-up limit (dBm)	MPR (dB)
				3307.5	3750	4192.5		
15	PI/2 BPSK	1	1	24.21	24.10	24.42	24.5	0.0
Channel Frequency (MHz)				619666	646720	680333	Tune-up limit (dBm)	MPR (dB)
				3305	3750	4195		
10	PI/2 BPSK	1	1	24.21	24.40	24.11	24.5	0.0
Channel Frequency (MHz)				619166	646720	680833	Tune-up limit (dBm)	MPR (dB)
				3302.5	3750	4197.5		
5	PI/2 BPSK	1	1	24.44	24.09	24.34	24.5	0.0

< n77 Ant M3 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				620666	646720	679333	Tune-up limit (dBm)	MPR (dB)
				3310	3750	4190		
20	PI/2 BPSK	1	1	24.08	24.33	24.40	24.5	0.0
20	PI/2 BPSK	1	53	24.43	24.39	24.15		
20	PI/2 BPSK	1	104	24.32	24.16	24.13		
20	PI/2 BPSK	50	0	23.06	23.39	23.39	23.5	1.0
20	PI/2 BPSK	50	28	23.06	23.12	23.36		
20	PI/2 BPSK	50	56	23.45	23.22	23.22		
20	PI/2 BPSK	100	0	23.27	23.15	23.12	23.5	1.0
20	QPSK	1	1	24.16	24.42	24.08	24.5	0.0
20	QPSK	1	53	24.19	24.45	24.43		
20	QPSK	1	104	24.27	24.11	24.11		
20	QPSK	50	0	23.14	23.01	23.23	23.5	1.0
20	QPSK	50	28	23.20	23.10	23.19		
20	QPSK	50	56	23.01	23.49	23.20		
20	QPSK	100	0	23.00	23.37	23.37	23.5	1.0
20	16QAM	1	1	24.41	24.28	24.46	24.5	0.0
20	16QAM	1	53	24.20	24.03	24.27		
20	16QAM	1	104	24.43	24.22	24.46		
20	16QAM	50	0	23.25	23.27	23.18	23.5	1.0
20	16QAM	50	28	23.30	23.31	23.03		
20	16QAM	50	56	23.20	23.20	23.29		
20	16QAM	100	0	23.14	23.22	23.47	23.5	1.0
20	64QAM	1	1	24.01	24.29	24.34	24.5	0.0
20	64QAM	1	53	24.32	24.27	24.10		
20	64QAM	1	104	24.47	24.01	24.04		
20	64QAM	50	0	23.10	23.41	23.41	23.5	1.0
20	64QAM	50	28	23.23	23.27	23.37		
20	64QAM	50	56	23.05	23.37	23.05		
20	64QAM	100	0	23.27	23.28	23.27	23.5	1.0
20	256QAM	1	1	24.32	24.48	24.22	24.5	0.0
20	256QAM	1	53	24.47	24.05	24.01		
20	256QAM	1	104	24.45	24.46	24.46		
20	256QAM	50	0	23.49	23.16	23.11	23.5	1.0
20	256QAM	50	28	23.00	23.05	23.25		
20	256QAM	50	56	23.13	23.38	23.02		
20	256QAM	100	0	23.38	23.00	23.20	23.5	1.0
Channel Frequency (MHz)				620166	646720	679833	Tune-up limit (dBm)	MPR (dB)
				3307.5	3750	4192.5		
15	PI/2 BPSK	1	1	24.50	24.40	24.25	24.5	0.0
Channel Frequency (MHz)				619666	646720	680333	Tune-up limit (dBm)	MPR (dB)
				3305	3750	4195		
10	PI/2 BPSK	1	1	24.07	24.27	24.01	24.5	0.0
Channel Frequency (MHz)				619166	646720	680833	Tune-up limit (dBm)	MPR (dB)
				3302.5	3750	4197.5		
5	PI/2 BPSK	1	1	24.12	24.48	24.22	24.5	0.0

< n78 Ant M1 >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				620666	636667	652666	Tune-up limit (dBm)	MPR (dB)
				3310	3550	3790		
20	PI/2 BPSK	1	1	24.34	24.48	24.37	24.5	0.0
20	PI/2 BPSK	1	53	24.38	24.28	24.49		
20	PI/2 BPSK	1	104	24.32	24.21	24.21		
20	PI/2 BPSK	50	0	23.46	23.22	23.00	23.5	1.0
20	PI/2 BPSK	50	28	23.42	23.19	23.40		
20	PI/2 BPSK	50	56	23.28	23.46	23.01		
20	PI/2 BPSK	100	0	23.06	23.32	23.48	23.5	1.0
20	QPSK	1	1	24.04	24.03	24.05	24.5	0.0
20	QPSK	1	53	24.27	24.13	24.37		
20	QPSK	1	104	24.38	24.08	24.14		
20	QPSK	50	0	23.35	23.32	23.18	23.5	1.0
20	QPSK	50	28	23.15	23.16	23.01		
20	QPSK	50	56	23.40	23.23	23.44		
20	QPSK	100	0	23.36	23.38	23.15	23.5	1.0
20	16QAM	1	1	24.48	24.36	24.47	24.5	0.0
20	16QAM	1	53	24.12	24.33	24.29		
20	16QAM	1	104	24.22	24.39	24.24		
20	16QAM	50	0	23.25	23.33	23.28	23.5	1.0
20	16QAM	50	28	23.05	23.44	23.29		
20	16QAM	50	56	23.03	23.06	23.15		
20	16QAM	100	0	23.44	23.35	23.36	23.5	1.0
20	64QAM	1	1	24.43	24.23	24.43	24.5	0.0
20	64QAM	1	53	24.39	24.24	24.13		
20	64QAM	1	104	24.40	24.45	24.28		
20	64QAM	50	0	23.36	23.16	23.16	23.5	1.0
20	64QAM	50	28	23.25	23.45	23.33		
20	64QAM	50	56	23.09	23.24	23.13		
20	64QAM	100	0	23.21	23.19	23.43	23.5	1.0
20	256QAM	1	1	24.43	24.43	24.19	24.5	0.0
20	256QAM	1	53	24.08	24.29	24.42		
20	256QAM	1	104	24.45	24.23	24.30		
20	256QAM	50	0	23.39	23.01	23.47	23.5	1.0
20	256QAM	50	28	23.35	23.49	23.46		
20	256QAM	50	56	23.48	23.34	23.36		
20	256QAM	100	0	23.12	23.20	23.15	23.5	1.0
Channel Frequency (MHz)				620166	646720	679833	Tune-up limit (dBm)	MPR (dB)
				3307.5	3750	4192.5		
15	PI/2 BPSK	1	1	24.24	24.20	24.26	24.5	0.0
Channel Frequency (MHz)				619666	646720	680333	Tune-up limit (dBm)	MPR (dB)
				3305	3750	4195		
10	PI/2 BPSK	1	1	24.06	24.03	24.15	24.5	0.0
Channel Frequency (MHz)				619166	646720	680833	Tune-up limit (dBm)	MPR (dB)
				3302.5	3750	4197.5		
5	PI/2 BPSK	1	1	24.40	24.25	24.19	24.5	0.0

<n78 Ant M3>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel Frequency (MHz)				620666	636667	652666	Tune-up limit (dBm)	MPR (dB)
				3310	3550	3790		
20	PI/2 BPSK	1	1	24.10	24.49	24.19	24.5	0.0
20	PI/2 BPSK	1	53	24.48	24.41	24.40		
20	PI/2 BPSK	1	104	24.11	24.24	24.25		
20	PI/2 BPSK	50	0	23.23	23.02	23.13	23.5	1.0
20	PI/2 BPSK	50	28	23.22	23.11	23.24		
20	PI/2 BPSK	50	56	23.15	23.43	23.48		
20	PI/2 BPSK	100	0	23.24	23.00	23.31	23.5	1.0
20	QPSK	1	1	24.07	24.14	24.37	24.5	0.0
20	QPSK	1	53	24.41	24.05	24.23		
20	QPSK	1	104	24.05	24.26	24.17		
20	QPSK	50	0	23.50	23.05	23.20	23.5	1.0
20	QPSK	50	28	23.47	23.18	23.33		
20	QPSK	50	56	23.34	23.05	23.20		
20	QPSK	100	0	23.45	23.05	23.18	23.5	1.0
20	16QAM	1	1	24.49	24.22	24.47	24.5	0.0
20	16QAM	1	53	24.44	24.46	24.47		
20	16QAM	1	104	24.42	24.18	24.29		
20	16QAM	50	0	23.23	23.26	23.24	23.5	1.0
20	16QAM	50	28	23.05	23.06	23.16		
20	16QAM	50	56	23.15	23.29	23.03		
20	16QAM	100	0	23.40	23.11	23.39	23.5	1.0
20	64QAM	1	1	24.32	24.35	24.40	24.5	0.0
20	64QAM	1	53	24.20	24.21	24.15		
20	64QAM	1	104	24.15	24.10	24.11		
20	64QAM	50	0	23.38	23.39	23.35	23.5	1.0
20	64QAM	50	28	23.48	23.43	23.26		
20	64QAM	50	56	23.14	23.28	23.10		
20	64QAM	100	0	23.18	23.35	23.22	23.5	1.0
20	256QAM	1	1	24.32	24.23	24.31	24.5	0.0
20	256QAM	1	53	24.21	24.47	24.19		
20	256QAM	1	104	24.16	24.41	24.23		
20	256QAM	50	0	23.11	23.05	23.42	23.5	1.0
20	256QAM	50	28	23.41	23.11	23.49		
20	256QAM	50	56	23.27	23.29	23.47		
20	256QAM	100	0	23.36	23.21	23.38	23.5	1.0
Channel Frequency (MHz)				620166	646720	679833	Tune-up limit (dBm)	MPR (dB)
				3307.5	3750	4192.5		
15	PI/2 BPSK	1	1	24.10	24.10	24.49	24.5	0.0
Channel Frequency (MHz)				619666	646720	680333	Tune-up limit (dBm)	MPR (dB)
				3305	3750	4195		
10	PI/2 BPSK	1	1	24.39	24.12	24.12	24.5	0.0
Channel Frequency (MHz)				619166	646720	680833	Tune-up limit (dBm)	MPR (dB)
				3302.5	3750	4197.5		
5	PI/2 BPSK	1	1	24.31	24.45	24.10	24.5	0.0

9. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

FR1 Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for PI/2 BPSK SAR testing follows 1RB PI/2 BPSK allocation procedure
 - c. PI/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. QPSK/16QAM/64QAM/256QAM output powers are not $\frac{1}{2}$ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5/n12/n41/n71 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
2. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% duty cycle. AT Commands were used to establish the connection.

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 Band 2_Ant M1	20M	BPSK	1	53	Back	15mm	376000	1880	21.29	21.50	0.205	0.22
	FR1 Band 2_Ant M1	20M	BPSK	50	28		15mm	376000	1880	20.36	20.50	0.136	0.14
	FR1 Band 2_Ant M2	20M	BPSK	1	53	Back	15mm	376000	1880	21.29	21.50	0.198	0.21
	FR1 Band 2_Ant M2	20M	BPSK	50	28		15mm	376000	1880	20.36	20.50	0.122	0.13
	FR1 Band 2_Ant M3	20M	BPSK	1	53	Back	15mm	376000	1880	21.29	21.50	0.00813	0.01
	FR1 Band 2_Ant M3	20M	BPSK	50	28		15mm	376000	1880	20.36	20.50	0.00769	0.01
	FR1 Band 2_Ant M4	20M	BPSK	1	53	Back	15mm	376000	1880	21.11	21.50	0.201	0.22
	FR1 Band 2_Ant M4	20M	BPSK	50	28		15mm	376000	1880	20.06	20.50	0.132	0.15
	FR1 Band 2_Ant M5	20M	BPSK	1	53	Back	15mm	376000	1880	21.11	21.50	0.00752	0.01
	FR1 Band 2_Ant M5	20M	BPSK	50	28		15mm	376000	1880	20.06	20.50	0.00687	0.01
	FR1 Band 2_Ant M6	20M	BPSK	1	53	Back	15mm	376000	1880	21.11	21.50	0.00791	0.01
	FR1 Band 2_Ant M6	20M	BPSK	50	28		15mm	376000	1880	20.06	20.50	0.00726	0.01
1	FR1 Band 5_Ant M1	20M	BPSK	1	53	Back	15mm	167300	836.5	24.26	24.50	0.247	0.26
	FR1 Band 5_Ant M1	20M	BPSK	50	28		15mm	167300	836.5	23.05	23.50	0.201	0.22
	FR1 Band 5_Ant M2	20M	BPSK	1	53	Back	15mm	167300	836.5	24.26	24.50	0.238	0.25
	FR1 Band 5_Ant M2	20M	BPSK	50	28		15mm	167300	836.5	23.05	23.50	0.196	0.22
	FR1 Band 5_Ant M3	20M	BPSK	1	53	Back	15mm	167300	836.5	24.26	24.50	0.0450	0.05
	FR1 Band 5_Ant M3	20M	BPSK	50	28		15mm	167300	836.5	23.05	23.50	0.0411	0.05
	FR1 Band 5_Ant M4	20M	BPSK	1	53	Back	15mm	167300	836.5	24.42	24.50	0.229	0.23
	FR1 Band 5_Ant M4	20M	BPSK	50	28		15mm	167300	836.5	23.42	23.50	0.185	0.19
	FR1 Band 5_Ant M5	20M	BPSK	1	53	Back	15mm	167300	836.5	24.42	24.50	0.0421	0.04
	FR1 Band 5_Ant M5	20M	BPSK	50	28		15mm	167300	836.5	23.42	23.50	0.0396	0.04
	FR1 Band 5_Ant M6	20M	BPSK	1	53	Back	15mm	167300	836.5	24.42	24.50	0.0436	0.04
	FR1 Band 5_Ant M6	20M	BPSK	50	28		15mm	167300	836.5	23.42	23.50	0.0402	0.04
2	FR1 Band 7_Ant M1	20M	BPSK	1	53	Back	15mm	507000	2535	24.38	24.50	0.441	0.45
	FR1 Band 7_Ant M1	20M	BPSK	50	28		15mm	507000	2535	23.38	23.50	0.358	0.37
	FR1 Band 7_Ant M2	20M	BPSK	1	53	Back	15mm	507000	2535	24.38	24.50	0.396	0.41
	FR1 Band 7_Ant M2	20M	BPSK	50	28		15mm	507000	2535	23.38	23.50	0.326	0.34
	FR1 Band 7_Ant M3	20M	BPSK	1	53	Back	15mm	507000	2535	24.38	24.50	0.140	0.14
	FR1 Band 7_Ant M3	20M	BPSK	50	28		15mm	507000	2535	23.38	23.50	0.118	0.12
	FR1 Band 7_Ant M4	20M	BPSK	1	53	Back	15mm	507000	2535	24.38	24.50	0.421	0.43
	FR1 Band 7_Ant M4	20M	BPSK	50	28		15mm	507000	2535	23.38	23.50	0.337	0.35
	FR1 Band 7_Ant M5	20M	BPSK	1	53	Back	15mm	507000	2535	24.38	24.50	0.134	0.14
	FR1 Band 7_Ant M5	20M	BPSK	50	28		15mm	507000	2535	23.38	23.50	0.105	0.11
	FR1 Band 7_Ant M6	20M	BPSK	1	53	Back	15mm	507000	2535	24.38	24.50	0.128	0.13
	FR1 Band 7_Ant M6	20M	BPSK	50	28		15mm	507000	2535	23.38	23.50	0.0987	0.10
3	FR1 Band 12_Ant M1	15M	BPSK	1	40	Back	15mm	141500	707.5	24.23	24.50	0.310	0.33
	FR1 Band 12_Ant M1	15M	BPSK	37	21		15mm	141500	707.5	23.15	23.50	0.268	0.29
	FR1 Band 12_Ant M2	15M	BPSK	1	40	Back	15mm	141500	707.5	24.23	24.50	0.287	0.31
	FR1 Band 12_Ant M2	15M	BPSK	37	21		15mm	141500	707.5	23.15	23.50	0.241	0.26
	FR1 Band 12_Ant M3	15M	BPSK	1	40	Back	15mm	141500	707.5	24.23	24.50	0.0723	0.08
	FR1 Band 12_Ant M3	15M	BPSK	37	21		15mm	141500	707.5	23.15	23.50	0.0621	0.07
	FR1 Band 12_Ant M4	15M	BPSK	1	40	Back	15mm	141500	707.5	24.23	24.50	0.292	0.31
	FR1 Band 12_Ant M4	15M	BPSK	37	21		15mm	141500	707.5	23.15	23.50	0.253	0.27
	FR1 Band 12_Ant M5	15M	BPSK	1	40	Back	15mm	141500	707.5	24.23	24.50	0.0657	0.07
	FR1 Band 12_Ant M5	15M	BPSK	37	21		15mm	141500	707.5	23.15	23.50	0.0597	0.06
	FR1 Band 12_Ant M6	15M	BPSK	1	40	Back	15mm	141500	707.5	24.23	24.50	0.0689	0.07
	FR1 Band 12_Ant M6	15M	BPSK	37	21		15mm	141500	707.5	23.15	23.50	0.0603	0.07

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
4	FR1 Band 25_Ant M1	20M	QPSK	1	53	Back	15mm	376500	1882.5	24.46	24.50	0.429	0.43
	FR1 Band 25_Ant M1	20M	QPSK	50	28		15mm	376500	1882.5	23.17	23.50	0.328	0.35
	FR1 Band 25_Ant M2	20M	QPSK	1	53	Back	15mm	376500	1882.5	24.46	24.50	0.388	0.39
	FR1 Band 25_Ant M2	20M	QPSK	50	28		15mm	376500	1882.5	23.17	23.50	0.302	0.33
	FR1 Band 25_Ant M3	20M	QPSK	1	53	Back	15mm	376500	1882.5	24.46	24.50	0.0424	0.04
	FR1 Band 25_Ant M3	20M	QPSK	50	28		15mm	376500	1882.5	23.17	23.50	0.0357	0.04
	FR1 Band 25_Ant M4	20M	QPSK	1	53	Back	15mm	376500	1882.5	24.46	24.50	0.419	0.42
	FR1 Band 25_Ant M4	20M	QPSK	50	28		15mm	376500	1882.5	23.17	23.50	0.314	0.34
	FR1 Band 25_Ant M5	20M	QPSK	1	53	Back	15mm	376500	1882.5	24.46	24.50	0.0388	0.04
	FR1 Band 25_Ant M5	20M	QPSK	50	28		15mm	376500	1882.5	23.17	23.50	0.0326	0.04
	FR1 Band 25_Ant M6	20M	QPSK	1	53	Back	15mm	376500	1882.5	24.46	24.50	0.0397	0.04
	FR1 Band 25_Ant M6	20M	QPSK	50	28		15mm	376500	1882.5	23.17	23.50	0.0339	0.04
5	FR1 Band 38_Ant M1	20M	QPSK	1	53	Back	15mm	520000	2595	24.09	24.50	0.440	0.48
	FR1 Band 38_Ant M1	20M	QPSK	50	28		15mm	520000	2595	23.18	23.50	0.325	0.35
	FR1 Band 38_Ant M2	20M	QPSK	1	53	Back	15mm	520000	2595	24.09	24.50	0.411	0.45
	FR1 Band 38_Ant M2	20M	QPSK	50	28		15mm	520000	2595	23.18	23.50	0.302	0.33
	FR1 Band 38_Ant M3	20M	QPSK	1	53	Back	15mm	520000	2595	24.09	24.50	0.0819	0.09
	FR1 Band 38_Ant M3	20M	QPSK	50	28		15mm	520000	2595	23.18	23.50	0.0742	0.08
	FR1 Band 38_Ant M4	20M	QPSK	1	53	Back	15mm	520000	2595	24.09	24.50	0.402	0.44
	FR1 Band 38_Ant M4	20M	QPSK	50	28		15mm	520000	2595	23.18	23.50	0.297	0.32
	FR1 Band 38_Ant M5	20M	QPSK	1	53	Back	15mm	520000	2595	24.09	24.50	0.0801	0.09
	FR1 Band 38_Ant M5	20M	QPSK	50	28		15mm	520000	2595	23.18	23.50	0.0721	0.08
	FR1 Band 38_Ant M6	20M	QPSK	1	53	Back	15mm	520000	2595	24.09	24.50	0.0786	0.09
	FR1 Band 38_Ant M6	20M	QPSK	50	28		15mm	520000	2595	23.18	23.50	0.0706	0.08
6	FR1 Band 48_Ant M1	20M	QPSK	1	53	Back	15mm	641666	3625	24.46	24.50	0.113	0.11
	FR1 Band 48_Ant M1	20M	QPSK	50	28		15mm	641666	3625	23.02	23.50	0.0987	0.11
	FR1 Band 48_Ant M2	20M	QPSK	1	53	Back	15mm	641666	3625	24.46	24.50	0.102	0.10
	FR1 Band 48_Ant M2	20M	QPSK	50	28		15mm	641666	3625	23.02	23.50	0.0924	0.10
	FR1 Band 48_Ant M3	20M	QPSK	1	53	Back	15mm	641666	3625	24.46	24.50	0.0154	0.02
	FR1 Band 48_Ant M3	20M	QPSK	50	28		15mm	641666	3625	23.02	23.50	0.0102	0.01
	FR1 Band 48_Ant M4	20M	QPSK	1	53	Back	15mm	641666	3625	24.46	24.50	0.105	0.11
	FR1 Band 48_Ant M4	20M	QPSK	50	28		15mm	641666	3625	23.02	23.50	0.0938	0.11
	FR1 Band 48_Ant M5	20M	QPSK	1	53	Back	15mm	641666	3625	24.46	24.50	0.0123	0.01
	FR1 Band 48_Ant M5	20M	QPSK	50	28		15mm	641666	3625	23.02	23.50	0.00887	0.01
	FR1 Band 48_Ant M6	20M	QPSK	1	53	Back	15mm	641666	3625	24.46	24.50	0.0141	0.01
	FR1 Band 48_Ant M6	20M	QPSK	50	28		15mm	641666	3625	23.02	23.50	0.0906	0.10
7	FR1 Band 66_Ant M1	20M	BPSK	1	53	Back	15mm	349000	1745	24.37	24.50	0.337	0.35
	FR1 Band 66_Ant M1	20M	BPSK	50	28		15mm	349000	1745	23.05	23.50	0.259	0.29
	FR1 Band 66_Ant M2	20M	BPSK	1	53	Back	15mm	349000	1745	24.37	24.50	0.301	0.31
	FR1 Band 66_Ant M2	20M	BPSK	50	28		15mm	349000	1745	23.05	23.50	0.237	0.26
	FR1 Band 66_Ant M3	20M	BPSK	1	53	Back	15mm	349000	1745	24.37	24.50	0.0191	0.02
	FR1 Band 66_Ant M3	20M	BPSK	50	28		15mm	349000	1745	23.05	23.50	0.0124	0.01
	FR1 Band 66_Ant M4	20M	BPSK	1	53	Back	15mm	349000	1745	24.37	24.50	0.321	0.33
	FR1 Band 66_Ant M4	20M	BPSK	50	28		15mm	349000	1745	23.05	23.50	0.246	0.27
	FR1 Band 66_Ant M5	20M	BPSK	1	53	Back	15mm	349000	1745	24.37	24.50	0.0184	0.02
	FR1 Band 66_Ant M5	20M	BPSK	50	28		15mm	349000	1745	23.05	23.50	0.0103	0.01
	FR1 Band 66_Ant M6	20M	BPSK	1	53	Back	15mm	349000	1745	24.37	24.50	0.0187	0.02
	FR1 Band 66_Ant M6	20M	BPSK	50	28		15mm	349000	1745	23.05	23.50	0.0112	0.01

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
8	FR1 Band 71_Ant M1	20M	BPSK	1	53	Back	15mm	136100	680.5	24.10	24.50	0.260	0.29
	FR1 Band 71_Ant M1	20M	BPSK	50	28		15mm	136100	680.5	23.06	23.50	0.185	0.21
	FR1 Band 71_Ant M2	20M	BPSK	1	53	Back	15mm	136100	680.5	24.10	24.50	0.214	0.24
	FR1 Band 71_Ant M2	20M	BPSK	50	28		15mm	136100	680.5	23.06	23.50	0.172	0.19
	FR1 Band 71_Ant M3	20M	BPSK	1	53	Back	15mm	136100	680.5	24.10	24.50	0.0415	0.05
	FR1 Band 71_Ant M3	20M	BPSK	50	28		15mm	136100	680.5	23.06	23.50	0.0361	0.04
	FR1 Band 71_Ant M4	20M	BPSK	1	53	Back	15mm	136100	680.5	24.10	24.50	0.234	0.26
	FR1 Band 71_Ant M4	20M	BPSK	50	28		15mm	136100	680.5	23.06	23.50	0.177	0.20
	FR1 Band 71_Ant M5	20M	BPSK	1	53	Back	15mm	136100	680.5	24.10	24.50	0.0358	0.04
	FR1 Band 71_Ant M5	20M	BPSK	50	28		15mm	136100	680.5	23.06	23.50	0.0311	0.03
	FR1 Band 71_Ant M6	20M	BPSK	1	53	Back	15mm	136100	680.5	24.10	24.50	0.0395	0.04
	FR1 Band 71_Ant M6	20M	BPSK	50	28		15mm	136100	680.5	23.06	23.50	0.0336	0.04
9	FR1 Band 77_Ant M1	20M	BPSK	1	53	Back	15mm	518601	2593	24.34	24.50	0.146	0.15
	FR1 Band 77_Ant M1	20M	BPSK	50	28		15mm	518601	2593	23.08	23.50	0.101	0.11
	FR1 Band 77_Ant M2	20M	BPSK	1	53	Back	15mm	518601	2593	24.34	24.50	0.125	0.13
	FR1 Band 77_Ant M2	20M	BPSK	50	28		15mm	518601	2593	23.08	23.50	0.0853	0.09
	FR1 Band 77_Ant M3	20M	BPSK	1	53	Back	15mm	501200	2506	24.12	24.50	0.0256	0.03
	FR1 Band 77_Ant M3	20M	BPSK	50	28		15mm	518601	2593	24.34	24.50	0.0186	0.02
	FR1 Band 77_Ant M4	20M	BPSK	1	53	Back	15mm	536000	2680	24.30	24.50	0.138	0.14
	FR1 Band 77_Ant M4	20M	BPSK	50	28		15mm	518601	2593	23.08	23.50	0.0902	0.10
	FR1 Band 77_Ant M5	20M	BPSK	1	53	Back	15mm	518601	2593	21.35	21.50	0.0234	0.05
	FR1 Band 77_Ant M5	20M	BPSK	50	28		15mm	518601	2593	21.35	21.50	0.0172	0.03
	FR1 Band 77_Ant M6	20M	BPSK	1	53	Back	15mm	518601	2593	21.35	21.50	0.0249	0.05
	FR1 Band 77_Ant M6	20M	BPSK	50	28		15mm	518601	2593	21.35	21.50	0.0176	0.03

10. Simultaneous Transmission Analysis

The 3G/4G/WiFi data is located in report number SAR.20230610. The data listed in the tables below was extracted from the report filed with this report.

Sim-Tx configuration

No.	Simultaneous Transmission Configuration	Exposure Positions
		Body
1	UMTS + 2.4 GHz Wifi W1 + 2.4 GHz WiFi W2	Yes
2	UMTS + 5 GHz Wifi W1 + 5 GHz WiFi W2	Yes
3	LTE + 2.4 GHz Wifi W1 + 2.4 GHz WiFi W2	Yes
4	LTE + 5 GHz Wifi W1 + 5 GHz WiFi W2	Yes
5	FR1 + 2.4 GHz Wifi W1 + 2.4 GHz WiFi W2	Yes
6	FR1 + 5 GHz Wifi W1 + 5 GHz WiFi W2	Yes

General Note:

1. The following summations represent the absolute worst cases for simultaneous transmission with WWAN and WLAN.
2. The Scaled SAR summation is calculated based on the same configuration and test position.

Body Exposure Conditions

WWAN Band	Antenna	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz Wi-Fi W1 1g SAR (W/kg)	2.4GHz Wi-Fi W2 1g SAR (W/kg)	5GHz Wi-Fi W1 1g SAR (W/kg)	5GHz Wi-Fi W2 1g SAR (W/kg)		
WCDMA Band 2	M1	Back	1.00	0.01	0.05	0.01	0.37	1.06	1.38
	M2		0.99	0.01	0.05	0.01	0.37	1.05	1.37
	M3		0.10	0.01	0.05	0.01	0.37	0.16	0.48
	M4		1.00	0.01	0.05	0.01	0.37	1.06	1.38
	M5		0.10	0.01	0.05	0.01	0.37	0.16	0.48
	M6		0.10	0.01	0.05	0.01	0.37	0.16	0.48
WCDMA Band 4	M1		1.30	0.01	0.05	0.01	0.37	1.36	1.68
	M2		1.24	0.01	0.05	0.01	0.37	1.30	1.62
	M3		0.07	0.01	0.05	0.01	0.37	0.13	0.45
	M4		1.28	0.01	0.05	0.01	0.37	1.34	1.66
	M5		0.06	0.01	0.05	0.01	0.37	0.12	0.44
	M6		0.07	0.01	0.05	0.01	0.37	0.13	0.45
WCDMA Band 5	M1		0.85	0.01	0.05	0.01	0.37	0.91	1.23
	M2		0.84	0.01	0.05	0.01	0.37	0.90	1.22
	M3		0.08	0.01	0.05	0.01	0.37	0.14	0.46
	M4		0.84	0.01	0.05	0.01	0.37	0.90	1.22
	M5		0.08	0.01	0.05	0.01	0.37	0.14	0.46
	M6		0.08	0.01	0.05	0.01	0.37	0.14	0.46
LTE Band 2	M1		0.51	0.01	0.05	0.01	0.37	0.57	0.89
	M2		0.51	0.01	0.05	0.01	0.37	0.57	0.89
	M3		0.09	0.01	0.05	0.01	0.37	0.15	0.47
	M4		0.51	0.01	0.05	0.01	0.37	0.57	0.89
	M5		0.09	0.01	0.05	0.01	0.37	0.15	0.47
	M6		0.09	0.01	0.05	0.01	0.37	0.15	0.47
LTE Band 4	M1		0.84	0.01	0.05	0.01	0.37	0.90	1.22
	M2		0.83	0.01	0.05	0.01	0.37	0.89	1.21
	M3		0.05	0.01	0.05	0.01	0.37	0.11	0.43
	M4		0.83	0.01	0.05	0.01	0.37	0.89	1.21
	M5		0.04	0.01	0.05	0.01	0.37	0.10	0.42
	M6		0.04	0.01	0.05	0.01	0.37	0.10	0.42
LTE Band 5	M1		0.42	0.01	0.05	0.01	0.37	0.48	0.80
	M2		0.42	0.01	0.05	0.01	0.37	0.48	0.80
	M3		0.07	0.01	0.05	0.01	0.37	0.13	0.45
	M4		0.41	0.01	0.05	0.01	0.37	0.47	0.79
	M5		0.07	0.01	0.05	0.01	0.37	0.13	0.45
	M6		0.07	0.01	0.05	0.01	0.37	0.13	0.45
LTE Band 7	M1		0.76	0.01	0.05	0.01	0.37	0.82	1.14
	M2		0.74	0.01	0.05	0.01	0.37	0.80	1.12
	M3		0.29	0.01	0.05	0.01	0.37	0.35	0.67
	M4		0.75	0.01	0.05	0.01	0.37	0.81	1.13
	M5		0.27	0.01	0.05	0.01	0.37	0.33	0.65
	M6		0.28	0.01	0.05	0.01	0.37	0.34	0.66
LTE Band 12	M1		0.51	0.01	0.05	0.01	0.37	0.57	0.89
	M2		0.50	0.01	0.05	0.01	0.37	0.56	0.88
	M3		0.03	0.01	0.05	0.01	0.37	0.09	0.41
	M4		0.51	0.01	0.05	0.01	0.37	0.57	0.89
	M5		0.03	0.01	0.05	0.01	0.37	0.09	0.41
	M6		0.03	0.01	0.05	0.01	0.37	0.09	0.41

WWAN Band	Antenna	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
			WWAN	2.4GHz Wi-Fi W1	2.4GHz Wi-Fi W2	5GHz Wi-Fi W1	5GHz Wi-Fi W2		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE Band 13	M1	Back	0.12	0.01	0.05	0.01	0.37	0.18	0.50
	M2		0.11	0.01	0.05	0.01	0.37	0.17	0.49
	M3		0.05	0.01	0.05	0.01	0.37	0.11	0.43
	M4		0.11	0.01	0.05	0.01	0.37	0.17	0.49
	M5		0.05	0.01	0.05	0.01	0.37	0.11	0.43
	M6		0.05	0.01	0.05	0.01	0.37	0.11	0.43
LTE Band 14	M1		0.19	0.01	0.05	0.01	0.37	0.25	0.57
	M2		0.19	0.01	0.05	0.01	0.37	0.25	0.57
	M3		0.07	0.01	0.05	0.01	0.37	0.13	0.45
	M4		0.18	0.01	0.05	0.01	0.37	0.24	0.56
	M5		0.07	0.01	0.05	0.01	0.37	0.13	0.45
	M6		0.06	0.01	0.05	0.01	0.37	0.12	0.44
LTE Band 25	M1		0.62	0.01	0.05	0.01	0.37	0.68	1.00
	M2		0.59	0.01	0.05	0.01	0.37	0.65	0.97
	M3		0.10	0.01	0.05	0.01	0.37	0.16	0.48
	M4		0.58	0.01	0.05	0.01	0.37	0.64	0.96
	M5		0.10	0.01	0.05	0.01	0.37	0.16	0.48
	M6		0.10	0.01	0.05	0.01	0.37	0.16	0.48
LTE Band 26	M1		0.44	0.01	0.05	0.01	0.37	0.50	0.82
	M2		0.43	0.01	0.05	0.01	0.37	0.49	0.81
	M3		0.08	0.01	0.05	0.01	0.37	0.14	0.46
	M4		0.42	0.01	0.05	0.01	0.37	0.48	0.80
	M5		0.07	0.01	0.05	0.01	0.37	0.13	0.45
	M6		0.07	0.01	0.05	0.01	0.37	0.13	0.45
LTE Band 38	M1		0.23	0.01	0.05	0.01	0.37	0.29	0.61
	M2		0.22	0.01	0.05	0.01	0.37	0.28	0.60
	M3		0.12	0.01	0.05	0.01	0.37	0.18	0.50
	M4		0.22	0.01	0.05	0.01	0.37	0.28	0.60
	M5		0.11	0.01	0.05	0.01	0.37	0.17	0.49
	M6		0.11	0.01	0.05	0.01	0.37	0.17	0.49
LTE Band 41	M1		0.25	0.01	0.05	0.01	0.37	0.31	0.63
	M2		0.25	0.01	0.05	0.01	0.37	0.31	0.63
	M3		0.13	0.01	0.05	0.01	0.37	0.19	0.51
	M4		0.24	0.01	0.05	0.01	0.37	0.30	0.62
	M5		0.12	0.01	0.05	0.01	0.37	0.18	0.50
	M6		0.12	0.01	0.05	0.01	0.37	0.18	0.50
LTE Band 48	M1		0.20	0.01	0.05	0.01	0.37	0.26	0.58
	M2		0.19	0.01	0.05	0.01	0.37	0.25	0.57
	M3		0.04	0.01	0.05	0.01	0.37	0.10	0.42
	M4		0.19	0.01	0.05	0.01	0.37	0.25	0.57
	M5		0.04	0.01	0.05	0.01	0.37	0.10	0.42
	M6		0.04	0.01	0.05	0.01	0.37	0.10	0.42
LTE Band 66	M1		0.81	0.01	0.05	0.01	0.37	0.87	1.19
	M2		0.80	0.01	0.05	0.01	0.37	0.86	1.18
	M3		0.05	0.01	0.05	0.01	0.37	0.11	0.43
	M4		0.79	0.01	0.05	0.01	0.37	0.85	1.17
	M5		0.05	0.01	0.05	0.01	0.37	0.11	0.43
	M6		0.05	0.01	0.05	0.01	0.37	0.11	0.43

WWAN Band	Antenna	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
			WWAN	2.4GHz Wi-Fi W1	2.4GHz Wi-Fi W2	5GHz Wi-Fi W1	5GHz Wi-Fi W2		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE Band 71	M1	Back	0.45	0.01	0.05	0.01	0.37	0.51	0.83
	M2		0.44	0.01	0.05	0.01	0.37	0.50	0.82
	M3		0.10	0.01	0.05	0.01	0.37	0.16	0.48
	M4		0.44	0.01	0.05	0.01	0.37	0.50	0.82
	M5		0.10	0.01	0.05	0.01	0.37	0.16	0.48
	M6		0.10	0.01	0.05	0.01	0.37	0.16	0.48
FR1 Band n2	M1		0.22	0.01	0.05	0.01	0.37	0.28	0.60
	M2		0.21	0.01	0.05	0.01	0.37	0.27	0.59
	M3		0.01	0.01	0.05	0.01	0.37	0.07	0.39
	M4		0.22	0.01	0.05	0.01	0.37	0.28	0.60
	M5		0.01	0.01	0.05	0.01	0.37	0.07	0.39
	M6		0.01	0.01	0.05	0.01	0.37	0.07	0.39
FR1 Band n5	M1		0.26	0.01	0.05	0.01	0.37	0.32	0.64
	M2		0.25	0.01	0.05	0.01	0.37	0.31	0.63
	M3		0.05	0.01	0.05	0.01	0.37	0.11	0.43
	M4		0.23	0.01	0.05	0.01	0.37	0.29	0.61
	M5		0.04	0.01	0.05	0.01	0.37	0.10	0.42
	M6		0.04	0.01	0.05	0.01	0.37	0.10	0.42
FR1 Band n7	M1		0.45	0.01	0.05	0.01	0.37	0.51	0.83
	M2		0.41	0.01	0.05	0.01	0.37	0.47	0.79
	M3		0.14	0.01	0.05	0.01	0.37	0.20	0.52
	M4		0.43	0.01	0.05	0.01	0.37	0.49	0.81
	M5		0.14	0.01	0.05	0.01	0.37	0.20	0.52
	M6		0.13	0.01	0.05	0.01	0.37	0.19	0.51
FR1 Band n12	M1		0.33	0.01	0.05	0.01	0.37	0.39	0.71
	M2		0.31	0.01	0.05	0.01	0.37	0.37	0.69
	M3		0.08	0.01	0.05	0.01	0.37	0.14	0.46
	M4		0.31	0.01	0.05	0.01	0.37	0.37	0.69
	M5		0.07	0.01	0.05	0.01	0.37	0.13	0.45
	M6		0.07	0.01	0.05	0.01	0.37	0.13	0.45
FR1 Band n25	M1		0.43	0.01	0.05	0.01	0.37	0.49	0.81
	M2		0.39	0.01	0.05	0.01	0.37	0.45	0.77
	M3		0.04	0.01	0.05	0.01	0.37	0.10	0.42
	M4		0.42	0.01	0.05	0.01	0.37	0.48	0.80
	M5		0.04	0.01	0.05	0.01	0.37	0.10	0.42
	M6		0.04	0.01	0.05	0.01	0.37	0.10	0.42
FR1 Band n38	M1		0.48	0.01	0.05	0.01	0.37	0.54	0.86
	M2		0.45	0.01	0.05	0.01	0.37	0.51	0.83
	M3		0.09	0.01	0.05	0.01	0.37	0.15	0.47
	M4		0.44	0.01	0.05	0.01	0.37	0.50	0.82
	M5		0.09	0.01	0.05	0.01	0.37	0.15	0.47
	M6		0.09	0.01	0.05	0.01	0.37	0.15	0.47
FR1 Band n48	M1		0.11	0.01	0.05	0.01	0.37	0.17	0.49
	M2		0.10	0.01	0.05	0.01	0.37	0.16	0.48
	M3		0.02	0.01	0.05	0.01	0.37	0.08	0.40
	M4		0.11	0.01	0.05	0.01	0.37	0.17	0.49
	M5		0.01	0.01	0.05	0.01	0.37	0.07	0.39
	M6		0.01	0.01	0.05	0.01	0.37	0.07	0.39

WWAN Band	Antenna	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
			WWAN	2.4GHz Wi-Fi W1	2.4GHz Wi-Fi W2	5GHz Wi-Fi W1	5GHz Wi-Fi W2		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
FR1 Band n66	M1	Back	0.35	0.01	0.05	0.01	0.37	0.41	0.73
	M2		0.31	0.01	0.05	0.01	0.37	0.37	0.69
	M3		0.02	0.01	0.05	0.01	0.37	0.08	0.40
	M4		0.33	0.01	0.05	0.01	0.37	0.39	0.71
	M5		0.02	0.01	0.05	0.01	0.37	0.08	0.40
	M6		0.02	0.01	0.05	0.01	0.37	0.08	0.40
FR1 Band n71	M1		0.29	0.01	0.05	0.01	0.37	0.35	0.67
	M2		0.24	0.01	0.05	0.01	0.37	0.30	0.62
	M3		0.05	0.01	0.05	0.01	0.37	0.11	0.43
	M4		0.26	0.01	0.05	0.01	0.37	0.32	0.64
	M5		0.04	0.01	0.05	0.01	0.37	0.10	0.42
	M6		0.04	0.01	0.05	0.01	0.37	0.10	0.42
FR1 Band n77	M1		0.15	0.01	0.05	0.01	0.37	0.21	0.53
	M2		0.13	0.01	0.05	0.01	0.37	0.19	0.51
	M3		0.03	0.01	0.05	0.01	0.37	0.09	0.41
	M4		0.14	0.01	0.05	0.01	0.37	0.20	0.52
	M5		0.05	0.01	0.05	0.01	0.37	0.11	0.43
	M6		0.05	0.01	0.05	0.01	0.37	0.11	0.43

The worst case summation is WCDMA Band 4 with 5 GHz WiFi (MIMO). The value is 1.68 W/kg which is above the limit. Therefore, the separation ratio must be performed.

The separation ratio is calculated below.

Distance between M1-W1 185 mm

Distance between M1-W2 52 mm

Simultaneous Separation Ratio Calculation is based on each antenna pair. The formula is listed below.

$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04$ rounded to two digits

M1 Maximum power is 1.30 W/kg

W1 Maximum power for WiFi is 0.01 W/kg

W2 Maximum power for WiFi is 0.37 W/kg

$M1-W1(1.30+0.01)^{1.5}/185 = 0.01$

$M1-W2(1.30+0.37)^{1.5}/52 = 0.04$

LTE UL CA	Antenna	Exposure Position	1	2	3	4	5	6	1+2+3+4 Summed 1g SAR (W/kg)	1+2+5+6 Summed 1g SAR (W/kg)
			1 ST UL	2 ND UL	2.4GHz Wi-Fi W1	2.4GHz Wi-Fi W2	5GHz Wi-Fi W1	5GHz Wi-Fi W2		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
12A-4A	M1	Back	0.51	0.84	0.01	0.05	0.01	0.37	1.41	1.73
	M2		0.50	0.83	0.01	0.05	0.01	0.37	1.39	1.71
	M3		0.03	0.05	0.01	0.05	0.01	0.37	0.14	0.46
	M4		0.51	0.83	0.01	0.05	0.01	0.37	1.40	1.72
	M5		0.03	0.04	0.01	0.05	0.01	0.37	0.13	0.45
	M6		0.03	0.07	0.01	0.05	0.01	0.37	0.16	0.48
12A-2A	M1		0.51	0.51	0.01	0.05	0.01	0.37	1.08	1.40
	M2		0.50	0.51	0.01	0.05	0.01	0.37	1.07	1.39
	M3		0.03	0.09	0.01	0.05	0.01	0.37	0.18	0.50
	M4		0.51	0.51	0.01	0.05	0.01	0.37	1.08	1.40
	M5		0.03	0.09	0.01	0.05	0.01	0.37	0.18	0.50
	M6		0.03	0.09	0.01	0.05	0.01	0.37	0.18	0.50
13A-2A	M1		0.12	0.51	0.01	0.05	0.01	0.37	0.69	1.01
	M2		0.11	0.51	0.01	0.05	0.01	0.37	0.68	1.00
	M3		0.05	0.09	0.01	0.05	0.01	0.37	0.20	0.52
	M4		0.11	0.51	0.01	0.05	0.01	0.37	0.68	1.00
	M5		0.05	0.09	0.01	0.05	0.01	0.37	0.20	0.52
	M6		0.05	0.09	0.01	0.05	0.01	0.37	0.20	0.52
13A-4A	M1		0.12	0.84	0.01	0.05	0.01	0.37	1.02	1.34
	M2		0.11	0.83	0.01	0.05	0.01	0.37	1.00	1.32
	M3		0.05	0.05	0.01	0.05	0.01	0.37	0.16	0.48
	M4		0.11	0.83	0.01	0.05	0.01	0.37	1.00	1.32
	M5		0.05	0.04	0.01	0.05	0.01	0.37	0.15	0.47
	M6		0.05	0.07	0.01	0.05	0.01	0.37	0.18	0.50
5A-2A	M1		0.42	0.51	0.01	0.05	0.01	0.37	0.99	1.31
	M2		0.42	0.51	0.01	0.05	0.01	0.37	0.99	1.31
	M3		0.07	0.09	0.01	0.05	0.01	0.37	0.22	0.54
	M4		0.41	0.51	0.01	0.05	0.01	0.37	0.98	1.30
	M5		0.07	0.09	0.01	0.05	0.01	0.37	0.22	0.54
	M6		0.07	0.09	0.01	0.05	0.01	0.37	0.22	0.54
5A-4A	M1		0.42	0.84	0.01	0.05	0.01	0.37	1.32	1.64
	M2		0.42	0.83	0.01	0.05	0.01	0.37	1.31	1.63
	M3		0.07	0.05	0.01	0.05	0.01	0.37	0.18	0.50
	M4		0.41	0.83	0.01	0.05	0.01	0.37	1.30	1.62
	M5		0.07	0.04	0.01	0.05	0.01	0.37	0.17	0.49
	M6		0.07	0.07	0.01	0.05	0.01	0.37	0.20	0.52
66A-2A	M1		0.81	0.51	0.01	0.05	0.01	0.37	1.38	1.70
	M2		0.80	0.51	0.01	0.05	0.01	0.37	1.37	1.69
	M3		0.05	0.09	0.01	0.05	0.01	0.37	0.20	0.52
	M4		0.79	0.51	0.01	0.05	0.01	0.37	1.36	1.68
	M5		0.05	0.09	0.01	0.05	0.01	0.37	0.20	0.52
	M6		0.05	0.09	0.01	0.05	0.01	0.37	0.20	0.52
66A-5A	M1		0.81	0.42	0.01	0.05	0.01	0.37	1.29	1.61
	M2		0.80	0.42	0.01	0.05	0.01	0.37	1.28	1.60
	M3		0.05	0.07	0.01	0.05	0.01	0.37	0.18	0.50
	M4		0.79	0.41	0.01	0.05	0.01	0.37	1.26	1.58
	M5		0.05	0.07	0.01	0.05	0.01	0.37	0.18	0.50
	M6		0.05	0.07	0.01	0.05	0.01	0.37	0.18	0.50
7A-5A	M1		0.76	0.42	0.01	0.05	0.01	0.37	1.24	1.56
	M2		0.74	0.42	0.01	0.05	0.01	0.37	1.22	1.54
	M3		0.29	0.07	0.01	0.05	0.01	0.37	0.42	0.74
	M4		0.75	0.41	0.01	0.05	0.01	0.37	1.22	1.54
	M5		0.27	0.07	0.01	0.05	0.01	0.37	0.40	0.72
	M6		0.28	0.07	0.01	0.05	0.01	0.37	0.41	0.73

LTE UL CA	Antenna	Exposure Position	1	2	3	4	5	6	1+2+3+4 Summed 1g SAR (W/kg)	1+2+5+6 Summed 1g SAR (W/kg)
			1 ST UL	2 ND UL	2.4GHz Wi-Fi W1	2.4GHz Wi-Fi W2	5GHz Wi-Fi W1	5GHz Wi-Fi W2		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
12A-n66A	M1	Back	0.51	0.35	0.01	0.05	0.01	0.37	0.92	1.24
	M2		0.50	0.31	0.01	0.05	0.01	0.37	0.87	1.19
	M3		0.03	0.02	0.01	0.05	0.01	0.37	0.11	0.43
	M4		0.51	0.33	0.01	0.05	0.01	0.37	0.90	1.22
	M5		0.03	0.02	0.01	0.05	0.01	0.37	0.11	0.43
	M6		0.03	0.02	0.01	0.05	0.01	0.37	0.11	0.43
12A-n2A	M1		0.51	0.22	0.01	0.05	0.01	0.37	0.79	1.11
	M2		0.50	0.21	0.01	0.05	0.01	0.37	0.77	1.09
	M3		0.03	0.01	0.01	0.05	0.01	0.37	0.10	0.42
	M4		0.51	0.22	0.01	0.05	0.01	0.37	0.79	1.11
	M5		0.03	0.01	0.01	0.05	0.01	0.37	0.10	0.42
	M6		0.03	0.01	0.01	0.05	0.01	0.37	0.10	0.42
13A-n66A	M1		0.12	0.35	0.01	0.05	0.01	0.37	0.53	0.85
	M2		0.11	0.31	0.01	0.05	0.01	0.37	0.48	0.80
	M3		0.05	0.02	0.01	0.05	0.01	0.37	0.13	0.45
	M4		0.11	0.33	0.01	0.05	0.01	0.37	0.50	0.82
	M5		0.05	0.02	0.01	0.05	0.01	0.37	0.13	0.45
	M6		0.05	0.02	0.01	0.05	0.01	0.37	0.13	0.45
13A-n2A	M1		0.12	0.22	0.01	0.05	0.01	0.37	0.40	0.72
	M2		0.11	0.21	0.01	0.05	0.01	0.37	0.38	0.70
	M3		0.05	0.01	0.01	0.05	0.01	0.37	0.12	0.44
	M4		0.11	0.22	0.01	0.05	0.01	0.37	0.39	0.71
	M5		0.05	0.01	0.01	0.05	0.01	0.37	0.12	0.44
	M6		0.05	0.01	0.01	0.05	0.01	0.37	0.12	0.44
2A-n5A	M1		0.51	0.26	0.01	0.05	0.01	0.37	0.83	1.15
	M2		0.51	0.25	0.01	0.05	0.01	0.37	0.82	1.14
	M3		0.09	0.05	0.01	0.05	0.01	0.37	0.20	0.52
	M4		0.51	0.23	0.01	0.05	0.01	0.37	0.80	1.12
	M5		0.09	0.04	0.01	0.05	0.01	0.37	0.19	0.51
	M6		0.09	0.04	0.01	0.05	0.01	0.37	0.19	0.51
2A-n71A	M1		0.51	0.29	0.01	0.05	0.01	0.37	0.86	1.18
	M2		0.51	0.24	0.01	0.05	0.01	0.37	0.81	1.13
	M3		0.09	0.05	0.01	0.05	0.01	0.37	0.20	0.52
	M4		0.51	0.26	0.01	0.05	0.01	0.37	0.83	1.15
	M5		0.09	0.04	0.01	0.05	0.01	0.37	0.19	0.51
	M6		0.09	0.04	0.01	0.05	0.01	0.37	0.19	0.51
5A-n66A	M1		0.42	0.35	0.01	0.05	0.01	0.37	0.83	1.15
	M2		0.42	0.31	0.01	0.05	0.01	0.37	0.79	1.11
	M3		0.07	0.02	0.01	0.05	0.01	0.37	0.15	0.47
	M4		0.41	0.33	0.01	0.05	0.01	0.37	0.80	1.12
	M5		0.07	0.02	0.01	0.05	0.01	0.37	0.15	0.47
	M6		0.07	0.02	0.01	0.05	0.01	0.37	0.15	0.47
5A-n2A	M1		0.42	0.22	0.01	0.05	0.01	0.37	0.70	1.02
	M2		0.42	0.21	0.01	0.05	0.01	0.37	0.69	1.01
	M3		0.07	0.01	0.01	0.05	0.01	0.37	0.14	0.46
	M4		0.41	0.22	0.01	0.05	0.01	0.37	0.69	1.01
	M5		0.07	0.01	0.01	0.05	0.01	0.37	0.14	0.46
	M6		0.07	0.01	0.01	0.05	0.01	0.37	0.14	0.46
66A-n5A	M1		0.81	0.26	0.01	0.05	0.01	0.37	1.13	1.45
	M2		0.80	0.25	0.01	0.05	0.01	0.37	1.11	1.43
	M3		0.05	0.05	0.01	0.05	0.01	0.37	0.16	0.48
	M4		0.79	0.23	0.01	0.05	0.01	0.37	1.08	1.40
	M5		0.05	0.04	0.01	0.05	0.01	0.37	0.15	0.47
	M6		0.05	0.04	0.01	0.05	0.01	0.37	0.15	0.47

LTE UL CA	Antenna	Exposure Position	1	2	3	4	5	6	1+2+3+4 Summed 1g SAR (W/kg)	1+2+5+6 Summed 1g SAR (W/kg)
			1 st UL	2 nd UL	2.4GHz Wi-Fi W1	2.4GHz Wi-Fi W2	5GHz Wi-Fi W1	5GHz Wi-Fi W2		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
66A-n71A	M1	Back	0.81	0.29	0.01	0.05	0.01	0.37	1.16	1.48
	M2		0.80	0.24	0.01	0.05	0.01	0.37	1.10	1.42
	M3		0.05	0.05	0.01	0.05	0.01	0.37	0.16	0.48
	M4		0.79	0.26	0.01	0.05	0.01	0.37	1.11	1.43
	M5		0.05	0.04	0.01	0.05	0.01	0.37	0.15	0.47
	M6		0.05	0.04	0.01	0.05	0.01	0.37	0.15	0.47
7A-n5A	M1		0.76	0.26	0.01	0.05	0.01	0.37	1.08	1.40
	M2		0.74	0.25	0.01	0.05	0.01	0.37	1.05	1.37
	M3		0.29	0.05	0.01	0.05	0.01	0.37	0.40	0.72
	M4		0.75	0.23	0.01	0.05	0.01	0.37	1.04	1.36
	M5		0.27	0.04	0.01	0.05	0.01	0.37	0.37	0.69
	M6		0.28	0.04	0.01	0.05	0.01	0.37	0.38	0.70
7A-n71A	M1		0.76	0.29	0.01	0.05	0.01	0.37	1.11	1.43
	M2		0.74	0.24	0.01	0.05	0.01	0.37	1.04	1.36
	M3		0.29	0.05	0.01	0.05	0.01	0.37	0.40	0.72
	M4		0.75	0.26	0.01	0.05	0.01	0.37	1.07	1.39
	M5		0.27	0.04	0.01	0.05	0.01	0.37	0.37	0.69
	M6		0.28	0.04	0.01	0.05	0.01	0.37	0.38	0.70

The worst case value above the limit for each of the antennas M1, M2, M3 and M4 are 1.73 W/kg, 1.63 W/kg, 1.72 W/kg & 1.68 W/kg, respectively. Therefore the separation ratio is performed below.

The separation ratio is calculated below.

Distance between M1-W1	185 mm
Distance between M1-W2	52 mm
Distance between M2-W1	40 mm
Distance between M2-W2	180 mm
Distance between M4-W1	69 mm
Distance between M4-W2	173 mm

Simultaneous Separation Ratio Calculation is based on each antenna pair. The formula is listed below.

$$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04 \text{ rounded to two digits}$$

M1 Maximum power is 1.35 W/kg

M2 Maximum power is 1.31 W/kg

M4 Maximum power is 1.34 W/kg

W1 Maximum power for WiFi is 0.01 W/kg

W2 Maximum power for WiFi is 0.37 W/kg

$$M1-W1(1.35+0.01)^{1.5}/185 = 0.01$$

$$M1-W2(1.35+0.37)^{1.5}/52 = 0.04$$

$$M2-W1(1.31+0.01)^{1.5}/40 = 0.04$$

$$M2-W2(1.31+0.37)^{1.5}/180 = 0.01$$

$$M4-W1(1.34+0.01)^{1.5}/69 = 0.02$$

$$M4-W2(1.34+0.37)^{1.5}/173 = 0.01$$

11. Test Equipment List

Table 11.1 Equipment Specifications

Type	Calibration Due Date	Calibration Done Date	Serial Number
Staubli Robot TX60L	N/A	N/A	F07/55M6A1/A/01
Measurement Controller CS8c	N/A	N/A	1012
ELI5 Flat Phantom	N/A	N/A	1251
Device Holder	N/A	N/A	N/A
Data Acquisition Electronics 4	08/16/2023	08/16/2022	759
SPEAG E-Field Probe EX3DV4	08/28/2023	08/28/2022	3693
Speag Validation Dipole D750V2	06/04/2024	06/04/2021	1053
Speag Validation Dipole D900V2	06/04/2024	06/04/2021	1d128
Speag Validation Dipole D1750V2	06/03/2024	06/03/2021	1061
Speag Validation Dipole D1900V2	06/04/2024	06/04/2021	5d147
Speag Validation Dipole D2550V2	06/03/2024	06/03/2021	1003
Speag Validation Dipole D3300V2	01/17/2024	01/17/2022	1032
Speag Validation Dipole D3500V2	04/13/2024	04/13/2021	1061
Speag Validation Dipole D3700V2	04/13/2024	04/13/2021	1024
Speag Validation Dipole D3900V2	01/13/2024	01/13/2022	1082
Speag Validation Dipole D4200V2	01/13/2024	01/13/2022	1025
Agilent N1911A Power Meter	03/14/2024	03/14/2023	GB45100254
Agilent N1922A Power Sensor	03/13/2024	03/13/2023	MY45240464
Agilent (HP) 8596E Spectrum Analyzer	03/13/2024	03/13/2023	3826A01468
Agilent (HP) 83752A Synthesized Sweeper	03/14/2024	03/14/2023	3610A01048
Agilent (HP) 8753C Vector Network Analyzer	03/14/2024	03/14/2023	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/14/2024	03/14/2023	2904A00595
Copper Mountain R140 Vector Reflectometer	03/13/2024	03/13/2023	21390004
Anritsu MT8000A	N/A	N/A	6262186412
Apriel Dielectric Probe Assembly	N/A	N/A	0011
Head Equivalent Matter (750 MHz)	N/A	N/A	N/A
Head Equivalent Matter (900 MHz)	N/A	N/A	N/A
Head Equivalent Matter (1750 MHz)	N/A	N/A	N/A
Head Equivalent Matter (1900 MHz)	N/A	N/A	N/A
Head Equivalent Matter (2450 MHz)	N/A	N/A	N/A
Head Equivalent Matter (2550 MHz)	N/A	N/A	N/A
Head Equivalent Matter (3-6 GHz)	N/A	N/A	N/A

12. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

13. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.
- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.
- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.
- [6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

Appendix A – System Validation Plots and Data

Test Result for UIM Dielectric Parameter

Mon 12/Jun/2023

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.6600	42.41	0.88	41.46	0.88
0.6700	42.36	0.89	41.41	0.88
0.6730	42.345	0.89	41.401	0.88*
0.6800	42.31	0.89	41.38	0.88
0.6805	42.307	0.89	41.377	0.881*
0.6880	42.262	0.89	41.332	0.888*
0.6900	42.25	0.89	41.32	0.89
0.7000	42.20	0.89	41.27	0.89
0.7065	42.168	0.89	41.225	0.897*
0.7075	42.163	0.89	41.218	0.898*
0.7085	42.158	0.89	41.211	0.899*
0.7100	42.15	0.89	41.20	0.90
0.7200	42.10	0.89	41.15	0.91
0.7300	42.05	0.89	41.08	0.92
0.7400	41.99	0.89	41.02	0.92
0.7500	41.94	0.89	40.97	0.93
0.7600	41.89	0.89	40.91	0.94
0.7700	41.84	0.89	40.85	0.95
0.7800	41.79	0.90	40.79	0.95
0.7900	41.73	0.90	40.73	0.96
0.8000	41.68	0.90	40.69	0.96

* value interpolated

Test Result for UIM Dielectric Parameter

Tue 13/Jun/2023

Freq Frequency(GHz)

eH Limits for Head Epsilon

sH Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	eH	sH	Test_e	Test_s
0.8000	41.68	0.90	41.14	0.92
0.8100	41.63	0.90	41.09	0.93
0.8200	41.58	0.90	41.03	0.94
0.8300	41.53	0.90	41.08	0.94
0.8340	41.518	0.904	41.068	0.944*
0.8365	41.511	0.907	41.061	0.947*
0.8390	41.503	0.909	41.053	0.949*
0.8400	41.50	0.91	41.05	0.95
0.8440	41.50	0.914	41.042	0.954*
0.8500	41.50	0.92	41.03	0.96
0.8600	41.50	0.93	41.01	0.97
0.8700	41.50	0.94	40.99	0.98
0.8800	41.50	0.95	40.98	0.99
0.8900	41.50	0.96	40.97	1.00
0.8975	41.50	0.968	40.963	1.008*
0.9000	41.50	0.97	40.96	1.01
0.9050	41.50	0.975	40.955	1.015*
0.9100	41.50	0.98	40.95	1.02
0.9200	41.49	0.98	40.94	1.02

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 15/Jun/2023

Freq Frequency(GHz)

eH Limits for Head Epsilon

sH Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	eH	sH	Test_e	Test_s
1.7000	40.16	1.34	39.16	1.35
1.7100	40.14	1.35	39.14	1.36
1.7200	40.13	1.35	39.12	1.37
1.7300	40.11	1.36	39.10	1.37
1.7400	40.09	1.37	39.08	1.38
1.7450	40.085	1.37	39.07	1.385*
1.7475	40.083	1.37	39.065	1.388*
1.7500	40.08	1.37	39.06	1.39
1.7600	40.06	1.38	39.04	1.40
1.7700	40.05	1.38	39.02	1.41
1.7750	40.04	1.385	39.01	1.41*
1.7800	40.03	1.39	39.00	1.41
1.7900	40.02	1.39	38.98	1.42

* value interpolated

Test Result for UIM Dielectric Parameter

Fri 16/Jun/2023

Freq Frequency(GHz)

eH Limits for Head Epsilon

sH Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	eH	sH	Test_e	Test_s
1.8500	40.00	1.40	39.65	1.40
1.8600	40.00	1.40	39.63	1.41
1.8700	40.00	1.40	39.61	1.41
1.8800	40.00	1.40	39.59	1.42
1.8825	40.00	1.40	39.585	1.42*
1.8900	40.00	1.40	39.57	1.42
1.9000	40.00	1.40	39.55	1.42
1.9050	40.00	1.40	39.54	1.425*
1.9100	40.00	1.40	39.53	1.43
1.9200	40.00	1.40	39.52	1.44
1.9300	40.00	1.40	39.51	1.44
1.9400	40.00	1.40	39.49	1.44
1.9500	40.00	1.40	39.48	1.45
1.9600	40.00	1.40	39.46	1.45
1.9700	40.00	1.40	39.45	1.46
1.9800	40.00	1.40	39.44	1.46
1.9900	40.00	1.40	39.42	1.47

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 19/Jun/2023

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
2.4900	39.15	1.84	38.88	1.84
2.5000	39.14	1.85	38.86	1.85
2.5100	39.12	1.87	38.83	1.86
2.5200	39.11	1.88	38.81	1.88
2.5300	39.10	1.89	38.79	1.89
2.5350	39.095	1.895	38.775	1.895*
2.5400	39.09	1.90	38.76	1.90
2.5500	39.07	1.91	38.74	1.92
2.5600	39.06	1.92	38.72	1.93
2.5700	39.05	1.93	38.69	1.94
2.5800	39.03	1.94	38.67	1.96
2.5900	39.02	1.95	38.64	1.97
2.5950	39.015	1.955	38.645	1.97*
2.6000	39.01	1.96	38.65	1.97
2.6100	39.00	1.97	38.63	1.98
2.6200	38.98	1.99	38.62	1.99
2.6300	38.97	2.00	38.60	2.00

* value interpolated

Test Result for UIM Dielectric Parameter

Tue 20/Jun/2023

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
3.3000	38.16	2.70	37.59	2.73
3.3100	38.15	2.71	37.58	2.74*
3.3200	38.14	2.72	37.57	2.75
3.3400	38.12	2.74	37.55	2.77
3.3600	38.09	2.76	37.52	2.79
3.3800	38.07	2.78	37.50	2.81
3.3980	38.052	2.798	37.482	2.828*
3.4000	38.05	2.80	37.48	2.83
3.4200	38.02	2.82	37.45	2.85
3.4400	38.00	2.85	37.43	2.88
3.4600	37.98	2.87	37.41	2.90
3.4800	37.95	2.89	37.38	2.92
3.4860	37.944	2.896	37.374	2.926*
3.5000	37.93	2.91	37.36	2.94
3.5200	37.91	2.93	37.34	2.96
3.5400	37.88	2.95	37.31	2.98
3.5600	37.86	2.97	37.29	3.00
3.5740	37.846	2.984	37.276	3.014*
3.5800	37.84	2.99	37.27	3.02
3.6000	37.81	3.02	37.24	3.05
3.6033	37.807	3.023	37.237	3.053*
3.6200	37.79	3.04	37.22	3.07
3.6250	37.785	3.045	37.215	3.075*
3.6400	37.77	3.06	37.20	3.09
3.6467	37.763	3.067	37.193	3.097*
3.6600	37.75	3.08	37.18	3.11
3.6620	37.747	3.082	37.177	3.112*
3.6800	37.72	3.10	37.15	3.13
3.6900	37.71	3.11	37.14	3.14*
3.7000	37.70	3.12	37.13	3.15
3.7200	37.68	3.14	37.11	3.17
3.7400	37.65	3.17	37.08	3.20
3.7500	37.64	3.18	37.07	3.21*
3.7600	37.63	3.19	37.06	3.22
3.7800	37.61	3.21	37.04	3.24
3.8000	37.58	3.23	37.01	3.26
3.8200	37.56	3.25	36.99	3.28
3.8380	37.542	3.268	36.972	3.298*
3.8400	37.54	3.27	36.97	3.30
3.8600	37.51	3.29	36.94	3.32
3.8800	37.49	3.31	36.92	3.34
3.9000	37.47	3.34	36.90	3.37
3.9200	37.44	3.36	36.87	3.39
3.9260	37.434	3.366	36.864	3.396*
3.9400	37.42	3.38	36.85	3.41
3.9600	37.40	3.40	36.83	3.43
3.9800	37.37	3.42	36.80	3.45
4.0000	37.35	3.44	36.78	3.47
4.0140	37.336	3.454	36.766	3.484*
4.0200	37.33	3.46	36.76	3.49
4.0400	37.30	3.48	36.73	3.51
4.0600	37.28	3.51	36.71	3.54
4.0800	37.26	3.53	36.69	3.56
4.1000	37.23	3.55	36.66	3.58
4.1020	37.228	3.552	36.658	3.582*
4.1200	37.21	3.57	36.64	3.60
4.1400	37.19	3.59	36.62	3.62
4.1600	37.16	3.61	36.59	3.64
4.1800	37.14	3.63	36.57	3.66
4.1900	37.13	3.64	36.56	3.67*
4.2000	37.12	3.65	36.55	3.68
4.2200	37.09	3.68	36.52	3.71
4.2400	37.07	3.70	36.50	3.73

* value interpolated

RF Exposure Lab

Plot 1

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN 1053

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 750$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 40.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/12/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 – SN3693; ConvF(10.46, 10.46, 10.46); Calibrated: 8/28/2022;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/16/2023

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz Head/Verification/Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.871 W/kg

750 MHz Head/Verification /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.452 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.76 mW/g

$P_{in} = 100$ mW

SAR(1 g) = 0.866 mW/g; SAR(10 g) = 0.559 mW/g

Maximum value of SAR (measured) = 0.883 W/kg

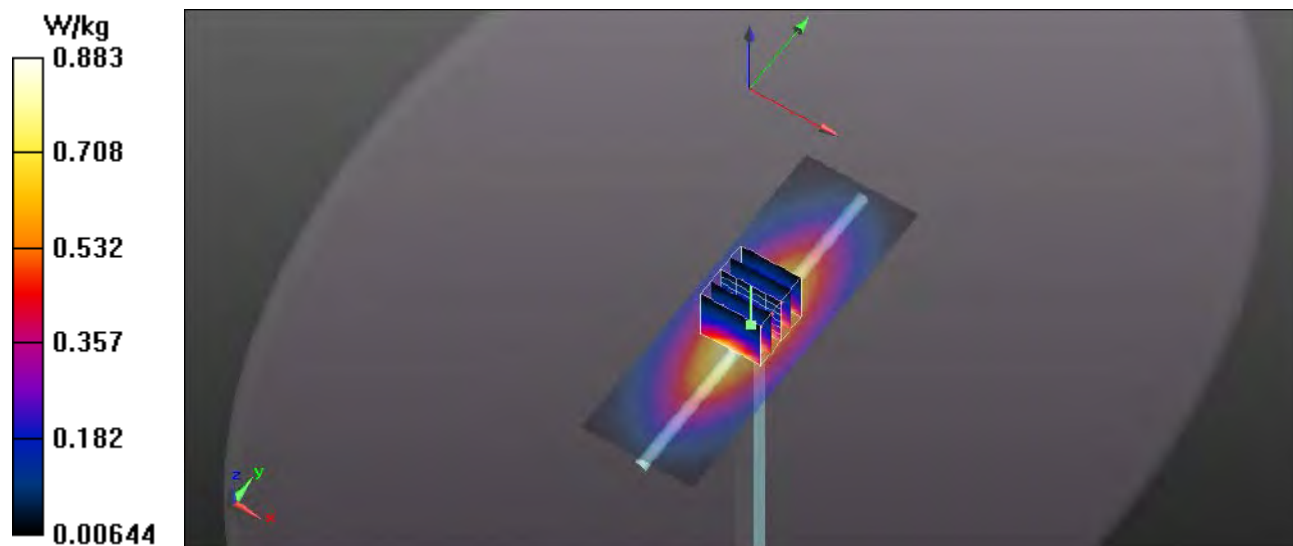

RF Exposure Lab

Plot 2

DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:1d128



Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1
Medium: HSL900; Medium parameters used: $f = 900$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 40.96$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/13/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 – SN3693; ConvF(9.99, 9.99, 9.99); Calibrated: 8/28/2022;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2023
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

900 MHz Head/Verification/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.22 W/kg

900 MHz Head/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.119 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.49 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.716 W/kg
Maximum value of SAR (measured) = 1.19 W/kg

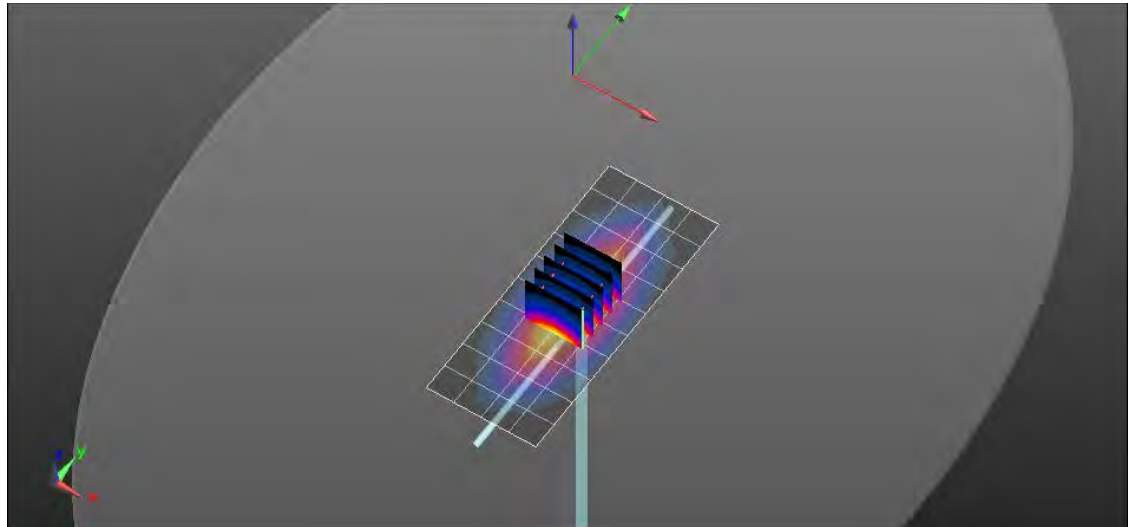

RF Exposure Lab

Plot 3

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1061

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.06$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/15/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 – SN3693; ConvF(8.83, 8.83, 8.83); Calibrated: 8/28/2022;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/16/2023

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1750 MHz Head/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.46 W/kg

1750 MHz Head/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 34.885 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 6.97 W/kg

$P_{in} = 100$ mW

SAR(1 g) = 3.81 W/kg; SAR(10 g) = 1.99 W/kg

Maximum value of SAR (measured) = 5.47 W/kg

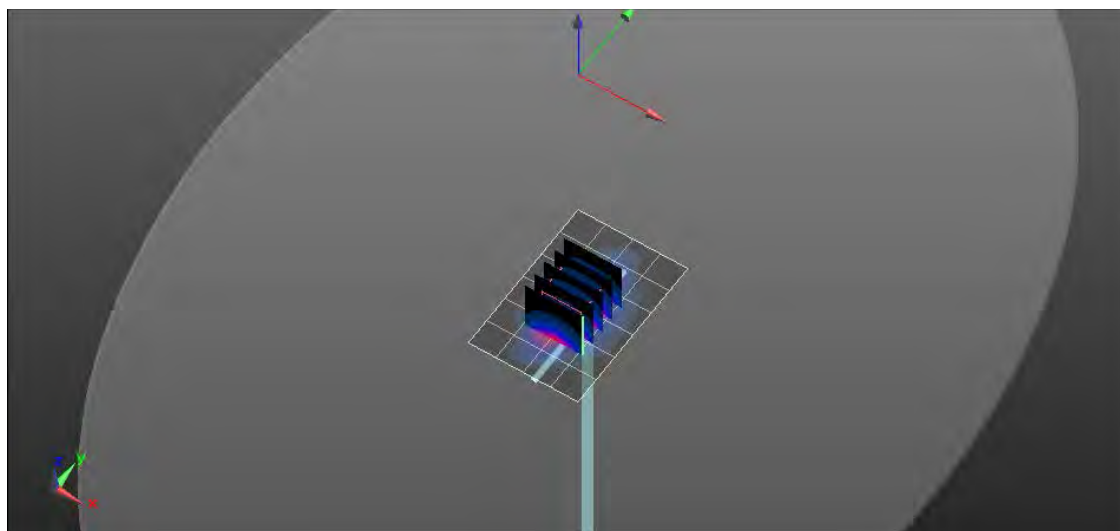

RF Exposure Lab

Plot 4

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN: 5d147

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/16/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 – SN3693; ConvF(8.43, 8.43, 8.43); Calibrated: 8/28/2022;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/16/2023

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1900 MHz Head/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.68 W/kg

1900 MHz Head/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 34.662 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 7.18 W/kg

$P_{in} = 100$ mW

SAR(1 g) = 4.12 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 5.77 W/kg

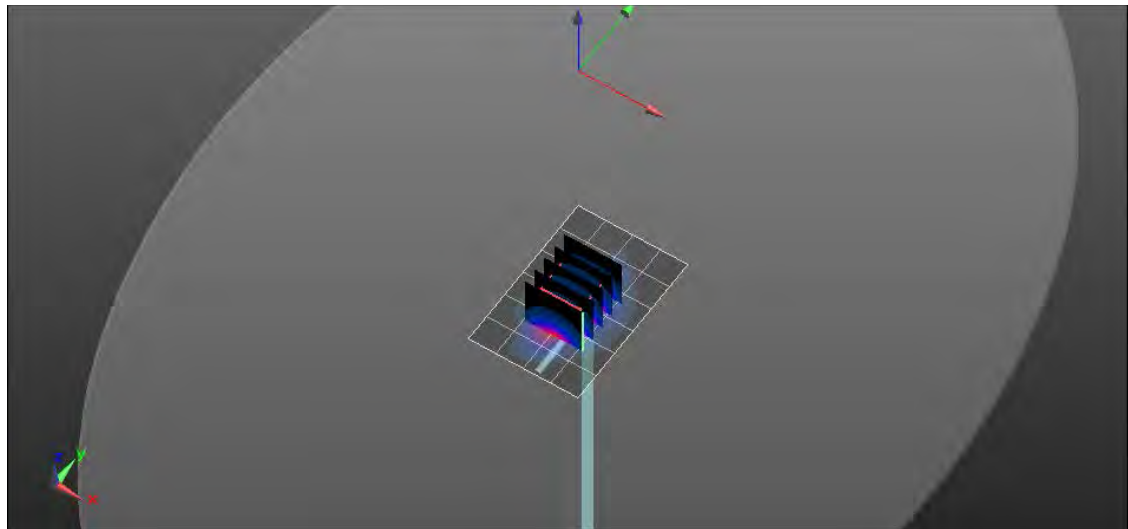

RF Exposure Lab

Plot 5

DUT: Dipole 2550 MHz D2550V2; Type: D2550V2; Serial: D2550V2 - SN:1003


Communication System: CW; Frequency: 2550 MHz; Duty Cycle: 1:1
Medium: HSL2550; Medium parameters used: $f = 2550$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.74$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/19/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 – SN3693; ConvF(7.71, 7.71, 7.71); Calibrated: 8/28/2022;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2023
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2550 MHz Head/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 9.05 W/kg

2550 MHz Head/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.923 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 11.8 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 5.66 W/kg; SAR(10 g) = 2.49 W/kg
Maximum value of SAR (measured) = 9.18 W/kg

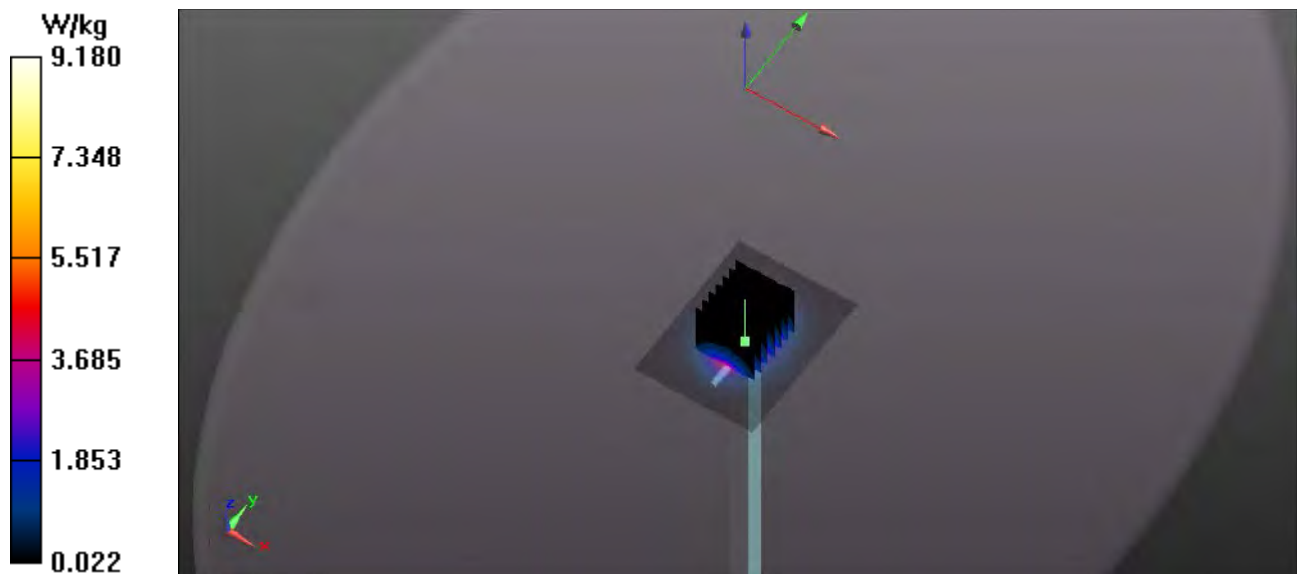

RF Exposure Lab

Plot 6

DUT: Dipole D3300V2; Type: D3300V2; Serial: D3300V2 - SN: 1032

Communication System: CW; Frequency: 3300 MHz; Duty Cycle: 1:1

Medium: HSL 3-6 GHz; Medium parameters used: $f = 3300$ MHz; $\sigma = 2.73$ S/m; $\epsilon_r = 37.59$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/20/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 – SN3693; ConvF(7.02, 7.02, 7.02); Calibrated: 8/28/2022;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/16/2023

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3300 MHz Head/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.81 W/kg

3300 MHz Head/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 14.856 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.68 W/kg

Pin=10 mW

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 2.03 W/kg

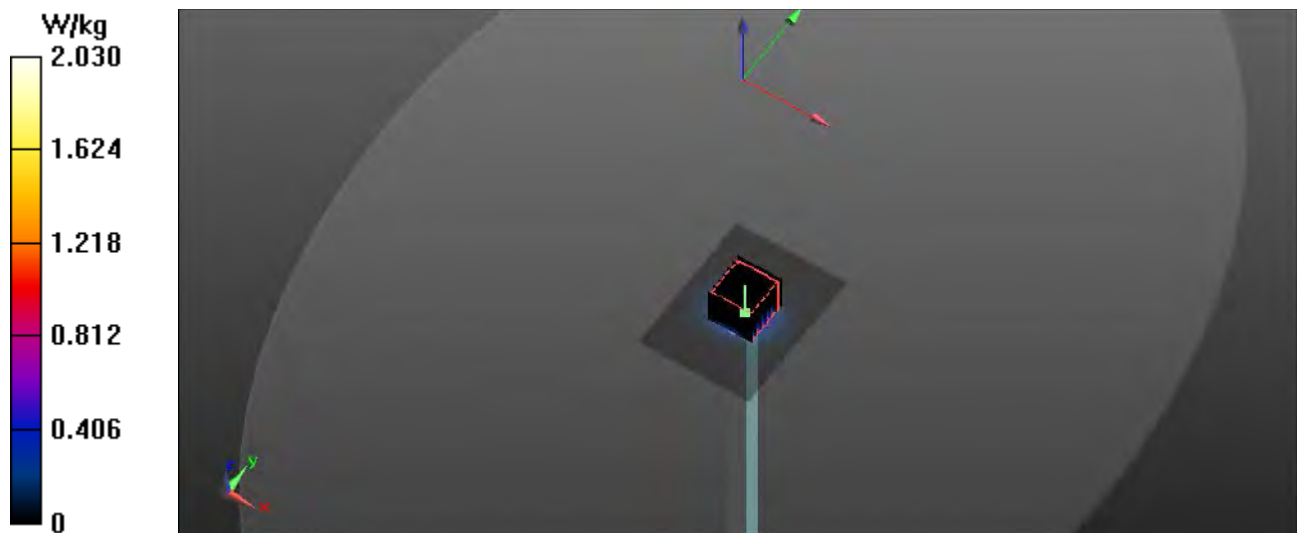

RF Exposure Lab

Plot 7

DUT: Dipole D3500V2; Type: D3500V2; Serial: D3500V2 - SN: 1061

Communication System: CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL 3-6 GHz; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.94$ S/m; $\epsilon_r = 37.36$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/20/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 – SN3693; ConvF(6.98, 6.98, 6.98); Calibrated: 8/28/2022;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/16/2023

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3500 MHz Head/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.65 W/kg

3500 MHz Head/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm



Reference Value = 21.367 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.71 W/kg

$P_{in} = 10$ mW

SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 1.7 W/kg

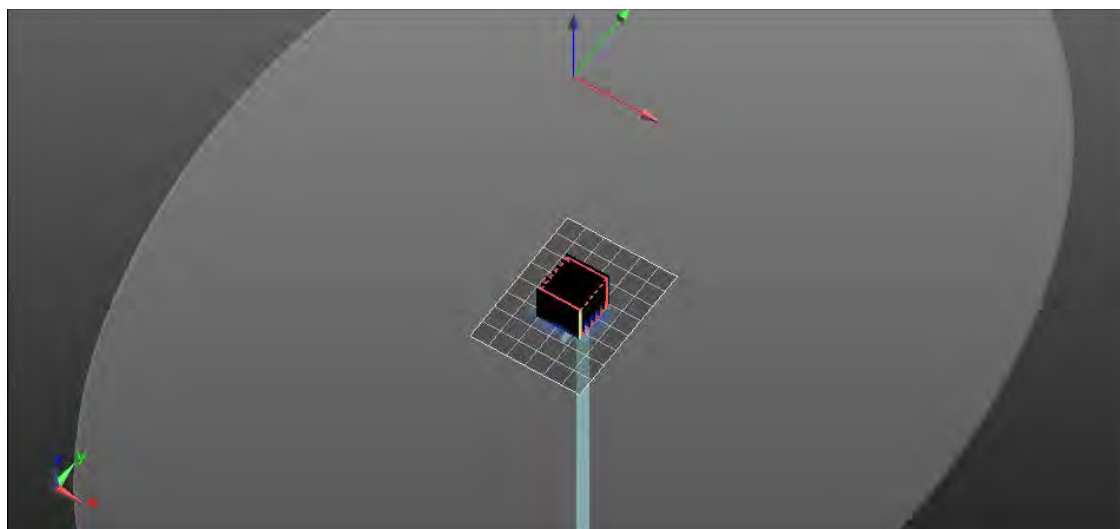

RF Exposure Lab

Plot 8

DUT: Dipole D3700V2; Type: D3700V2; Serial: D3700V2 - SN:1024

Communication System: CW; Frequency: 3700 MHz; Duty Cycle: 1:1
Medium: HSL 3-6 GHz; Medium parameters used: $f = 3700$ MHz; $\sigma = 3.15$ S/m; $\epsilon_r = 37.13$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/20/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 – SN3693; ConvF(6.95, 6.95, 6.95); Calibrated: 8/28/2022;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2023
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3700 MHz Head/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.65 W/kg

3700 MHz Head/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 21.467 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.47 W/kg
 $P_{in} = 10$ mW
SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.251 W/kg
Maximum value of SAR (measured) = 1.67 W/kg



RF Exposure Lab

Plot 9

DUT: Dipole D3900V2; Type: D3900V2; Serial: D3900V2 - SN:1082

Communication System: CW; Frequency: 3900 MHz; Duty Cycle: 1:1

Medium: HSL 3-6 GHz; Medium parameters used: $f = 3900$ MHz; $\sigma = 3.37$ S/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/21/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 – SN3693; ConvF(6.4, 6.4, 6.4); Calibrated: 8/28/2022;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/16/2023

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3900 MHz Head/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.47 W/kg

3900 MHz Head/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 15.385 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.34 W/kg

Pin=10 mW

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 1.89 W/kg

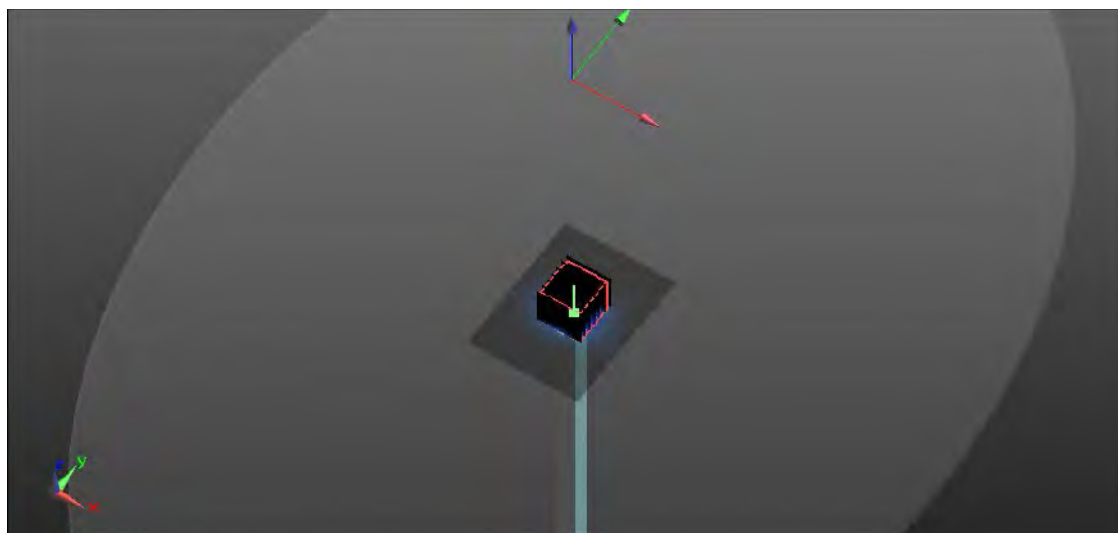

RF Exposure Lab

Plot 10

DUT: Dipole D4200V2; Type: D4200V2; Serial: D4200V2 - SN:1025

Communication System: CW; Frequency: 4200 MHz; Duty Cycle: 1:1

Medium: HSL 3-6 GHz; Medium parameters used: $f = 4200$ MHz; $\sigma = 3.68$ S/m; $\epsilon_r = 36.55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/21/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 – SN3693; ConvF(6.18, 6.18, 6.18); Calibrated: 8/28/2022;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/16/2023

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

4200 MHz Head/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.72 W/kg

4200 MHz Head/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 17.167 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.46 W/kg

Pin=10 mW

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

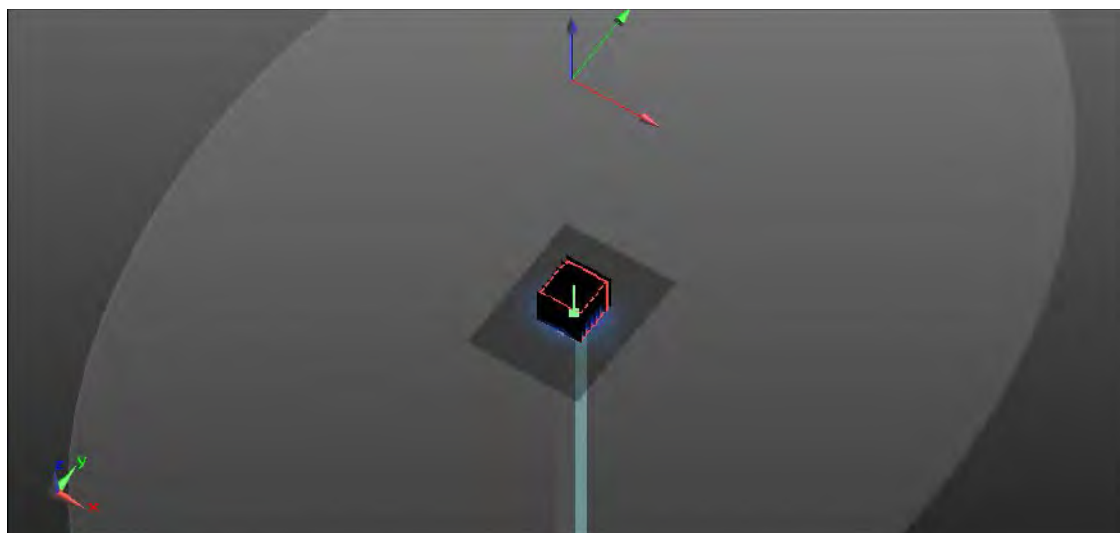

Appendix B – SAR Test Data Plots

RF Exposure Lab

Plot 1

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL835; Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 41.061$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/13/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.99, 9.99, 9.99); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n5 LTE/Ant M1 Mid 1 RB 49 Offset/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.335 W/kg

n5 LTE/Ant M1 Mid 1 RB 49 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.829 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.152 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.328 W/kg

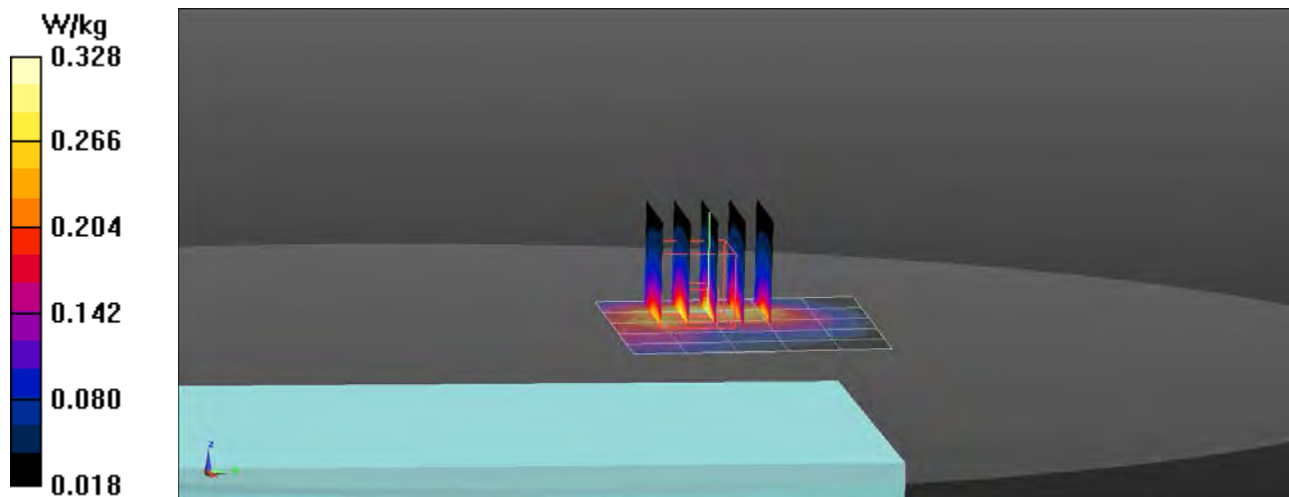

RF Exposure Lab

Plot 2

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2550; Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.895$ S/m; $\epsilon_r = 38.775$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/19/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.71, 7.71, 7.71); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n7 LTE/Ant M1 Mid 1 RB 49 Offset/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.598 W/kg

n7 LTE/Ant M1 Mid 1 RB 49 Offset/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.187 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.251 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.606 W/kg

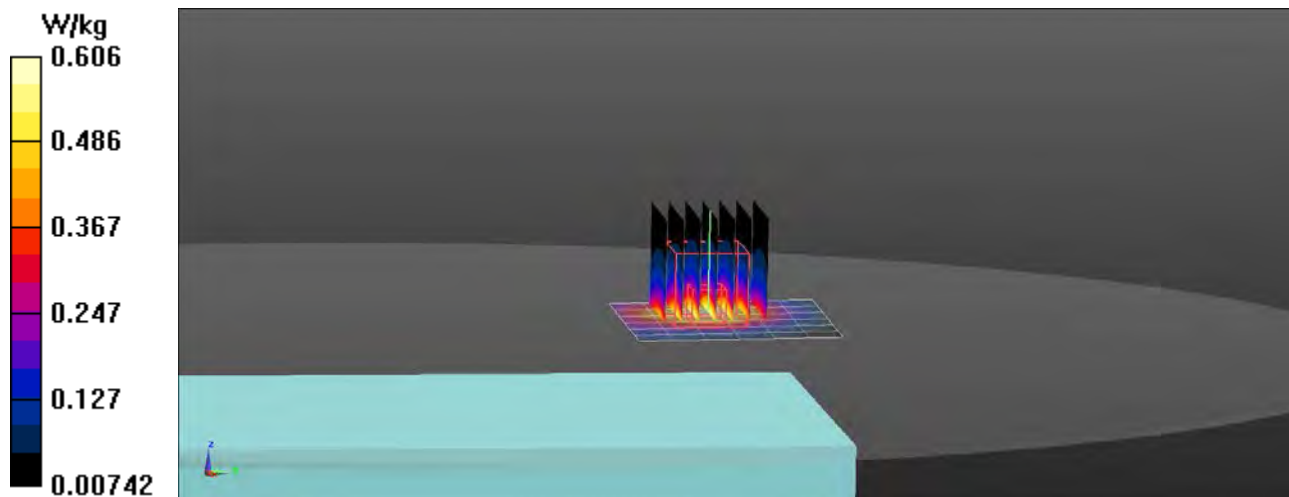

RF Exposure Lab

Plot 3

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.218$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/12/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(10.46, 10.46, 10.46); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n12 LTE/Ant M1 Mid 1 RB 37 Offset/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.357 W/kg

n12 LTE/Ant M1 Mid 1 RB 37 Offset/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.118 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.209 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.387 W/kg

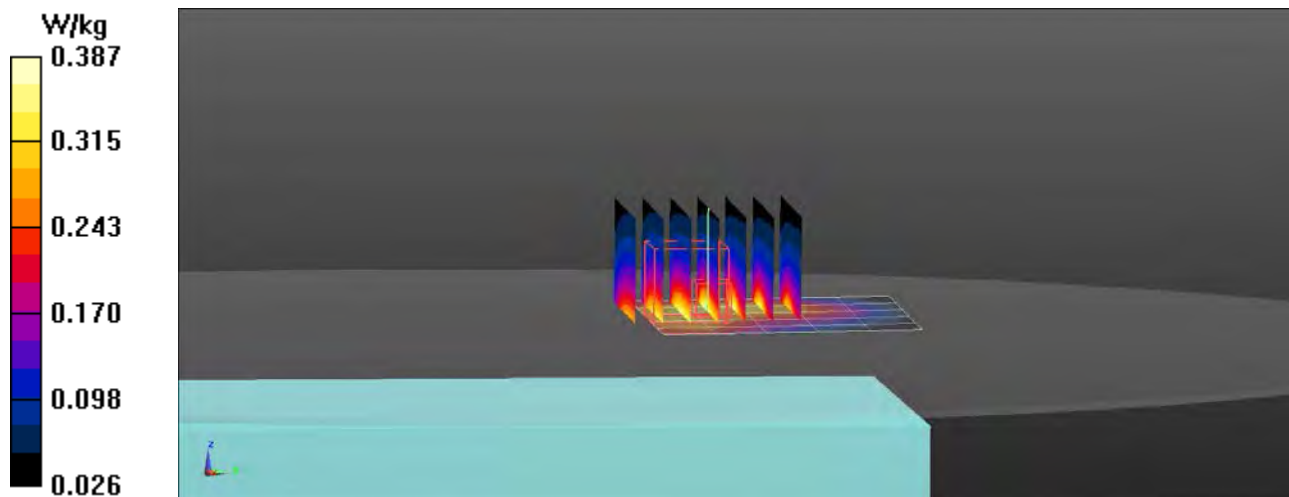

RF Exposure Lab

Plot 4

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.585$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/16/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(8.43, 8.43, 8.43); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n25 LTE/Ant M1 Mid 1 RB 49 Offset/Area Scan (5x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.547 W/kg

n25 LTE/Ant M1 Mid 1 RB 49 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 7.124 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.650 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.274 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.546 W/kg

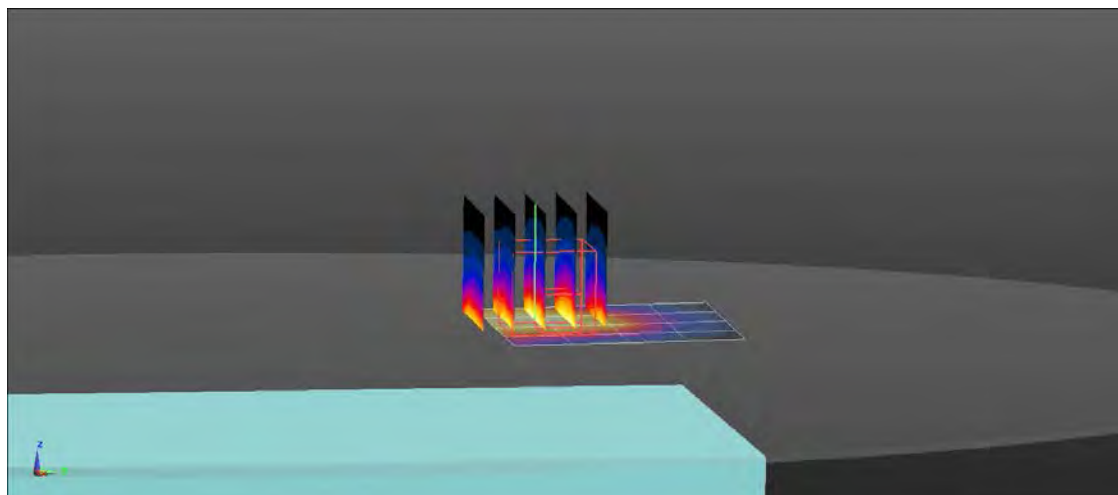

RF Exposure Lab

Plot 5

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2595 MHz; Duty Cycle: 1:1
Medium: HSL2550; Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.645$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/19/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.71, 7.71, 7.71); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n38 LTE/Ant M1 Mid 1 RB 49 Offset/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.594 W/kg

n38 LTE/Ant M1 Mid 1 RB 49 Offset/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.365 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.778 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.248 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.605 W/kg

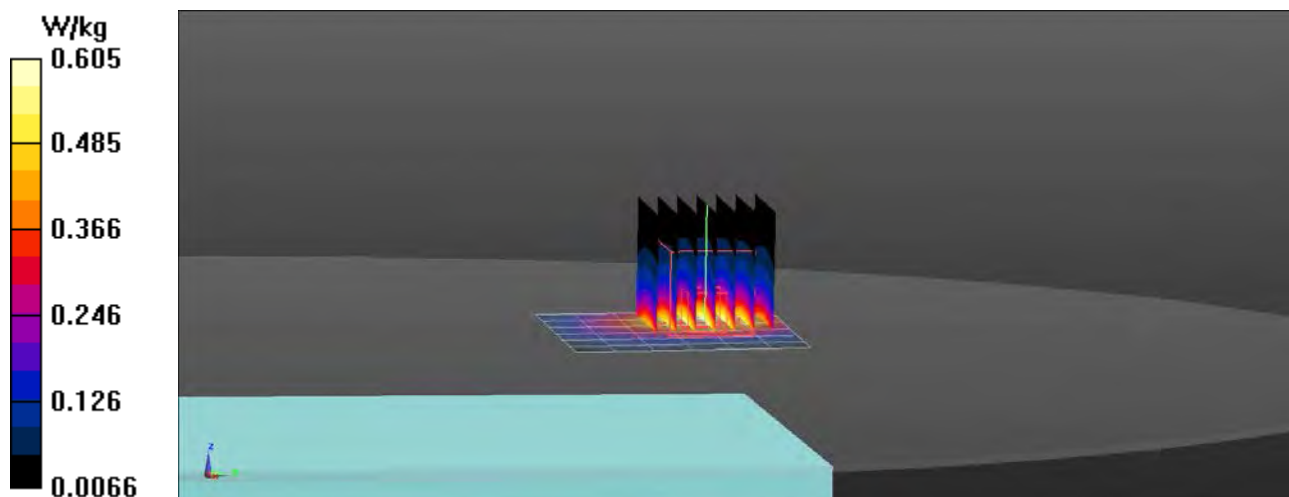

RF Exposure Lab

Plot 6

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 3625 MHz; Duty Cycle: 1:1
Medium: HSL3-6GHz; Medium parameters used (interpolated): $f = 3625$ MHz; $\sigma = 3.075$ S/m; $\epsilon_r = 37.215$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/20/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(6.95, 6.95, 6.95); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n48 LTE/Ant M1 Mid 1 RB 49 Offset/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.163 W/kg

n48 LTE/Ant M1 Mid 1 RB 49 Offset/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.053 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.175 W/kg

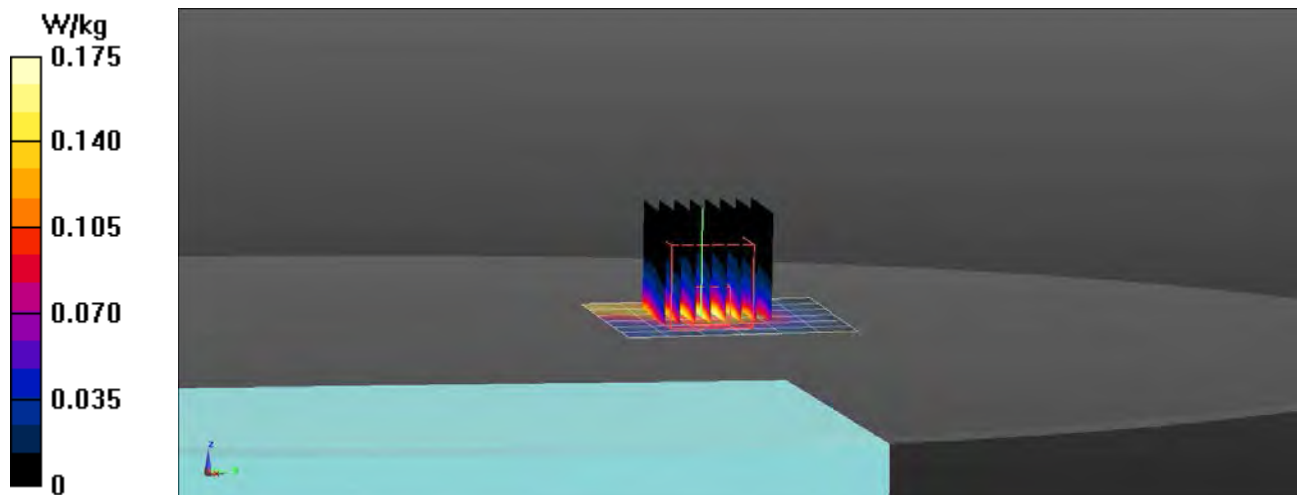

RF Exposure Lab

Plot 7

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1750; Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.065$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/15/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(8.83, 8.83, 8.83); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n66 LTE/Ant M1 Mid 1 RB 49 Offset/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.409 W/kg

n66 LTE/Ant M1 Mid 1 RB 49 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.711 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.202 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.485 W/kg

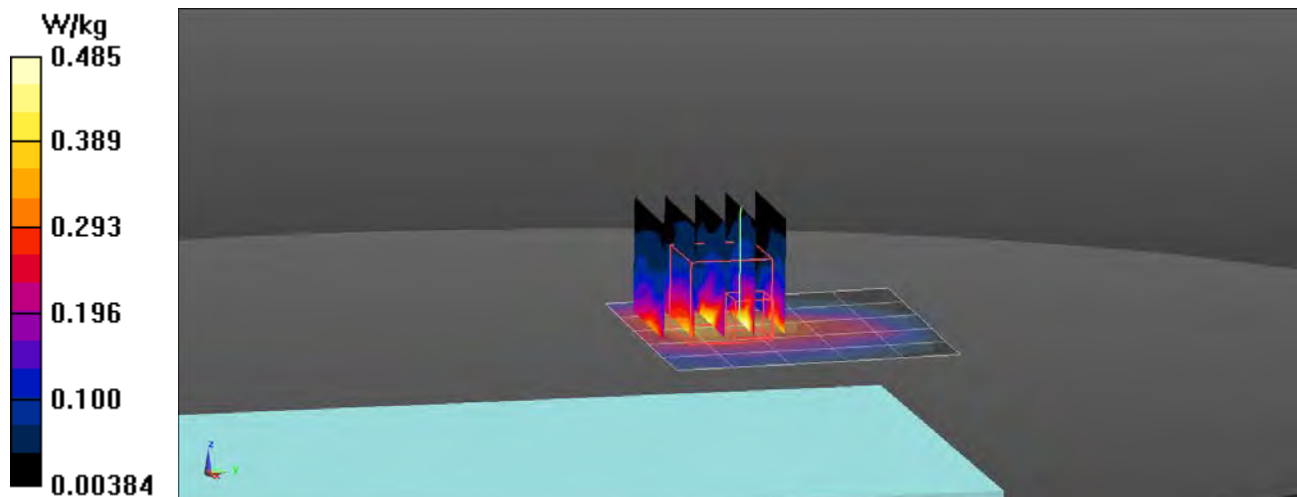

RF Exposure Lab

Plot 8

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL600; Medium parameters used (interpolated): $f = 680.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 41.377$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/12/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(10.46, 10.46, 10.46); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n71 LTE/Ant M1 Mid 1 RB 49 Offset/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.309 W/kg

n71 LTE/Ant M1 Mid 1 RB 49 Offset/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.864 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.172 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.326 W/kg

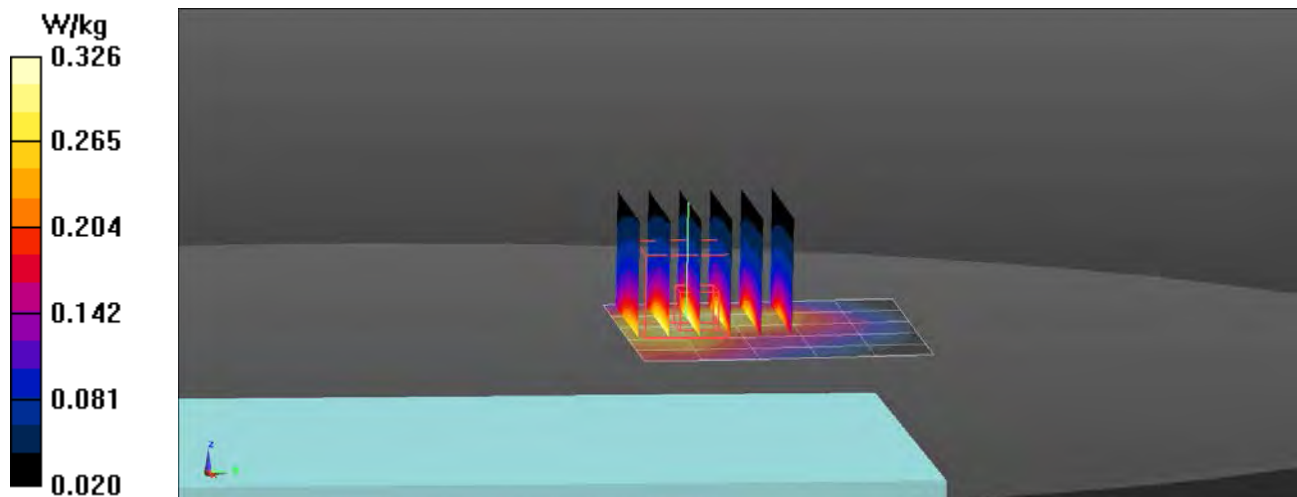

RF Exposure Lab

Plot 9

DUT: PRO360-5G; Type: Wireless TV Video Case; Serial: AVWPRO31222008399

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL3-6GHz; Medium parameters used (interpolated): $f = 3750$ MHz; $\sigma = 3.21$ S/m; $\epsilon_r = 37.07$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/20/2023; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(6.95, 6.95, 6.95); Calibrated: 8/28/2022
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/16/2022
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

n77 LTE/Ant M1 Mid 1 RB 99 Offset/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.298 W/kg

n77 LTE/Ant M1 Mid 1 RB 99 Offset/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.0542 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.339 W/kg

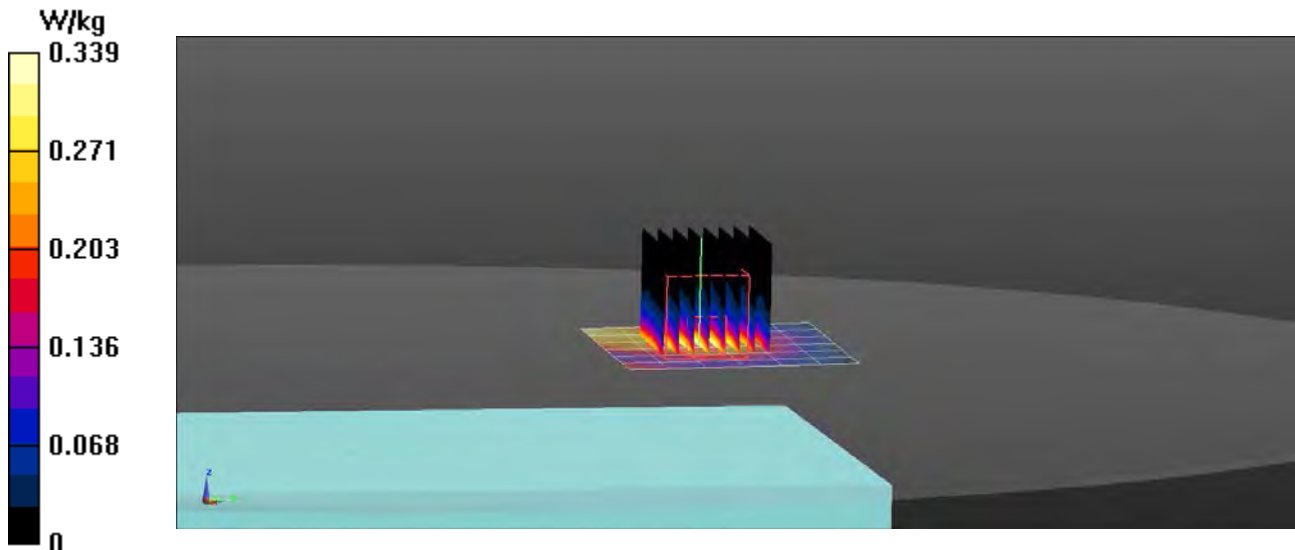

Appendix C – SAR Test Setup Photos



Test Position Back 15 mm Gap

Note: Power cable removed for testing.



Front of Device



Cable Side of Device



Tested Side of the Device with Battery Removed



Battery

Appendix D – Probe Calibration Data Sheets



Accredited by the Swiss Accreditation Service (SAS)

**The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates**
Accreditation No.: **SCS 0108**

Client

RF Exposure Lab

Certificate No

EX-3693_Aug22**CALIBRATION CERTIFICATE**Object **EX3DV4 - SN:3693**
 Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v6, QA CAL-23.v5,
 QA CAL-25.v7
 Calibration procedure for dosimetric E-field probes**
Calibration date **August 28, 2022**
 This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3) ^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
OCP DAK-3.5 (weighted)	SN: 1249	20-Oct-21 (OCP-DAK3.5-1249_Oct21)	Oct-22
OCP DAK-12	SN: 1016	20-Oct-21 (OCP-DAK12-1016_Oct21)	Oct-22
Reference 20 dB Attenuator	SN: CC2552 (20x)	04-Apr-22 (No. 217-03527)	Apr-23
DAE4	SN: 660	13-Oct-21 (No. DAE4-660_Oct21)	Oct-22
Reference Probe ES3DV2	SN: 3013	27-Dec-21 (No. ES3-3013_Dec21)	Dec-22

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

	Name	Function	Signature
Calibrated by	Jeton Kastrati	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: August 30, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108****The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates****Glossary**

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Parameters of Probe: EX3DV4 - SN:3693

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.50	0.51	0.44	$\pm 10.1\%$
DCP (mV) ^B	96.8	100.6	102.1	$\pm 4.7\%$

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B $\text{dB}\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc ^E k = 2
0	CW	X	0.00	0.00	1.00	0.00	157.5	$\pm 3.3\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		162.3		
		Z	0.00	0.00	1.00		173.8		
10352	Pulse Waveform (200Hz, 10%)	X	1.41	60.41	5.97	10.00	60.0	$\pm 3.8\%$	$\pm 9.6\%$
		Y	1.41	60.24	5.80		60.0		
		Z	1.64	61.43	6.72		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	0.78	60.00	4.53	6.99	80.0	$\pm 3.1\%$	$\pm 9.6\%$
		Y	0.84	60.00	4.65		80.0		
		Z	0.78	60.00	4.79		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	0.63	121.42	0.66	3.98	95.0	$\pm 2.3\%$	$\pm 9.6\%$
		Y	0.55	60.00	3.37		95.0		
		Z	0.01	128.58	0.01		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	0.24	159.99	0.04	2.22	120.0	$\pm 1.9\%$	$\pm 9.6\%$
		Y	0.00	153.68	44.28		120.0		
		Z	1.46	156.36	11.83		120.0		
10387	QPSK Waveform, 1 MHz	X	0.56	63.72	12.01	1.00	150.0	$\pm 4.3\%$	$\pm 9.6\%$
		Y	0.79	69.94	15.81		150.0		
		Z	0.52	65.18	12.85		150.0		
10388	QPSK Waveform, 10 MHz	X	1.46	66.67	14.46	0.00	150.0	$\pm 1.0\%$	$\pm 9.6\%$
		Y	1.59	68.83	15.76		150.0		
		Z	1.35	66.91	14.30		150.0		
10396	64-QAM Waveform, 100 kHz	X	1.50	63.12	15.74	3.01	150.0	$\pm 1.8\%$	$\pm 9.6\%$
		Y	1.77	66.13	18.52		150.0		
		Z	1.75	66.34	18.52		150.0		
10399	64-QAM Waveform, 40 MHz	X	2.93	66.43	15.36	0.00	150.0	$\pm 2.9\%$	$\pm 9.6\%$
		Y	2.92	66.89	15.72		150.0		
		Z	2.80	66.46	15.34		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	3.97	65.99	15.53	0.00	150.0	$\pm 4.8\%$	$\pm 9.6\%$
		Y	4.04	66.85	15.99		150.0		
		Z	3.92	66.75	15.78		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Linearization parameter uncertainty for maximum specified field strength.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Parameters of Probe: EX3DV4 - SN:3693

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $ms V^{-2}$	T2 $ms V^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
x	11.5	88.41	37.23	3.25	0.00	4.93	0.00	0.01	1.00
y	10.4	77.87	35.87	6.20	0.00	4.90	0.00	0.00	1.02
z	9.3	70.28	36.51	2.81	0.00	4.96	0.00	0.00	1.02

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	-146.9°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3–4 mm for an *Area Scan* job.

Parameters of Probe: EX3DV4 - SN:3693

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
13	55.0	0.75	14.97	14.97	14.97	0.00	1.00	±13.3%
30	55.0	0.75	14.21	14.21	14.21	0.00	1.00	±13.3%
750	41.9	0.89	10.46	10.46	10.46	0.43	0.80	±12.0%
900	41.5	0.97	9.99	9.99	9.99	0.36	0.86	±12.0%
1300	40.8	1.14	9.50	9.50	9.50	0.25	1.22	±12.0%
1750	40.1	1.37	8.83	8.83	8.83	0.34	0.80	±12.0%
1900	40.0	1.40	8.43	8.43	8.43	0.31	0.84	±12.0%
2300	39.5	1.67	8.24	8.24	8.24	0.33	0.90	±12.0%
2450	39.2	1.80	8.06	8.06	8.06	0.25	0.90	±12.0%
2600	39.0	1.96	7.71	7.71	7.71	0.35	0.90	±12.0%
3300	38.2	2.71	7.02	7.02	7.02	0.30	1.35	±13.1%
3500	37.9	2.91	6.98	6.98	6.98	0.30	1.35	±13.1%
3700	37.7	3.12	6.95	6.95	6.95	0.30	1.35	±13.1%
3900	37.5	3.32	6.40	6.40	6.40	0.40	1.50	±13.1%
4200	37.1	3.63	6.18	6.18	6.18	0.40	1.70	±13.1%
4600	36.7	4.04	5.99	5.99	5.99	0.40	1.70	±13.1%
4950	36.3	4.40	5.77	5.77	5.77	0.40	1.80	±13.1%
5250	35.9	4.71	5.30	5.30	5.30	0.40	1.80	±13.1%
5600	35.5	5.07	4.63	4.63	4.63	0.40	1.80	±13.1%
5750	35.4	5.22	4.70	4.70	4.70	0.40	1.80	±13.1%

^C Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–9 MHz, and ConvF assessed at 13 MHz is 9–19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.

Parameters of Probe: EX3DV4 - SN:3693**Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz)^C	Relative Permittivity^F	Conductivity^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha^G	Depth^G (mm)	Unc (k = 2)
6500	34.5	6.07	4.80	4.80	4.80	0.20	2.50	±18.6%


^C Frequency validity at 6.5 GHz is -600/+700 MHz, and ±700 MHz at or above 7 GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies 6–10 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz; below ±2% for frequencies between 3–6 GHz; and below ±4% for frequencies between 6–10 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field



(TEM-Cell:ifi110 EXX, Waveguide:R22)

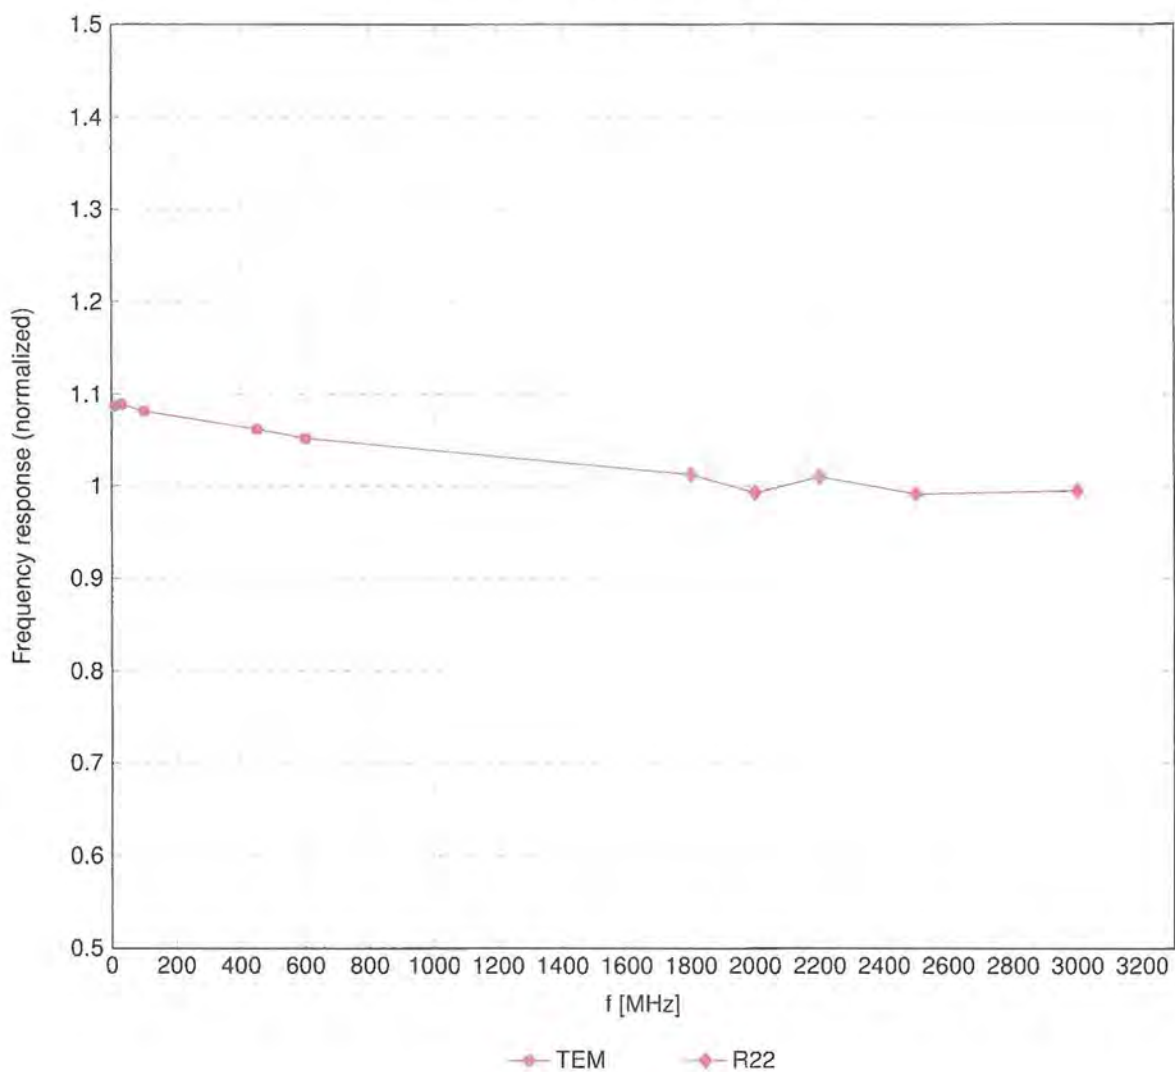


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

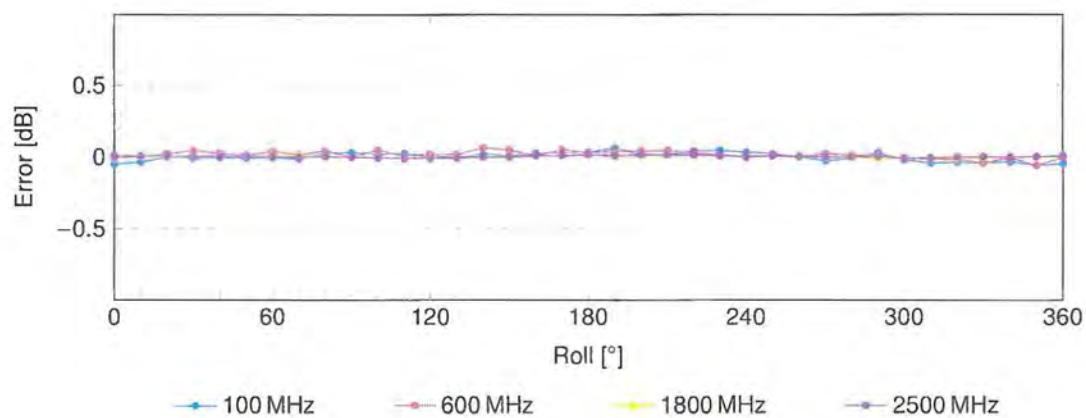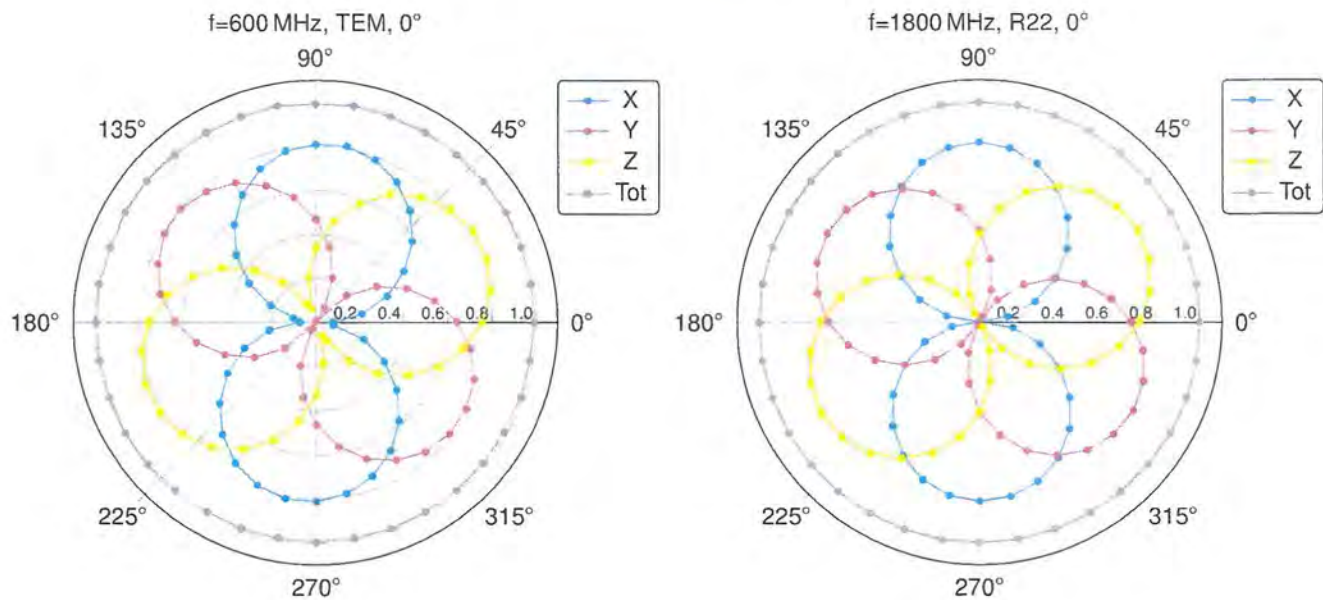Receiving Pattern (ϕ), $\vartheta = 0^\circ$ 

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

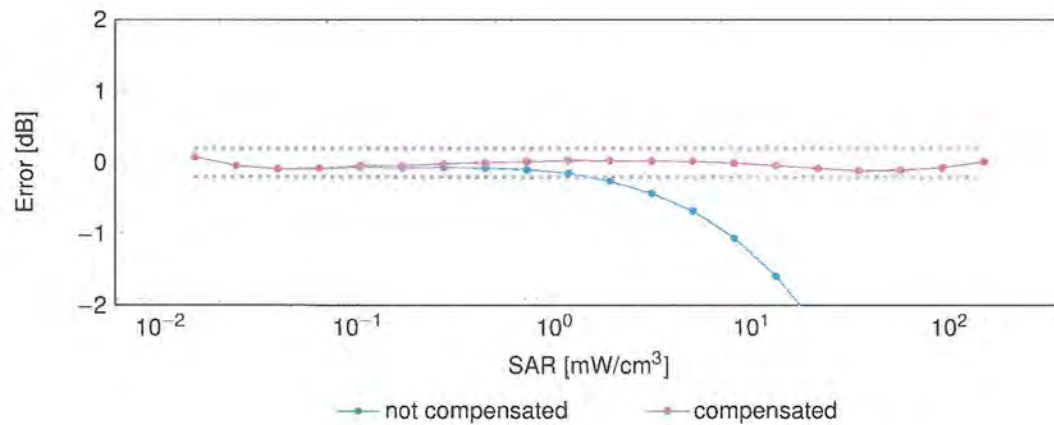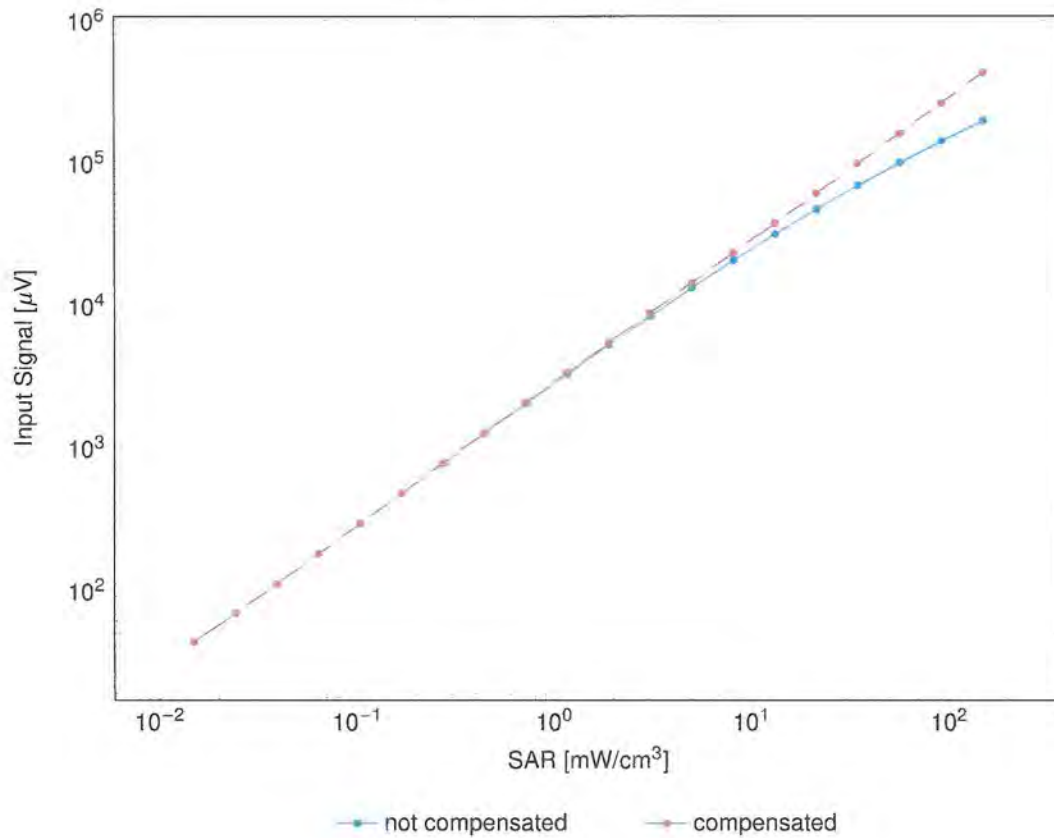
Dynamic Range f(SAR_{head})(TEM cell, $f_{\text{eval}} = 1900\text{MHz}$)Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

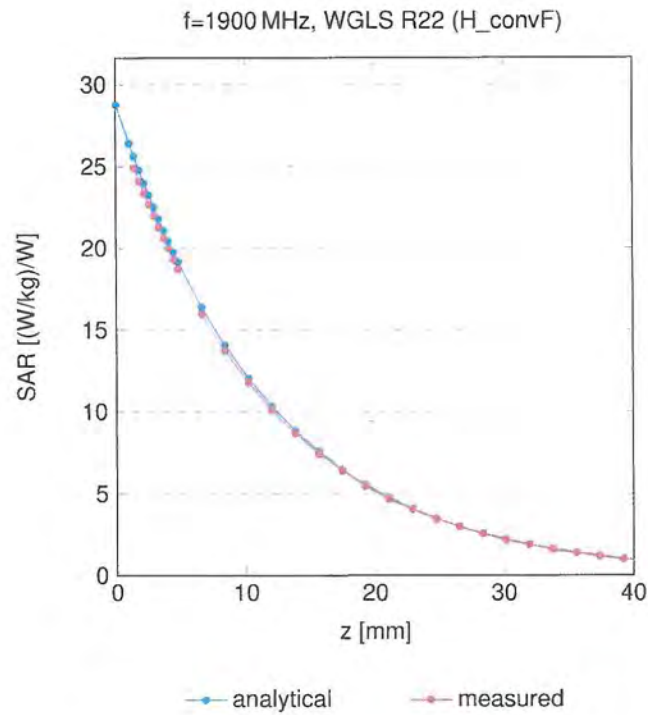

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900\text{ MHz}$

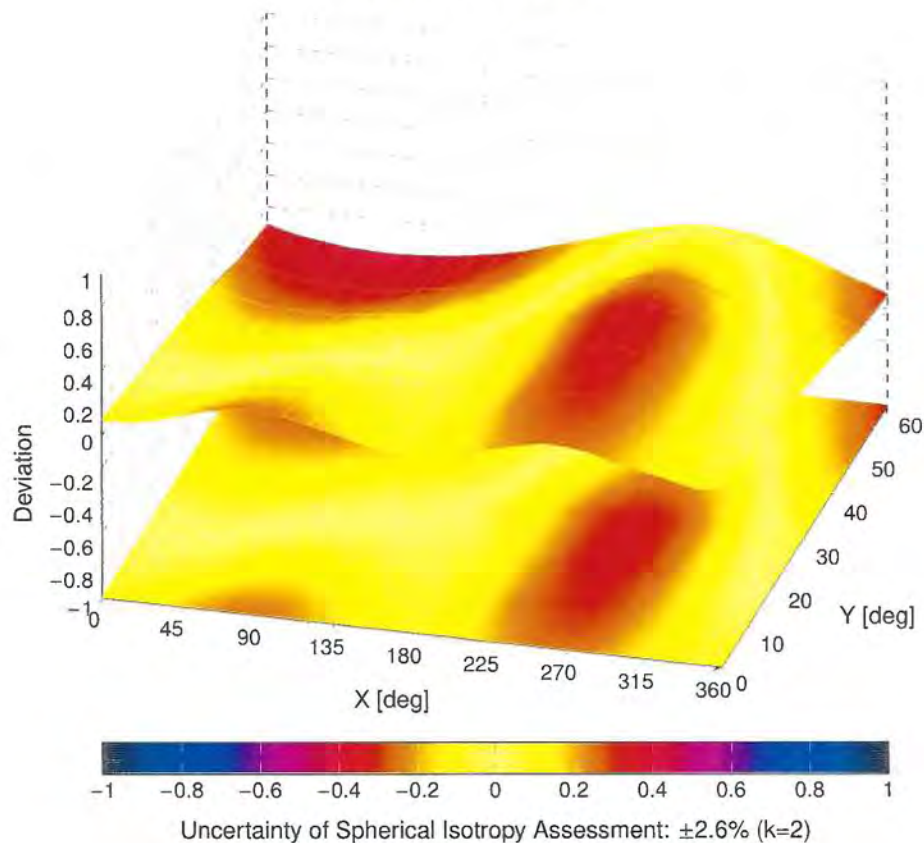

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
0		CW	CW	0.00	±4.7
10010	CAA	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.6
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.6
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9.6
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	±9.6
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.6
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	±9.6
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±9.6
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.6
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.6
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	±9.6
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	±9.6
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±9.6
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	±9.6
10098	DAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	±9.6
10099	CAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	±9.6
10100	CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	±9.6
10101	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10102	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10103	DAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	±9.6
10104	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	±9.6
10105	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	±9.6
10108	CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.6
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.6
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	±9.6
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10114	CAG	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
10115	CAG	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
10116	CAG	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
10117	CAG	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9.6
10140	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10141	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
10142	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10143	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
10144	CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	±9.6
10145	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
10146	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.6
10147	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10151	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±9.6
10152	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10153	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±9.6
10154	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
10155	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10156	CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	±9.6
10157	CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10158	CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	±9.6
10160	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±9.6
10161	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10162	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	±9.6
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	±9.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±9.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	±9.6
10169	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
10170	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10171	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
10172	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10173	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10174	CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10175	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10176	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10177	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	±9.6
10178	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10179	AAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10181	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±9.6
10182	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10183	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10184	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10185	CAI	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±9.6
10186	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±9.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10189	CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10193	CAE	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	±9.6
10194	AAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
10195	CAE	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.6
10196	CAE	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±9.6
10197	AAE	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±9.6
10198	CAF	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6
10219	CAF	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	±9.6
10220	AAF	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	±9.6
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	±9.6
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	±9.6
10223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	±9.6
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10225	CAD	UMTS-FDD (HSPA+)	WCDMA	5.97	±9.6
10226	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.6
10228	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
10229	DAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.6
10232	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10234	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10237	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.6
10238	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10240	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.6
10241	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10245	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.6
10247	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±9.6
10248	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	±9.6
10249	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±9.6
10250	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.6
10251	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.6
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	±9.6
10254	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.6
10256	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±9.6
10261	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	±9.6
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±9.6
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±9.6
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±9.6
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10266	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10267	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.6
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10269	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	±9.6
10275	CAD	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	±9.6
10277	CAD	PHS (QPSK)	PHS	11.81	±9.6
10278	CAD	PHS (QPSK, BW 884 MHz, Roll-off 0.5)	PHS	11.81	±9.6
10279	CAG	PHS (QPSK, BW 884 MHz, Roll-off 0.38)	PHS	12.18	±9.6
10290	CAG	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	±9.6
10291	CAG	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	±9.6
10292	CAG	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6
10293	CAG	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	±9.6
10295	CAG	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	±9.6
10297	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±9.6
10298	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6
10299	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±9.6
10300	CAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301	CAC	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WiMAX	12.03	±9.6
10302	CAB	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3CTRL)	WiMAX	12.57	±9.6
10303	CAB	IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	12.52	±9.6
10304	CAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	11.86	±9.6
10305	CAA	IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC)	WiMAX	15.24	±9.6
10306	CAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC)	WiMAX	14.67	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10307	AAB	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC)	WiMAX	14.49	±9.6
10308	AAB	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, PUSC)	WiMAX	14.46	±9.6
10309	AAB	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3)	WiMAX	14.58	±9.6
10310	AAB	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, AMC 2x3)	WiMAX	14.57	±9.6
10311	AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6
10313	AAD	iDEN 1.3	iDEN	10.51	±9.6
10314	AAD	iDEN 1.6	iDEN	13.48	±9.6
10315	AAD	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.71	±9.6
10316	AAD	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	±9.6
10317	AAA	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	±9.6
10352	AAA	Pulse Waveform (200 Hz, 10%)	Generic	10.00	±9.6
10353	AAA	Pulse Waveform (200 Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200 Hz, 40%)	Generic	3.98	±9.6
10355	AAA	Pulse Waveform (200 Hz, 60%)	Generic	2.22	±9.6
10356	AAA	Pulse Waveform (200 Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	±9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	±9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
10400	AAD	IEEE 802.11ac WiFi (20 MHz, 64-QAM, 99pc dc)	WLAN	8.37	±9.6
10401	AAA	IEEE 802.11ac WiFi (40 MHz, 64-QAM, 99pc dc)	WLAN	8.50	±9.6
10402	AAA	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc dc)	WLAN	8.53	±9.6
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.6
10406	AAD	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	±9.6
10417	AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	±9.6
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long)	WLAN	8.14	±9.6
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short)	WLAN	8.19	±9.6
10422	AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±9.6
10423	AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±9.6
10424	AAE	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAE	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAE	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	±9.6
10431	AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	±9.6
10432	AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10434	AAG	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	±9.6
10435	AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10447	AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	±9.6
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	±9.6
10450	AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.6
10453	AAC	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9.6
10456	AAC	IEEE 802.11ac WiFi (160 MHz, 64-QAM, 99pc dc)	WLAN	8.63	±9.6
10457	AAC	UMTS-FDD (WCDMA, AMR)	WCDMA	6.62	±9.6
10458	AAC	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±9.6
10459	AAC	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	±9.6
10460	AAC	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.6
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	±9.6
10463	AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	±9.6
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	±9.6
10467	AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6
10469	AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	±9.6
10470	AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10471	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10472	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	±9.6
10473	AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10474	AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6
10475	AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	±9.6
10477	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6
10478	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10480	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	±9.6
10481	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	±9.6
10482	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	±9.6
10483	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, Sub)	LTE-TDD	8.39	±9.6
10484	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	±9.6
10485	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.59	±9.6
10486	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	±9.6
10487	AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	±9.6
10488	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.70	±9.6
10489	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	±9.6
10490	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	±9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	±9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	±9.6
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	±9.6
10496	AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	±9.6
10497	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	±9.6
10498	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	±9.6
10500	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	±9.6
10501	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	±9.6
10502	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.52	±9.6
10503	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.72	±9.6
10504	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	±9.6
10505	AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	±9.6
10506	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10507	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	±9.6
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	±9.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.99	±9.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.49	±9.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.51	±9.6
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	±9.6
10514	AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	±9.6
10515	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	WLAN	1.58	±9.6
10516	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	±9.6
10517	AAF	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.58	±9.6
10518	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.23	±9.6
10519	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	±9.6
10520	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.12	±9.6
10521	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	7.97	±9.6
10522	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc)	WLAN	8.45	±9.6
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN	8.08	±9.6
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	8.27	±9.6
10525	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 99pc dc)	WLAN	8.36	±9.6
10526	AAF	IEEE 802.11ac WiFi (20 MHz, MCS1, 99pc dc)	WLAN	8.42	±9.6
10527	AAF	IEEE 802.11ac WiFi (20 MHz, MCS2, 99pc dc)	WLAN	8.21	±9.6
10528	AAF	IEEE 802.11ac WiFi (20 MHz, MCS3, 99pc dc)	WLAN	8.36	±9.6
10529	AAF	IEEE 802.11ac WiFi (20 MHz, MCS4, 99pc dc)	WLAN	8.36	±9.6
10531	AAF	IEEE 802.11ac WiFi (20 MHz, MCS6, 99pc dc)	WLAN	8.43	±9.6
10532	AAF	IEEE 802.11ac WiFi (20 MHz, MCS7, 99pc dc)	WLAN	8.29	±9.6
10533	AAE	IEEE 802.11ac WiFi (20 MHz, MCS8, 99pc dc)	WLAN	8.38	±9.6
10534	AAE	IEEE 802.11ac WiFi (40 MHz, MCS0, 99pc dc)	WLAN	8.45	±9.6
10535	AAE	IEEE 802.11ac WiFi (40 MHz, MCS1, 99pc dc)	WLAN	8.45	±9.6
10536	AAF	IEEE 802.11ac WiFi (40 MHz, MCS2, 99pc dc)	WLAN	8.32	±9.6
10537	AAF	IEEE 802.11ac WiFi (40 MHz, MCS3, 99pc dc)	WLAN	8.44	±9.6
10538	AAF	IEEE 802.11ac WiFi (40 MHz, MCS4, 99pc dc)	WLAN	8.54	±9.6
10540	AAA	IEEE 802.11ac WiFi (40 MHz, MCS6, 99pc dc)	WLAN	8.39	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10541	AAA	IEEE 802.11ac WiFi (40 MHz, MCS7, 99pc dc)	WLAN	8.46	±9.6
10542	AAA	IEEE 802.11ac WiFi (40 MHz, MCS8, 99pc dc)	WLAN	8.65	±9.6
10543	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 99pc dc)	WLAN	8.65	±9.6
10544	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 99pc dc)	WLAN	8.47	±9.6
10545	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 99pc dc)	WLAN	8.55	±9.6
10546	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 99pc dc)	WLAN	8.35	±9.6
10547	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 99pc dc)	WLAN	8.49	±9.6
10548	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 99pc dc)	WLAN	8.37	±9.6
10550	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 99pc dc)	WLAN	8.38	±9.6
10551	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 99pc dc)	WLAN	8.50	±9.6
10552	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 99pc dc)	WLAN	8.42	±9.6
10553	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 99pc dc)	WLAN	8.45	±9.6
10554	AAC	IEEE 802.11ac WiFi (160 MHz, MCS0, 99pc dc)	WLAN	8.48	±9.6
10555	AAC	IEEE 802.11ac WiFi (160 MHz, MCS1, 99pc dc)	WLAN	8.47	±9.6
10556	AAC	IEEE 802.11ac WiFi (160 MHz, MCS2, 99pc dc)	WLAN	8.50	±9.6
10557	AAC	IEEE 802.11ac WiFi (160 MHz, MCS3, 99pc dc)	WLAN	8.52	±9.6
10558	AAC	IEEE 802.11ac WiFi (160 MHz, MCS4, 99pc dc)	WLAN	8.61	±9.6
10560	AAC	IEEE 802.11ac WiFi (160 MHz, MCS6, 99pc dc)	WLAN	8.73	±9.6
10561	AAC	IEEE 802.11ac WiFi (160 MHz, MCS7, 99pc dc)	WLAN	8.56	±9.6
10562	AAC	IEEE 802.11ac WiFi (160 MHz, MCS8, 99pc dc)	WLAN	8.69	±9.6
10563	AAC	IEEE 802.11ac WiFi (160 MHz, MCS9, 99pc dc)	WLAN	8.77	±9.6
10564	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.25	±9.6
10565	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.45	±9.6
10566	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc)	WLAN	8.13	±9.6
10567	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc)	WLAN	8.00	±9.6
10568	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc)	WLAN	8.37	±9.6
10569	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc)	WLAN	8.10	±9.6
10570	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc)	WLAN	8.30	±9.6
10571	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc dc)	WLAN	1.99	±9.6
10572	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc dc)	WLAN	1.99	±9.6
10573	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc dc)	WLAN	1.98	±9.6
10574	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc dc)	WLAN	1.98	±9.6
10575	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	±9.6
10576	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	±9.6
10577	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	±9.6
10578	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	±9.6
10579	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	±9.6
10580	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	±9.6
10581	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	±9.6
10582	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	±9.6
10583	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	±9.6
10584	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	±9.6
10585	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	±9.6
10586	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	±9.6
10587	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	±9.6
10588	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	±9.6
10589	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	±9.6
10590	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	±9.6
10591	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc dc)	WLAN	8.63	±9.6
10592	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc dc)	WLAN	8.79	±9.6
10593	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc dc)	WLAN	8.64	±9.6
10594	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc dc)	WLAN	8.74	±9.6
10595	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS4, 90pc dc)	WLAN	8.74	±9.6
10596	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc dc)	WLAN	8.71	±9.6
10597	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc dc)	WLAN	8.72	±9.6
10598	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc dc)	WLAN	8.50	±9.6
10599	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc dc)	WLAN	8.79	±9.6
10600	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc dc)	WLAN	8.88	±9.6
10601	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc dc)	WLAN	8.82	±9.6
10602	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS3, 90pc dc)	WLAN	8.94	±9.6
10603	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc dc)	WLAN	9.03	±9.6
10604	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS5, 90pc dc)	WLAN	8.76	±9.6
10605	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc dc)	WLAN	8.97	±9.6
10606	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS7, 90pc dc)	WLAN	8.82	±9.6
10607	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 90pc dc)	WLAN	8.64	±9.6
10608	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc dc)	WLAN	8.77	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10609	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc dc)	WLAN	8.57	±9.6
10610	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc dc)	WLAN	8.78	±9.6
10611	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc dc)	WLAN	8.70	±9.6
10612	AAC	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc dc)	WLAN	8.77	±9.6
10613	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc dc)	WLAN	8.94	±9.6
10614	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc dc)	WLAN	8.59	±9.6
10615	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc dc)	WLAN	8.82	±9.6
10616	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 90pc dc)	WLAN	8.82	±9.6
10617	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc dc)	WLAN	8.81	±9.6
10618	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc dc)	WLAN	8.58	±9.6
10619	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 90pc dc)	WLAN	8.86	±9.6
10620	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc dc)	WLAN	8.87	±9.6
10621	AAC	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc dc)	WLAN	8.77	±9.6
10622	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc dc)	WLAN	8.68	±9.6
10623	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc dc)	WLAN	8.82	±9.6
10624	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 90pc dc)	WLAN	8.96	±9.6
10625	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 90pc dc)	WLAN	8.96	±9.6
10626	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 90pc dc)	WLAN	8.83	±9.6
10627	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 90pc dc)	WLAN	8.88	±9.6
10628	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 90pc dc)	WLAN	8.71	±9.6
10629	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc dc)	WLAN	8.85	±9.6
10630	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 90pc dc)	WLAN	8.72	±9.6
10631	AAC	IEEE 802.11ac WiFi (80 MHz, MCS5, 90pc dc)	WLAN	8.81	±9.6
10632	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc dc)	WLAN	8.74	±9.6
10633	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 90pc dc)	WLAN	8.83	±9.6
10634	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 90pc dc)	WLAN	8.80	±9.6
10635	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 90pc dc)	WLAN	8.81	±9.6
10636	AAC	IEEE 802.11ac WiFi (160 MHz, MCS0, 90pc dc)	WLAN	8.83	±9.6
10637	AAC	IEEE 802.11ac WiFi (160 MHz, MCS1, 90pc dc)	WLAN	8.79	±9.6
10638	AAC	IEEE 802.11ac WiFi (160 MHz, MCS2, 90pc dc)	WLAN	8.86	±9.6
10639	AAC	IEEE 802.11ac WiFi (160 MHz, MCS3, 90pc dc)	WLAN	8.85	±9.6
10640	AAC	IEEE 802.11ac WiFi (160 MHz, MCS4, 90pc dc)	WLAN	8.98	±9.6
10641	AAC	IEEE 802.11ac WiFi (160 MHz, MCS5, 90pc dc)	WLAN	9.06	±9.6
10642	AAC	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc dc)	WLAN	9.06	±9.6
10643	AAC	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc dc)	WLAN	8.89	±9.6
10644	AAC	IEEE 802.11ac WiFi (160 MHz, MCS8, 90pc dc)	WLAN	9.05	±9.6
10645	AAC	IEEE 802.11ac WiFi (160 MHz, MCS9, 90pc dc)	WLAN	9.11	±9.6
10646	AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	±9.6
10647	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	±9.6
10648	AAC	CDMA2000 (1x Advanced)	CDMA2000	3.45	±9.6
10652	AAC	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	±9.6
10653	AAC	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	±9.6
10654	AAC	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	±9.6
10655	AAC	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	±9.6
10658	AAC	Pulse Waveform (200 Hz, 10%)	Test	10.00	±9.6
10659	AAC	Pulse Waveform (200 Hz, 20%)	Test	6.99	±9.6
10660	AAC	Pulse Waveform (200 Hz, 40%)	Test	3.98	±9.6
10661	AAC	Pulse Waveform (200 Hz, 60%)	Test	2.22	±9.6
10662	AAC	Pulse Waveform (200 Hz, 80%)	Test	0.97	±9.6
10670	AAC	Bluetooth Low Energy	Bluetooth	2.19	±9.6
10671	AAD	IEEE 802.11ax (20 MHz, MCS0, 90pc dc)	WLAN	9.09	±9.6
10672	AAD	IEEE 802.11ax (20 MHz, MCS1, 90pc dc)	WLAN	8.57	±9.6
10673	AAD	IEEE 802.11ax (20 MHz, MCS2, 90pc dc)	WLAN	8.78	±9.6
10674	AAD	IEEE 802.11ax (20 MHz, MCS3, 90pc dc)	WLAN	8.74	±9.6
10675	AAD	IEEE 802.11ax (20 MHz, MCS4, 90pc dc)	WLAN	8.90	±9.6
10676	AAD	IEEE 802.11ax (20 MHz, MCS5, 90pc dc)	WLAN	8.77	±9.6
10677	AAD	IEEE 802.11ax (20 MHz, MCS6, 90pc dc)	WLAN	8.73	±9.6
10678	AAD	IEEE 802.11ax (20 MHz, MCS7, 90pc dc)	WLAN	8.78	±9.6
10679	AAD	IEEE 802.11ax (20 MHz, MCS8, 90pc dc)	WLAN	8.89	±9.6
10680	AAD	IEEE 802.11ax (20 MHz, MCS9, 90pc dc)	WLAN	8.80	±9.6
10681	AAG	IEEE 802.11ax (20 MHz, MCS10, 90pc dc)	WLAN	8.62	±9.6
10682	AAF	IEEE 802.11ax (20 MHz, MCS11, 90pc dc)	WLAN	8.83	±9.6
10683	AAA	IEEE 802.11ax (20 MHz, MCS0, 99pc dc)	WLAN	8.42	±9.6
10684	AAC	IEEE 802.11ax (20 MHz, MCS1, 99pc dc)	WLAN	8.26	±9.6
10685	AAC	IEEE 802.11ax (20 MHz, MCS2, 99pc dc)	WLAN	8.33	±9.6
10686	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc dc)	WLAN	8.28	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10687	AAE	IEEE 802.11ax (20 MHz, MCS4, 99pc dc)	WLAN	8.45	±9.6
10688	AAE	IEEE 802.11ax (20 MHz, MCS5, 99pc dc)	WLAN	8.29	±9.6
10689	AAD	IEEE 802.11ax (20 MHz, MCS6, 99pc dc)	WLAN	8.55	±9.6
10690	AAE	IEEE 802.11ax (20 MHz, MCS7, 99pc dc)	WLAN	8.29	±9.6
10691	AAB	IEEE 802.11ax (20 MHz, MCS8, 99pc dc)	WLAN	8.25	±9.6
10692	AAA	IEEE 802.11ax (20 MHz, MCS9, 99pc dc)	WLAN	8.29	±9.6
10693	AAA	IEEE 802.11ax (20 MHz, MCS10, 99pc dc)	WLAN	8.25	±9.6
10694	AAA	IEEE 802.11ax (20 MHz, MCS11, 99pc dc)	WLAN	8.57	±9.6
10695	AAA	IEEE 802.11ax (40 MHz, MCS0, 90pc dc)	WLAN	8.78	±9.6
10696	AAA	IEEE 802.11ax (40 MHz, MCS1, 90pc dc)	WLAN	8.91	±9.6
10697	AAA	IEEE 802.11ax (40 MHz, MCS2, 90pc dc)	WLAN	8.61	±9.6
10698	AAA	IEEE 802.11ax (40 MHz, MCS3, 90pc dc)	WLAN	8.89	±9.6
10699	AAA	IEEE 802.11ax (40 MHz, MCS4, 90pc dc)	WLAN	8.82	±9.6
10700	AAA	IEEE 802.11ax (40 MHz, MCS5, 90pc dc)	WLAN	8.73	±9.6
10701	AAA	IEEE 802.11ax (40 MHz, MCS6, 90pc dc)	WLAN	8.86	±9.6
10702	AAA	IEEE 802.11ax (40 MHz, MCS7, 90pc dc)	WLAN	8.70	±9.6
10703	AAA	IEEE 802.11ax (40 MHz, MCS8, 90pc dc)	WLAN	8.82	±9.6
10704	AAA	IEEE 802.11ax (40 MHz, MCS9, 90pc dc)	WLAN	8.56	±9.6
10705	AAA	IEEE 802.11ax (40 MHz, MCS10, 90pc dc)	WLAN	8.69	±9.6
10706	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc dc)	WLAN	8.66	±9.6
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 99pc dc)	WLAN	8.32	±9.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 99pc dc)	WLAN	8.55	±9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc dc)	WLAN	8.33	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc dc)	WLAN	8.29	±9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc dc)	WLAN	8.39	±9.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS5, 99pc dc)	WLAN	8.67	±9.6
10713	AAC	IEEE 802.11ax (40 MHz, MCS6, 99pc dc)	WLAN	8.33	±9.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 99pc dc)	WLAN	8.26	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc dc)	WLAN	8.45	±9.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc dc)	WLAN	8.30	±9.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc dc)	WLAN	8.48	±9.6
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc dc)	WLAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc dc)	WLAN	8.81	±9.6
10720	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc dc)	WLAN	8.87	±9.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc dc)	WLAN	8.76	±9.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc dc)	WLAN	8.55	±9.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc dc)	WLAN	8.70	±9.6
10724	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc dc)	WLAN	8.90	±9.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc dc)	WLAN	8.74	±9.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc dc)	WLAN	8.72	±9.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc dc)	WLAN	8.66	±9.6
10728	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc dc)	WLAN	8.65	±9.6
10729	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc dc)	WLAN	8.64	±9.6
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc dc)	WLAN	8.67	±9.6
10731	AAC	IEEE 802.11ax (80 MHz, MCS0, 99pc dc)	WLAN	8.42	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, 99pc dc)	WLAN	8.46	±9.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS2, 99pc dc)	WLAN	8.40	±9.6
10734	AAC	IEEE 802.11ax (80 MHz, MCS3, 99pc dc)	WLAN	8.25	±9.6
10735	AAC	IEEE 802.11ax (80 MHz, MCS4, 99pc dc)	WLAN	8.33	±9.6
10736	AAC	IEEE 802.11ax (80 MHz, MCS5, 99pc dc)	WLAN	8.27	±9.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 99pc dc)	WLAN	8.36	±9.6
10738	AAC	IEEE 802.11ax (80 MHz, MCS7, 99pc dc)	WLAN	8.42	±9.6
10739	AAC	IEEE 802.11ax (80 MHz, MCS8, 99pc dc)	WLAN	8.29	±9.6
10740	AAC	IEEE 802.11ax (80 MHz, MCS9, 99pc dc)	WLAN	8.48	±9.6
10741	AAC	IEEE 802.11ax (80 MHz, MCS10, 99pc dc)	WLAN	8.40	±9.6
10742	AAC	IEEE 802.11ax (80 MHz, MCS11, 99pc dc)	WLAN	8.43	±9.6
10743	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc dc)	WLAN	8.94	±9.6
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc dc)	WLAN	9.16	±9.6
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc dc)	WLAN	8.93	±9.6
10746	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc dc)	WLAN	9.11	±9.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc dc)	WLAN	9.04	±9.6
10748	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc dc)	WLAN	8.93	±9.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc dc)	WLAN	8.90	±9.6
10750	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc dc)	WLAN	8.79	±9.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc dc)	WLAN	8.82	±9.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc dc)	WLAN	8.81	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10753	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc dc)	WLAN	9.00	±9.6
10754	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc dc)	WLAN	8.94	±9.6
10755	AAC	IEEE 802.11ax (160 MHz, MCS0, 99pc dc)	WLAN	8.64	±9.6
10756	AAC	IEEE 802.11ax (160 MHz, MCS1, 99pc dc)	WLAN	8.77	±9.6
10757	AAC	IEEE 802.11ax (160 MHz, MCS2, 99pc dc)	WLAN	8.77	±9.6
10758	AAC	IEEE 802.11ax (160 MHz, MCS3, 99pc dc)	WLAN	8.69	±9.6
10759	AAC	IEEE 802.11ax (160 MHz, MCS4, 99pc dc)	WLAN	8.58	±9.6
10760	AAC	IEEE 802.11ax (160 MHz, MCS5, 99pc dc)	WLAN	8.49	±9.6
10761	AAC	IEEE 802.11ax (160 MHz, MCS6, 99pc dc)	WLAN	8.53	±9.6
10762	AAC	IEEE 802.11ax (160 MHz, MCS7, 99pc dc)	WLAN	8.49	±9.6
10763	AAC	IEEE 802.11ax (160 MHz, MCS8, 99pc dc)	WLAN	8.53	±9.6
10764	AAC	IEEE 802.11ax (160 MHz, MCS9, 99pc dc)	WLAN	8.54	±9.6
10765	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc dc)	WLAN	8.54	±9.6
10766	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc dc)	WLAN	8.51	±9.6
10767	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	±9.6
10768	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10769	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10770	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10771	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10772	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±9.6
10773	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	±9.6
10774	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10775	AAC	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10776	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10778	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±9.6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±9.6
10780	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10781	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10782	AAC	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	±9.6
10783	AAC	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10784	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	±9.6
10785	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6
10786	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±9.6
10787	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	±9.6
10788	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10789	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	±9.6
10790	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10791	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	±9.6
10792	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	±9.6
10793	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.6
10794	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10795	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±9.6
10796	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10797	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	±9.6
10798	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10799	AAC	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10801	AAC	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10802	AAC	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	±9.6
10803	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9.6
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10817	AAD	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	±9.6
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	±9.6
10821	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10823	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	±9.6
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9.6
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	±9.6
10828	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E $k = 2$
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	±9.6
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	±9.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	±9.6
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±9.6
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	±9.6
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10836	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±9.6
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±9.6
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9.6
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.6
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	±9.6
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	±9.6
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	±9.6
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10864	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	±9.6
10869	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10870	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	±9.6
10871	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10872	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	±9.6
10873	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10874	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10875	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10876	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	±9.6
10877	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	±9.6
10878	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10879	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	±9.6
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	±9.6
10881	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10882	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	±9.6
10883	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	±9.6
10884	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10886	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10887	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10888	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	±9.6
10889	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	±9.6
10890	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	±9.6
10891	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	±9.6
10892	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10897	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	±9.6
10898	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10899	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10900	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10901	AAD	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10902	AAD	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10903	AAD	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10904	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10905	AAD	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10906	AAD	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10907	AAD	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6
10908	AAD	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10909	AAD	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.6
10910	AAD	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^b k = 2
10911	AAD	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10912	AAD	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10913	AAD	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10914	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
10915	AAD	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6
10916	AAD	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10917	AAD	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10918	AAD	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10919	AAD	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10920	AAD	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10921	AAD	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10922	AAD	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6
10923	AAD	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10924	AAD	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10925	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	±9.6
10926	AAD	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10927	AAD	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10928	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10929	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10930	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10931	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10932	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10933	AAA	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10934	AAA	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10935	AAA	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10937	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6
10938	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10939	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±9.6
10940	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6
10941	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10942	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10943	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	±9.6
10944	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±9.6
10945	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10947	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10948	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10949	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10950	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10951	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6
10952	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	±9.6
10953	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.6
10954	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	±9.6
10955	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6
10956	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	±9.6
10957	AAC	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	±9.6
10958	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	±9.6
10959	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	±9.6
10960	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	±9.6
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	±9.6
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	±9.6
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	±9.6
10964	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	±9.6
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	±9.6
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	±9.6
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	±9.6
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	±9.6
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	±9.6
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	±9.6
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	±9.6
10978	AAA	ULLA BDR	ULLA	2.23	±9.6
10979	AAA	ULLA HDR4	ULLA	7.02	±9.6
10980	AAA	ULLA HDR8	ULLA	8.82	±9.6
10981	AAA	ULLA HDRp4	ULLA	1.50	±9.6
10982	AAA	ULLA HDRp8	ULLA	1.44	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E $k = 2$
10983	AAA	5G NR DL (CP-OFDM, TM 3.1, 40MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	±9.6
10984	AAA	5G NR DL (CP-OFDM, TM 3.1, 50MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	±9.6
10985	AAA	5G NR DL (CP-OFDM, TM 3.1, 40MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.54	±9.6
10986	AAA	5G NR DL (CP-OFDM, TM 3.1, 50MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	±9.6
10987	AAA	5G NR DL (CP-OFDM, TM 3.1, 60MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.53	±9.6
10988	AAA	5G NR DL (CP-OFDM, TM 3.1, 70MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	±9.6
10989	AAA	5G NR DL (CP-OFDM, TM 3.1, 80MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	±9.6
10990	AAA	5G NR DL (CP-OFDM, TM 3.1, 90MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	±9.6

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Appendix E – Dipole Calibration Data Sheets

gm

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D750V3-1053_Jun21**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1053**

Calibration procedure(s) **QA CAL-05.v11**
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date: **June 04, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Michael Weber** Name: **Michael Weber** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	42.7 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.57 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.58 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.5 Ω + 0.1 j Ω
Return Loss	- 24.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D750V3 SN: 1053 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
6/4/2021	-24.3		56.5		0.1	
6/4/2022	-26.2	7.8	57.9	1.4	0.3	0.2
6/6/2023	-25.6	5.3	55.2	-1.3	0.4	0.3

DASY5 Validation Report for Head TSL

Date: 04.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1053

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.11, 10.11, 10.11) @ 750 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.74 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.30 W/kg

SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.41 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 30\text{mm}$)


Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 2.93 W/kg

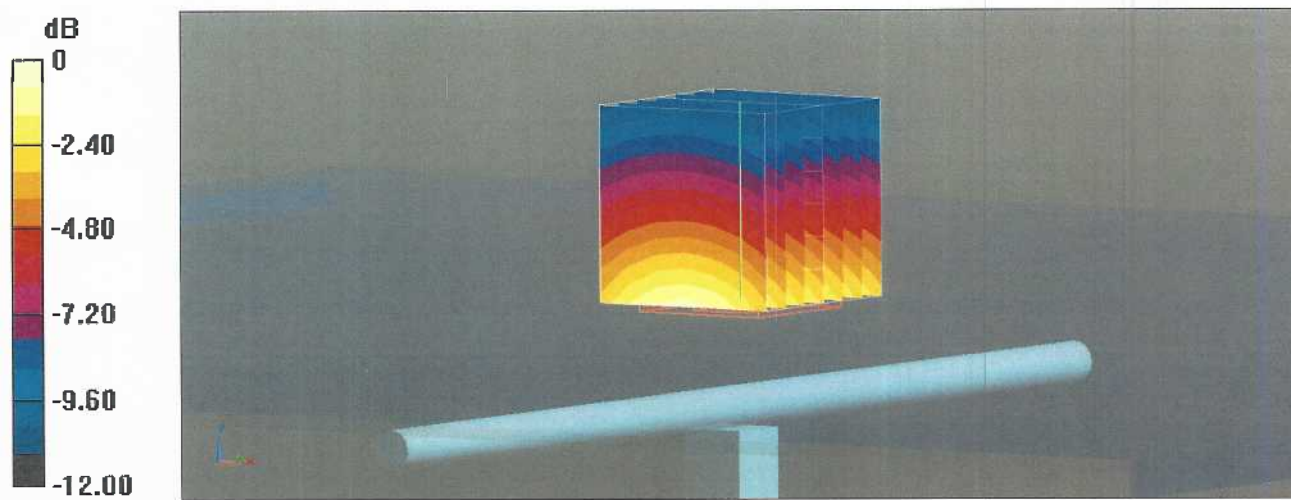

0 dB = 2.93 W/kg = 4.67 dBW/kg

Impedance Measurement Plot for Head TSL

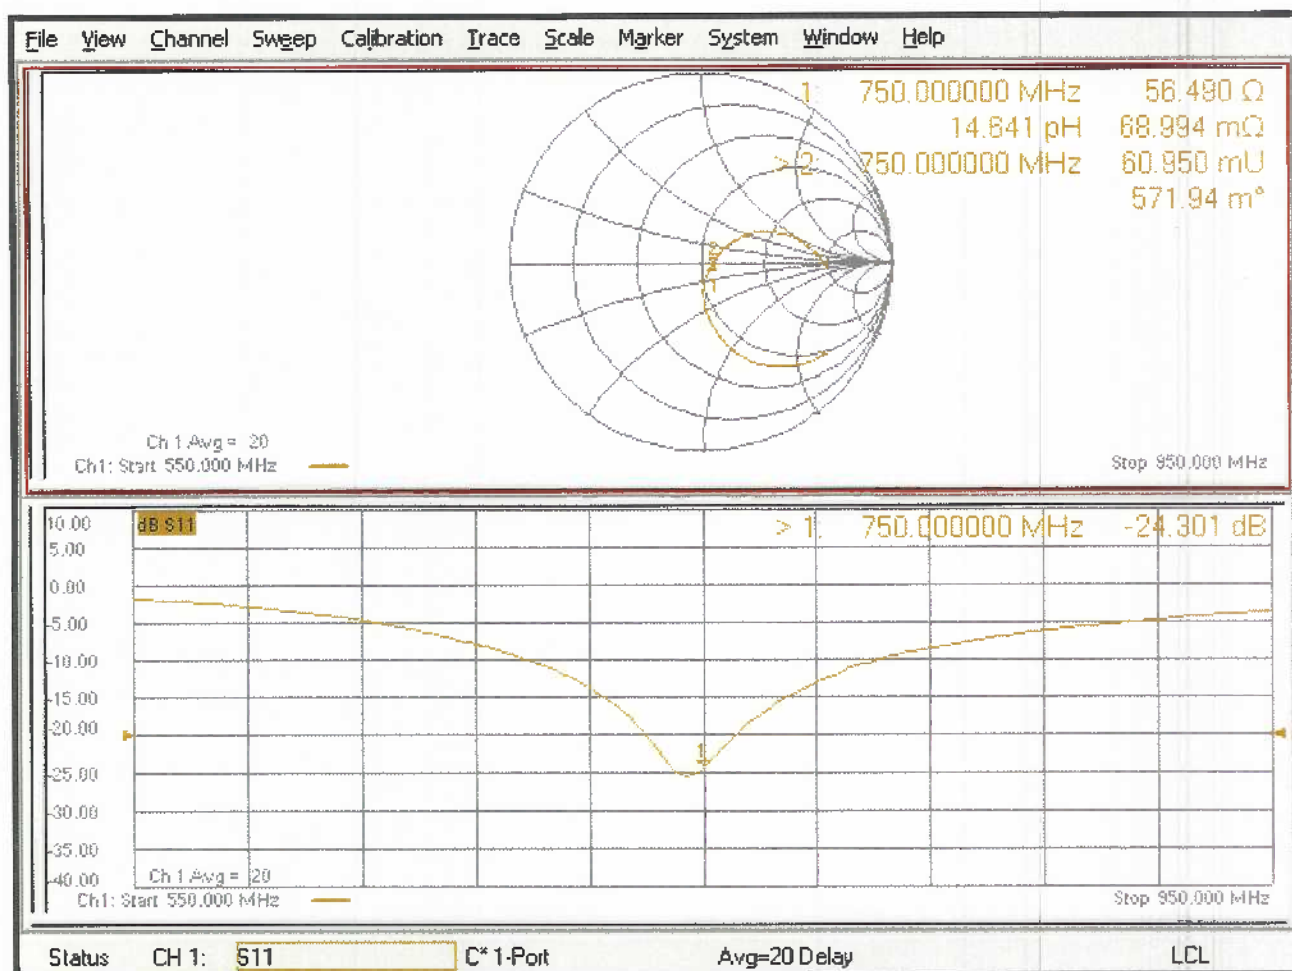

gm

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **D900V2-1d128_Jun21**

CALIBRATION CERTIFICATE

Object **D900V2 - SN:1d128**

Calibration procedure(s) **QA CAL-05.v11**
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date: **June 04, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Michael Weber** *[Signature]* **Laboratory Technician**

Approved by: **Katja Pokovic** *[Signature]* **Technical Manager**

Signature
[Signature]
[Signature]

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	42.3 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	11.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.77 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.14 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 Ω - 0.6 j Ω
Return Loss	- 38.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.412 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D900V2 SN: 1d128 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
6/4/2021	-38.5		51.0		-0.6	
6/4/2022	-37.2	-3.4	52.3	1.3	-0.8	-0.2
6/6/2023	-36.8	-4.4	52.9	1.9	-0.7	-0.1

DASY5 Validation Report for Head TSL

Date: 04.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:1d128

Communication System: UID 0 - CW; Frequency: 900 MHz

Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.62, 9.62, 9.62) @ 900 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 65.79 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.23 W/kg

SAR(1 g) = 2.76 W/kg; SAR(10 g) = 1.77 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm


Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 3.74 W/kg

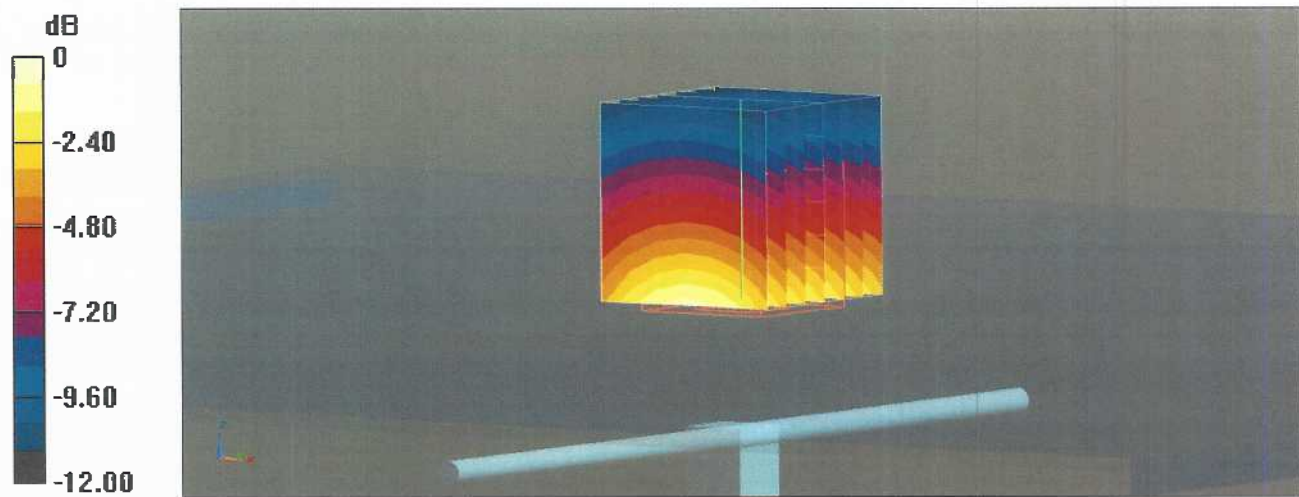

0 dB = 3.74 W/kg = 5.73 dBW/kg

Impedance Measurement Plot for Head TSL

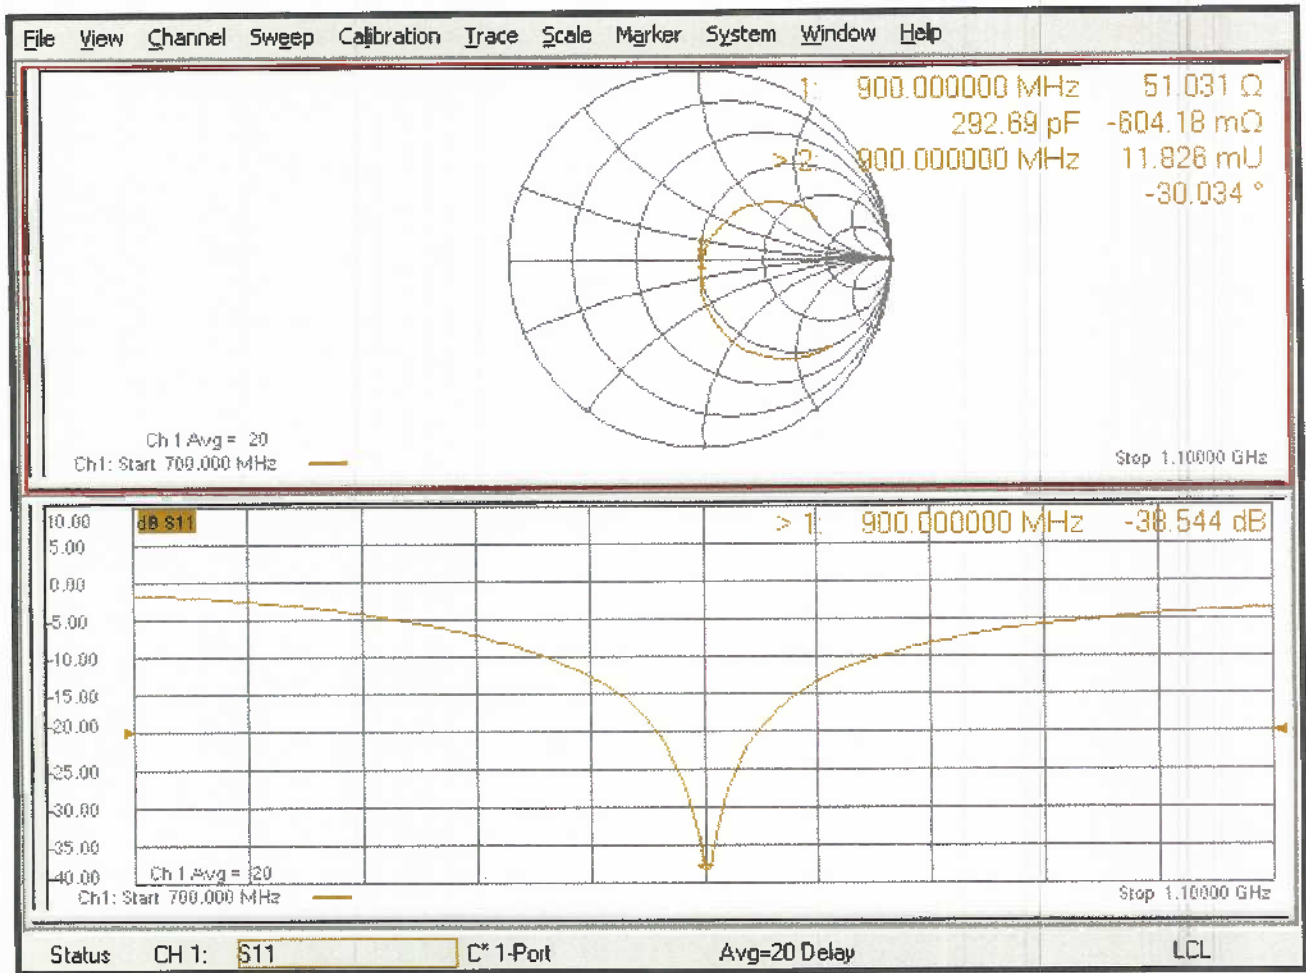

gm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client

RF Exposure Lab

Certificate No: **D1750V2-1061_Jun21**

CALIBRATION CERTIFICATE

Object

D1750V2 - SN 1061

Calibration procedure(s)

QA CAL-05.v11

Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date:

June 03, 2021

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Jeffrey Katzman	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.7 $\pm$ 6 %	1.37 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	37.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.93 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.8 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.4 Ω + 0.0 j Ω
Return Loss	- 44.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.221 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D1750V2 SN: 1061 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
6/3/2021	-44.5		49.4		0.0	
6/4/2022	-42.3	-4.9	47.9	-1.5	-0.2	-0.2
6/6/2023	-43.6	-2.0	48.5	-0.9	-0.3	-0.3

DASY5 Validation Report for Head TSL

Date: 03.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1061

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.67, 8.67, 8.67) @ 1750 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.4 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 9.38 W/kg; SAR(10 g) = 4.93 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm


Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 14.6 W/kg

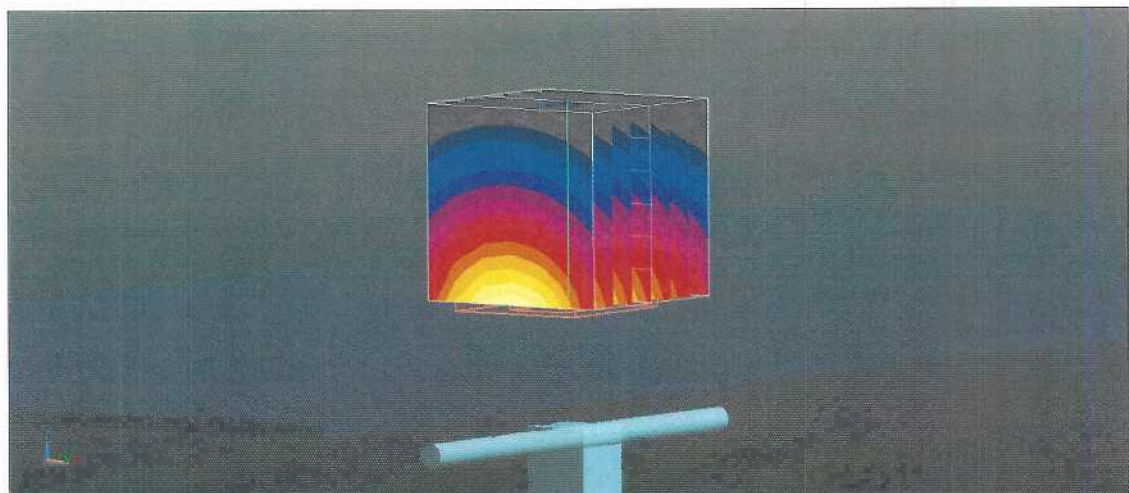

0 dB = 14.6 W/kg = 11.64 dBW/kg

Impedance Measurement Plot for Head TSL

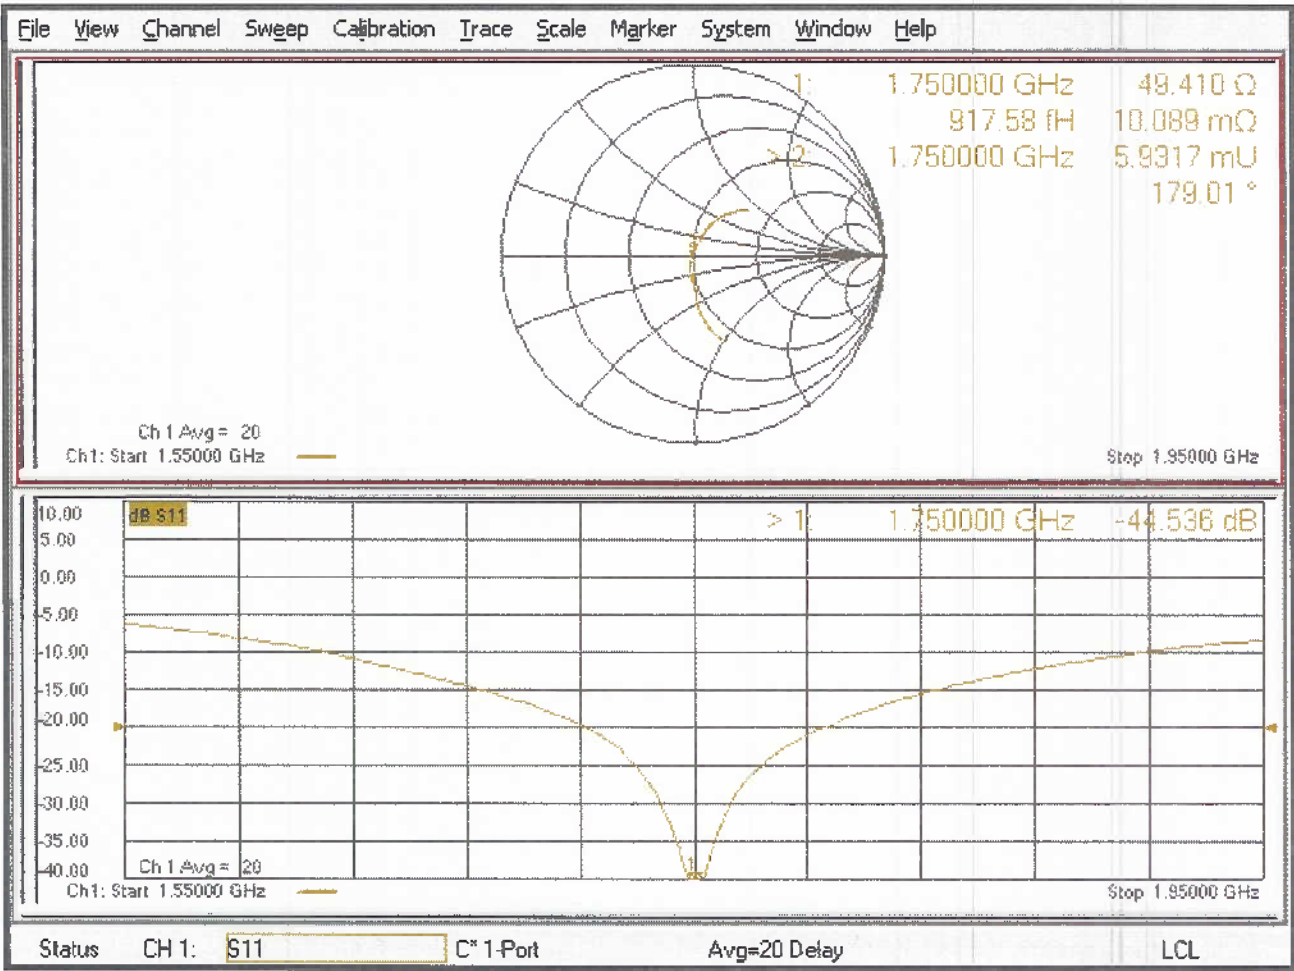



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **D1900V2-5d147_Jun21**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d147**

Calibration procedure(s) **QA CAL-05.v11**
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date: **June 04, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Michael Weber** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.9 $\pm$ 6 %	1.41 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.1 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.3 Ω + 5.4 j Ω
Return Loss	- 24.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.192 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D1900V2 SN: 5d147 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
6/4/2021	-24.2		53.3		5.4	
6/4/2022	-25.6	5.8	52.6	-0.7	5.7	0.3
6/6/2023	-26.2	8.3	54.6	1.3	5.5	0.1

DASY5 Validation Report for Head TSL

Date: 04.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d147

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.2 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.28 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm


Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 15.6 W/kg

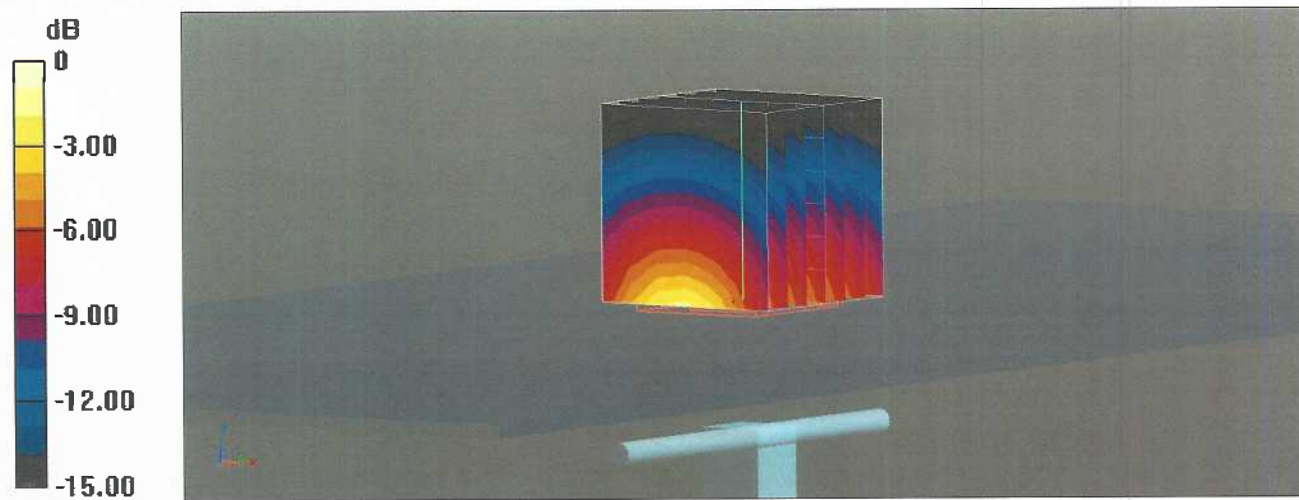

0 dB = 15.6 W/kg = 11.93 dBW/kg

Impedance Measurement Plot for Head TSL

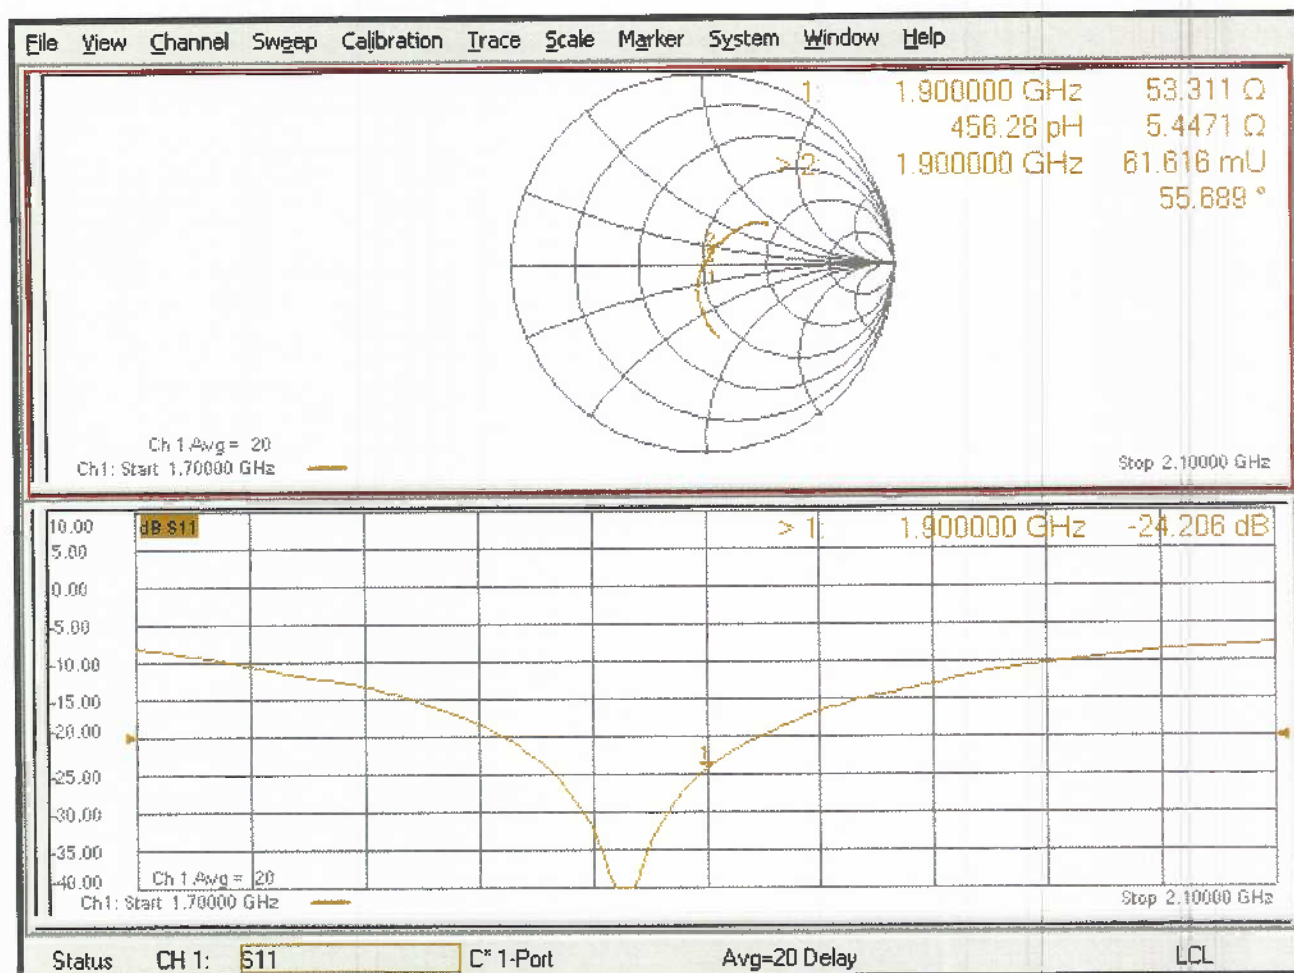



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client

RF Engineering Ltd

Certificate No: **D2550V2-1003_Jun21**

CALIBRATION CERTIFICATE

Object

D2550V2 - SN 1003

Calibration procedure(s)

QA CAL-05.v11

Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date:

June 03, 2021

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Jeffrey Katzman	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2550 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.1	1.91 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.3 $\pm$ 6 %	1.98 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.3 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.4 Ω - 3.5 j Ω
Return Loss	- 29.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.156 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D2550V2 SN: 1003 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
6/3/2021	-29.0		49.4		-3.5	
6/4/2022	-28.6	-1.4	48.5	-0.9	-3.8	-0.3
6/6/2023	-27.3	-5.9	47.1	-2.3	-4.1	-0.6

DASY5 Validation Report for Head TSL

Date: 03.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2550 MHz; Type: D2550V2; Serial: D2550V2 - SN:1003

Communication System: UID 0 - CW; Frequency: 2550 MHz

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.85, 7.85, 7.85) @ 2550 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.6 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.28 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm


Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 24.3 W/kg

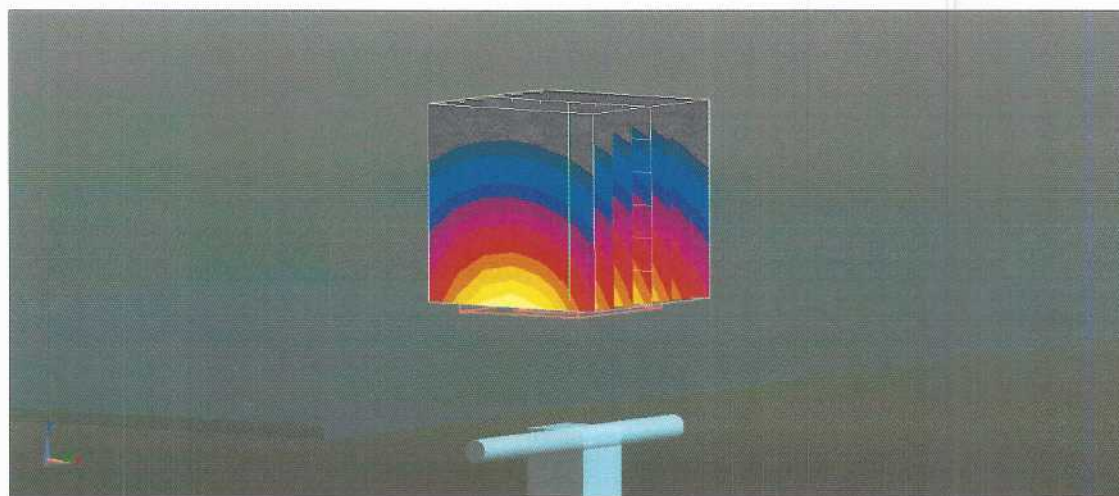

0 dB = 24.3 W/kg = 13.86 dBW/kg

Impedance Measurement Plot for Head TSL

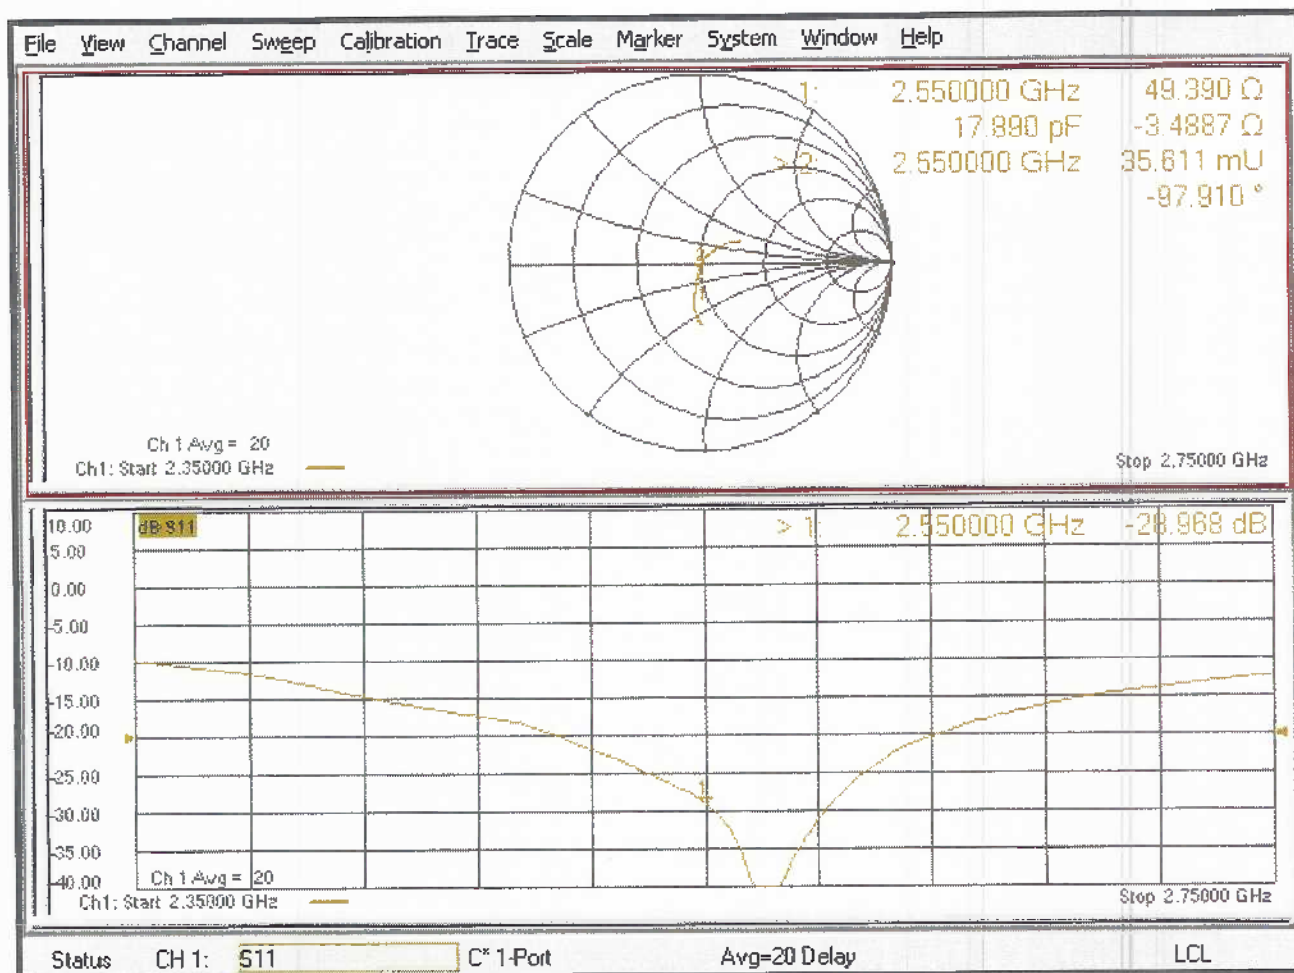



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client

RF Engineering Ltd

Certificate No: **D3300V2-1032_Jan22**

CALIBRATION CERTIFICATE

Object

D3300V2 - SN: 1032

Calibration procedure(s)

QA CAL-22 v6

Calibration Procedure for SAR Validation Sources between 3-10 GHz

Calibration date:

January 17, 2022

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 3503	31-Dec-21 (No. EX3-3503_Dec21)	Dec-22
DAE4	SN: 601	01-Nov-21 (No. DAE4-601_Nov21)	Nov-22
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

Calibrated by:

Michael Weber

Function

Laboratory Technician

Signature

M. Weber

Approved by:

Sven Kötter

Deputy Manager

S. Kötter

Issued: January 19, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	3300 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	38.2	2.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.5 $\pm$ 6 %	2.78 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.56 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	64.9 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.51 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.0 W/kg $\pm$ 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.4 Ω + 2.9 j Ω
Return Loss	- 30.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.119 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D3300V2 SN: 1032 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
1/17/2022	-30.7		50.4		2.9	
1/17/2023	-29.8	-2.9	48.9	-1.5	3.2	0.3

DASY5 Validation Report for Head TSL

Date: 17.01.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 3300 MHz; Type: D3300V2; Serial: D3300V2 - SN:1032

Communication System: UID 0 - CW; Frequency: 3300 MHz

Medium parameters used: $f = 3300$ MHz; $\sigma = 2.78$ S/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.97, 7.97, 7.97) @ 3300 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 01.11.2021
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=3300MHz/Zoom Scan, dist=1.4mm (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.53 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 6.56 W/kg; SAR(10 g) = 2.51 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm


Ratio of SAR at M2 to SAR at M1 = 75.7%

Maximum value of SAR (measured) = 12.4 W/kg

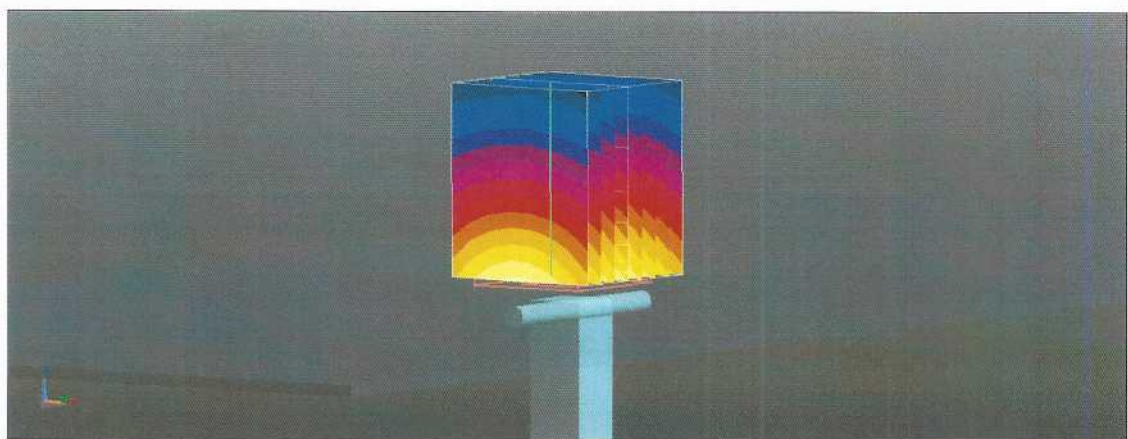

0 dB = 12.4 W/kg = 10.92 dBW/kg

Impedance Measurement Plot for Head TSL

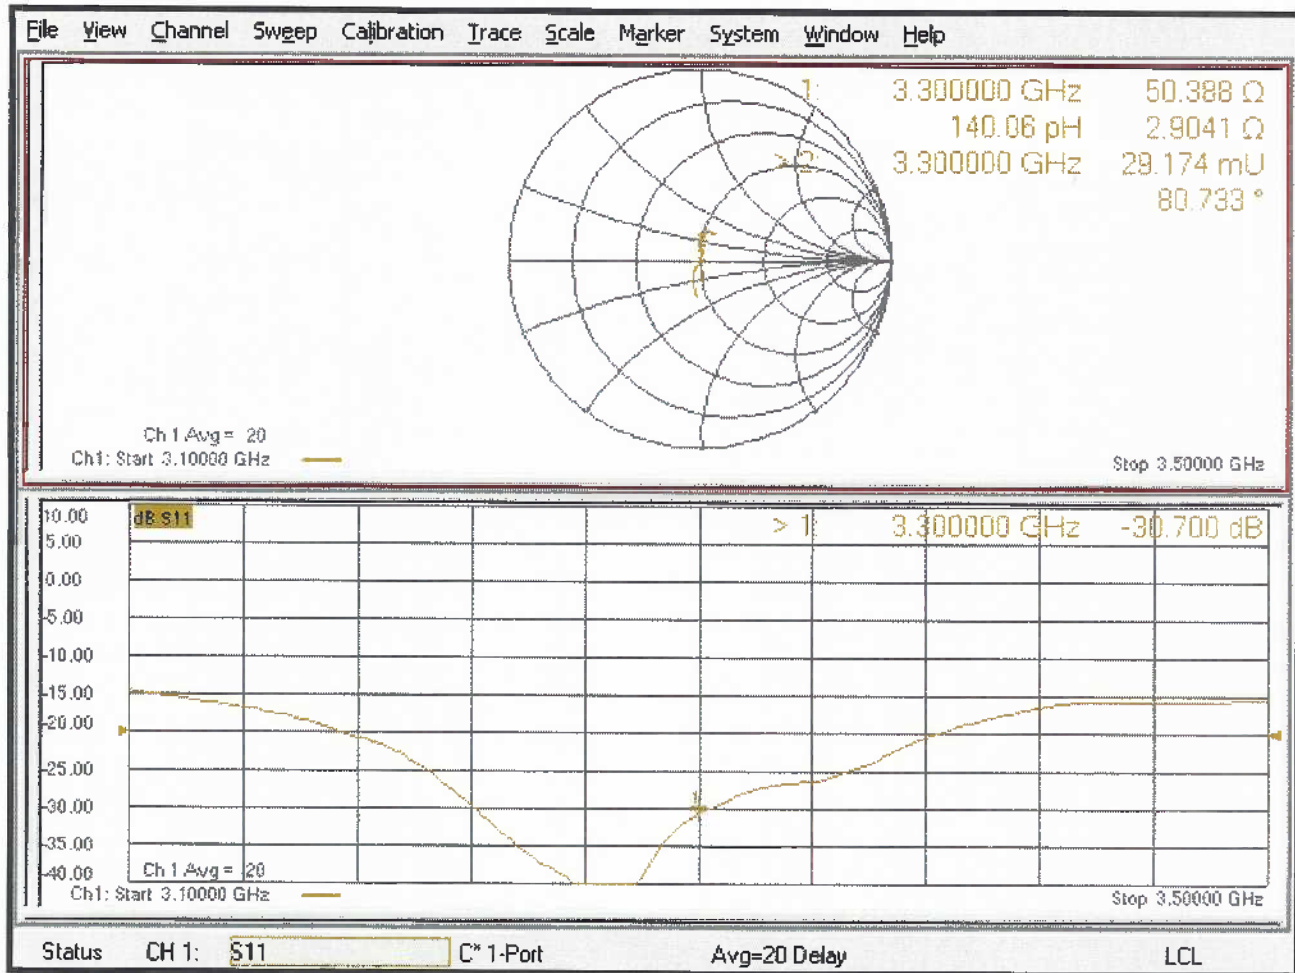



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D3500V2-1061_Apr21**

CALIBRATION CERTIFICATE

Object **D3500V2 - SN:1061**

Calibration procedure(s) **QA CAL-22.v6**
Calibration Procedure for SAR Validation Sources between 3-10 GHz

Calibration date: **April 13, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 3503	30-Dec-20 (No. EX3-3503_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Michael Weber** Name: **Michael Weber** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Issued: April 15, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	3500 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.9	2.91 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.3 $\pm$ 6 %	2.93 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.73 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	67.0 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.52 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.1 W/kg $\pm$ 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.5 Ω - 5.3 j Ω
Return Loss	- 24.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.134 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D3500V2 SN: 1061 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
4/13/2021	-24.2		53.5		-5.3	
4/22/2022	-23.9	-1.2	51.9	-1.6	-4.8	0.5
4/13/2023	-25.1	5.0	54.2	2.3	-5.9	-1.1

DASY5 Validation Report for Head TSL

Date: 13.04.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 3500 MHz; Type: D3500V2; Serial: D3500V2 - SN: 1061

Communication System: UID 0 - CW; Frequency: 3500 MHz

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.93$ S/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.91, 7.91, 7.91) @ 3500 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm 3500/Zoom Scan, dist=1.4mm

(8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.28 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 6.73 W/kg; SAR(10 g) = 2.52 W/kg


Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 12.7 W/kg

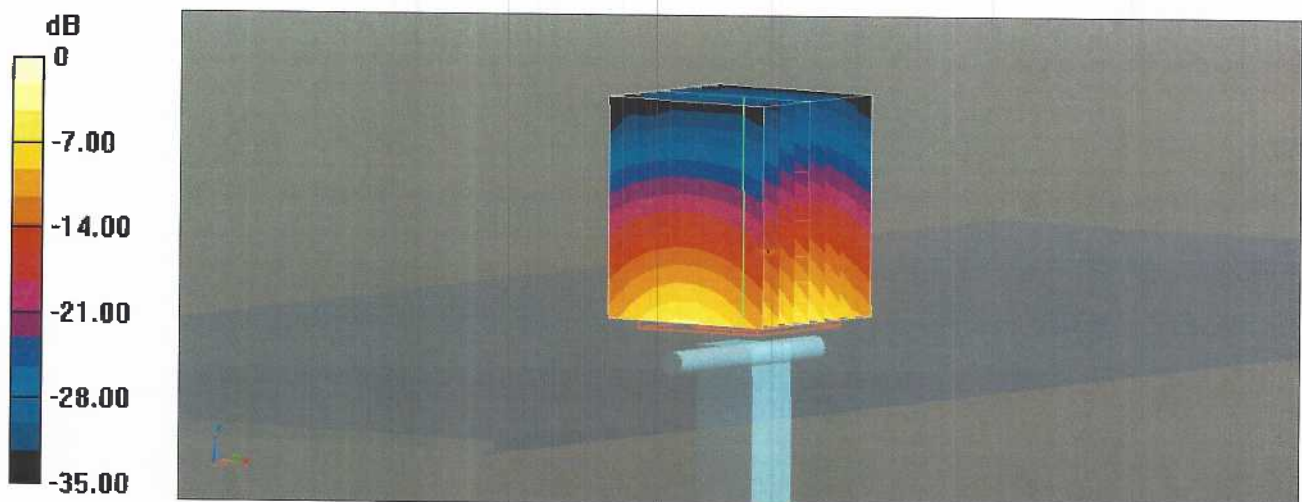

Impedance Measurement Plot for Head TSL

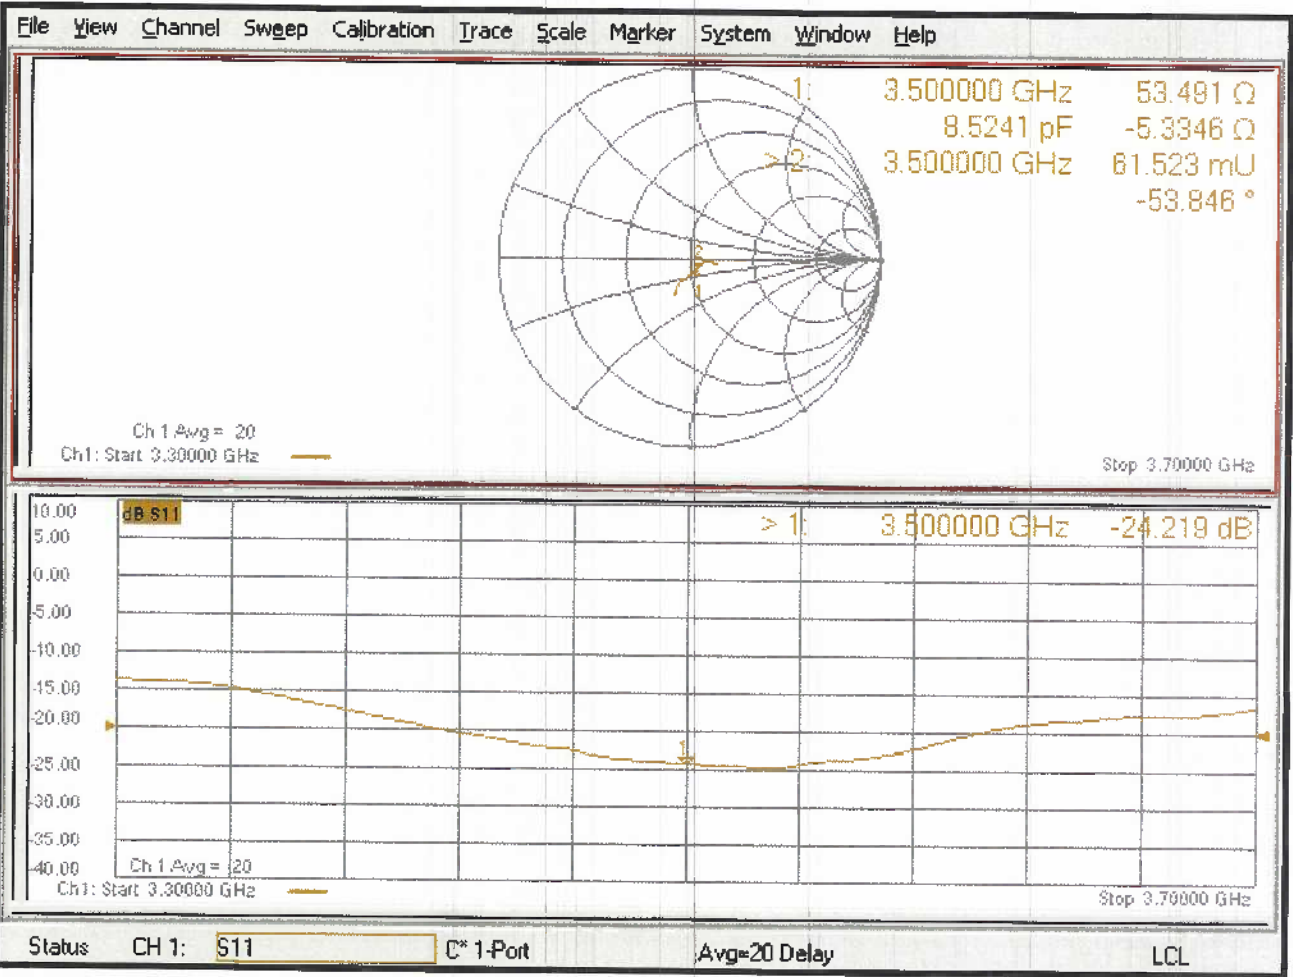

gm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D3700V2-1024_Apr21**

CALIBRATION CERTIFICATE

Object **D3700V2 - SN:1024**

Calibration procedure(s) **QA CAL-22.v6
Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date: **April 13, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 3503	30-Dec-20 (No. EX3-3503_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Michael Weber** Name
Laboratory Technician Function

Signature

Approved by: **Katja Pokovic** Name
Technical Manager Function

Issued: April 15, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	3700 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.7	3.12 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.0 $\pm$ 6 %	3.09 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.85 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	68.3 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.6 W/kg $\pm$ 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	46.1 Ω + 2.2 j Ω
Return Loss	- 26.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.127 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D3700V2 SN: 1024 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
4/13/2021	-26.7		46.1		2.2	
4/13/2022	-25.3	-5.2	44.5	-1.6	1.8	-0.4
4/13/2023	-27.5	8.7	47.2	2.7	2.5	0.7

DASY5 Validation Report for Head TSL

Date: 13.04.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 3700 MHz; Type: D3700V2; Serial: D3700V2 - SN: 1024

Communication System: UID 0 - CW; Frequency: 3700 MHz

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.73, 7.73, 7.73) @ 3700 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm 3700/Zoom Scan, dist=1.4mm

(8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.95 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 6.85 W/kg; SAR(10 g) = 2.47 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm


Ratio of SAR at M2 to SAR at M1 = 73.2%

Maximum value of SAR (measured) = 13.7 W/kg

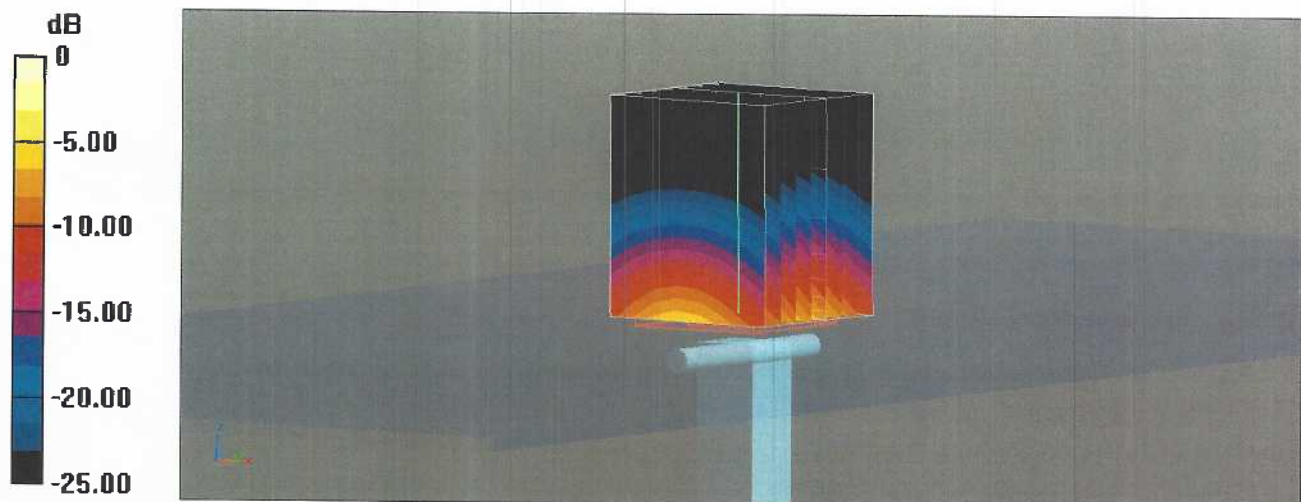

0 dB = 13.7 W/kg = 11.36 dBW/kg

Impedance Measurement Plot for Head TSL

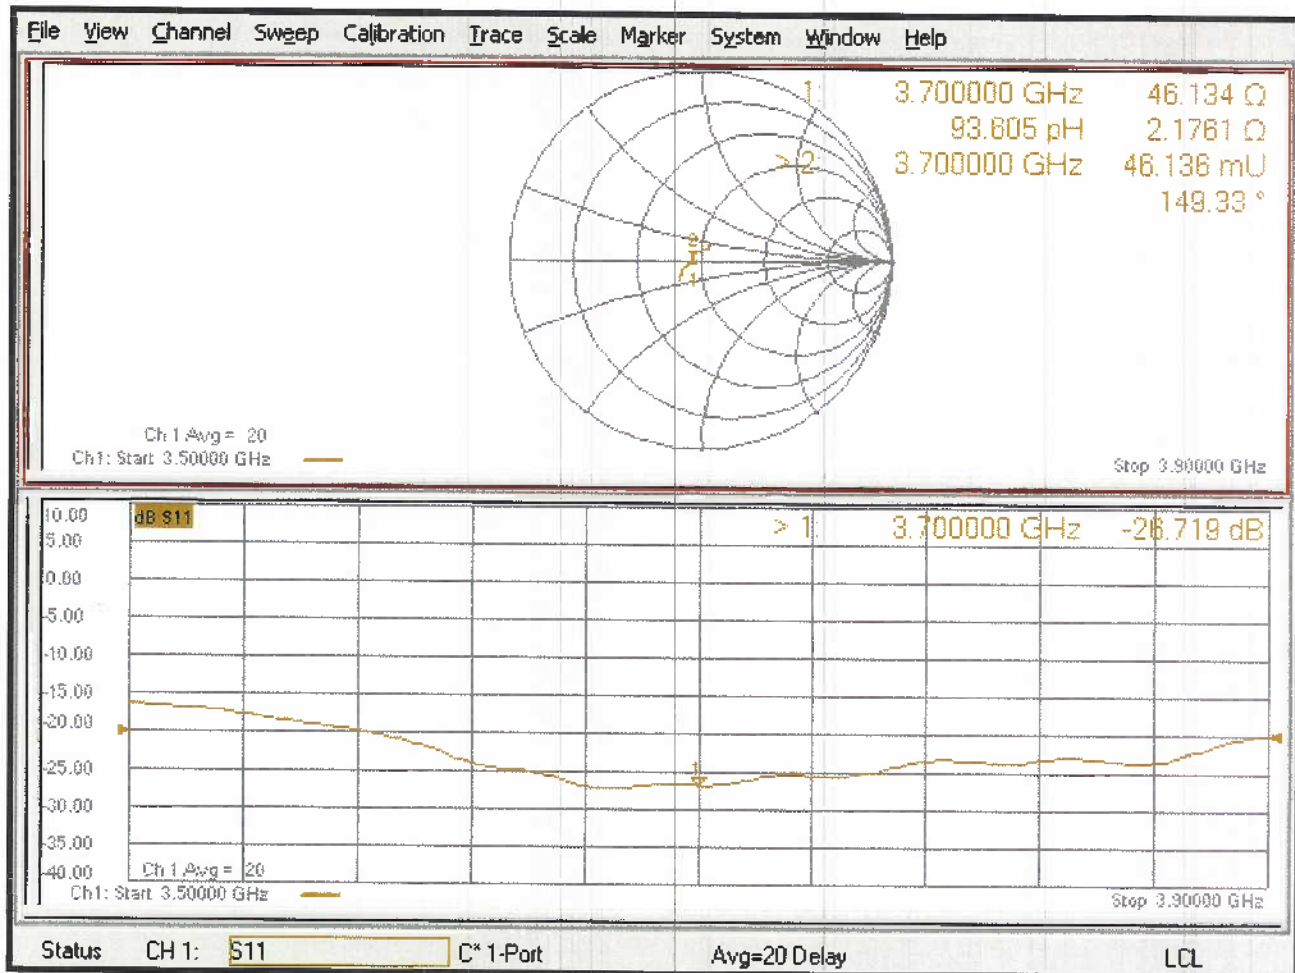



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client

Certificate No. **D3900V2-1082_Jan22**

CALIBRATION CERTIFICATE

Object

D3900V2 - SN: 1082

Calibration procedure(s)

**QA CAL-22.v6
Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date:

January 13, 2022

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 3503	31-Dec-21 (No. EX3-3503_Dec21)	Dec-22
DAE4	SN: 601	01-Nov-21 (No. DAE4-601_Nov21)	Nov-22
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

	Name	Function	Signature
Calibrated by:	Jeffrey Katzman	Laboratory Technician	
Approved by:	Sven Kuhn	Deputy Manager	

Issued: January 19, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	3900 MHz $\pm$ 1 MHz	

Head TSL parameters at 3900 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.5	3.32 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.8 $\pm$ 6 %	3.26 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 3900 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.00 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	69.9 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.43 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg $\pm$ 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 3900 MHz

Impedance, transformed to feed point	47.0 Ω - 5.2 j Ω
Return Loss	- 24.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.108 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D3900V2 SN: 1082 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
1/13/2022	-24.2		47.0		-5.2	
1/13/2023	-25.6	5.8	48.3	1.3	-4.9	0.3

DASY5 Validation Report for Head TSL

Date: 13.01.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 3900 MHz; Type: D3900V2; Serial: D3900V2 - SN:1082

Communication System: UID 0 - CW; Frequency: 3900 MHz

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.26$ S/m; $\epsilon_r = 36.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.39, 7.39, 7.39) @ 3900 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 01.11.2021
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm 3900/Zoom Scan, dist=1.4mm (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.71 V/m; Power Drift = 0.00 dB



Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 7.00 W/kg; SAR(10 g) = 2.43 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm


Ratio of SAR at M2 to SAR at M1 = 74.8%

Maximum value of SAR (measured) = 13.7 W/kg

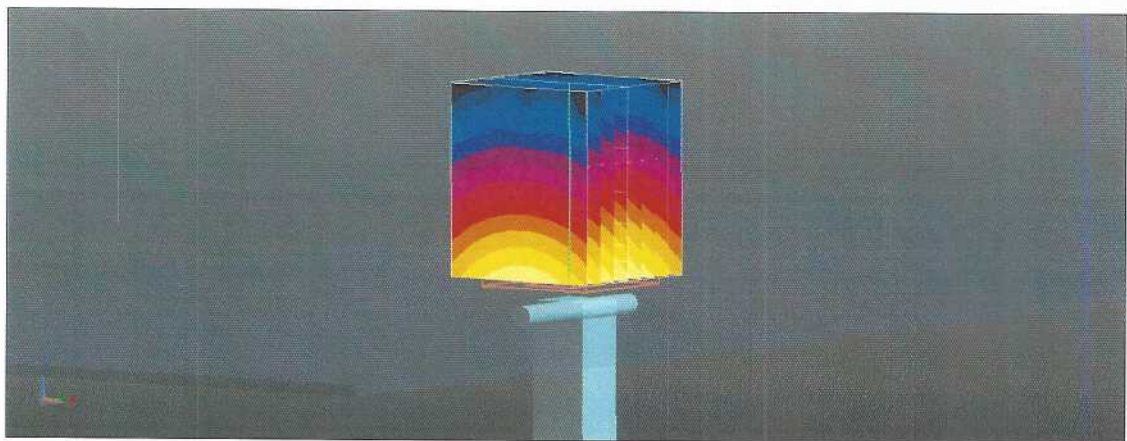

0 dB = 13.7 W/kg = 11.38 dBW/kg

Impedance Measurement Plot for Head TSL

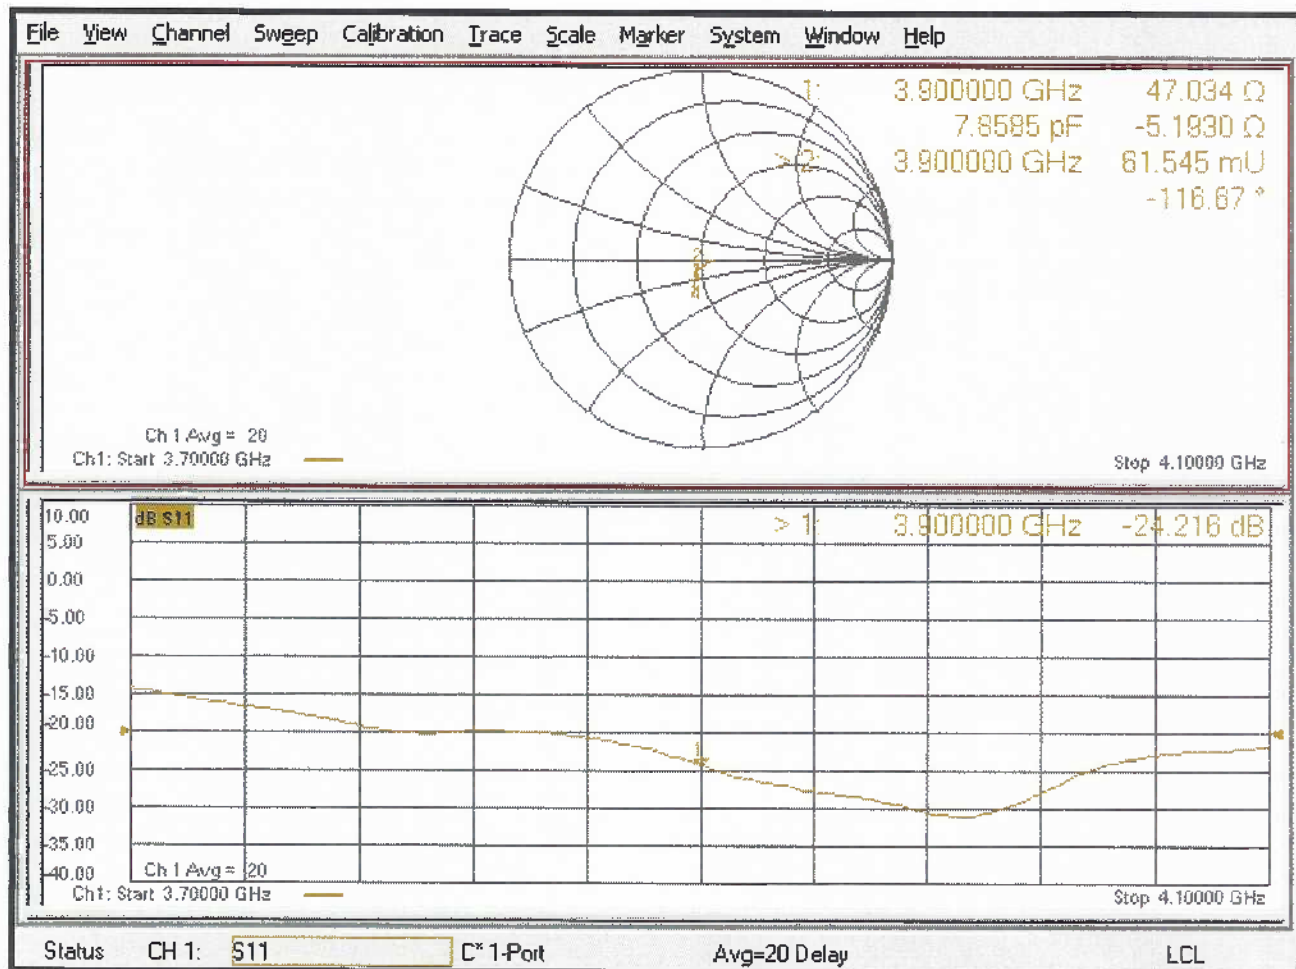



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client

RF Engineering Ltd

Certificate No. **D4200V2-1025_Jan22**

CALIBRATION CERTIFICATE

Object

D4200V2 - SN:1025

Calibration procedure(s)

QA-CAL-22.v6

Calibration Procedure for SAR Validation Sources between 3-10 GHz

Calibration date:

January 13, 2022

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 3503	31-Dec-21 (No. EX3-3503_Dec21)	Dec-22
DAE4	SN: 601	01-Nov-21 (No. DAE4-601_Nov21)	Nov-22

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

	Name	Function	Signature
Calibrated by:	Jeffrey Chittenden	Laboratory Technician	

	Name	Function	Signature
Approved by:	Sven Kötter	Deputy Manager	

Issued: January 19, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	4200 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.1	3.63 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.4 $\pm$ 6 %	3.53 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.63 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	66.3 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.3 W/kg $\pm$ 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	46.5 Ω - 4.7 j Ω
Return Loss	- 24.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.119 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D4200V2 SN: 1025 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
1/13/2022	-24.3		46.5		-4.7	
1/13/2023	-24.9	2.5	45.7	-0.8	-4.9	-0.2

DASY5 Validation Report for Head TSL

Date: 13.01.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 4200 MHz; Type: D4200V2; Serial: D4200V2 - SN:1025

Communication System: UID 0 - CW; Frequency: 4200 MHz

Medium parameters used: $f = 4200$ MHz; $\sigma = 3.53$ S/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.02, 7.02, 7.02) @ 4200 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 01.11.2021
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=4200MHz/Zoom Scan, dist=1.4mm (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.28 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 6.63 W/kg; SAR(10 g) = 2.24 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm


Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 12.9 W/kg



0 dB = 12.9 W/kg = 11.12 dBW/kg

Impedance Measurement Plot for Head TSL

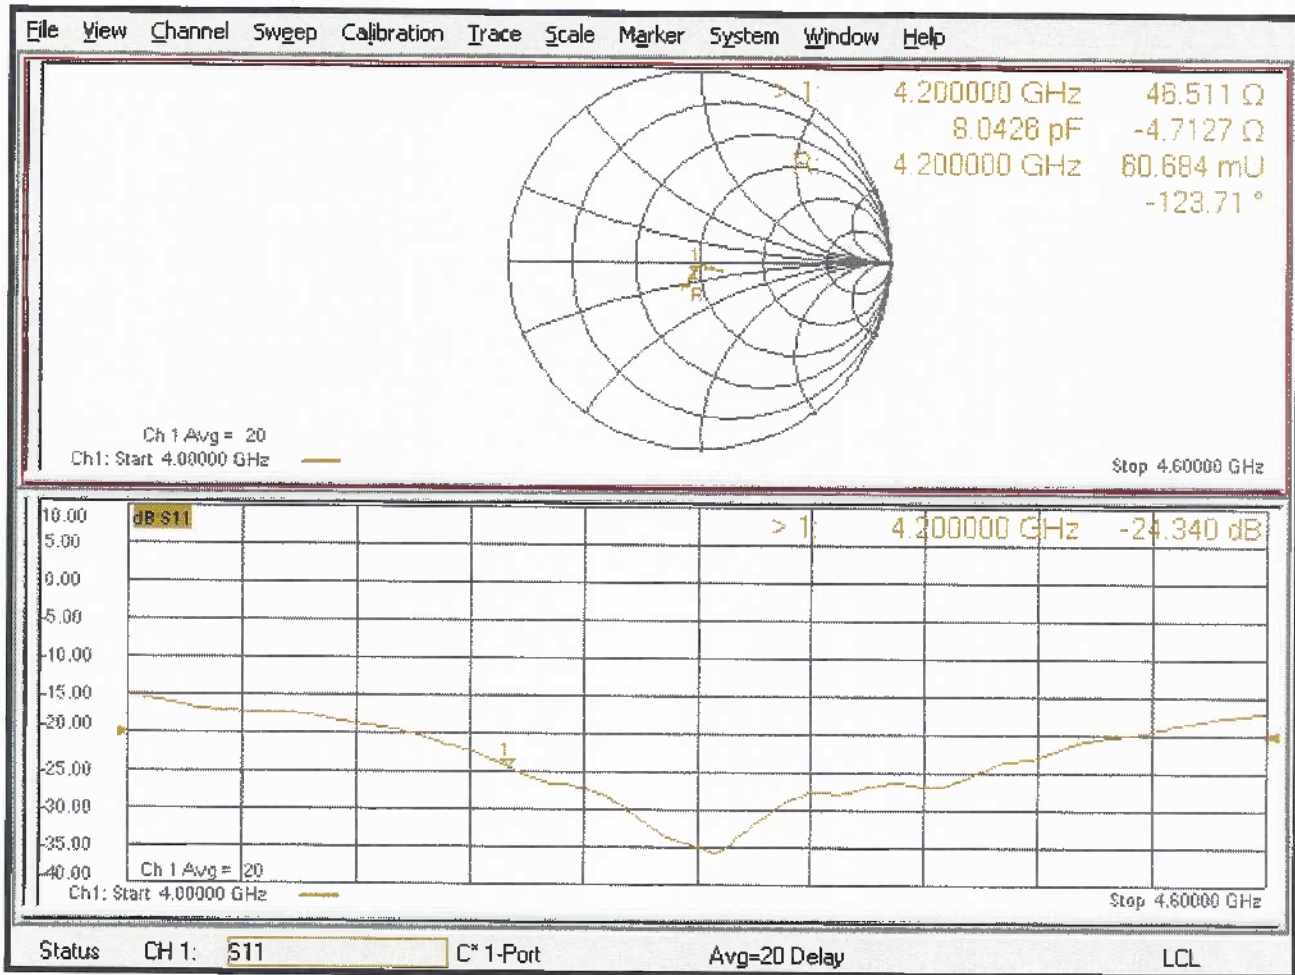

Appendix F – DAE Calibration Data Sheets



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **DAE4-759_Aug22**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BM - SN: 759**

Calibration procedure(s) **QA CAL-06.v30**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **August 16, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	31-Aug-21 (No:31368)	Aug-22
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	24-Jan-22 (in house check)	In house check: Jan-23
Calibrator Box V2.1	SE UMS 006 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23

Calibrated by: **Name**
Dominique Steffen **Function**
Laboratory Technician

Signature

Approved by: **Sven Kühn** **Technical Manager**

Issued: August 16, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V , full range = -100...+300 mV

Low Range: 1LSB = 61 nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	406.175 $\pm$ 0.02% (k=2)	406.034 $\pm$ 0.02% (k=2)	406.444 $\pm$ 0.02% (k=2)
Low Range	3.96849 $\pm$ 1.50% (k=2)	4.00926 $\pm$ 1.50% (k=2)	3.98616 $\pm$ 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	215.0 ° $\pm$ 1 °
---	-------------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	199995.18	-0.71	-0.00
Channel X + Input	20001.77	-0.48	-0.00
Channel X - Input	-20000.28	1.45	-0.01
Channel Y + Input	199996.97	1.93	0.00
Channel Y + Input	20002.92	0.71	0.00
Channel Y - Input	-19995.43	6.37	-0.03
Channel Z + Input	199996.69	1.68	0.00
Channel Z + Input	20000.35	-1.75	-0.01
Channel Z - Input	-19998.82	3.10	-0.02

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2001.21	0.01	0.00
Channel X + Input	200.98	-0.62	-0.31
Channel X - Input	-197.08	1.15	-0.58
Channel Y + Input	2001.10	-0.01	-0.00
Channel Y + Input	200.80	-0.65	-0.32
Channel Y - Input	-198.40	-0.01	0.01
Channel Z + Input	2001.69	0.65	0.03
Channel Z + Input	199.49	-1.89	-0.94
Channel Z - Input	-198.55	-0.02	0.01

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	4.82	3.21
	- 200	-2.58	-4.00
Channel Y	200	7.15	7.21
	- 200	-7.57	-8.64
Channel Z	200	-14.83	-15.37
	- 200	13.61	14.08

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-1.36	-2.04
Channel Y	200	7.49	-	0.08
Channel Z	200	4.40	6.75	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15759	16113
Channel Y	15677	15705
Channel Z	15961	15101

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.68	-0.51	2.09	0.49
Channel Y	0.04	-1.50	2.12	0.56
Channel Z	-0.00	-1.52	1.89	0.61

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Appendix G – Phantom Calibration Data Sheets

Certificate of Conformity / First Article Inspection

Item	Oval Flat Phantom ELI 4.0
Type No	QD OVA 001 B
Series No	1003 and higher
Manufacturer	Untersee Composites Knebelstrasse 8 CH-8268 Mannenbach, Switzerland

Tests

Complete tests were made on the prototype units QD OVA 001 AA 1001, QD OVA 001 AB 1002, pre-series units QD OVA 001 BA 1003-1005 as well as on the series units QD OVA 001 BB, 1006 ff.

Test	Requirement	Details	Units tested
Material thickness	Compliant with the standard requirements	Bottom plate: 2.0mm +/- 0.2mm	all
Material parameters	Dielectric parameters for required frequencies	< 6 GHz: Rel. permittivity = 4 +/-1, Loss tangent ≤ 0.05	Material sample
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions.	DGBE based simulating liquids. Observe Technical Note for material compatibility.	Equivalent phantoms, Material sample
Shape	Thickness of bottom material, Internal dimensions, Sagging compatible with standards from minimum frequency	Bottom elliptical 600 x 400 mm Depth 190 mm, Shape is within tolerance for filling height up to 155 mm, Eventual sagging is reduced or eliminated by support via DUT	Prototypes, Sample testing

Standards

- [1] CENELEC EN 50361-2001, « Basic standard for the measurement of the Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz) », July 2001
- [2] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [3] IEC 62209 – 1, "Specific Absorption Rate (SAR) in the frequency range of 300 MHz to 3 GHz – Measurement Procedure, Part 1: Hand-held mobile wireless communication devices", February 2005
- [4] IEC 62209 – 2, Draft, "Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices – Human models, Instrumentation and Procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30 MHz to 6 GHz Handheld and Body-Mounted Devices used in close proximity to the Body.", February 2005
- [5] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition January 2001

Based on the tests above, we certify that this item is in compliance with the standards [1] to [5] if operated according to the specific requirements and considering the thickness. The dimensions are fully compliant with [4] from 30 MHz to 6 GHz. For the other standards, the minimum lower frequency limit is limited due to the dimensional requirements ([1]: 450 MHz, [2]: 300 MHz, [3]: 800 MHz, [5]: 375 MHz) and possibly further by the dimensions of the DUT.

s p e a g

Date 28.4.2008

Signature / Stamp

Schmid & Partner Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Appendix H – Validation Summary

Per FCC KDB 865664 D02 v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue equivalent media for system validation according to the procedures outlined in FCC KDB 865664 D01 v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point using the system that normally operates with the probe for routine SAR measurements and according to the required tissue equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table H-1
SAR System Validation Summary

SAR System #	Freq. (MHz)	Date	Probe S/N	Probe Type	Probe Cal. Point	Cond. (σ)	Perm. (ϵ_r)	CW Validation			Modulation Validation			
								Sens-itivity	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	
1	750	9/12/2022	3693	EX3DV4	750	Head	0.91	41.24	Pass	Pass	Pass	QPSK	Pass	Pass
1	900	9/12/2022	3693	EX3DV4	835	Head	0.98	41.03	Pass	Pass	Pass	QPSK	Pass	Pass
1	1750	9/13/2022	3693	EX3DV4	1750	Head	1.41	39.22	Pass	Pass	Pass	QPSK	Pass	Pass
1	1900	9/13/2022	3693	EX3DV4	1900	Head	1.43	38.96	Pass	Pass	Pass	QPSK	Pass	Pass
1	2550	9/13/2022	3693	EX3DV4	2550	Head	1.95	38.69	Pass	Pass	Pass	QPSK	Pass	Pass
1	3300	9/14/2022	3693	EX3DV4	3300	Head	2.78	37.63	Pass	Pass	Pass	QPSK	Pass	Pass
1	3500	9/14/2022	3693	EX3DV4	3500	Head	2.96	37.45	Pass	Pass	Pass	QPSK	Pass	Pass
1	3700	9/14/2022	3693	EX3DV4	3700	Head	3.17	37.22	Pass	Pass	Pass	QPSK	Pass	Pass
1	3900	9/15/2022	3693	EX3DV4	3900	Head	3.39	36.99	Pass	Pass	Pass	QPSK	Pass	Pass
1	4200	9/15/2022	3693	EX3DV4	4200	Head	3.70	36.64	Pass	Pass	Pass	QPSK	Pass	Pass