



FCC Part 15C Test Report

FCC ID:2ASLV-A3

Product Name:	Power Amplifier
Trademark:	N/A
Model Name :	See the page 7
Prepared For : Address :	FoShan Shuangmusanlin technology co., ltd 205, Building 14, Zhifuyuan, Shunde, No.8, Second Ring Road, Xingtan Town, Shunde District, Foshan City, China
Prepared By : Address :	Shenzhen BCTC Testing Co., Ltd. BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Jan. 09, 2019 – Mar. 04, 2019
Date of Report :	Mar. 04, 2019
Report No.:	BCTC-FY190100116E



TEST RESULT CERTIFICATION

Applicant's name : FoShan Shuangmusanlin technology co., ltd

Address : 205, Building 14, Zhifuyuan, Shunde, No.8, Second Ring Road, Xingtian Town, Shunde District, Foshan City, China

Manufacture's Name..... : FoShan Shuangmusanlin technology co., ltd

Address : 205, Building 14, Zhifuyuan, Shunde, No.8, Second Ring Road, Xingtian Town, Shunde District, Foshan City, China

Product description

Product name : Power Amplifier

Trademark : N/A

Model and/or type reference : See the page 7

Standards : FCC Part15.247
ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Leke Xie

Reviewer(Supervisor): Eric Yang

Approved(Manager): Zero Zhou





Table of Contents

Test Report Declaration	Page
1. TEST SUMMARY	5
2. TEST FACILITY	6
3. MEASUREMENT UNCERTAINTY	6
4. GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF EUT	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	11
5. TEST FACILITY AND TEST INSTRUMENT USED	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. CONDUCTED EMISSIONS	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 Test Result	16
7. RADIATED EMISSIONS	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	19
7.3 Test procedure	19
7.4 Test Result	21
7.5 RADIATED Band EMISSION MEASUREMENT	25
8. CONDUCTED EMISSION	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. 20 DB BANDWIDTH	39
9.1 Block Diagram Of Test Setup	39
9.2 Limit	39
9.3 Test procedure	39
9.4 Test Result	40
10. MAXIMUM PEAK OUTPUT POWER	45
10.1 Block Diagram Of Test Setup	45
10.2 Limit	45
10.3 Test procedure	45
10.4 Test Result	46
11. HOPPING CHANNEL SEPARATION	51
11.1 Block Diagram Of Test Setup	51
11.2 Limit	51



11.3	Test procedure	51
11.4	Test Result	52
12.	NUMBER OF HOPPING FREQUENCY	57
12.1	Block Diagram Of Test Setup	57
12.2	Limit	57
12.3	Test procedure	57
12.4	Test Result	58
13.	DWELL TIME	60
13.1	Block Diagram Of Test Setup	60
13.2	Limit	60
13.3	Test procedure	60
13.4	Test Result	61
14.	ANTENNA REQUIREMENT	67
15.	EUT PHOTOGRAPHS	68
16.	EUT TEST SETUP PHOTOGRAPHS	69

(Note: N/A means not applicable)



1. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.205(a) 15.209 15.247(d)	Radiated Spurious Emissions	PASS	
15.247(d)	Conducted Spurious emissions	PASS	
15.247(d) 15.205(a)	Band edge	PASS	
15.207	Conducted Emission	PASS	
15.247(a)	20dB Bandwidth	PASS	
15.247(b)	Maximum Peak Output Power	PASS	
15.247(a)	Frequency Separation	PASS	
15.247(a)	Number of Hopping Frequency	PASS	
15.247(a)	Dwell time	PASS	
15.203	Antenna Requirement	PASS	
Note: (1) "N/A" denotes test is not applicable in this Test Report			



2. TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

Test Firm Registration Number: 712850

Test site MRA number: CN1212

IC Registered No.: 23583

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB



4. GENERAL INFORMATION


4.1 GENERAL DESCRIPTION OF EUT

Equipment	Power Amplifier										
Trade Name	N/A										
Model Name	A3 A1, A2, A4 , A5, A6, A11, A12, A15, A16, A17, PHA1, PHA2, PHA3, PHA4, PHA5, PHA6, PHA11, PHA12, PHA14, PHA15, PHA16, A10, A20, A30, A40, A50, A100, A200, A300, A400, A500, P10, P20, P30, P40, P50, P100, P200, P300, P400, P500, SP100, SP200, SP300, SP400, SP500, SD-8, LP100, LP200, LP300, LP400, LP500, VP100, VP200, VP300, VP400, P1, P2, P3, sAp II, sAp-1, sAp-9, sAp-10, sAp-11, sAp-12, Sanskrit PHA, SH-8, SH-9, SA100, SA200, SA300, SA400, SA500, LA100, LA200, LA300, LA400, LA500, SD-8, SD-9, SA-36A, SA-36A pro, SA-36A plus, SA-50, SA-50 plus, SA-98E, SA-98E PRO, AD13, AD13 plus, AD18, AD19, Q5PRO, DA-8, DA-8S, DA-9, A6, A8, S100, S200, S300, L100, L200 , L300, V100, V200, V300, S1, S2, S5, B1, B2, B5, J1, J2, J5, S11, S12, S15, B11, B12, B15, J11, J12, J15, E10, E20, E30, X10, X20, X30, L10, L20, L30, E100, E200, E300, X100, X200, X300, L100, L200, L300										
Model Difference	All the model are the same circuit and RF module, except model names.										
Product Description	The EUT is a Power Amplifier <table border="1"> <tr> <td>Operation Frequency:</td><td>2402-2480 MHz</td></tr> <tr> <td>Modulation Type:</td><td>GFSK, Pi/4DQPSK, 8DPSK</td></tr> <tr> <td>Number Of Channel</td><td>79CH</td></tr> <tr> <td>Antenna Designation:</td><td>External antenna with RP-SMA connector</td></tr> <tr> <td>Antenna Gain</td><td>1dBi</td></tr> </table> Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	Operation Frequency:	2402-2480 MHz	Modulation Type:	GFSK, Pi/4DQPSK, 8DPSK	Number Of Channel	79CH	Antenna Designation:	External antenna with RP-SMA connector	Antenna Gain	1dBi
Operation Frequency:	2402-2480 MHz										
Modulation Type:	GFSK, Pi/4DQPSK, 8DPSK										
Number Of Channel	79CH										
Antenna Designation:	External antenna with RP-SMA connector										
Antenna Gain	1dBi										
Channel List	Please refer to the Note 2.										
Ratings	Model: LCAP37 I/P: 100-240V~50-60Hz 1.2A(1,2A)Max O/P: 24V-3.42A(3,42A)										
Connecting I/O Port(s)	Please refer to the User's Manual										
Hardware Version:	N/A										
Software Version:	N/A										




4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual Conducted Emission Test

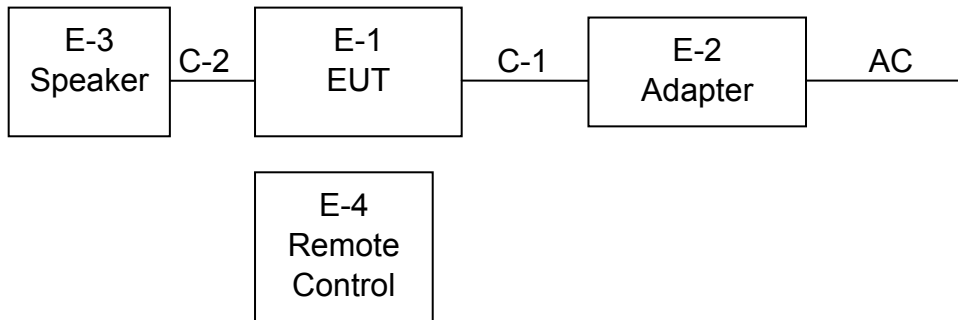

Radiated Spurious Emission

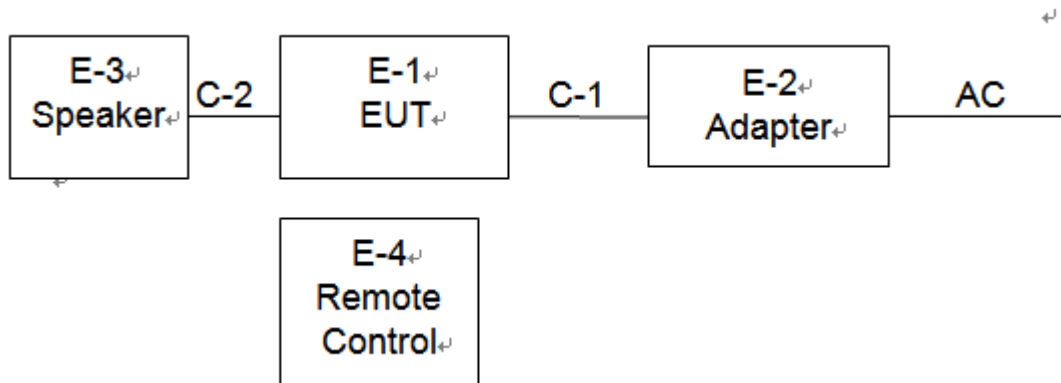



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable
E-1	Power Amplifier	N/A	A3	N/A	EUT
E-2	Adapter	N/A	LCAP37	N/A	EUT
E-3	Speaker	N/A	S001	N/A	Auxiliary
E-4	Remote Control	N/A	N/A	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0M	DC cable unshielded
C-2	NO	NO	0.5M	AUX cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/



4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

The EUT is Continue Transmitting.

The software is installed in operation system, named "RFTestTool.apk", Version 1.0.

Test Mode	Test mode	Low channel	Middle channel	High channel
1	Transmitting(GFSK)	2402MHz	2441MHz	2480MHz
2	Transmitting(Pi/4DQPSK)	2402MHz	2441MHz	2480MHz
3	Transmitting(8DPSK)	2402MHz	2441MHz	2480MHz
4	Transmitting (conducted emission and Radiated emission)			

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

RF conduction and Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	2018.06.20	2019.06.20
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	2018.06.20	2019.06.20
3	Bilog Antenna (30MHz-3GHz)	SCHWARZB ECK	VULB9163	VULB9163-942	2018.06.23	2019.06.23
4	Horn Antenna (1GHz-18GHz)	SCHWARZB ECK	BBHA9120D	1541	2018.06.23	2021.06.22
5	Horn Antenna (18GHz-40GHz)	SCHWARZB ECK	BBHA9170	822	2018.08.06	2019.08.06
6	Amplifier (9KHz-6GHz)	SCHWARZB ECK	BBV9744	9744-0037	2018.06.20	2019.06.20
7	Amplifier (0.5GHz-18GHz)	SCHWARZB ECK	BBV9718	9718-309	2018.06.20	2019.06.20
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	2018.08.06	2019.08.06
9	Loop Antenna (9KHz-30MHz)	SCHWARZB ECK	FMZB1519B	014	2018.06.23	2019.06.23
10	RF cables1 (9kHz-30MHz)	Huber+Suhner	9kHz-30MHz	B1702988-0008	2018.02.12	2019.02.12
11	RF cables2 (30MHz-1GHz)	Huber+Suhner	30MHz-1GHz	1486150	2018.03.27	2019.03.27
12	RF cables3 (1GHz-40GHz)	Huber+Suhner	1GHz-40GHz	1607106	2018.06.19	2019.06.19
13	Power Meter	Keysight	E4419	\	2018.04.15	2019.04.15
14	Power Sensor (AV)	Keysight	E9 300A	\	2018.04.15	2019.04.15
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	2018.08.14	2019.08.13
16	Test Receiver 9kHz-40GHz	R&S	FSP40	100550	2018.06.13	2019.06.12
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\




Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	2018.06.20	2019.06.20
2	LISN	SCHWARZBECK	NSLK8127	8127739	2018.06.19	2019.06.19
3	LISN	R&S	ENV216	101375	2018.06.20	2019.06.20
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2019.02.12	2020.02.12
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

6. CONDUCTED EMISSIONS

6.1 Block Diagram Of Test Setup

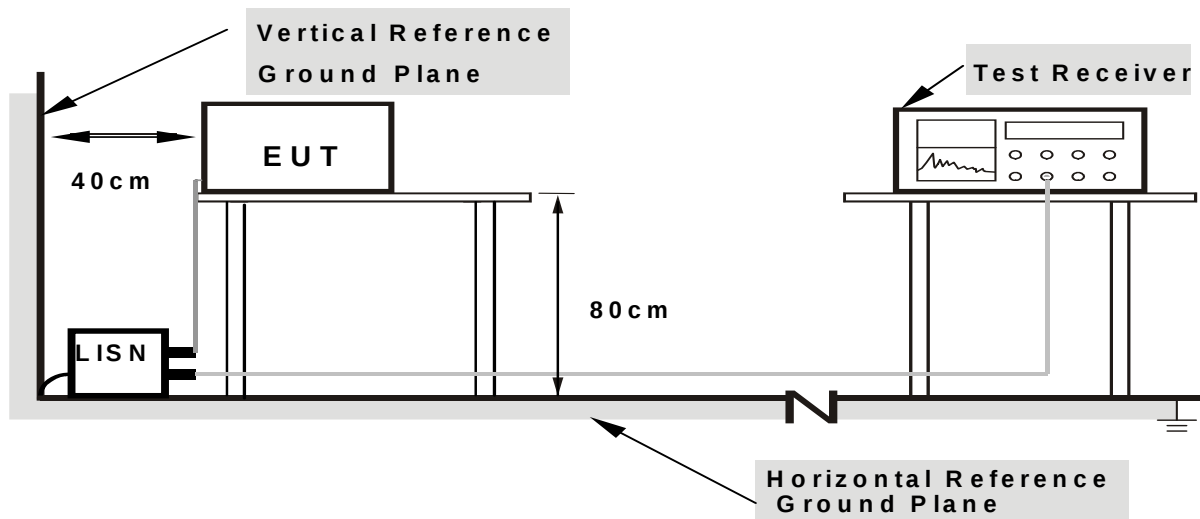

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.




- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.



6.4 Test Result

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

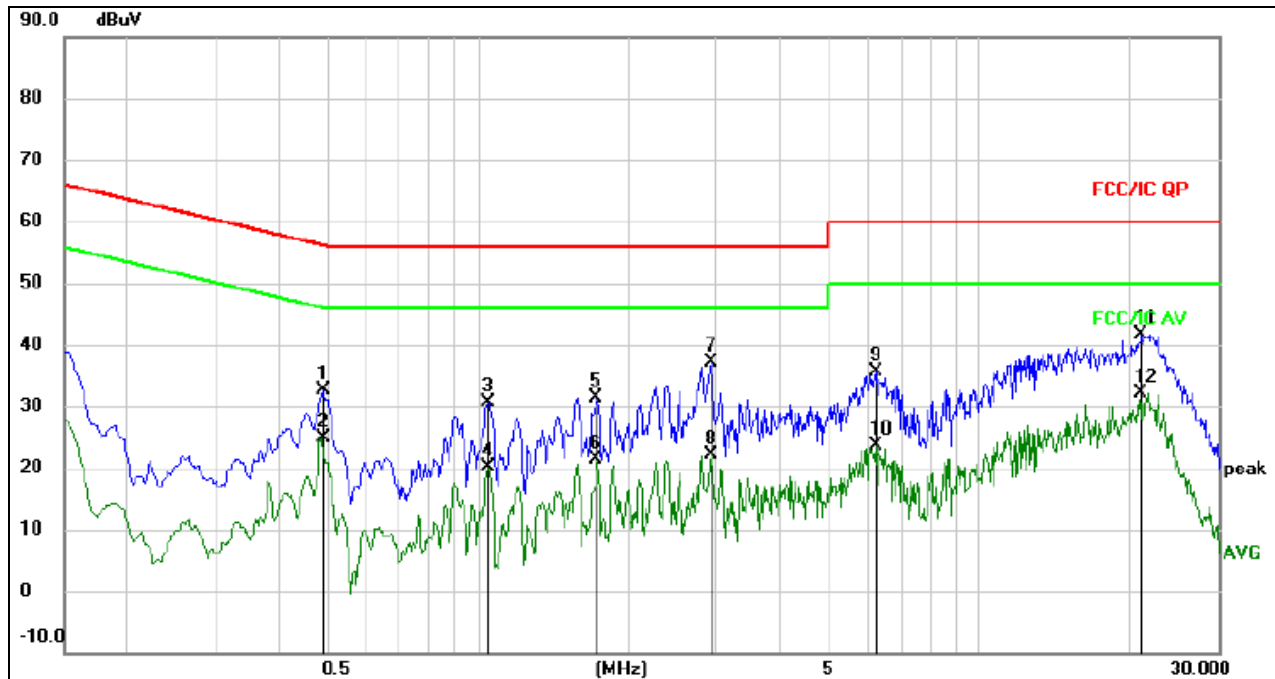


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4900	22.93	9.58	32.51	56.17	-23.66	QP	
2		0.4900	15.34	9.58	24.92	46.17	-21.25	AVG	
3		1.0500	21.06	9.57	30.63	56.00	-25.37	QP	
4		1.0500	10.46	9.57	20.03	46.00	-25.97	AVG	
5		1.7300	21.88	9.58	31.46	56.00	-24.54	QP	
6		1.7300	11.83	9.58	21.41	46.00	-24.59	AVG	
7		2.9260	27.40	9.65	37.05	56.00	-18.95	QP	
8		2.9260	12.38	9.65	22.03	46.00	-23.97	AVG	
9		6.2300	25.78	9.75	35.53	60.00	-24.47	QP	
10		6.2300	13.80	9.75	23.55	50.00	-26.45	AVG	
11		21.1420	31.94	9.78	41.72	60.00	-18.28	QP	
12	*	21.1420	22.43	9.78	32.21	50.00	-17.79	AVG	



Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

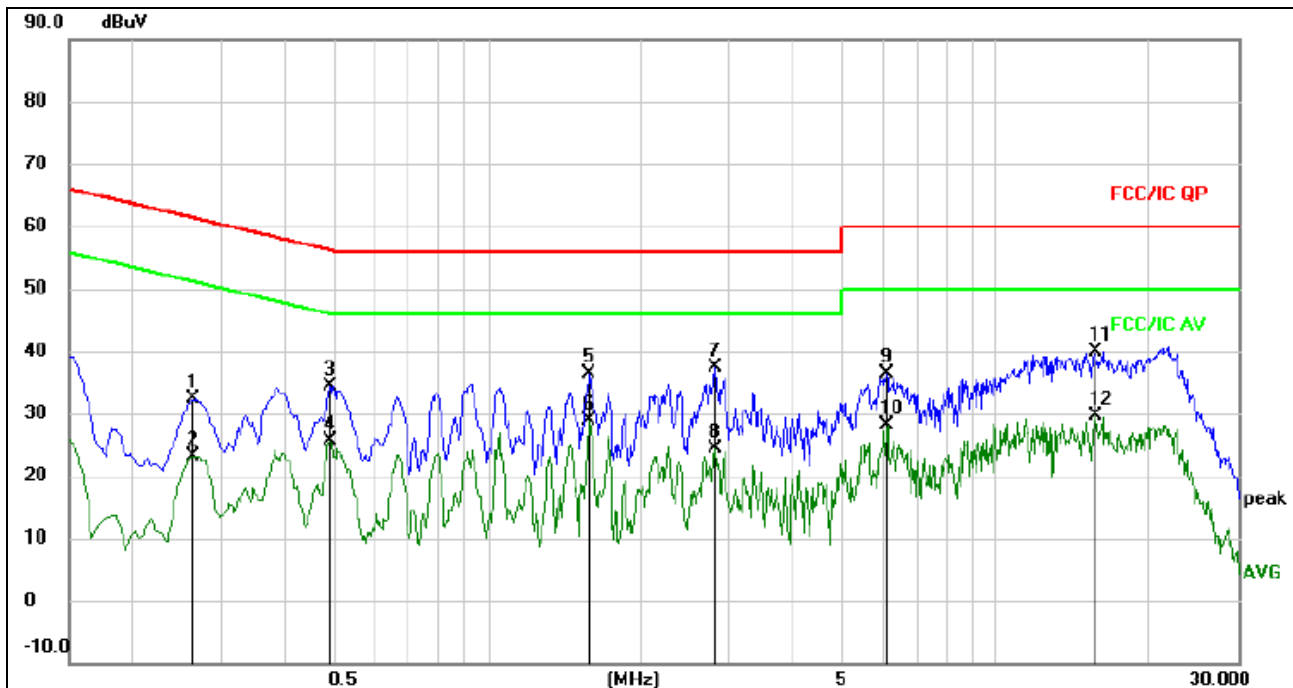

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2620	22.77	9.53	32.30	61.37	-29.07	QP	
2		0.2620	13.67	9.53	23.20	51.37	-28.17	AVG	
3		0.4900	24.86	9.58	34.44	56.17	-21.73	QP	
4		0.4900	16.09	9.58	25.67	46.17	-20.50	AVG	
5		1.5900	26.77	9.58	36.35	56.00	-19.65	QP	
6	*	1.5900	19.26	9.58	28.84	46.00	-17.16	AVG	
7		2.8100	27.64	9.65	37.29	56.00	-18.71	QP	
8		2.8100	14.82	9.65	24.47	46.00	-21.53	AVG	
9		6.1140	26.51	9.76	36.27	60.00	-23.73	QP	
10		6.1140	18.45	9.76	28.21	50.00	-21.79	AVG	
11		15.7540	30.25	9.71	39.96	60.00	-20.04	QP	
12		15.7540	19.96	9.71	29.67	50.00	-20.33	AVG	


7. RADIATED EMISSIONS

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

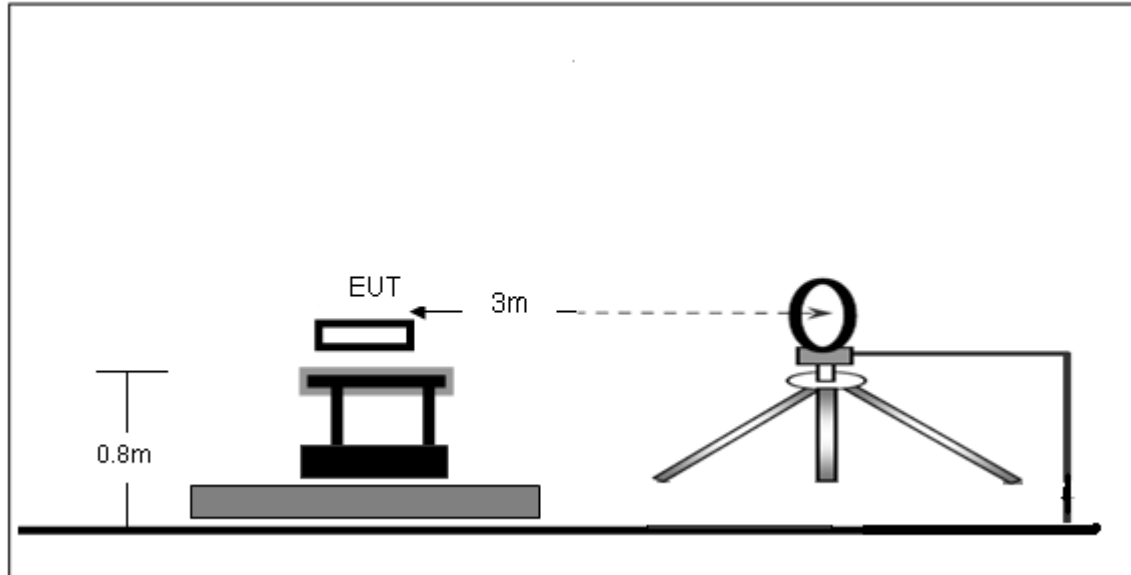

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

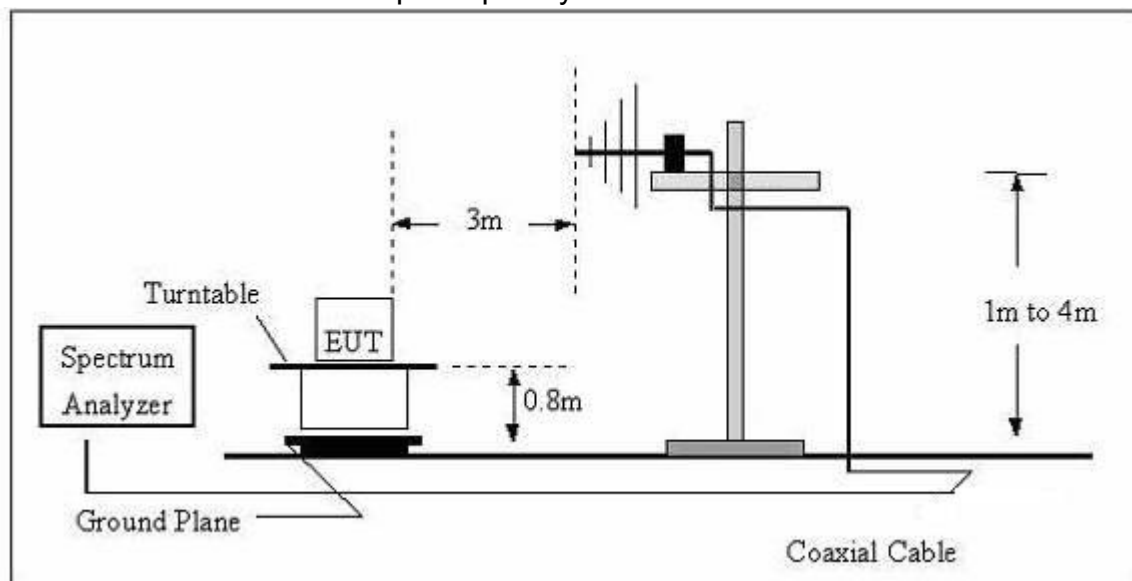

(C) Radiated Emission Test-Up Frequency Above 1GHz

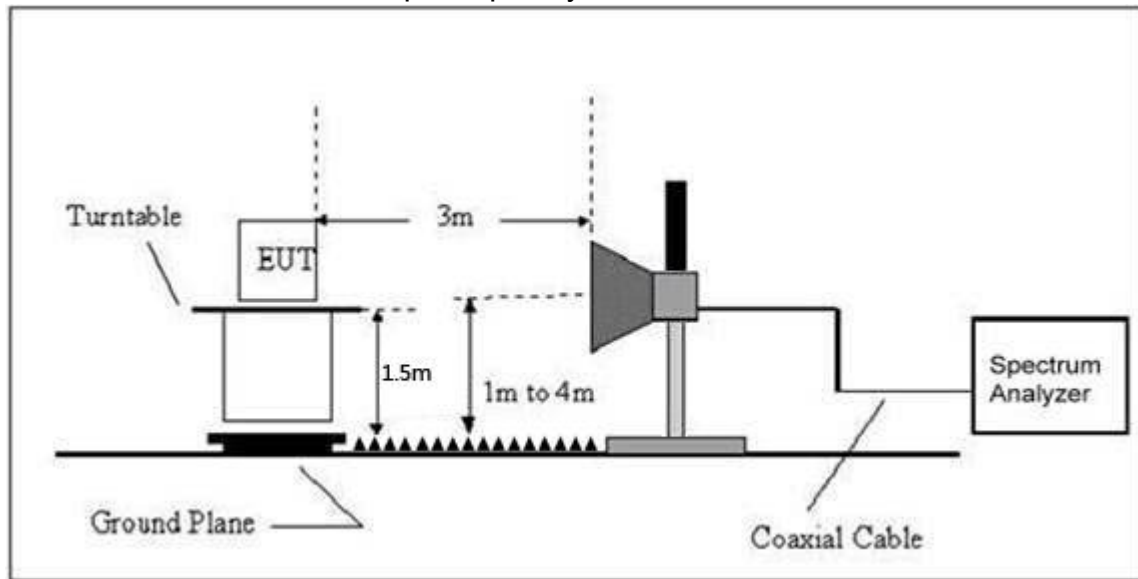

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.



7.4 Test Result

Between 9KHz – 30MHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 24V for adapter
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 24V for adapter
Test Mode :	Mode 4	Polarization :	Horizontal

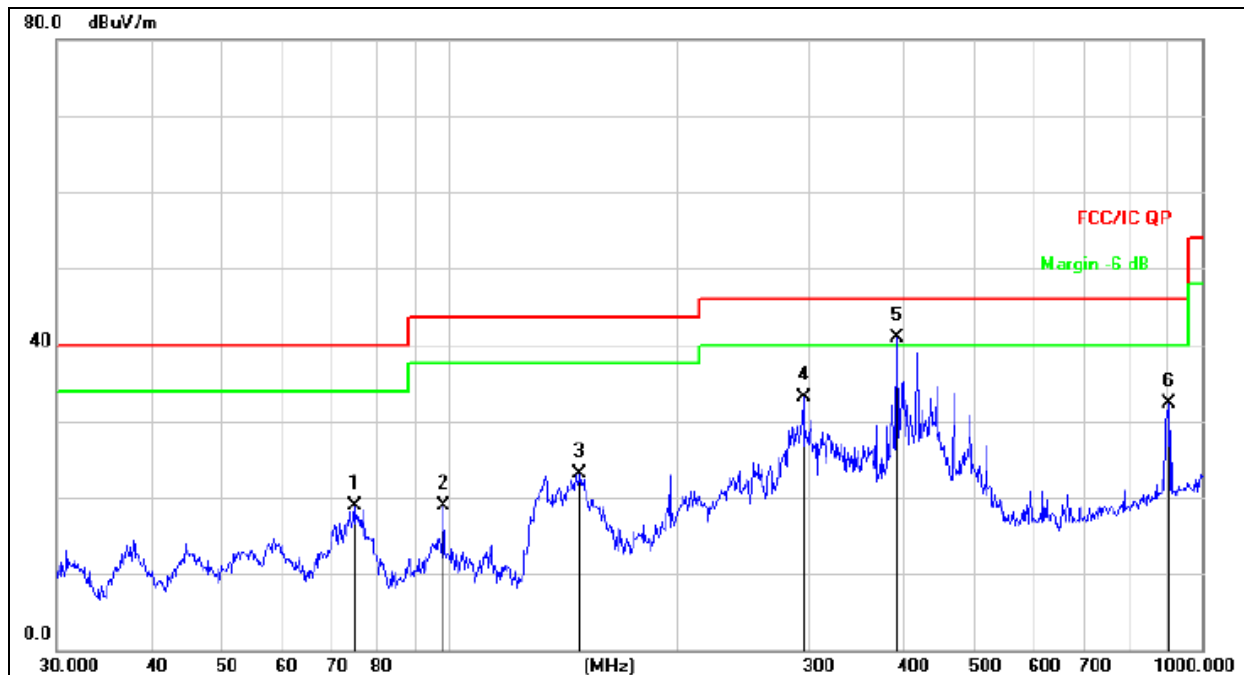


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		74.6569	38.07	-19.22	18.85	40.00	-21.15	QP
2		98.1419	35.60	-16.62	18.98	43.50	-24.52	QP
3		148.9625	42.55	-19.43	23.12	43.50	-20.38	QP
4		295.1469	46.88	-13.75	33.13	46.00	-12.87	QP
5	*	393.4723	52.18	-11.24	40.94	46.00	-5.06	QP
6		903.3094	33.77	-1.47	32.30	46.00	-13.70	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 24V for adapter
Test Mode :	Mode 4	Polarization :	Vertical

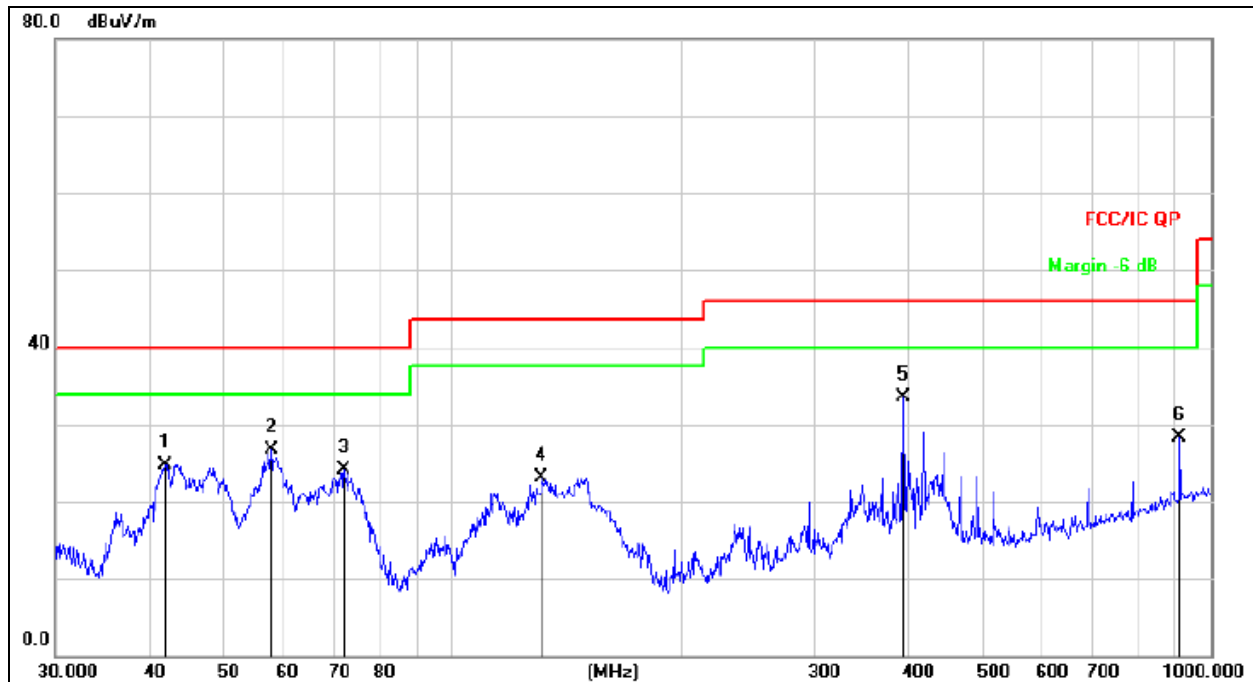

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB/m	dB Detector
1		41.8596	40.11	-15.31	24.80	40.00	-15.20 QP
2		57.7962	42.30	-15.68	26.62	40.00	-13.38 QP
3		72.0843	42.82	-18.65	24.17	40.00	-15.83 QP
4		131.2965	41.38	-18.30	23.08	43.50	-20.42 QP
5	*	393.4723	44.72	-11.24	33.48	46.00	-12.52 QP
6		909.6667	29.70	-1.42	28.28	46.00	-17.72 QP



Between 1-25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
GFSK Low Channel:2402MHz									
V	4804.00	54.23	39.55	7.85	25.66	48.19	74.00	-25.81	PK
V	4804.00	43.84	39.55	7.85	25.66	37.80	54.00	-16.20	AV
V	7206.00	50.85	38.33	7.52	24.55	44.59	74.00	-29.41	PK
V	7206.00	43.35	38.33	7.52	24.55	37.09	54.00	-16.91	AV
V	15455.39	52.37	35.23	6.75	26.59	50.48	74.00	-23.52	PK
H	4804.00	51.26	39.55	7.85	25.66	45.22	74.00	-28.78	PK
H	4804.00	43.03	39.55	7.85	25.66	36.99	54.00	-17.01	AV
H	7206.00	53.40	38.33	7.52	23.55	46.14	74.00	-27.86	PK
H	7206.00	43.29	38.33	7.52	23.22	35.70	54.00	-18.30	AV
H	15451.94	53.64	35.45	6.75	27.88	52.82	74.00	-21.18	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
GFSK Middle Channel:2441MHz									
V	4882.00	54.44	38.89	7.57	25.45	48.57	74.00	-25.43	PK
V	4882.00	43.69	38.89	7.57	25.45	37.82	54.00	-16.18	AV
V	7323.00	51.74	38.78	7.35	24.78	45.09	74.00	-28.91	PK
V	7323.00	43.68	38.78	7.35	24.78	37.03	54.00	-16.97	AV
V	15454.64	51.31	35.89	6.42	26.47	48.31	74.00	-25.69	PK
H	4882.00	52.23	38.89	7.57	25.45	46.36	74.00	-27.64	PK
H	4882.00	43.54	38.89	7.57	25.45	37.67	54.00	-16.33	AV
H	7323.00	53.22	38.78	7.35	24.78	46.57	74.00	-27.43	PK
H	7323.00	43.76	38.78	7.35	24.78	37.11	54.00	-16.89	AV
H	15456.38	54.22	36.68	6.42	26.65	50.61	74.00	-23.39	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detecto r Type
GFSK High Channel:2480MHz									
V	4960.00	53.65	38.75	7.46	25.45	47.81	74.00	-26.19	PK
V	4960.00	43.79	38.75	7.46	25.45	37.95	54.00	-16.05	AV
V	7440.00	52.08	38.65	7.22	24.78	45.43	74.00	-28.57	PK
V	7440.00	43.89	38.65	7.22	24.78	37.24	54.00	-16.76	AV
V	15454.21	51.48	35.58	6.35	26.47	48.72	74.00	-25.28	PK
H	4960.00	54.42	38.75	7.46	25.45	48.58	74.00	-25.42	PK
H	4960.00	43.59	38.75	7.46	25.45	37.75	54.00	-16.25	AV
H	7440.00	50.70	38.65	7.22	24.78	44.05	74.00	-29.95	PK
H	7440.00	43.88	38.65	7.22	24.78	37.23	54.00	-16.77	AV
H	15452.48	50.36	36.42	6.32	26.65	46.91	74.00	-27.09	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. All the Modulation are test, the worst mode is GFSK, the data recording in the report.



7.5 RADIATED Band EMISSION MEASUREMENT

Test Requirement:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
GFSK	Low Channel 2402MHz									
	H	2390.00	61.76	38.06	7.42	20.15	51.27	74.00	54.00	PASS
	H	2400.00	52.20	38.06	7.42	20.15	41.71	74.00	54.00	PASS
	V	2390.00	60.89	38.06	7.42	20.15	50.40	74.00	54.00	PASS
	V	2400.00	54.79	38.06	7.42	20.15	44.30	74.00	54.00	PASS
	High Channel 2480MHz									
	H	2483.50	63.32	38.17	7.45	20.54	53.14	74.00	54.00	PASS
	H	2485.50	52.56	38.17	7.45	20.54	42.38	74.00	54.00	PASS
	V	2483.50	60.14	38.2	7.45	20.54	49.93	74.00	54.00	PASS
	V	2485.50	55.21	38.2	7.45	20.54	45.00	74.00	54.00	PASS
Pi/4DQPSK	Low Channel 2402MHz									
	H	2390.00	59.86	38.06	7.42	20.15	49.37	74.00	54.00	PASS
	H	2400.00	54.65	38.06	7.42	20.15	44.16	74.00	54.00	PASS
	V	2390.00	61.28	38.06	7.42	20.15	50.79	74.00	54.00	PASS
	V	2400.00	54.10	38.06	7.42	20.15	43.61	74.00	54.00	PASS
	High Channel 2480MHz									
	H	2483.50	62.42	38.17	7.45	20.54	52.24	74.00	54.00	PASS
	H	2485.50	52.23	38.17	7.45	20.54	42.05	74.00	54.00	PASS
	V	2483.50	60.33	38.2	7.45	20.54	50.12	74.00	54.00	PASS
	V	2485.50	51.05	38.2	7.45	20.54	40.84	74.00	54.00	PASS
8DPSK	Low Channel 2402MHz									
	H	2390.00	62.51	38.06	7.42	20.15	52.02	74.00	54.00	PASS
	H	2400.00	55.27	38.06	7.42	20.15	44.78	74.00	54.00	PASS
	V	2390.00	63.84	38.06	7.42	20.15	53.35	74.00	54.00	PASS
	V	2400.00	53.81	38.06	7.42	20.15	43.32	74.00	54.00	PASS
	High Channel 2480MHz									
	H	2483.50	60.67	38.17	7.45	20.54	50.49	74.00	54.00	PASS
	H	2485.50	55.56	38.17	7.45	20.54	45.38	74.00	54.00	PASS
	V	2483.50	61.51	38.2	7.45	20.54	51.30	74.00	54.00	PASS
	V	2485.50	53.79	38.2	7.45	20.54	43.58	74.00	54.00	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.										

8. CONDUCTED EMISSION

8.1 Block Diagram Of Test Setup

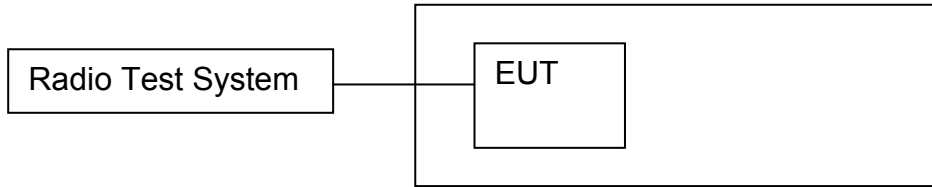

8.2 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold




8.4 Test Result

30MHz – 25GHz GFSK Low Channel

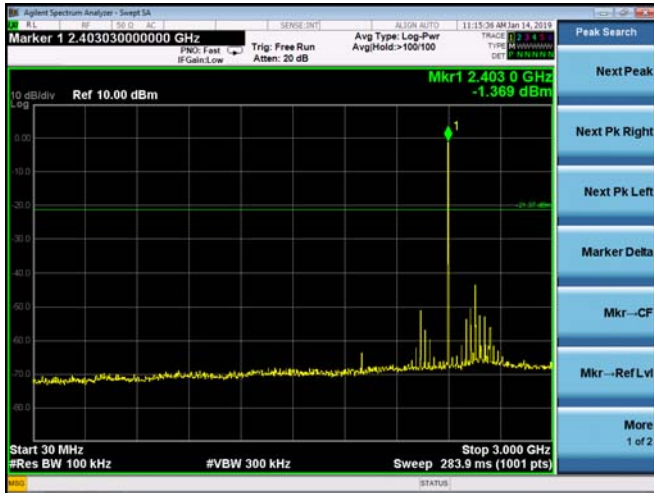


GFSK Middle Channel

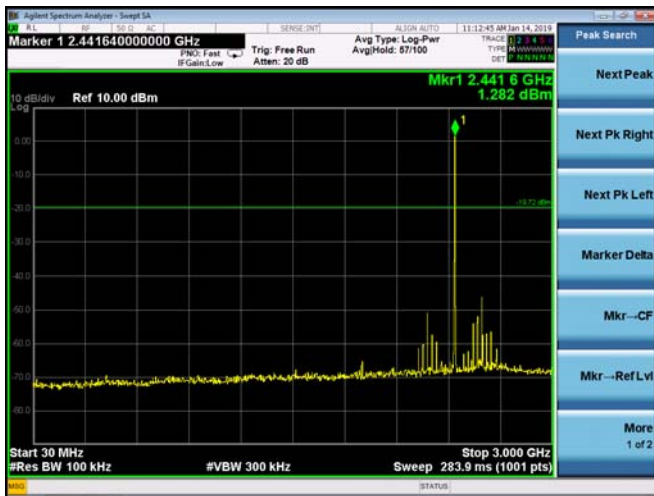




GFSK High Channel

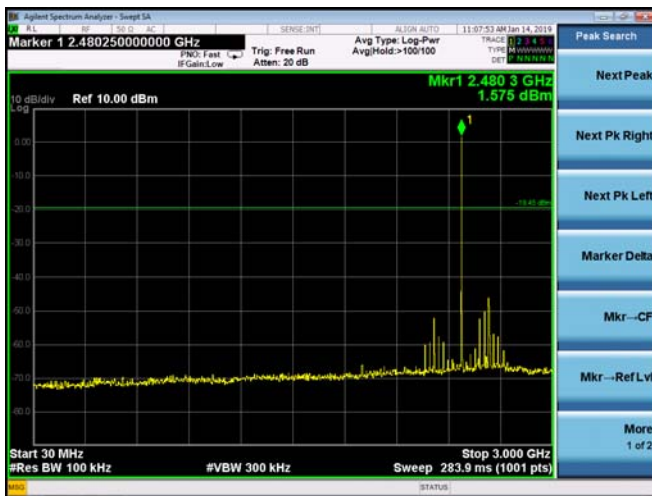


Pi/4 DQPSK Low Channel

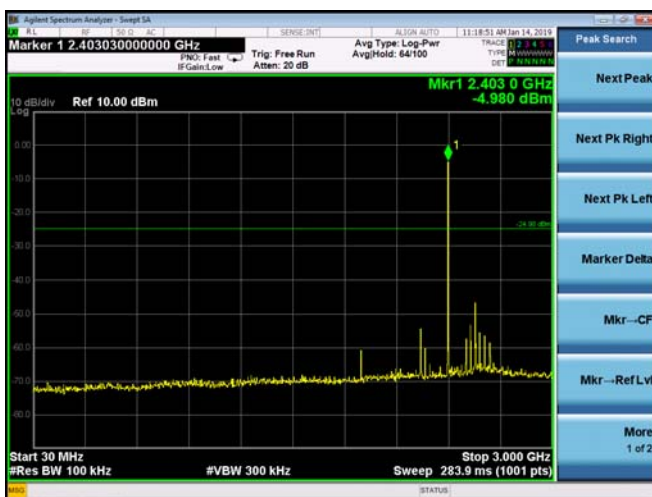




Pi/4 DQPSK Middle Channel

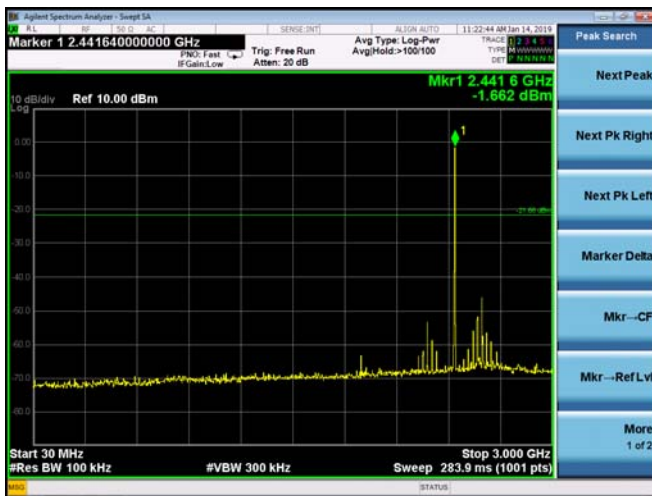


Pi/4 DQPSK High Channel

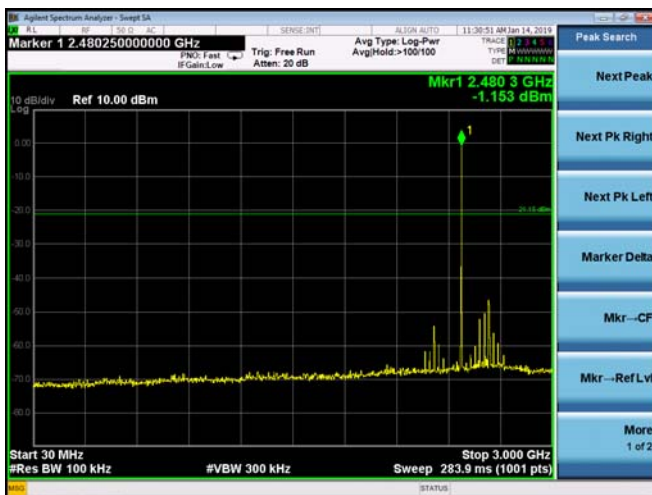




8DPSK Low Channel

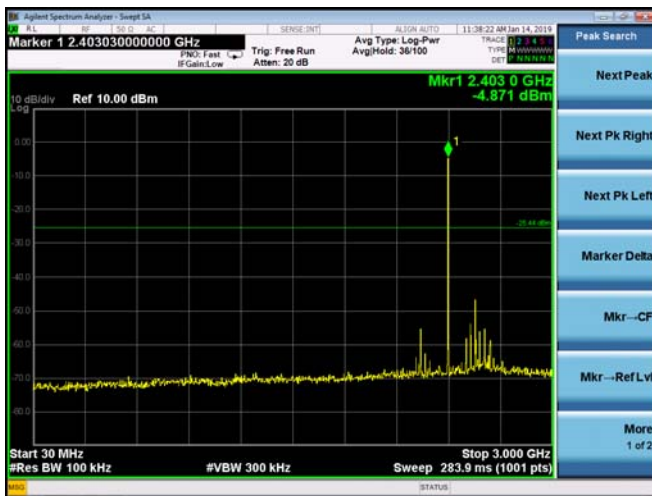


8DPSK Middle Channel

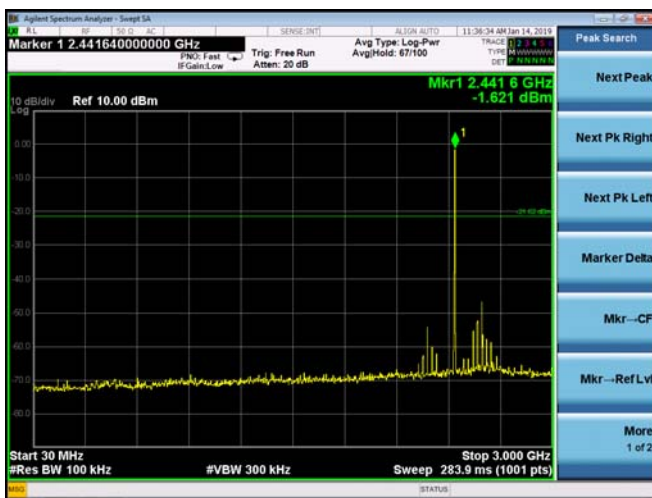




8DPSK High Channel

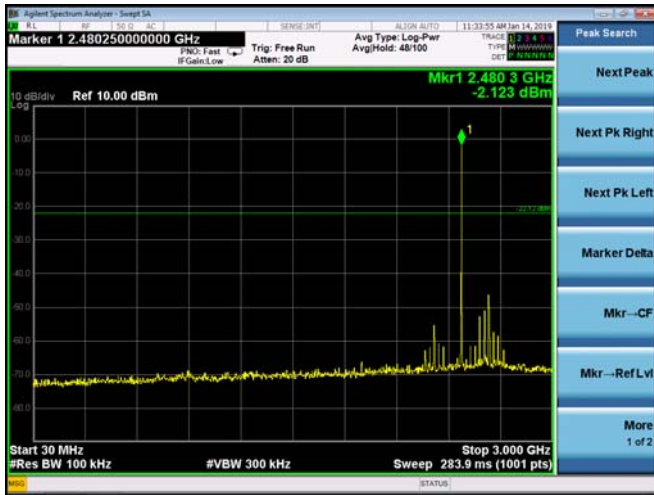




GFSK Transmitting Band edge-left side

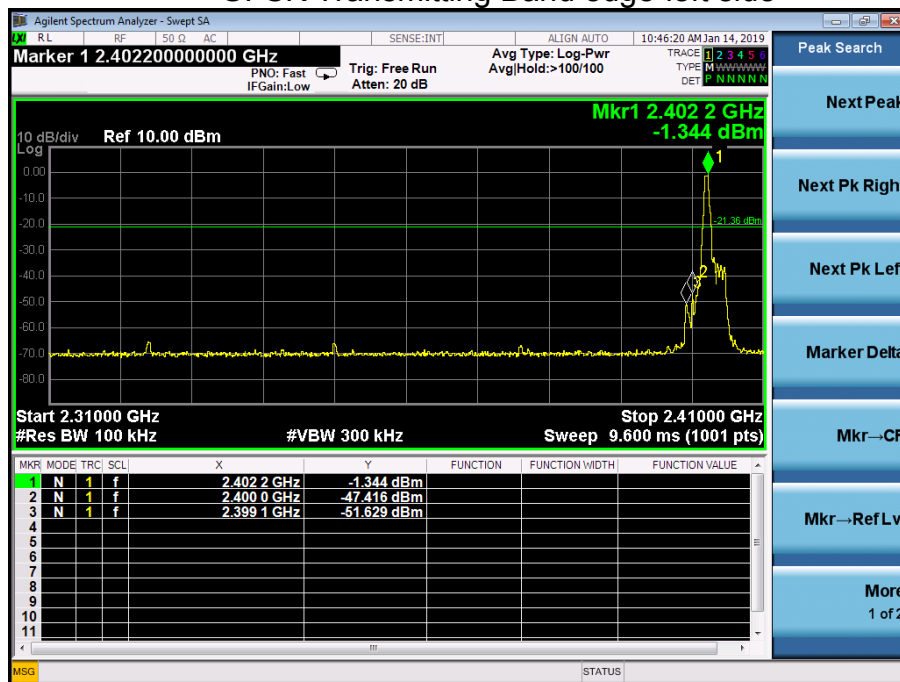


GFSK Hopping Band edge-left side

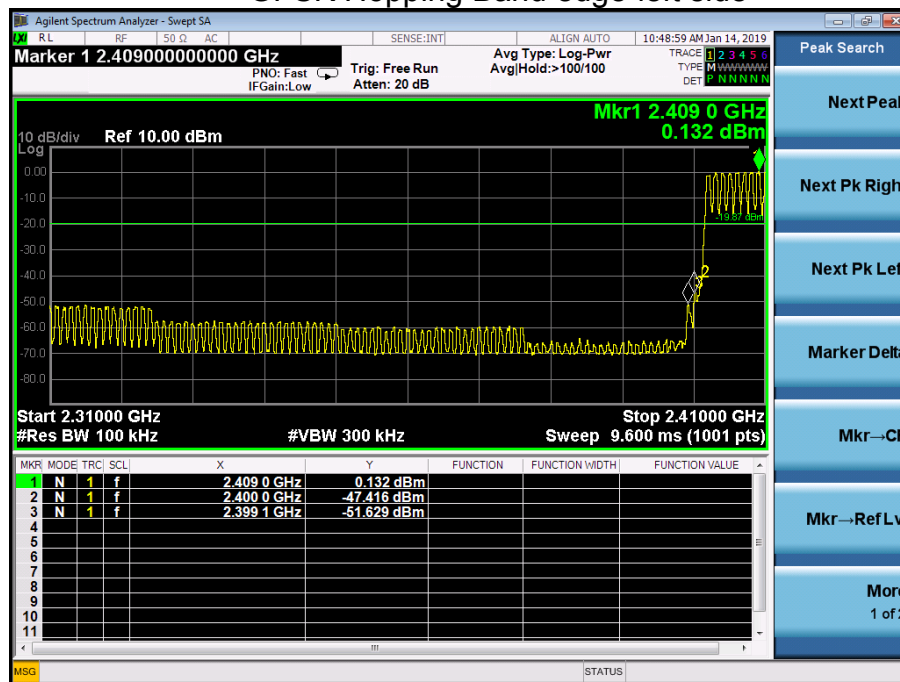




GFSK Transmitting Band edge-right side

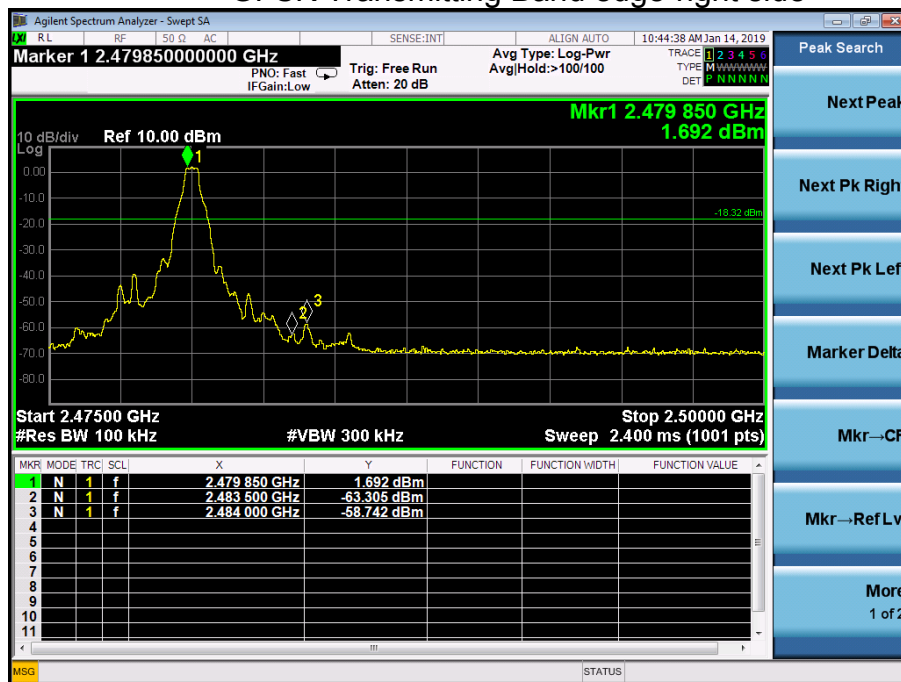


GFSK Hopping Band edge-right side

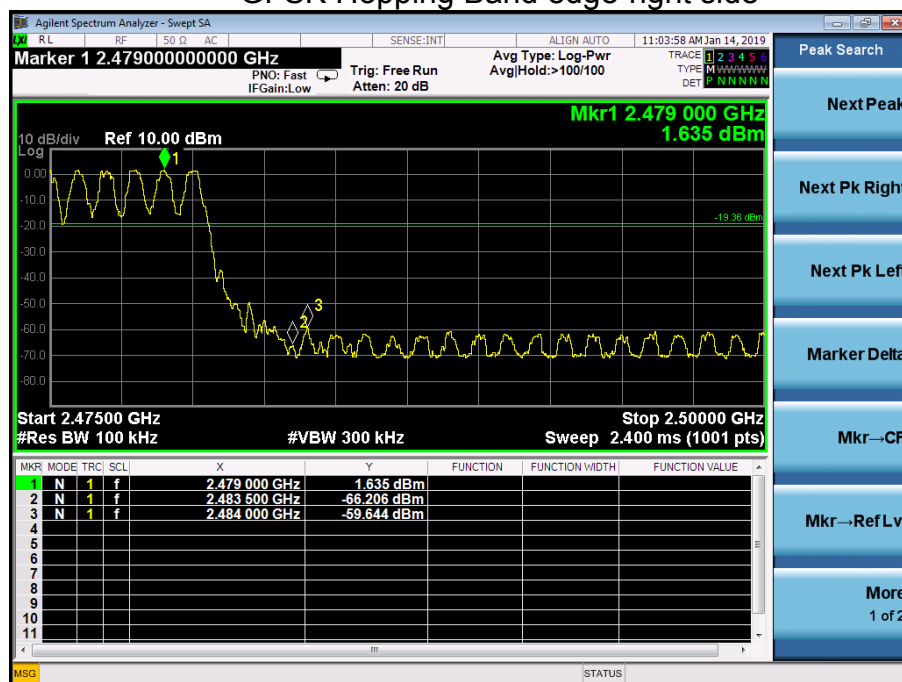




Pi/4 DQPSK Transmitting Band edge-left side

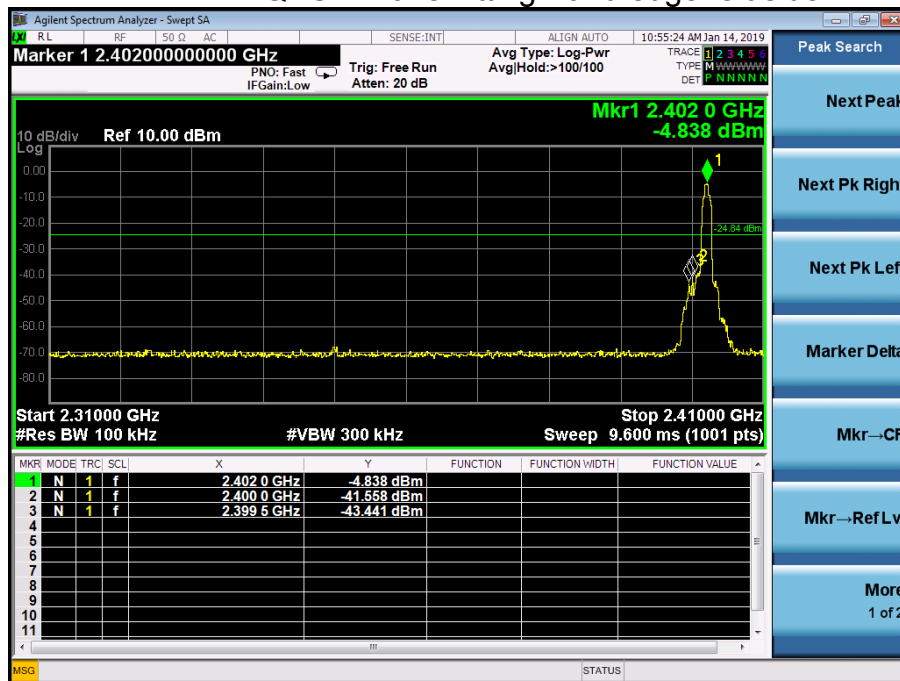


Pi/4 DQPSK Hopping Band edge-left side

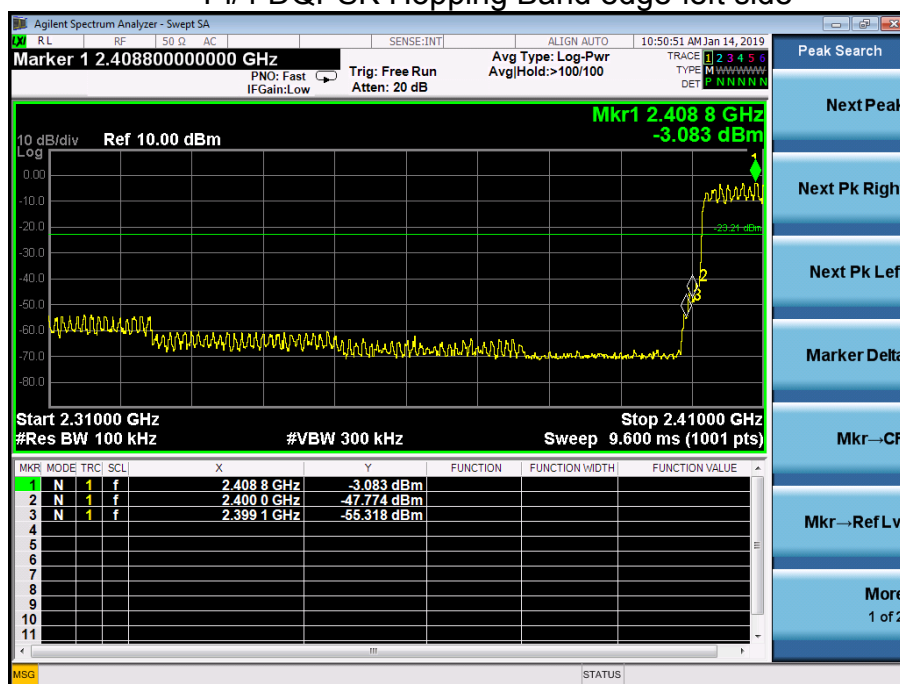




Pi/4 DQPSK Transmitting Band edge-right side

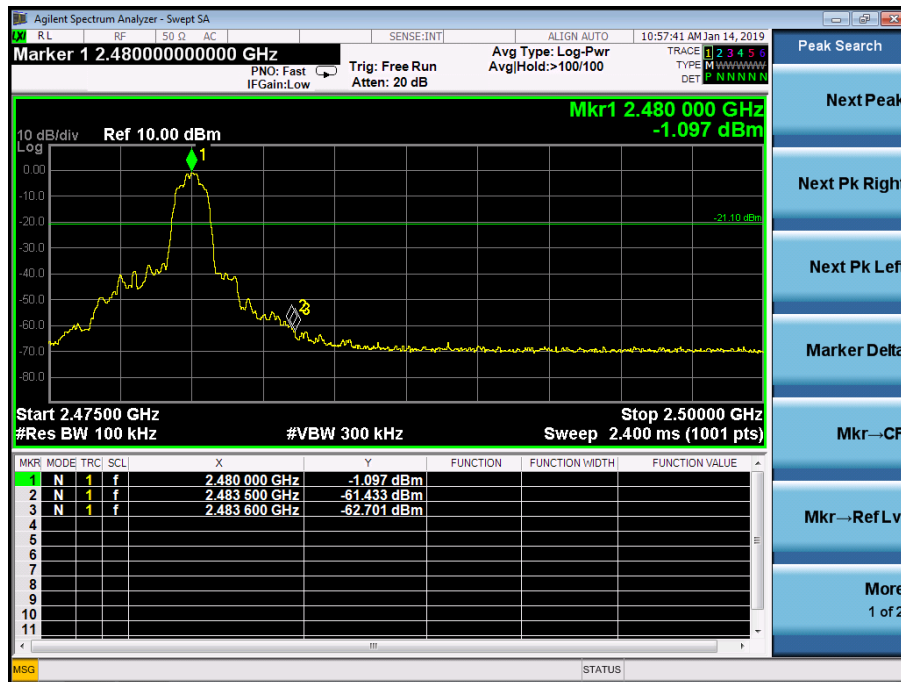


Pi/4 DQPSK Hopping Band edge-right side

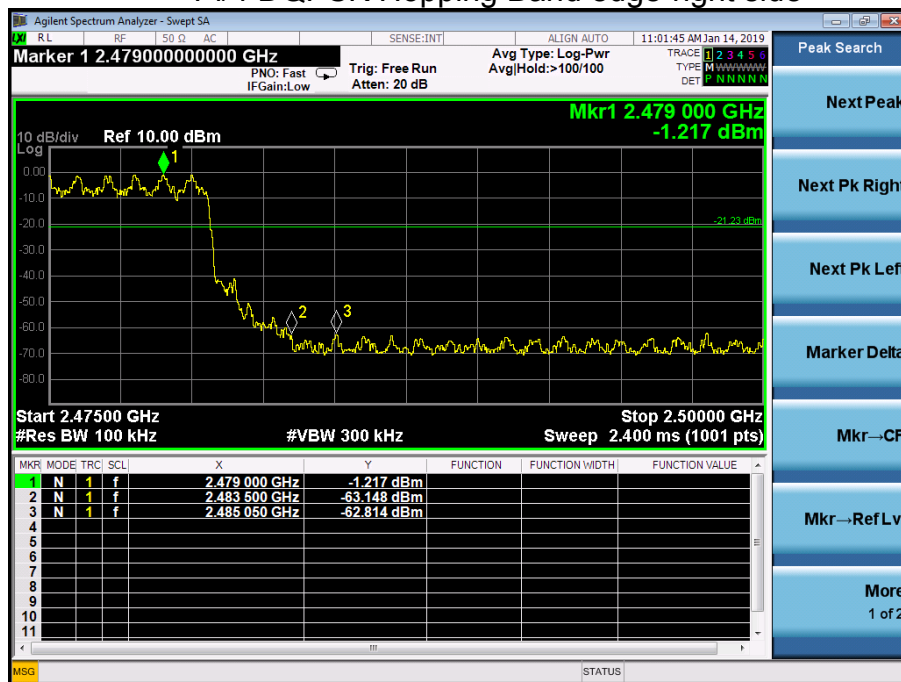




8DPSK Transmitting Band edge-left side

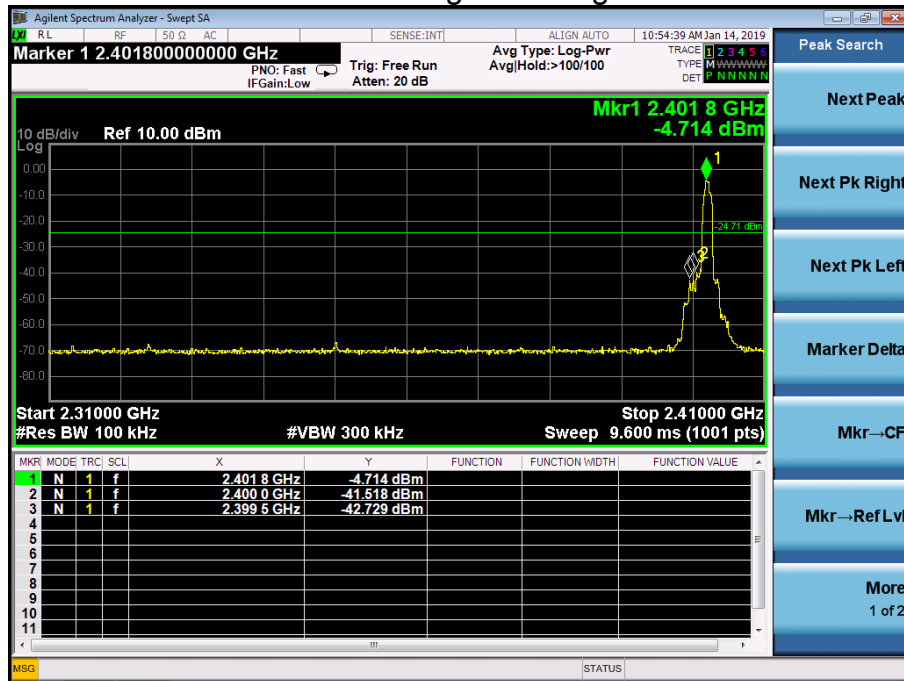


8DPSK Hopping Band edge-left side

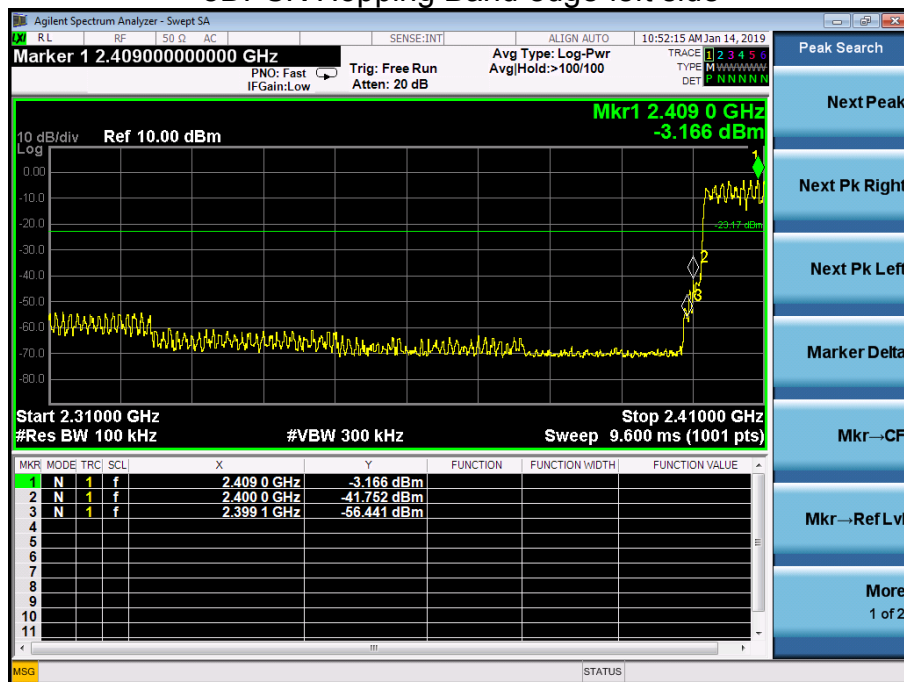




8DPSK Transmitting Band edge-right side

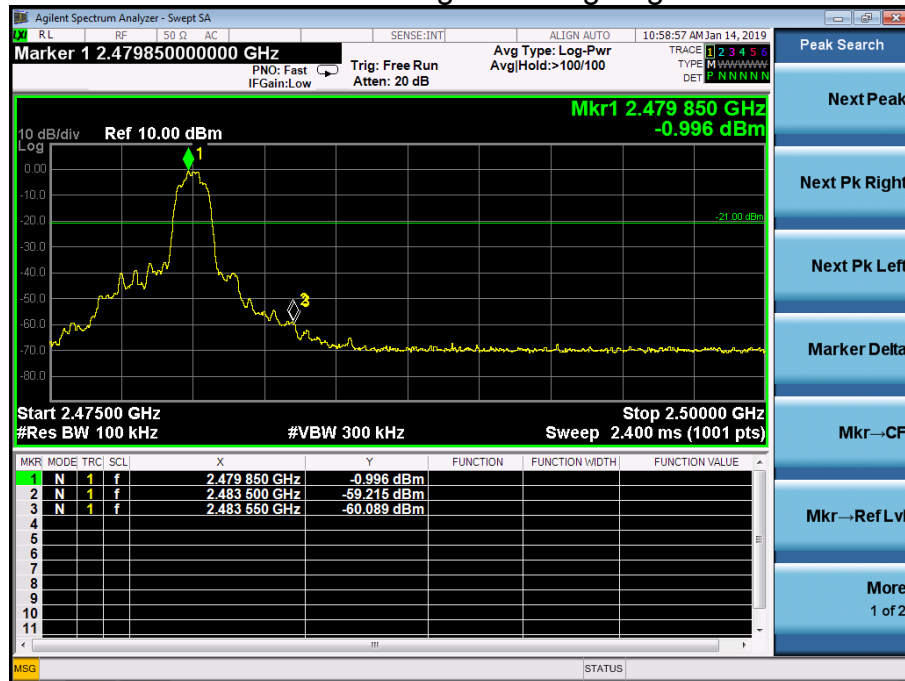


8DPSK Hopping Band edge-right side

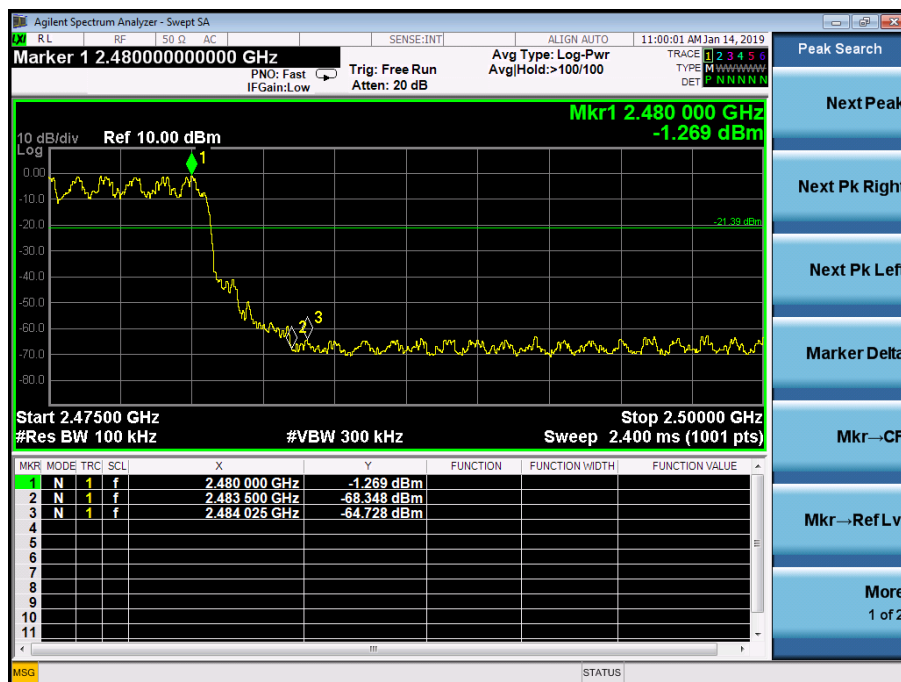

9. 20 DB BANDWIDTH

9.1 Block Diagram Of Test Setup

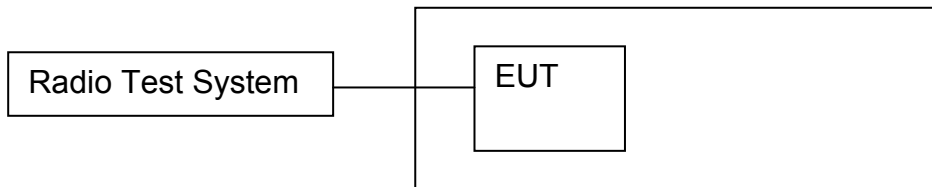

9.2 Limit

N/A

9.3 Test procedure


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



9.4 Test Result


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	1.115
GFSK	Middle	1.120
GFSK	High	1.116
Pi/4 DQPSK	Low	1.399
Pi/4 DQPSK	Middle	1.399
Pi/4 DQPSK	High	1.397
8DPSK	Low	1.401
8DPSK	Middle	1.404
8DPSK	High	1.413

Test plots
GFSK Low Channel

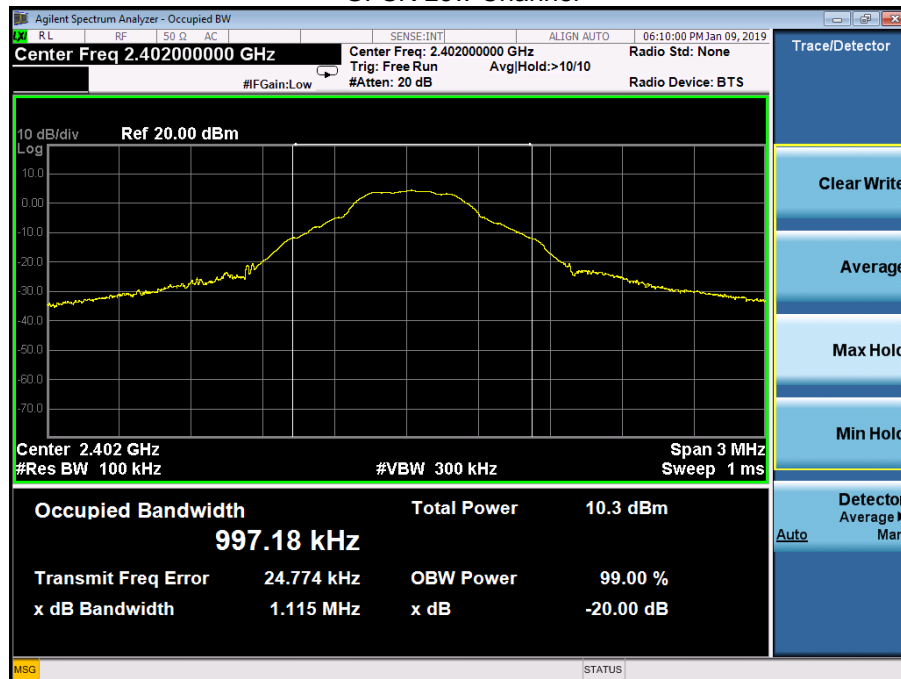



GFSK Middle Channel

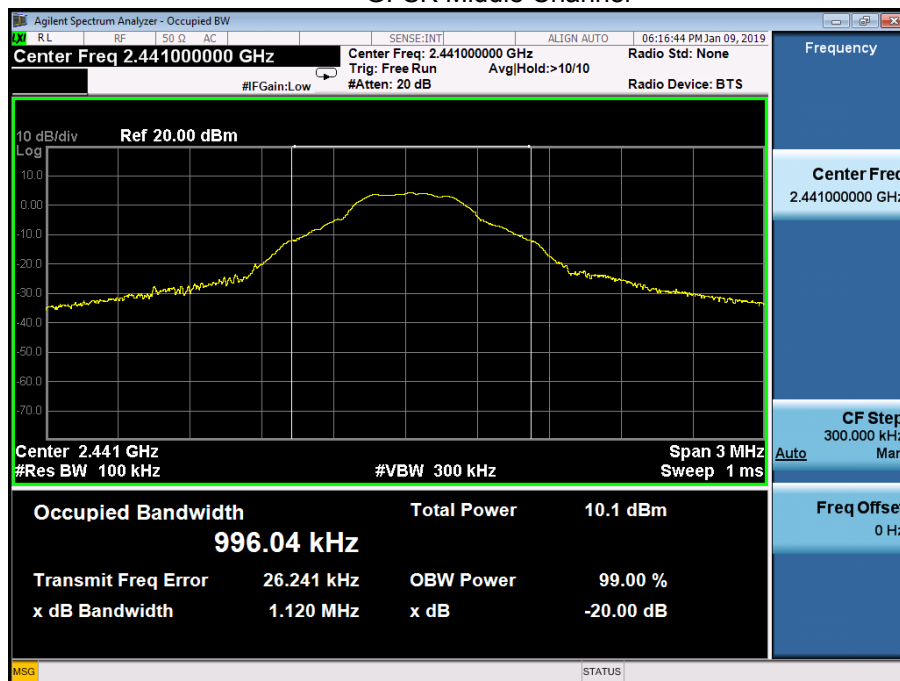

GFSK High Channel





Pi/4 DQPSK Low Channel



Pi/4 DQPSK Middle Channel






Pi/4 DQPSK High Channel




8DPSK Low Channel

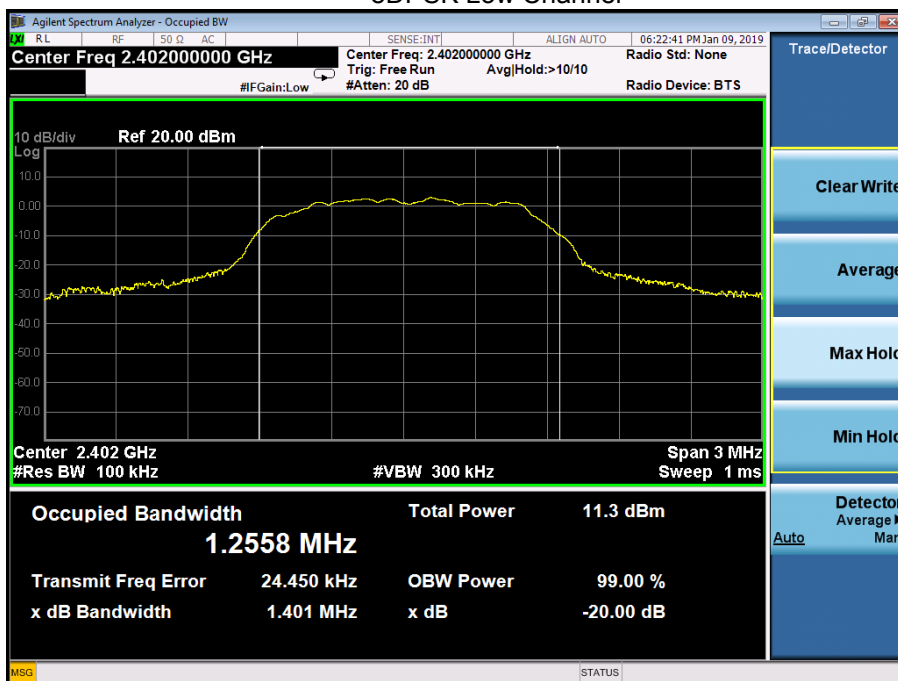




8DPSK Middle Channel

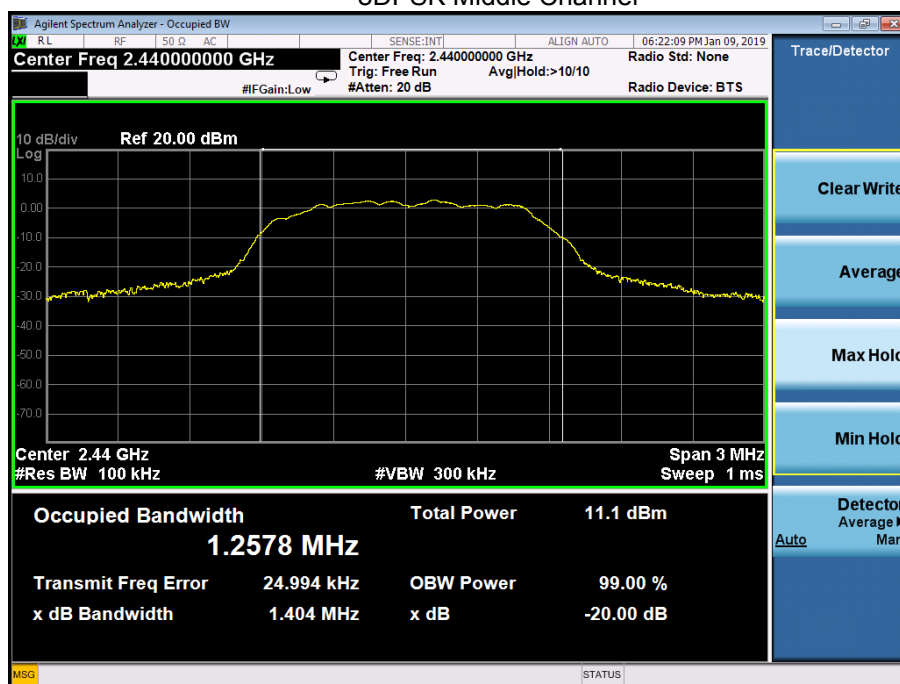


8DPSK High Channel

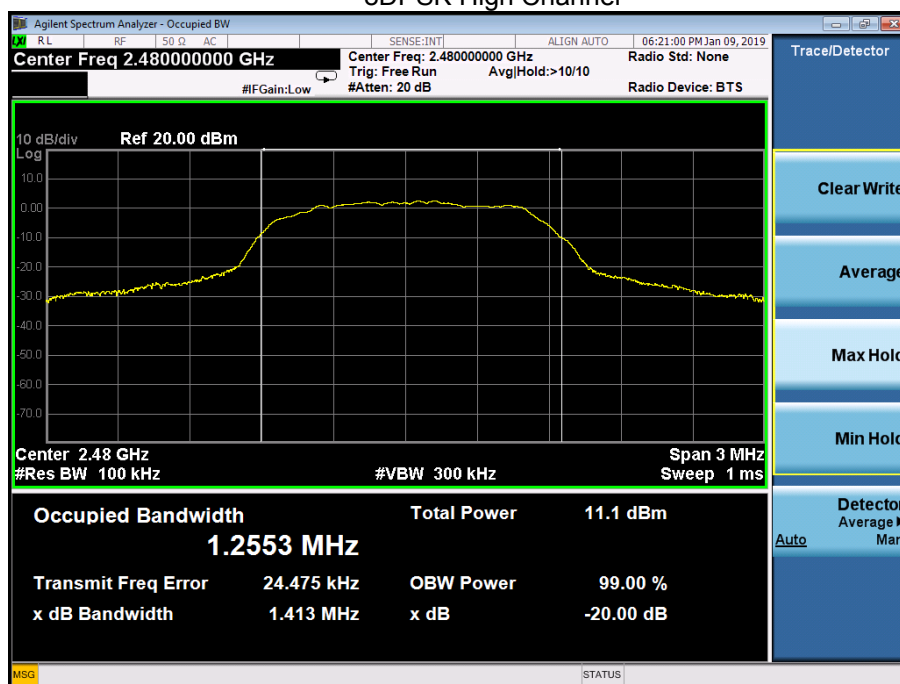



10. MAXIMUM PEAK OUTPUT POWER

10.1 Block Diagram Of Test Setup

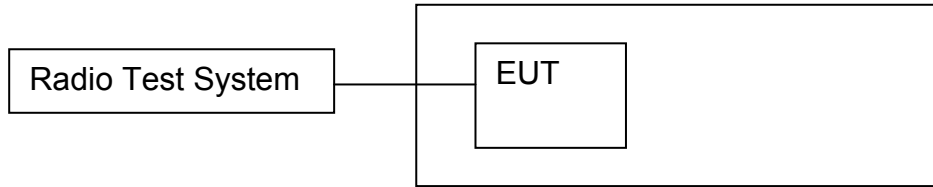

10.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



10.4 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-1.165	21
GFSK	Middle	1.502	21
GFSK	High	1.769	21
Pi/4 DQPSK	Low	-3.463	21
Pi/4 DQPSK	Middle	-0.280	21
Pi/4 DQPSK	High	0.232	21
8DPSK	Low	-3.056	21
8DPSK	Middle	0.043	21
8DPSK	High	0.528	21

Test plots
GFSK Low Channel

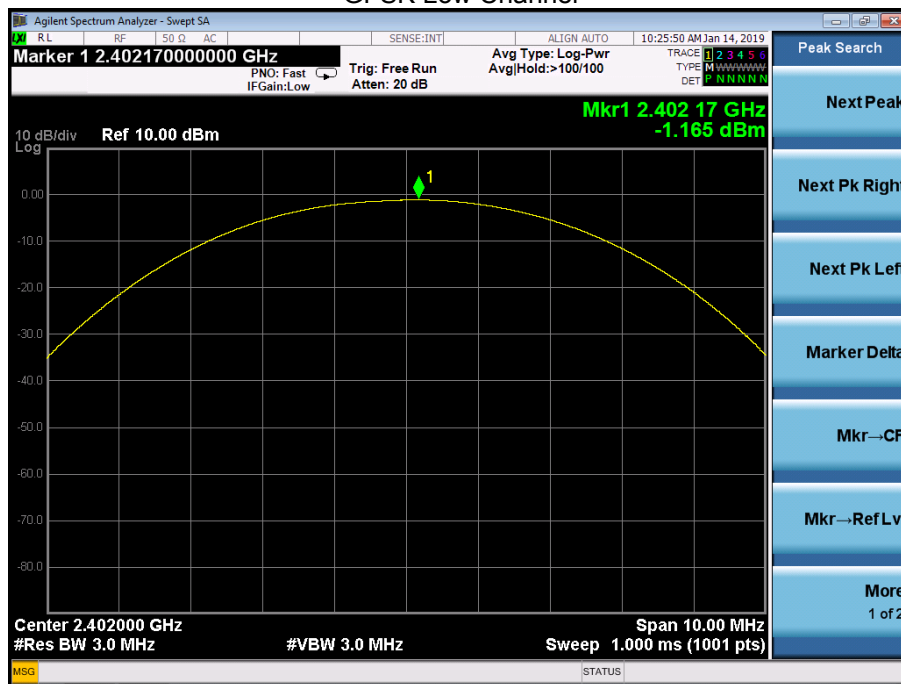




GFSK Middle Channel

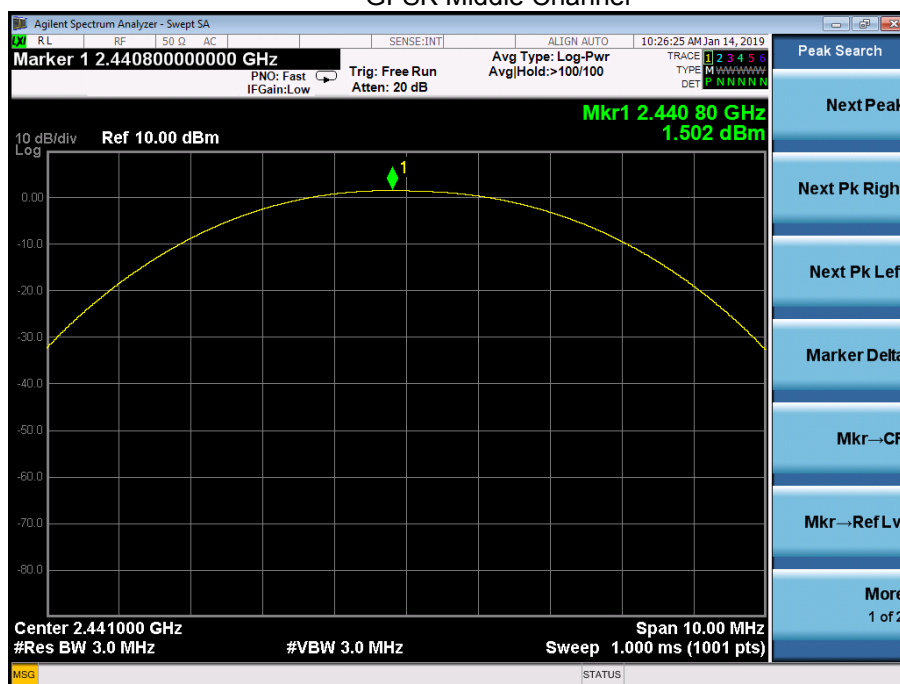


GFSK High Channel

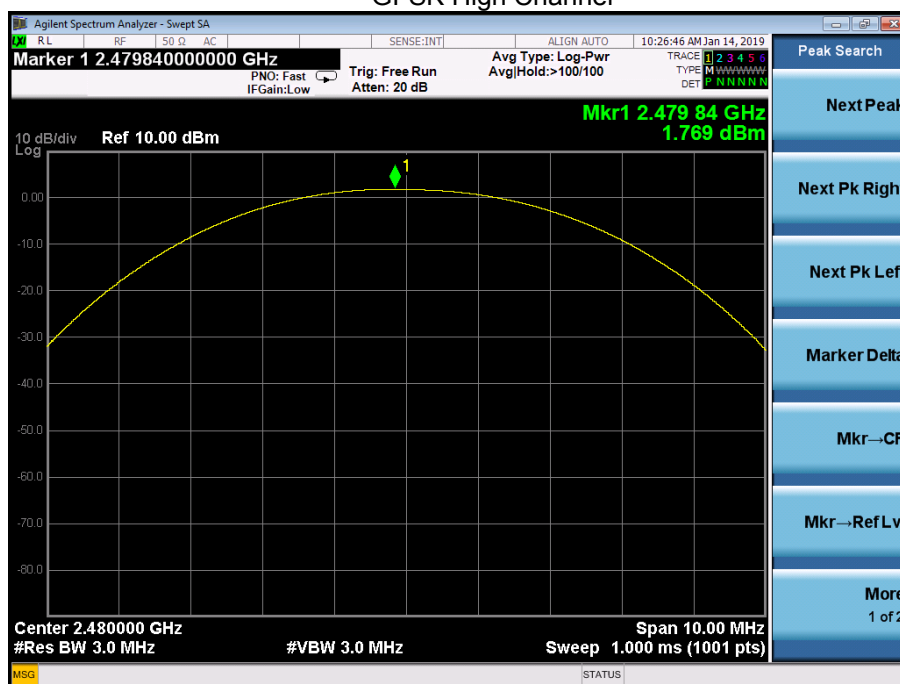




Pi/4 DQPSK Low Channel

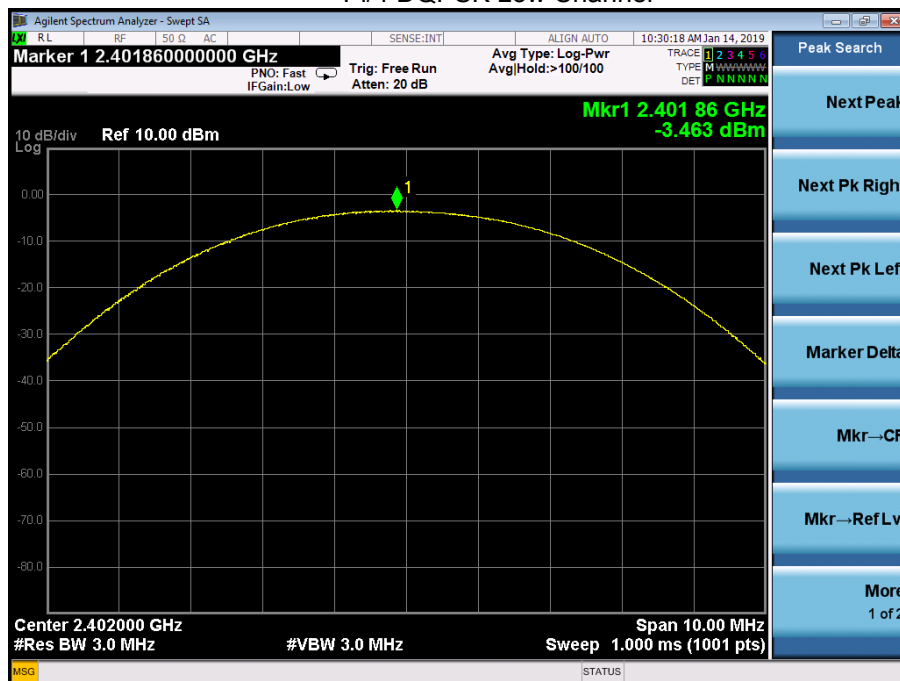


Pi/4 DQPSK Middle Channel

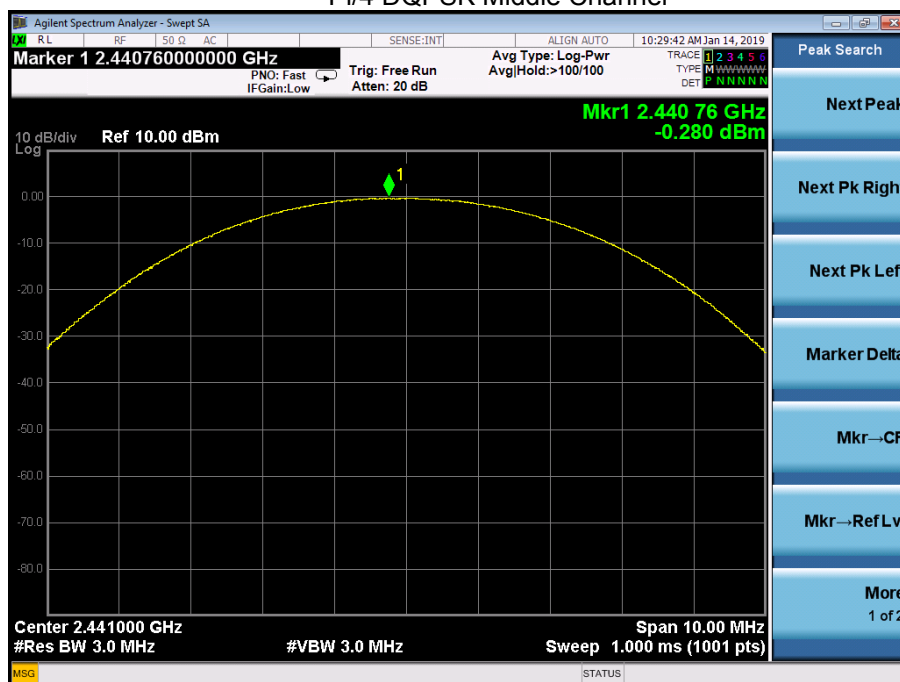




Pi/4 DQPSK High Channel

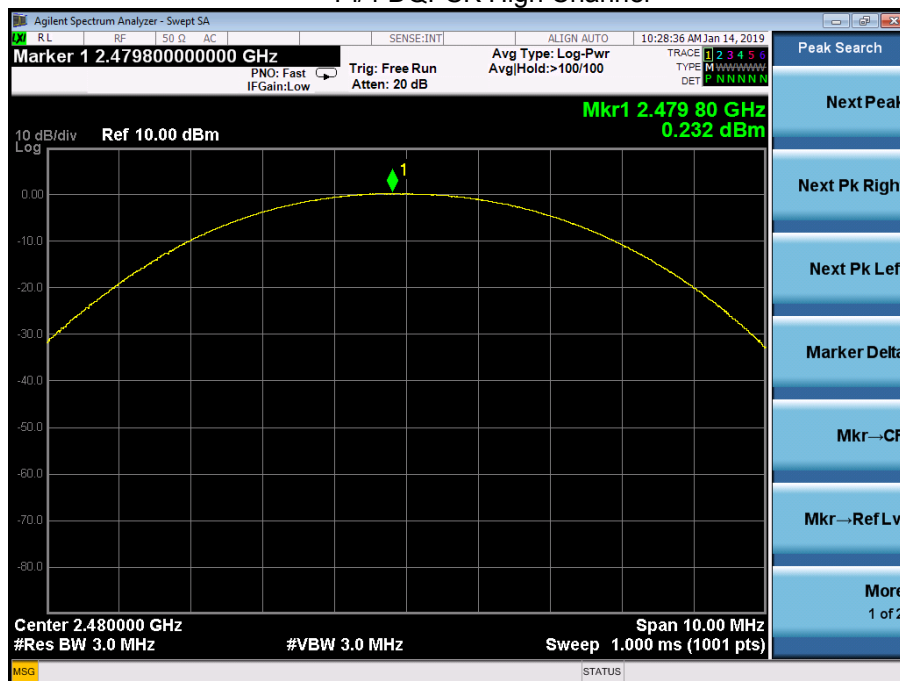


8DPSK Low Channel

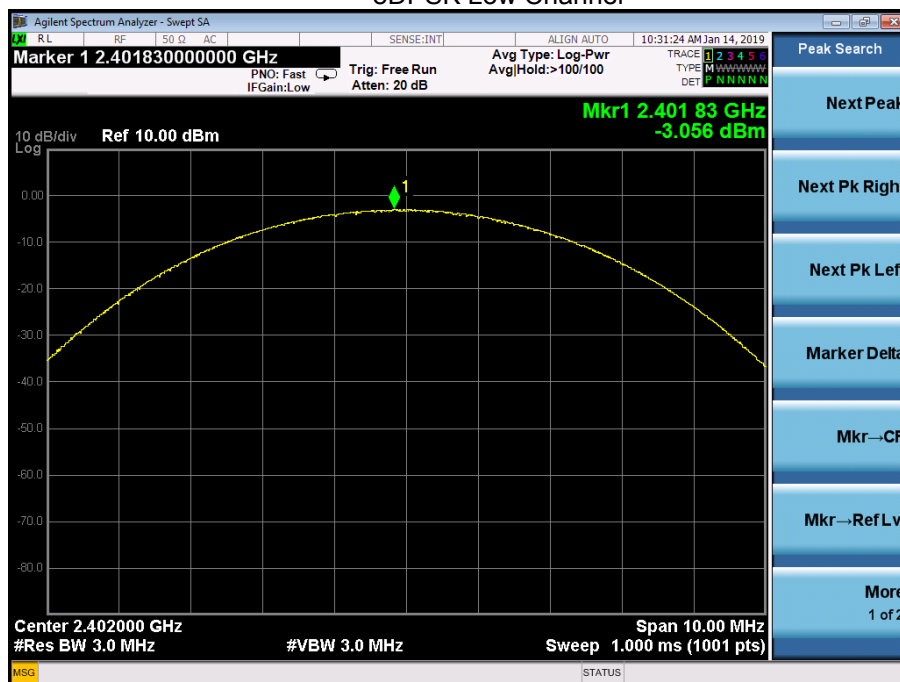




8DPSK Middle Channel

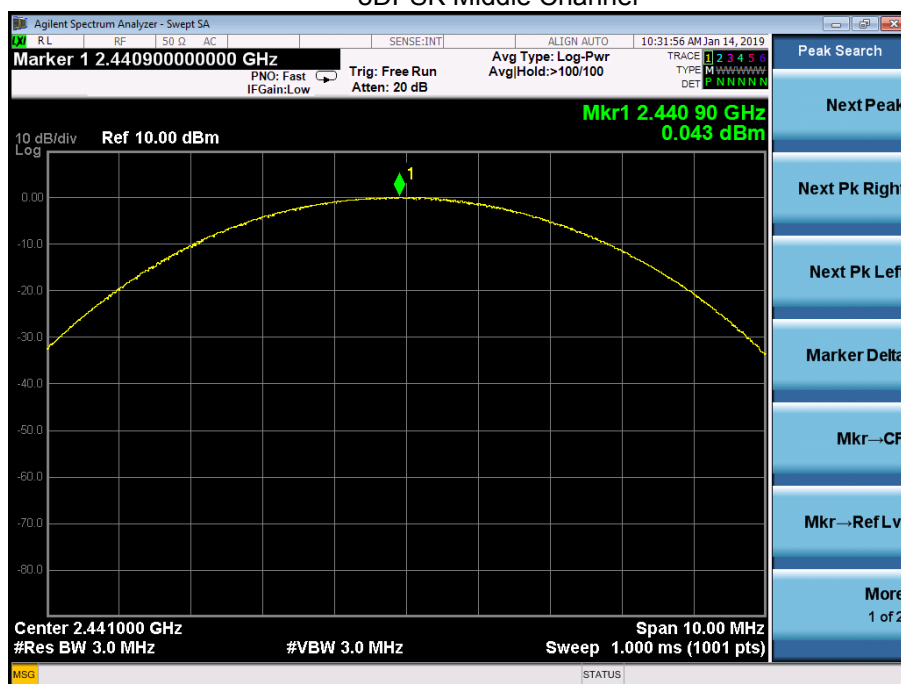


8DPSK High Channel

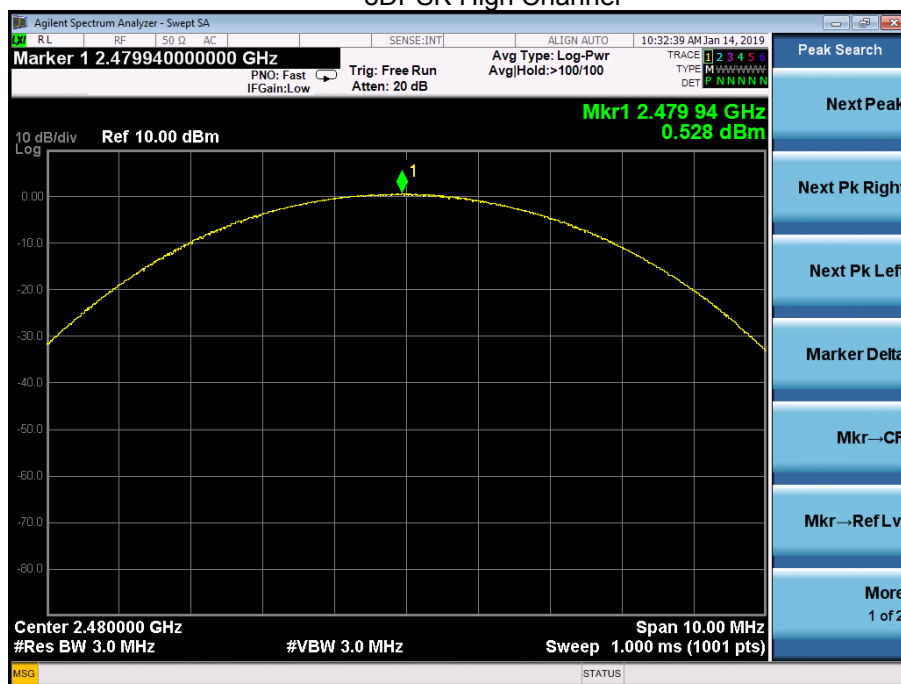

11. HOPPING CHANNEL SEPARATION

11.1 Block Diagram Of Test Setup

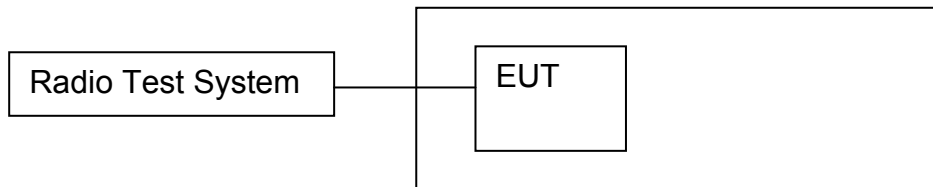

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



11.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.012	0.743	PASS
GFSK	Middle	0.996	0.747	PASS
GFSK	High	1.006	0.744	PASS
Pi/4 DQPSK	Low	1.004	0.933	PASS
Pi/4 DQPSK	Middle	1.000	0.933	PASS
Pi/4 DQPSK	High	1.002	0.931	PASS
8DPSK	Low	0.984	0.934	PASS
8DPSK	Middle	0.982	0.936	PASS
8DPSK	High	1.004	0.942	PASS

Test plots
GFSK Low Channel





GFSK Middle Channel



GFSK High Channel





Pi/4 DQPSK Low Channel



Pi/4 DQPSK Middle Channel





Pi/4 DQPSK High Channel



8DPSK Low Channel






8DPSK Middle Channel




8DPSK High Channel

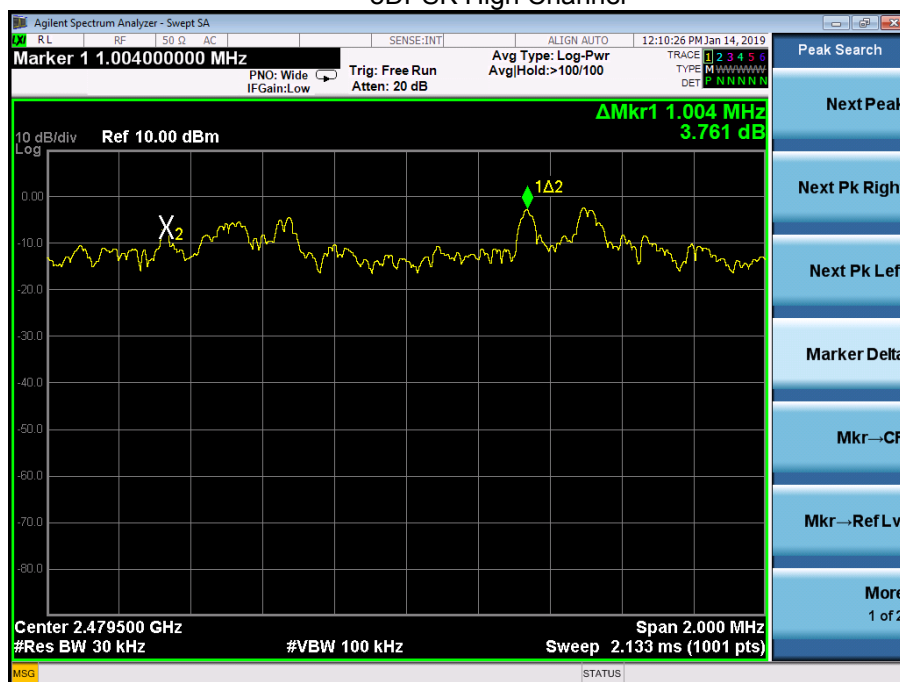

12. NUMBER OF HOPPING FREQUENCY

12.1 Block Diagram Of Test Setup

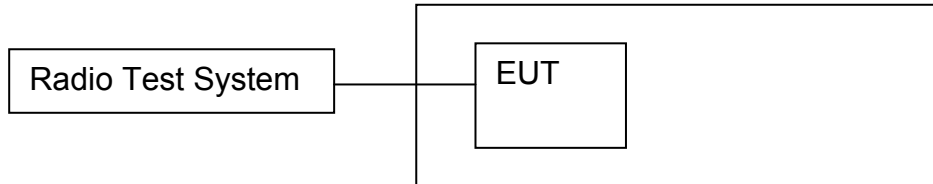

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



12.4 Test Result

Test Plots: 79 Channels in total GFSK

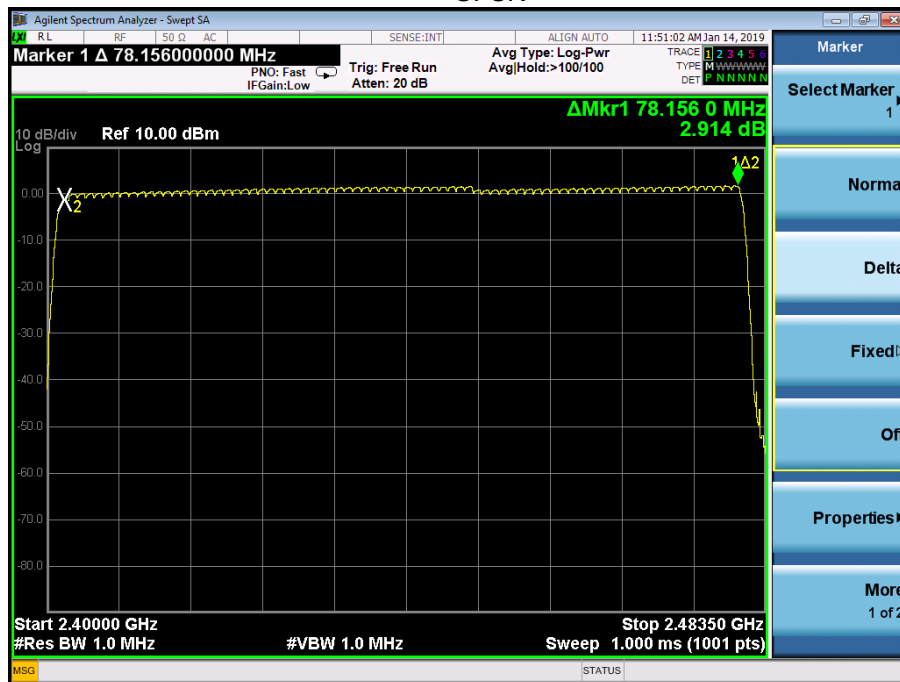


Pi/4 DQPSK






8DPSK

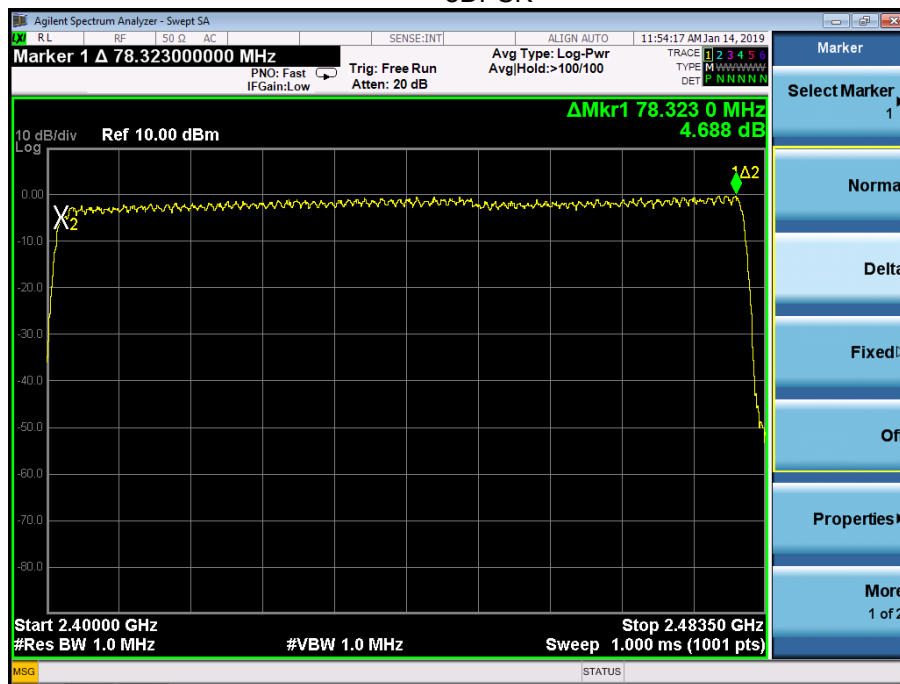

13. DWELL TIME

13.1 Block Diagram Of Test Setup

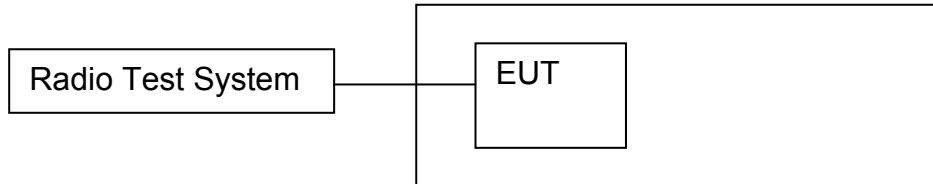

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).



13.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Modulation	Channel Data	Packet	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	Middle	DH1	0.433	0.139	0.4
		DH3	1.719	0.275	0.4
		DH5	2.940	0.314	0.4
Pi/4DQPSK	Middle	DH1	0.444	0.142	0.4
		DH3	1.703	0.272	0.4
		DH5	2.955	0.315	0.4
8DPSK	Middle	DH1	0.447	0.143	0.4
		DH3	1.703	0.272	0.4
		DH5	2.950	0.315	0.4



Test Plots
GFSK DH1 Middle Channel

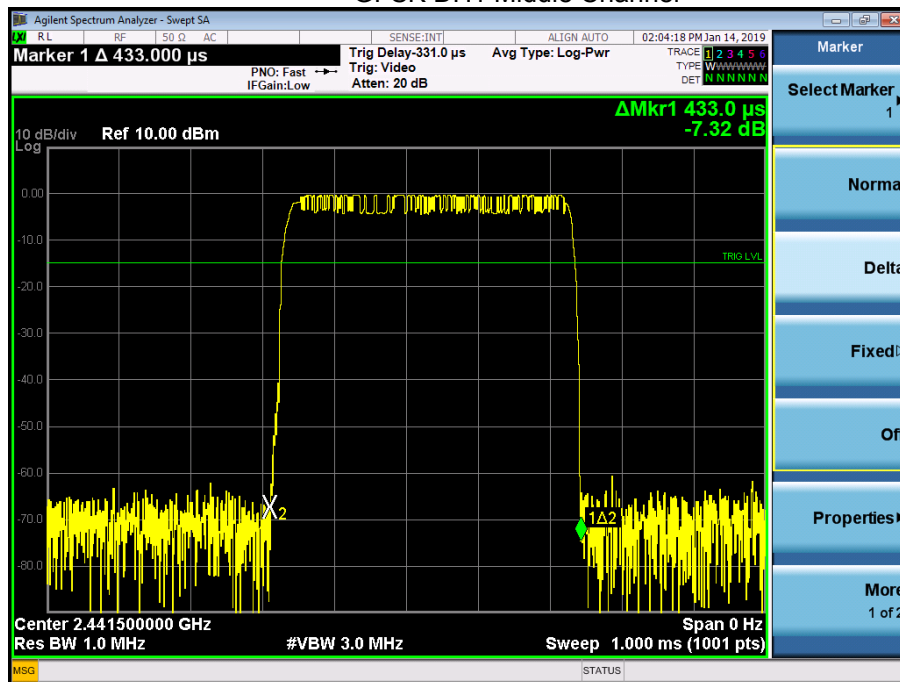


GFSK DH3 Middle Channel

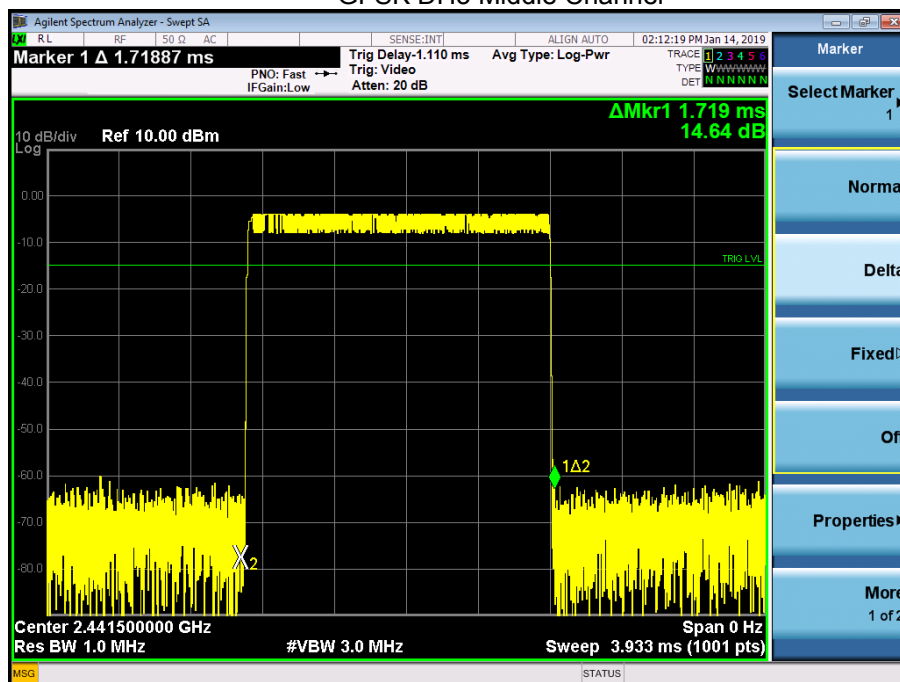




GFSK DH5 High Middle Channel

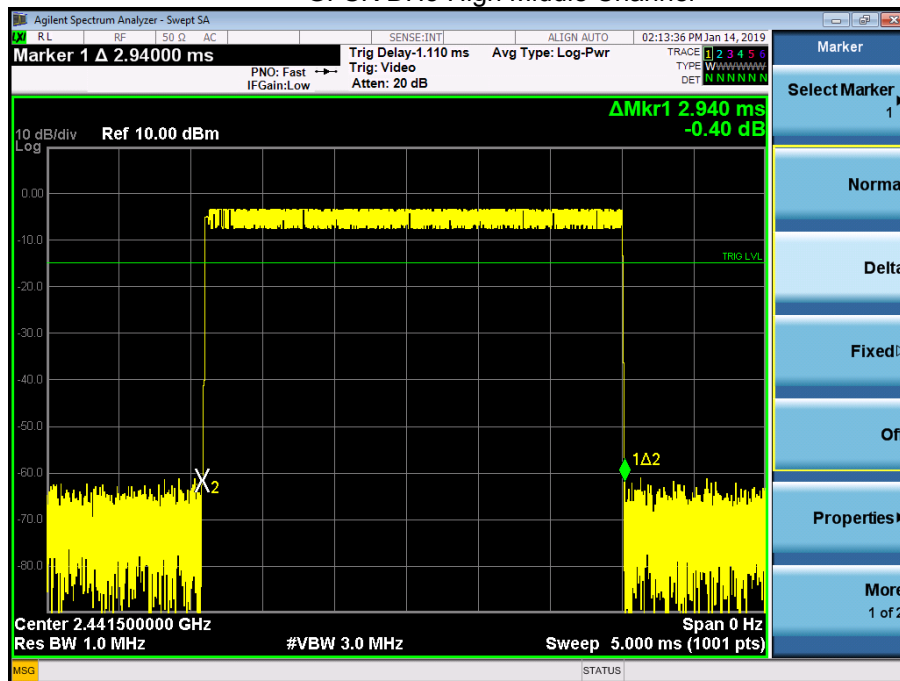


Pi/4DQPSK DH1 Middle Channel

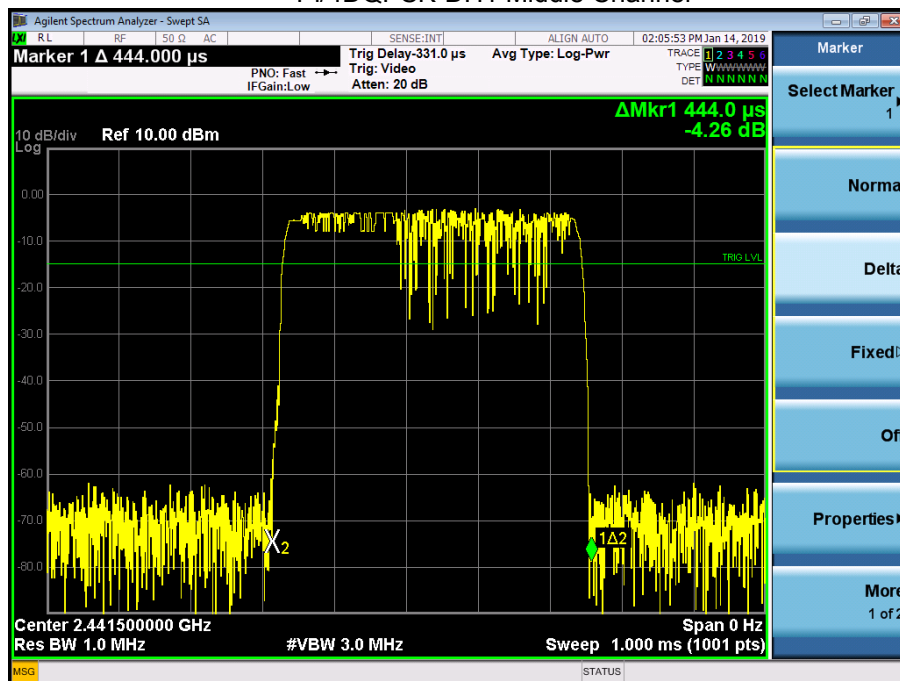



Pi/4DQPSK DH3 Middle Channel

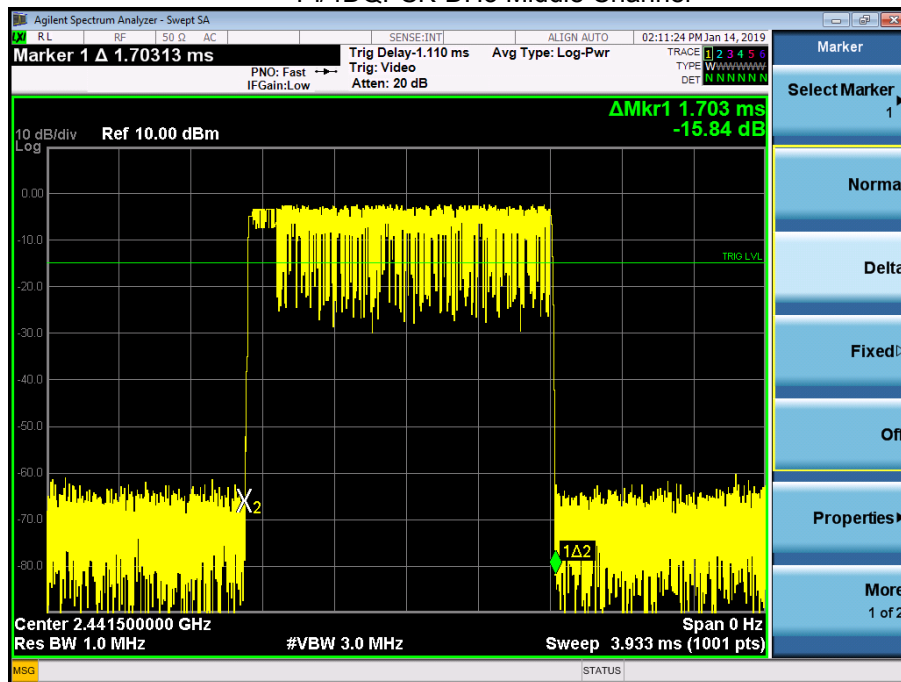


Pi/4DQPSK DH5 Middle Channel






8DPSK DH1 Middle Channel

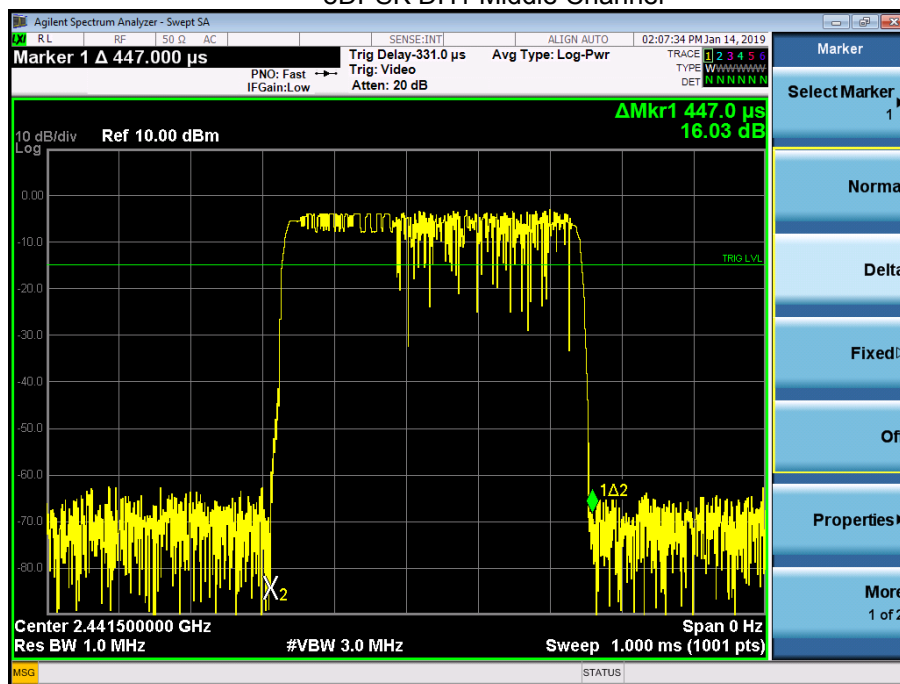


8DPSK DH3 Middle Channel

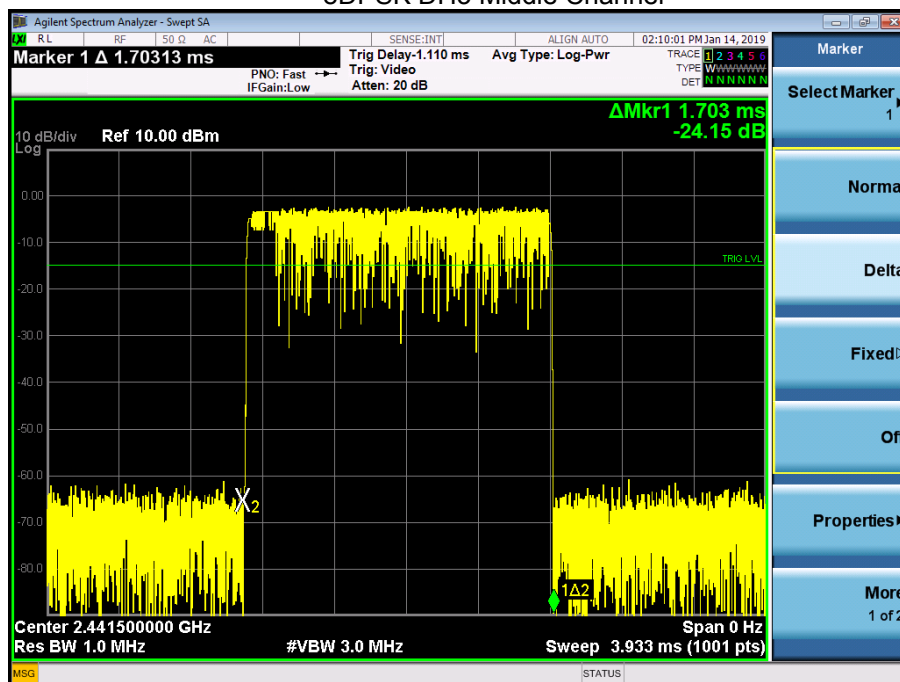



8DPSK DH5 Middle Channel

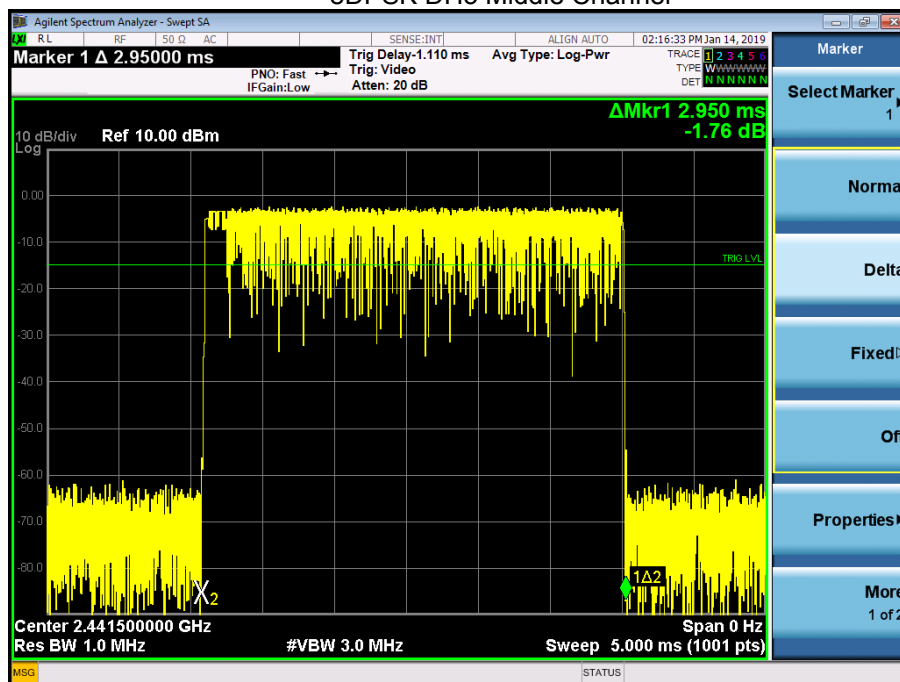

14. ANTENNA REQUIREMENT

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT antenna is External antenna with RP-SMA connector, antenna Gain 1dBi, impedance 50Ω. It comply with the standard requirement.


15. EUT PHOTOGRAPHS

EUT Photo 1



16. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions

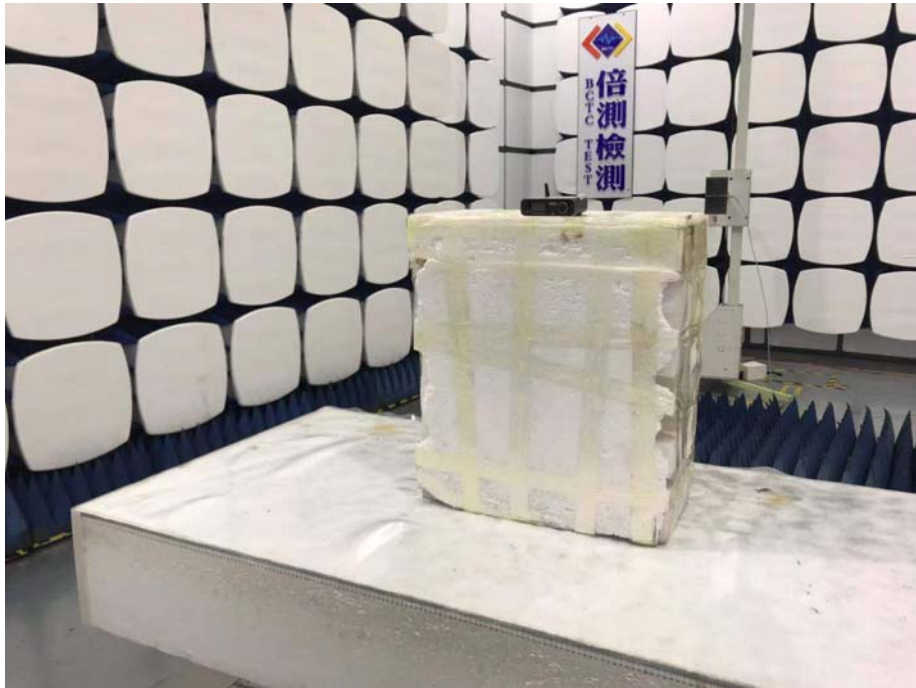



Conducted emissions



***** END OF REPORT *****