

# Dongguan Zuoqi Electronic Co.,Ltd

## TEST REPORT

**SCOPE OF WORK**

FCC TESTING-FB-12, FB-13

**REPORT NUMBER**

220621025SZN-002

**ISSUE DATE**

**[REVISED DATE]**

08 July 2022

[-----]

**PAGES**

20

**DOCUMENT CONTROL NUMBER**

FCC ID 209\_b

© 2017 INTERTEK



TEST REPORT

Intertek Report No.: 220621025SZN-002

**Dongguan Zuoqi Electronic Co.,Ltd**

Application  
For  
Certification

**FCC ID: 2ASP5-FB12**

**Bluetooth Speaker Side Table**

**Model: FB-12, FB-13**

**Brand name: zuoqi, Real Living**

**Transmitter**

Report No.: 220621025SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-20]

**Prepared and Checked by:**

---

**Draven Li**  
**Project Engineer**

**Approved by:**

---

**Ryan Chen**  
**Project Engineer**  
**Date: 08 July 2022**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Shenzhen Ltd. Longhua Branch**

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen.  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

**MEASUREMENT/TECHNICAL REPORT**

This report concerns (check one)      Original Grant       Class II Change

Equipment Type: DCD - Part 15 Low Power Transmitter Below 1705 kHz

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes       No

If yes, defer until : \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes       No

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-20] Edition] provision.

Report prepared by:

**Draven Li**  
**Intertek Testing Services Shenzhen Ltd. Longhua Branch**  
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing  
Community, GuanHu Subdistrict, LongHua District,  
ShenZhen.  
Tel: (86 755) 8614 0743 Fax: (86 755) 8601 6751

## Table of Contents

<b>1.0</b>	<b>Summary of Test Results</b>	<b>4</b>
<b>2.0</b>	<b><u>General Description</u></b>	<b>5</b>
2.1	Product Description.....	5
2.2	Related Submittal(s) Grants .....	5
2.3	Test Methodology .....	5
2.4	Test Facility .....	5
<b>3.0</b>	<b>System Test Configuration</b>	<b>6</b>
3.1	Justification .....	6
3.2	EUT Exercising Software .....	6
3.3	Special Accessories.....	6
3.4	Equipment Modification .....	6
3.5	Measurement Uncertainty .....	7
3.6	Support Equipment List and Description .....	7
<b>4.0</b>	<b>Measurement Results</b>	<b>8</b>
4.1	Field Strength Calculation.....	8
4.2	Radiated Emission Configuration Photograph .....	9
4.3	Radiated Spurious Emission .....	9
4.4	Conducted Emission Configuration Photograph.....	13
4.5	Conducted Emission.....	13
<b>5.0</b>	<b><u>Equipment Photographs</u></b>	<b>16</b>
<b>6.0</b>	<b><u>Product Labelling</u></b>	<b>16</b>
<b>7.0</b>	<b><u>Technical Specifications</u></b>	<b>16</b>
<b>8.0</b>	<b><u>Instruction Manual</u></b>	<b>16</b>
<b>9.0</b>	<b><u>Miscellaneous Information</u></b>	<b>17</b>
9.1	20dB Bandwidth.....	17
9.2	Emissions Test Procedures .....	18
9.2	Emissions Test Procedures (cont'd).....	19
<b>10.0</b>	<b><u>Test Equipment List</u></b>	<b>20</b>

**1.0 Summary of Test Results**

Applicant: Dongguan Zuoqi Electronic Co.,Ltd  
Address: No. 6 Chuang Ye 1st Road, He Lu Village, Huangjiang Town, Dongguan City, Guangdong Province, China  
Manufacturer: Dongguan Zuoqi Electronic Co.,Ltd  
Address: No. 6 Chuang Ye 1st Road, He Lu Village, Huangjiang Town, Dongguan City, Guangdong Province, China

**Model: FB-12****FCC ID: 2ASP5-FB12**

TEST ITEM	REFERENCE	RESULTS
Power Line Conducted Emissions	15.207	Pass
Transmitter Radiated Emissions	15.209	Pass
Antenna Requirement	15.203	Pass (See Notes)

## Notes:

1. The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.
2. When EUT is powered by battery, wireless charger is disabled, only EUT is powered by adapter, wireless charger can work.

## 2.0 General Description

### 2.1 Product Description

The Equipment Under Test (EUT) is a Bluetooth Speaker Side Table with wireless charger function which operating at 112-205 kHz. The EUT is powered by DC 3.7V rechargeable battery which can be charged by adapter with DC 5V/3A, 9V/2A, 12V/1.5A, wireless charger output is 10W max, USB-A output: 5V/1A. For more detailed features description, please refer to the user's manual.

Antenna Type: Integral Antenna(embedded coil antenna)

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 2.2 Related Submittal(s) Grants

This is an application for certification of the Bluetooth Speaker Side Table which has Bluetooth FHSS technology and Wireless Charger technology. Bluetooth FHSS technology was reported in the certification report: 220621025SZN-001.

### 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

### 2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are Intertek **Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

### **3.0 System Test Configuration**

#### **3.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by an adapter with 120V/60Hz input during the test. The test system was pre-scanning tested based on the consideration of following EUT operation mode. and 126.5kHz was the worst case frequency. Only the worst-case data was shown in this report.

Pertest mode	Description
Mode 1	Standby mode
Mode 2	Mobile phone is charging at 1% battery power
Mode 3	Mobile phone is charging at 50% battery power
Mode 4	Mobile phone is charging at 99% battery power
Mode 5	Simultaneous Transmission

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the bottom of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Section 4.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the styrene turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### **3.2 EUT Exercising Software**

N/A

#### **3.3 Special Accessories**

There is no special accessories necessary for compliance of this product.

#### **3.4 Equipment Modification**

Any modifications installed previous to testing by Dongguan Zuoqi Electronic Co.,Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd.  
Longhua Branch.

### 3.5 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Measurement Uncertainty	Uncertainty
Channel Bandwidth	±3.46%
Radiated emission (Up to 1GHz)	±4.8dB
AC Conducted emission	±3.6dB
Temperature	±1°C
Humidity	±5%

### 3.6 Support Equipment List and Description

This product was tested in the following configuration:

Description	Manufacturer	Detail
Mobile Phone	SAMSUNG	S7
Type-C cable	N/A (Provided by client)	Unshielded, Length 90cm
AC Adapter	Xiaomi (Provided by Intertek)	Model: MDY-09-EV Input: 100-240V~, 50/60Hz, 1.7A Output: 5V=3A, 9V=2A, 12V=1.5A
Resistor	N/A (Provided by Intertek)	5 Ω

**4.0 Measurement Results****4.1 Field Strength Calculation**

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in  $\text{dB}/\text{m}$

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in  $-\text{dB}$

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

**Example**

Assume a receiver reading of  $62.0\text{dB}\mu\text{V}$  is obtained. The antenna factor of  $7.4\text{dB}$  and cable factor of  $1.6\text{dB}$  is added. The amplifier gain of  $29\text{dB}$  is subtracted. The pulse desensitization factor of the spectrum analyzer was  $0\text{dB}$ , and the resultant average factor was  $-10\text{dB}$ . The net field strength for comparison to the appropriate emission limit is  $32\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

RA =  $62.0\text{dB}\mu\text{V}$

AF =  $7.4\text{ dB}/\text{m}$

CF =  $1.6\text{dB}$

AG =  $29.0\text{dB}$

PD =  $0\text{dB}$

AV =  $-10\text{dB}$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32\text{dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V}/\text{m})/20] = 39.8\mu\text{V}/\text{m}$$

## 4.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

## 4.3 Radiated Spurious Emission

Worst Case Radiated Spurious Emission  
at  
94.680000MHz

Judgement: Passed by 3.1dB margin

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

Applicant: Dongguan Zuoqi Electronic Co.,Ltd


Date of Test: 22 June 2022

Model: FB-12

Worst Case Operating Mode: Mode 5

**Radiated Emissions (30MHz – 1000MHz)**

ANT Polarity: Horizontal

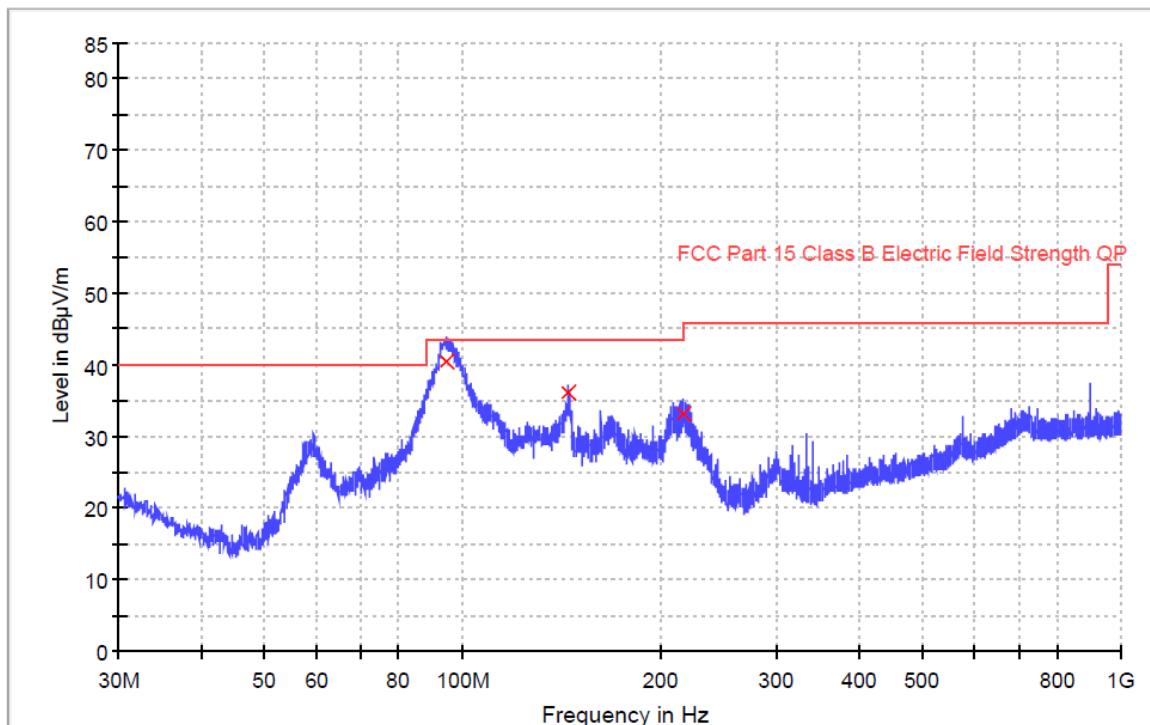

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB $\mu$ V/m)
94.680000	40.4	1000.0	120.000	100.0	H	14.3	3.1	43.5
144.480000	36.2	1000.0	120.000	100.0	H	15.8	7.3	43.5
216.480000	33.1	1000.0	120.000	100.0	H	19.7	12.9	46.0

## Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB $\mu$ V/m) = Corr. (dB/m) + Read Level (dB $\mu$ V)
3. Margin (dB) = Limit Line(dB $\mu$ V/m) – Level (dB $\mu$ V/m)


Applicant: Dongguan Zuoqi Electronic Co.,Ltd

Date of Test: 22 June 2022

Model: FB-12

Worst Case Operating Mode: Mode 5

ANT Polarity: Vertical

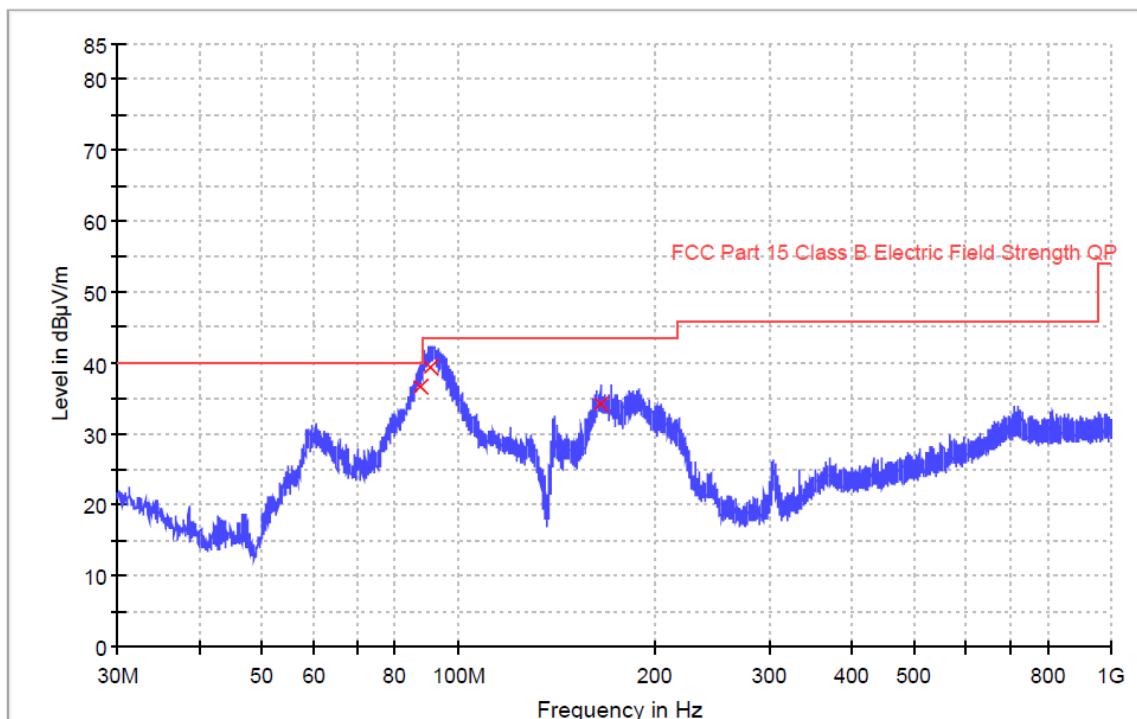

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB $\mu$ V/m)
87.360000	36.6	1000.0	120.000	100.0	V	13.7	3.4	40.0
90.689667	39.4	1000.0	120.000	100.0	V	13.8	4.1	43.5
164.927000	34.2	1000.0	120.000	100.0	V	17.1	9.3	43.5

## Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB $\mu$ V/m) = Corr. (dB/m) + Read Level (dB $\mu$ V)
3. Margin (dB) = Limit Line(dB $\mu$ V/m) – Level (dB $\mu$ V/m)

Applicant: Dongguan Zuoqi Electronic Co.,Ltd

Date of Test: 22 June 2022

Model: FB-12

Worst Case Operating Mode: Mode 2

**Fundamental & Spurious Emission Below 30MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Distance Factor (-dB)	Calulated at 300m (dB $\mu$ V/m)	Limit at 300m (dB $\mu$ V/m)	Margin (dB)
Horizontal	0.1265	74.3	0.0	17.2	91.5	80.0	11.5	25.6	-14.1
Horizontal	0.3795	53.3	0.0	17.1	70.4	80.0	-9.6	16.0	-25.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Distance Factor (-dB)	Calulated at 30m (dB $\mu$ V/m)	Limit at 30m (dB $\mu$ V/m)	Margin (dB)
Horizontal	0.6325	45.6	0.0	16.8	62.4	40.0	22.4	31.6	-9.2
Horizontal	0.8855	38.8	0.0	16.4	55.2	40.0	15.2	28.7	-13.5

Notes: 1. The specified limits of frequency band 9~90 KHz, 110~490 KHz are in average and measurements are made with peak detectors. Quasi-Peak detector is used for other frequency band.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Loop antenna is used for the emission under 30MHz.
5. Horizontal and Vertical polarization were tested and Only the worst Case data is shown.

#### 4.4 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

#### 4.5 Conducted Emission

Worst Case Conducted Configuration  
at  
2.446000MHz

Judgement: Passed by 10.9dB margin

Applicant: Dongguan Zuoqi Electronic Co.,Ltd

Date of Test: 22 June 2022


Model: FB-12

Worst Case Operating Mode

Mode 5

Worst Case Test Voltage: AC 120V, 60Hz

Phase: Live

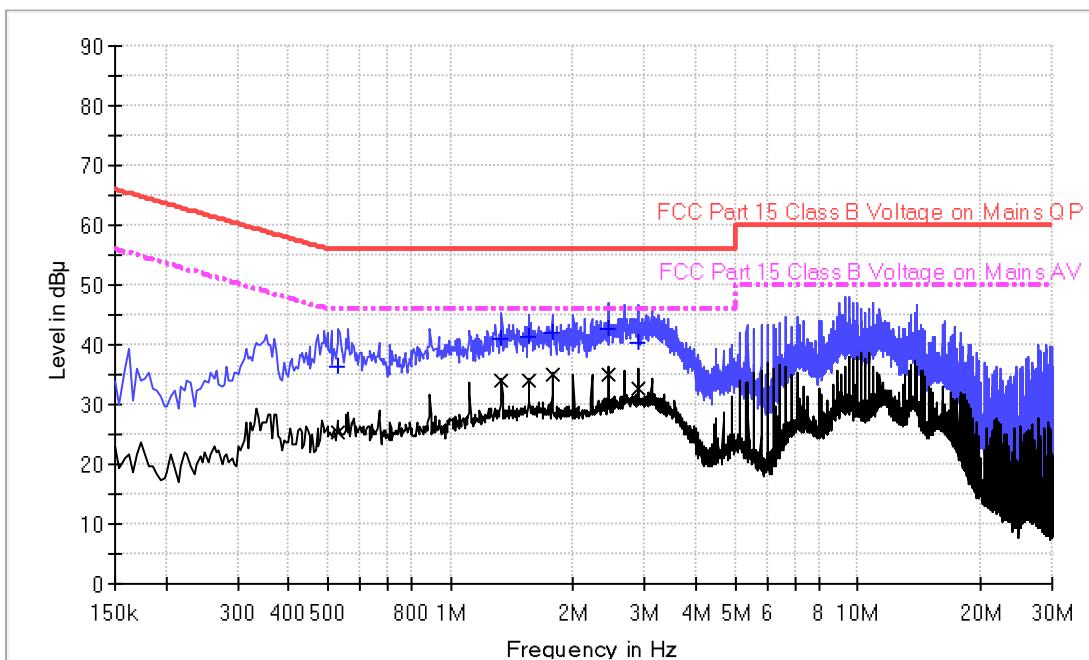**Graphic / Data Table****Conducted Emissions**  
**Pursuant to FCC 15.207: Emissions Requirement****Limit and Margin QP**

Frequency (MHz)	Quasi Peak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.530000	36.2	9.000	L1	9.6	19.8	56.0
1.334000	41.1	9.000	L1	9.6	14.9	56.0
1.558000	41.3	9.000	L1	9.6	14.7	56.0
1.778000	41.9	9.000	L1	9.6	14.1	56.0
2.446000	42.6	9.000	L1	9.7	13.4	56.0
2.886000	40.3	9.000	L1	9.7	15.7	56.0

**Limit and Margin AV**

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.530000	25.3	9.000	L1	9.6	20.7	46.0
1.334000	33.9	9.000	L1	9.6	12.1	46.0
1.558000	33.9	9.000	L1	9.6	12.1	46.0
1.778000	34.8	9.000	L1	9.6	11.2	46.0
2.446000	35.1	9.000	L1	9.7	10.9	46.0
2.886000	32.6	9.000	L1	9.7	13.4	46.0

Applicant: Dongguan Zuoqi Electronic Co.,Ltd

Date of Test: 22 June 2022


Model: FB-12

Worst Case Operating Mode

Mode 5

Worst Case Test Voltage: AC 120V, 60Hz

Phase: Neutral

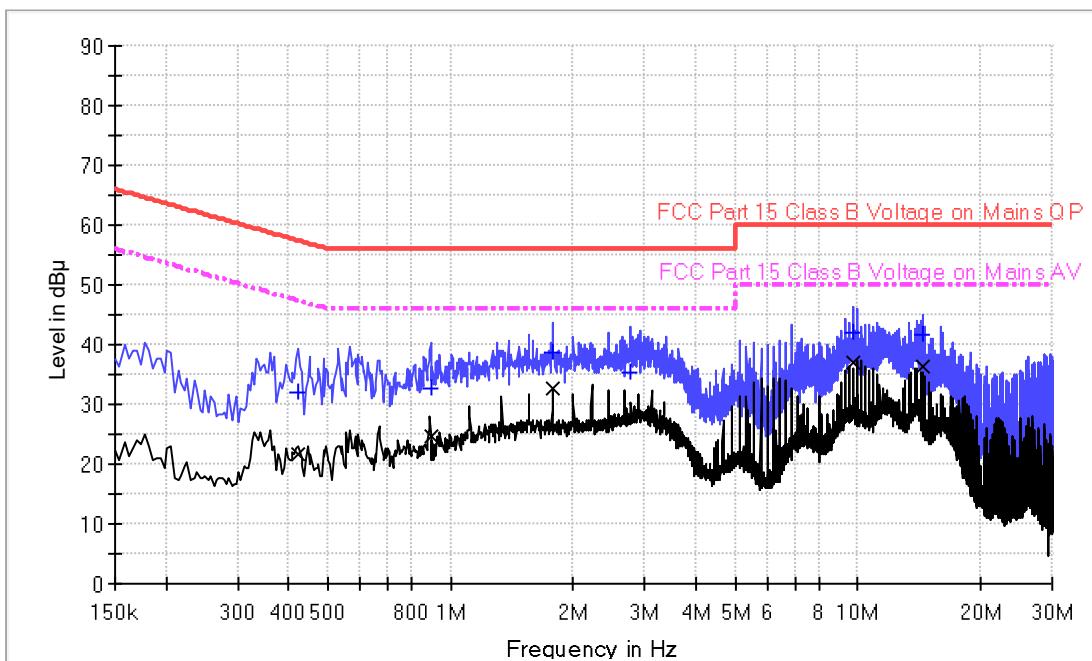**Graphic / Data Table****Conducted Emissions**  
**Pursuant to FCC 15.207: Emissions Requirement****Limit and Margin QP**

Frequency (MHz)	Quasi Peak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.422000	32.1	9.000	N	9.5	25.3	57.4
0.894000	32.7	9.000	N	9.5	23.3	56.0
1.778000	38.6	9.000	N	9.5	17.4	56.0
2.754000	35.2	9.000	N	9.5	20.8	56.0
9.778000	41.9	9.000	N	9.7	18.1	60.0
14.438000	41.7	9.000	N	10.0	18.3	60.0

**Limit and Margin AV**

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.422000	21.6	9.000	N	9.5	25.8	47.4
0.894000	24.7	9.000	N	9.5	21.3	46.0
1.778000	32.5	9.000	N	9.5	13.5	46.0
2.754000	27.9	9.000	N	9.5	18.1	46.0
9.778000	36.9	9.000	N	9.7	13.1	50.0
14.438000	36.4	9.000	N	10.0	13.6	50.0

## 5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

## 6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

## 7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

## 8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.


This manual will be provided to the end-user with each unit sold/leased in the United States.

## 9.0 Miscellaneous Information

This miscellaneous information includes 20dB bandwidth and emission measuring procedure.

### 9.1 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

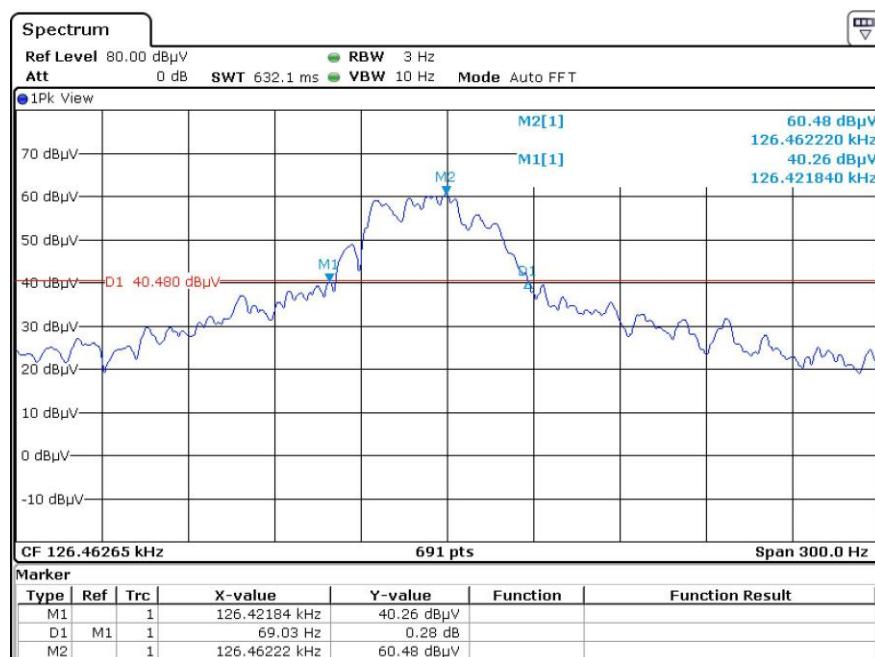

## 9.2 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The floor-standing EUT was placed on a non-conductive table whose total height equaled 10cm. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units. Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

Average detector is used for 9–90 KHz, 110–490 KHz and Quasi-Peak detector is used for other frequency band. The IF bandwidth used for measurement of radiated signal strength was 10 KHz for emission below 30 MHz and 120 KHz for emission from 30 MHz to 1000 MHz.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz up to the 1GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz.

## 9.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

**10.0 Test Equipment List**

<b>Equipment No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Due Date</b>
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	04-Aug-2021	04-Aug-2024
SZ185-03	EMI Receiver	R&S	ESCI	100547	20-Dec-2021	20-Dec-2022
SZ061-08	Horn Antenna	ETS	3115	00092346	05-Sep-2021	05-Sep-2024
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	18-May-2021	18-May-2023
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	16-May-2022	16-May-2023
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	20-Dec-2021	20-Dec-2022
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	16-May-2022	16-May-2023
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	12-Dec-2021	12-Dec-2024
SZ062-23	RF Cable	RADIALL	SF104PE	--	26-Oct-2021	26-Oct-2022
SZ062-35	RF Cable	RADIALL	A50-3.5M3.5M-8M	--	26-Oct-2021	26-Oct-2022
SZ062-30	RF Cable	RADIALL	A50-3.5M3.5M-4.5M	--	26-Oct-2021	26-Oct-2022
SZ062-31	RF Cable	RADIALL	A50-3.5M3.5M-1M		26-Oct-2021	26-Oct-2022
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	17-May-2022	17-May-2023
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	12-Jul-2021	12-Jul-2022
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	02-Nov-2021	02-Nov-2022
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	26-Oct-2021	26-Oct-2022
SZ188-03	Shielding Room	ETS	RFD-100	4100	07-Jan-2020	07-Jan-2023

\*\*\*\*\*End of Report\*\*\*\*\*