



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

CloudMinds Technology Inc.

4500 Great America Parkway, Suite 230 Santa Clara, California, 95054 United States

FCC ID: 2ASQT-MR-5S

Report Type: Original Report	Product Type: Raman Spectrometer
Test Engineer: Max Min <i>Max Min</i>	
Report Number: RKSA190116001-00D	
Report Date: 2019-08-25 Oscar Ye	
Reviewed By: RF Leader <i>Oscar Ye</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	12
EXTERNAL I/O CABLE.....	12
BLOCK DIAGRAM OF TEST SETUP	13
SUMMARY OF TEST RESULTS.....	15
TEST EQUIPMENT LIST	16
FCC §1.1310 & §2.1093 – RF EXPOSURE.....	18
FCC §15.203 - ANTENNA REQUIREMENT.....	19
APPLICABLE STANDARD	19
ANTENNA CONNECTOR CONSTRUCTION	19
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE	20
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	21
TEST RESULTS SUMMARY	21
TEST DATA	21
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	26
APPLICABLE STANDARD	26
EUT SETUP	26
EMI TEST RECEIVER SETUP.....	27
TEST PROCEDURE	27
CORRECTED AMPLITUDE & MARGIN CALCULATION	27
TEST RESULTS SUMMARY	27
TEST DATA	28
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH	71
APPLICABLE STANDARD	71
TEST PROCEDURE	71
TEST DATA	71
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	87
APPLICABLE STANDARD	87
TEST PROCEDURE	87
TEST DATA	87
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	91
APPLICABLE STANDARD	91
TEST PROCEDURE	91

TEST DATA	91
FCC §15.247(e) - POWER SPECTRAL DENSITY	101
APPLICABLE STANDARD	101
TEST PROCEDURE	101
TEST DATA	101

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	CloudMinds Technology Inc.
Tested Model	MR-5S
Product Type	Raman Spectrometer
Dimension	159 mm(L)*78.9 mm(W)*27 mm(H)
Power Supply	DC 3.6V-6.5V or 6.5V-9V or 9V-12V from adapter and DC 3.8V from battery

Adapter information:

Model: NKA02U

Input: AC 100-240V, 50/60Hz 0.6A

Output: DC 3.6~6.5V, 3A or DC 6.5~9V, 2A or DC 9~12V, 1.5A

**All measurement and test data in this report was gathered from production sample serial number: 20190116001.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2019-01-16.*

Objective

This report is prepared on behalf of *CloudMinds Technology Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 22H24E27Part 90 PCE, 15.407 NII and Part 15.225 DXX submissions with FCC ID: 2ASQT-MR-5S.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For BLE mode, EUT was tested with channel 0, 19 and 39.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: QCRT

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Setting	
		Chain 0	Chain 1
802.11b	1Mbps	12	12
802.11g	6 Mbps	9	9
802.11n-HT20	MCS0	9	9
802.11n-HT40	MCS0	9	9
BLE	1Mbps	Default	

Duty Cycle (Chain 0):


802.11b Mode Middle Channel

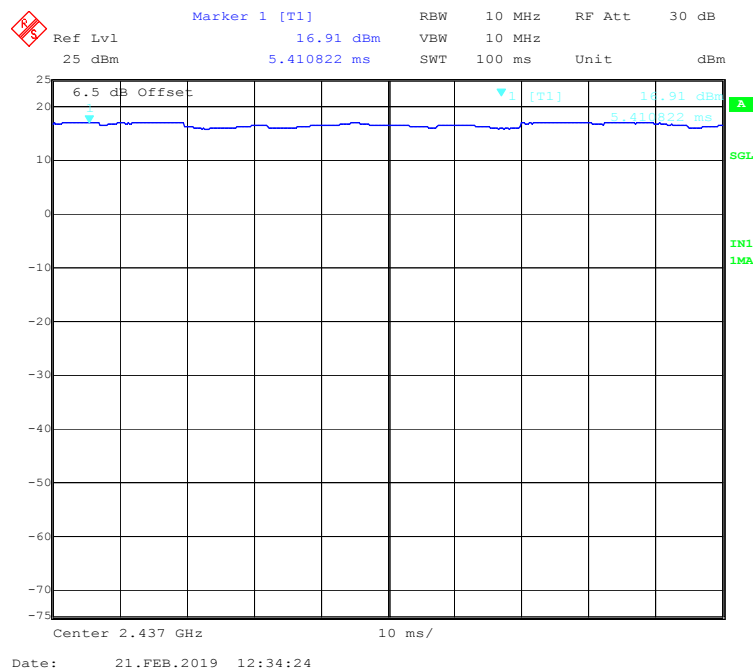


802.11g Mode Middle Channel

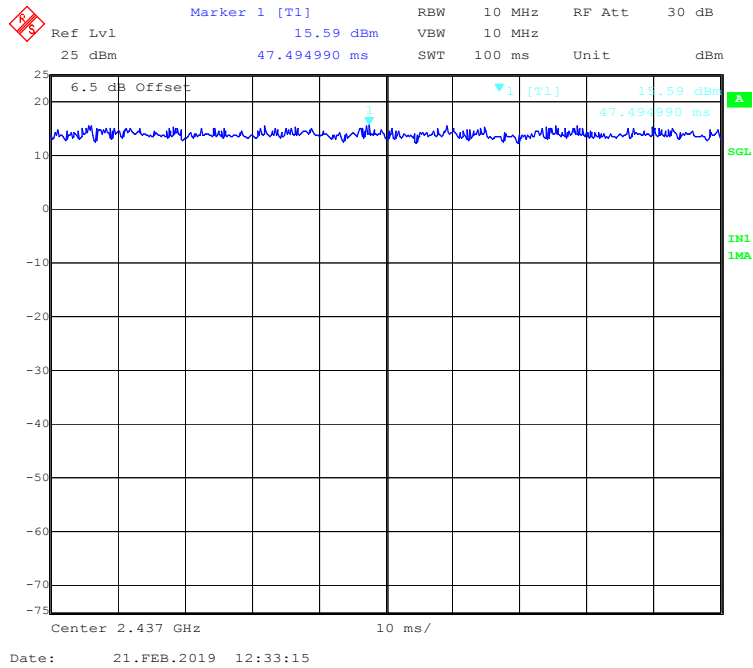

802.11n-HT20 Mode Middle Channel

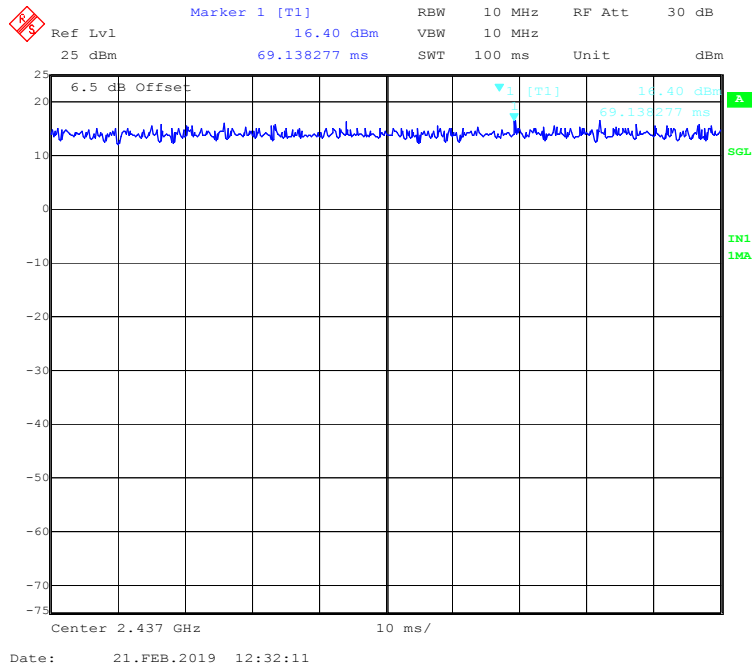

802.11n-HT40 Mode Middle Channel

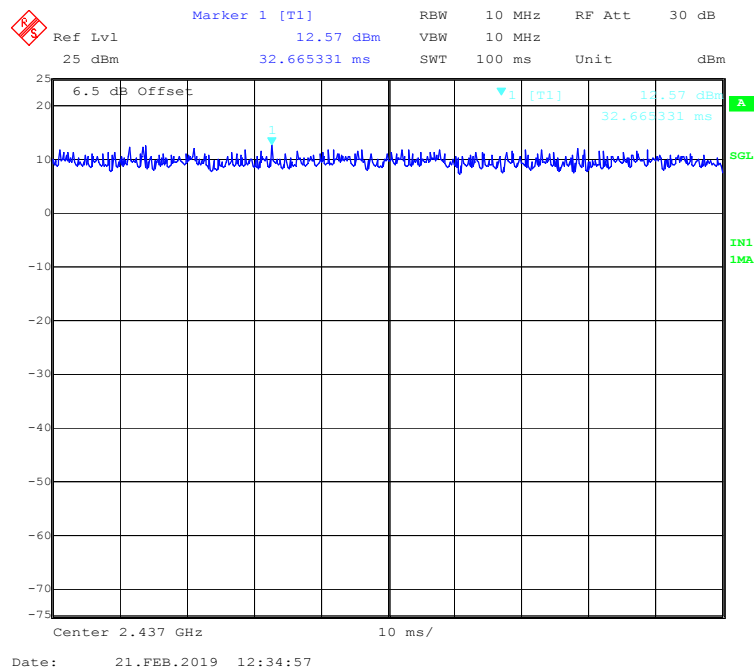


Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0


Note: “x” means the Duty Cycle.

Duty Cycle (Chain1):


802.11b Mode Middle Channel

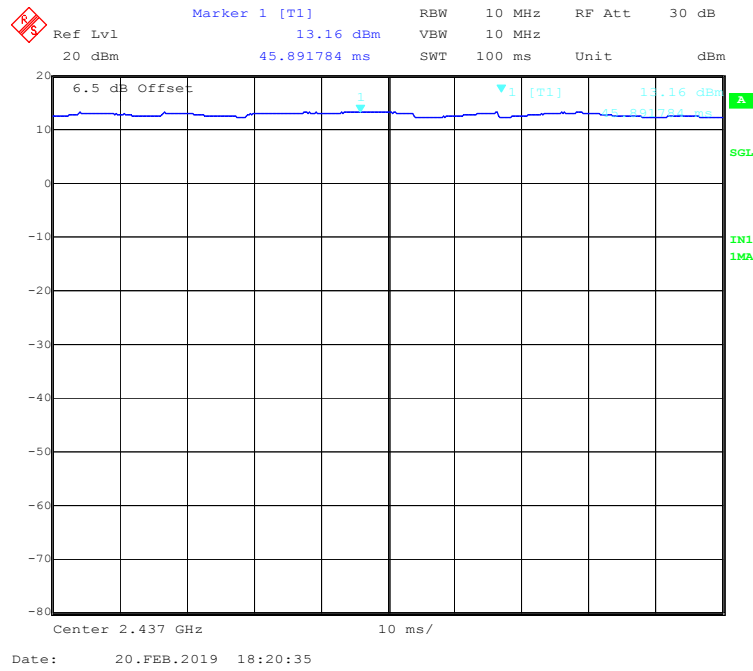


802.11g Mode Middle Channel

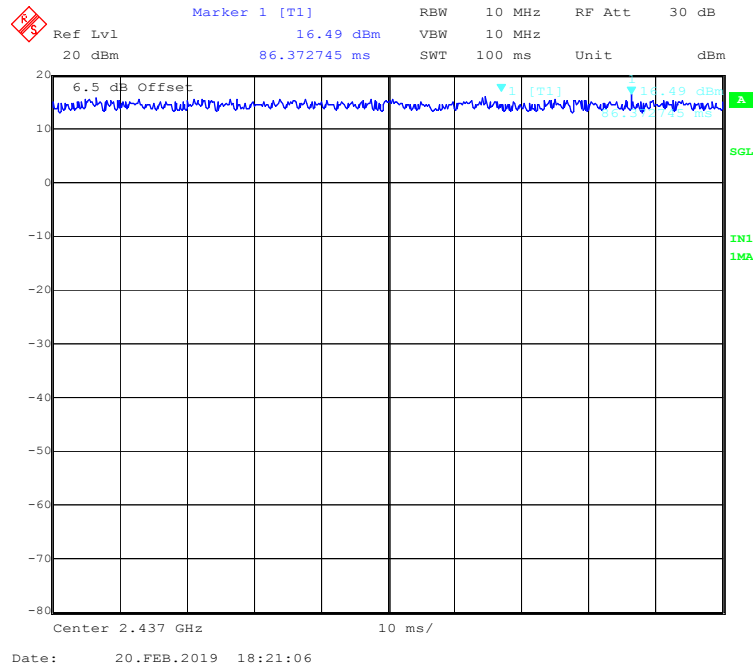


802.11n-HT20 Mode Middle Channel

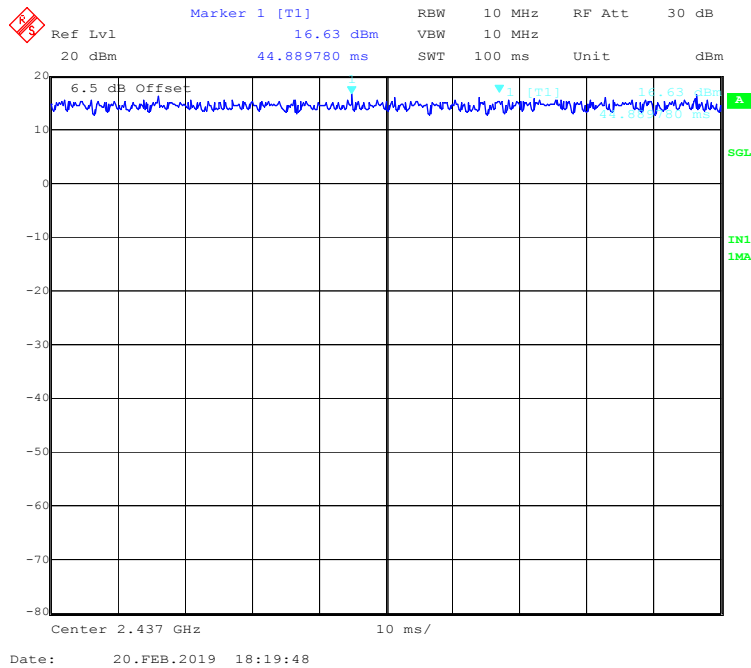

802.11n-HT40 Mode Middle Channel

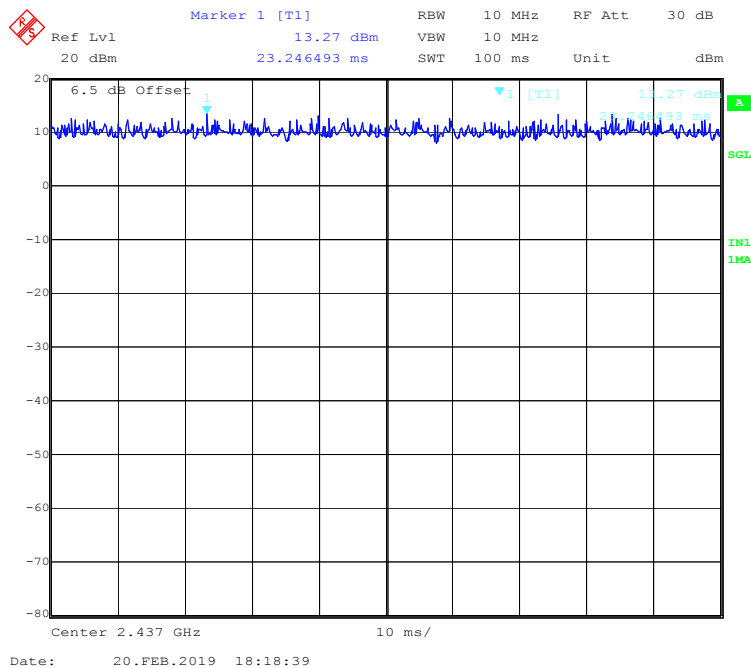

BLE Mode Middle Channel

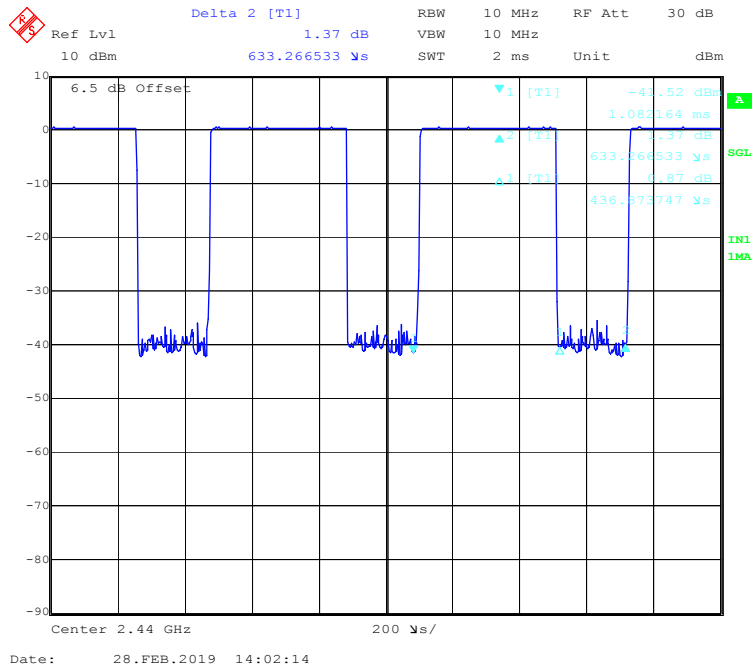

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0
BLE	68.99	0.437	2.29	1.61

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	Earphone	/	/
/	Socket	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	Socket	AC Source

Block Diagram of Test Setup

For Conducted Emissions:

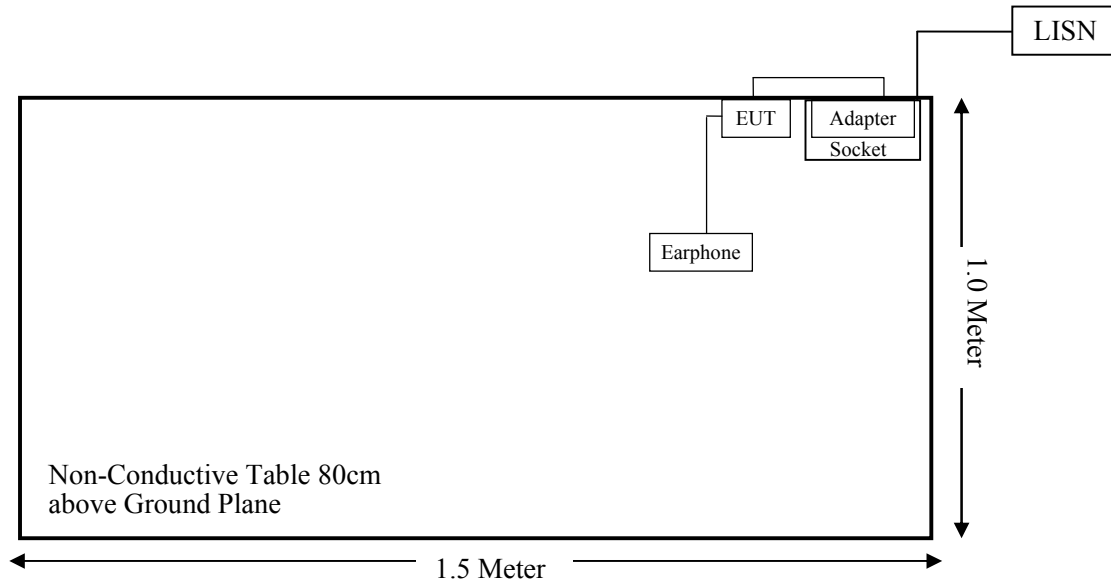


For Radiated Emissions(Below 1GHz):

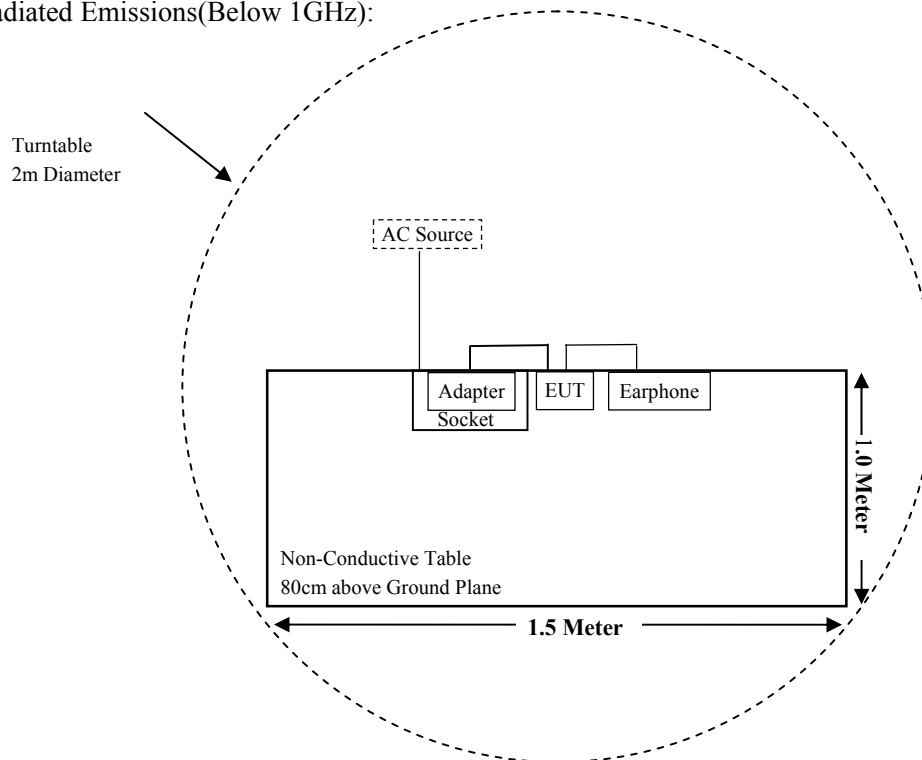

For Radiated Emissions(Above 1GHz):

Turntable
2m Diameter

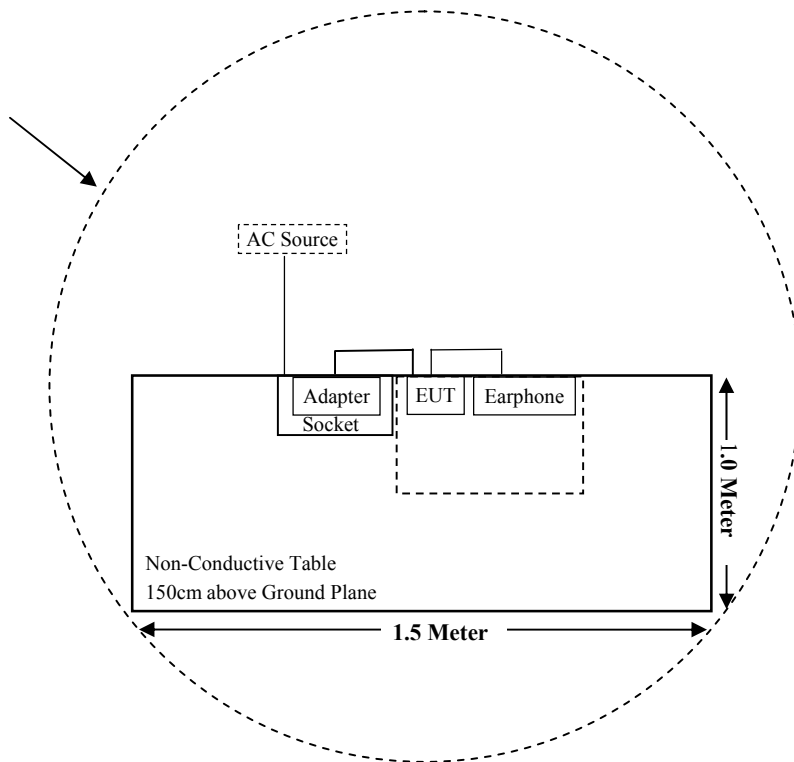

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §1.1310 & §2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2018-08-05	2019-08-04
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-09-21	2019-09-20
Agilent	Power Meter	N1912A	MY5000492	2018-11-18	2019-11-17
Agilent	Power Sensor	N1921A	MY54210024	2018-11-18	2019-11-17
Narda	Attenuator	6dB	006	2019-01-10	2020-01-09
CloudMinds	RF Cable	CloudMinds C01	C01	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Audix	Test Software	e3	V9	--	--
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1093 – RF EXPOSURE

Applicable Standard

According to §2.1093 and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR

· $f(\text{GHz})$ is the RF channel transmit frequency in GHz

· Power and distance are rounded to the nearest mW and mm before calculation

· The result is rounded to one decimal place for comparison

· When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Measurement Result

For BLE&BT3.0 mode:

Mode	Frequency Range (MHz)	Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (1-g)	SAR Test Exclusion
		(dBm)	(mW)				
BT3.0	2402-2480	8.20	6.61	5.00	2.10	3.00	Yes
BLE	2402-2480	0.50	1.12	5.00	0.35	3.00	Yes

Note: 1. The tune-up output power was declared by the manufacturer.

So the stand-alone SAR evaluation is not necessary

For Wi-Fi&GSM&WCDMA<E mode:

Please refer to the SAR report: RKSA190116001-20

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two IFA antennas for Wi-Fi and the antenna gain is -2.38 dBi, which was permanently attached; fulfill the requirement of this section. Please refer to the EUT photos.

ANT	Antenna Type	Max. Antenna Gain
0	IFA	-2.38 dBi
1	IFA	-2.38 dBi


Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

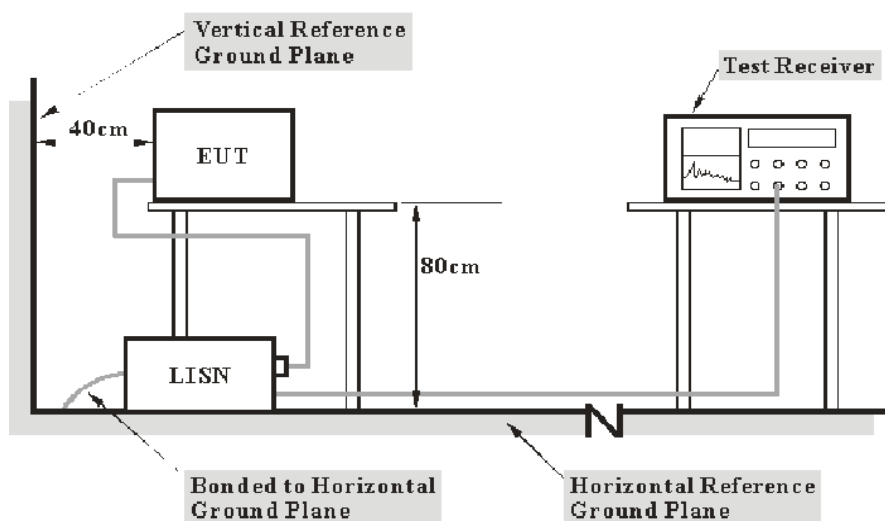

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.


Test Data

Environmental Conditions


Temperature:	20.2 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa

The testing was performed by Max Min on 2019-08-19.


EUT operation mode: Transmitting in 802.11b mode low channel (worst case)

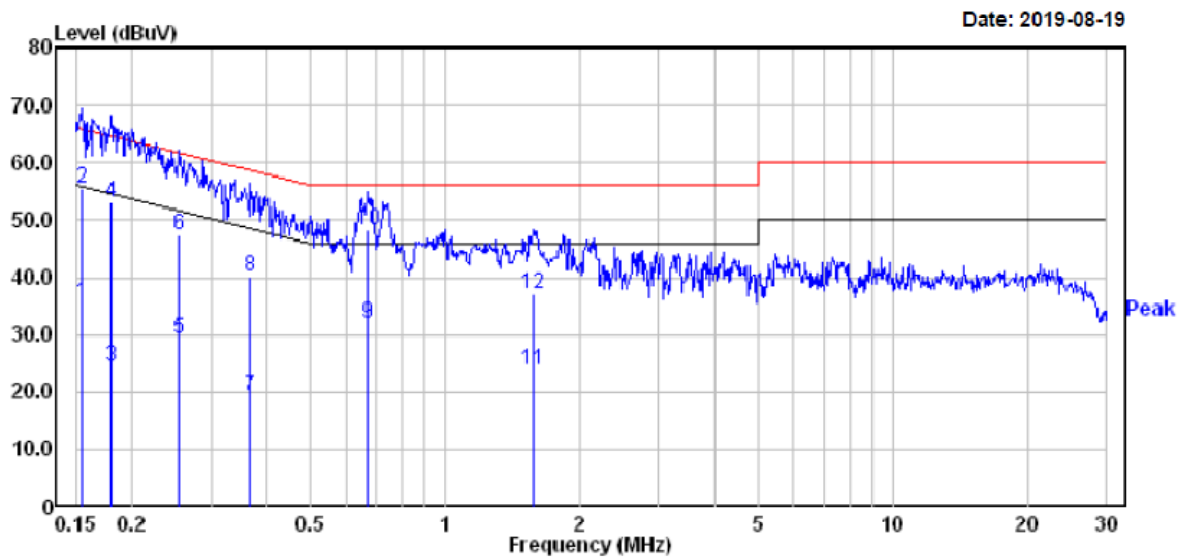For Wi-Fi Mode:**AC 120V/60 Hz, Line**


		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.154	15.70	19.82	35.52	55.78	-20.26	Average
2	0.154	35.70	19.82	55.52	65.78	-10.26	QP
3	0.180	4.50	19.83	24.33	54.50	-30.17	Average
4	0.180	33.20	19.83	53.03	64.50	-11.47	QP
5	0.255	9.50	19.82	29.32	51.60	-22.28	Average
6	0.255	27.50	19.82	47.32	61.60	-14.28	QP
7	0.367	-0.50	19.78	19.28	48.56	-29.28	Average
8	0.367	20.40	19.78	40.18	58.56	-18.38	QP
9	0.672	12.30	19.75	32.05	46.00	-13.95	Average
10	0.672	28.50	19.75	48.25	56.00	-7.75	QP
11	1.568	3.99	19.85	23.84	46.00	-22.16	Average
12	1.568	17.29	19.85	37.14	56.00	-18.86	QP

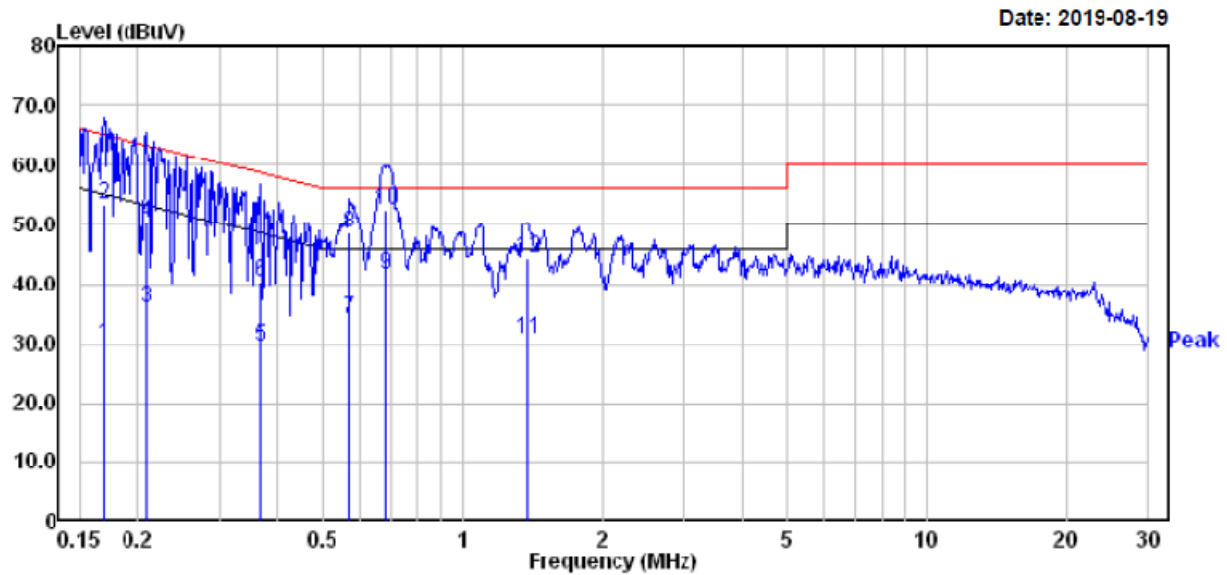AC 120V/60 Hz, Neutral

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.169	10.20	19.83	30.03	55.03	-25.00	Average
2	0.169	33.70	19.83	53.53	65.03	-11.50	QP
3	0.208	16.00	19.82	35.82	53.27	-17.45	Average
4	0.208	30.70	19.82	50.52	63.27	-12.75	QP
5	0.367	9.80	19.78	29.58	48.56	-18.98	Average
6	0.367	20.70	19.78	40.48	58.56	-18.08	QP
7	0.573	14.50	19.75	34.25	46.00	-11.75	Average
8	0.573	28.80	19.75	48.55	56.00	-7.45	QP
9	0.683	21.90	19.75	41.65	46.00	-4.35	Average
10	0.683	32.70	19.75	52.45	56.00	-3.55	QP
11	1.374	11.00	19.83	30.83	46.00	-15.17	Average
12	1.374	24.40	19.83	44.23	56.00	-11.77	QP

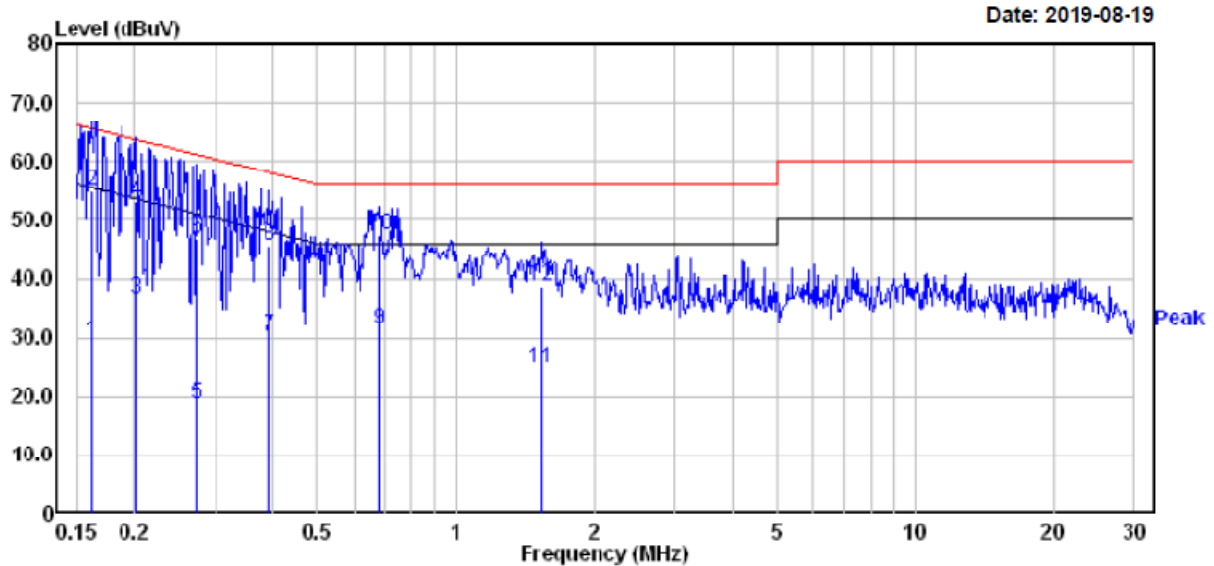For BLE Mode:**AC 120V/60 Hz, Line**

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.161	9.60	19.83	29.43	55.43	-26.00	Average
2	0.161	35.20	19.83	55.03	65.43	-10.40	QP
3	0.201	16.60	19.82	36.42	53.58	-17.16	Average
4	0.201	33.20	19.82	53.02	63.58	-10.56	QP
5	0.273	-1.20	19.82	18.62	51.03	-32.41	Average
6	0.273	26.90	19.82	46.72	61.03	-14.31	QP
7	0.391	10.50	19.75	30.25	48.03	-17.78	Average
8	0.391	25.90	19.75	45.65	58.03	-12.38	QP
9	0.683	11.60	19.75	31.35	46.00	-14.65	Average
10	0.683	27.50	19.75	47.25	56.00	-8.75	QP
11	1.527	4.79	19.85	24.64	46.00	-21.36	Average
12	1.527	18.69	19.85	38.54	56.00	-17.46	QP

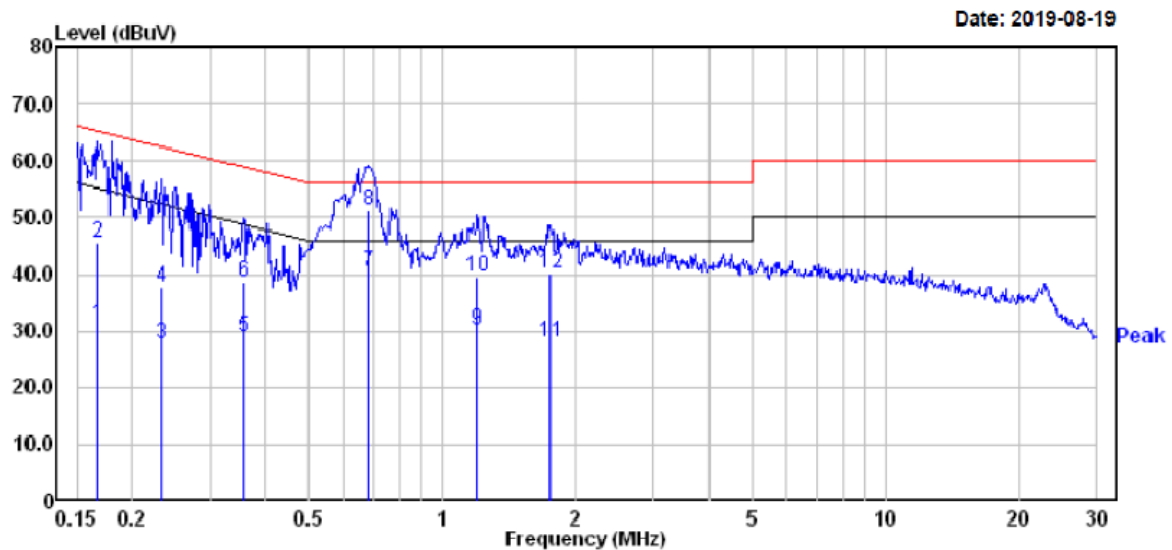AC 120V/60 Hz, Neutral

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.167	11.40	19.83	31.23	55.12	-23.89	Average
2	0.167	25.90	19.83	45.73	65.12	-19.39	QP
3	0.232	8.10	19.82	27.92	52.39	-24.47	Average
4	0.232	17.90	19.82	37.72	62.39	-24.67	QP
5	0.356	9.10	19.80	28.90	48.83	-19.93	Average
6	0.356	18.70	19.80	38.50	58.83	-20.33	QP
7	0.683	20.80	19.75	40.55	46.00	-5.45	Average
8	0.683	31.60	19.75	51.35	56.00	-4.65	QP
9	1.197	10.30	19.81	30.11	46.00	-15.89	Average
10	1.197	19.70	19.81	39.51	56.00	-16.49	QP
11	1.753	8.30	19.84	28.14	46.00	-17.86	Average
12	1.753	20.20	19.84	40.04	56.00	-15.96	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
 2) Over Limit (dB) = Read level (dBUV) + Factor (dB) - Limit (dBUV)


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

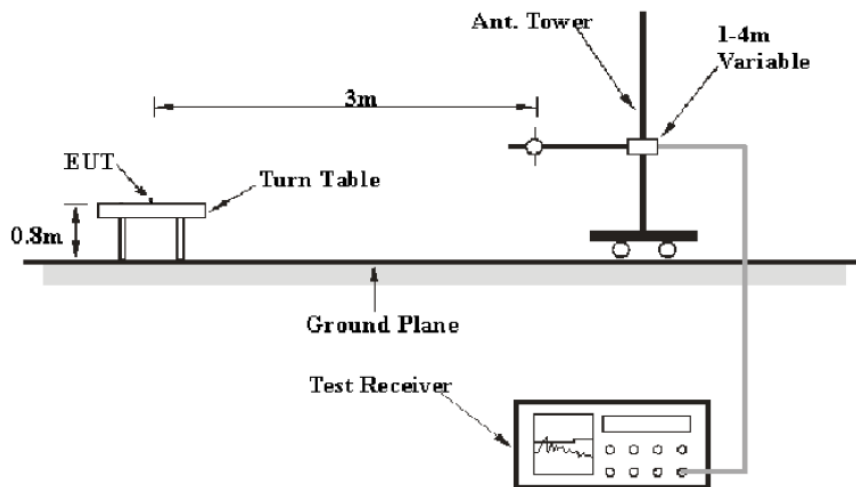

Above 1GHz:

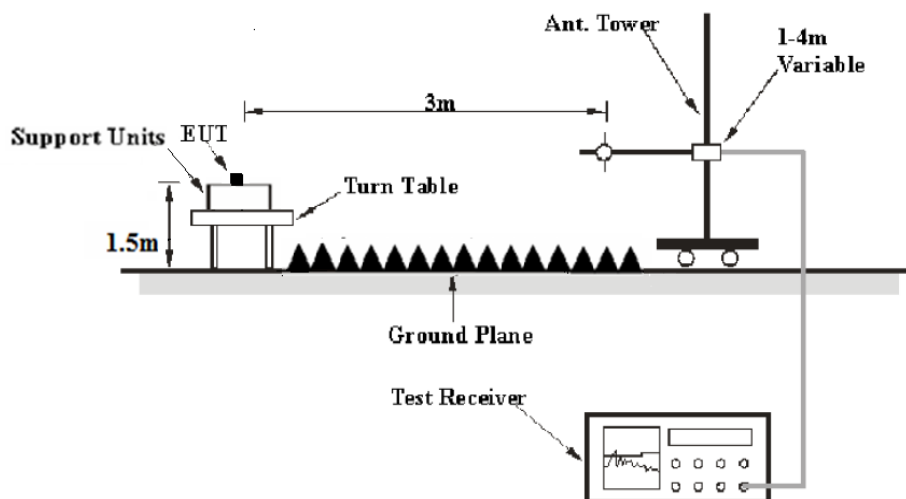

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	VBW	Detector	Duty Cycle	Measurement method
30 MHz - 1000 MHz	120 kHz	/	QP	/	QP
Above 1GHz	1MHz	3 MHz	PK	/	PK
	1MHz	3 MHz	RMS	≥98%	Ave
	1MHz	1/T	PK	<98%	Ave

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz - 1GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliant with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	21.6~25.2 °C
Relative Humidity:	48~51 %
ATM Pressure:	101.1~101.2kPa

The testing was performed by Max Min from 2019-02-20 to 2019-08-23.

EUT operation mode: Transmitting

For Wi-Fi Mode:**Spurious Emission Test:****30MHz-1GHz(Worst case: Chain 1):**

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **low channel of 802.11b mode in Z-axis of orientation** was recorded

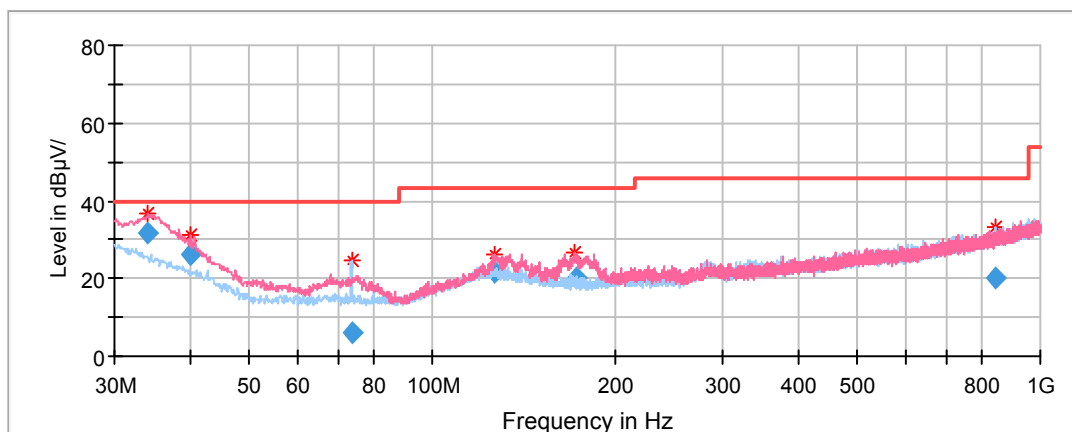

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
34.12	31.87	100	V	113	-6.2	40.00	8.13
40.06	26.11	100	V	72	-10	40.00	13.89
73.65	5.93	100	H	132	-17.5	40.00	34.07
126.64	21.64	100	V	154	-11.5	43.50	21.86
172.06	20.00	100	V	0	-13.3	43.50	23.50
842.83	20.27	100	H	70	-1.1	46.00	25.73

1GHz-18GHz:**802.11b Mode(Chain 0):**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

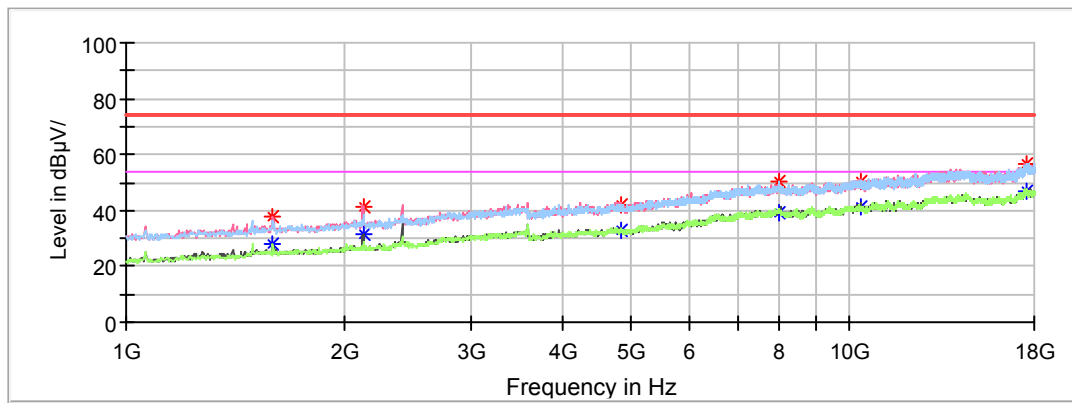

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.00	---	27.80	200	V	47	-9.6	54.00	26.20
1595.00	37.72	---	200	V	47	-9.6	74.00	36.28
2125.40	---	31.14	150	V	82	-7.9	54.00	22.86
2125.40	41.47	---	150	V	82	-7.9	74.00	32.53
4828.40	---	32.73	150	V	0	-0.5	54.00	21.27
4828.40	42.00	---	150	V	0	-0.5	74.00	32.00
7970.00	---	39.11	150	H	0	7.0	54.00	14.89
7970.00	50.19	---	150	H	0	7.0	74.00	23.81
10356.80	---	41.23	150	H	6	8.8	54.00	12.77
10356.80	50.26	---	150	H	6	8.8	74.00	23.74
17517.20	---	47.10	200	H	188	14.3	54.00	6.90
17517.20	56.91	---	200	H	188	14.3	74.00	17.09

Middle Channel: 2437MHz


Full Spectrum

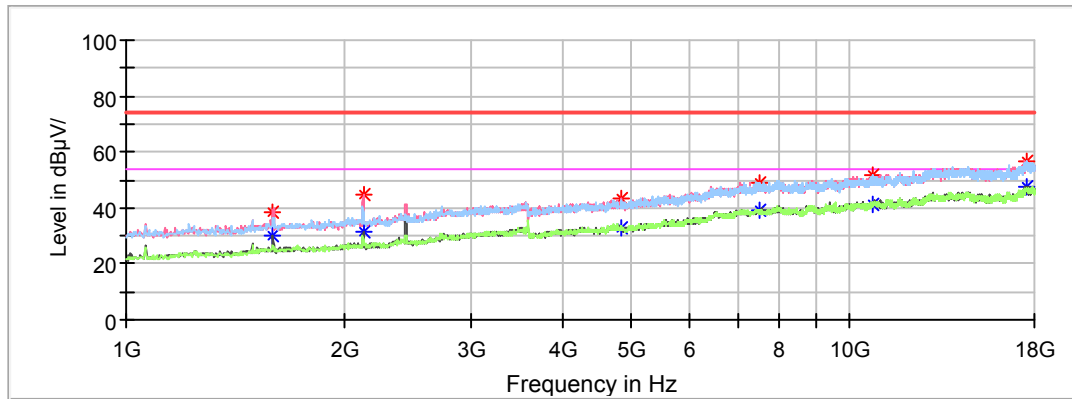

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1591.60	---	29.73	200	V	66	-9.6	54.00	24.27
1591.60	38.25	---	200	V	66	-9.6	74.00	35.75
2125.40	---	31.82	200	V	66	-7.9	54.00	22.18
2125.40	44.72	---	200	V	66	-7.9	74.00	29.28
4838.60	---	32.72	150	V	242	-0.5	54.00	21.28
4838.60	43.25	---	150	V	242	-0.5	74.00	30.75
7511.00	---	38.96	200	H	300	6.2	54.00	15.04
7511.00	48.91	---	200	H	300	6.2	74.00	25.09
10761.40	---	41.14	150	H	242	9.4	54.00	12.86
10761.40	51.80	---	150	H	242	9.4	74.00	22.20
17564.80	---	47.86	150	V	241	14.2	54.00	6.14
17564.80	56.45	---	150	V	241	14.2	74.00	17.55

High Channel: 2462MHz

Full Spectrum

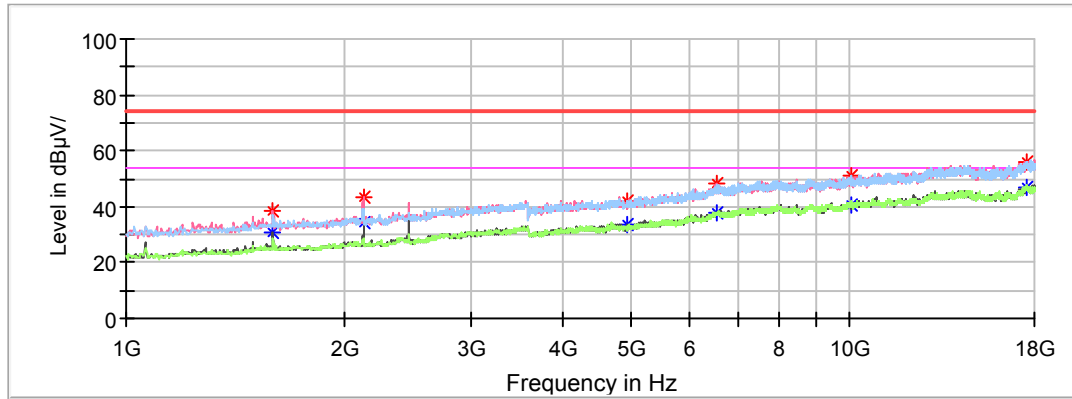

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1591.60	---	30.58	200	V	59	-9.6	54.00	23.42
1591.60	38.62	---	200	V	59	-9.6	74.00	35.38
2128.80	---	34.07	200	V	70	-7.9	54.00	19.93
2128.80	43.05	---	200	V	70	-7.9	74.00	30.95
4923.60	---	33.50	150	V	173	-0.4	54.00	20.50
4923.60	42.24	---	150	V	173	-0.4	74.00	31.76
6531.80	---	37.85	200	V	47	4.5	54.00	16.15
6531.80	48.24	---	200	V	47	4.5	74.00	25.76
10020.20	---	40.38	150	H	282	8.3	54.00	13.62
10020.20	50.94	---	150	H	282	8.3	74.00	23.06
17571.60	---	46.77	200	H	80	14.2	54.00	7.23
17571.60	56.17	---	200	H	80	14.2	74.00	17.83

802.11g Mode (Chain 0):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

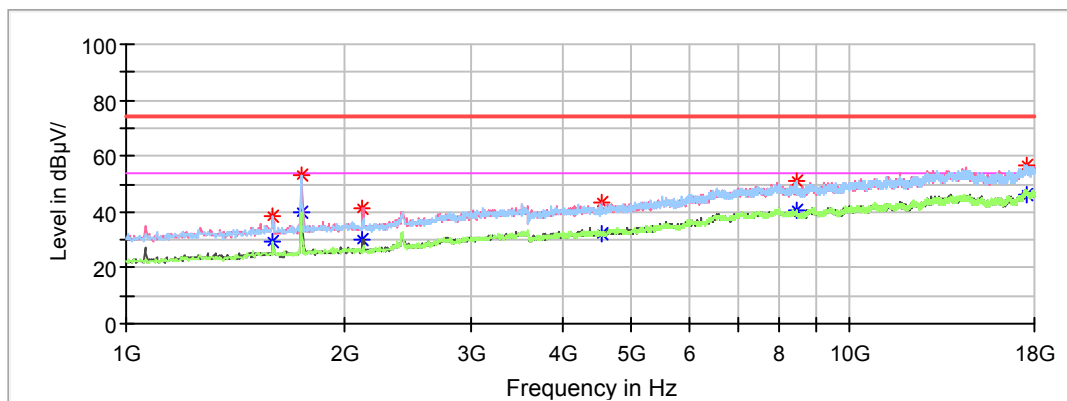

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.00	---	29.71	150	H	67	-9.6	54.00	24.29
1595.00	38.55	---	150	H	67	-9.6	74.00	35.45
1744.60	---	39.93	200	H	67	-9.1	54.00	14.07
1744.60	53.01	---	200	H	67	-9.1	74.00	20.99
2122.00	---	30.17	150	V	145	-7.9	54.00	23.83
2122.00	41.28	---	150	V	145	-7.9	74.00	32.72
4532.60	---	32.04	200	V	244	-0.9	54.00	21.96
4532.60	43.37	---	200	V	244	-0.9	74.00	30.63
8429.00	---	40.32	150	H	11	6.4	54.00	13.68
8429.00	50.73	---	150	H	11	6.4	74.00	23.27
17527.40	---	46.20	200	V	299	14.2	54.00	7.80
17527.40	56.50	---	200	V	299	14.2	74.00	17.50

Middle Channel: 2437MHz


Full Spectrum

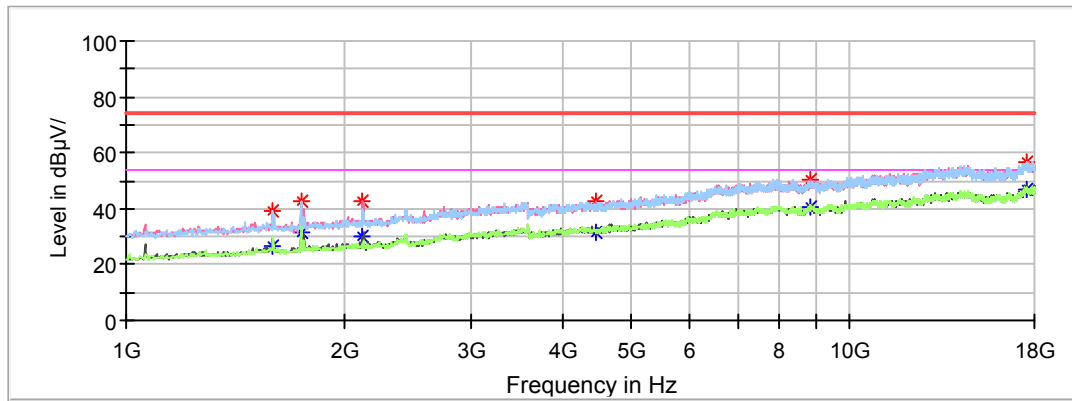

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1591.60	---	26.81	150	H	91	-9.6	54.00	27.19
1591.60	39.49	---	150	H	91	-9.6	74.00	34.51
1744.60	---	31.80	200	H	277	-9.1	54.00	22.20
1744.60	42.60	---	200	H	277	-9.1	74.00	31.40
2122.00	---	29.97	150	V	125	-7.9	54.00	24.03
2122.00	42.68	---	150	V	125	-7.9	74.00	31.32
4471.40	---	31.43	200	V	210	-1.0	54.00	22.57
4471.40	42.33	---	200	V	210	-1.0	74.00	31.67
8813.20	---	40.33	150	V	90	7.2	54.00	13.67
8813.20	50.39	---	150	V	90	7.2	74.00	23.61
17510.40	---	46.71	200	H	79	14.3	54.00	7.29
17510.40	56.36	---	200	H	79	14.3	74.00	17.64

High Channel: 2462MHz

Full Spectrum

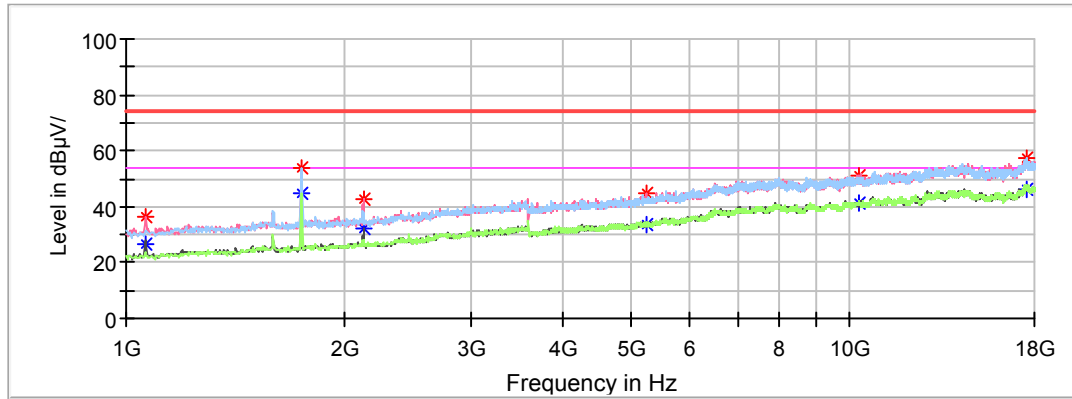

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1064.60	---	26.88	200	V	24	-12.3	54.00	27.12
1064.60	36.20	---	200	V	24	-12.3	74.00	37.80
1744.60	---	44.50	200	H	349	-9.1	54.00	9.50
1744.60	54.14	---	200	H	349	-9.1	74.00	19.86
2128.80	---	32.48	200	V	167	-7.9	54.00	21.52
2128.80	42.55	---	200	V	167	-7.9	74.00	31.45
5222.80	---	33.70	200	V	347	0.5	54.00	20.30
5222.80	44.86	---	150	V	295	0.5	74.00	29.14
10275.20	---	40.93	150	V	176	8.6	54.00	13.07
10275.20	50.93	---	150	V	176	8.6	74.00	23.07
17544.40	---	46.38	150	H	12	14.2	54.00	7.62
17544.40	57.14	---	200	H	221	14.2	74.00	16.86

1GHz-18GHz:**802.11b Mode(Chain 1):**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

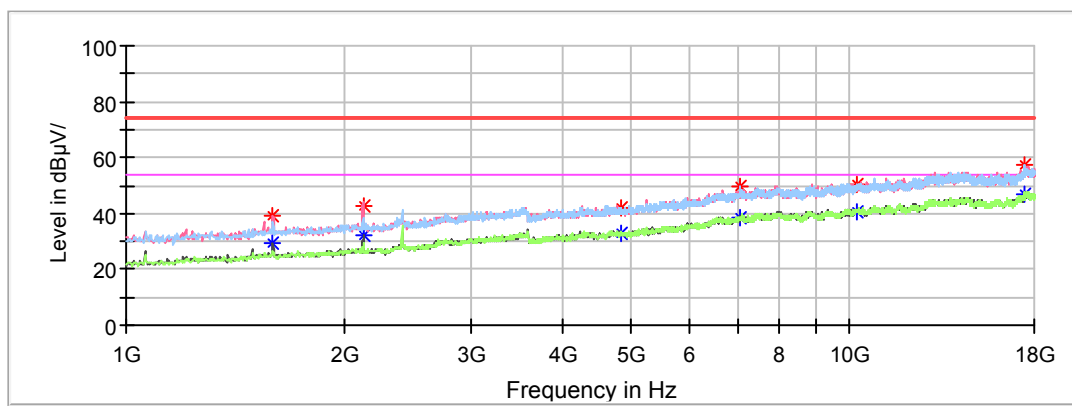

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.00	---	29.52	150	V	53	-9.6	54.00	24.48
1595.00	38.83	---	150	V	53	-9.6	74.00	35.17
2128.80	---	31.92	200	V	100	-7.9	54.00	22.08
2128.80	42.65	---	200	V	100	-7.9	74.00	31.35
4824.00	---	32.97	150	H	248	-0.5	54.00	21.03
4824.00	42.10	---	150	H	248	-0.5	74.00	31.90
7048.60	---	38.23	150	H	142	5.4	54.00	15.77
7048.60	49.49	---	150	H	142	5.4	74.00	24.51
10224.20	---	40.57	200	V	124	8.6	54.00	13.43
10224.20	50.38	---	200	V	124	8.6	74.00	23.62
17496.80	---	47.12	150	H	248	14.3	54.00	6.88
17496.80	57.32	---	150	H	248	14.3	74.00	16.68

Middle Channel: 2437MHz


Full Spectrum

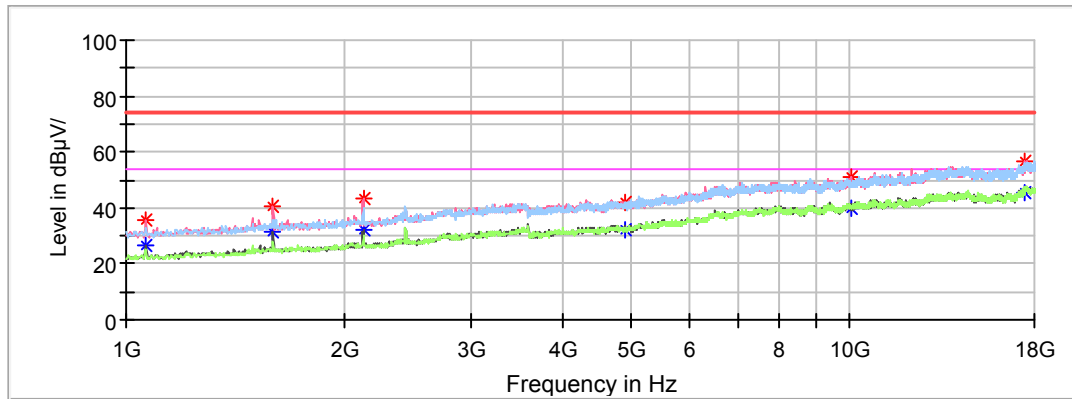

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1064.60	---	26.80	150	V	266	-12.3	54.00	27.20
1064.60	35.37	---	150	V	266	-12.3	74.00	38.63
1595.00	---	31.31	200	V	66	-9.6	54.00	22.69
1595.00	40.25	---	200	V	66	-9.6	74.00	33.75
2128.80	---	32.33	200	V	66	-7.9	54.00	21.67
2128.80	43.25	---	200	V	66	-7.9	74.00	30.75
4874.0	---	32.36	150	H	350	-0.4	54.00	21.64
4874.0	41.79	---	150	H	350	-0.4	74.00	32.21
10023.60	---	40.04	150	V	231	8.3	54.00	13.96
10023.60	50.95	---	150	V	231	8.3	74.00	23.05
17428.80	---	45.76	200	V	54	13.9	54.00	8.24
17428.80	56.65	---	200	V	54	13.9	74.00	17.35

High Channel: 2462MHz

Full Spectrum

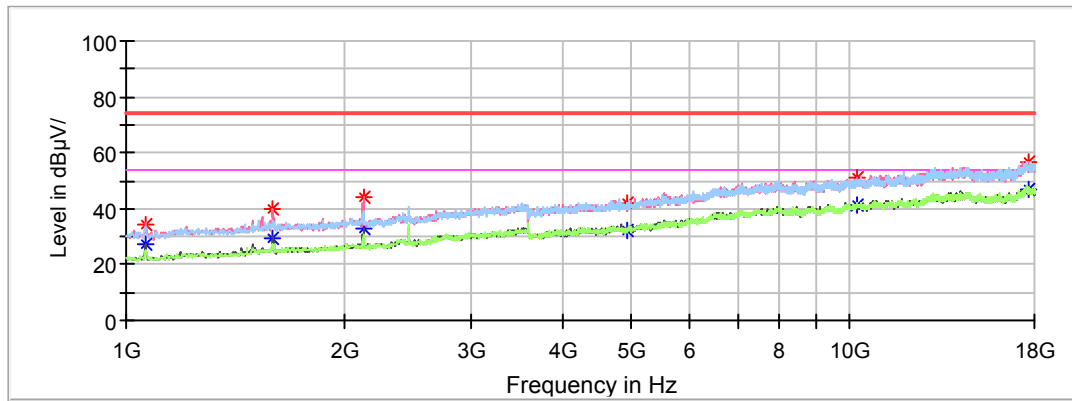

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1061.20	---	27.09	150	V	272	-12.3	54.00	26.91
1061.20	34.15	---	150	V	272	-12.3	74.00	39.85
1591.60	---	29.66	200	V	77	-9.6	54.00	24.34
1591.60	39.59	---	200	V	77	-9.6	74.00	34.41
2128.80	---	32.72	200	V	65	-7.9	54.00	21.28
2128.80	44.24	---	200	V	65	-7.9	74.00	29.76
4924.00	---	31.96	150	H	30	-0.4	54.00	22.04
4924.00	41.89	---	150	H	30	-0.4	74.00	32.11
10217.40	---	41.11	200	V	135	8.6	54.00	12.89
10217.40	51.20	---	200	V	135	8.6	74.00	22.80
17649.80	---	46.97	150	V	237	14.0	54.00	7.03
17649.80	56.37	---	150	V	237	14.0	74.00	17.63

802.11g Mode (Chain 1):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

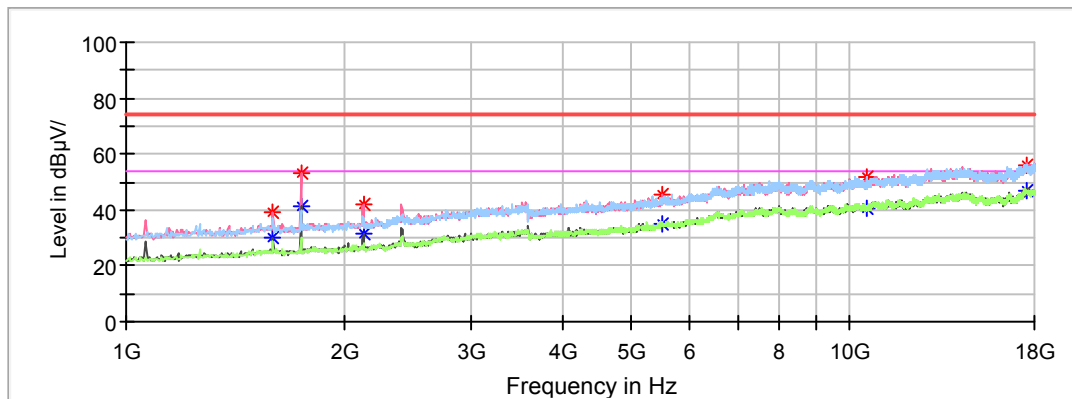

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.00	---	30.14	200	V	41	-9.6	54.00	23.86
1595.00	38.84	---	200	V	41	-9.6	74.00	35.16
1748.00	---	41.07	150	V	62	-9.1	54.00	12.93
1748.00	53.50	---	150	V	62	-9.1	74.00	20.50
2125.40	---	31.32	150	V	195	-7.9	54.00	22.68
2125.40	41.91	---	150	V	195	-7.9	74.00	32.09
5498.20	---	34.69	150	V	172	1.4	54.00	19.31
5498.20	45.24	---	200	V	172	1.4	74.00	28.76
10554.00	---	40.46	200	H	74	9.1	54.00	13.54
10554.00	51.45	---	200	H	74	9.1	74.00	22.55
17561.40	---	46.72	200	V	301	14.2	54.00	7.28
17561.40	56.23	---	200	V	301	14.2	74.00	17.77

Middle Channel: 2437MHz


Full Spectrum

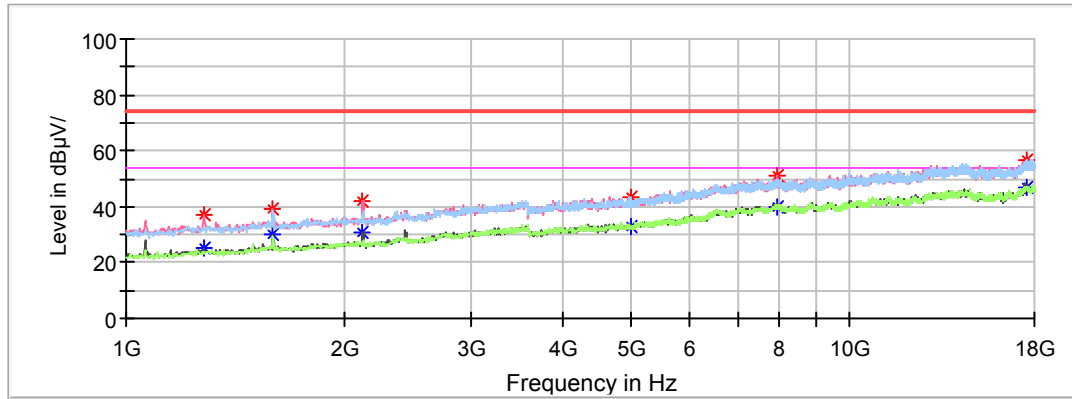

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1278.80	---	24.97	200	V	339	-11.1	54.00	29.03
1278.80	37.00	---	200	V	339	-11.1	74.00	37.00
1591.60	---	30.15	200	V	47	-9.6	54.00	23.85
1591.60	38.83	---	200	V	47	-9.6	74.00	35.17
2122.00	---	31.06	200	V	160	-7.9	54.00	22.94
2122.00	41.68	---	200	V	160	-7.9	74.00	32.32
4971.20	---	32.66	150	H	22	-0.3	54.00	21.34
4971.20	43.61	---	150	H	22	-0.3	74.00	30.39
7939.40	---	39.61	150	V	349	6.9	54.00	14.39
7939.40	51.08	---	150	V	349	6.9	74.00	22.92
17530.80	---	46.52	200	H	264	14.2	54.00	7.48
17530.80	56.65	---	200	H	264	14.2	74.00	17.35

High Channel: 2462MHz

Full Spectrum

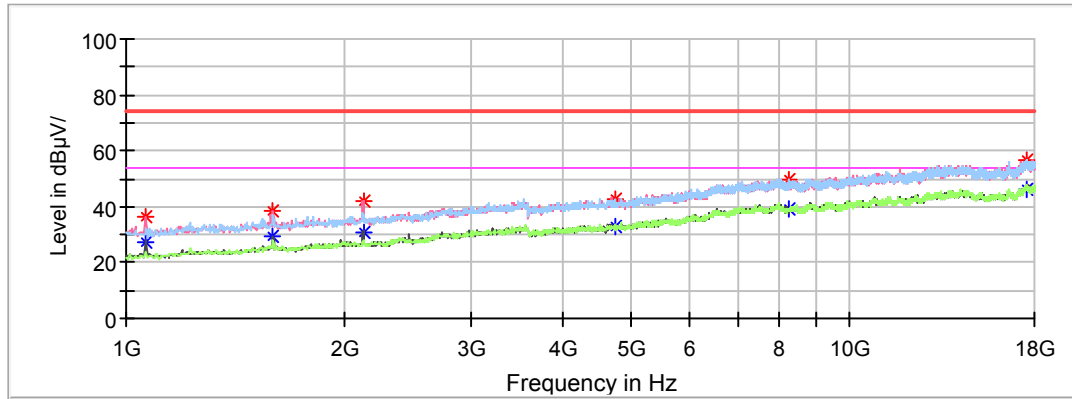

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1061.20	---	27.49	200	V	2	-12.3	54.00	26.51
1061.20	36.22	---	200	V	2	-12.3	74.00	37.78
1595.00	---	29.32	200	V	39	-9.6	54.00	24.68
1595.00	38.24	---	200	V	39	-9.6	74.00	35.76
2128.80	---	30.98	150	V	157	-7.9	54.00	23.02
2128.80	41.81	---	150	V	157	-7.9	74.00	32.19
4729.80	---	32.74	150	H	268	-0.7	54.00	21.26
4729.80	42.79	---	150	H	268	-0.7	74.00	31.21
8259.00	---	39.46	150	H	29	6.6	54.00	14.54
8259.00	49.48	---	150	H	29	6.6	74.00	24.52
17609.00	---	45.88	200	H	339	14.1	54.00	8.12
17609.00	56.93	---	200	H	339	14.1	74.00	17.07

802.11n-HT20 Mode (Chain0+Chain1):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel : 2412MHz


Full Spectrum

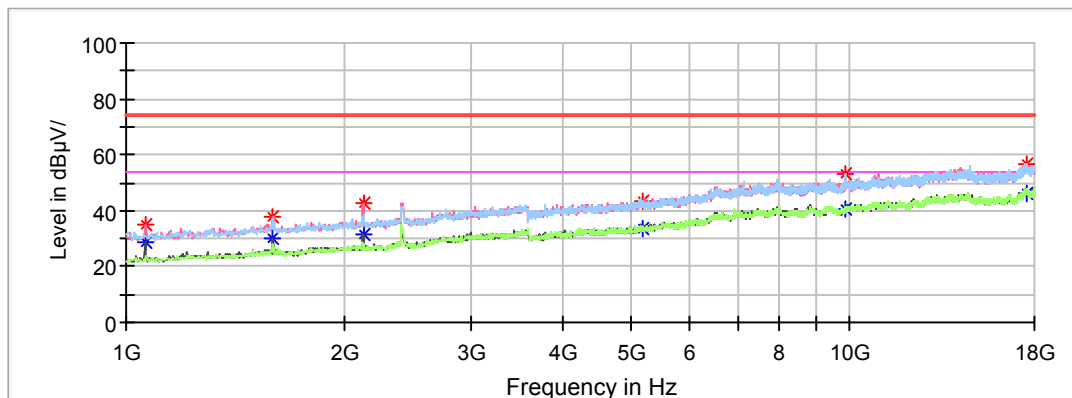

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1061.20	---	28.32	200	V	0	-12.3	54.00	25.68
1061.20	35.05	---	200	V	0	-12.3	74.00	38.95
1595.00	---	29.79	200	V	151	-9.6	54.00	24.21
1595.00	38.03	---	200	V	151	-9.6	74.00	35.97
2125.40	---	31.18	200	V	162	-7.9	54.00	22.82
2125.40	42.39	---	200	V	162	-7.9	74.00	31.61
5165.00	---	33.63	150	H	299	0.3	54.00	20.37
5165.00	43.16	---	150	H	299	0.3	74.00	30.84
9884.20	---	40.28	200	H	322	8.1	54.00	13.72
9884.20	53.05	---	200	H	322	8.1	74.00	20.95
17537.60	---	46.50	200	H	44	14.2	54.00	7.50
17537.60	56.77	---	200	H	44	14.2	74.00	17.23

Middle Channel: 2437MHz


Full Spectrum

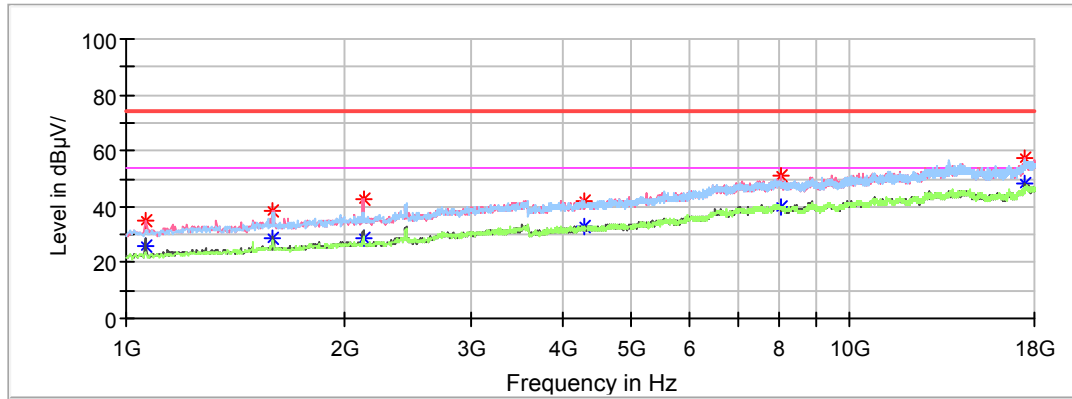

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1064.60	---	26.14	200	V	0	-12.3	54.00	27.86
1064.60	35.30	---	200	V	0	-12.3	74.00	38.70
1591.60	---	28.96	200	V	200	-9.6	54.00	25.04
1591.60	38.51	---	200	V	200	-9.6	74.00	35.49
2132.20	---	28.88	150	V	149	-7.9	54.00	25.12
2132.20	42.99	---	150	V	149	-7.9	74.00	31.01
4301.40	---	32.87	200	H	291	-1.3	54.00	21.13
4301.40	42.24	---	200	H	291	-1.3	74.00	31.76
8021.00	---	39.70	150	V	231	7.0	54.00	14.30
8021.00	50.72	---	150	V	231	7.0	74.00	23.28
17479.80	---	48.38	150	V	278	14.2	54.00	5.62
17479.80	57.59	---	150	V	278	14.2	74.00	16.41

High Channel : 2462MHz

Full Spectrum

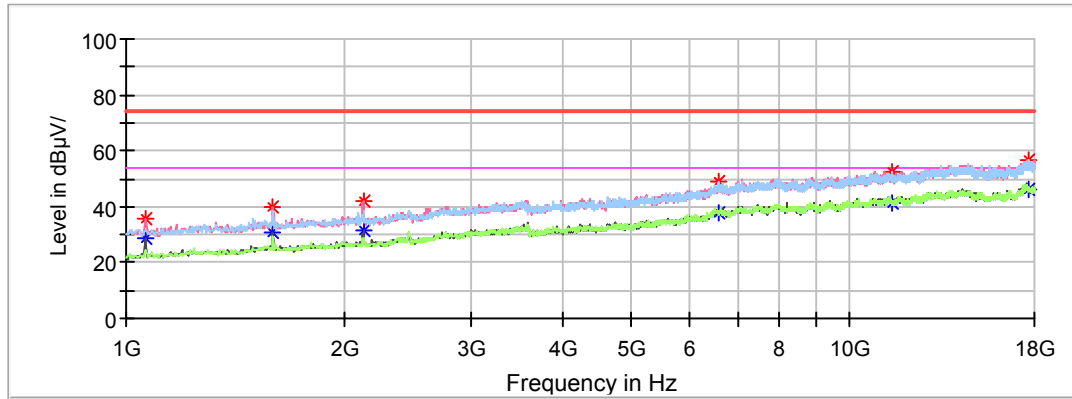

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1061.20	---	28.74	200	V	5	-12.3	54.00	25.26
1061.20	35.69	---	200	V	5	-12.3	74.00	38.31
1595.00	---	30.51	200	V	45	-9.6	54.00	23.49
1595.00	39.79	---	200	V	45	-9.6	74.00	34.21
2128.80	---	31.39	200	V	162	-7.9	54.00	22.61
2128.80	42.18	---	200	V	162	-7.9	74.00	31.82
6572.60	---	37.81	200	H	332	4.5	54.00	16.19
6572.60	48.91	---	200	H	332	4.5	74.00	25.09
11427.80	---	41.20	150	H	204	9.8	54.00	12.80
11427.80	52.55	---	150	H	204	9.8	74.00	21.45
17629.40	---	46.31	200	H	215	14.1	54.00	7.69
17629.40	56.93	---	200	H	215	14.1	74.00	17.07

802.11n-HT40 Mode (Chain0+Chain1):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel : 2422MHz


Full Spectrum

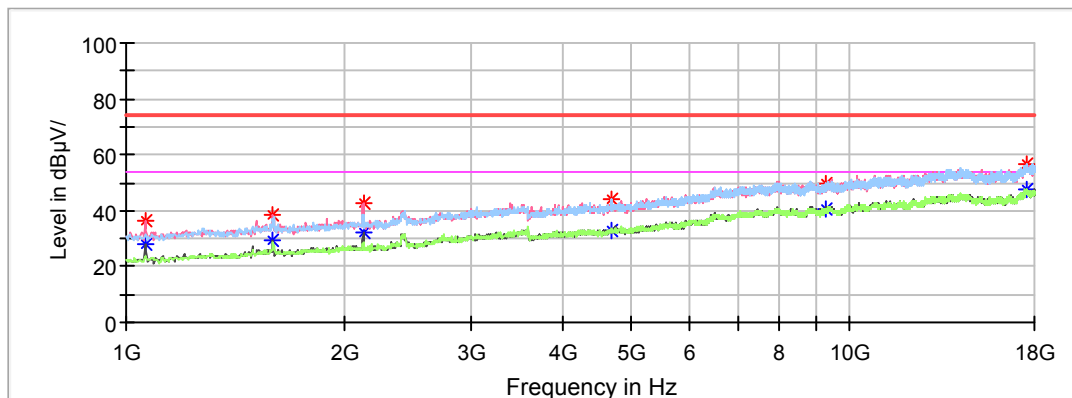

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1061.20	---	27.71	200	V	2	-12.3	54.00	26.29
1061.20	36.22	---	200	V	2	-12.3	74.00	37.78
1591.60	---	29.27	200	V	197	-9.6	54.00	24.73
1591.60	38.20	---	200	V	197	-9.6	74.00	35.80
2125.40	---	31.99	200	V	162	-7.9	54.00	22.01
2125.40	42.47	---	200	V	162	-7.9	74.00	31.53
4678.80	---	32.67	200	H	332	-0.7	54.00	21.33
4678.80	44.40	---	200	H	332	-0.7	74.00	29.60
9292.60	---	40.28	150	H	209	7.7	54.00	13.72
9292.60	49.84	---	150	H	209	7.7	74.00	24.16
17530.80	---	47.31	150	H	92	14.2	54.00	6.69
17530.80	56.95	---	150	H	92	14.2	74.00	17.05

Middle Channel: 2437MHz


Full Spectrum

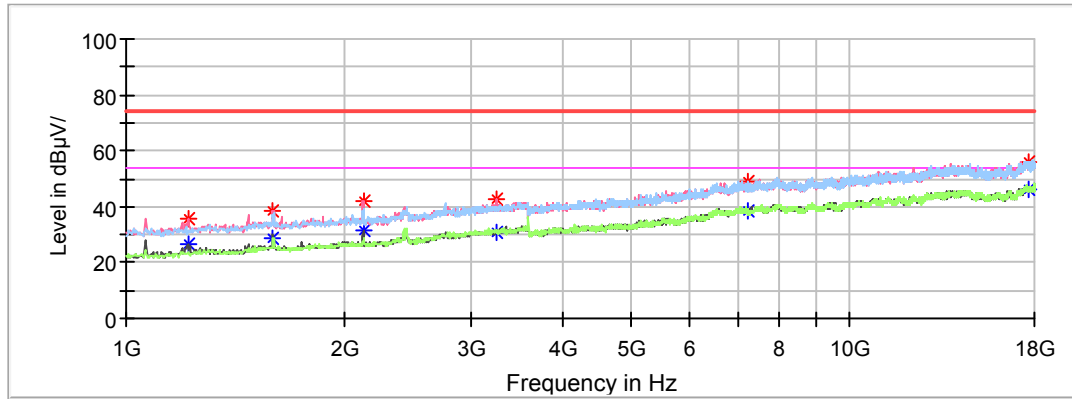

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1217.60	---	26.36	200	V	347	-11.5	54.00	27.64
1217.60	35.95	---	200	V	347	-11.5	74.00	38.05
1591.60	---	28.93	200	V	209	-9.6	54.00	25.07
1591.60	38.62	---	200	V	209	-9.6	74.00	35.38
2128.80	---	31.61	200	V	57	-7.9	54.00	22.39
2128.80	42.21	---	200	V	57	-7.9	74.00	31.79
3250.80	---	30.75	200	V	317	-4.0	54.00	23.25
3250.80	42.43	---	200	V	317	-4.0	74.00	31.57
7215.20	---	38.11	150	H	34	5.7	54.00	15.89
7215.20	48.80	---	200	H	34	5.7	74.00	25.20
17721.20	---	46.19	200	H	0	13.9	54.00	7.81
17721.20	56.13	---	200	H	0	13.9	74.00	17.87

High Channel : 2452MHz

Full Spectrum

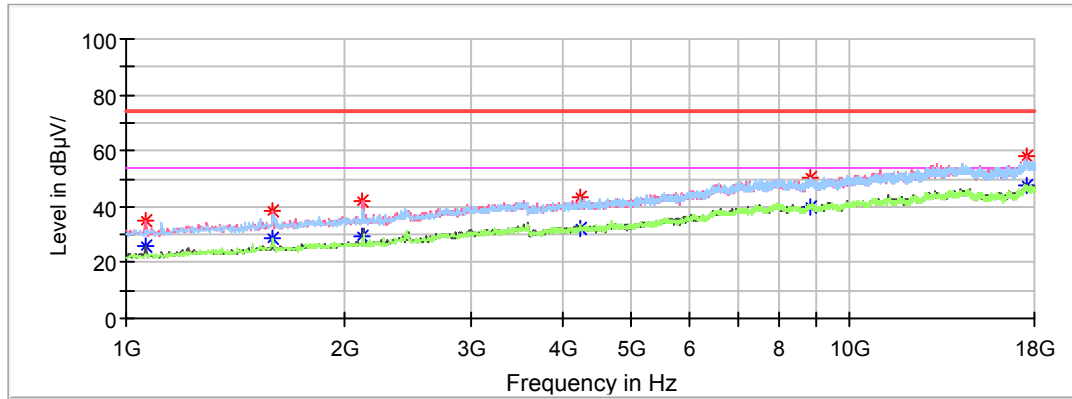


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1061.20	---	25.63	150	V	210	-12.3	54.00	28.37
1061.20	34.84	---	150	V	210	-12.3	74.00	39.16
1595.00	---	28.39	200	V	197	-9.6	54.00	25.61
1595.00	38.60	---	200	V	197	-9.6	74.00	35.40
2122.00	---	29.66	150	V	151	-7.9	54.00	24.34
2122.00	42.09	---	150	V	151	-7.9	74.00	31.91
4230.00	---	32.37	150	H	317	-1.5	54.00	21.63
4230.00	43.14	---	150	H	317	-1.5	74.00	30.86
8809.80	---	39.81	200	V	28	7.1	54.00	14.19
8809.80	50.65	---	200	V	28	7.1	74.00	23.35
17530.80	---	47.54	200	V	151	14.2	54.00	6.46
17530.80	57.96	---	200	V	151	14.2	74.00	16.04

18GHz-25GHz(worst case: chain 1):


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **low channel of 802.11b mode in Z-axis of orientation** was recorded

Vertical

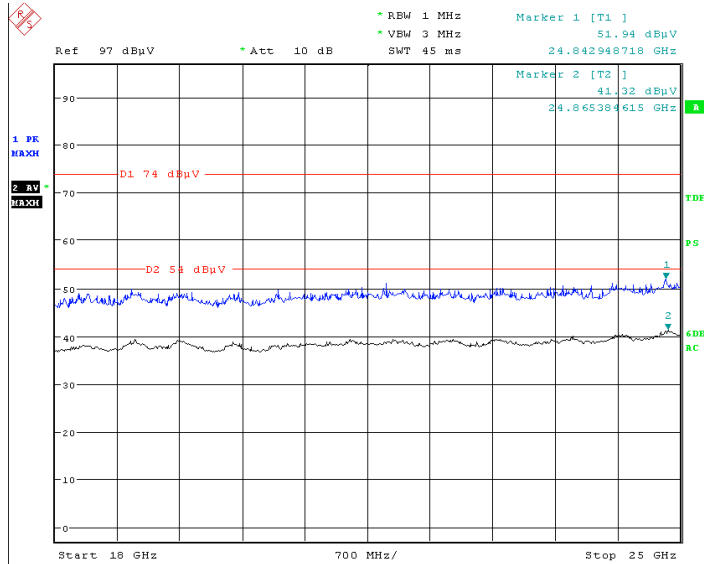

Date: 23.AUG.2019 14:02:31

Horizontal

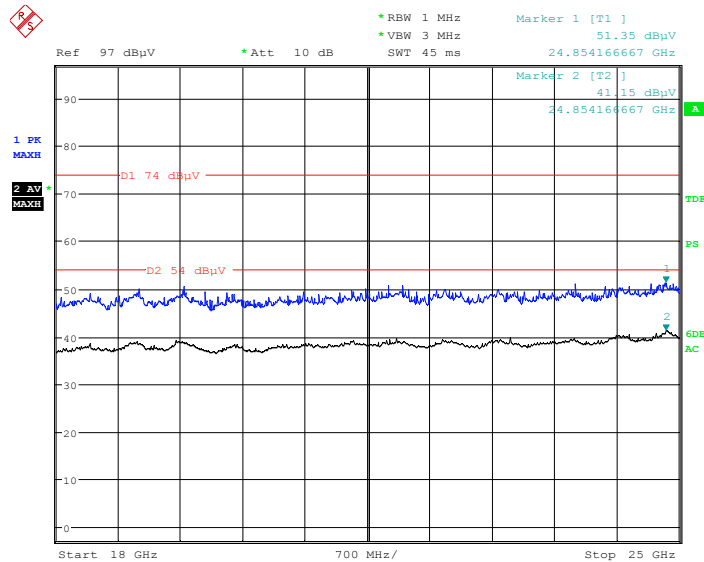

Date: 23.AUG.2019 14:31:59

Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)**802.11b Mode (Chain 0):** (Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	---	40.93	150.0	V	40.0	2.8	54.00	13.07
2390.00	52.11	---	150.0	V	40.0	2.8	74.00	21.89
High Channel: 2462MHz								
2483.50	---	41.28	200.0	V	347.0	3.1	54.00	12.72
2483.50	52.10	---	200.0	V	347.0	3.1	74.00	21.90

802.11g Mode (Chain 0): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	---	40.84	200.0	V	359.0	2.8	54.00	13.16
2390.00	51.33	---	200.0	V	359.0	2.8	74.00	22.67
High Channel: 2462MHz								
2483.50	---	40.08	150.0	H	182.0	3.1	54.00	13.92
2483.50	51.09	---	150.0	H	182.0	3.1	74.00	22.91

802.11b Mode (Chain 1): (Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	---	39.82	200.0	V	321.0	2.7	54.00	14.18
2390.00	51.66	---	200.0	V	321.0	2.7	74.00	22.34
High Channel: 2462MHz								
2483.50	---	41.06	150.0	V	312.0	3.1	54.00	12.94
2483.50	51.30	---	150.0	V	312.0	3.1	74.00	22.70

802.11g Mode (Chain 1): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	---	40.51	150.0	V	84.0	2.8	54.00	13.49
2390.00	51.00	---	150.0	V	84.0	2.8	74.00	23.00
High Channel: 2462MHz								
2483.50	---	41.52	200.0	V	168.0	3.0	54.00	12.48
2483.50	51.54	---	200.0	V	168.0	3.0	74.00	22.46

802.11n-HT20 Mode (Chain0+Chain1): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	---	40.81	150.0	V	291.0	2.8	54.00	13.19
2390.00	51.02	---	150.0	V	291.0	2.8	74.00	22.98
High Channel: 2462MHz								
2483.50	---	40.55	200.0	H	324.0	3.1	54.00	13.45
2483.50	51.27	---	200.0	H	324.0	3.1	74.00	22.73

802.11n-HT40 Mode (Chain0+Chain1): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2390.00	---	41.49	150.0	V	99.0	2.8	54.00	12.51
2390.00	50.98	---	150.0	V	99.0	2.8	74.00	23.02
High Channel: 2452MHz								
2483.50	---	41.92	150.0	V	150.0	3.0	54.00	12.08
2483.50	52.06	---	150.0	V	150.0	3.0	74.00	21.94

For BLE Mode:**Spurious Emission Test:****30MHz-1GHz**

(The worst case **high channel of operation in the Z axis of orientation** was recorded)

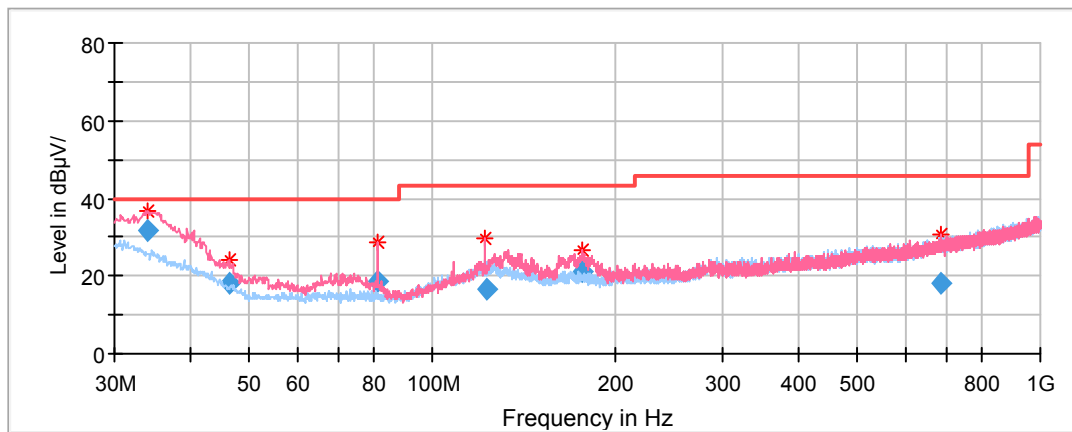

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
34.12	31.92	100	V	50	-6.4	40.00	8.08
46.37	18.05	100	V	178	-14.4	40.00	21.95
81.42	18.43	100	V	146	-17.7	40.00	21.57
123.07	16.40	100	V	146	-11.3	43.50	27.10
176.18	21.06	100	V	296	-13.4	43.50	22.44
687.44	18.06	100	V	188	-3.4	46.00	27.94

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz


Full Spectrum

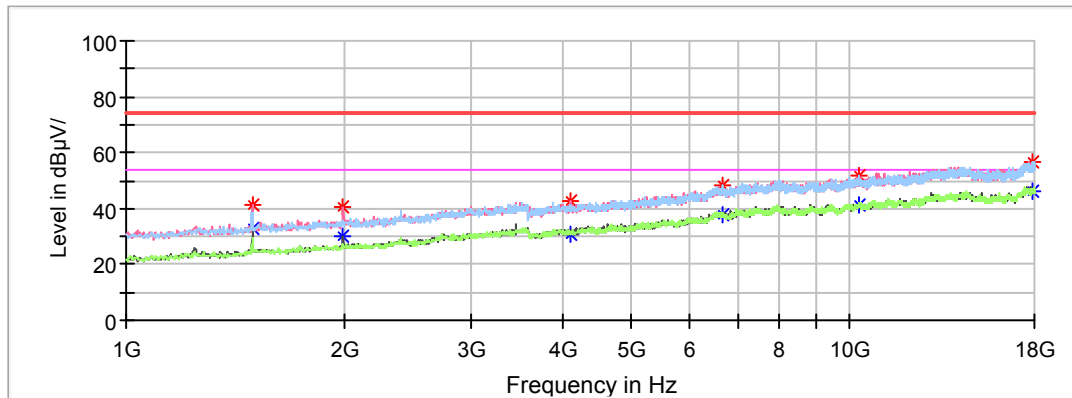

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1496.40	---	32.59	200	V	164	-9.9	54.00	21.41
1496.40	41.20	---	200	V	164	-9.9	74.00	32.80
1996.20	---	30.10	200	V	152	-8.3	54.00	23.90
1996.20	40.41	---	200	V	152	-8.3	74.00	33.59
4117.80	---	30.87	150	V	252	-1.7	54.00	23.13
4117.80	42.34	---	150	V	252	-1.7	74.00	31.66
6678.00	---	37.49	200	H	185	4.7	54.00	16.51
6678.00	48.08	---	200	H	185	4.7	74.00	25.92
10271.80	---	40.96	200	H	1	8.6	54.00	13.04
10271.80	52.01	---	200	H	1	8.6	74.00	21.99
17938.80	---	46.17	200	V	126	13.6	54.00	7.83
17938.80	56.89	---	200	H	126	13.6	74.00	17.11

Middle Channel: 2440MHz


Full Spectrum

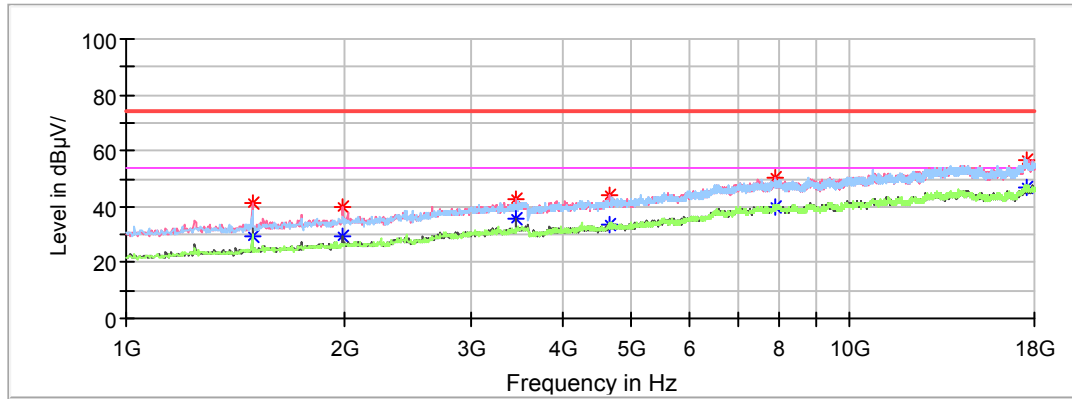

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1493.00	---	29.70	200	V	163	-10.0	54.00	24.30
1493.00	40.92	---	200	V	163	-10.0	74.00	33.08
1992.80	---	29.21	200	V	151	-8.3	54.00	24.79
1992.80	39.59	---	200	V	151	-8.3	74.00	34.41
3454.80	---	35.38	200	V	228	-3.6	54.00	18.62
3454.80	42.95	---	200	V	228	-3.6	74.00	31.05
4658.40	---	33.60	150	V	290	-0.8	54.00	20.40
4658.40	43.87	---	150	V	290	-0.8	74.00	30.13
7905.40	---	39.84	150	V	310	6.9	54.00	14.16
7905.40	50.53	---	150	V	310	6.9	74.00	23.47
17568.20	---	46.65	200	H	298	14.2	54.00	7.35
17568.20	56.62	---	200	H	298	14.2	74.00	17.38

High Channel: 2480MHz

Full Spectrum

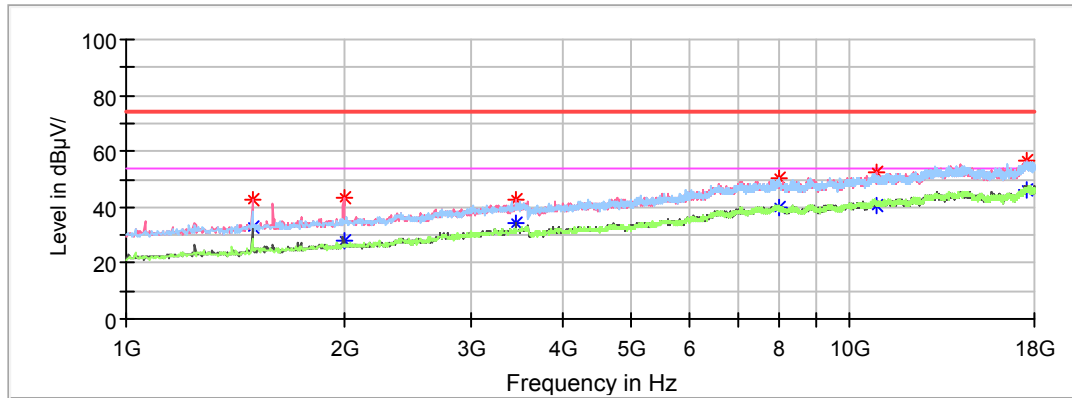


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1496.40	---	32.56	150	V	170	-9.9	54.00	21.44
1496.40	43.00	---	150	V	170	-9.9	74.00	31.00
1999.60	---	27.85	200	V	263	-8.2	54.00	26.15
1999.60	43.24	---	200	V	263	-8.2	74.00	30.76
3454.80	---	34.16	200	V	228	-3.6	54.00	19.84
3454.80	42.87	---	200	V	228	-3.6	74.00	31.13
8004.00	---	39.66	200	H	2	7.1	54.00	14.34
8004.00	50.30	---	200	H	2	7.1	74.00	23.70
10911.00	---	40.80	150	V	25	9.6	54.00	13.20
10911.00	52.60	---	150	V	25	9.6	74.00	21.40
17530.80	---	46.07	200	V	85	14.2	54.00	7.93
17530.80	56.82	---	200	V	85	14.2	74.00	17.18

18GHz-25GHz


(The worst case **high channel of operation in the Z axis of orientation** was recorded)

Horizontal

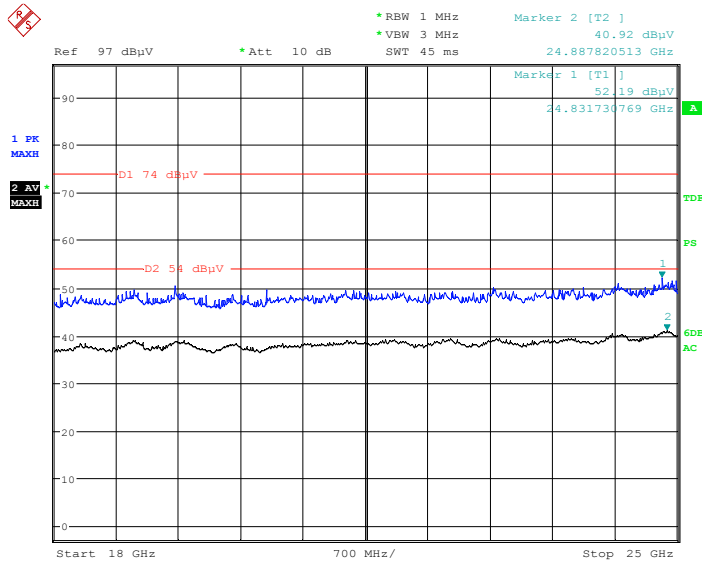

Date: 23.AUG.2019 14:53:23

Vertical

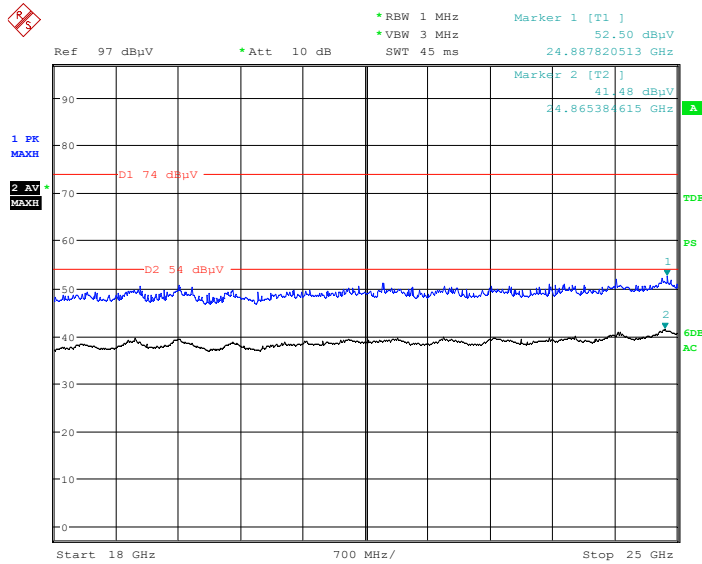

Date: 23.AUG.2019 15:23:06

Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	---	40.17	150.0	V	0.0	2.8	54.00	13.83
2390.00	50.65	---	150.0	V	0.0	2.8	74.00	23.35
High Channel: 2480MHz								
2483.50	---	40.20	200.0	V	57.0	3.0	54.00	13.80
2483.50	51.45	---	200.0	V	57.0	3.0	74.00	22.55



Conducted Spurious Emissions at Antenna Port

Chain0: 802.11b Mode Low Channel

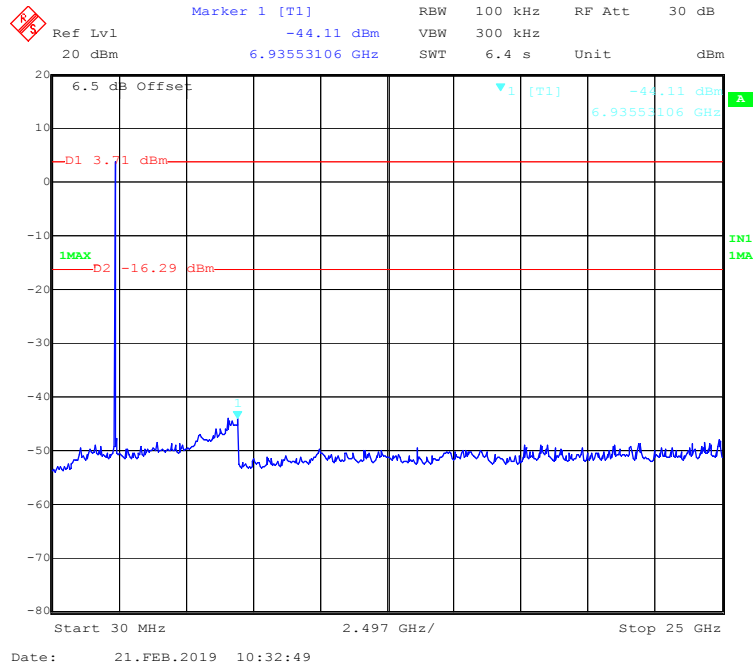


Chain0: 802.11b Mode Middle Channel

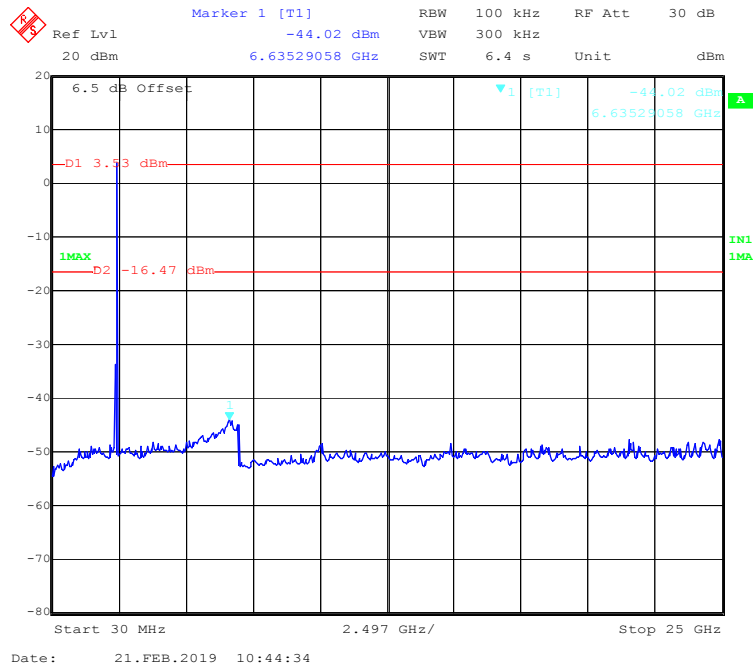


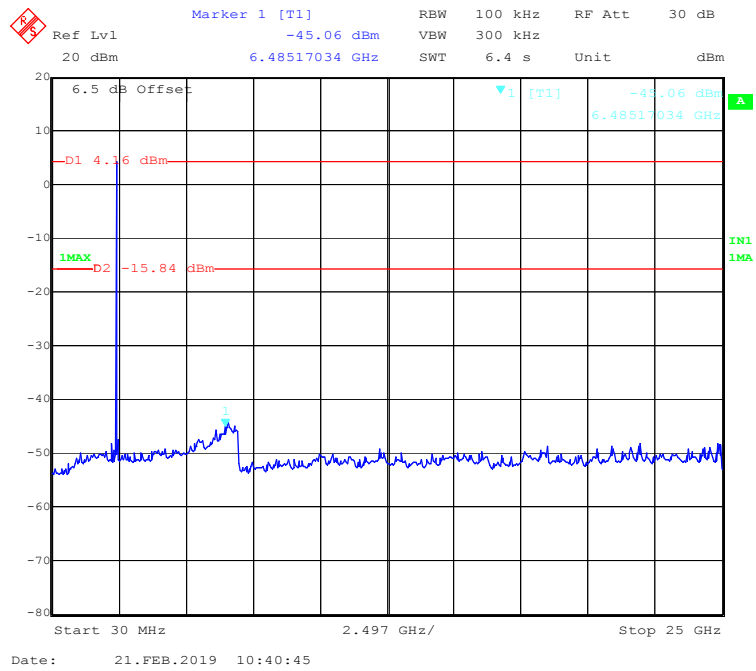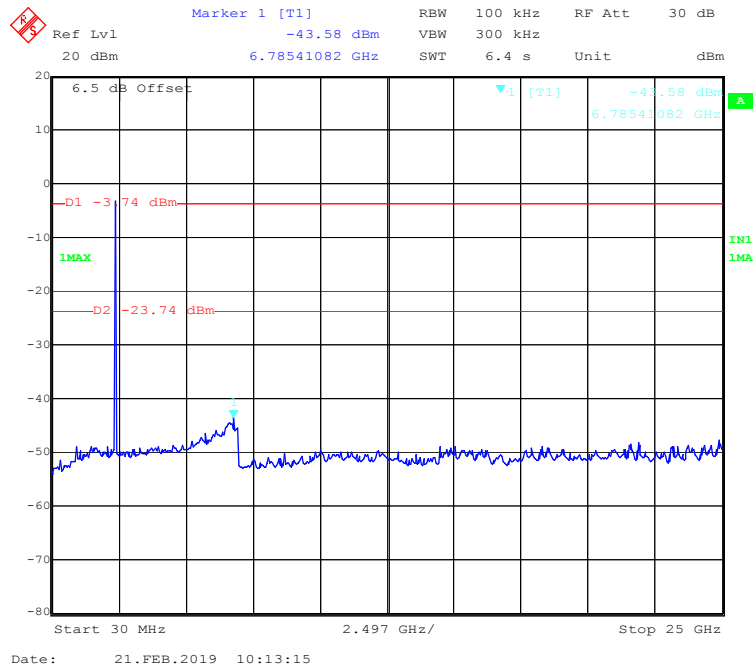Chain0: 802.11b Mode High Channel**Chain0: 802.11g Mode Low Channel**


Chain0: 802.11g Mode Middle Channel

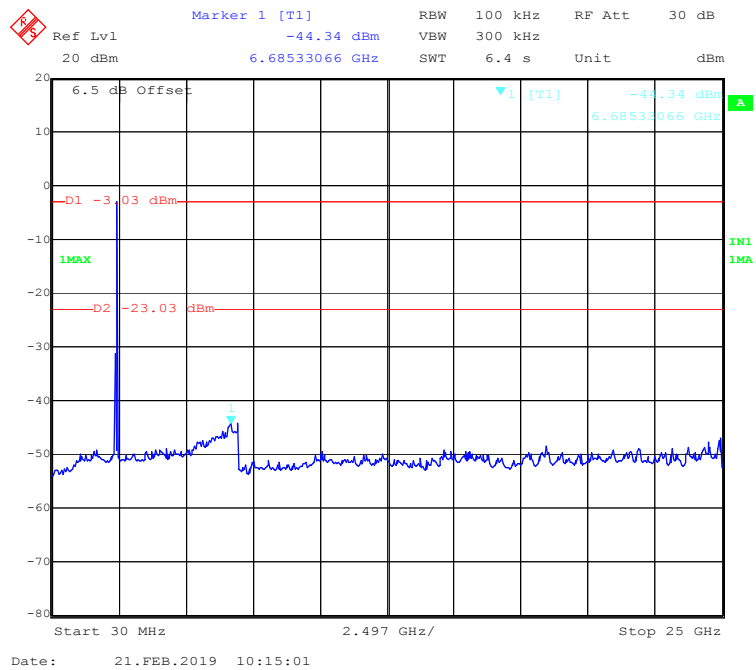


Chain0: 802.11g Mode High Channel

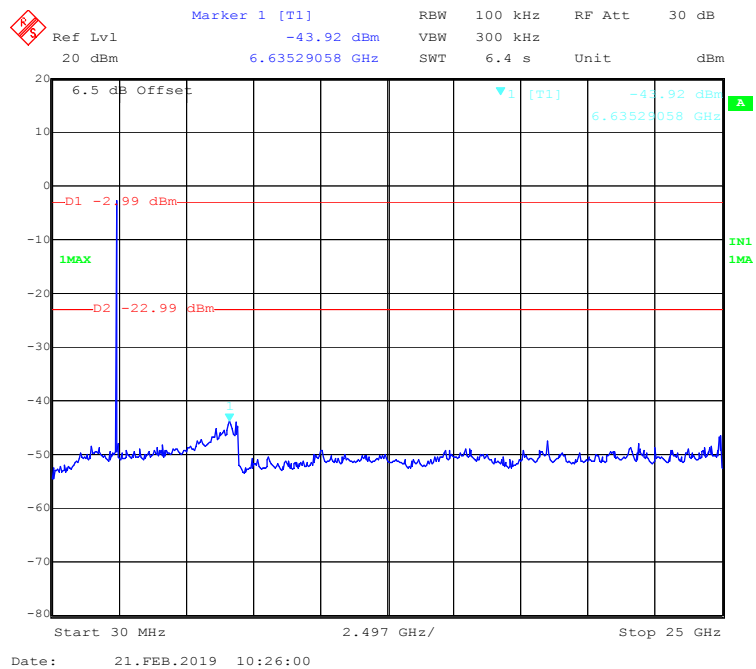


Chain0: 802.11n-HT20 Mode Low Channel

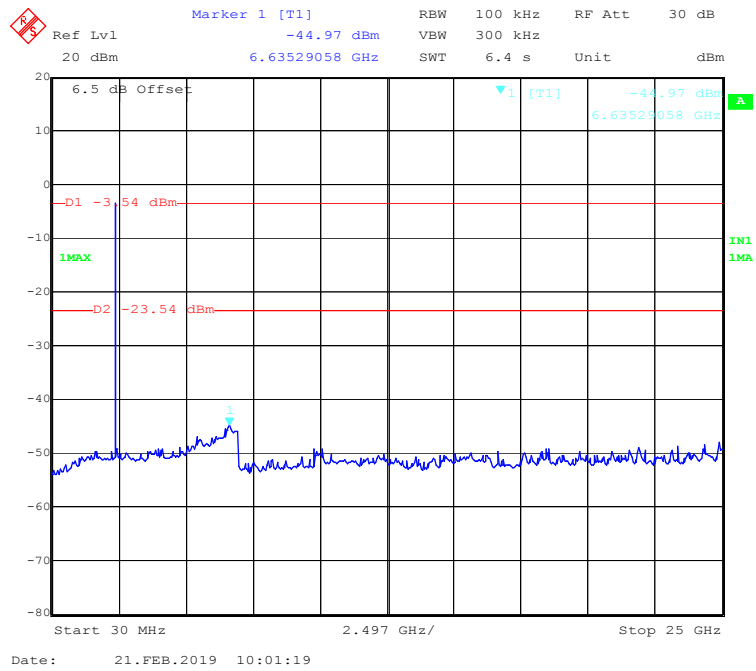


Chain0: 802.11n-HT20 Mode Middle Channel

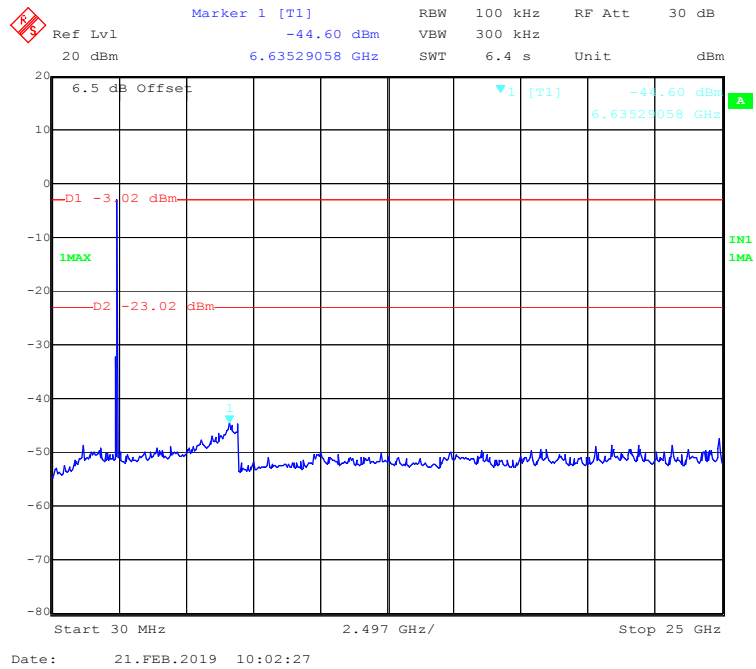


Chain0: 802.11n-HT20 Mode High Channel

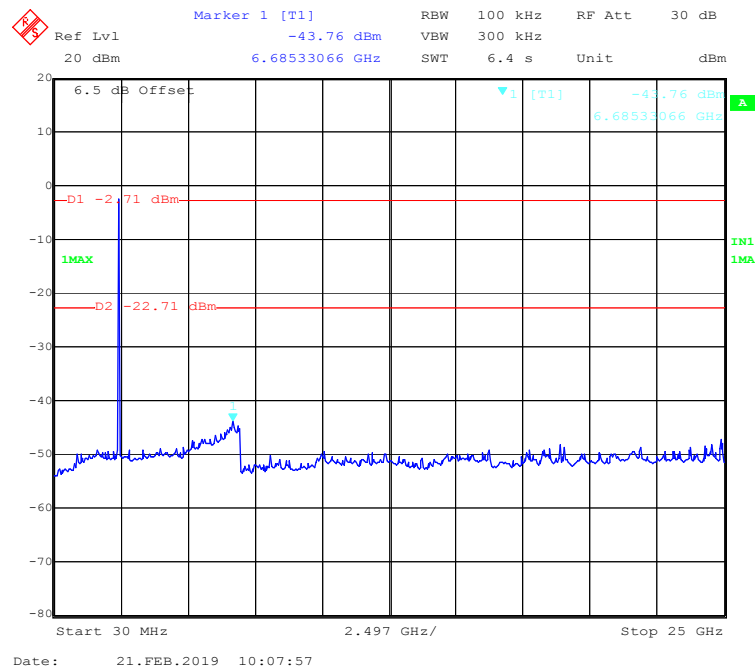


Chain0: 802.11n-HT40 Mode Low Channel

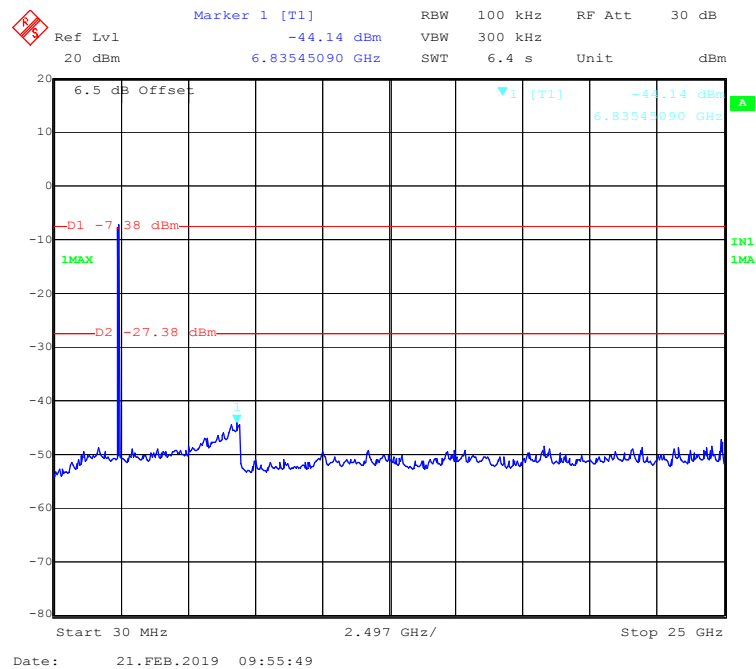

Chain0: 802.11n-HT40 Mode Middle Channel

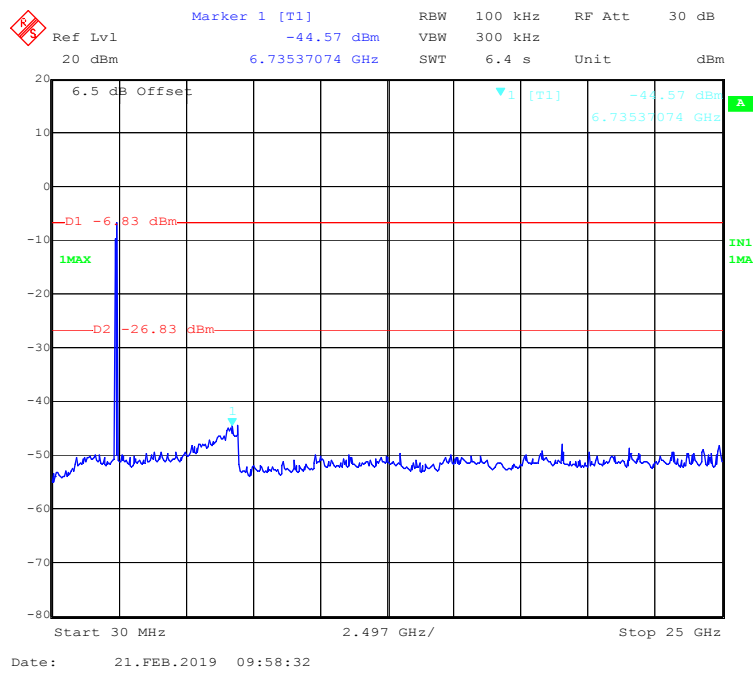


Chain0: 802.11n-HT40 Mode High Channel

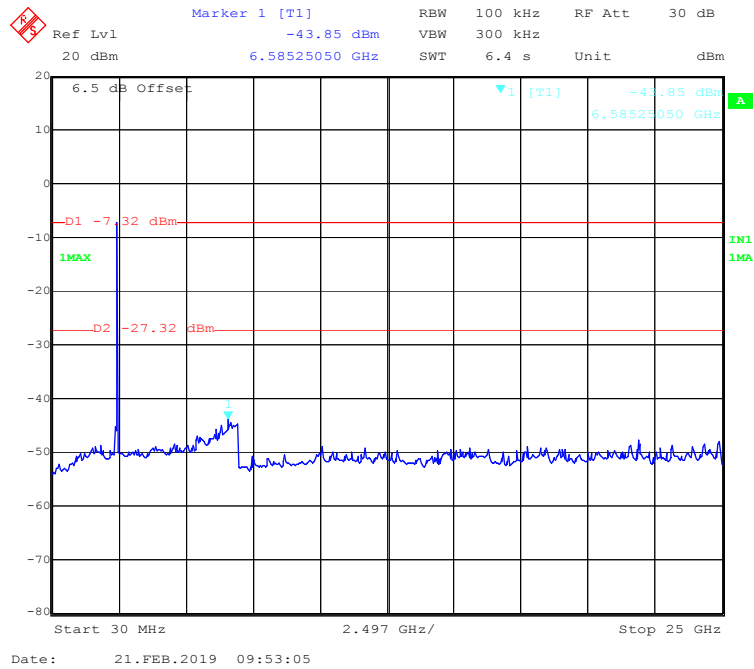


Conducted Spurious Emissions at Antenna Port


Chain1: 802.11b Mode Low Channel

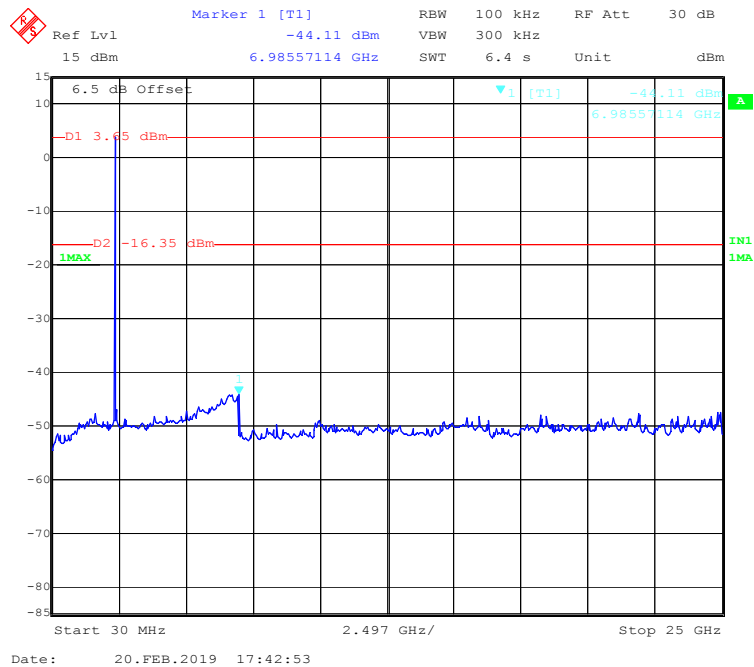


Chain1: 802.11b Mode Middle Channel

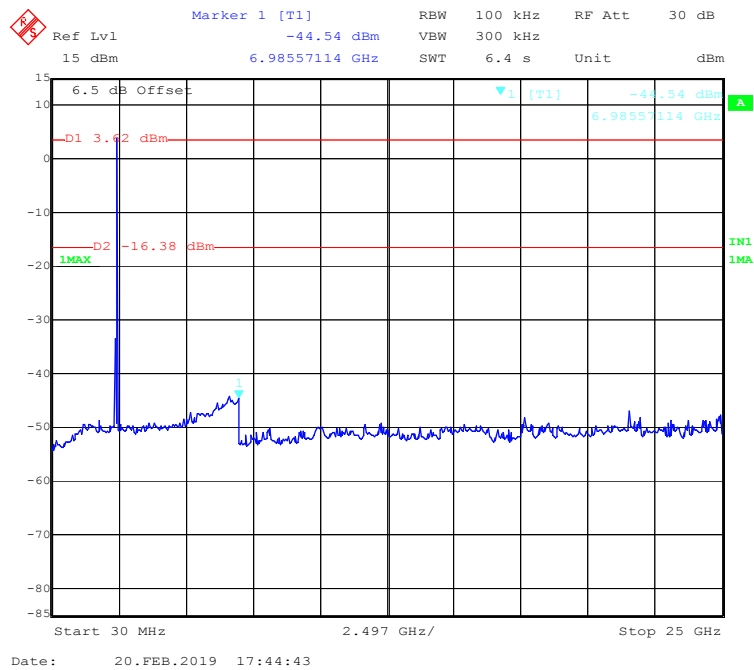


Chain1: 802.11b Mode High Channel

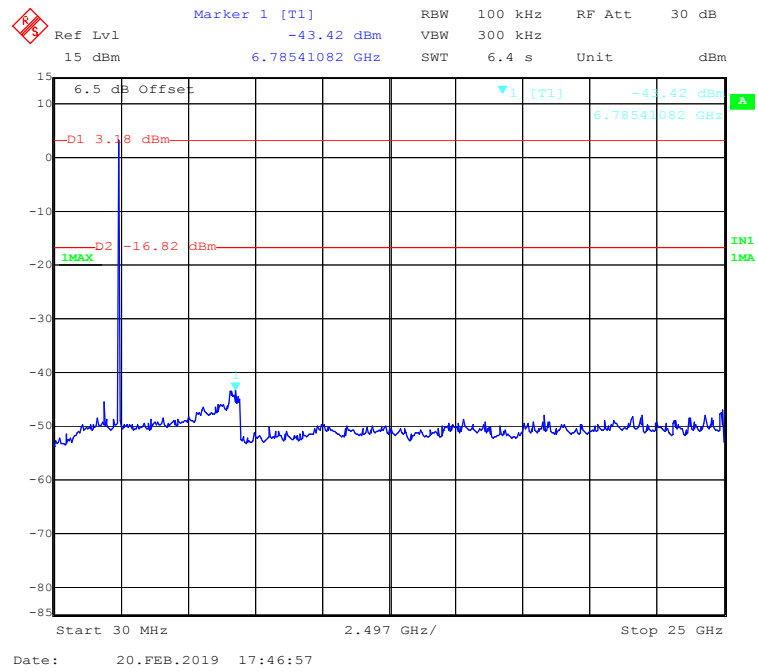


Chain1: 802.11g Mode Low Channel

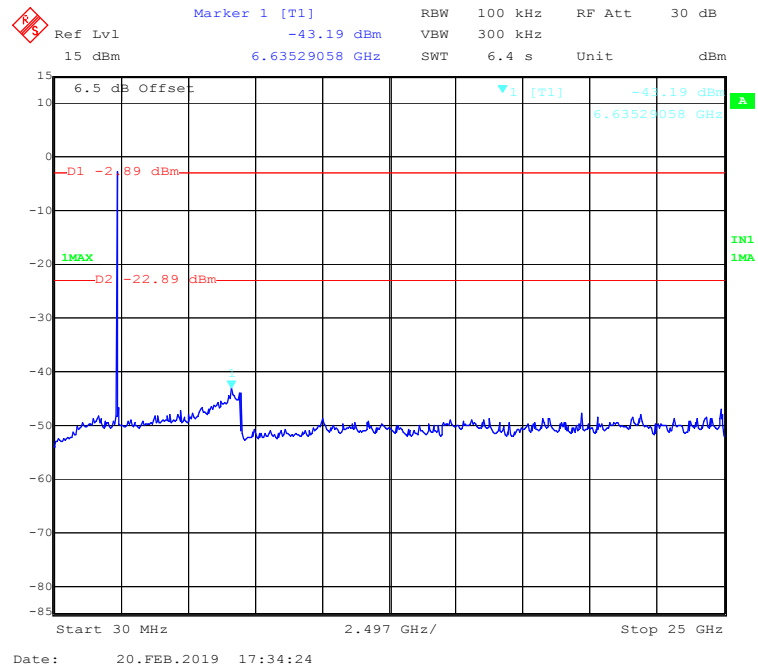


Chain1: 802.11g Mode Middle Channel

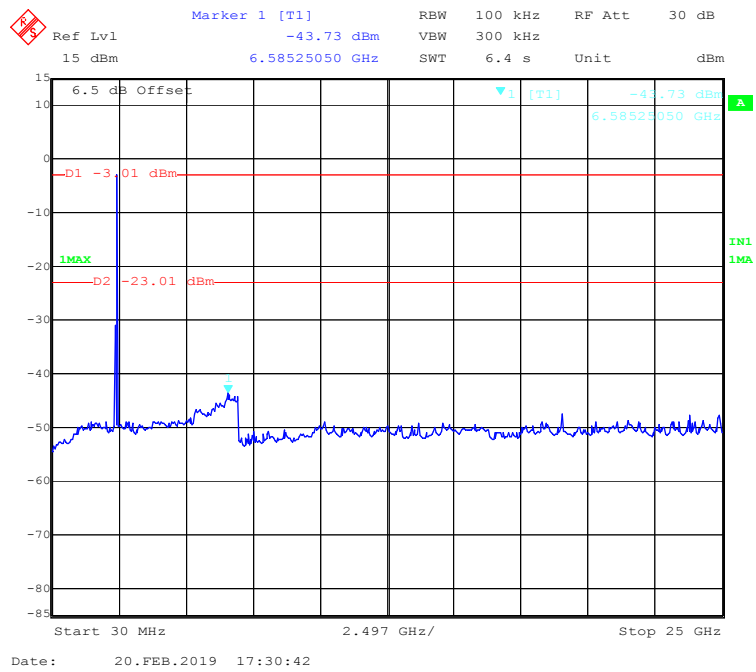


Chain1: 802.11g Mode High Channel


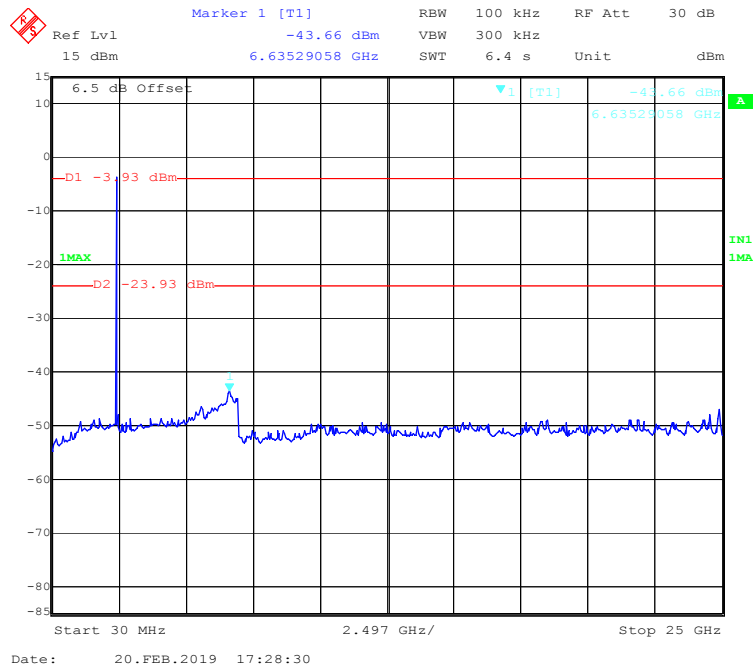


Chain1: 802.11n-HT20 Mode Low Channel

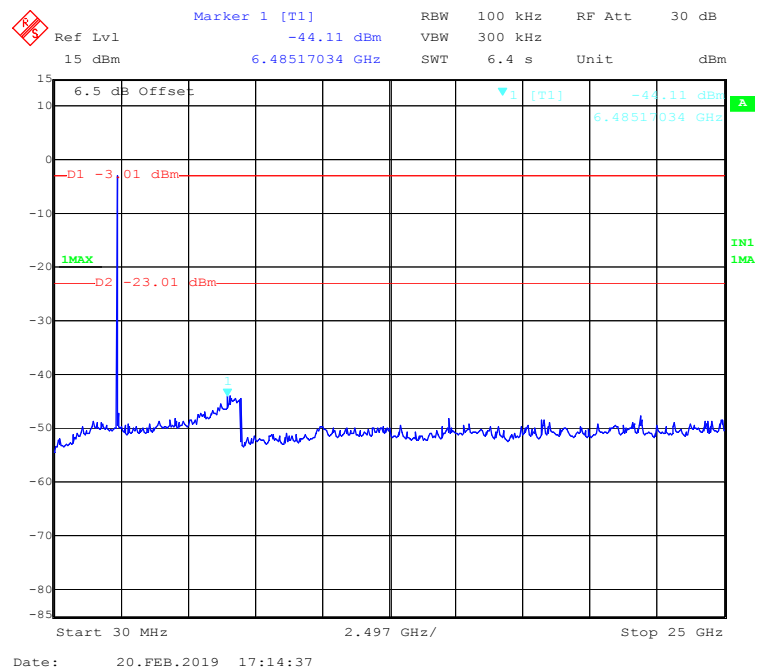


Chain1: 802.11n-HT20 Mode Middle Channel

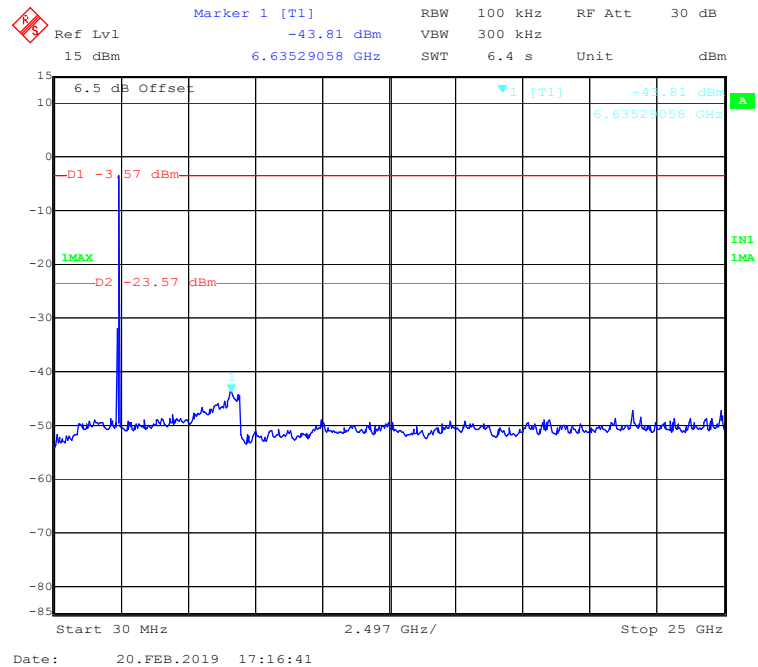


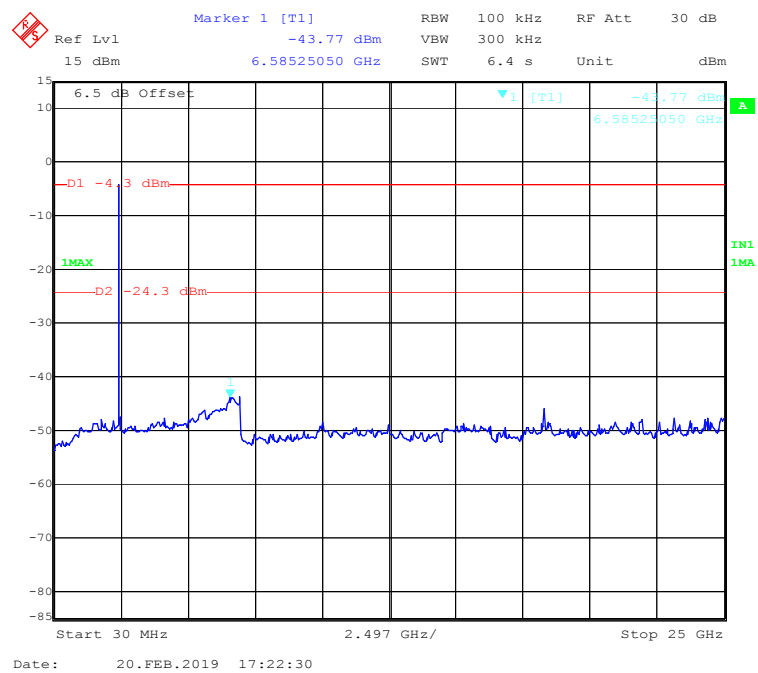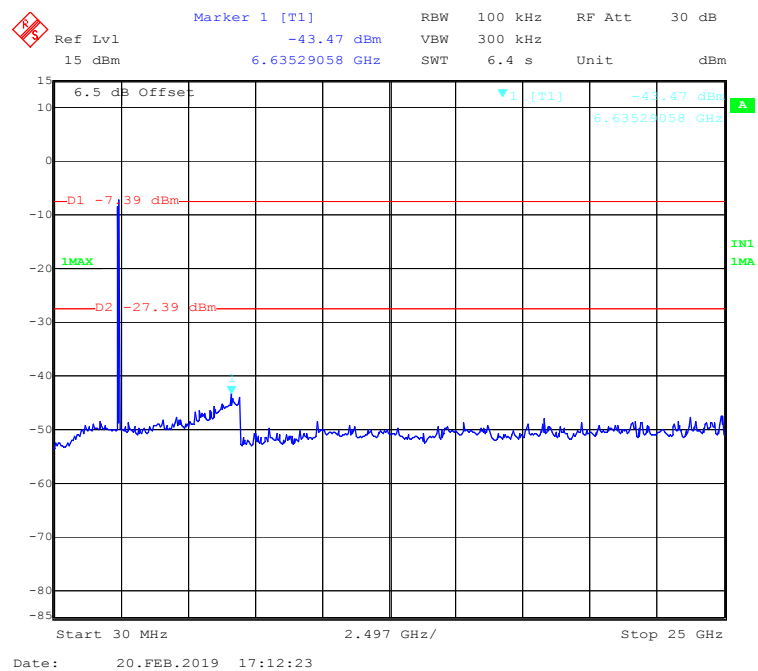Chain1: 802.11n-HT20 Mode High Channel**Chain1: 802.11n-HT40 Mode Low Channel**


Chain1: 802.11n-HT40 Mode Middle Channel

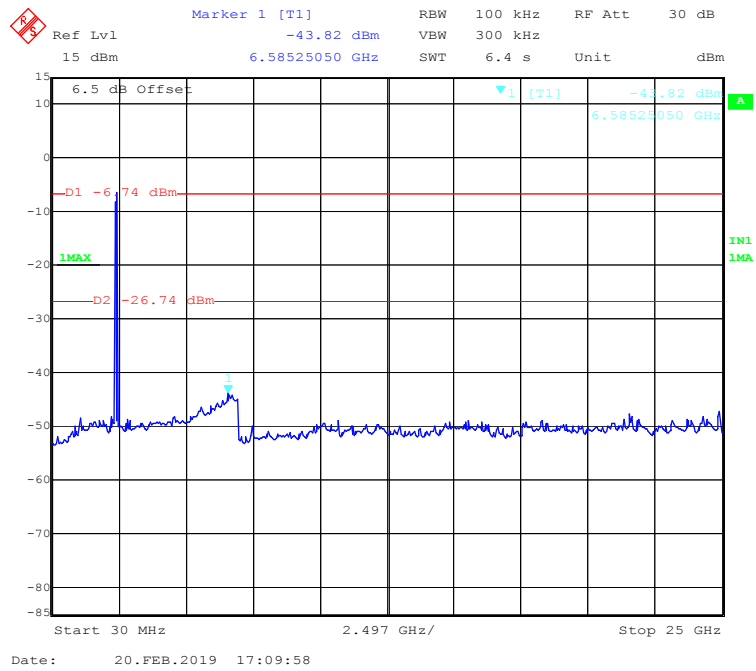


Chain1: 802.11n-HT40 Mode High Channel

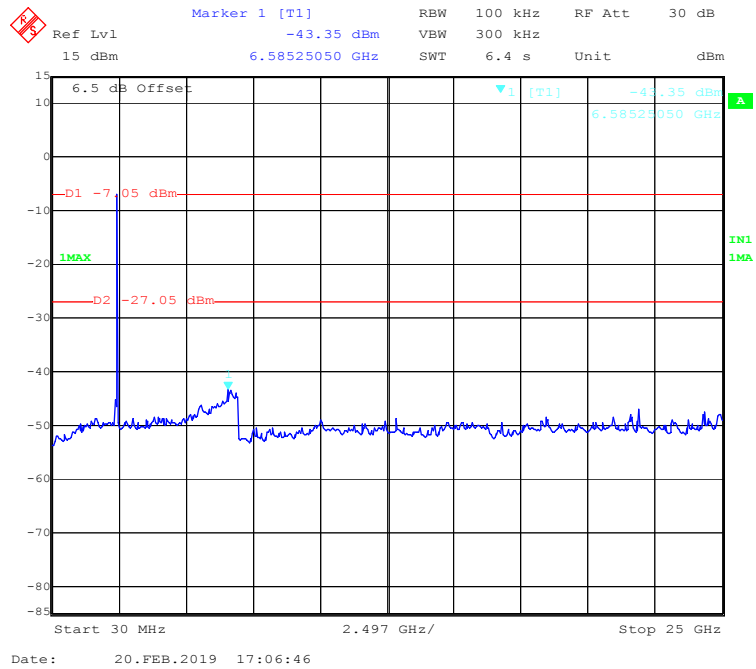


BLE Mode Low Channel

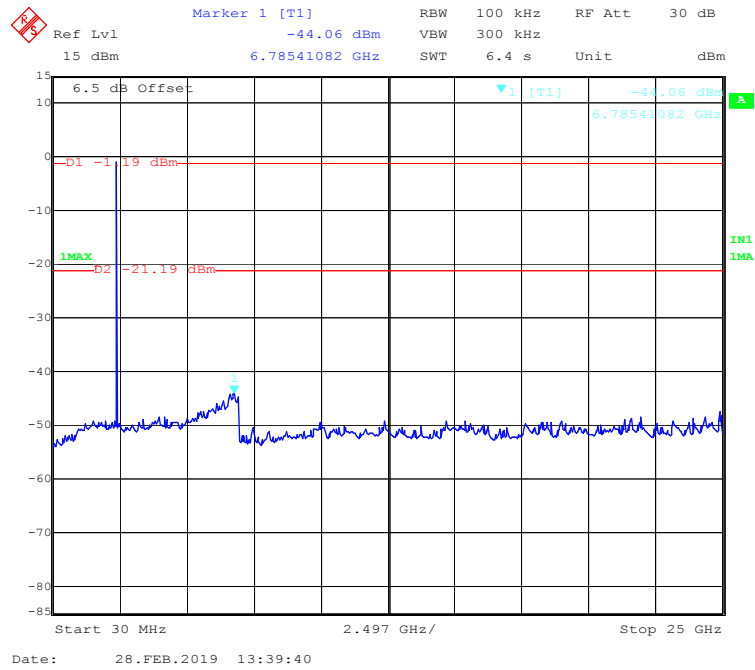

BLE Mode Middle Channel

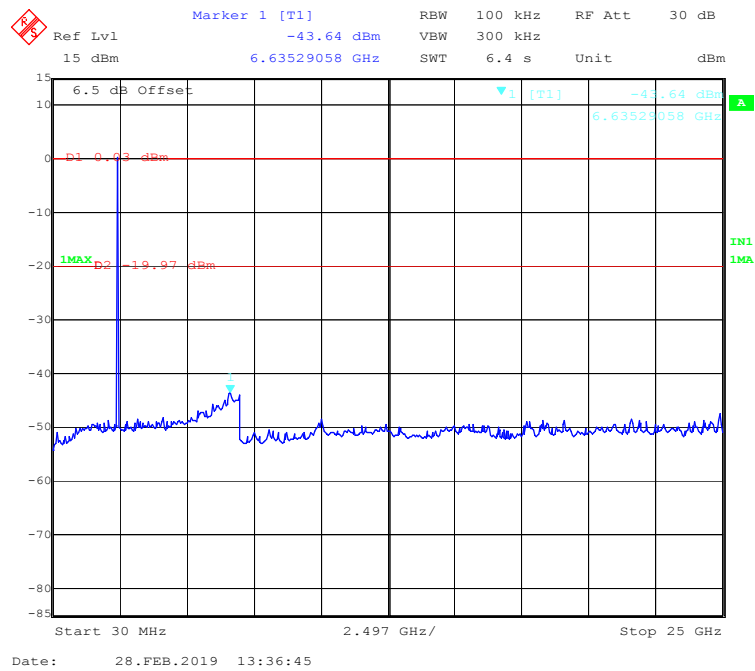

BLE Mode High Channel

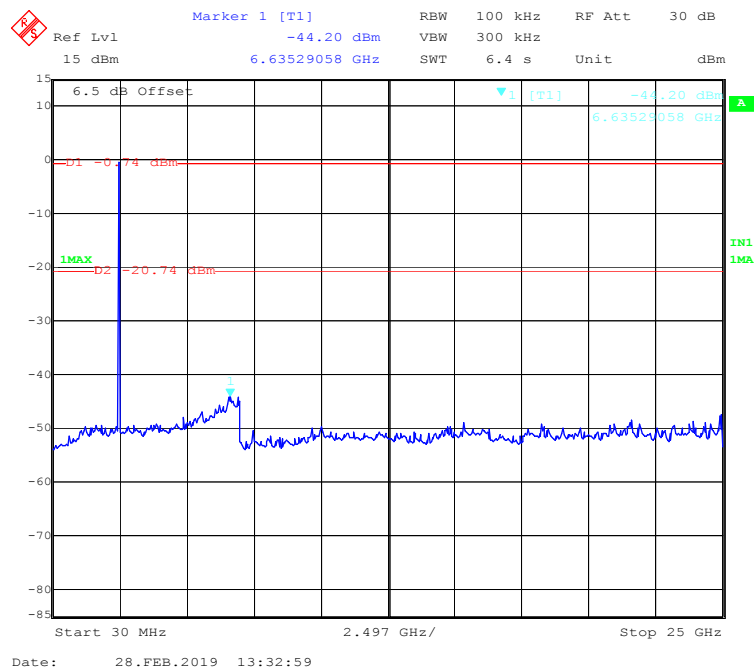


FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Data****Environmental Conditions**

Temperature:	23.2~24 °C
Relative Humidity:	48~51 %
ATM Pressure:	101.1~101.3 kPa


The testing was performed by Max Min from 2019-02-20 to 2019-02-28.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)		Limit (MHz)
		Chain 0	Chain 1	
802.11b Mode				
Low	2412	8.176	8.056	≥ 0.5
Middle	2437	8.176	8.116	≥ 0.5
High	2462	8.116	8.116	≥ 0.5
802.11g Mode				
Low	2412	16.172	16.112	≥ 0.5
Middle	2437	16.353	16.353	≥ 0.5
High	2462	16.112	16.112	≥ 0.5
802.11n-HT20 Mode				
Low	2412	17.255	16.954	≥ 0.5
Middle	2437	17.315	16.894	≥ 0.5
High	2462	17.194	16.894	≥ 0.5
802.11n-HT40 Mode				
Low	2422	35.952	35.591	≥ 0.5
Middle	2437	35.471	35.591	≥ 0.5
High	2452	35.832	35.591	≥ 0.5
BLE Mode				
Low	2402	0.703		≥0.5
Middle	2440	0.715		≥0.5
High	2480	0.727		≥0.5


Chain0: 802.11b Mode Low Channel

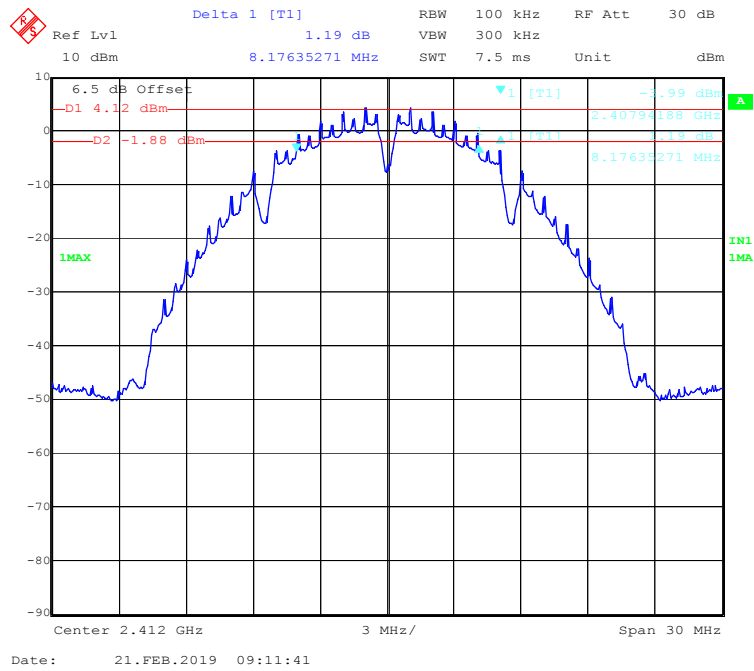


Chain0: 802.11b Mode Middle Channel

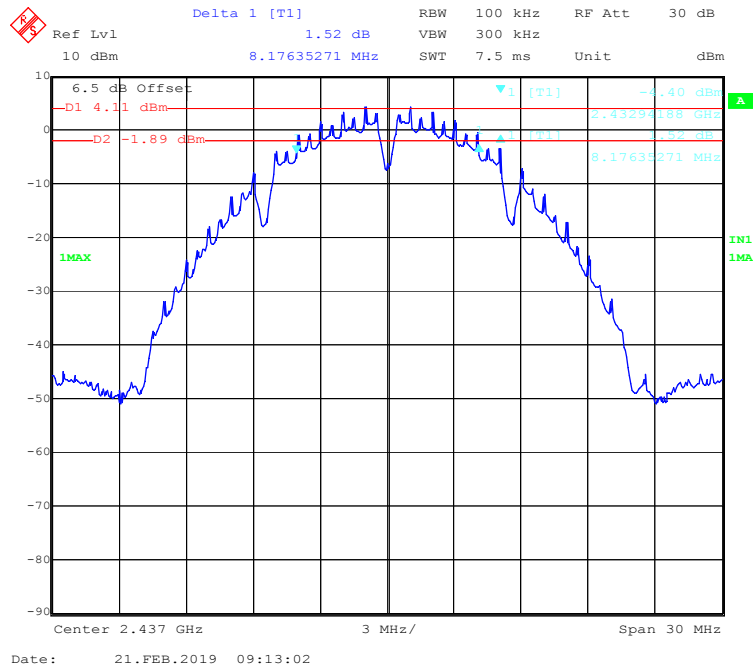

Chain0: 802.11b Mode High Channel

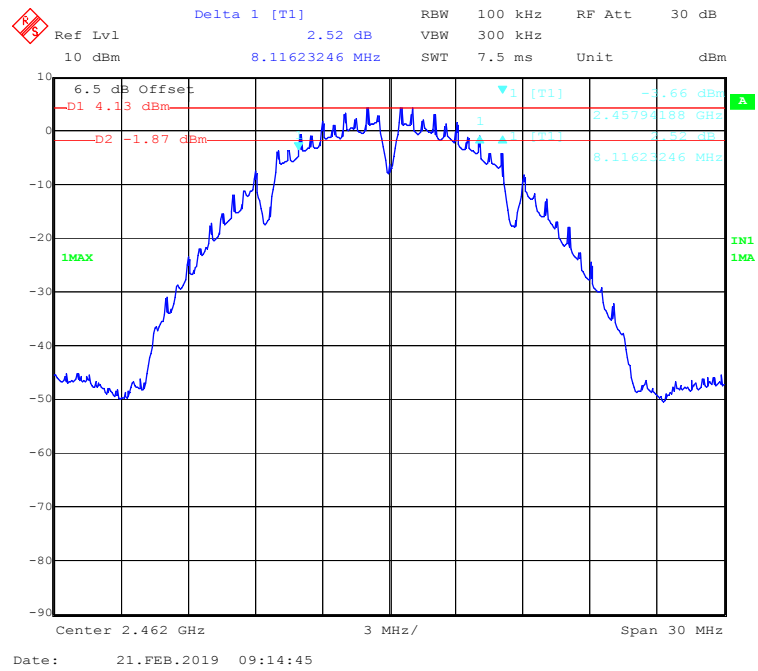

Chain0: 802.11g Mode Low Channel

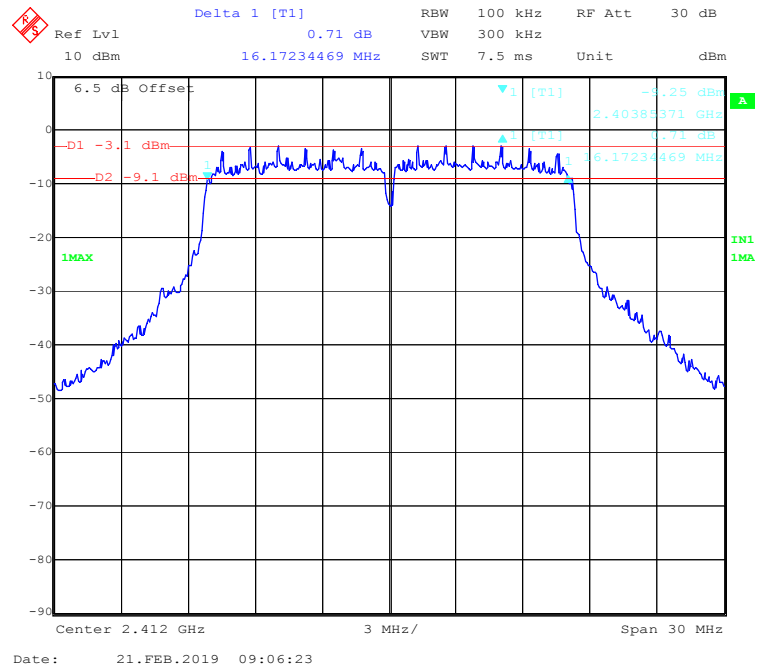

Delta 1 [T1] 0.80 dB RBW 100 kHz RF Att 30 dB
 Ref Lvl 10 dBm 16.35270541 MHz SWT 7.5 ms Unit dBm

6.5 dB Offset
 -D1 -2.94 dBm
 -D2 -8.94 dBm
 1MAX
 1 [T1] -2.94 dBm
 1 [T1] 2.42885371 GHz
 1 16.35270541 MHz
 IN1
 1MA

Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 21.FEB.2019 09:07:52

Delta 1 [T1]

Ref Lvl 0.65 dB RBW 100 kHz RF Att 30 dB

10 dBm VBW 300 kHz

16.11222445 MHz SWT 7.5 ms Unit dBm

6.5 dB Offset

D1 -2.99 dBm

D2 -8.99 dBm

1MAX


Center 2.462 GHz

3 MHz/


Span 30 MHz

Date: 21.FEB.2019 09:09:20


Chain0: 802.11n-HT20 Mode Low Channel

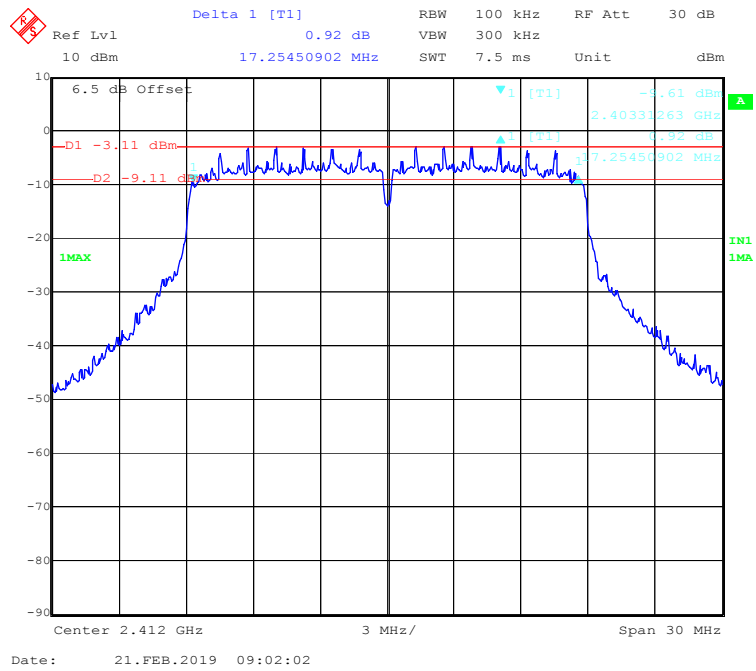


Chain0: 802.11n-HT20 Mode Middle Channel

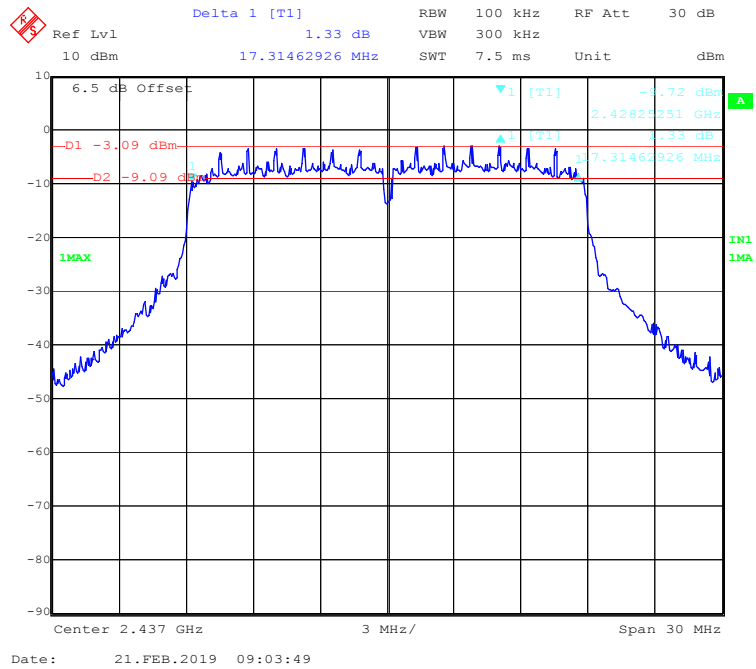


Chain0: 802.11n-HT20 Mode High Channel

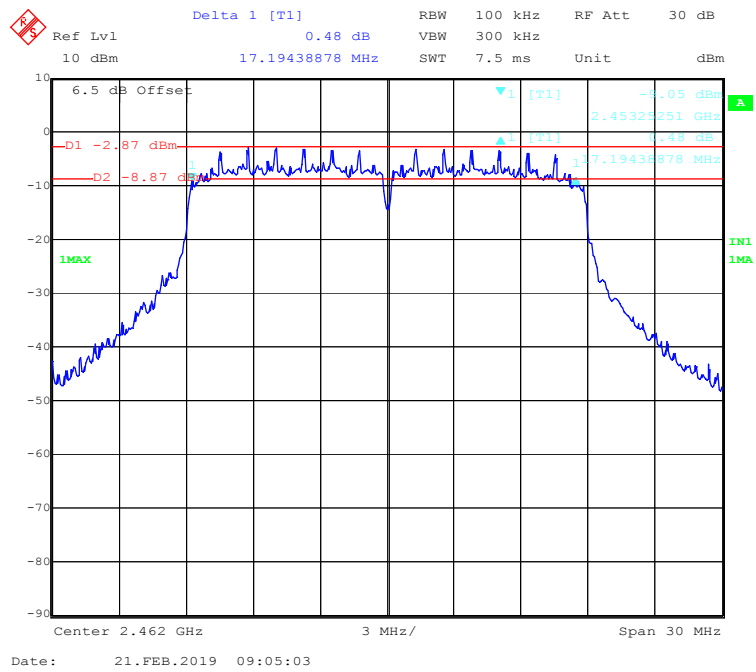


Chain0: 802.11n-HT40 Mode Low Channel

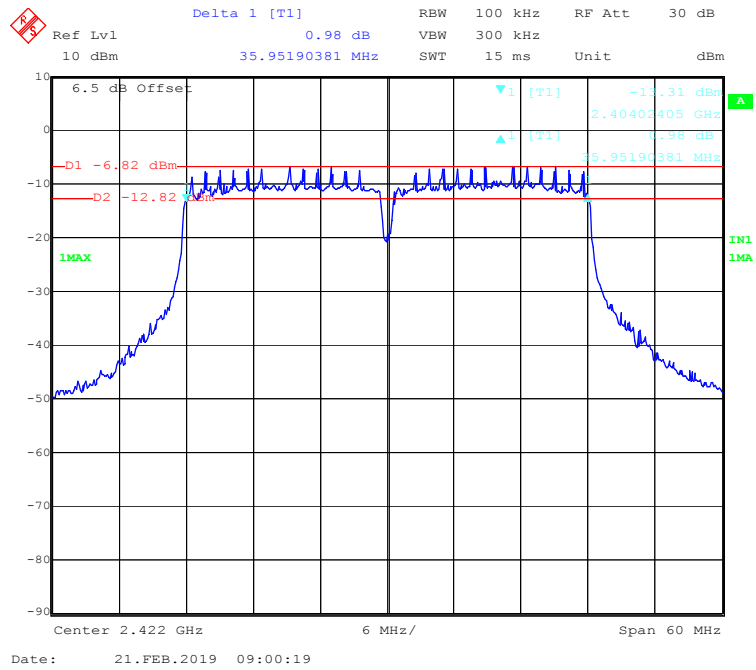


Chain0: 802.11n-HT40 Mode Middle Channel

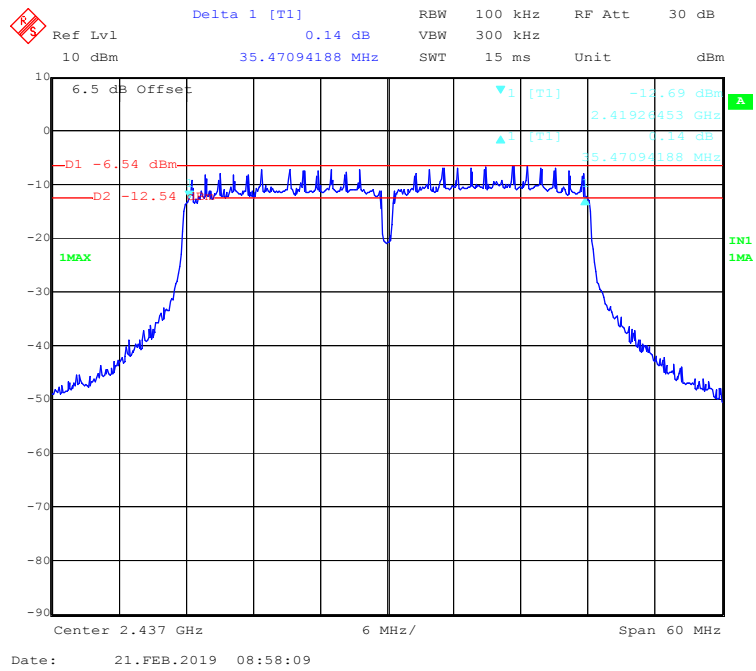


Chain0: 802.11n-HT40 Mode High Channel

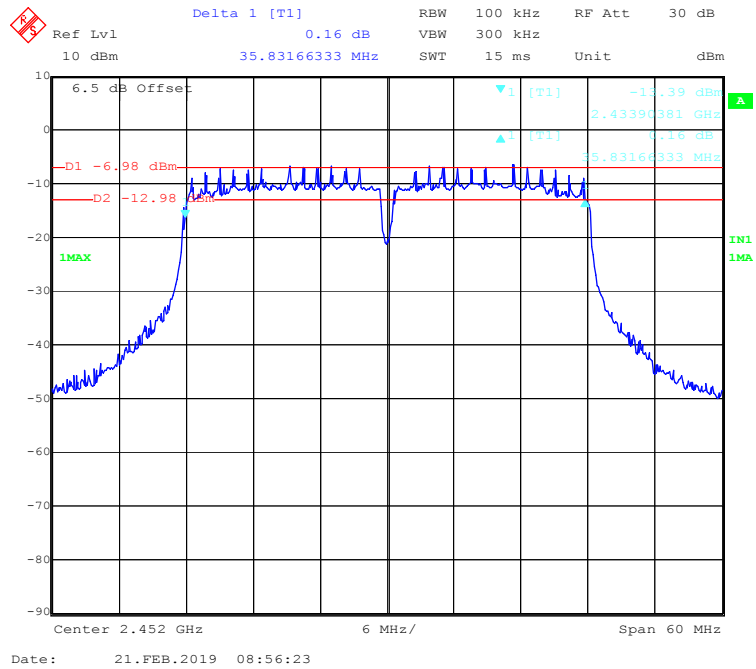


Chain1: 802.11b Mode Low Channel

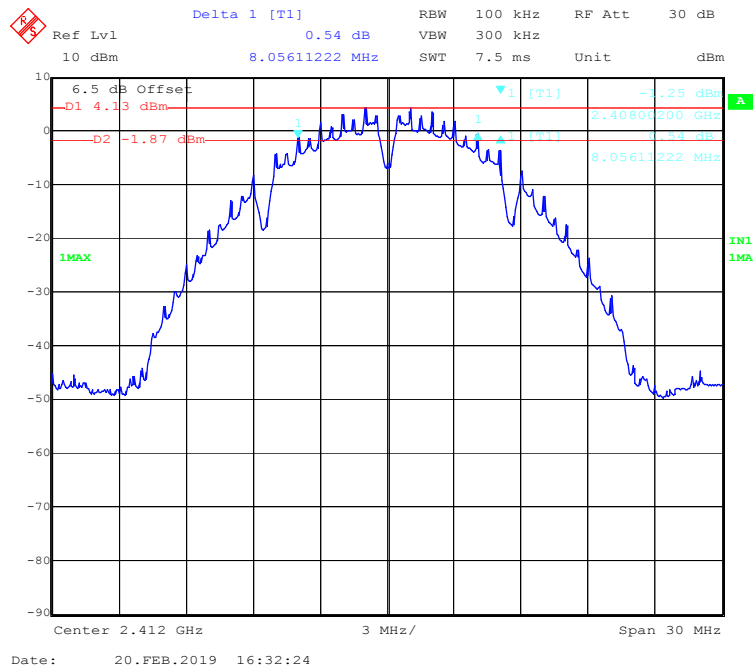


Chain1: 802.11b Mode Middle Channel

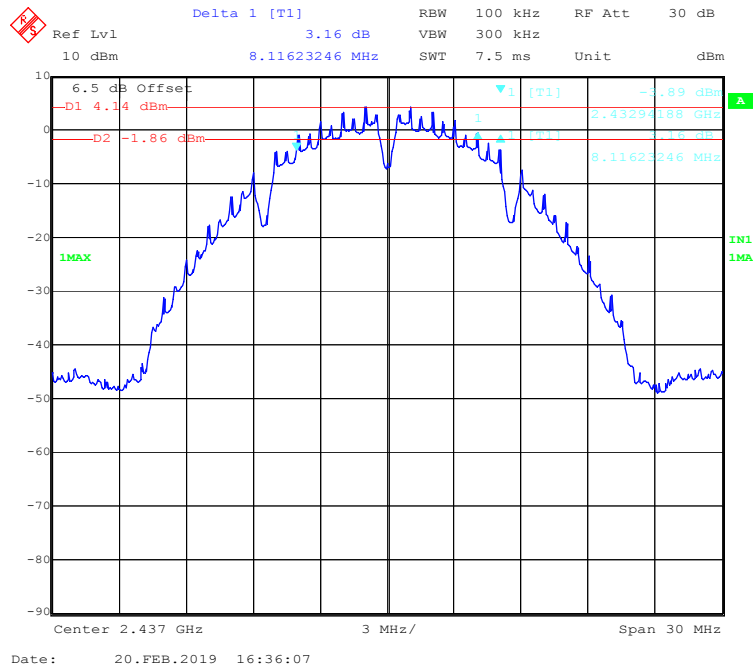


Chain1: 802.11b Mode High Channel

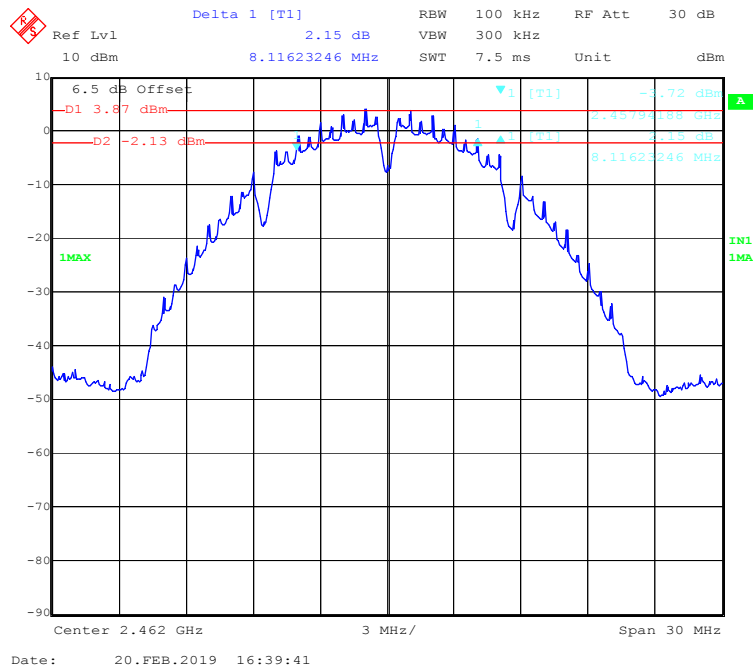


Chain1: 802.11g Mode Low Channel

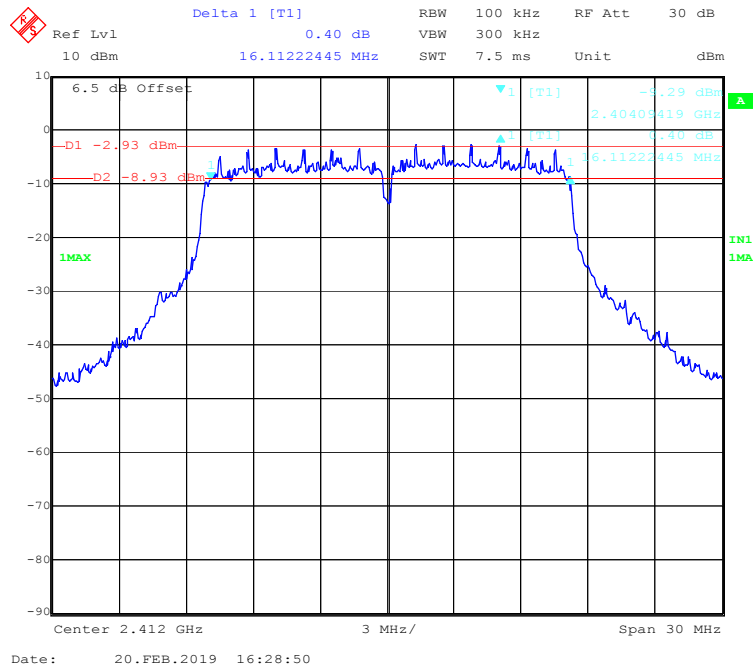


Chain1: 802.11g Mode Middle Channel

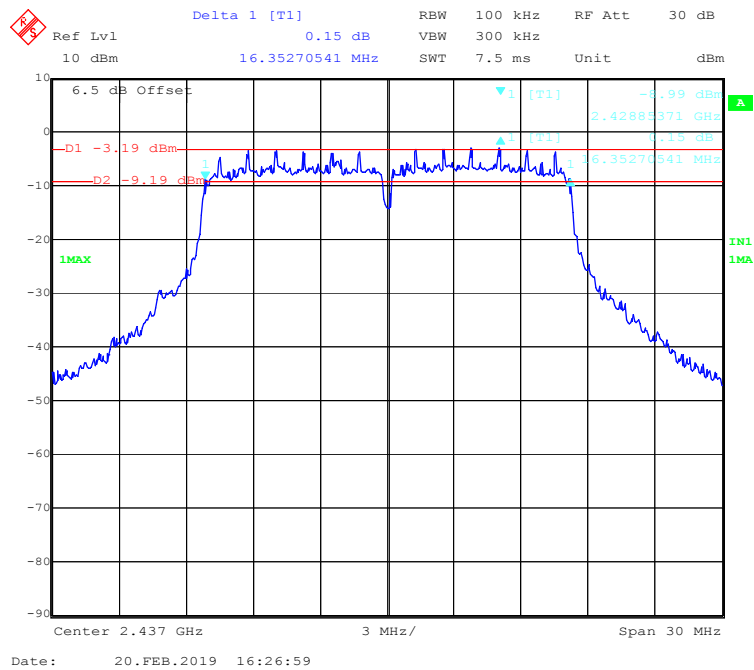


Chain1: 802.11g Mode High Channel

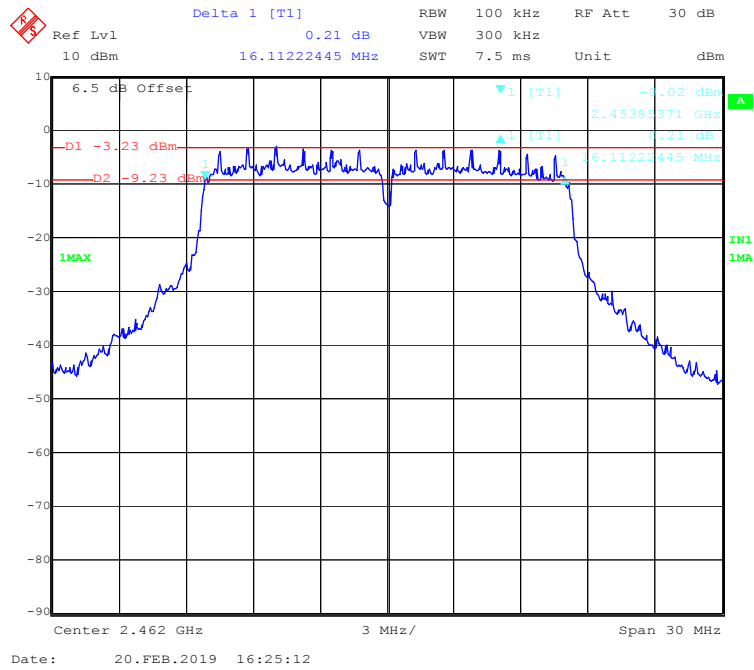


Chain1: 802.11n-HT20 Mode Low Channel

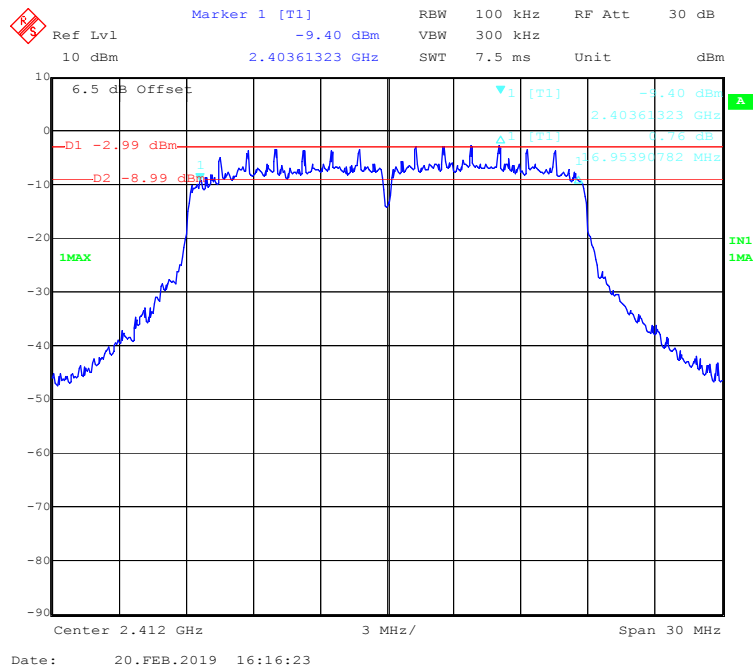


Chain1: 802.11n-HT20 Mode Middle Channel

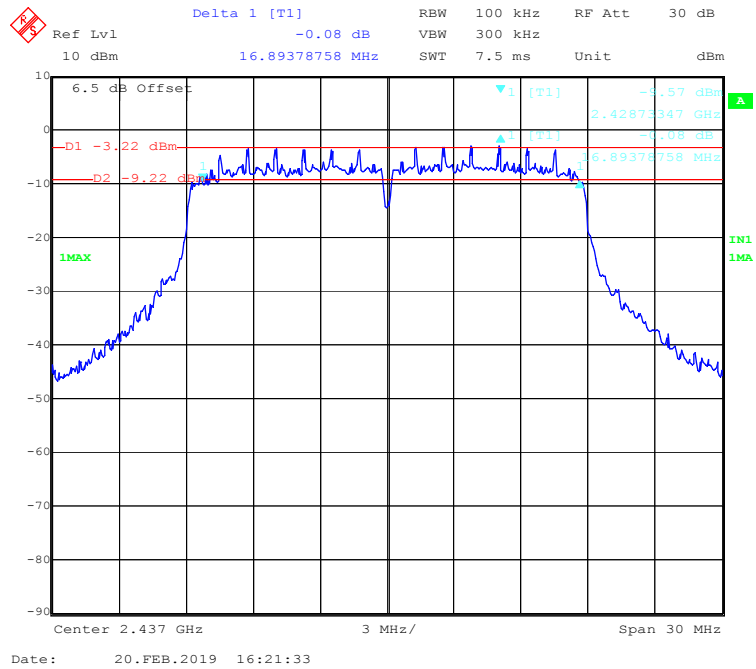



Chain1: 802.11n-HT20 Mode High Channel

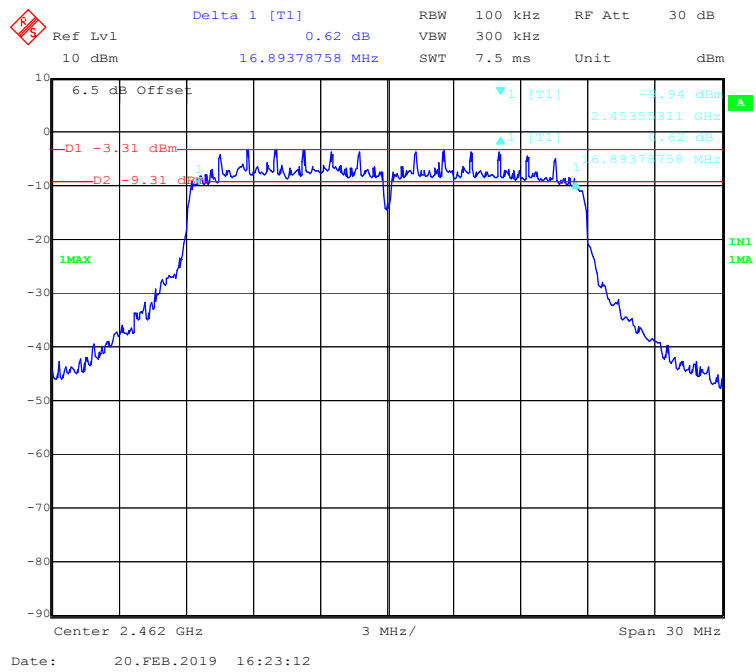


Chain1: 802.11n-HT40 Mode Low Channel

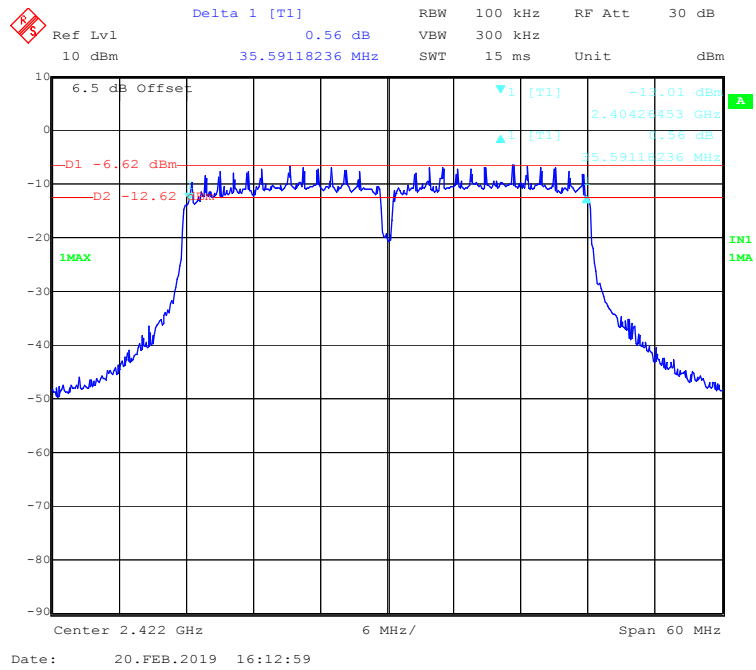


Chain1: 802.11n-HT40 Mode Middle Channel

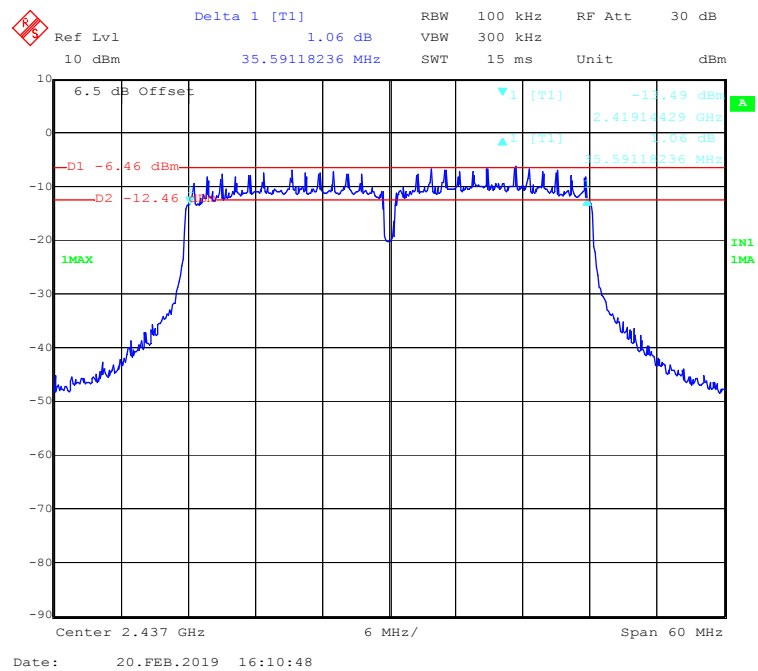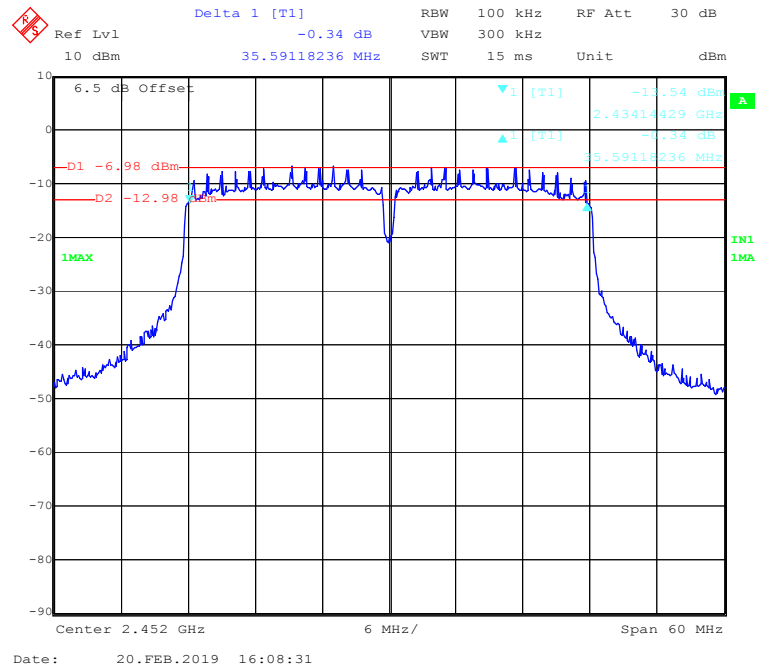**Chain1: 802.11n-HT40 Mode High Channel**


BLE Mode Low Channel

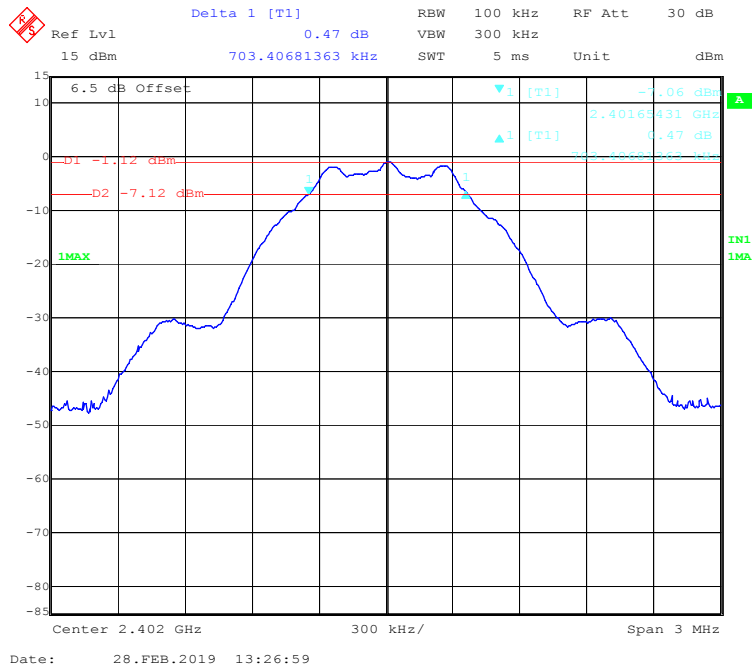

BLE Mode Middle Channel

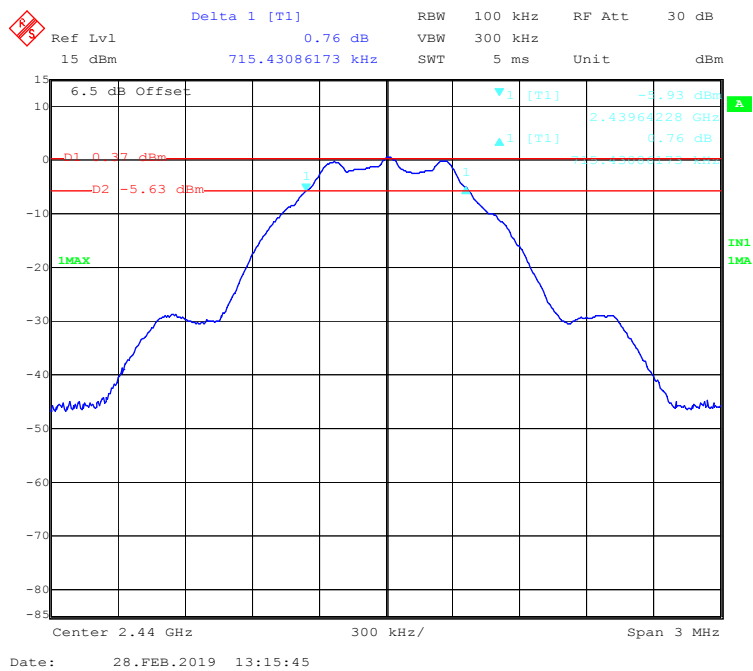

BLE Mode High Channel

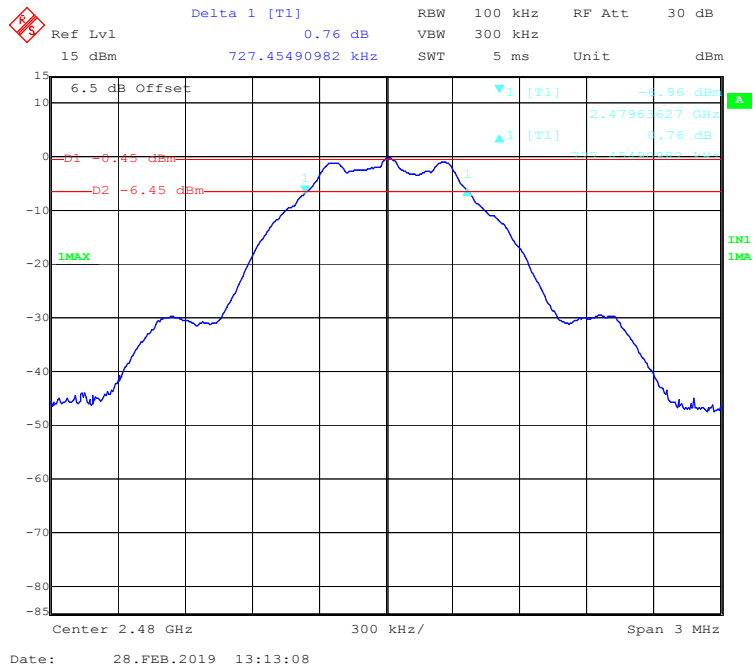

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Max Min on 2019-02-28.

EUT operation mode: Transmitting

Test mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)			Max Conducted Average Output Power (dBm)			Limit (dBm)	Result
			Chain0	Chain1	Total	Chain0	Chain1	Total		
802.11b	Low	2412	15.98	15.11	/	12.61	12.02	/	30	Pass
	Middle	2437	15.95	15.00	/	12.38	11.77	/	30	Pass
	High	2462	15.91	14.62	/	12.87	11.33	/	30	Pass
802.11g	Low	2412	16.58	15.58	/	9.26	8.64	/	30	Pass
	Middle	2437	16.62	15.45	/	9.44	8.89	/	30	Pass
	High	2462	16.40	15.21	/	9.57	7.08	/	30	Pass
802.11n-HT20	Low	2412	16.40	15.58	19.02	9.16	7.09	11.26	30	Pass
	Middle	2437	16.18	15.51	18.87	9.00	7.13	11.18	30	Pass
	High	2462	16.24	15.26	18.79	9.03	7.24	11.24	30	Pass
802.11n-HT40	Low	2422	15.61	15.18	18.41	8.36	7.06	10.77	30	Pass
	Middle	2437	15.25	15.12	18.20	8.64	7.01	10.91	30	Pass
	High	2452	15.43	15.04	18.25	8.35	7.64	11.02	30	Pass
BLE	Low	2402	-1.15			/			30	Pass
	Middle	2440	0.19			/			30	Pass
	High	2480	-0.42			/			30	Pass


Note: The total output power = $10\log(10^{\text{Chain 0/10}} + 10^{\text{Chain 1/10}})$

The maximum antenna gain is -2.38dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:


Array Gain = 0 dB (i.e., no array gain) for $N_{\text{ANT}} \leq 4$;

So: Directional gain = $G_{\text{ANT}} + \text{Array Gain} = -2.38 \text{ dBi} < 6 \text{ dBi}$, no RF out power limit was reduced.


BLE Mode Low Channel

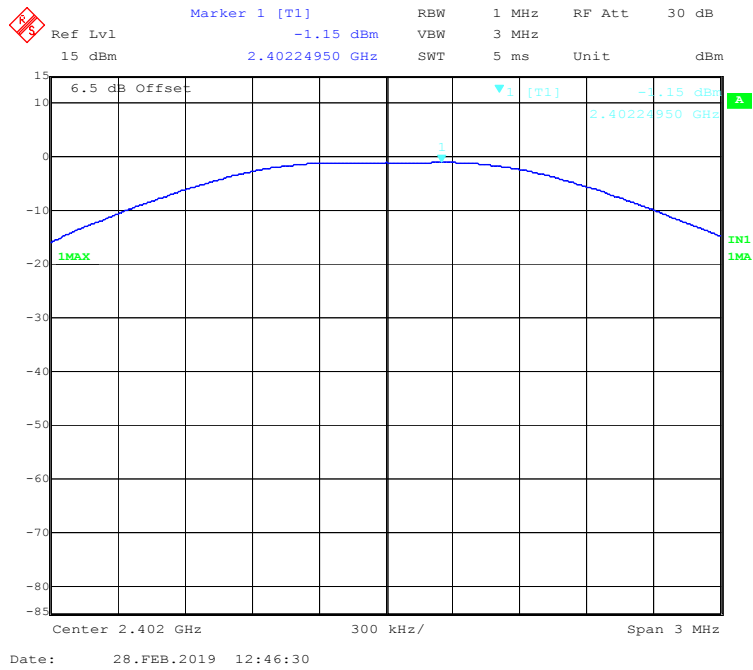

BLE Mode Middle Channel

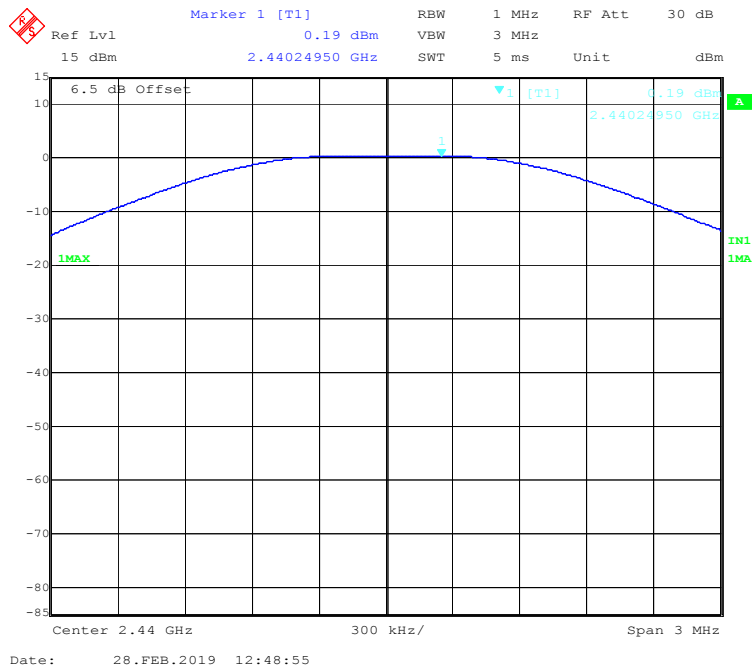

BLE Mode High Channel

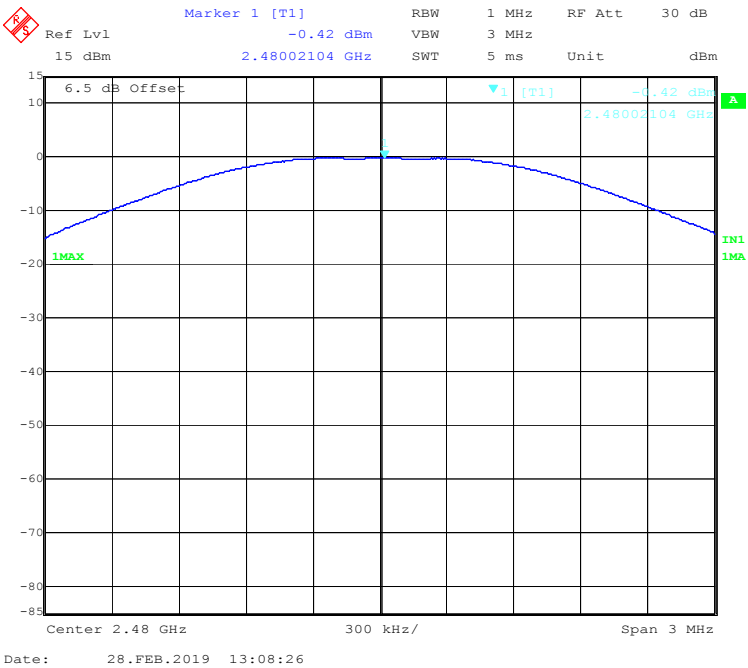

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**


Temperature:	24.3~25.2 °C
Relative Humidity:	48~50 %
ATM Pressure:	101.1~101.3 kPa

The testing was performed by Max Min from 2019-02-20 to 2019-02-28.


EUT operation mode: Transmitting

Test Result: Compliant


Chain0: 802.11b Mode Left Side

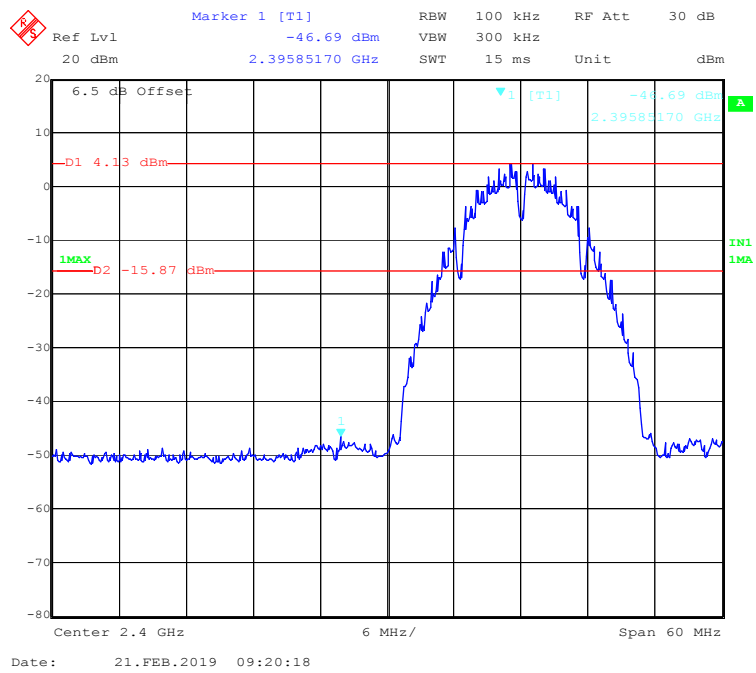


Chain0: 802.11b Mode Right Side

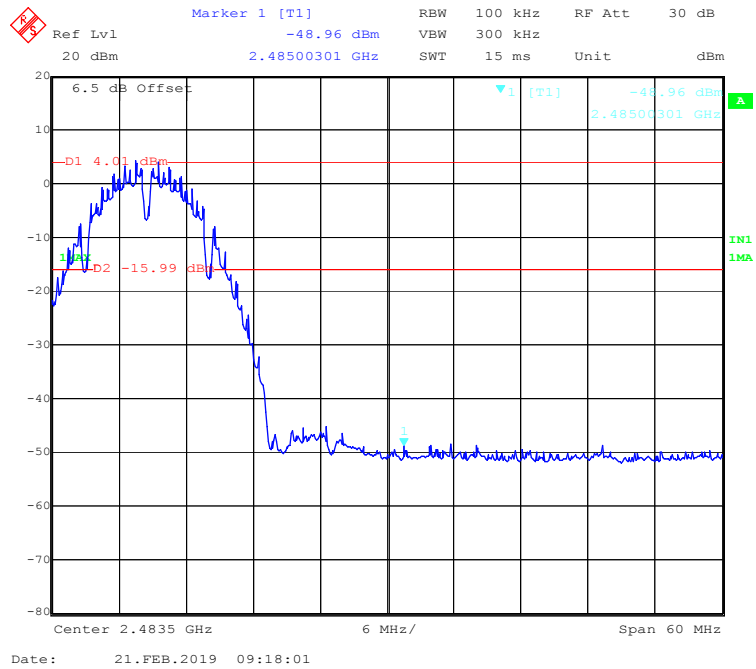


Chain0: 802.11g Mode Left Side

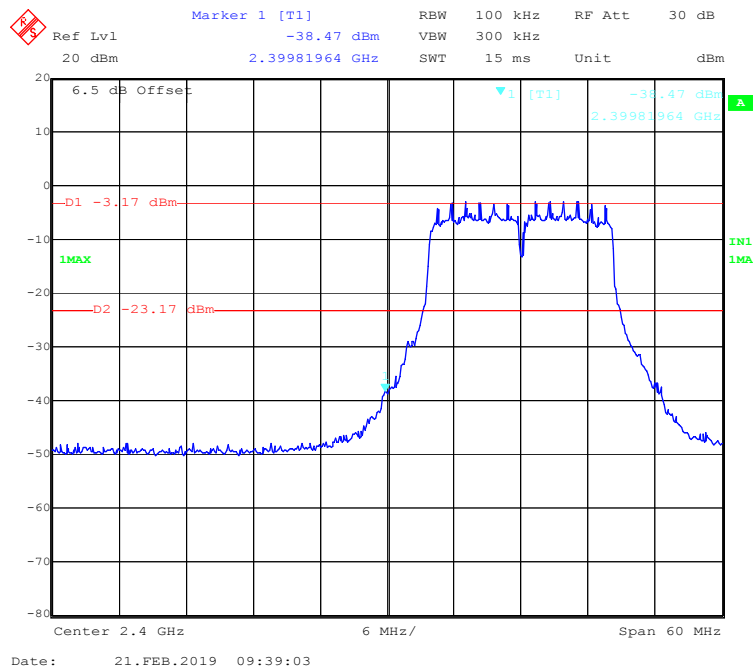


Chain0: 802.11g Mode Right Side

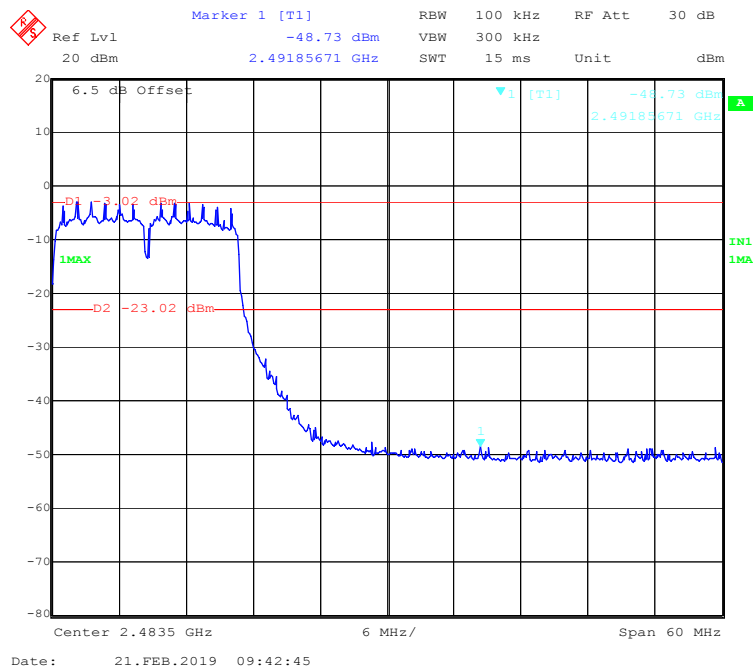


Chain0: 802.11n-HT20 Mode Left Side

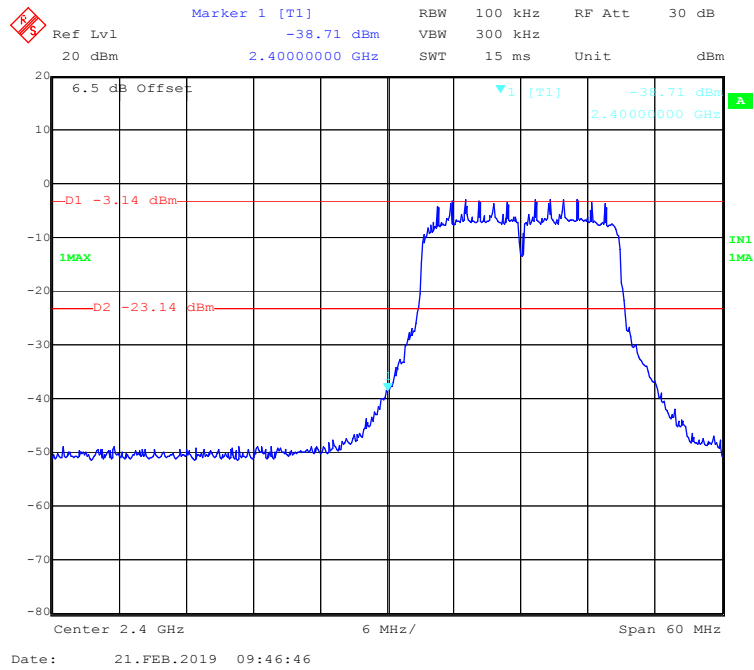


Chain0: 802.11n-HT20 Mode Right Side

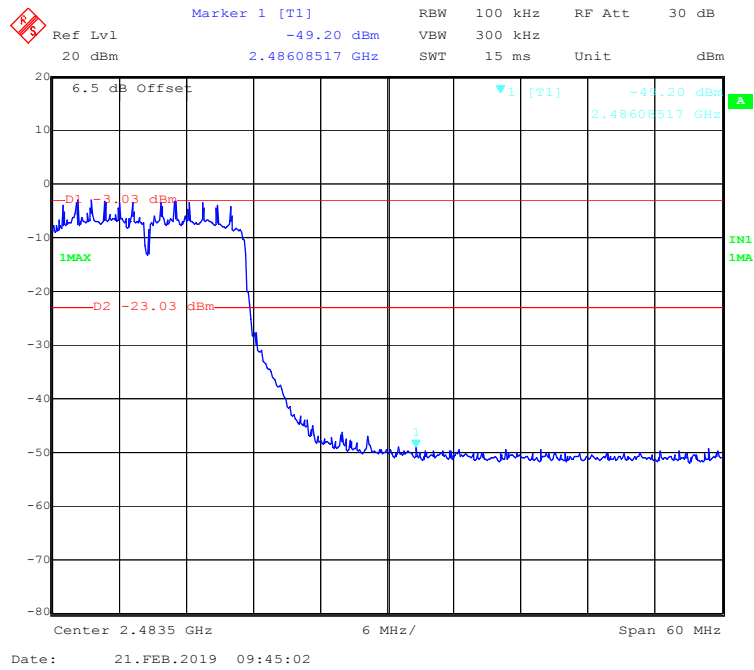


Chain0: 802.11n-HT40 Mode Left Side

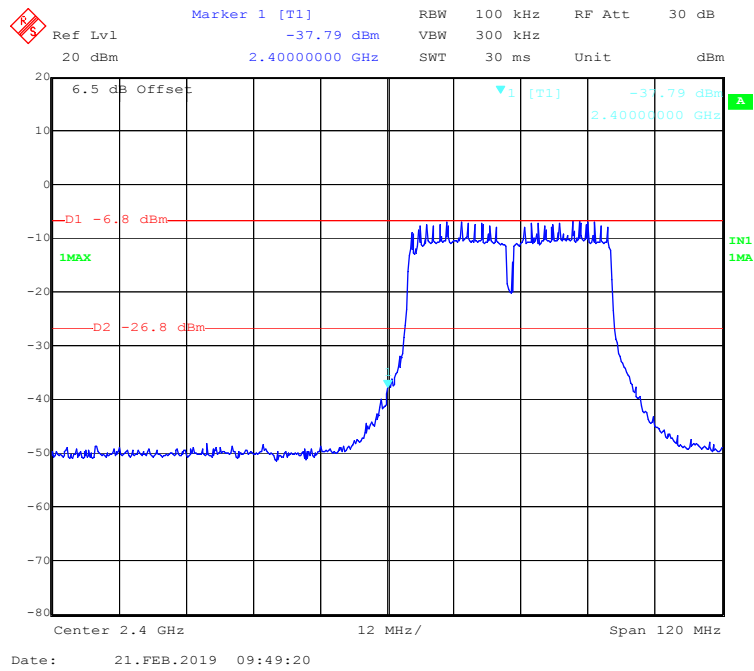


Chain0: 802.11n-HT40 Mode Right Side

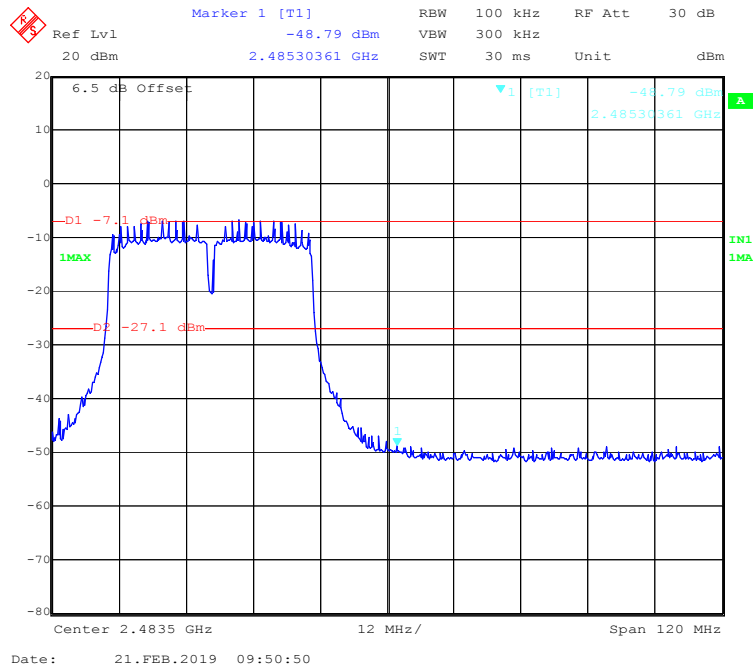

Chain1: 802.11b Mode Left Side

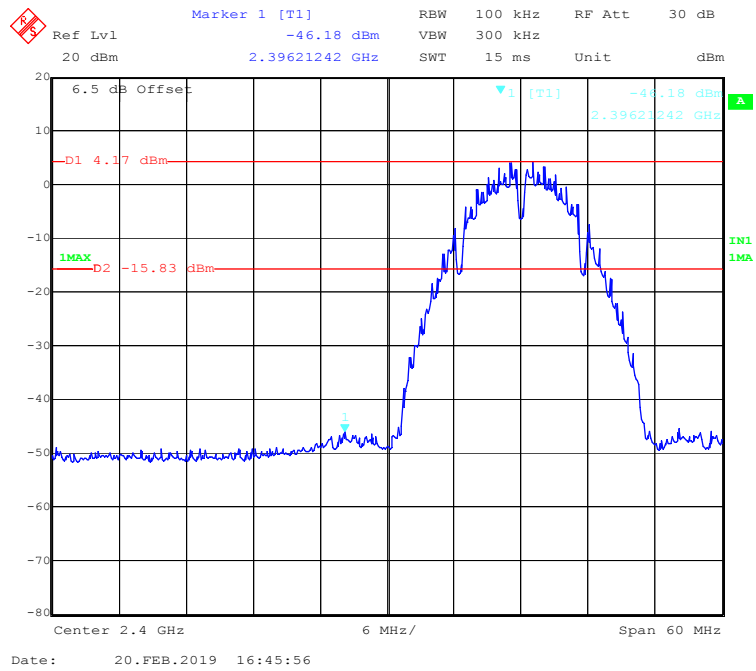

Chain1: 802.11b Mode Right Side

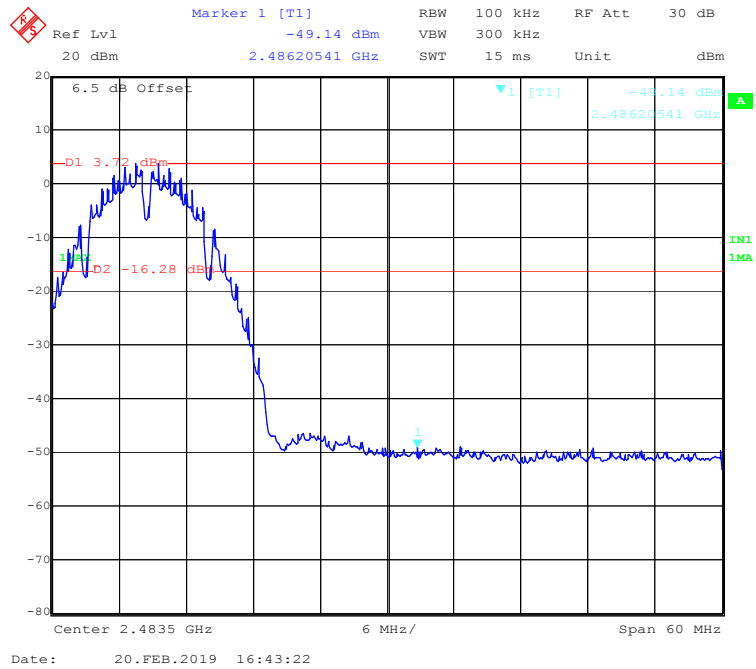

Marker 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -38.87 dBm VBW 300 kHz
 15 dBm 2.39999988 GHz SWT 15 ms Unit dBm


6.5 dB Offset
 -D1 -2.91 dBm
 1MAX
 -D2 -22.91 dBm
 IN1
 1MA

Center 2.4 GHz 6 MHz/ Span 60 MHz


Date: 20.FEB.2019 16:49:01

A
 Ref Lvl 15 dBm
 Marker 1 [T1] -48.39 dBm
 RBW 100 kHz
 RF Att 30 dB
 VBW 300 kHz
 Unit dBm
 SWT 15 ms
 6.5 dB Offset
 D1 -3.09 dBm
 D2 -23.09 dBm
 1MAX
 1MIN
 2.48524349 GHz
 -48.39 dBm
 Center 2.4835 GHz
 6 MHz/
 Span 60 MHz
 Date: 20.FEB.2019 16:51:48


Chain1: 802.11n-HT20 Mode Left Side

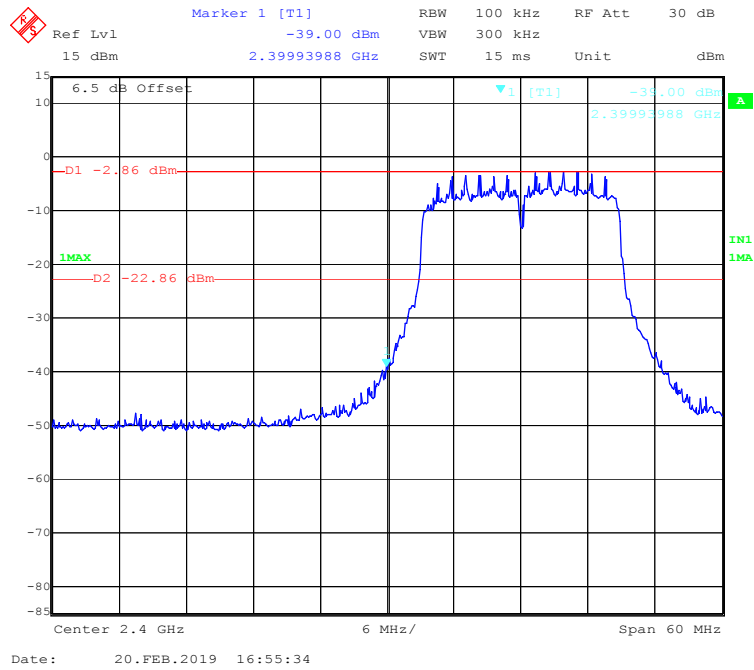


Chain1: 802.11n-HT20 Mode Right Side

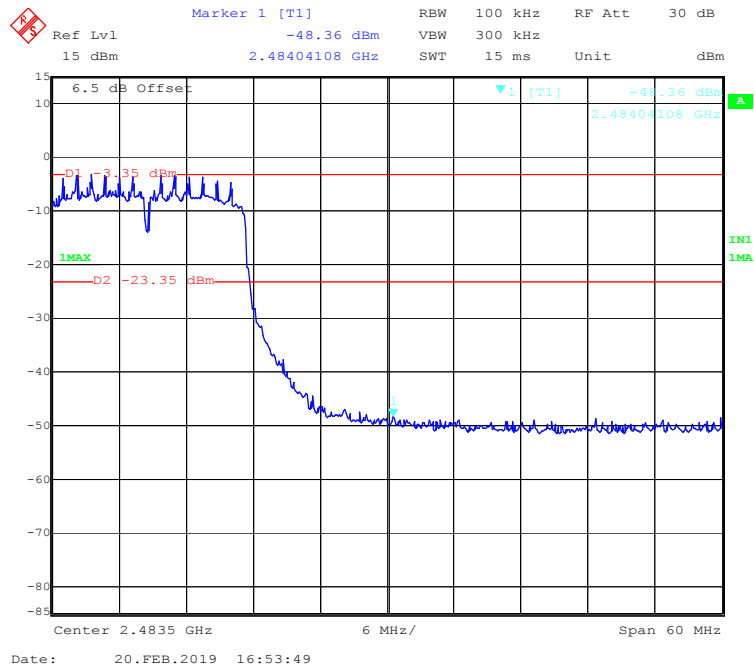


Chain1: 802.11n-HT40 Mode Left Side

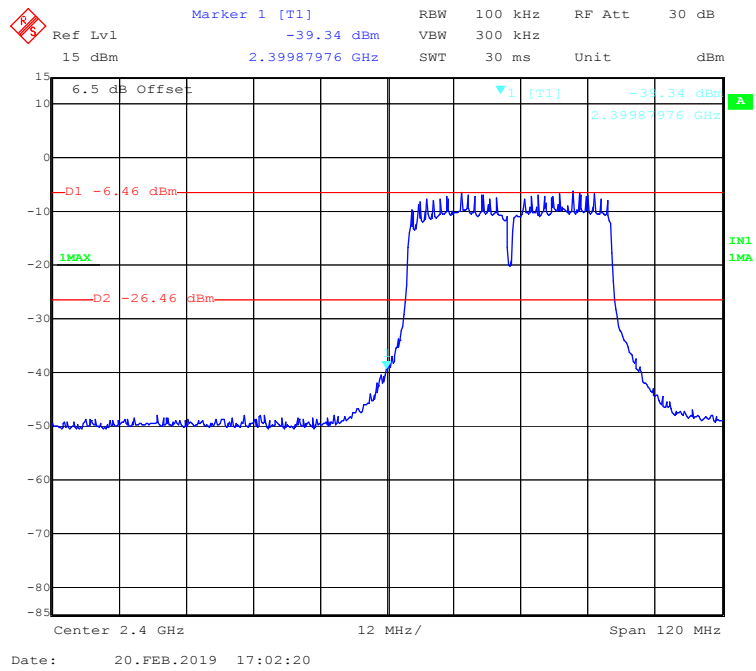


Chain1: 802.11n-HT40 Mode Right Side

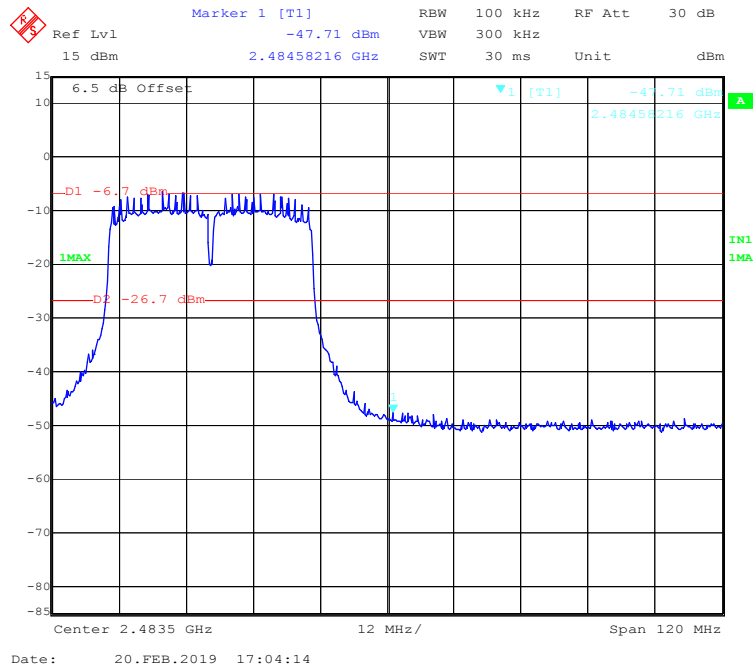

BLE Mode Left Side

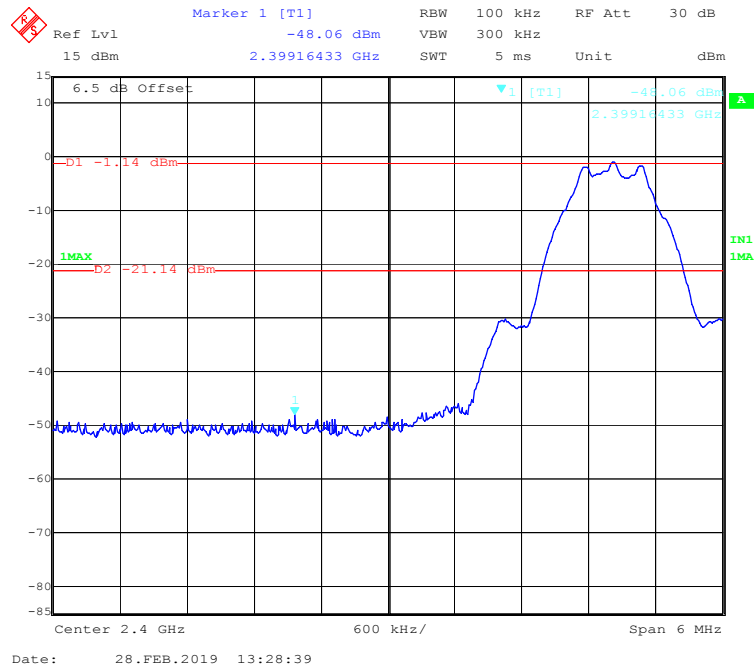

BLE Mode Right Side

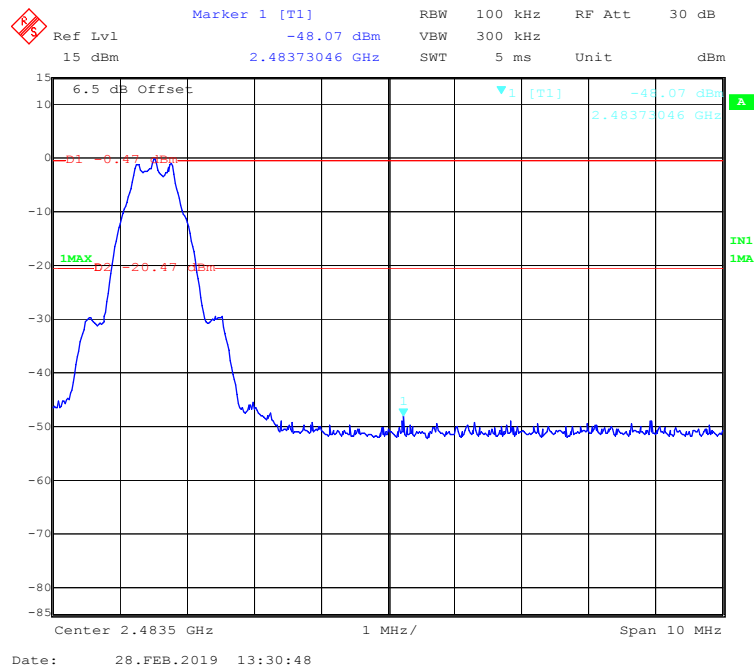

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine Compliant, and it is optional if the maximum conducted (average) output power was used to determine Compliant:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1 °C~24.3 °C
Relative Humidity:	50%~52%
ATM Pressure:	101.3 kPa~101.5 kPa

The testing was performed by Max Min from 2019-02-20 to 2019-02-28.

EUT operation mode: Transmitting

Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)
		Chain0	Chain1	Total	
802.11b mode					
Low	2412	-12.67	-12.20	/	≤8
Middle	2437	-13.29	-12.69	/	≤8
High	2462	-11.91	-12.20	/	≤8
802.11g mode					
Low	2412	-19.31	-20.78	/	≤8
Middle	2437	-18.63	-19.70	/	≤8
High	2462	-18.89	-19.22	/	≤8
802.11n-HT20 mode					
Low	2412	-19.13	-17.73	-15.36	≤8
Middle	2437	-19.84	-19.34	-16.57	≤8
High	2462	-19.24	-19.16	-16.19	≤8
802.11n-HT40 mode					
Low	2422	-23.29	-22.26	-19.73	≤8
Middle	2437	-23.82	-20.47	-18.82	≤8
High	2452	-21.31	-22.10	-18.68	≤8
BLE Mode					
Low	2402	-15.73			≤8
Middle	2440	-14.24			≤8
High	2480	-15.27			≤8

Note:

The total PSD=10 Log (10[^] (Chain 0/10) +10[^] (Chain 1/10))


The maximum antenna gain is -2.38dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = 10 log(N_{ANT}/N_{SS}) dB.


So:

Directional gain = G_{ANT} + Array Gain = -2.38 +10*log(2/1) =0.63dBi , no power spectral density limit was reduced.


Chain0: 802.11b Mode Low Channel

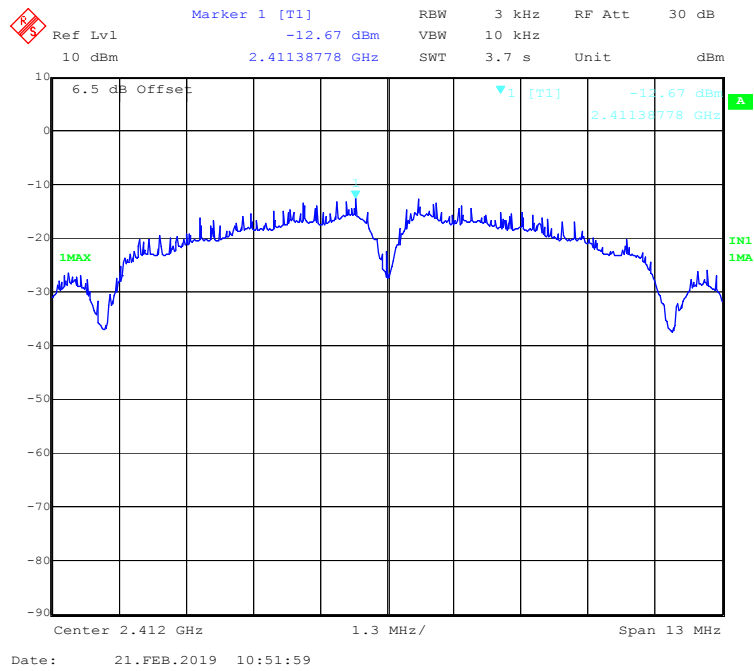


Chain0: 802.11b Mode Middle Channel

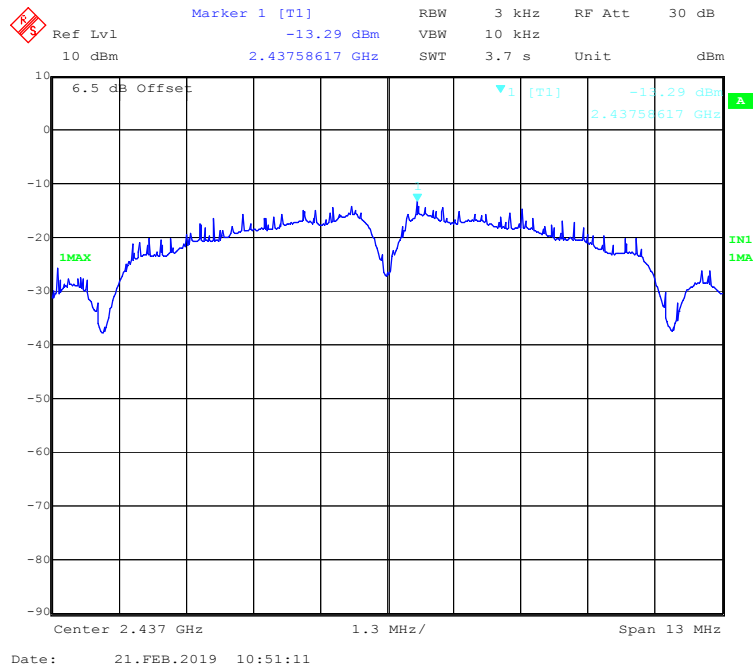


Chain0: 802.11b Mode High Channel

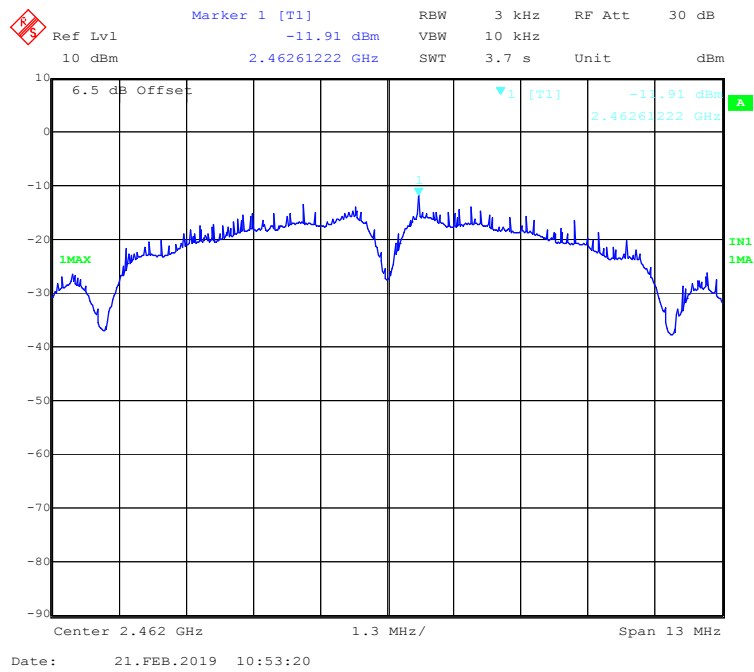


Chain0: 802.11g Mode Low Channel

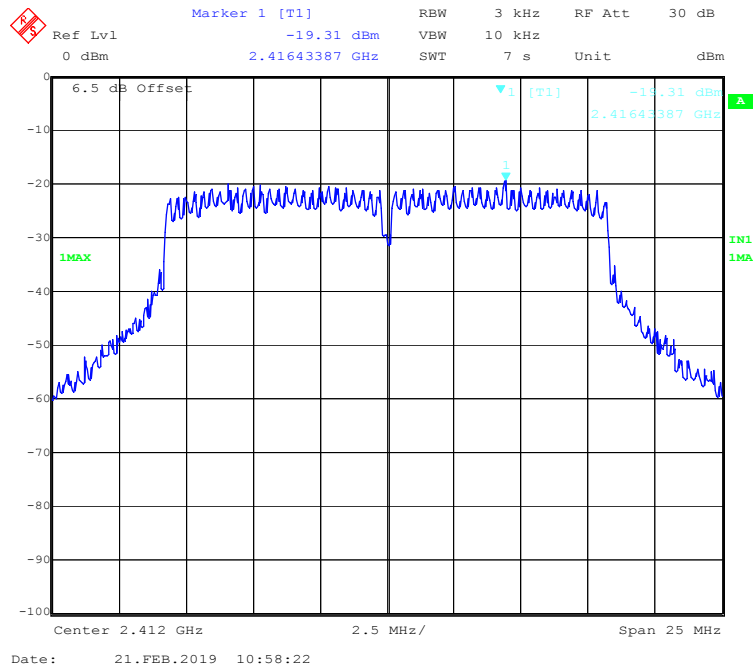


Chain0: 802.11g Mode Middle Channel

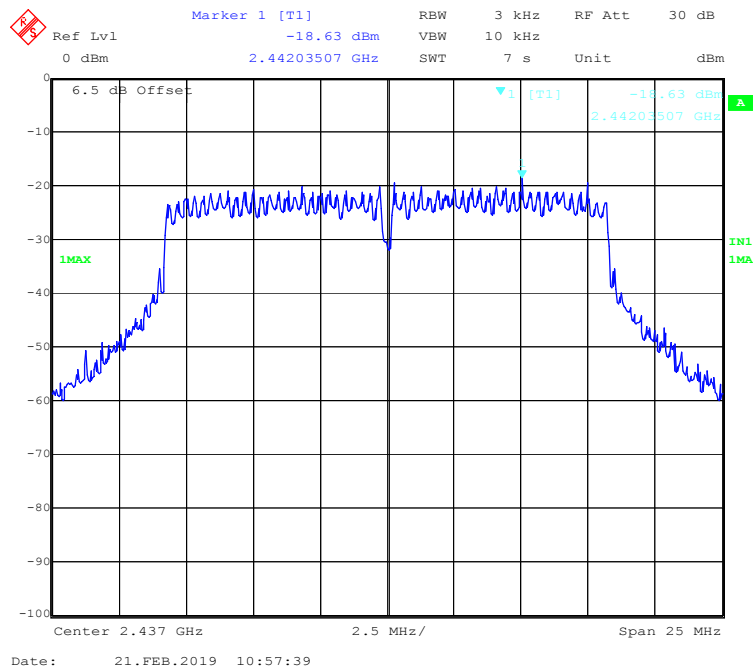


Chain0: 802.11g Mode High Channel

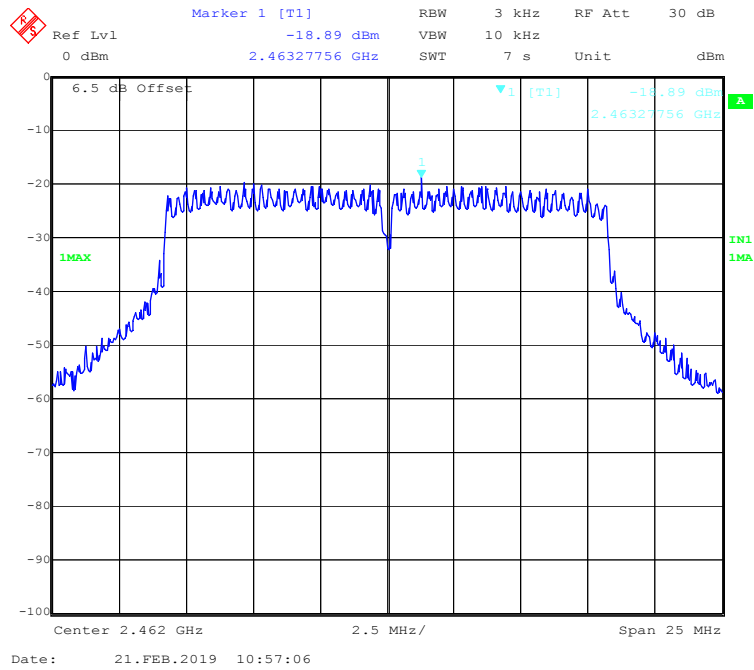


Chain0: 802.11n-HT20 Mode Low Channel

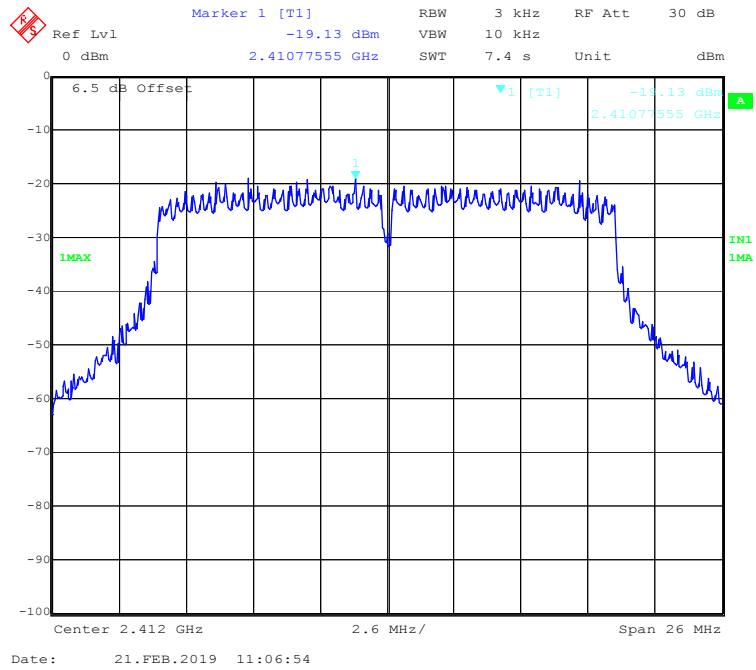


Chain0: 802.11n-HT20 Mode Middle Channel

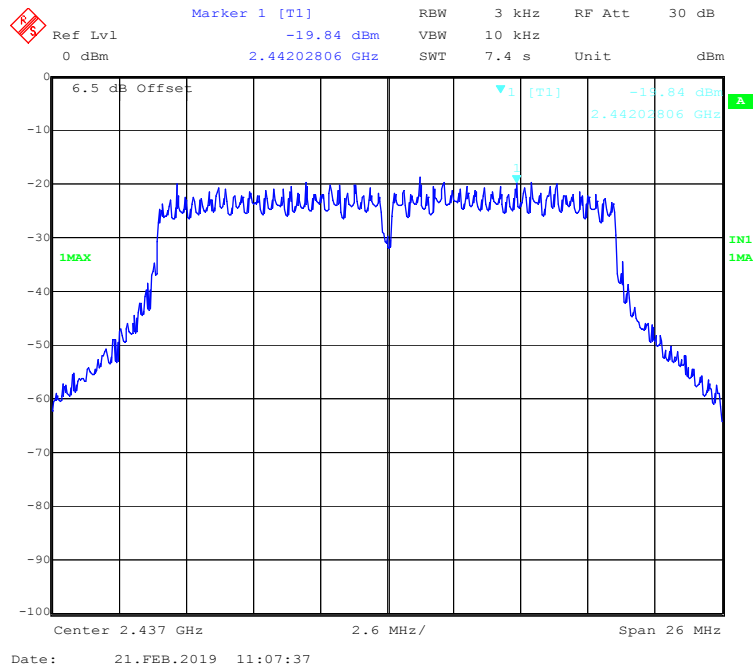


Chain0: 802.11n-HT20 Mode High Channel

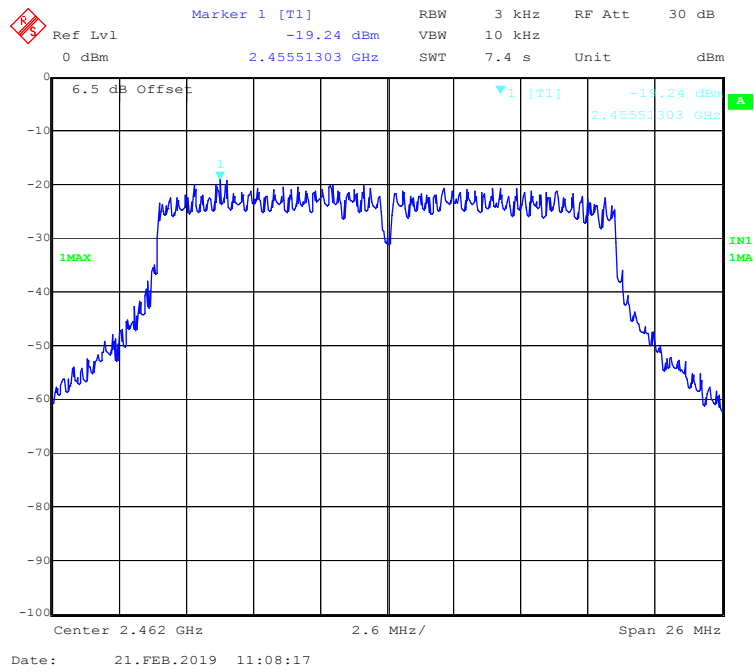


Chain0: 802.11n-HT40 Mode Low Channel

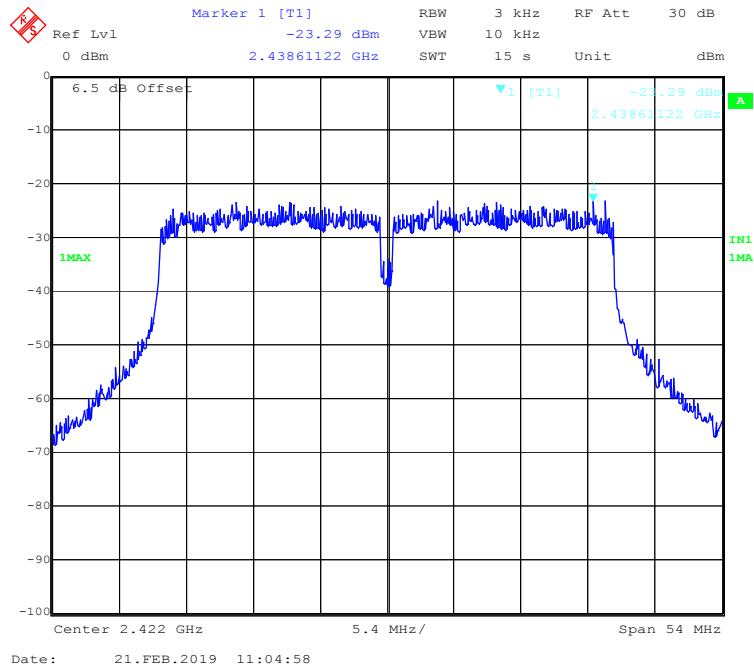


Chain0: 802.11n-HT40 Mode Middle Channel

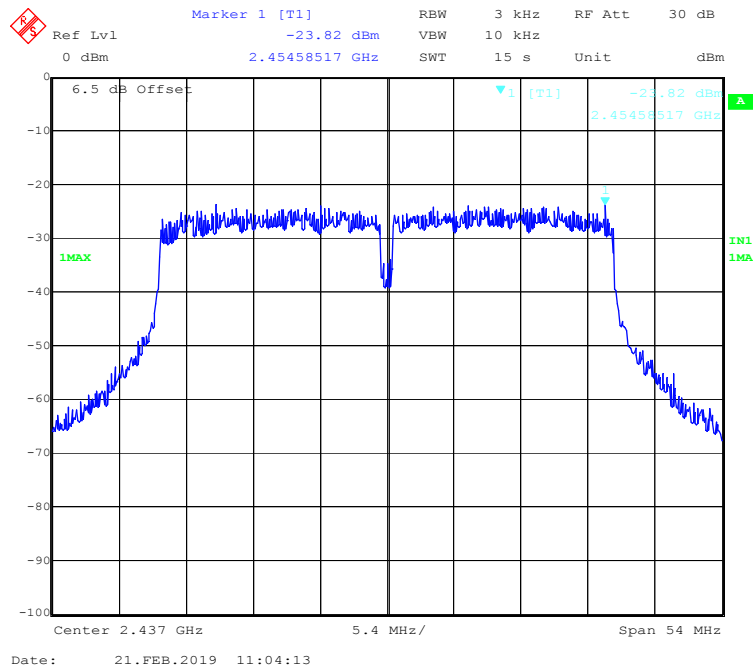


Chain0: 802.11n-HT40 Mode High Channel

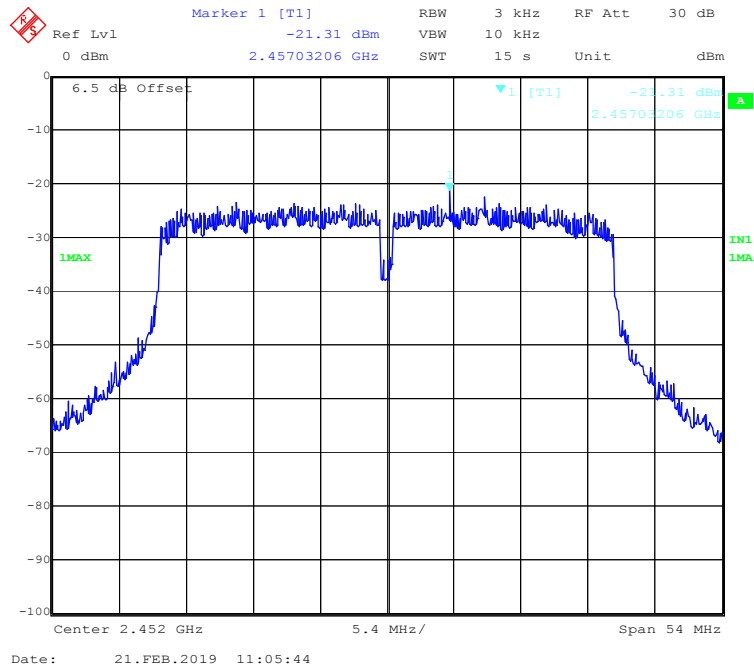


Chain1: 802.11b Mode Low Channel

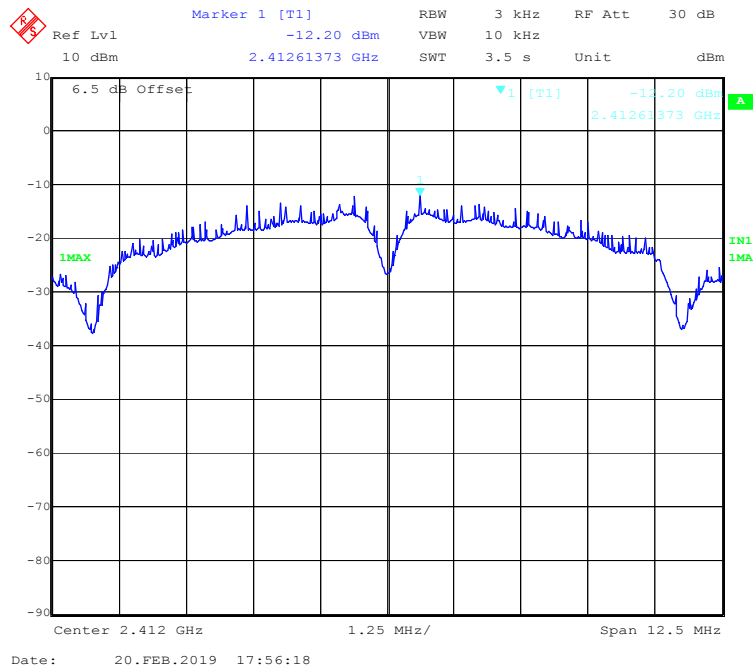


Chain1: 802.11b Mode Middle Channel

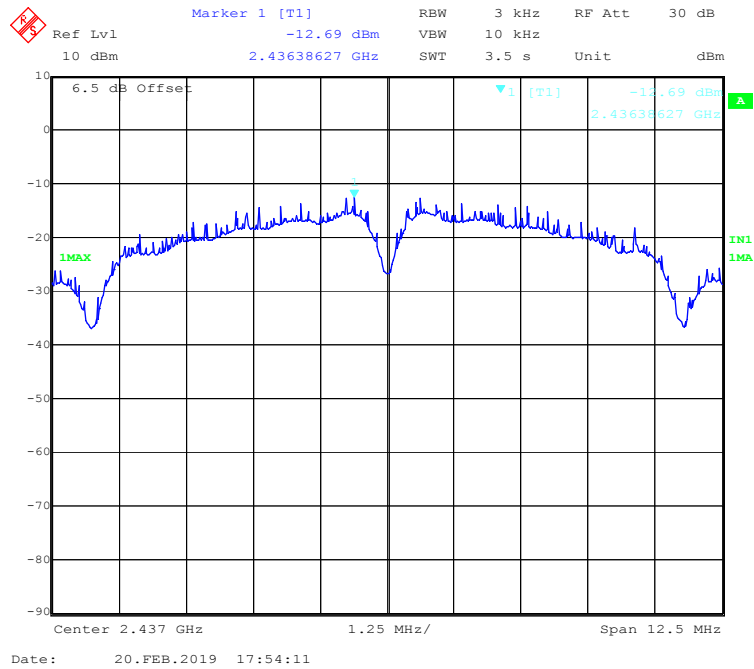


Chain1: 802.11b Mode High Channel

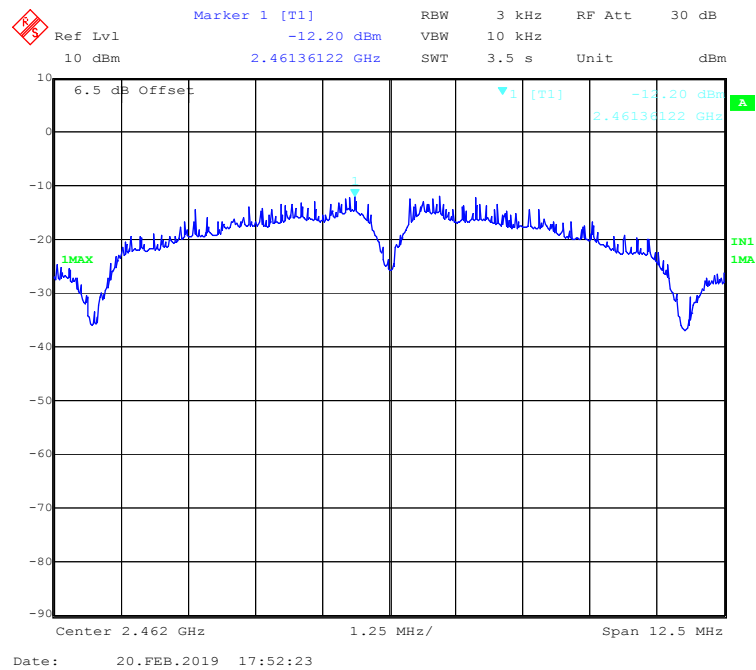


Chain1: 802.11g Mode Low Channel

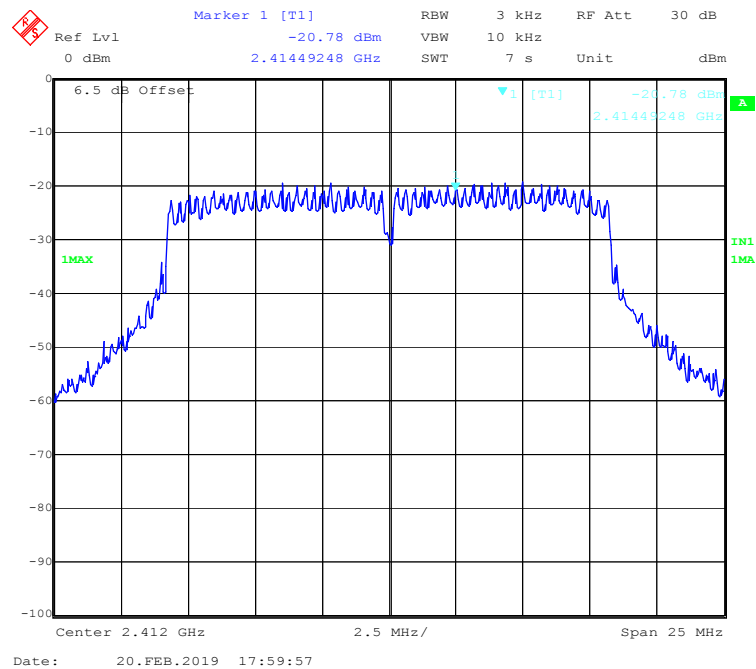


Chain1: 802.11g Mode Middle Channel

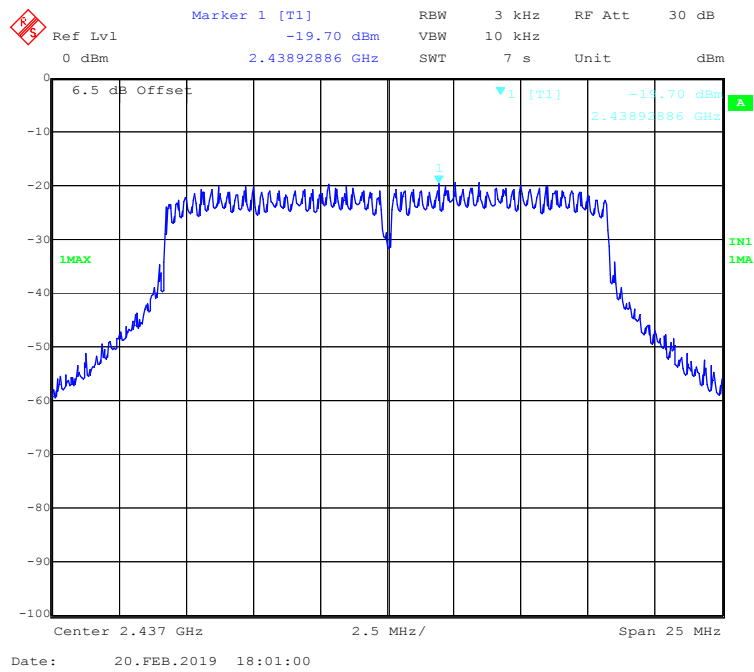


Chain1: 802.11g Mode High Channel

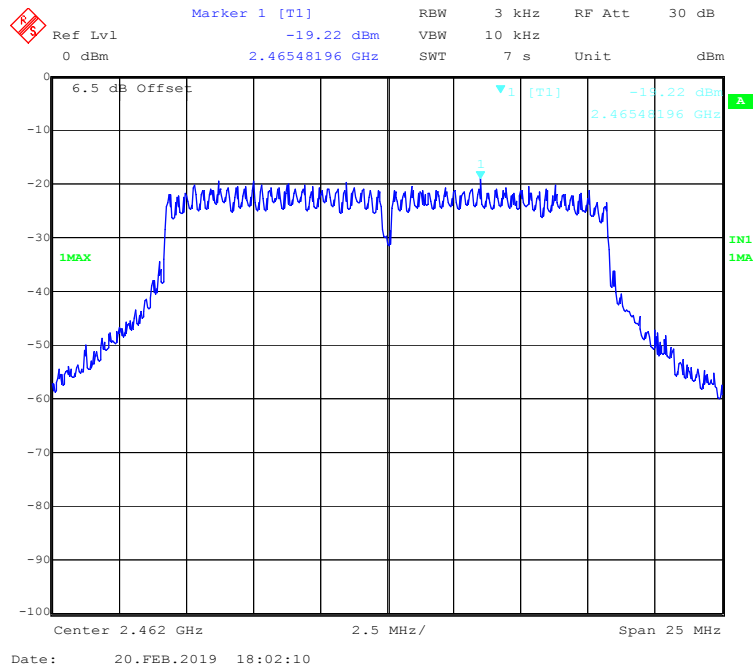


Chain1: 802.11n-HT20 Mode Low Channel

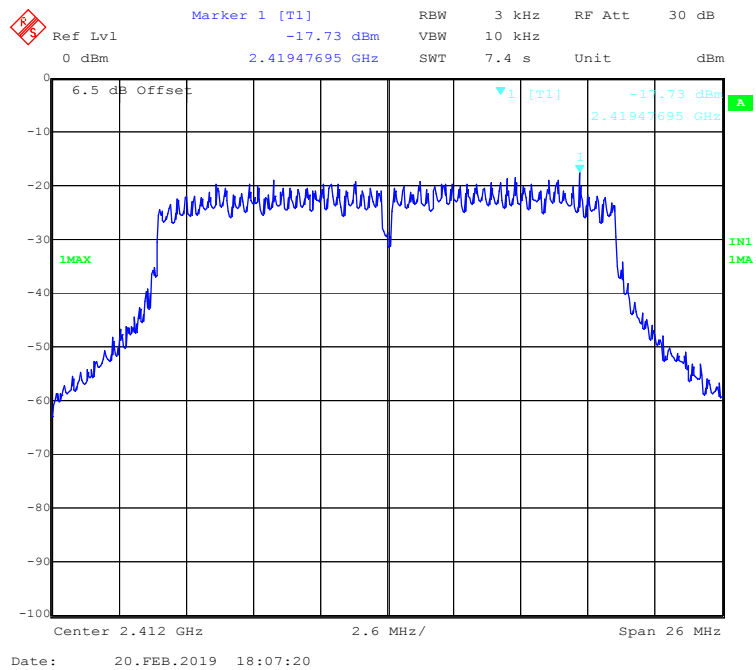


Chain1: 802.11n-HT20 Mode Middle Channel

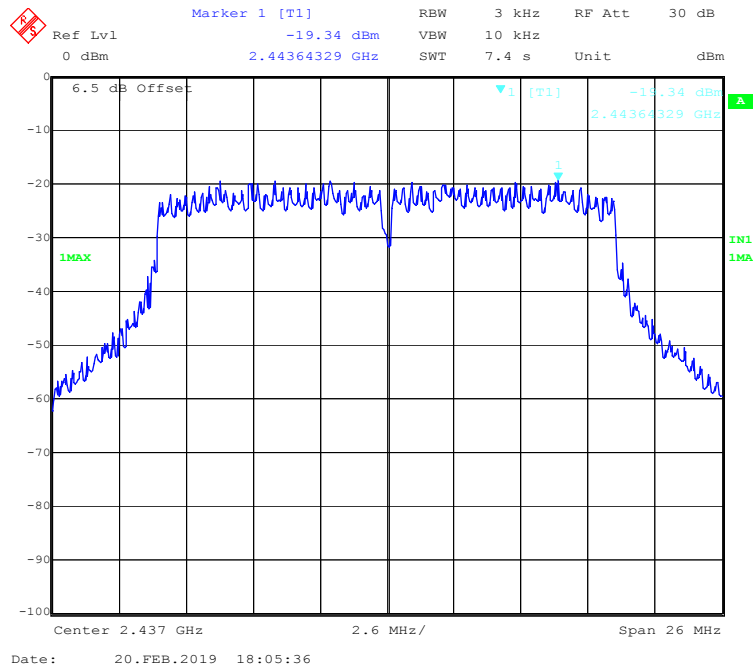


Chain1: 802.11n-HT20 Mode High Channel

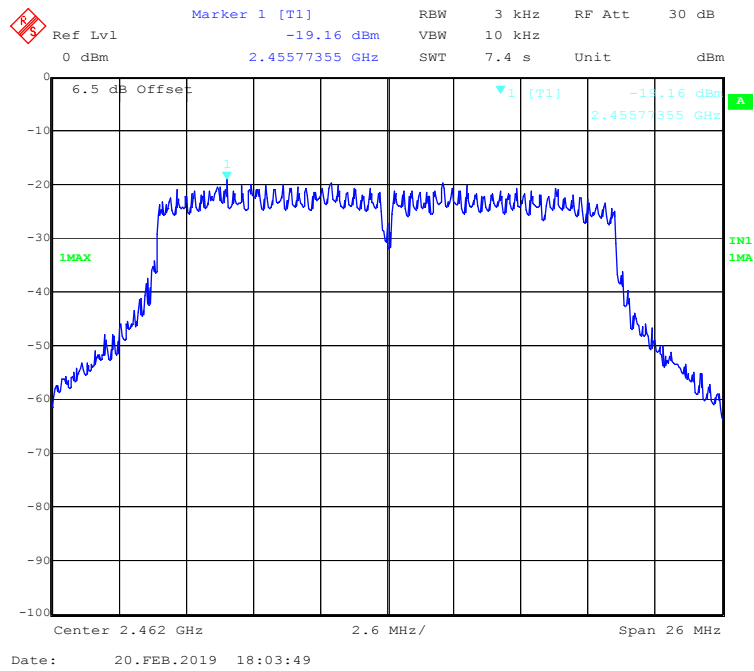


Chain1: 802.11n-HT40 Mode Low Channel

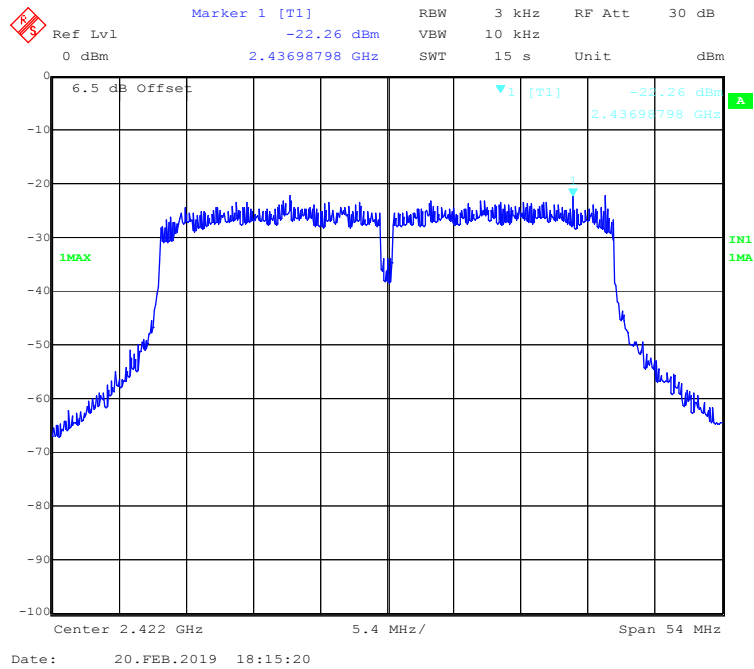


Chain1: 802.11n-HT40 Mode Middle Channel

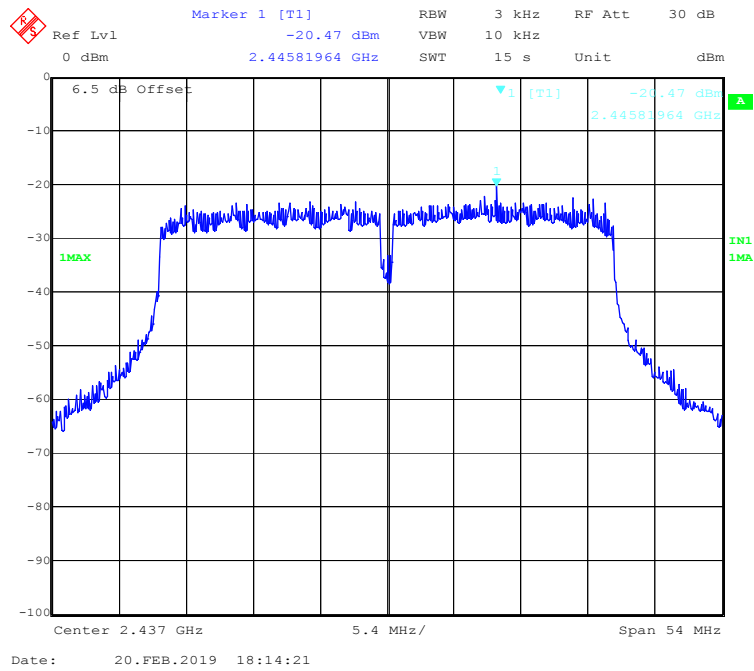


Chain1: 802.11n-HT40 Mode High Channel

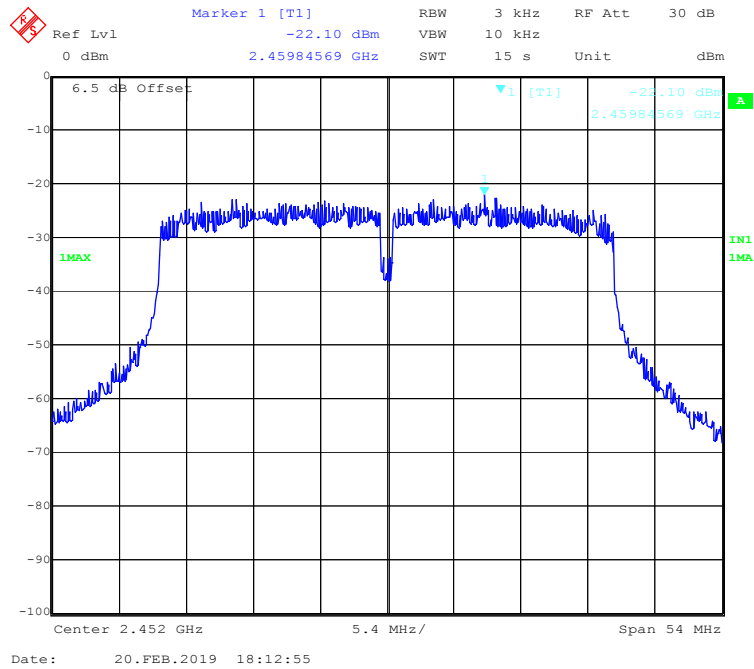


BLE Mode Low Channel

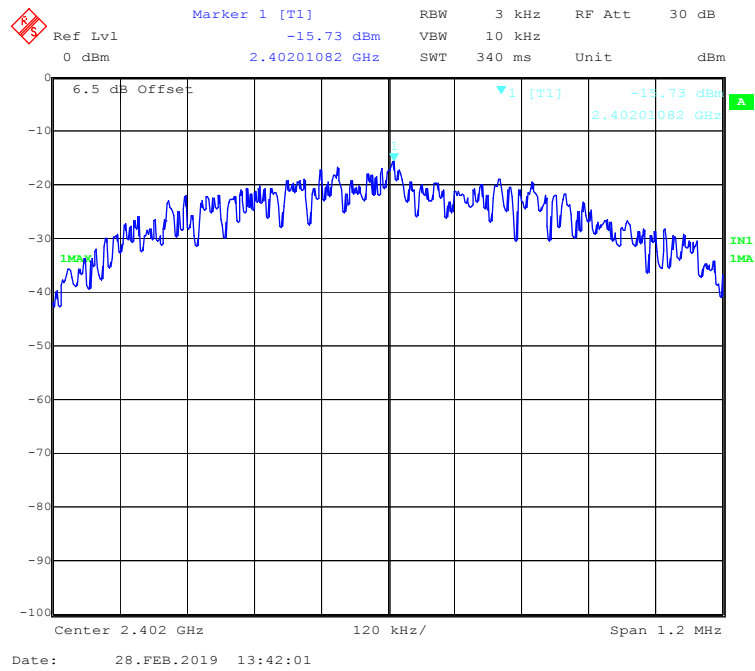

BLE Mode Middle Channel

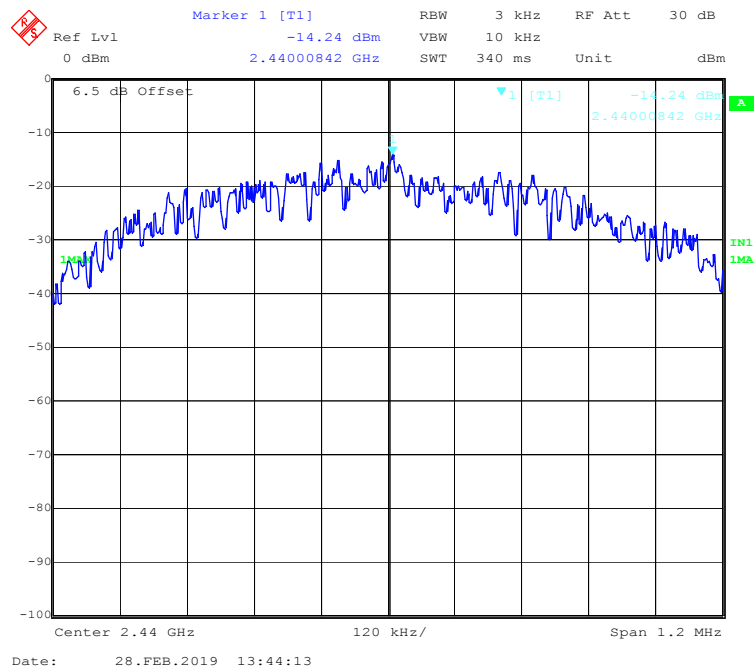

BLE Mode High Channel

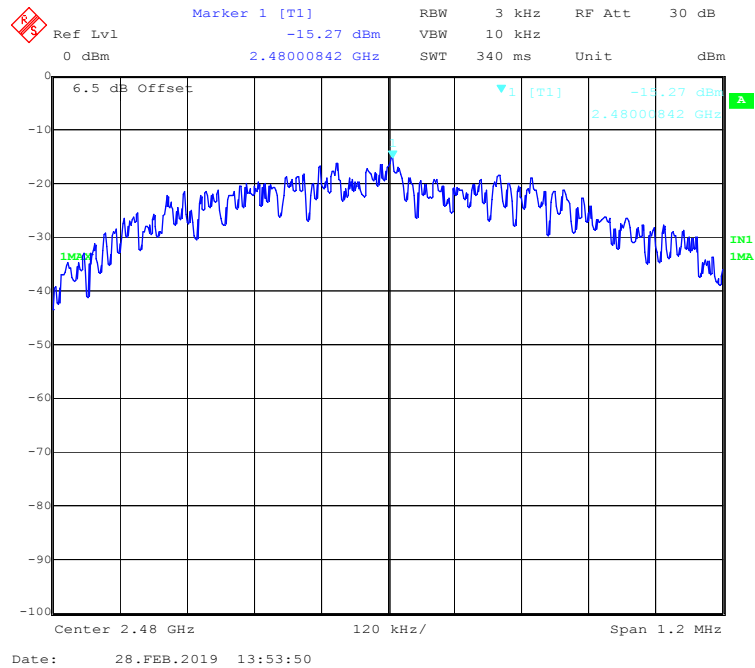

***** END OF REPORT *****