

TEST REPORT

Reference No. : WTS19S04025243W-6
FCC ID..... : 2ATAY-F3
Applicant..... : Figgers Communication
Address : 3810 Inverary Blvd Suite: 401 Fort Lauderdale, Florida 33319, USA
Manufacturer : The same as above
Address : The same as above
Product Name : Smart Phone
Model No. : F3
Brand. : FIGGERS
Standards..... : FCC CFR47 Part 15 E Section 15.407: 2018
Date of Receipt sample..... : 2019-04-24
Date of Test..... : 2019-04-25 to 2019-05-11
Date of Issue : 2019-05-13
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer



Approved by:

Phil Zhong

Phil Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Test Facility:**A. Accreditations for Conformity Assessment (International)**

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED CAB identifier: CN0013			

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
3 CONTENTS	4
4 REVISION HISTORY	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.	7
5.2 DETAILS OF E.U.T.	7
5.3 CHANNEL LIST	8
5.4 TEST MODE DESCRIPTION:	9
6 EQUIPMENT USED DURING TEST	11
6.1 EQUIPMENTS LIST	11
6.2 DESCRIPTION OF SUPPORT UNITS	12
6.3 MEASUREMENT UNCERTAINTY	12
6.4 TEST EQUIPMENT CALIBRATION	12
7 TEST SUMMARY	13
8 CONDUCTED EMISSION	14
8.1 E.U.T. OPERATION	14
8.2 EUT SETUP.....	14
8.3 MEASUREMENT DESCRIPTION	14
8.4 CONDUCTED EMISSION TEST RESULT	15
9 RADIATED EMISSIONS.....	17
9.1 EUT OPERATION.....	17
9.2 TEST SETUP	18
9.3 SPECTRUM ANALYZER SETUP	19
9.4 TEST PROCEDURE	20
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	20
9.6 SUMMARY OF TEST RESULTS	21
10 DUTY CYCLE.....	27
10.1 SUMMARY OF TEST RESULTS	27
11 BAND EDGE	31
11.1 TEST PRODUCE	31
11.2 TEST RESULT	32
12 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	37
12.1 TEST PROCEDURE:.....	37
12.2 TEST RESULT:	38
13 CONDUCTED OUTPUT POWER	45
13.1 TEST PROCEDURE:.....	45
13.2 TEST RESULT :	46
14 POWER SPECTRAL DENSITY	54
14.1 TEST PROCEDURE:.....	54
14.2 TEST RESULT:	55
15 FREQUENCY STABILITY.....	63
15.1 TEST PROCEDURE:.....	63
15.2 TEST RESULT:	64

16 ANTENNA REQUIREMENT 65

17 RF EXPOSURE..... 66

18 PHOTOGRAPHS OF TEST SETUP AND EUT..... 67

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S04025 243W-6	2019-04-24	2019-04-25 to 2019-05-11	2019-05-13	original	-	Valid

5 General Information

5.1 General Description of E.U.T.

Product:	Smart Phone
Model(s):	F3
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band I/II/IV/V/VIII
LTE Band(s):	FDD Band 2/4/5/7/12/17
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40)
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	E915_MAIN_PCB_V1.1
Software Version:	OUKITELE_F3_V1.0_S190410
Highest frequency (Exclude Radio):	1.25GHz
Storage Location:	Internal Storage
Note:	N/A

5.2 Details of E.U.T.

Operation Frequency:	802.11a/ n(HT20/40)/ac(HT20/40): 5150MHz to 5250MHz
Max. RF output power:	U-NII-1: 6.78dBm
Type of Modulation:	OFDM
Antenna installation:	internal permanent antenna
Antenna Gain:	U-NII-1: -0.38dBi
Ratings:	Battery DC 3.85V, 3500mAh DC 5V, 3A; 9V, 2A; 12V, 1.5A, charging from adapter (Adapter Input: 110-240V~50/60Hz 0.6A)
Adapter:	Manufacturer: ShenZhen Good-she Technology Co., Ltd. Model No.: GS-551

5.3 Channel List

Band I (5.15-5.25GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	38	5190
40	5200	42	5210
44	5220	46	5230
48	5240		

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
48	5240		

For 802.11 n(HT40)/ac(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

5.4 Test Mode Description:

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Transmitting duty cycle is no less 98%.

The software is installed in operation system, named "RFTestTool.apk", Version 1, date 20160518.

Test Items	Mode	Data Rate	Channel	TX/RX
Radiated Emissions	802.11a	6 Mbps	U-NII-1 36/40/48	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46	TX
Duty Cycle	802.11a	6 Mbps	U-NII-1 36/40/48	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46	TX
Band Edge	802.11a	6 Mbps	U-NII-1 36/40/48	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46	TX
6dB Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46	TX
26dB Bandwidth and 99% Occupied Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46	TX
Conducted Output Power	802.11a	6 Mbps	U-NII-1 36/40/48	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46	TX

Power Spectral Density	802.11a	6 Mbps	U-NII-1 36/40/48	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46	TX
Frequency Stability	Un-modulation	/	U-NII-1 36/40/48	TX

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2018-09-14	2019-09-13
2.	LISN	R&S	ENV216	101215	2018-09-14	2019-09-13
3.	Cable	Top	TYPE16(3.5M)	-	2018-09-14	2019-09-13
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2018-09-14	2019-09-13
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2018-09-14	2019-09-13
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2018-09-14	2019-09-13
4.	Cable	LARGE	RF300	-	2018-09-14	2019-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	2018-09-14	2019-09-13
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-09-14	2019-09-13
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-09-14	2019-09-13
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018-09-14	2019-09-13
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-09-14	2019-09-13
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-09-14	2019-09-13
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-09-14	2019-09-13
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-09-14	2019-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-09-14	2019-09-13
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-09-14	2019-09-13
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-09-14	2019-09-13
4	Cable	HUBER+SUHNER	CBL2	525178	2018-09-14	2019-09-13

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-14	2019-09-13
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2018-09-14	2019-09-13
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-14	2019-09-13

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	N/A
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

8.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

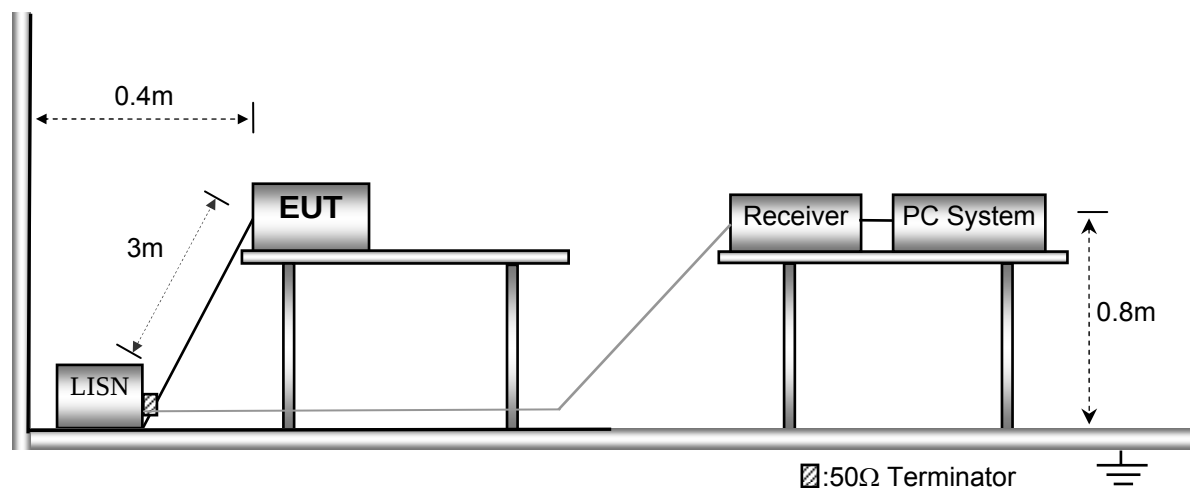


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.

Live line:

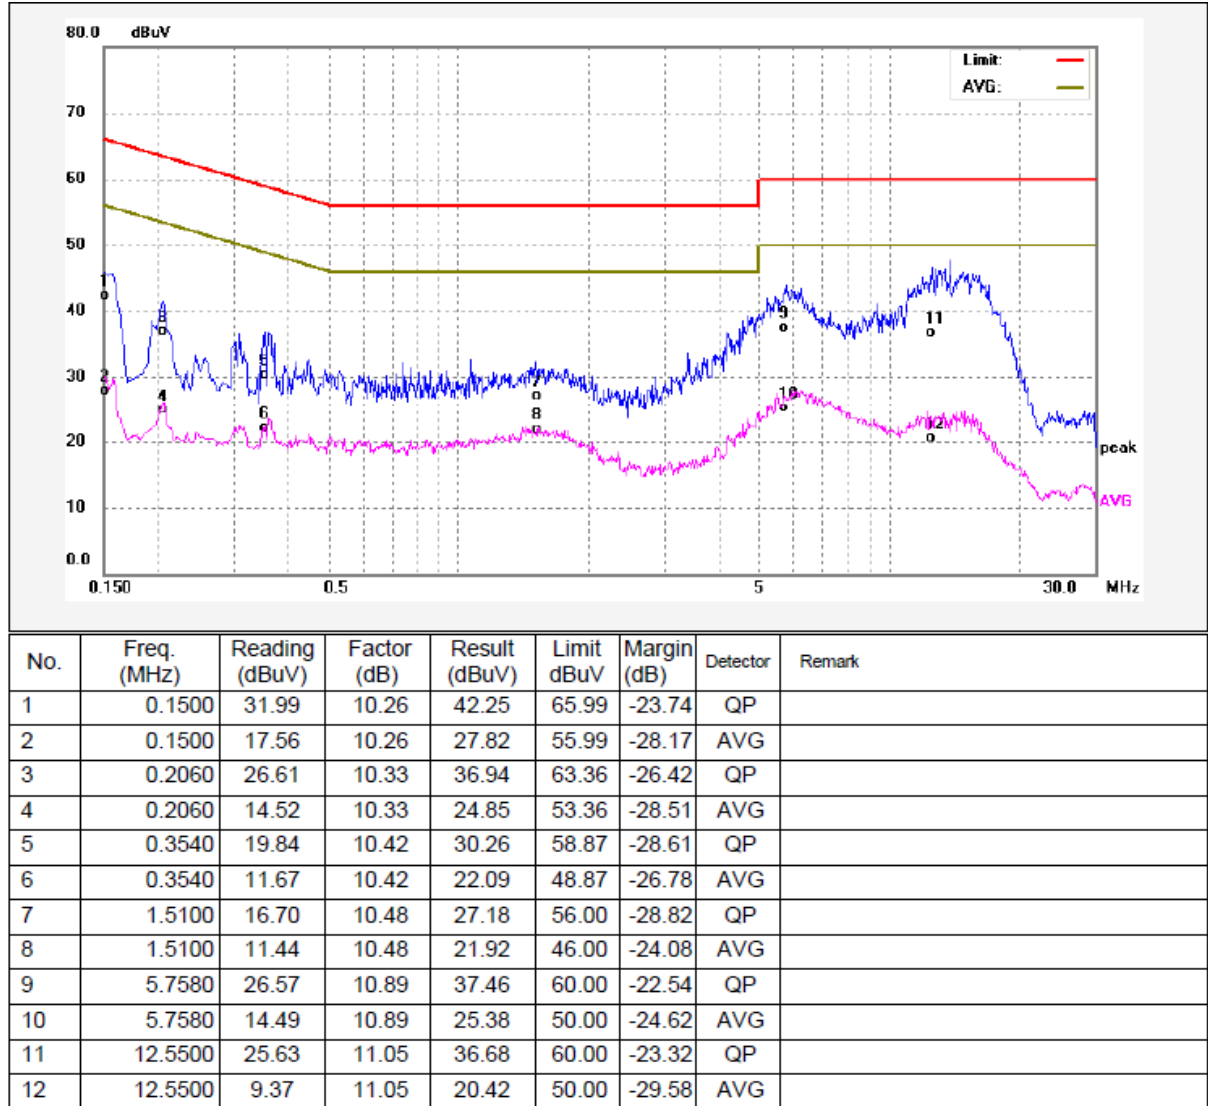

Neutral line:

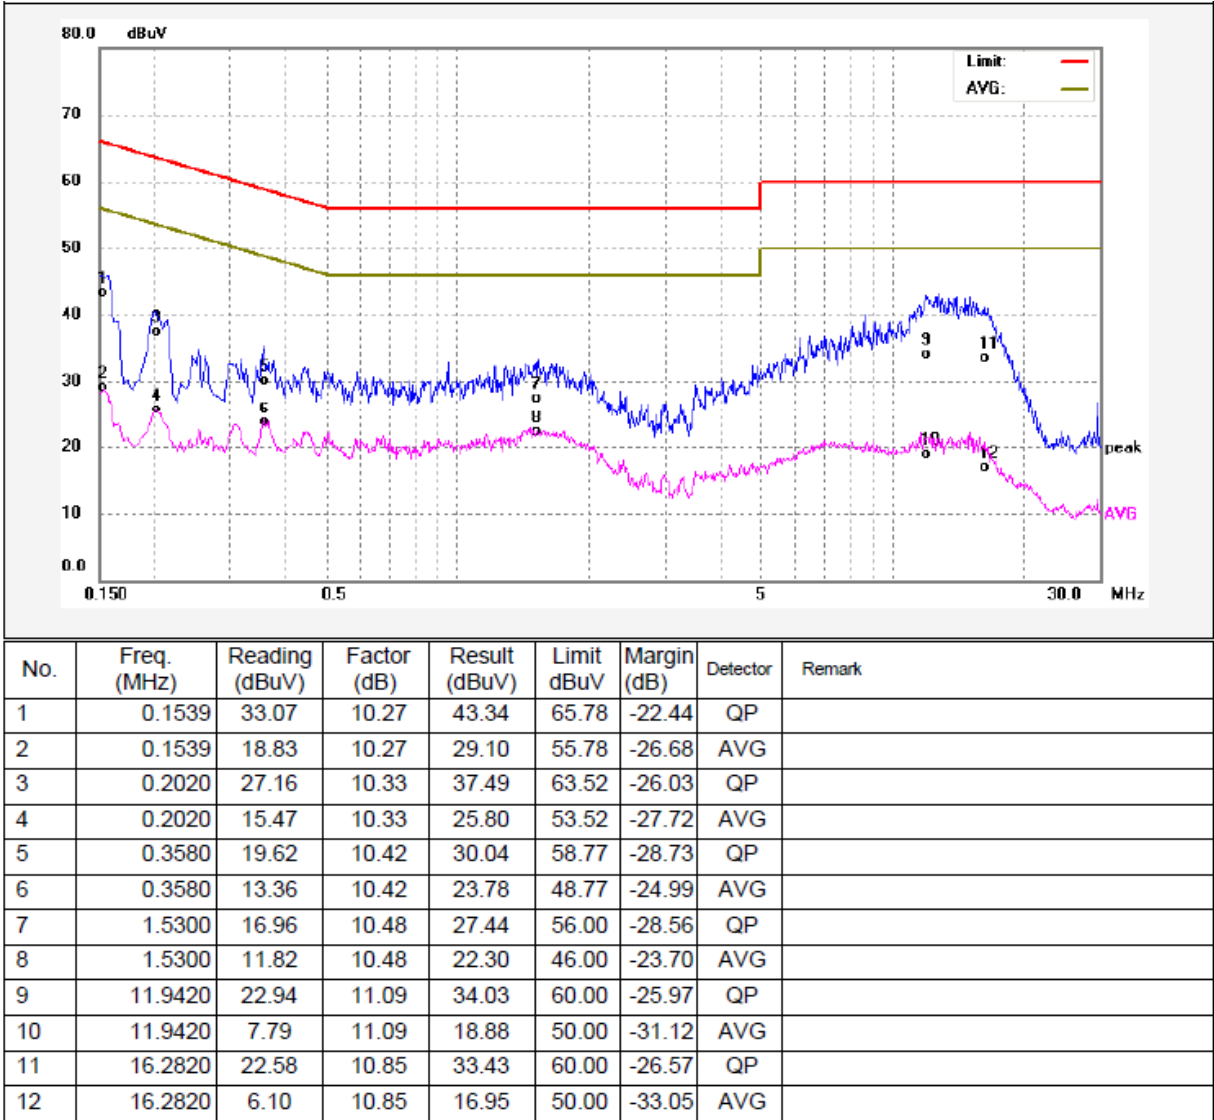

9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

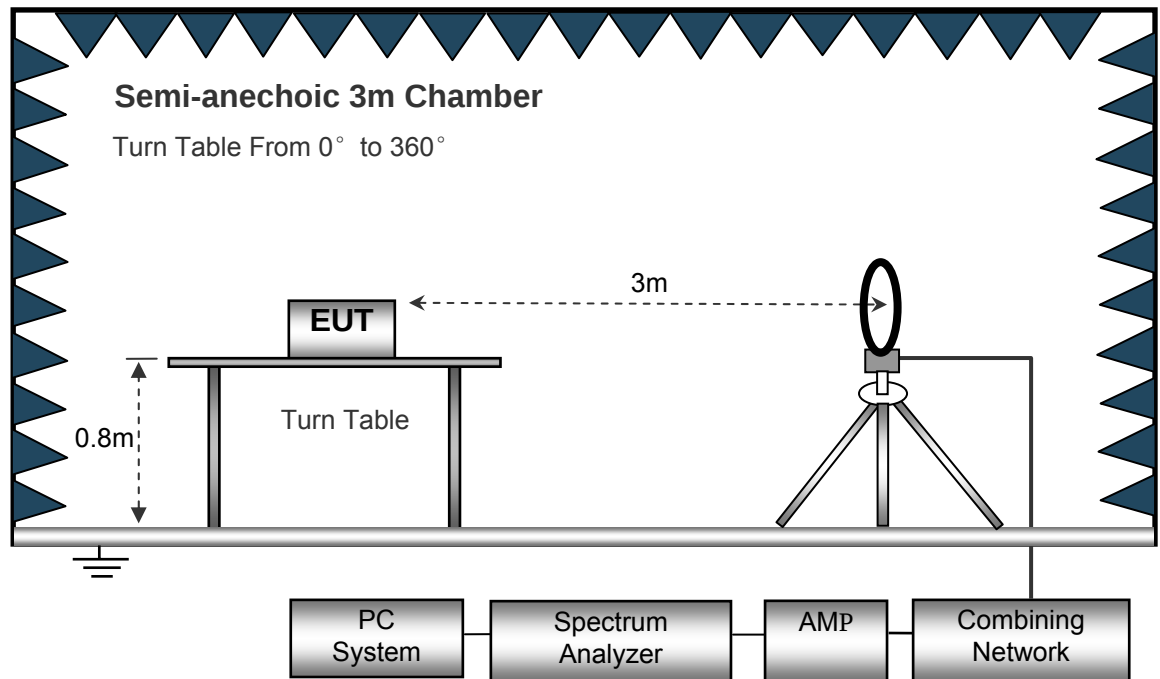

The test setup for emission measurement from 30 MHz to 1 GHz.

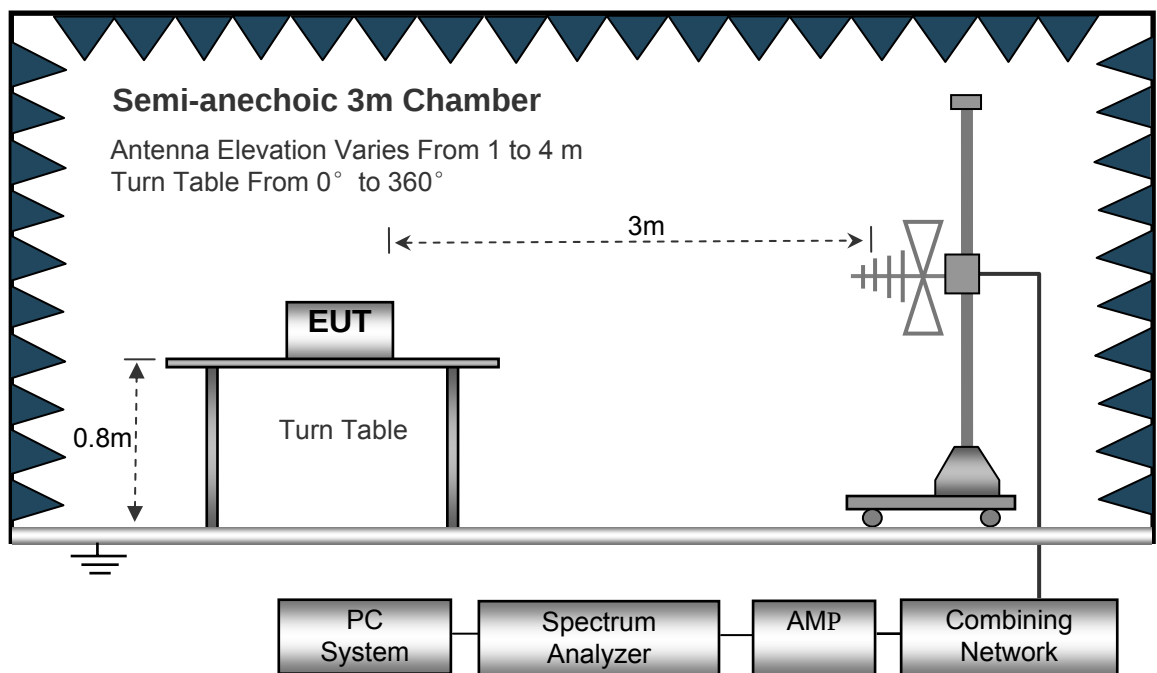

The test setup for emission measurement above 1 GHz.

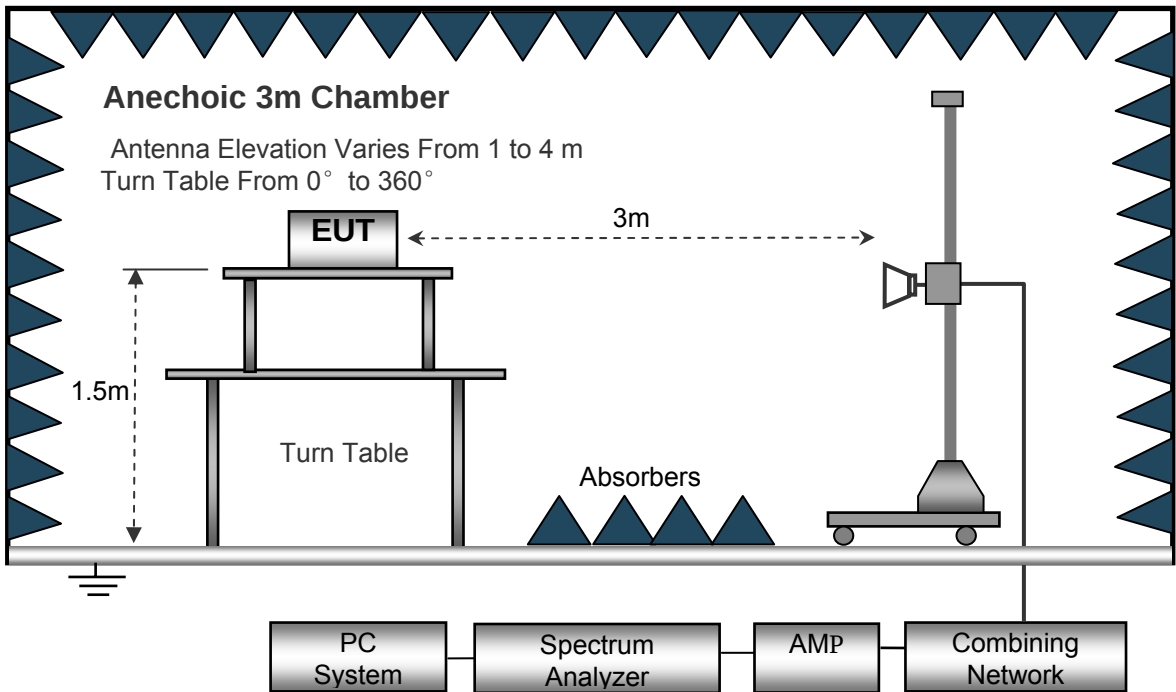

9.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth.....10kHz
- Video Bandwidth.....10kHz
- Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....100kHz
- Video Bandwidth.....300kHz

Above 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....3MHz
- DetectorAve.
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9KHz~30MHz

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-1:802.11a 5180MHz							
6.021	25.34	QP	21.84	40.00	7.18	29.54	-22.36
15.730	25.36	QP	21.35	40.00	6.71	29.54	-22.83
25.680	25.18	QP	20.67	40.00	5.85	29.54	-23.69
U-NII-1:802.11n20 5180MHz							
6.021	25.30	QP	21.84	40.00	7.14	29.54	-22.40
15.730	25.12	QP	21.35	40.00	6.47	29.54	-23.07
25.680	25.34	QP	20.67	40.00	6.01	29.54	-23.53
U-NII-1:802.11ac 20 5180MHz							
6.021	24.06	QP	21.84	40.00	5.90	29.54	-23.64
15.730	25.09	QP	21.35	40.00	6.44	29.54	-23.10
25.680	24.58	QP	20.67	40.00	5.25	29.54	-24.29
U-NII-1:802.11n40 5190MHz							
6.021	25.63	QP	21.84	40.00	7.47	29.54	-22.07
15.730	24.87	QP	21.35	40.00	6.22	29.54	-23.32
25.680	24.96	QP	20.67	40.00	5.63	29.54	-23.91
U-NII-1:802.11ac40 5190MHz							
6.021	25.61	QP	21.84	40.00	7.45	29.54	-22.09
15.730	25.20	QP	21.35	40.00	6.55	29.54	-22.99
25.680	24.97	QP	20.67	40.00	5.64	29.54	-23.90

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
223.45	39.90	QP	16	1.1	H	-11.62	28.28	46.00	-17.72
223.45	35.28	QP	35	2.0	V	-11.62	23.66	46.00	-22.34
4501.96	50.64	PK	336	1.9	H	-2.03	48.61	74.00	-25.39
4501.96	46.05	Ave	336	1.9	H	-2.03	44.02	54.00	-9.98
5121.04	53.22	PK	14	1.0	H	-1.02	52.20	74.00	-21.80
5121.04	49.50	Ave	14	1.0	H	-1.02	48.48	54.00	-5.52
10360.00	41.40	PK	271	1.7	H	5.33	46.73	74.00	-27.27
10360.00	35.59	Ave	271	1.7	H	5.33	40.92	54.00	-13.08
802.11a U-NII-1 Middle channel 5200MHz									
223.45	39.01	QP	253	1.6	H	-11.62	27.39	46.00	-18.61
223.45	34.94	QP	138	1.7	V	-11.62	23.32	46.00	-22.68
4518.30	52.04	PK	7	1.6	H	-1.94	50.10	74.00	-23.90
4518.30	46.64	Ave	7	1.6	H	-1.94	44.70	54.00	-9.30
5115.87	54.27	PK	256	1.6	H	-1.06	53.21	74.00	-20.79
5115.87	50.46	Ave	256	1.6	H	-1.06	49.40	54.00	-4.60
10400.00	41.19	PK	315	1.6	H	5.21	46.40	74.00	-27.60
10400.00	34.56	Ave	315	1.6	H	5.21	39.77	54.00	-14.23

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 High channel 5240MHz									
223.45	38.09	QP	287	1.6	H	-11.62	26.47	46.00	-19.53
223.45	33.76	QP	274	1.5	V	-11.62	22.14	46.00	-23.86
4528.23	51.78	PK	107	1.3	H	-2.24	49.54	74.00	-24.46
4528.23	46.66	Ave	107	1.3	H	-2.24	44.42	54.00	-9.58
5120.52	55.15	PK	296	1.4	H	-1.09	54.06	74.00	-19.94
5120.52	51.04	Ave	296	1.4	H	-1.09	49.95	54.00	-4.05
10480.00	42.72	PK	166	1.1	H	5.14	47.86	74.00	-26.14
10480.00	36.59	Ave	166	1.1	H	5.14	41.73	54.00	-12.27
802.11n(HT20) U-NII-1 Low Channel 5180MHz									
223.45	37.91	QP	161	1.6	H	-11.62	26.29	46.00	-19.71
223.45	34.78	QP	354	1.5	V	-11.62	23.16	46.00	-22.84
4501.82	48.54	PK	162	1.4	H	-2.14	46.40	74.00	-27.60
4501.82	45.07	Ave	162	1.4	H	-2.14	42.93	54.00	-11.07
5112.78	46.91	PK	258	1.3	H	-1.06	45.85	74.00	-28.15
5112.78	38.62	Ave	258	1.3	H	-1.06	37.56	54.00	-16.44
10360.00	42.12	PK	37	1.6	H	5.33	47.45	74.00	-26.55
10360.00	34.80	Ave	37	1.6	H	5.33	40.13	54.00	-13.87
802.11n(HT20) U-NII-1 Middle channel 5200MHz									
223.45	39.01	QP	173	1.6	H	-11.62	27.39	46.00	-18.61
223.45	33.92	QP	233	1.9	V	-11.62	22.30	46.00	-23.70
4536.90	49.22	PK	143	1.5	H	-2.12	47.10	74.00	-26.90
4536.90	46.16	Ave	143	1.5	H	-2.12	44.04	54.00	-9.96
5140.65	46.27	PK	228	1.6	H	-1.06	45.21	74.00	-28.79
5140.65	38.03	Ave	228	1.6	H	-1.06	36.97	54.00	-17.03
10400.00	42.80	PK	21	1.9	H	5.21	48.01	74.00	-25.99
10400.00	36.07	Ave	21	1.9	H	5.21	41.28	54.00	-12.72

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
223.45	39.96	QP	68	1.7	H	-11.62	28.34	46.00	-17.66
223.45	33.13	QP	22	1.1	V	-11.62	21.51	46.00	-24.49
4512.97	48.22	PK	257	1.6	H	-1.96	46.26	74.00	-27.74
4512.97	45.88	Ave	257	1.6	H	-1.96	43.92	54.00	-10.08
5117.00	46.13	PK	30	1.8	H	-1.06	45.07	74.00	-28.93
5117.00	37.05	Ave	30	1.8	H	-1.06	35.99	54.00	-18.01
10480.00	41.17	PK	162	1.4	H	5.14	46.31	74.00	-27.69
10480.00	36.78	Ave	162	1.4	H	5.14	41.92	54.00	-12.08
802.11n(HT40) U-NII-1 Low Channel 5190MHz									
223.45	39.25	QP	313	1.4	H	-11.62	27.63	46.00	-18.37
223.45	32.75	QP	244	1.6	V	-11.62	21.13	46.00	-24.87
4506.90	39.13	PK	6	1.8	H	-1.89	37.24	74.00	-36.76
4506.90	39.39	Ave	6	1.8	H	-1.89	37.50	54.00	-16.50
5127.16	45.66	PK	189	1.5	H	-1.06	44.60	74.00	-29.40
5127.16	39.80	Ave	189	1.5	H	-1.06	38.74	54.00	-15.26
10380.00	39.66	PK	122	1.1	H	5.26	44.92	74.00	-29.08
10380.00	34.53	Ave	122	1.1	H	5.26	39.79	54.00	-14.21
802.11n(HT40) U-NII-1 High channel 5230MHz									
223.45	40.38	QP	173	1.0	H	-11.62	28.76	46.00	-17.24
223.45	33.60	QP	197	2.0	V	-11.62	21.98	46.00	-24.02
4507.99	38.61	PK	64	1.3	H	-1.94	36.67	74.00	-37.33
4507.99	34.99	Ave	64	1.3	H	-1.94	33.05	54.00	-20.95
5148.79	47.24	PK	175	1.6	H	-1.06	46.18	74.00	-27.82
5148.79	38.33	Ave	175	1.6	H	-1.06	37.27	54.00	-16.73
10480.00	42.10	PK	98	1.2	H	5.28	47.38	74.00	-26.62
10480.00	36.23	Ave	98	1.2	H	5.28	41.51	54.00	-12.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT20) U-NII-1 Low Channel 5180MHz									
223.45	38.32	QP	273	1.2	H	-11.62	26.70	46.00	-19.30
223.45	33.86	QP	43	1.4	V	-11.62	22.24	46.00	-23.76
4538.56	43.02	PK	185	1.9	H	-1.86	41.16	74.00	-32.84
4538.56	42.55	Ave	185	1.9	H	-1.86	40.69	54.00	-13.31
5121.90	45.20	PK	106	1.2	H	-1.06	44.14	74.00	-29.86
5121.90	39.37	Ave	106	1.2	H	-1.06	38.31	54.00	-15.69
10360.00	40.79	PK	180	1.6	H	5.33	46.12	74.00	-27.88
10360.00	34.62	Ave	180	1.6	H	5.33	39.95	54.00	-14.05
802.11ac(HT20) U-NII-1 Middle channel 5200MHz									
223.45	39.29	QP	246	1.2	H	-11.62	27.67	46.00	-18.33
223.45	33.82	QP	37	2.0	V	-11.62	22.20	46.00	-23.80
4526.69	43.22	PK	27	1.8	H	-1.82	41.40	74.00	-32.60
4526.69	42.56	Ave	27	1.8	H	-1.82	40.74	54.00	-13.26
5115.13	46.03	PK	195	1.5	H	-1.06	44.97	74.00	-29.03
5115.13	40.87	Ave	195	1.5	H	-1.06	39.81	54.00	-14.19
10400.00	42.18	PK	338	1.9	H	5.21	47.39	74.00	-26.61
10400.00	36.67	Ave	338	1.9	H	5.21	41.88	54.00	-12.12
802.11ac(HT20) U-NII-1 High channel 5240MHz									
223.45	39.24	QP	346	1.5	H	-11.62	27.62	46.00	-18.38
223.45	34.80	QP	134	1.4	V	-11.62	23.18	46.00	-22.82
4519.50	43.03	PK	167	1.4	H	-1.81	41.22	74.00	-32.78
4519.50	43.01	Ave	167	1.4	H	-1.81	41.20	54.00	-12.80
5122.32	47.31	PK	303	1.3	H	-1.06	46.25	74.00	-27.75
5122.32	40.75	Ave	303	1.3	H	-1.06	39.69	54.00	-14.31
10480.00	41.80	PK	52	1.5	H	5.14	46.94	74.00	-27.06
10480.00	35.40	Ave	52	1.5	H	5.14	40.54	54.00	-13.46

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT40) U-NII-1 Low Channel 5190MHz									
223.45	42.47	QP	145	1.7	H	-11.62	30.85	74.00	-43.15
223.45	34.72	QP	22	1.7	V	-11.62	23.10	74.00	-50.90
4500.14	35.59	PK	141	1.2	H	-1.91	33.68	74.00	-40.32
4500.14	30.29	Ave	141	1.2	H	-1.91	28.38	54.00	-25.62
5126.98	46.05	PK	108	1.5	H	-1.06	44.99	74.00	-29.01
5126.98	41.09	Ave	108	1.5	H	-1.06	40.03	54.00	-13.97
10380.00	39.59	PK	151	1.9	H	5.26	44.85	74.00	-29.15
10380.00	34.79	Ave	151	1.9	H	5.26	40.05	54.00	-13.95
802.11ac(HT40) U-NII-1 High channel 5230MHz									
223.45	42.93	QP	199	1.7	H	-11.62	31.31	74.00	-42.69
223.45	34.22	QP	185	1.5	V	-11.62	22.60	74.00	-51.40
4503.44	36.59	PK	293	1.4	H	-1.93	34.66	74.00	-39.34
4503.44	31.09	Ave	293	1.4	H	-1.93	29.16	54.00	-24.84
5146.22	46.91	PK	119	1.4	H	-1.06	45.85	74.00	-28.15
5146.22	42.33	Ave	119	1.4	H	-1.06	41.27	54.00	-12.73
10460.00	40.89	PK	87	2.0	H	5.28	46.17	74.00	-27.83
10480.00	36.20	Ave	87	2.0	H	5.28	41.48	54.00	-12.52

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

10 Duty cycle


Test Requirement:	47 CFR Part 15C 15.407 KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section (B)
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.

10.1 Summary of Test Results


802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100

Test result plots shown as follows:


802.11a U-NII-1 Low channel

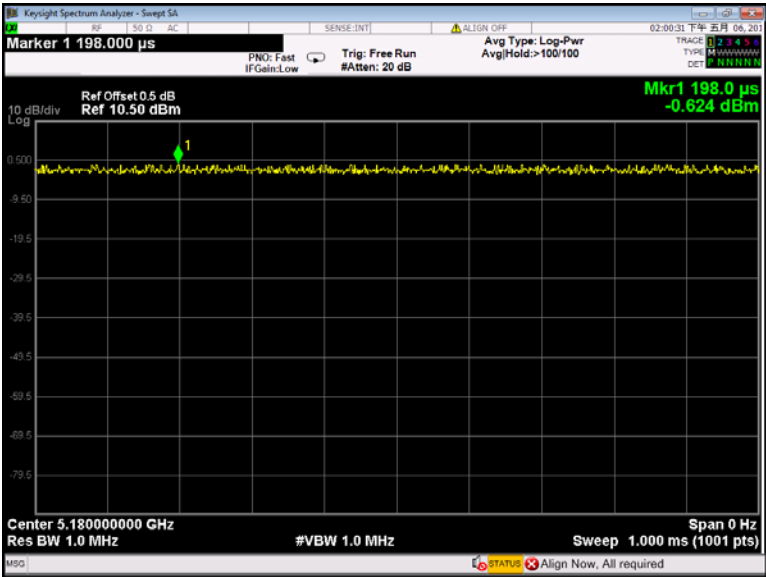


802.11n(HT20) U-NII-1 Low channel

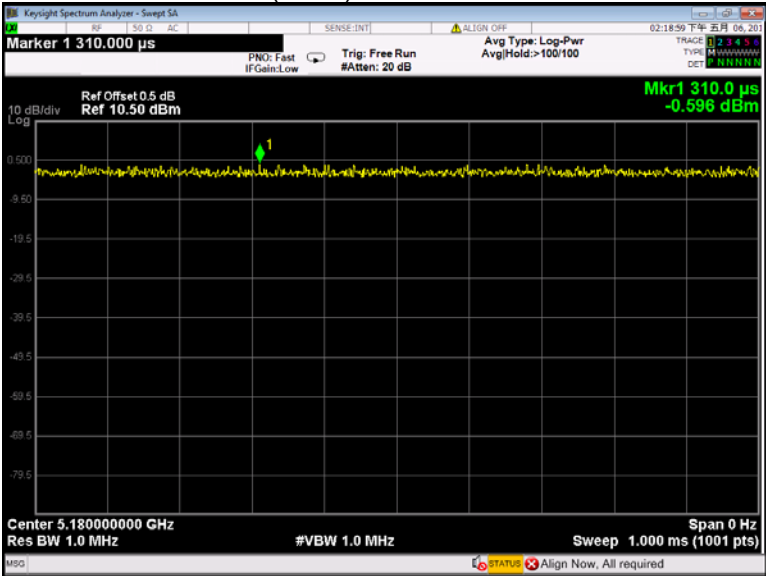


802.11n(HT40) U-NII-1 Low channel

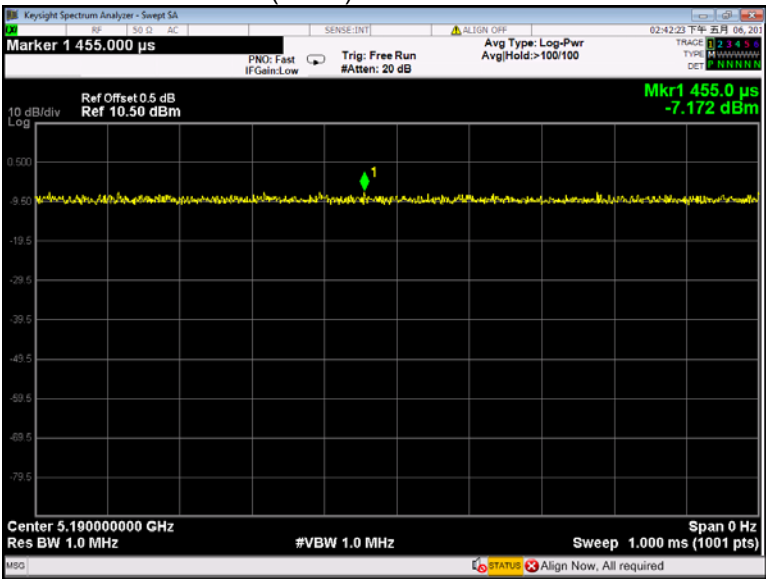

802.11ac(HT20) U-NII-1 Low channel

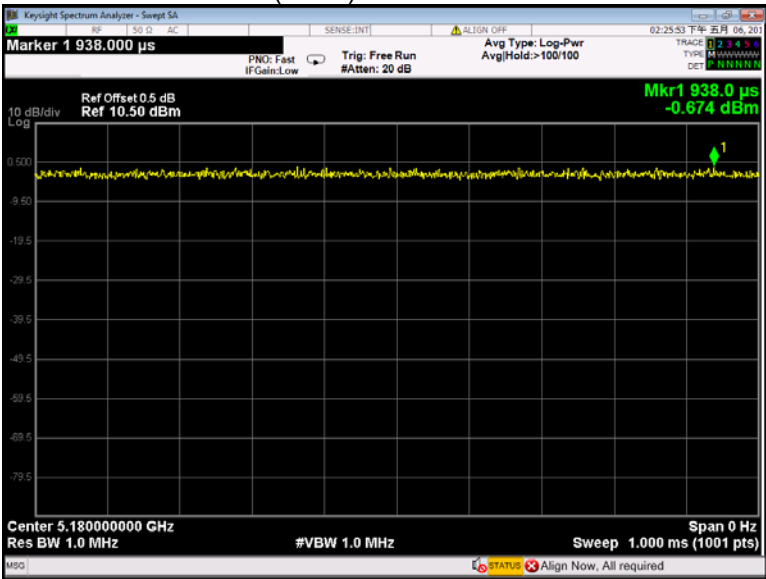

802.11ac(HT40) U-NII-1 Low channel

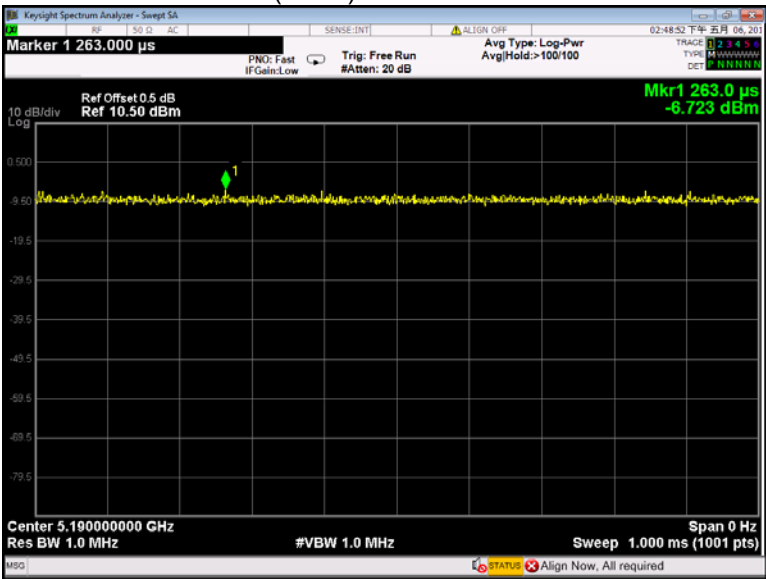

11 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2013
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz. (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
Test Result:	PASS


11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


11.2 Test Result

Test result plots shown as follows:


802.11a U-NII-1 Band edge-left side

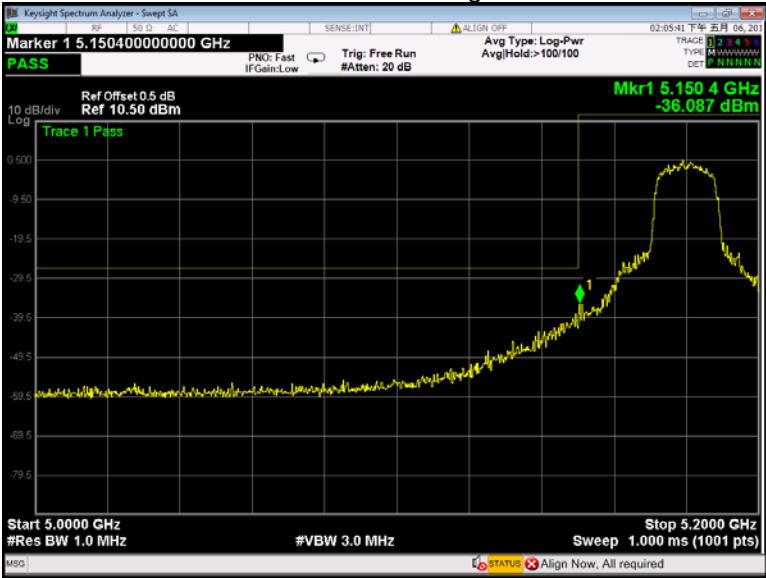


802.11a U-NII-1 Band edge-right side

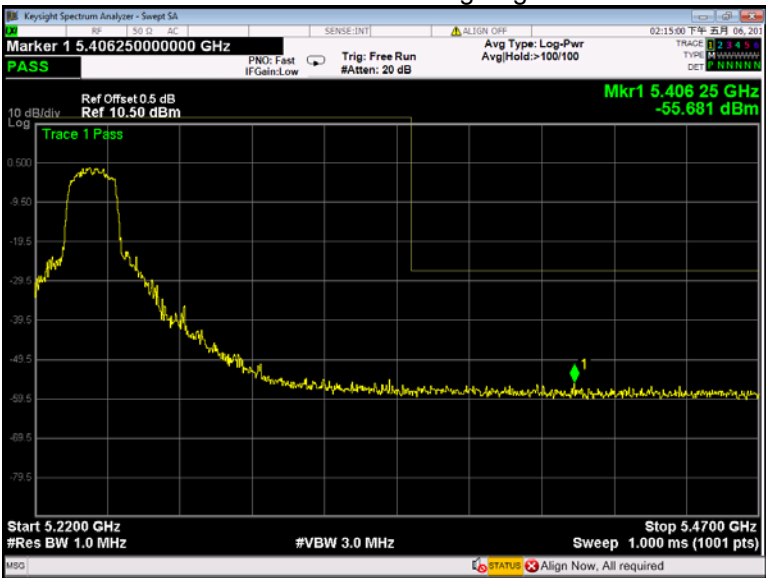


802.11n(HT20) U-NII-1 Band edge-left side

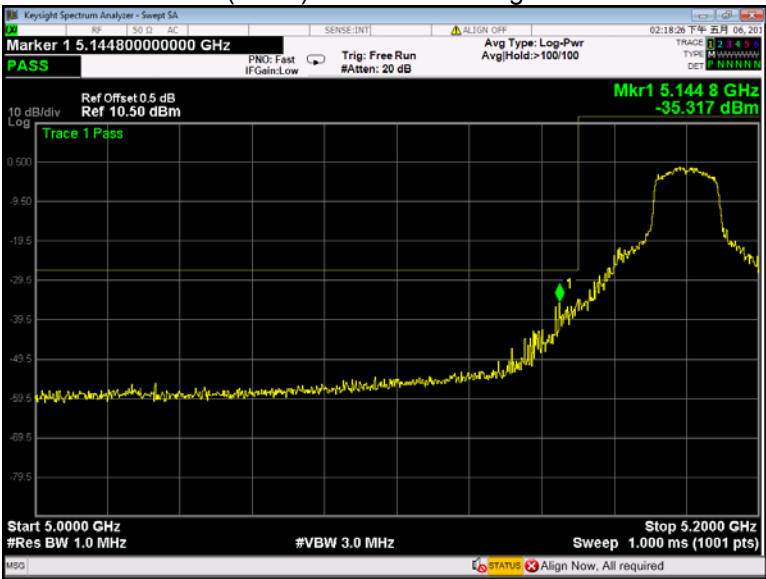

802.11n(HT20) U-NII-1 Band edge-right side

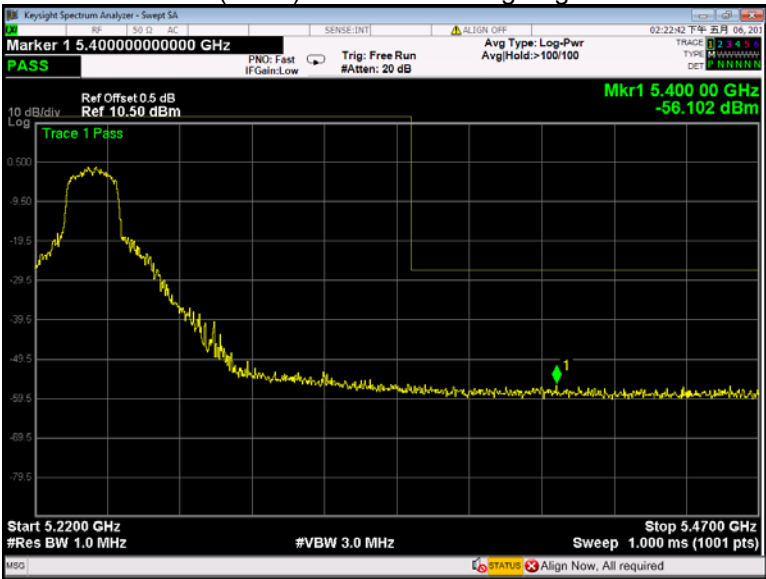


802.11n(HT40) U-NII-1 Band edge-left side

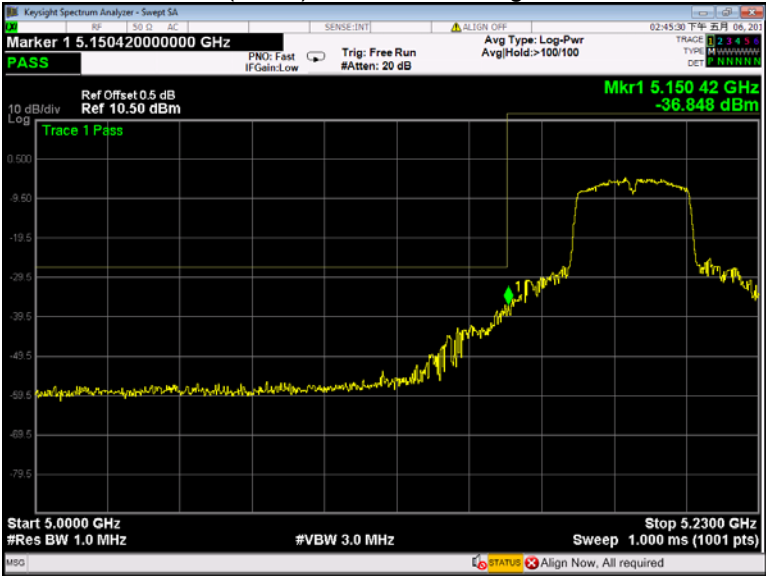


802.11n(HT40) U-NII-1 Band edge-right side




802.11ac(HT20) U-NII-1 Band edge-left side

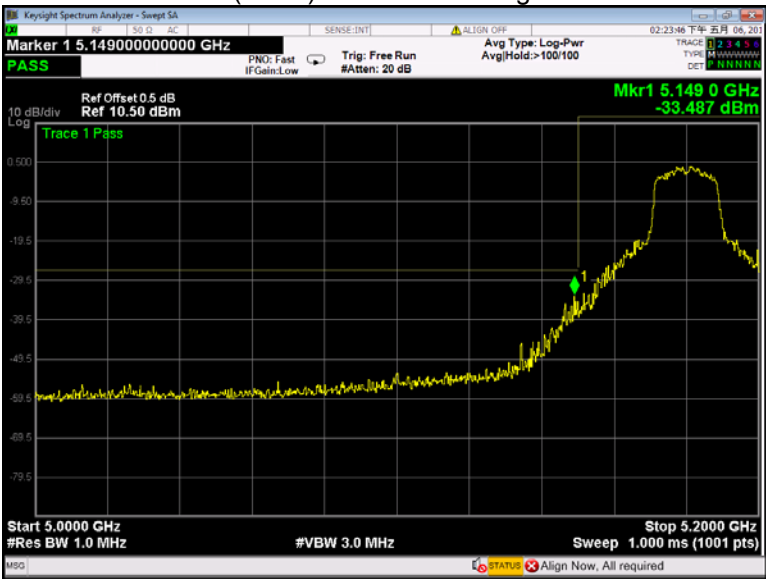

802.11ac(HT20) U-NII-1 Band edge-right side

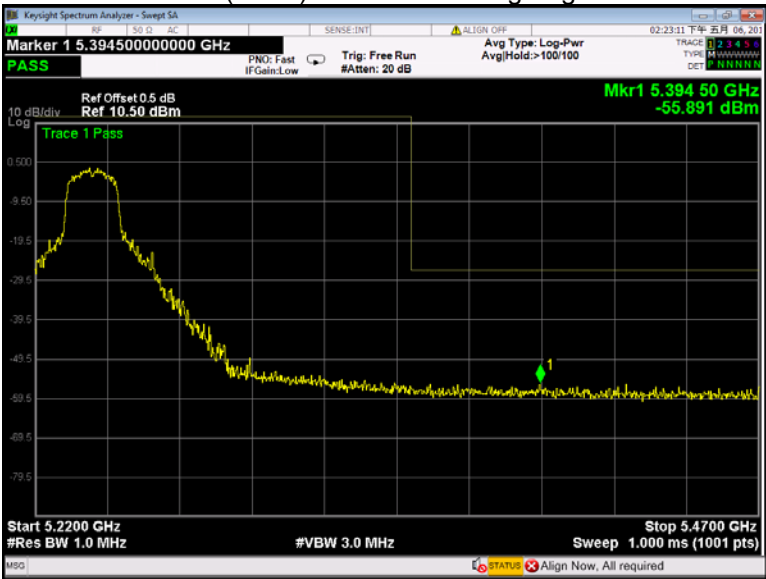

802.11ac(HT40) U-NII-1 Band edge-left side

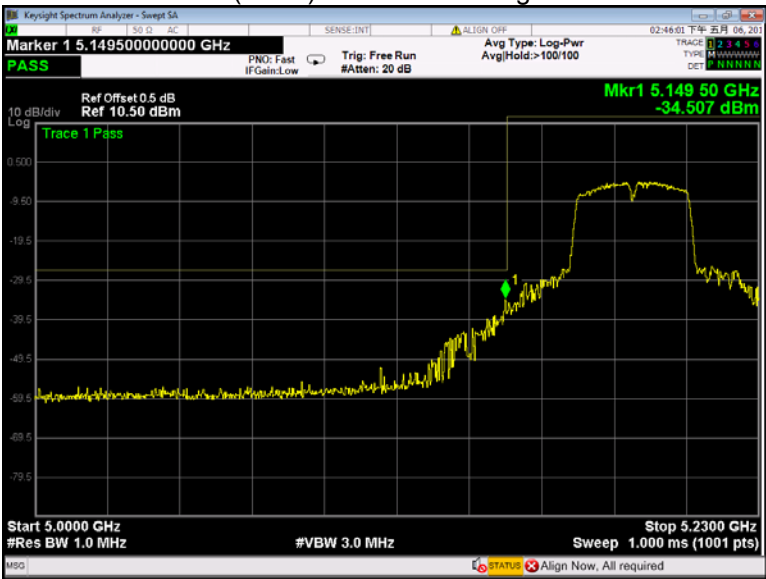

802.11ac(HT40) U-NII-1 Band edge-right side



12 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section D
Test Limit:	No restriction limits
Test Result:	PASS



12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1% to 5% of the OBW, VBW = 3x RBW


12.2 Test Result:

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	20.51	20.66	24.68	16.501	16.481	16.573
	802.11n(HT20)	26.53	27.34	26.43	17.712	17.686	17.699
	802.11n(HT40)	53.87	/	52.28	36.135	/	36.120
	802.11ac(HT20)	25.90	24.99	26.66	17.693	17.731	17.663
	802.11ac(HT40)	53.98	/	55.17	36.188	/	36.183


Test result plots shown as follows:

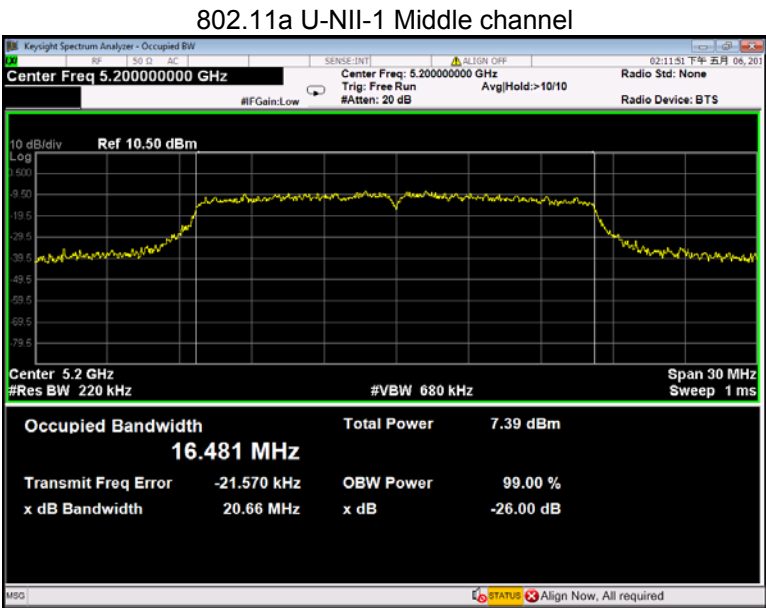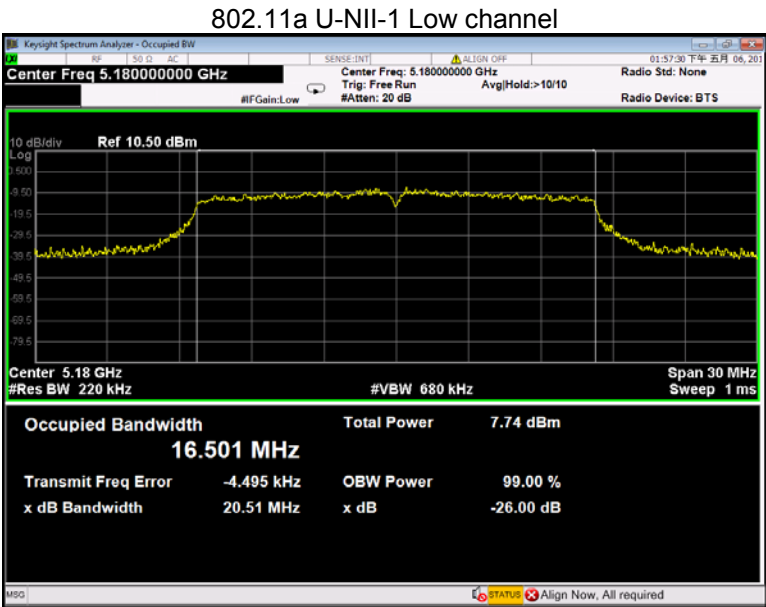


802.11a U-NII-1 High channel

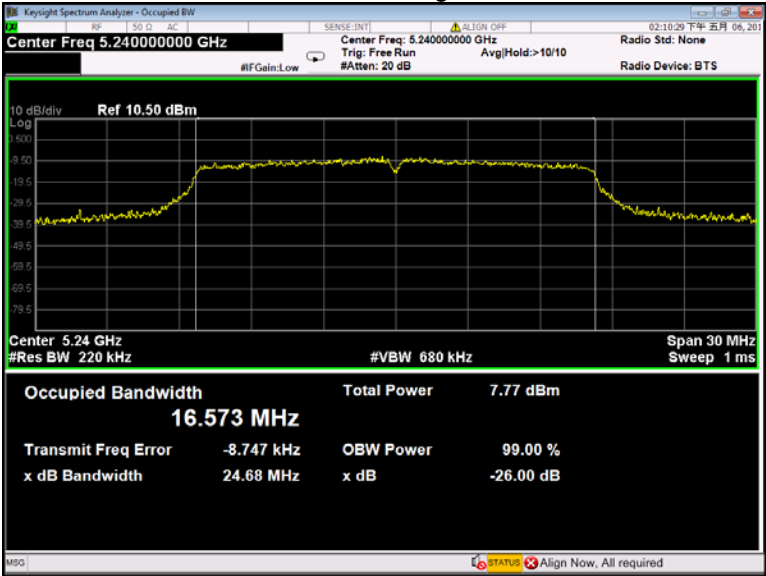


802.11n(HT20) U-NII-1 Low channel

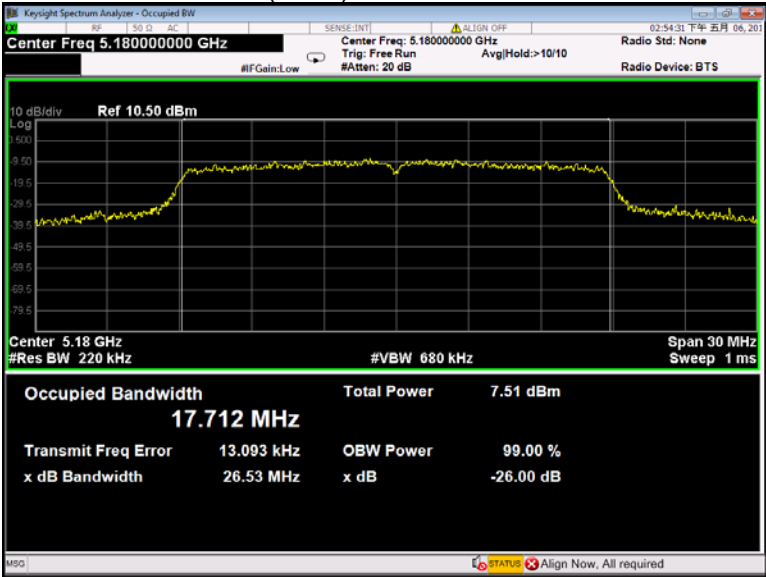


802.11n(HT20) U-NII-1 Middle channel

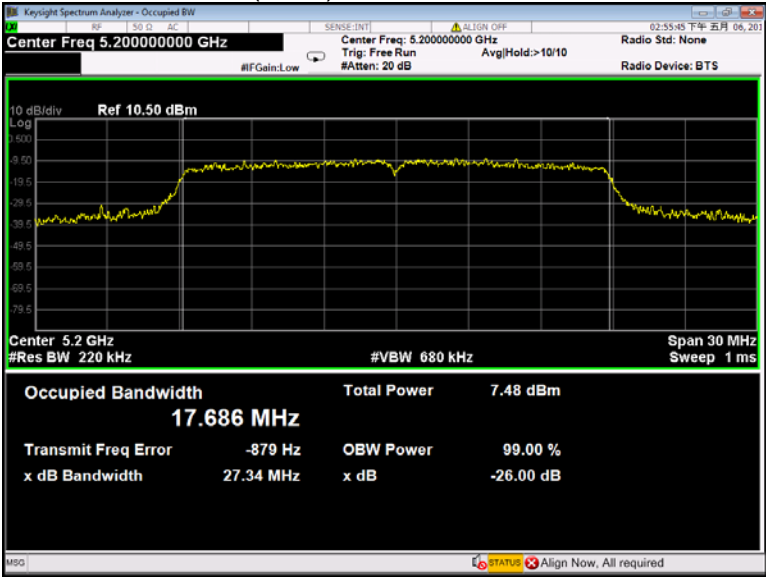


802.11n(HT20) U-NII-1 High channel

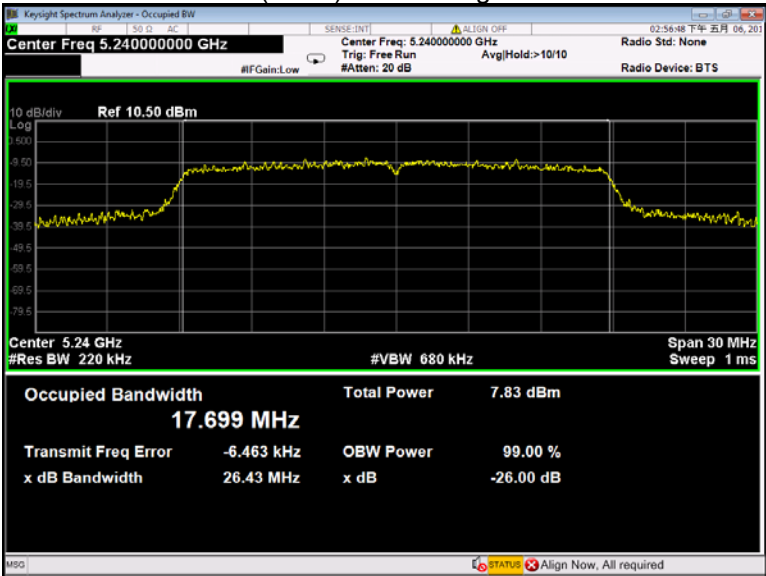


802.11n(HT40) U-NII-1 Low channel

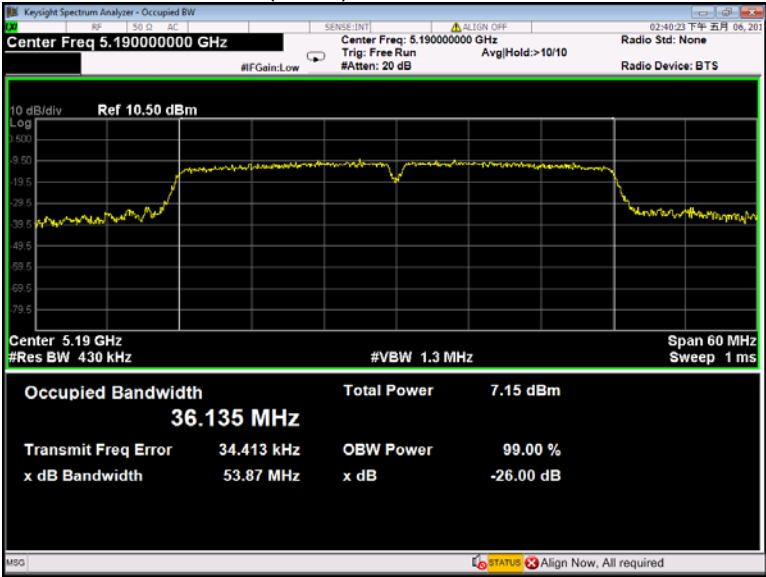


802.11n(HT40) U-NII-1 High channel

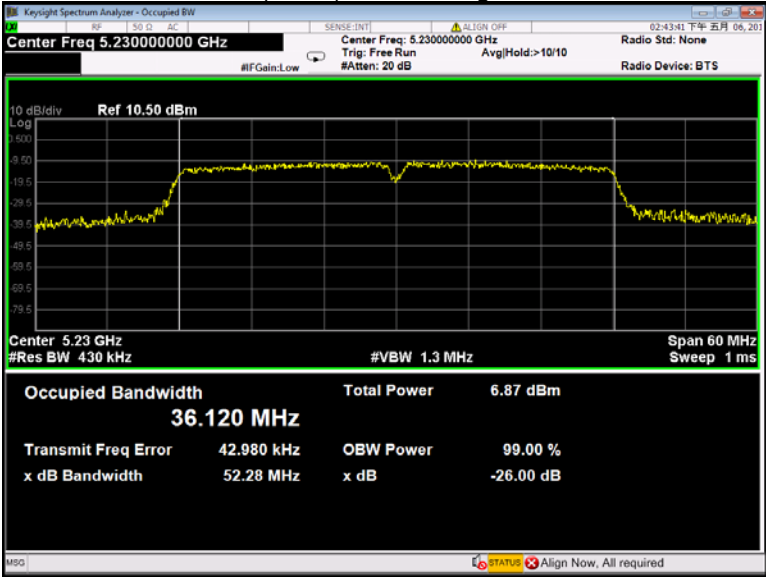


802.11ac(HT20) U-NII-1 Low channel

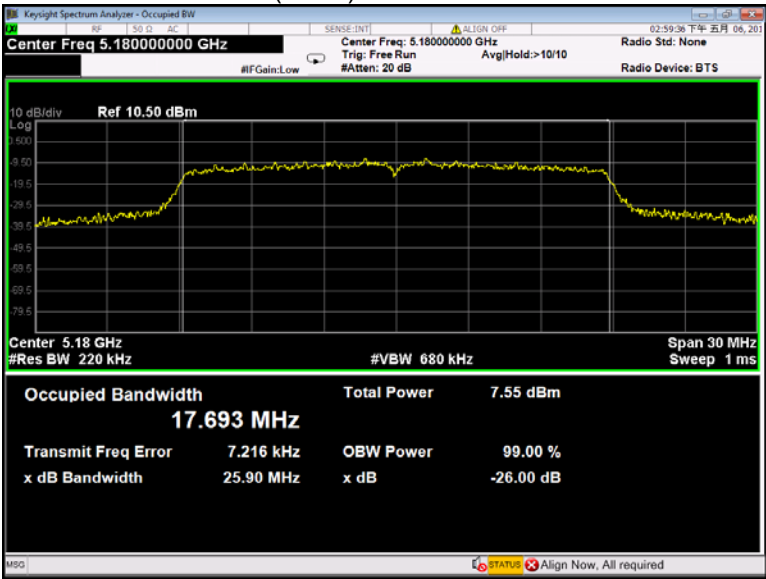


802.11ac(HT20) U-NII-1 Middle channel

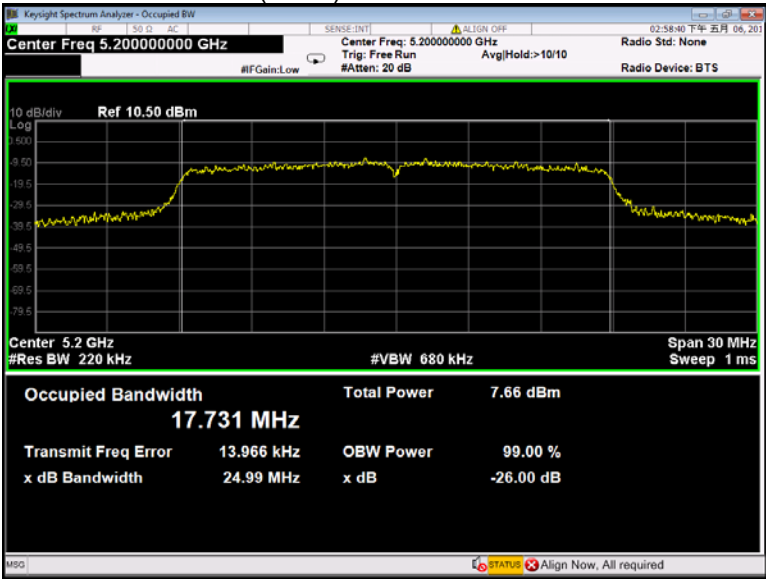


802.11ac(HT20) U-NII-1 High channel

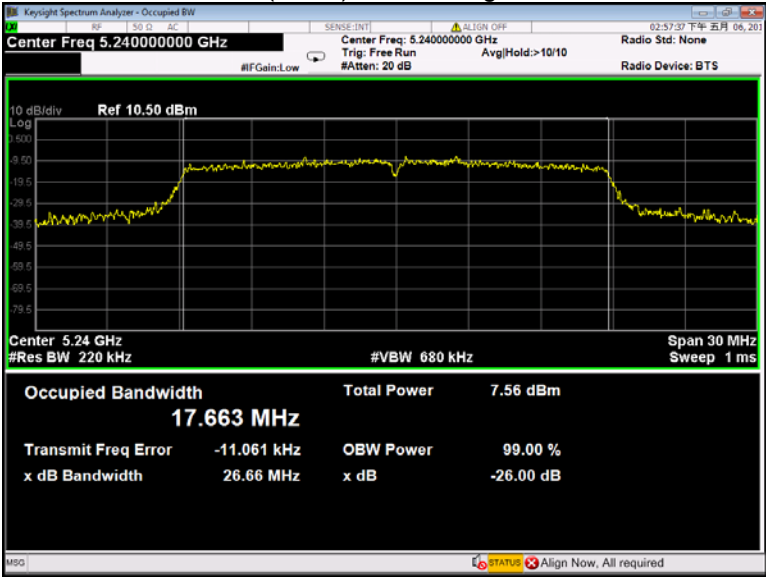

802.11ac(HT40) U-NII-1 Low channel

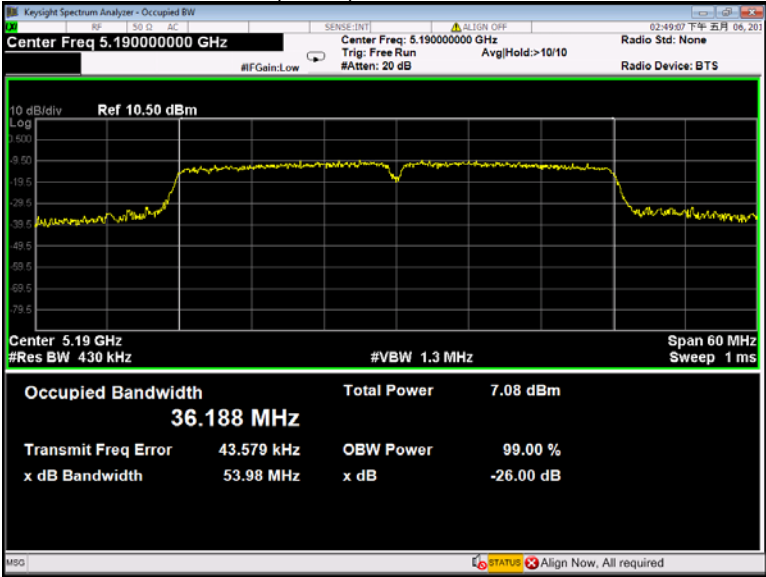

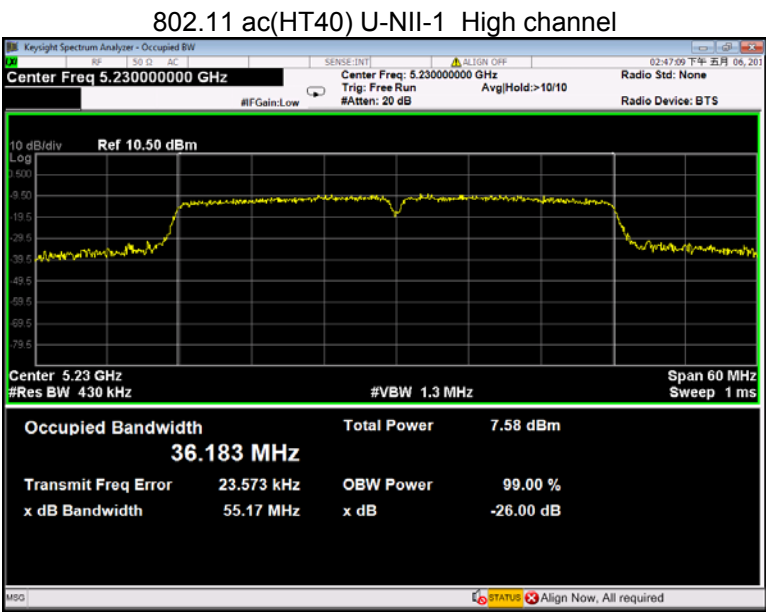

13 Conducted Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section E
Test Limit:	U-NII-1 250mW(24dBm) U-NII-3 1W(30dBm)
Test Result:	PASS Conducted output power= measurement power+10log(1/x)
Remark:	X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


13.2 Test Result :

Band	Operation mode	Conducted Output Power (dBm)		
		Low	Middle	High
U-NII-1	802.11a	6.55	6.62	6.51
	802.11n(HT20)	6.58	6.63	6.74
	802.11n(HT40)	6.43	/	6.58
	802.11ac(HT20)	6.53	6.57	6.78
	802.11ac(HT40)	6.53	/	6.56


* All transmit signals are completely uncorrelated with each other, Directional gain = G_{ANT} which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:


802.11a U-NII-1 Low channel

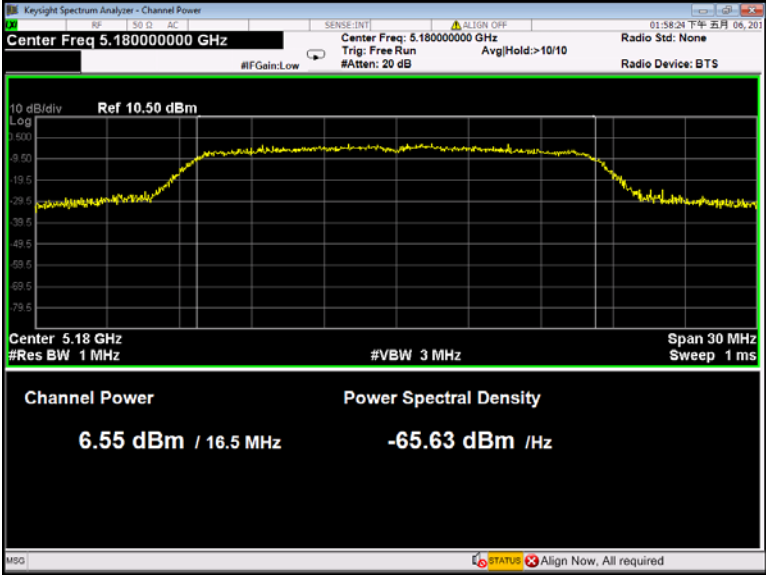


802.11a U-NII-1 Middle channel

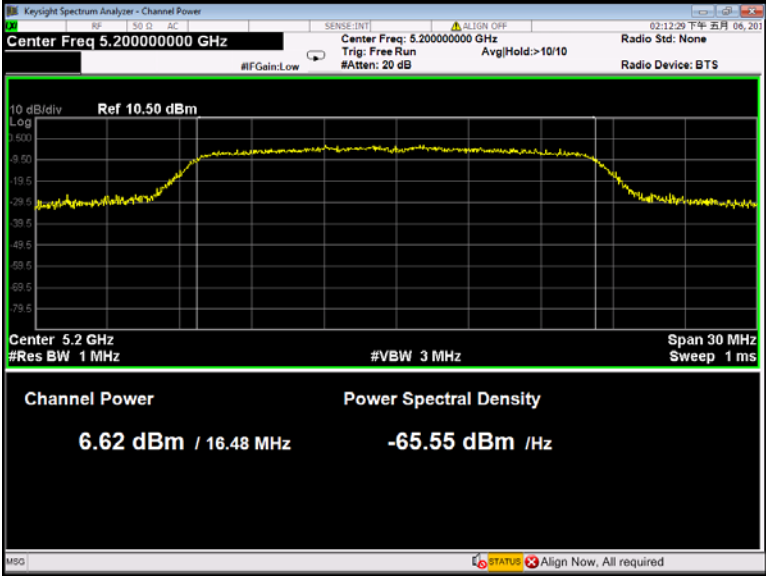


802.11a U-NII-1 High channel

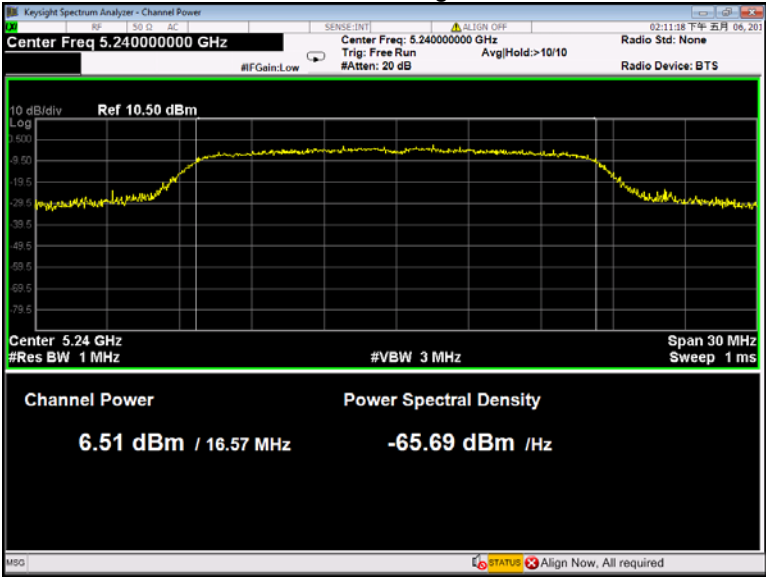


802.11n(HT20) U-NII-1 Low channel

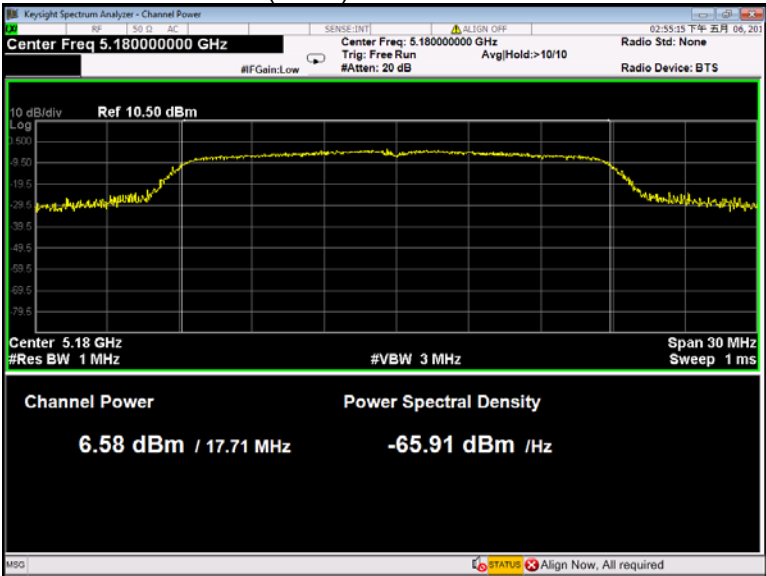


802.11n(HT20) U-NII-1 Middle channel

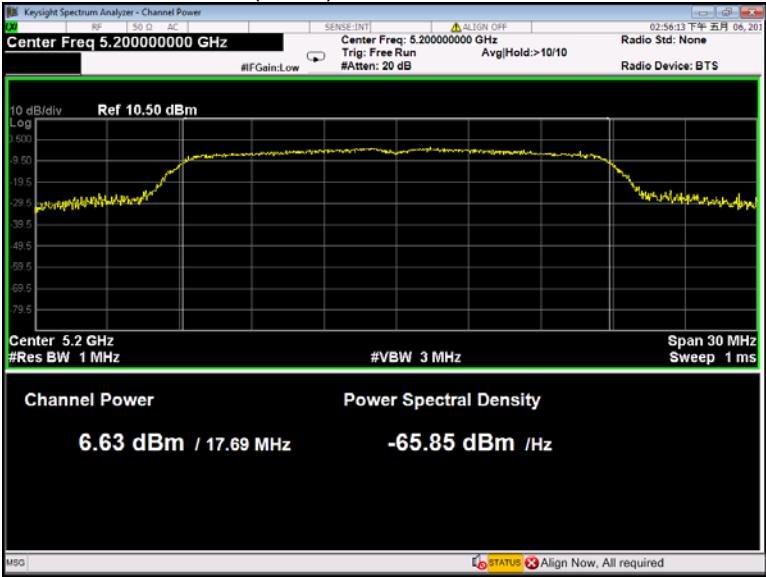


802.11n(HT20) U-NII-1 High channel

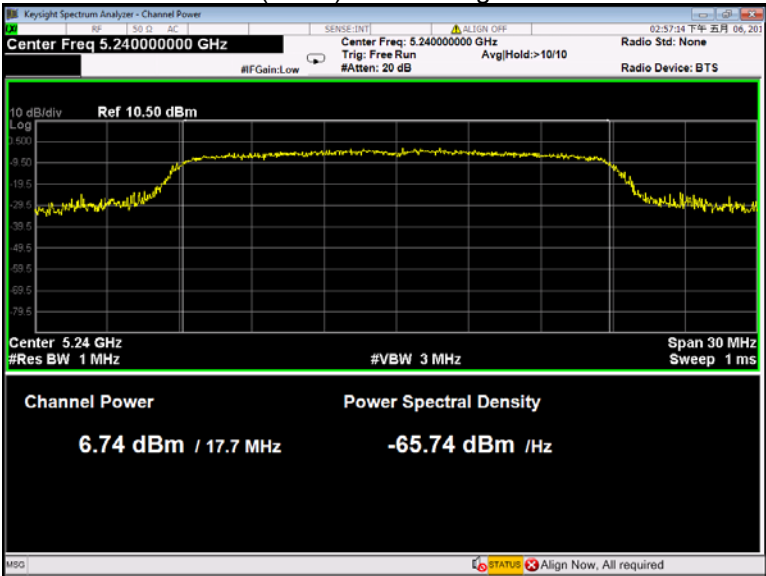


802.11n(HT40) U-NII-1 Low channel

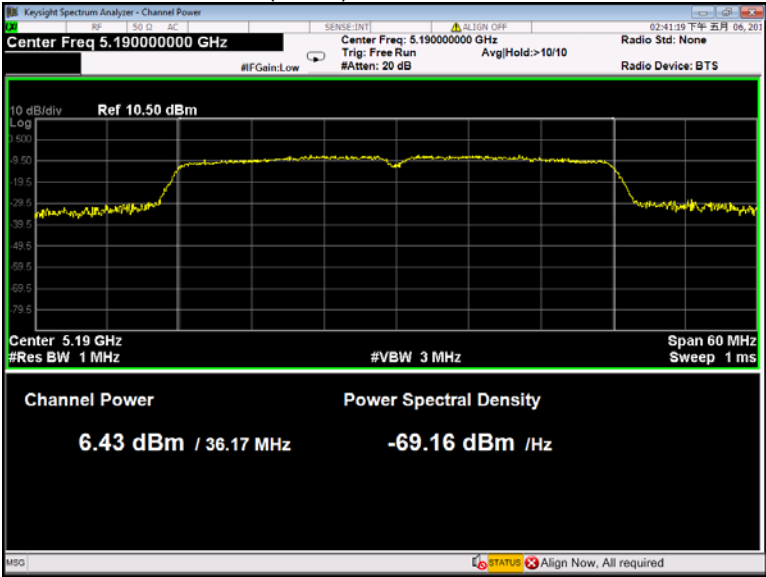


802.11n(HT40) U-NII-1 High channel

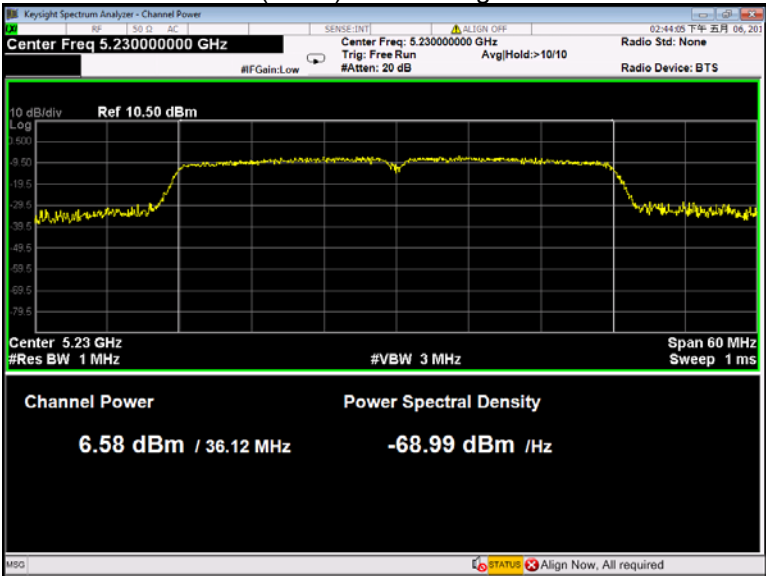


802.11ac(HT20) U-NII-1 Low channel

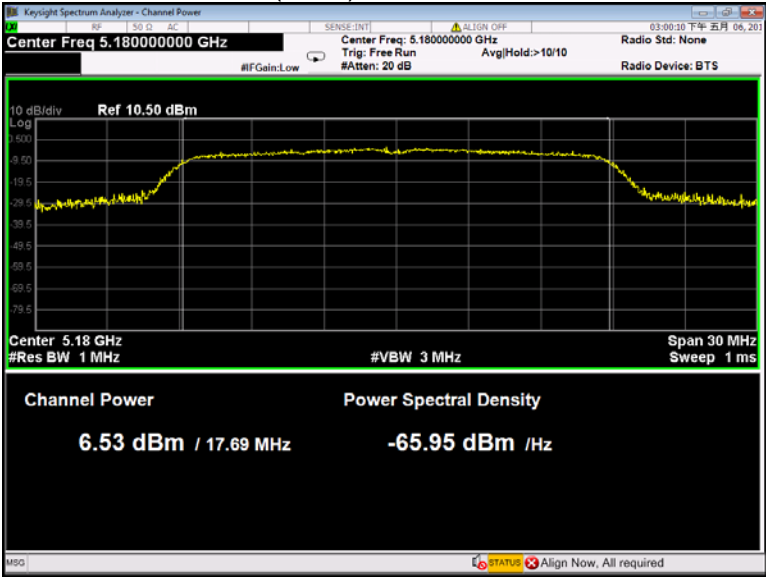


802.11ac(HT20) U-NII-1 Middle channel

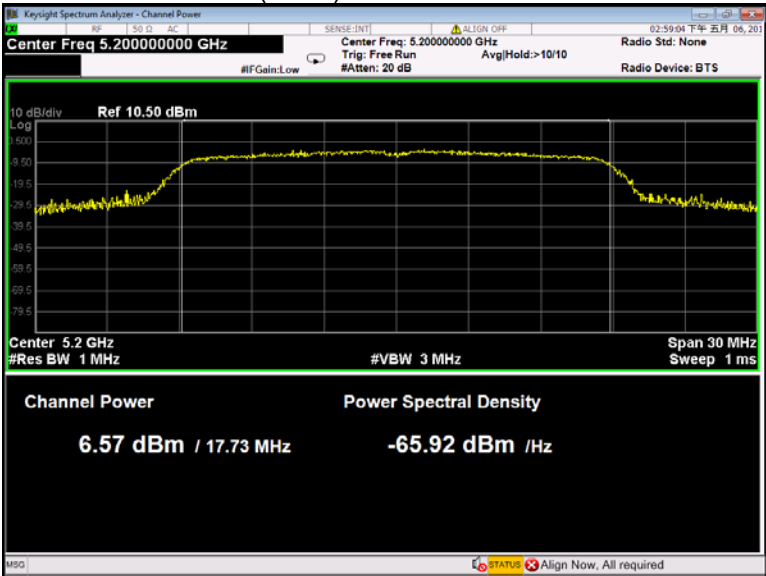


802.11ac(HT20) U-NII-1 High channel

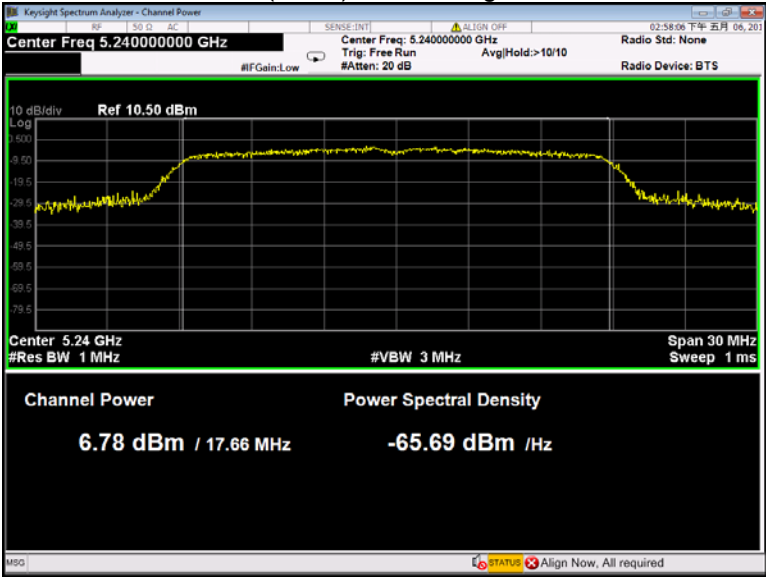

802.11ac(HT40) U-NII-1 Low channel

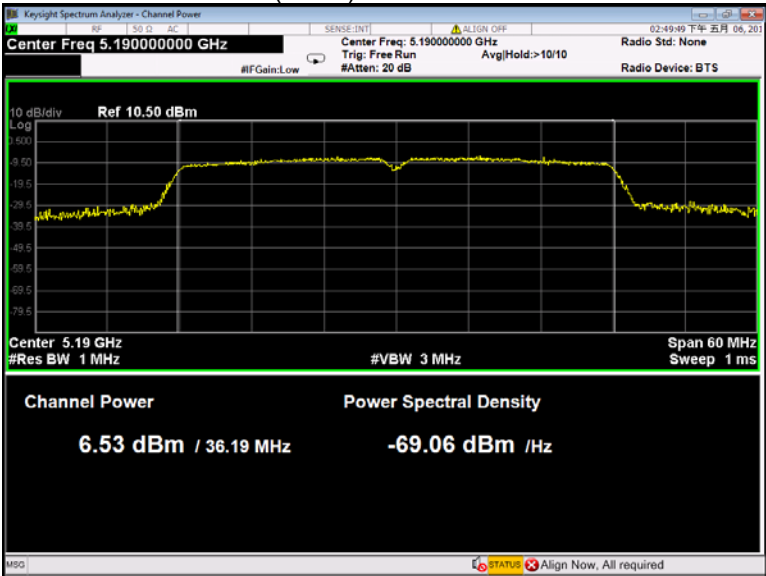

802.11n(HT40) U-NII-1 High channel

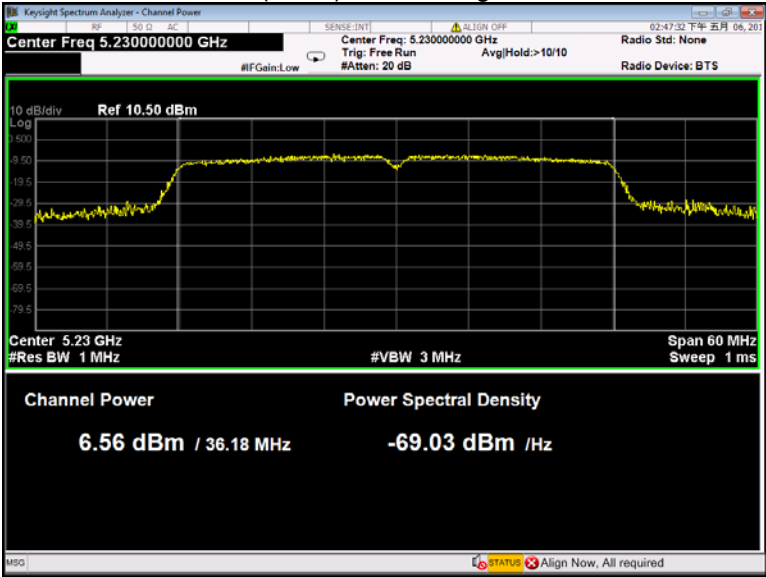

14 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section F
Test Limit:	$\leq 11.00\text{dBm/MHz}$ for Operation in the U-NII-1(5150MHz-5250MHz)of mobile device $\leq 30.00\text{dBm/500KHz}$ for Operation in the U-NII-3(5725MHz- 5850MHz)of device
Test Result:	PASS

14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
U-NII-1
RBW = 1MHz, VBW ≥ 3 * RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
U-NII-3
RBW = 510KHz, VBW ≥ 3 * RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


14.2 Test Result:

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-1	802.11a	-0.236	-0.473	-1.183
	802.11n(HT20)	-0.626	-0.920	-1.192
	802.11n(HT40)	-4.591	/	-3.806
	802.11ac(HT20)	-0.445	-1.088	-1.333
	802.11ac(HT40)	-4.110	/	-3.637
	Limit	$\leq 11.00 \text{ dBm/MHz}$		


* All transmit signals are completely uncorrelated with each other, Directional gain = G_{ANT} which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:


802.11a U-NII-1 Low channel

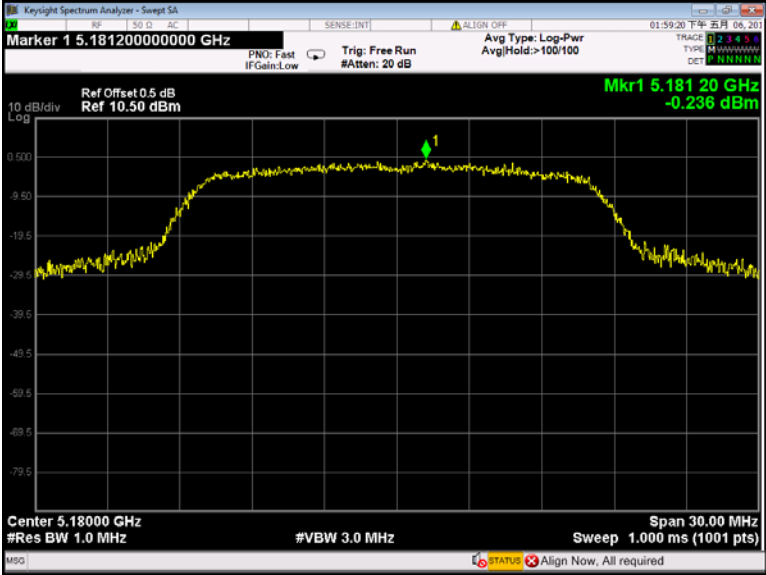


802.11a U-NII-1 Middle channel

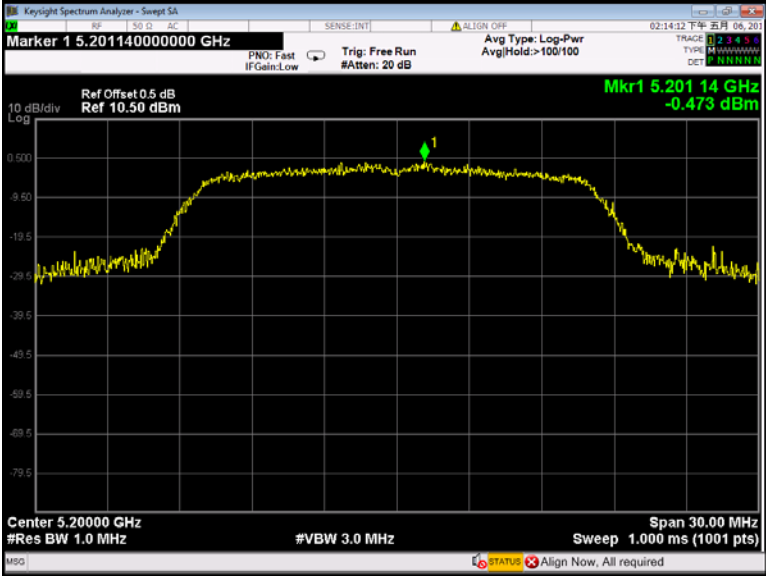


802.11a U-NII-1 High channel

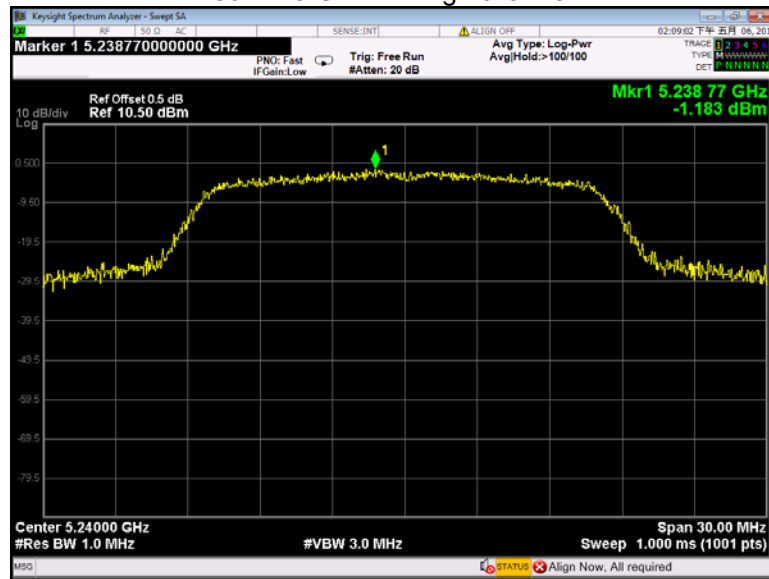


802.11n(HT20) U-NII-1 Low channel

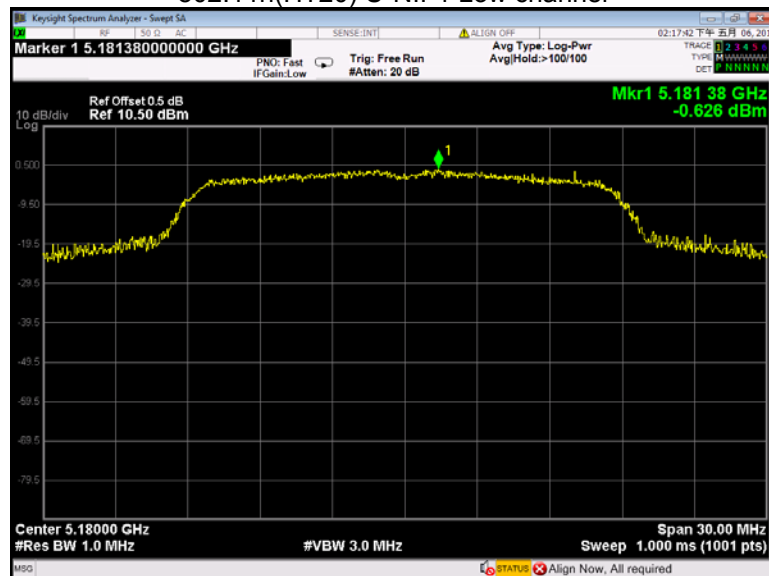


802.11n(HT20) U-NII-1 Middle channel

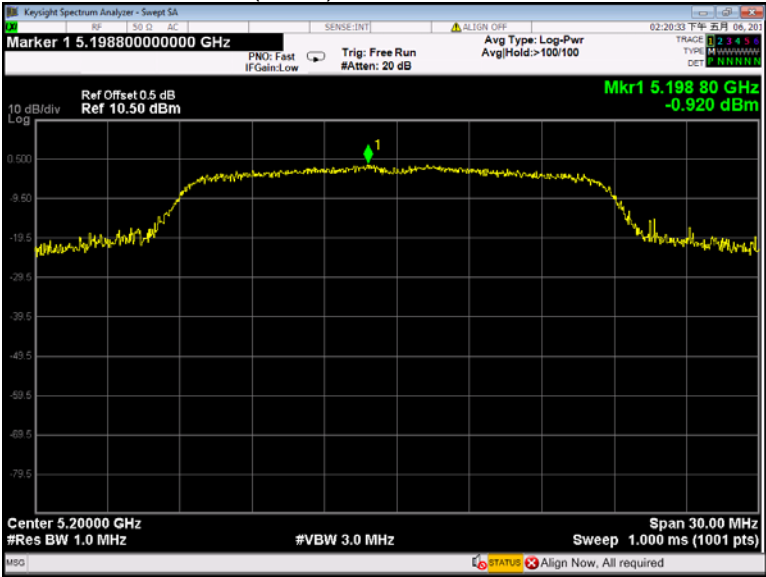


802.11n(HT20) U-NII-1 High channel

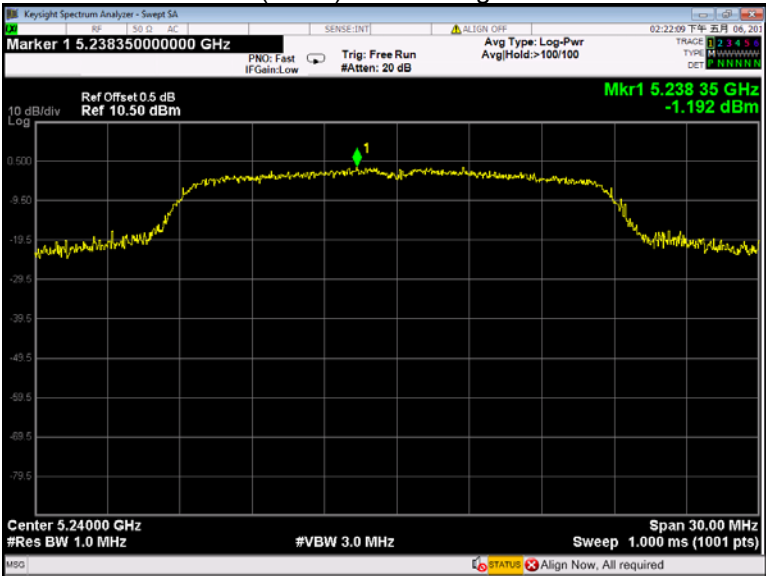


802.11n(HT40) U-NII-1 Low channel

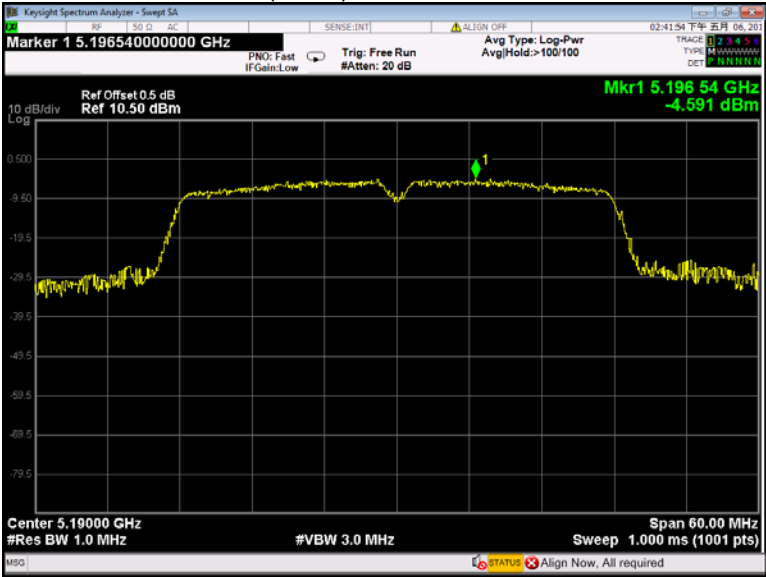


802.11n(HT40) U-NII-1 High channel

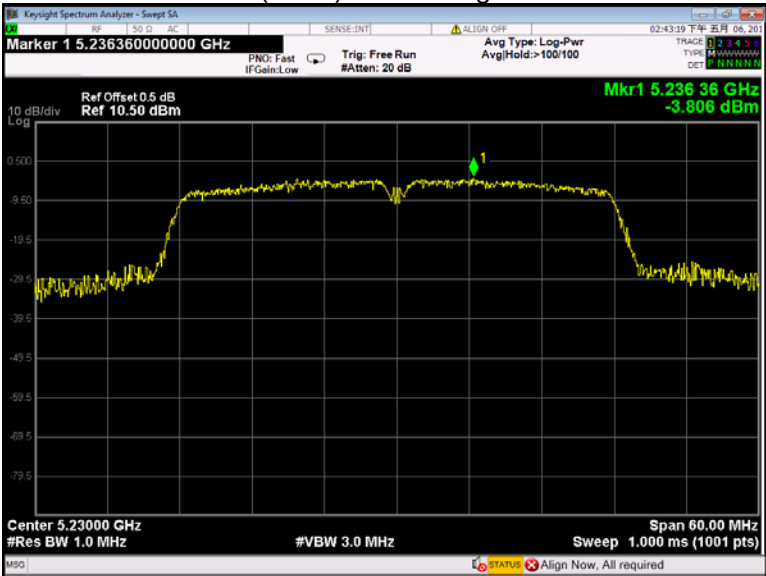


802.11ac(HT20) U-NII-1 Low channel

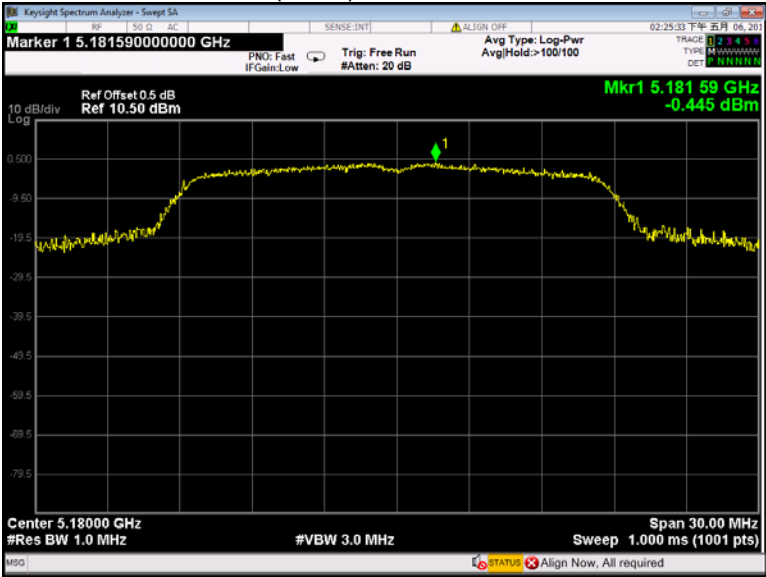


802.11ac(HT20) U-NII-1 Middle channel

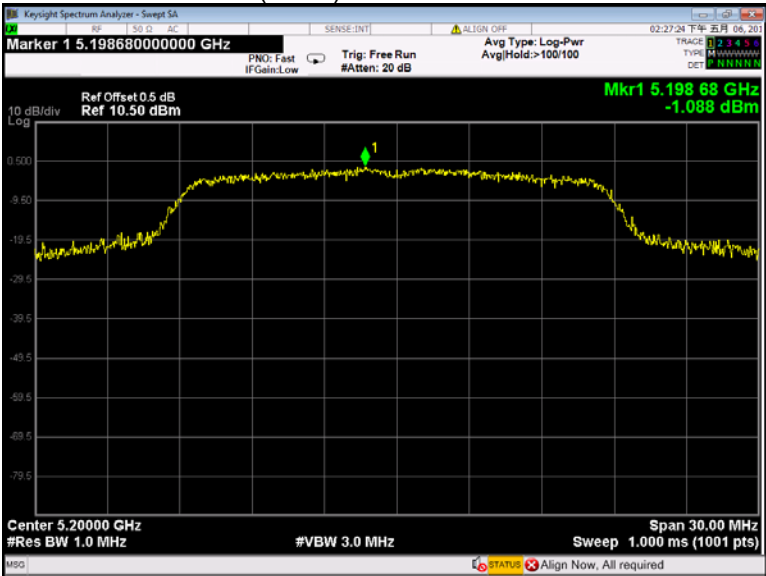


802.11ac(HT20) U-NII-1 High channel

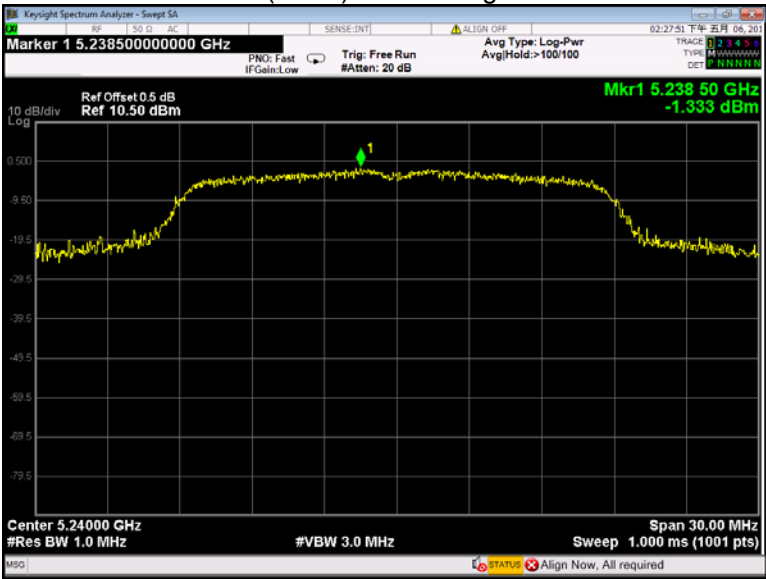

802.11ac(HT40) U-NII-1 Low channel

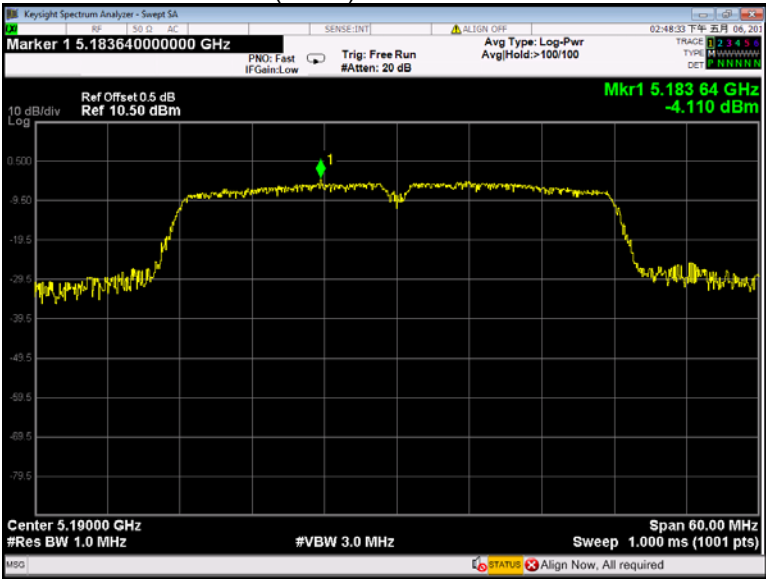

802.11n(HT40) U-NII-1 High channel

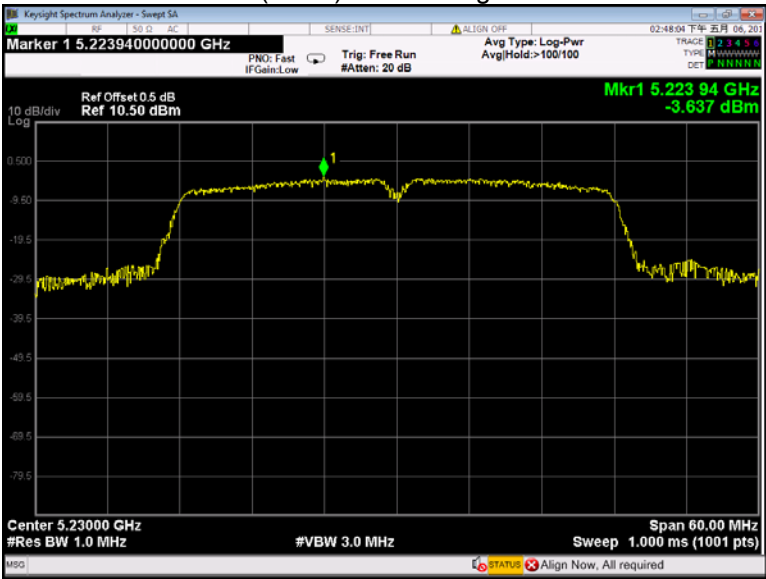

15 Frequency Stability

Test Requirement:	FCC CFR47 Part 15 Section 15.407(g)
Test Method:	ANSI C63.10:2013
Test Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual or 20ppm.
Test Result:	PASS

15.1 Test Procedure:

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
EUT have transmitted absence of unmodulation signal and fixed channelise. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
2. Extreme temperature rule is $-15^{\circ}\text{C} \sim 45^{\circ}\text{C}$.

15.2 Test Result:

U-NII-1 Test Frequency:5180MHz				
Temperature (°C)	Power Supply (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	120	/	/	/
45		1807	2.1558	20
30		1800	2.1513	20
20		1806	2.1584	20
10		1800	2.1516	20
0		1803	2.1559	20
-10		1800	2.1516	20
-15		1809	2.1625	20
-30		/	/	/
20	108	1810	2.1641	20
20	132	1798	2.1492	20

16 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

This device uses of two antennas that uses a specified coupling to the intentional radiator. Antenna connectors complied with the requirement.

17 RF Exposure

Remark: refer to SAR test report: WTS19S04025243W-1.

18 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS19S04025243W_Photo.

=====End of Report=====