

OPERATION MANUAL OF TPMS SENSOR

MODEL: TPMS-CG

Thank you for choosing our TPMS. This guide instructs the technician how to properly mount and dismount a BHsens TPMS clamp-in sensor.

Introduction of TPMS-CG

TPMS-CG is the transmitting module in TPMS. Its working frequency is 433.92MHz; $-20\text{dBm} \geq \text{transmitting power} \geq -60\text{dBm}$. Power supply: Battery. The communication mode between TPMS-CG and receiving module is RF wireless communication. The module detect pressure and temperature inner the tire periodically and send these information via RF output circuit to the receiving module. One can manually detect data inner tire by LF wake-up tools. Install it on the rim together with cycle valve.


PART ONE MOUNTING AND DISMOUNTING OF TRANSMITTER

1. Mounting of Transmitter


1.1 Identify Transmitter

Check whether the prepared sensor is the same with the image below.


Note: Only plastic or aluminum caps, aluminum valves and nickel plated valve cores can be used when replaced.

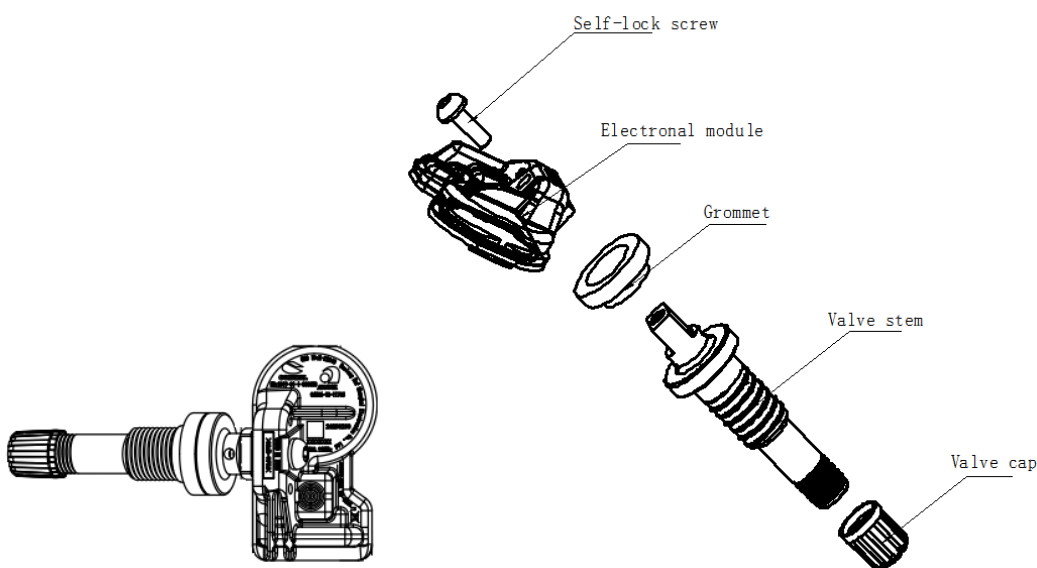


1.2 Before the transmitter is installed, the rim around the hole must be cleaned with a cloth.

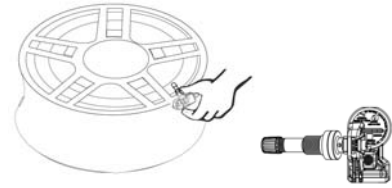


1.3 Take off the nut^⑤, insert the valve stem through the rim hole from inside.

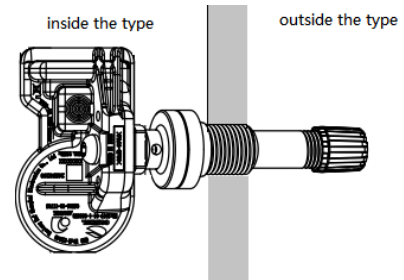


1.4 Place nut on the valve stem, and tighten with 5 Nm (44 inch pounds) torque.



1.5 Lock the rim on the tyre changer. (If the mounting head of the tyre changer is positioned at 12 o'clock, then the valve should be at the 7 o'clock position.) Apply lubricant on both the tyre bead and rim. Mount the lower tyre bead on the rim. Ensure that the tyre bead does not touch the electronic module during mounting.

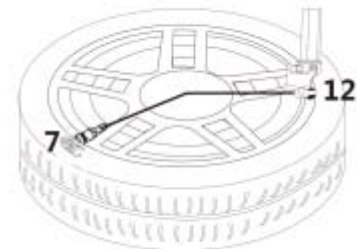

1.6 Mount the upper tyre bead the same way. (If the mounting head of the tyre changer is positioned at 12 o'clock, then the valve should be at the 5 o'clock position.) Inflate the tyre to nominal pressure.

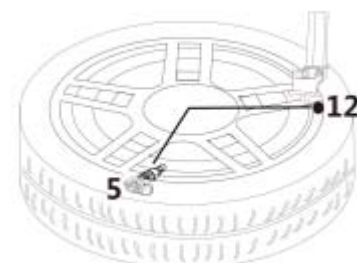

1.7 Apply soapsuds on the valve tip. If no leakage is found, put on the valve cap. If unsuccessful, try again.




1.8 Dynamically balance the wheel before it is placed back on the vehicle.




2. Dismounting of Transmitter


2.1 Deflate the tyre and remove the wheel weights from the rim. Push the tyre bead away from the rim. Make sure to always set the bead breaker at least 90 degrees from the valve stem to avoid damaging the electronic module.

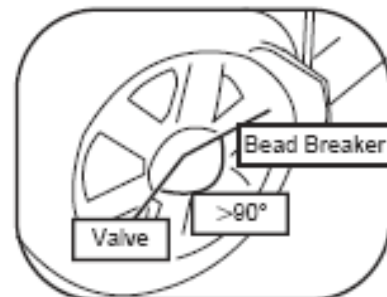

2.2 Firmly fix the wheel on the turntable clamps. (If the mounting head of the tyre changer is positioned at 12 o'clock, then the valves stem should be at the 11 o'clock position.) Apply lubricant to both tyre bead and rim, and then remove the upper tyre bead.

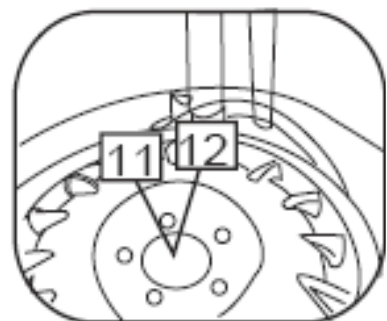

2.3 Use the same procedure to dismount the lower tyre bead. (If the mounting head of the tyre changer is at the 12 o'clock position, then the valves stem should also be at the 12 o'clock position.)

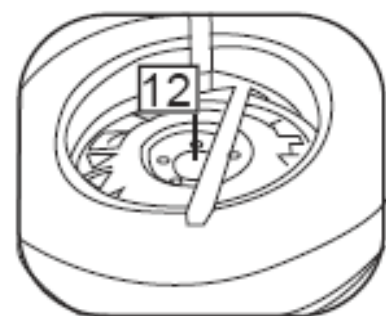

2.4 Final inspection: Visually inspect the rim, valve stem and electronic module to ensure no damage has occurred.

FCC Regulatory Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Baolong Huf Shanghai Electronics Co., Ltd. is not liable for any direct, consequential, indirect or punitive damages of any kind.

NOTE: Baolong Huf Shanghai Electronics Co., Ltd. reserves the right to change the contents of this manual at any time without notice. The information contained in this manual is proprietary and must not be reproduced without prior written consent from Baolong Huf Shanghai Electronics Co., Ltd.