



TEST REPORT NUMBER: (8519)126-0269

TEST REPORT

Applicant:	TOY PLUS (FAR EAST) LTD	Fax:	--
		E-mail:	henry.leung@playmindLtd.com
Address :	UNIT 09, 09/F HOUSTON CTR, 63 MODY RD., TSIM SHA TSUI EAST KLN., HONG KONG		
Test Date :	08 May 2019 ~ 18 Jun. 2019		

Manufacturer or Supplier :	Shantou Chenghai Huabo Smart Living Technology Co., Ltd
Address :	Chengjiang Road, Dudou Industrial Area, Shanghua Town, Chenghai District, Shantou City, Guangdong, China
Sample Description:	XPIDER 2.0 PRO RC 2.4GHz
Model number:	21019
Additional Model :	--
Rated Voltage:	3V d.c. ("AAA" Size *2)
FCC ID :	2ATGT-21019
The submitted sample of the above equipment has been tested according to following standard(s)	
FCC Rules and Regulations Part 15 Subpart C 15.249, ANSI C63.10:2013	
CONCLUSION: The submitted sample was found to COMPLY with the test requirement	

Assistant Manager

Name: Nick Lung
Date: June 27, 2019



TEST REPORT NUMBER: (8519)126-0269

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
20dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.249 ANSI C63.10:2013	PASS
Band Edge Compliance	FCC Part 15: 15.249 ANSI C63.10:2013	PASS
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2013	N/A
Antenna requirement	FCC Part 15: 15.203	PASS
N/A is an abbreviation for Not Applicable.		

TEST REPORT NUMBER: (8519)126-0269

2. General test information

2.1. Description of EUT

Power supply	: DC 3V from batteries (2*1.5V "AAA" batteries)
Operation frequency	: 2405MHz-2475MHz
Modulation	: GFSK
Antenna Type	: Internal wire antenna, maximum PK gain: 0dBi

EUT channels and frequencies list:

Channel	Frequency	Channel	Frequency	Channel	Frequency
5	2405MHz	29	2429MHz	53	2453MHz
6	2406MHz	30	2430MHz	54	2454MHz
7	2407MHz	31	2431MHz	55	2455MHz
8	2408MHz	32	2432MHz	56	2456MHz
9	2409MHz	33	2433MHz	57	2457MHz
10	2410MHz	34	2434MHz	58	2458MHz
11	2411MHz	35	2435MHz	59	2459MHz
12	2412MHz	36	2436MHz	60	2460MHz
13	2413MHz	37	2437MHz	61	2461MHz
14	2414MHz	38	2438MHz	62	2462MHz
15	2415MHz	39	2439MHz	63	2463MHz
16	2416MHz	40	2440MHz	64	2464MHz
17	2417MHz	41	2441MHz	65	2465MHz
18	2418MHz	42	2442MHz	66	2466MHz
19	2419MHz	43	2443MHz	67	2467MHz
20	2420MHz	44	2444MHz	68	2468MHz
21	2421MHz	45	2445MHz	69	2469MHz
22	2422MHz	46	2446MHz	70	2470MHz
23	2423MHz	47	2447MHz	71	2471MHz
24	2424MHz	48	2448MHz	72	2472MHz
25	2425MHz	49	2449MHz	73	2473MHz
26	2426MHz	50	2450MHz	74	2474MHz
27	2427MHz	51	2451MHz	75	2475MHz
28	2428MHz	52	2452MHz		

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

TEST REPORT NUMBER: (8519)126-0269

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test

Tx Mode:



For Tx Mode, A special test firmware was installed in EUT and which can exercise the EUT work in continues RF test mode at specified test channel as below:

Note: New battery is used during all test

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK Tx mode	Low	2405
	Middle	2445
	High	2475

2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.6. Deviations of test standard

No Deviation.



TEST REPORT NUMBER: (8519)126-0269

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

FCC Designation Number: CN1182; FCC Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

Result reviewed by Centre of Testing Service (Ningbo) Co, Ltd Guangzhou Branch - a Bureau Veritas Company

Address: Building A, No.65 Zhuji Highway, Jishancun, Tianhe District, Guangzhou, China

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power(Conducted)(Spectrum analyzer)	0.86dB ($10\text{MHz} \leq f < 3.6\text{GHz}$);
	1.38dB ($3.6\text{GHz} \leq f < 8\text{GHz}$)
Peak Output Power(Conducted)(Power Sensor)	0.74dB
Power Spectral Density	0.74dB ($10\text{MHz} \leq f < 3.6\text{GHz}$);
	1.38dB ($3.6\text{GHz} \leq f < 8\text{GHz}$)
Conducted spurious emissions	0.86dB ($10\text{MHz} \leq f < 3.6\text{GHz}$);
	1.40dB ($3.6\text{GHz} \leq f < 8\text{GHz}$)
	1.66dB ($8\text{GHz} \leq f < 22\text{GHz}$)
Uncertainty for radio frequency (RBW<20kHz)	3×10^{-8}
Temperature	0.4°C
Humidity	2%
Uncertainty for Radiation Emission test (30MHz-1GHz)	4.70dB (Antenna Polarize: V)
	4.84dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz-18GHz)	4.10dB (1-6GHz)
	4.40dB (6GHz-18Gz)
Uncertainty for Power line conduction emission test	3.32dB (150kHz-30MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

TEST REPORT NUMBER: (8519)126-0269


3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (Tonscend RF Measurement System)					
Spectrum analyzer	R&S	FSU26	200071	Oct. 12, 2018	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 29, 2018	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Oct. 12, 2018	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 29, 2018	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Oct. 21, 2018	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Oct. 23, 2018	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Aug. 18, 2018	1 Year
Attenuator	Mini-Circuits	BW-S10W2	101109	Aug. 18, 2018	1 Year
RF Cable	Micable	C10-01-01-1	100309	Oct. 21, 2018	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Oct. 21, 2018	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
Radiated Emission Test Chamber 1#					
EMI Test Receiver	R&S	ESU8	100316	Oct. 12, 2018	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 29, 2018	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 09, 2018	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Oct. 20, 2018	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 16, 2018	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Oct. 25, 2018	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Oct. 12, 2018	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	101303	Oct. 12, 2018	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Oct. 21, 2018	1 Year
RF Cable	N/A	SMAJ-SMA J-1M+ 11M	17070133+17070131	Nov. 08, 2018	1 Year
MI Cable	HUBSER	C10-01-01-1 M	1091629	Oct. 21, 2018	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

TEST REPORT NUMBER: (8519)126-0269

4. 20dB Bandwidth

4.1. Block diagram of test setup

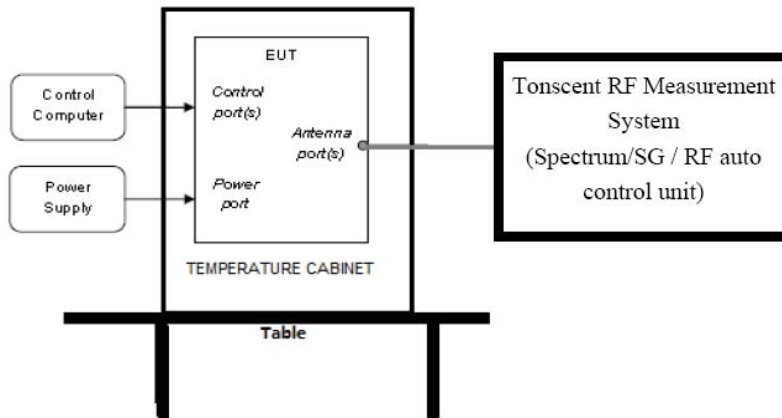

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:

RBW:	30kHz
VBW:	100kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, measure the 20dB bandwidth of signal.


4.4. Test Result

Mode	Freq (MHz)	20dB bandwidth Result (MHz)	Conclusion
GFSK	2405	1.202	PASS
	2445	1.216	PASS
	2475	1.179	PASS

TEST REPORT NUMBER: (8519)126-0269

4.5. Original test data

20dB Bandwidth:

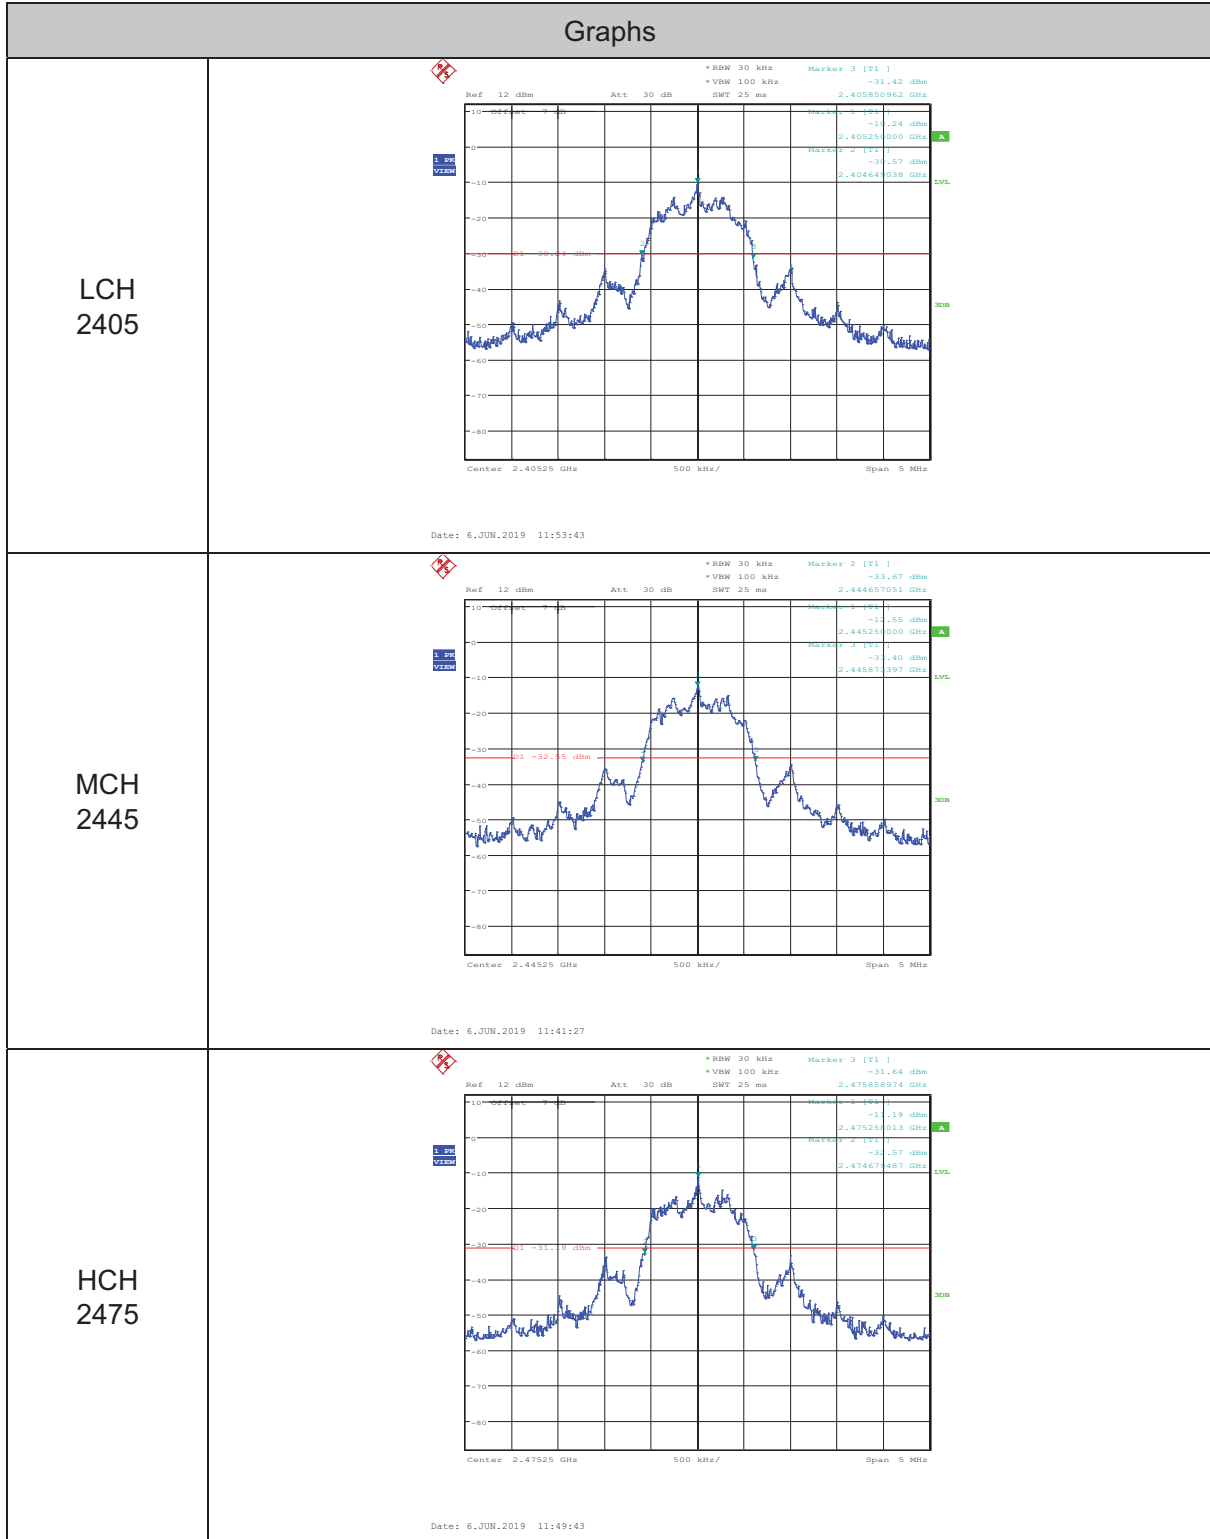


TEST REPORT NUMBER: (8519)126-0269


5. Radiated emission

5.1. Block diagram of test setup

In 3m Anechoic Chamber Test Setup Diagram for 9kHz-30MHz

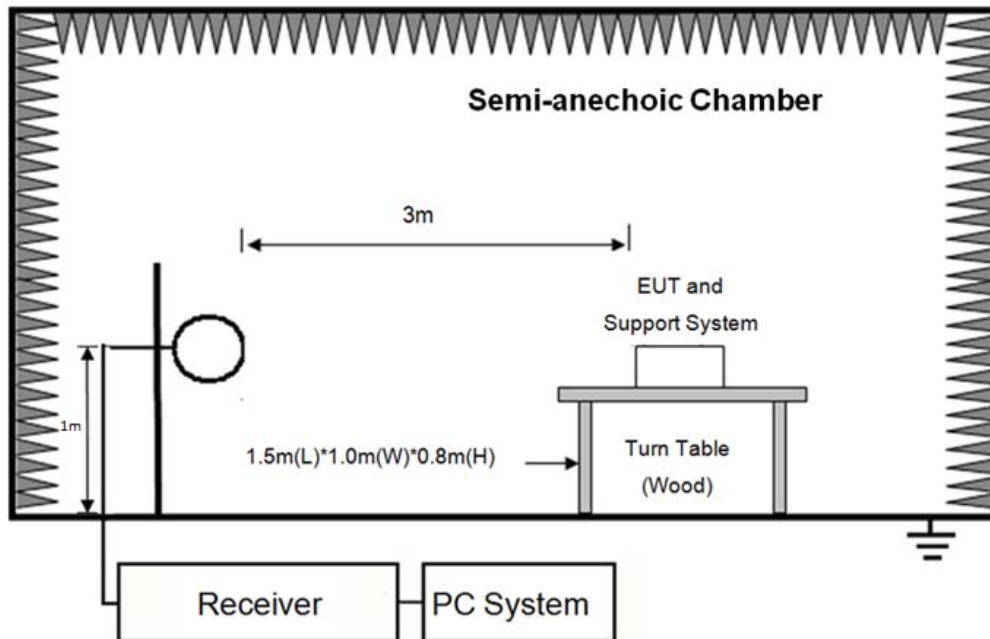


In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

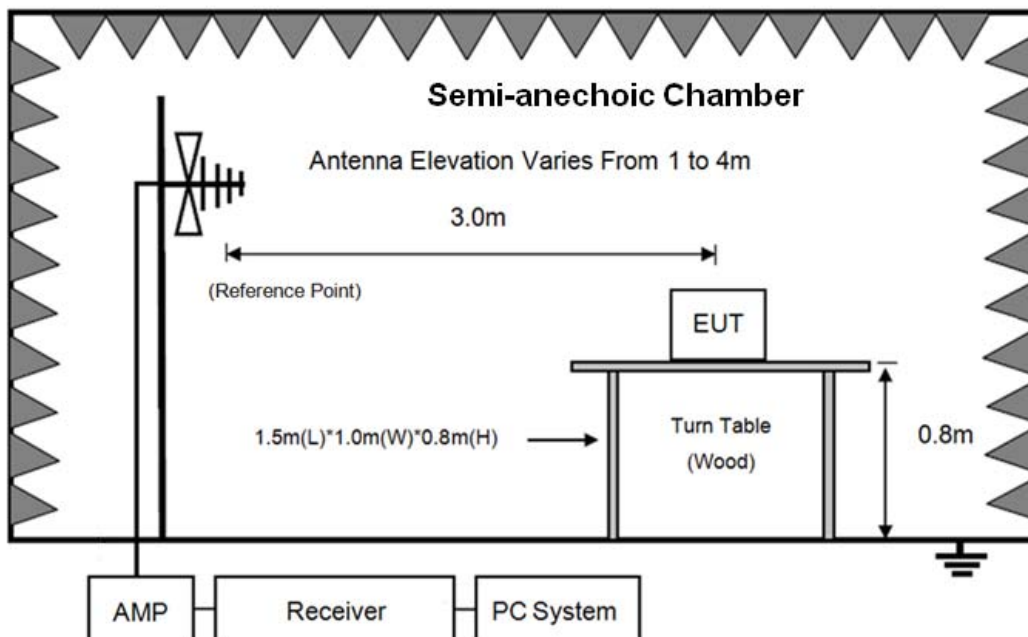

TEST REPORT NUMBER: (8519)126-0269

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

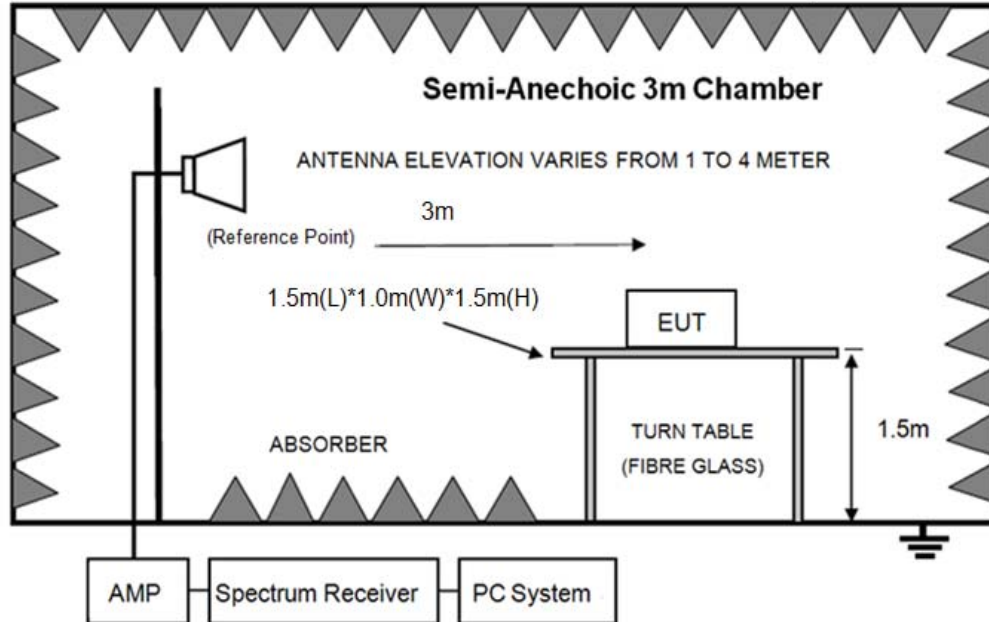

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

5.2. Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Field Strength of Fundamental emission for 2.4GHz-2.4835GHz	3	94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)	
Field Strength of Harmonics	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark:

- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
- (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above



TEST REPORT NUMBER: (8519)126-0269

1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

5.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and assistant system according clause 2.3 and 4.2
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Change power supply range from 85% to 115% of the rated supply voltage
 - (d) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9kHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so below final test was performed with frequency range from 30MHz to 18GHz.
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (6) For emissions from 30MHz to 1GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.
- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure. Peak detector is used for both PK and AV test.
- (8) For fundamental frequency test, set spectrum analyzer's RBW=3MHz, VBW=10MHz. peak detector for PK, RMS detector for AV, Read the Level in spectrum analyzer and record.
- (9) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.



TEST REPORT NUMBER: (8519)126-0269

5.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9kHz to 25GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in GFSK, Tx 2405MHz mode.

Note3: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.



TEST REPORT NUMBER: (8519)126-0269

Radiated Emission test (below 1GHz)


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2019-05-13
EUT : XPIDER 2.0 PRO RC 2.4GHz
Power Supply : DC 3V
Condition : Temp:24.5°C,Humi:55%,Press:101.4kPa

D:\2019 RE1# Report Data\BV Report\85191260308 2.4G dache\RF.EM6
Tested By : Sunny
Model Number : #21019
Test Mode : Tx mode
Antenna/Distance : 2018 VULB 9163 1#/3m/HORIZONTAL

Memo :

Data: 3

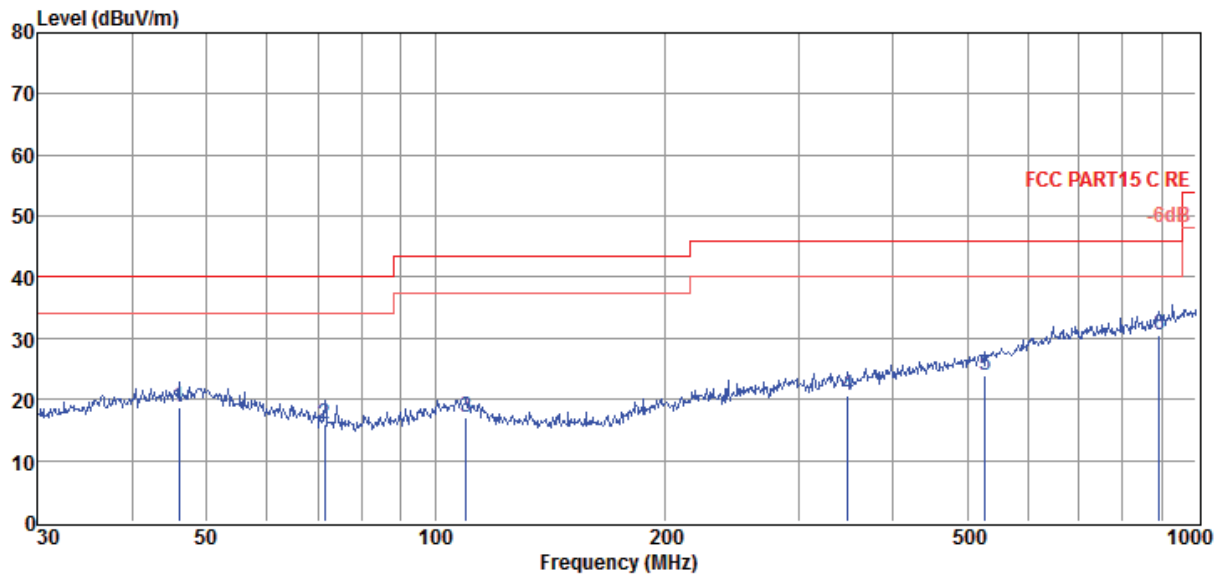

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	46.02	0.79	14.15	3.83	18.77	40.00	-21.23	QP	HORIZONTAL
2	71.58	2.45	9.40	4.03	15.88	40.00	-24.12	QP	HORIZONTAL
3	109.80	1.08	11.80	4.26	17.14	43.50	-26.36	QP	HORIZONTAL
4	348.03	0.41	14.83	5.35	20.59	46.00	-25.41	QP	HORIZONTAL
5	528.25	0.42	17.52	5.90	23.84	46.00	-22.16	QP	HORIZONTAL
6	893.86	1.85	21.64	6.89	30.38	46.00	-15.62	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TEST REPORT NUMBER: (8519)126-0269

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2019-05-13
EUT : XPIDER 2.0 PRO RC 2.4GHz
Power Supply : DC 3V
Condition : Temp:24.5°C,Humi:55%,Press:101.4kPa
Memo :

D:\2019 RE1# Report Data\BV Report\85191260308 2.4G dache\RF.EM6
Tested By : Sunny
Model Number : #21019
Test Mode : Tx mode
Antenna/Distance : 2018 VULB 9163 1#/3m/VERTICAL

Data: 4

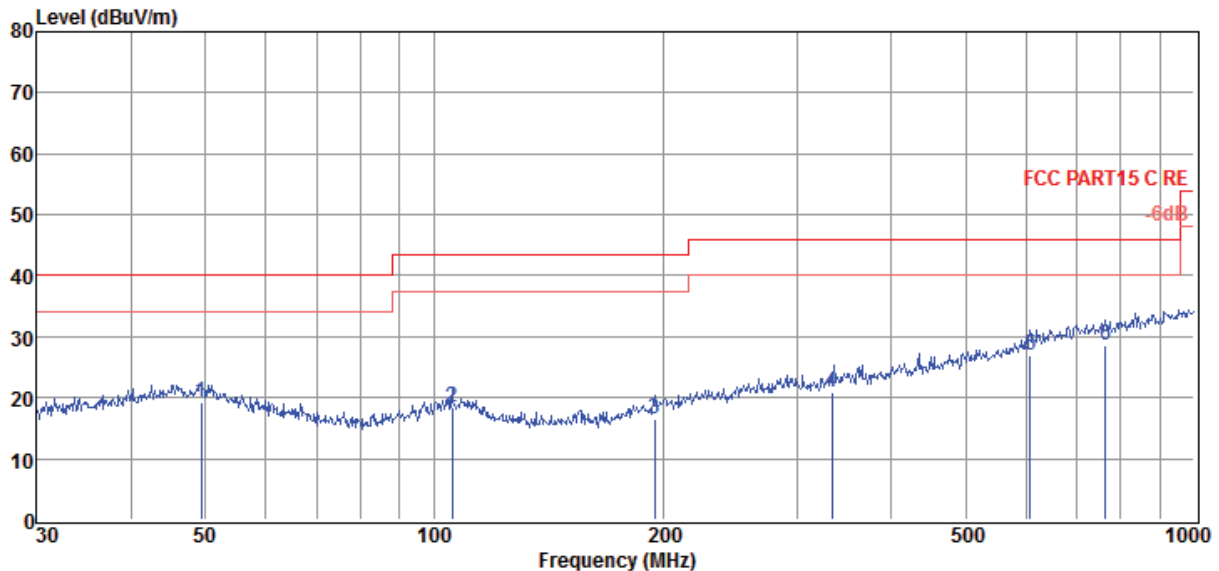

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	49.36	0.77	14.53	3.86	19.16	40.00	-20.84	QP	VERTICAL
2	105.64	2.41	11.76	4.23	18.40	43.50	-25.10	QP	VERTICAL
3	195.14	0.86	10.73	4.79	16.38	43.50	-27.12	QP	VERTICAL
4	333.69	0.89	14.59	5.30	20.78	46.00	-25.22	QP	VERTICAL
5	607.79	2.27	18.63	6.11	27.01	46.00	-18.99	QP	VERTICAL
6	763.38	1.64	20.49	6.53	28.66	46.00	-17.34	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



TEST REPORT NUMBER: (8519)126-0269

Radiated Emission test (above 1GHz)

Freq. (MHz)	Read level (dBμV)	Antenn a Factor (dB/m)	PRM Facto r(dB)	Cable Loss (dB)	Result Level (dBμV/ m)	Limit (dBμV/ m)	Margin (dB)	Detector type	Polarization
GFSK Tx mode 2405MHz									
2405.00	49.83	29.13	44.18	4.58	39.36	94.00	-54.64	Average	HORIZONTAL
2405.00	98.15	29.13	44.18	4.58	87.68	114.00	-26.32	Peak	HORIZONTAL
4810.00	46.36	33.79	44.23	11.20	47.12	54.00	-6.88	Average	HORIZONTAL
4810.00	52.81	33.79	44.23	11.20	53.57	74.00	-20.43	Peak	HORIZONTAL
7341.00	40.16	35.81	43.37	12.84	45.44	74.00	-28.56	Peak	HORIZONTAL
8412.00	41.60	36.71	43.33	13.62	48.60	74.00	-25.40	Peak	HORIZONTAL
10503.00	42.46	37.70	43.95	15.61	51.82	74.00	-22.18	Peak	HORIZONTAL
12220.00	40.56	38.04	43.51	18.06	53.15	74.00	-20.85	Peak	HORIZONTAL
15144.00	34.30	40.64	42.81	20.39	52.52	74.00	-21.48	Peak	HORIZONTAL
2405.00	53.66	29.13	44.18	4.58	43.19	94.00	-50.81	Average	VERTICAL
2405.00	103.18	29.13	44.18	4.58	92.71	114.00	-21.29	Peak	VERTICAL
4810.00	43.59	33.79	44.23	11.20	44.35	54.00	-9.65	Average	VERTICAL
4810.00	54.43	33.79	44.23	11.20	55.19	74.00	-18.81	Peak	VERTICAL
7426.00	41.64	35.86	43.33	13.10	47.27	74.00	-26.73	Peak	VERTICAL
9415.00	42.08	37.06	43.83	14.85	50.16	74.00	-23.84	Peak	VERTICAL
11761.00	41.35	38.28	43.62	17.45	53.46	74.00	-20.54	Peak	VERTICAL
13359.00	38.49	38.81	43.24	19.35	53.41	74.00	-20.59	Peak	VERTICAL
15620.00	33.74	40.67	42.52	21.51	53.40	74.00	-20.60	Peak	VERTICAL
GFSK Tx mode 2445MHz									
2445.00	94.77	29.20	44.20	4.74	84.51	114.00	-29.49	Peak	HORIZONTAL
2445.00	51.33	29.20	44.20	4.74	41.07	94.00	-52.93	Average	HORIZONTAL
4893.00	50.75	33.84	44.22	9.92	50.29	74.00	-23.71	Peak	HORIZONTAL
7443.00	42.18	35.87	43.33	13.11	47.83	74.00	-26.17	Peak	HORIZONTAL
9296.00	40.32	36.98	43.77	14.62	48.15	74.00	-25.85	Peak	HORIZONTAL
10656.00	44.17	37.64	43.91	15.81	53.71	74.00	-20.29	Peak	HORIZONTAL
12373.00	39.80	38.07	43.47	18.21	52.61	74.00	-21.39	Peak	HORIZONTAL
14073.00	34.70	40.21	43.09	20.21	52.03	74.00	-21.97	Peak	HORIZONTAL
2445.00	55.89	29.20	44.20	4.74	45.63	94.00	-48.37	Average	VERTICAL
2445.00	103.17	29.20	44.20	4.74	92.91	114.00	-21.09	Peak	VERTICAL
4893.00	51.63	33.84	44.22	9.92	51.17	74.00	-22.83	Peak	VERTICAL
7341.00	41.92	35.81	43.37	12.84	47.20	74.00	-26.80	Peak	VERTICAL
9823.00	41.74	37.30	44.02	14.86	49.88	74.00	-24.12	Peak	VERTICAL
11761.00	41.10	38.28	43.62	17.45	53.21	74.00	-20.79	Peak	VERTICAL
14107.00	35.64	40.22	43.08	20.20	52.98	74.00	-21.02	Peak	VERTICAL
15569.00	33.23	40.60	42.55	21.39	52.67	74.00	-21.33	Peak	VERTICAL
GFSK Tx mode 2475MHz									
2475.00	48.34	29.26	44.21	4.86	38.25	94.00	-55.75	Average	HORIZONTAL
2475.00	93.17	29.26	44.21	4.86	83.08	114.00	-30.92	Peak	HORIZONTAL



TEST REPORT NUMBER: (8519)126-0269

4950.00	47.80	33.87	44.21	9.89	47.35	74.00	-26.65	Peak	HORIZONTAL
7426.00	43.76	35.86	43.33	13.10	49.39	74.00	-24.61	Peak	HORIZONTAL
9415.00	41.58	37.06	43.83	14.85	49.66	74.00	-24.34	Peak	HORIZONTAL
10656.00	44.06	37.64	43.91	15.81	53.60	74.00	-20.40	Peak	HORIZONTAL
13376.00	38.18	38.83	43.24	19.37	53.14	74.00	-20.86	Peak	HORIZONTAL
15994.00	31.46	41.19	42.30	22.40	52.75	74.00	-21.25	Peak	HORIZONTAL
2475.00	57.97	29.25	44.21	4.86	47.87	94.00	-46.13	Average	VERTICAL
2475.00	102.89	29.25	44.21	4.86	92.79	114.00	-21.21	Peak	VERTICAL
4950.00	45.87	33.87	44.21	9.89	45.42	54.00	-8.58	Average	VERTICAL
4950.00	54.95	33.87	44.21	9.89	54.50	74.00	-19.50	Peak	VERTICAL
7426.00	42.91	35.86	43.33	13.10	48.54	74.00	-25.46	Peak	VERTICAL
9415.00	43.18	37.06	43.83	14.85	51.26	74.00	-22.74	Peak	VERTICAL
12322.00	40.78	38.06	43.48	18.16	53.52	74.00	-20.48	Peak	VERTICAL
14158.00	35.90	40.23	43.07	20.19	53.25	74.00	-20.75	Peak	VERTICAL
16640.00	30.50	42.31	41.93	22.70	53.58	74.00	-20.42	Peak	VERTICAL
Result: Pass									


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

TEST REPORT NUMBER: (8519)126-0269

6. Band Edge Compliance

6.1. Block diagram of test setup

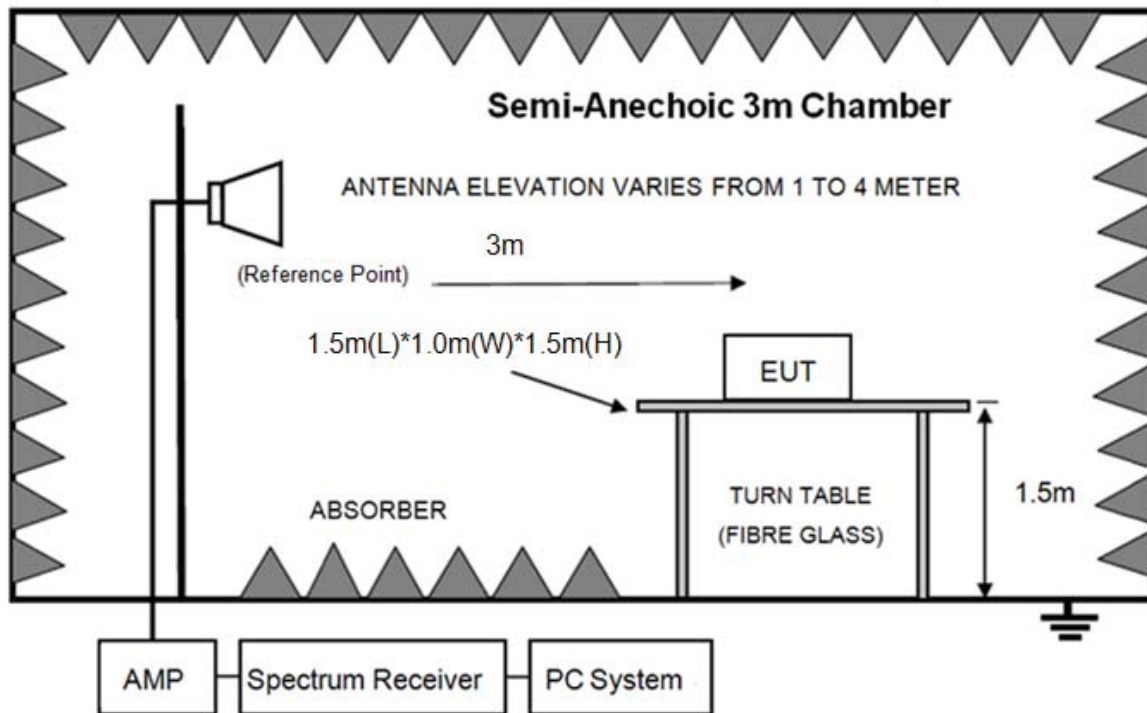

6.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz and 5725MHz to 5850MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310MHz to 2410MHz and 2470MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

6.4. Test result

PASS. (See below detailed test result)



TEST REPORT NUMBER: (8519)126-0269

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2019 RE1# Report Data\BV Report\85190771052 2.4G\RF.EM6**

Test Date : 2019-06-10 **Tested By** : Sunny


EUT : XPIDER 2.0 PRO RC 2.4GHz **Model Number** : #21019

Power Supply : DC 3V **Test Mode** : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL

Memo : 2405

Data: 59

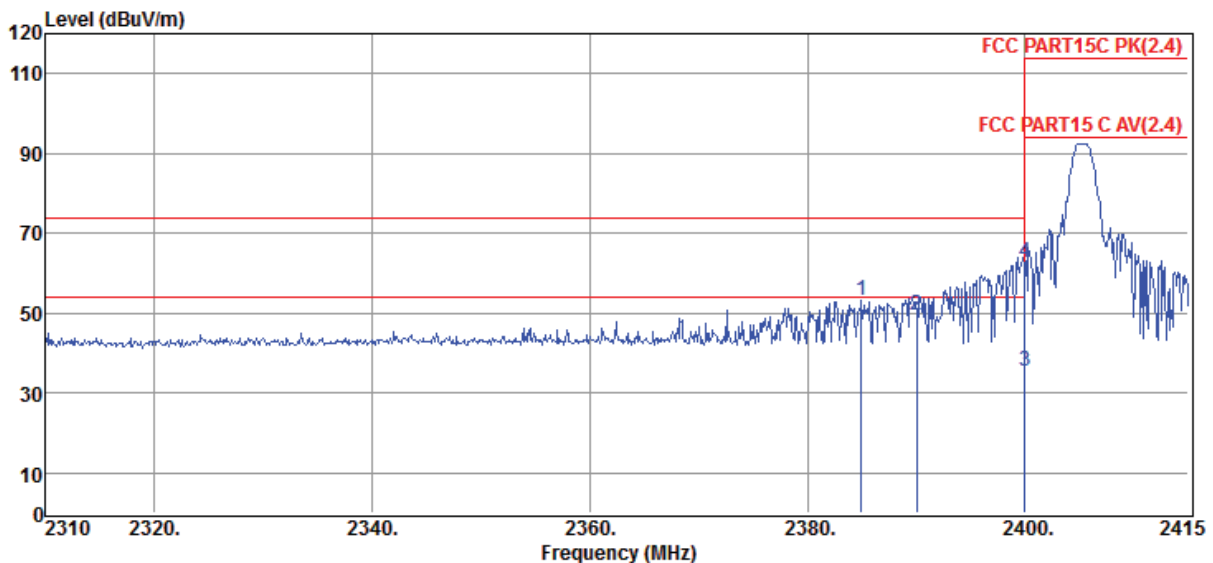

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2384.97	63.54	29.09	44.17	4.57	53.03	74.00	-20.97	Peak	VERTICAL
2	2390.00	59.95	29.10	44.18	4.56	49.43	74.00	-24.57	Peak	VERTICAL
3	2400.00	45.89	29.12	44.18	4.56	35.39	54.00	-18.61	Average	VERTICAL
4	2400.00	73.10	29.12	44.18	4.56	62.60	74.00	-11.40	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



TEST REPORT NUMBER: (8519)126-0269

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2019 RE1# Report Data\BV Report\85190771052 2.4G\RF.EM6**

Test Date : 2019-06-10 **Tested By** : Sunny


EUT : XPIDER 2.0 PRO RC 2.4GHz **Model Number** : #21019

Power Supply : DC 3V **Test Mode** : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL

Memo : 2405

Data: 60

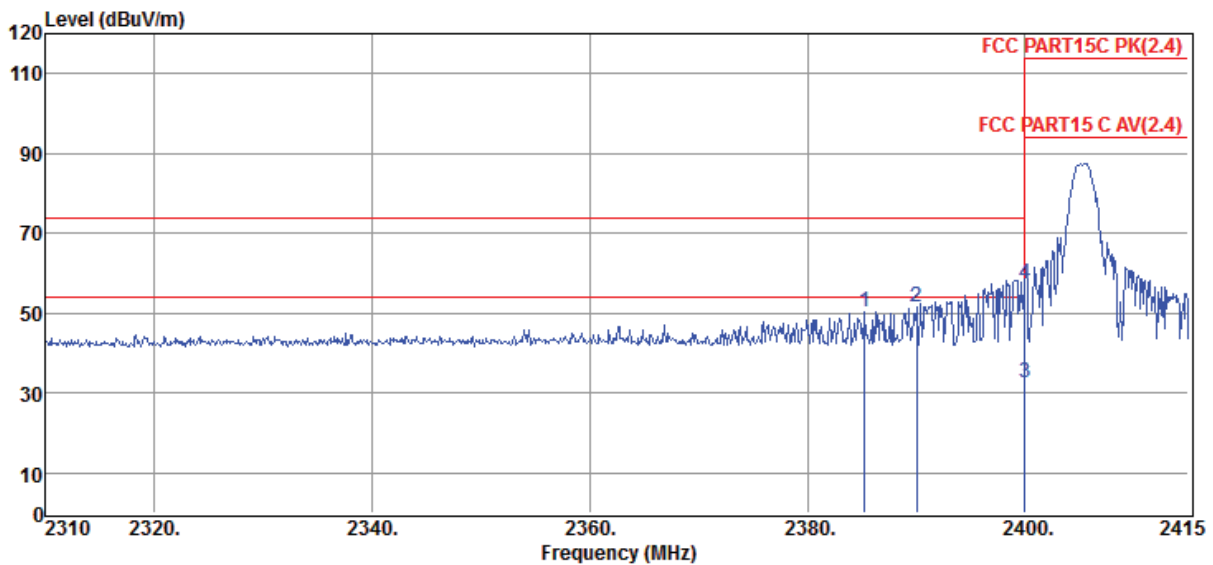

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2385.29	60.90	29.09	44.17	4.57	50.39	74.00	-23.61	Peak	HORIZONTAL
2	2390.00	62.09	29.10	44.18	4.56	51.57	74.00	-22.43	Peak	HORIZONTAL
3	2400.00	43.25	29.12	44.18	4.56	32.75	54.00	-21.25	Average	HORIZONTAL
4	2400.00	67.85	29.12	44.18	4.56	57.35	74.00	-16.65	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.




TEST REPORT NUMBER: (8519)126-0269

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2019-06-10
EUT : XPIDER 2.0 PRO RC 2.4GHz
Power Supply : DC 3V
Condition : Temp:24.5°C,Humi:55%,Press:101.4kPa
Memo : 2475

D:\2019 RE1# Report Data\BV Report\85190771052 2.4G\RF.EM6
Tested By : Sunny
Model Number : #21019
Test Mode : Tx mode
Antenna/Distance : 2018 HF 907/3m/HORIZONTAL

Data: 65

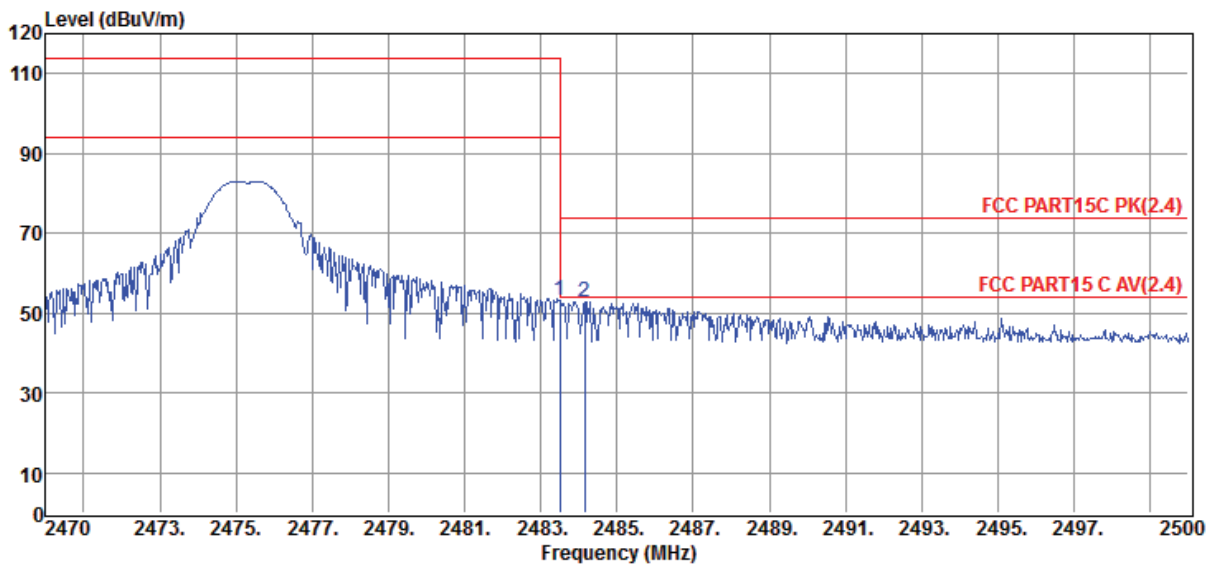

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	63.38	29.27	44.21	4.89	53.33	74.00	-20.67	Peak	HORIZONTAL
2	2484.16	62.95	29.27	44.21	4.90	52.91	74.00	-21.09	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.




TEST REPORT NUMBER: (8519)126-0269

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2019 RE1# Report Data\BV Report\85190771052**
Test Date : 2019-06-10 **Tested By** : Sunny
EUT : XPIDER 2.0 PRO RC 2.4GHz **Model Number** : #21019
Power Supply : DC 3V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 2475

Data: 66

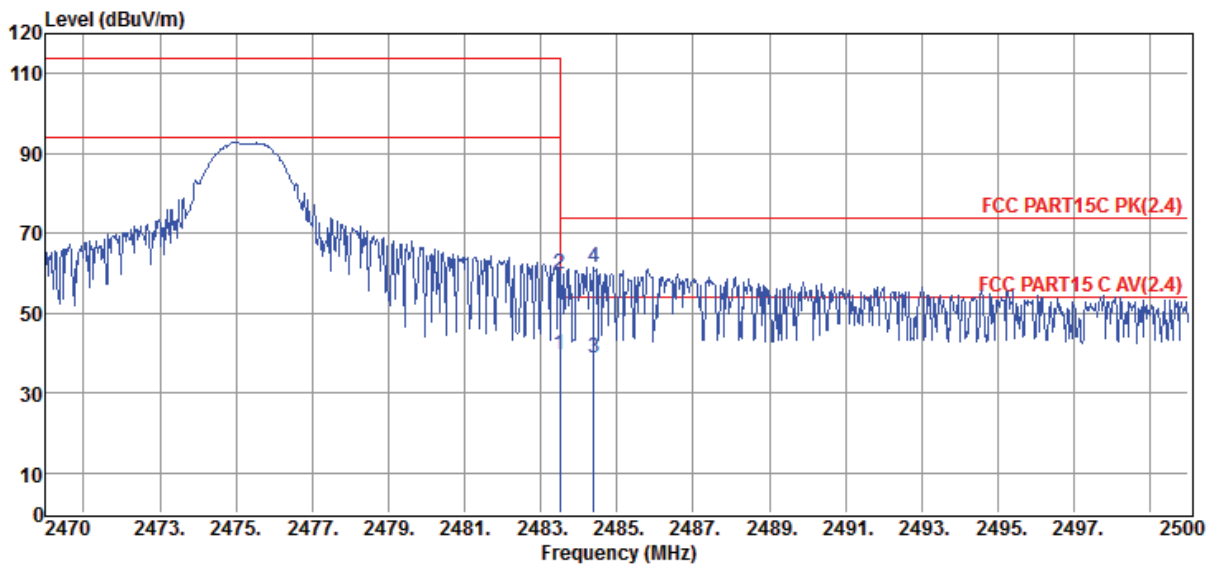


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	49.68	29.27	44.21	4.89	39.63	54.00	-14.37	Average	VERTICAL
2	2483.50	69.76	29.27	44.21	4.89	59.71	74.00	-14.29	Peak	VERTICAL
3	2484.40	48.97	29.27	44.21	4.90	38.93	54.00	-15.07	Average	VERTICAL
4	2484.40	71.38	29.27	44.21	4.90	61.34	74.00	-12.66	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TEST REPORT NUMBER: (8519)126-0269

7. Power Line Conducted Emission

7.1. Block diagram of test setup

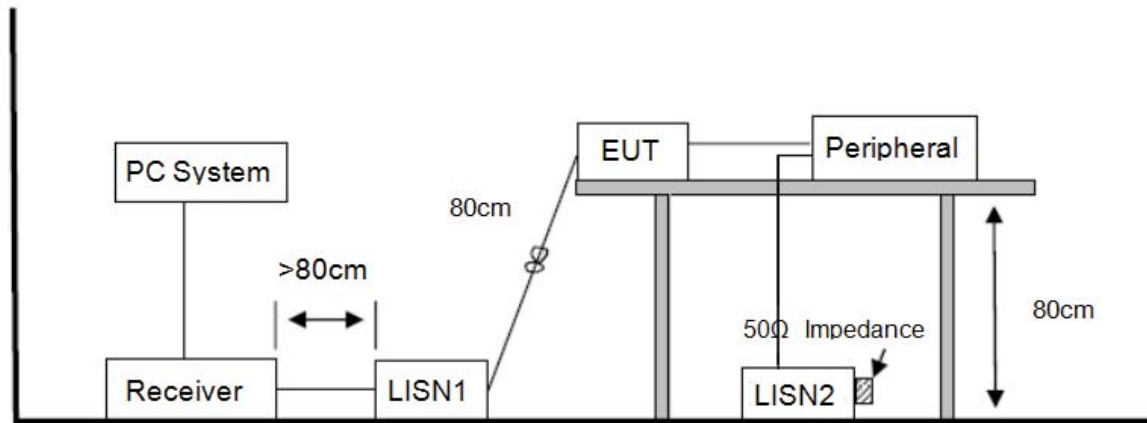

7.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

7.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.



TEST REPORT NUMBER: (8519)126-0269

After the preliminary scan, we found the test mode producing the highest emission level. The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

7.4. Test Result

Not Applicable, since the EUT is only battery-operated device.

8. Antenna Requirements

8.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. Result

The antennas used for this product are Internal wire antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.