



FCC Test Report

Report No: FCS202012014W02

Issued for

UNIONMAN TECHNOLOGY CO., LTD

No.5 Huitai Road, Huinan High-Tech Industrial Park, Huizhou City,
Guangdong, China.

Product Name:	AX WIFI Router
Brand Name:	NA
Model Name:	UNR030N
Series Model:	UM9030,UNR031N,UM9034 UNR032N,UM9035
FCC ID:	2ATGV-UM9030
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name: UNIONMAN TECHNOLOGY CO., LTD
Address.....: No.5 Huitai Road, Huinan High-Tech Industrial Park, Huizhou City, Guangdong, China.
Manufacture's Name: UNIONMAN TECHNOLOGY CO., LTD
Address.....: No.5 Huitai Road, Huinan High-Tech Industrial Park, Huizhou City, Guangdong, China.

Product Description

Product Name: AX WIFI Router
Model Name.....: UNR030N
Series Model.....: UM9030,UNR031N,UM9034
UNR032N,UM9035
Test Standards: CFR 47 FCC Part15E section 15.407
ANSI C63.10-2013
Test Procedure.....: KDB 789033 D02 General UNII Test procedures New Rules 02
KDB558074 D01 Meas Guidance v05

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test :

Date (s) of performance of tests : Dec. 08, 2020 to Dec. 17, 2020

Date of Issue..... : Dec. 17, 2020

Test Result : Pass

Tested by : Scott Shen
(Scott Shen)

Reviewed by : Duke Qian
(Duke Qian)

Approved by : Kait Chen
(Kait Chen)

Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.4 EQUIPMENTS LIST	13
3. 26DB BANDWIDTH, 6DB BANDWIDTH AND 99% BANDWIDTH	14
3.1 LIMIT	14
3.2 TEST PROCEDURE	14
3.3 TEST SETUP	14
3.4 TEST RESULTS	15
4 CONDUCTED OUTPUT POWER	31
4.1 LIMIT	31
4.2 TEST PROCEDURE	31
4.3 TEST SETUP	31
4.4 TEST RESULTS	32
5. POWER SPECTRAL DENSITY	33
5.1 LIMIT	33
5.2 TEST PROCEDURE	33
5.3 TEST SETUP	34
5.4 TEST RESULTS	34
5.5 ORIGINAL TEST DATA	35
6. FREQUENCY STABILITY MEASUREMENT	49
6.1 LIMIT	49
6.2 TEST PROCEDURE	49
6.3 TEST SETUP	49
6.4 TEST RESULTS	50
	50

Table of Contents	Page
7. BAND EDGE	51
7.1 LIMIT	51
7.3 TEST SETUP	52
7.5 TEST RESULTS	53
7.5 ORIGINAL TEST DATA	53
8. DUTY CYCLE	65
8.1 TEST REQUIREMENT	65
8.2 TEST PROCEDURE	65
7.3 TEST SETUP	65
8.4 TEST RESULTS	66
9 RADIATED EMISSION MEASUREMENT	67
10 CONDUCTED EMISSION TEST	74
11. ANTENNA REQUIREMENT	78
11.1 STANDARD REQUIREMENT	78
11.2 RESULT	78

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	Dec. 17, 2020	FCS202012014W02	ALL	Initial Issue

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Standard Section	Test Item	Judgment	Remark
FCC 15.407 (e)	6/26db Bandwidth and 99% Bandwidth	PASS	--
FCC 15.407 (a)	Maximum Conducted Output Power	PASS	--
FCC 15.407 (a)	Power Spectral Density	PASS	--
FCC 15.407 (g)	Frequency Stability Measurement	PASS	
FCC 15.407 (a) FCC 15.209 FCC 15.205	Emissions in restricted frequency bands	PASS	
FCC 15.407 (a) FCC 15.209 FCC 15.205	Band Edge Compliance	PASS	
FCC 15.207	Power Line Conducted Emission	PASS	
FCC 15.203	Antenna requirement	PASS	--

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71 \text{ dB}$
2	Unwanted Emissions, conducted	$\pm 2.988 \text{ dB}$
3	Conducted Emission (9KHz-150KHz)	$\pm 4.13 \text{ dB}$
4	Conducted Emission (150KHz-30MHz)	$\pm 4.74 \text{ dB}$
5	All emissions, radiated(<1G) 30MHz-1000MHz	$\pm 5.2 \text{ dB}$
6	All emissions, radiated 1GHz -18GHz	$\pm 4.66 \text{ dB}$
7	All emissions, radiated 18GHz -40GHz	$\pm 4.31 \text{ dB}$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	AX WIFI Router
Trade Name	NA
Model Name	UNR030N
Series Model	UM9030,UNR031N,UM9034 UNR032N,UM9035
Model Difference	The electrical circuit design, layout, components used and internal wiring for above models are identical, only different in model name and colour
Channel List	Please refer to the Note 2.2.
Operation frequency	IEEE 802.11a/n/ac(HT20): U-NII-1 5150MHZ ~5250MHZ U-NII-3 5725MHZ-5850 MHz
Number of channel	5150MHz ~5250MHZ (7CH) 5725MHZ-5850 MHz (8CH)
Modulation	OFDM
Modulation Type	256QAM, 64QAM,16QAM, BPSK,QPSK
Transfer Rate(Mbps)	802.11a:54/48/36/24/18/9/6Mbps 802.11n:up to 135 Mbps 802.11ac: up 270Mbps
Power supply	DC 12V by adapter
Hardware version number	V1.0
Software version number	V1.0
Sample type	mobile device
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. For 802.11a/n/ac(HT20)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
44	5240	48	5240

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	153	5765
157	5785	161	5805
165	5825		

For 802.11n/ac(HT40)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
151	5755	159	5795

For 802.11ac(HT80)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210		

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
155	5775		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	KCC	KCC	External antenna	N/A	1.0B dBi	Antenna

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test



Test software: the QA tool

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

For 802.11a/n/ac(HT20)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
44	5240	48	5240

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	153	5765
157	5785	161	5805
165	5825		

For 802.11n/ac(HT40)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
151	5755	159	5795

For 802.11ac(HT80)

U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210		

U-NII-3

channel	Frequency(MHz)	channel	Frequency(MHz)
155	5775		

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2020. 06.26	2021. 06.25
Signal Analyzer	R&S	FSV40-N	FCS-E012	2020.06.05	2021.06.04
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2020.08.09	2021.08.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2020.08.26	2021.08.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2020.08.26	2021.08.25
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2020.06.26	2021.06.25
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2020.06.26	2021.06.25
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2020.06.03	2021.06.02
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2020.08.08	2021.08.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2020.08.26	2021.08.25

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	FCS-E020	2020.06.03	2021.06.02
LISN	R&S	ENV216	FCS-E007	2020.08.08	2021.08.07
LISN	ETS	3810/2NM	FCS-E009	2020.06.03	2021.06.02
Temperature & Humidity	HTC-1	victor	FCS-E008	2020.08.08	2021.08.07

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2020.06.03	2021.06.02
Spectrum Analyzer	Agilent	E4447A	MY50180039	2020.08.08	2021.08.07
Spectrum Analyzer	R&S	FSV-40	101499	2020.08.26	2021.08.25

3. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth

3.1 Limit

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	26 dB Bandwidth	5150-5250
	26 dB Bandwidth	5250-5350
	26 dB Bandwidth	For FCC:5470-5725 For IC:5470-5600 5650-5725
	Minimum 500kHz 6dB Bandwidth	5725-5850


3.2 Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth: RBW=100kHz For 26dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6dB Bandwidth: VBW=300kHz For 26dB Bandwidth: >3RBW
Trace	Max hold
Sweep	Auto couple

(2) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26dB and 6dB relative to the maximum level measured in the fundamental emission.

3.3 Test setup

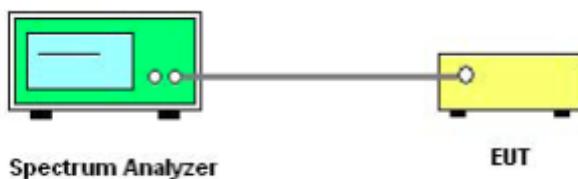


3.4 Test results

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	21.23	21.08	21.08	16.561	16.557	16.559
	802.11n(HT20)	21.30	21.55	21.38	17.813	17.817	17.758
	802.11n(HT40)	39.55	/	39.36	36.336	/	36.366
	802.11ac(HT20)	21.37	21.40	21.39	17.835	17.812	17.831
	802.11ac(HT40)	40.34	/	39.49	36.521	/	36.507
	802.11ac(HT80)	80.98	/	/	75.731	/	/


Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	16.47	16.50	16.49
	802.11n(HT20)	16.30	15.89	15.09
	802.11n(HT40)	36.01	/	35.70
	802.11ac(HT20)	16.30	16.90	15.30
	802.11ac(HT40)	36.29	/	35.72
	802.11ac(HT80)	75.04	/	/

3.5 Original Test Data


U-NII-1 11a Low CH 5180MHz

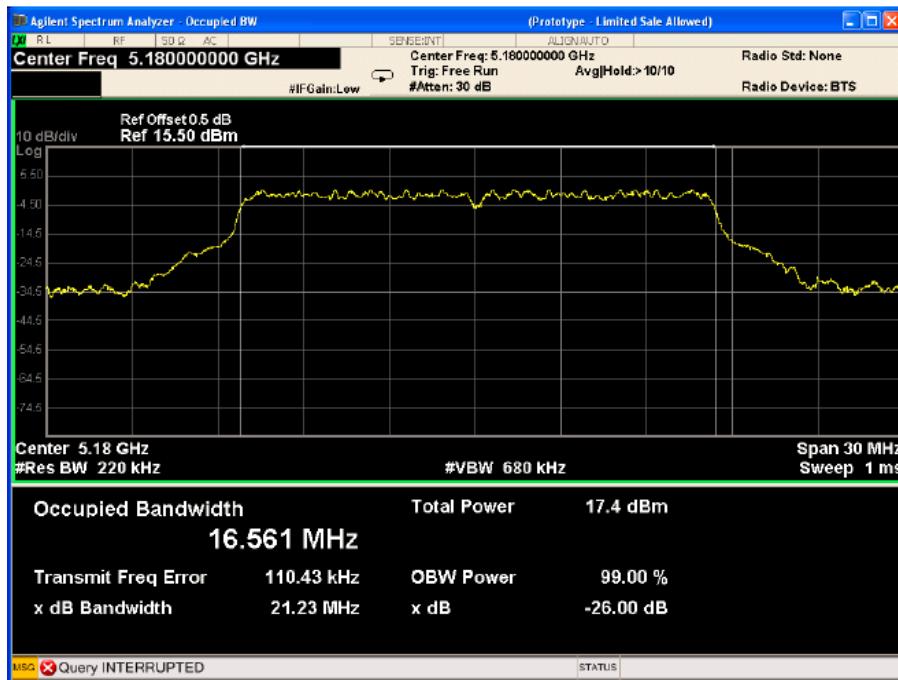


U-NII-1 11a Middle CH 5200MHz

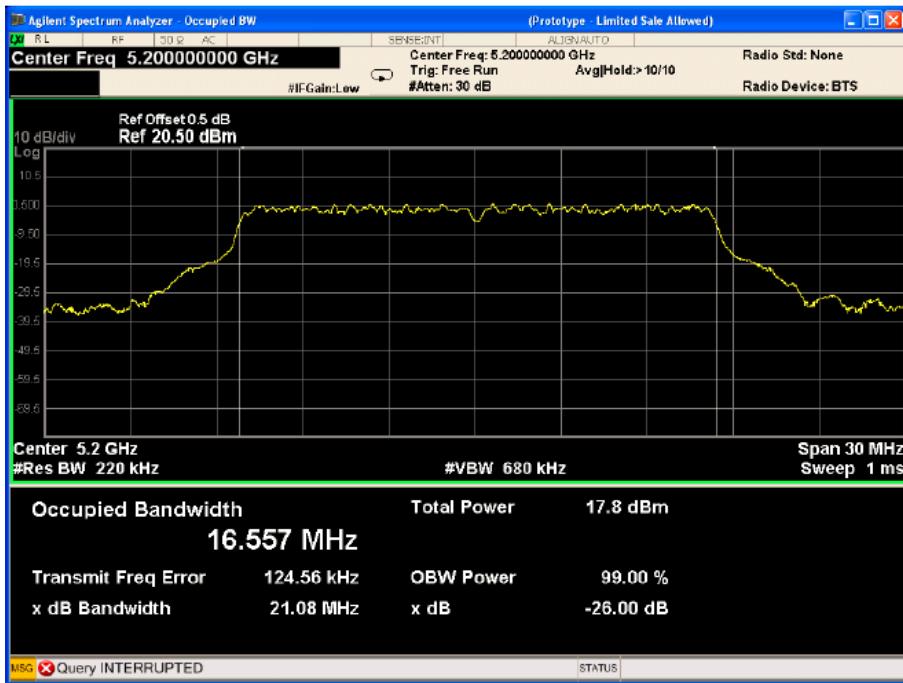


U-NII-1 11a High CH 5240MHZ

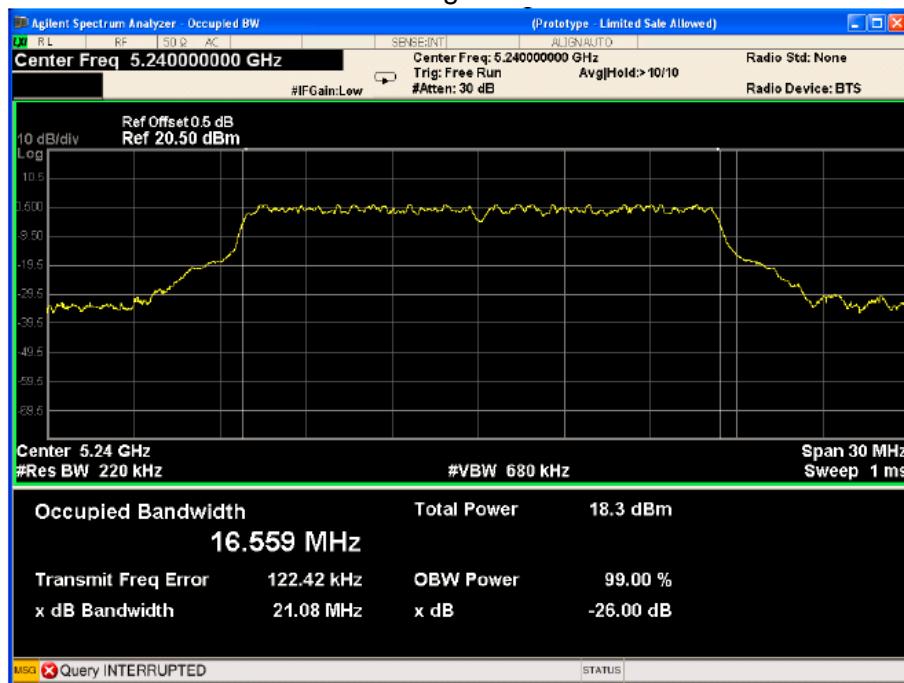


U-NII-1 11n(HT20) Low CH 5180MHZ

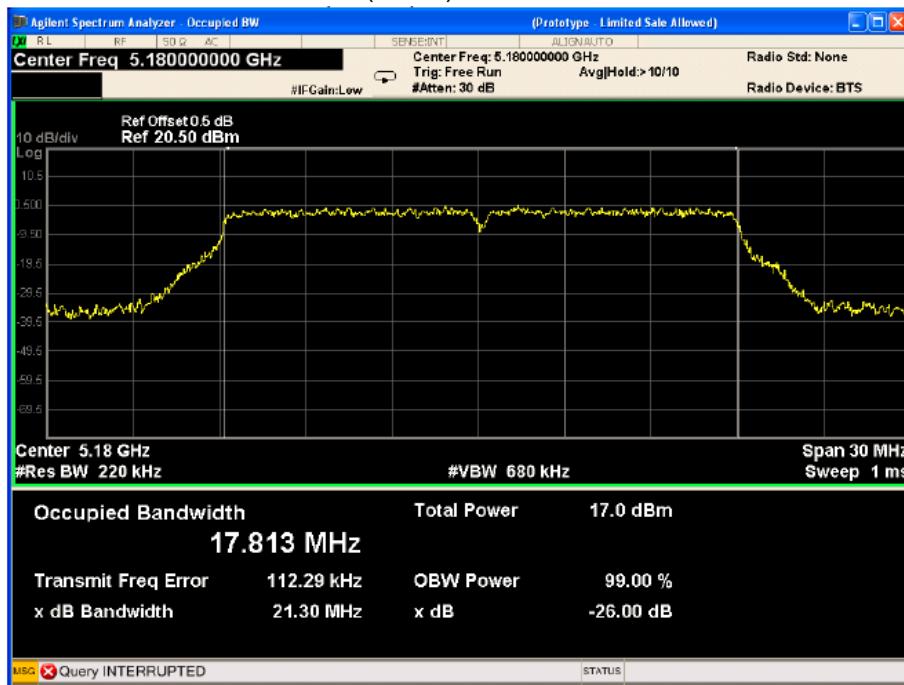


U-NII-1 11n(HT20) Middle CH 5200MHZ

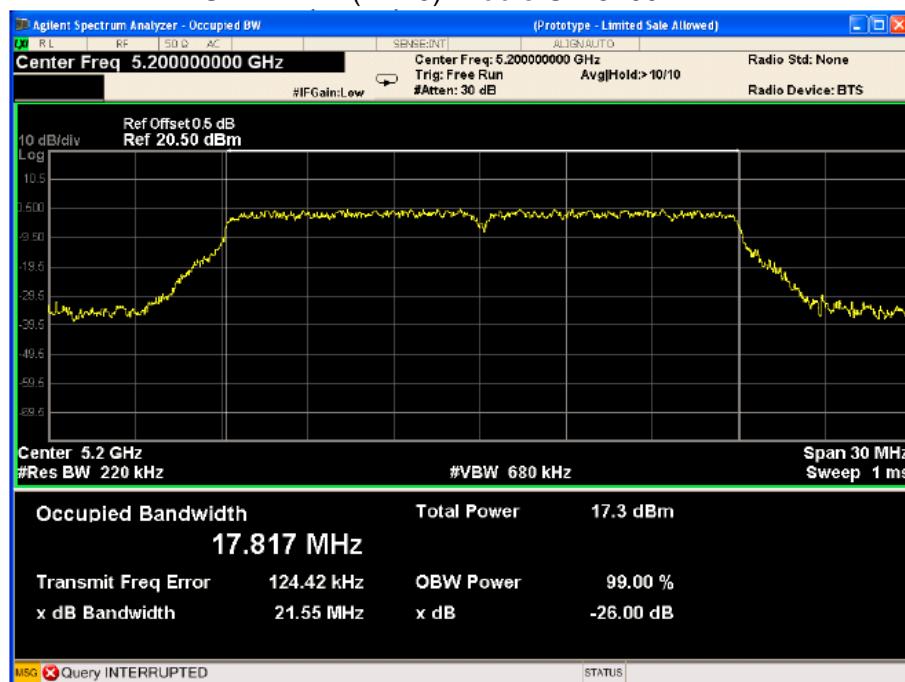


U-NII-1 11n(HT20)High CH 5240MHZ

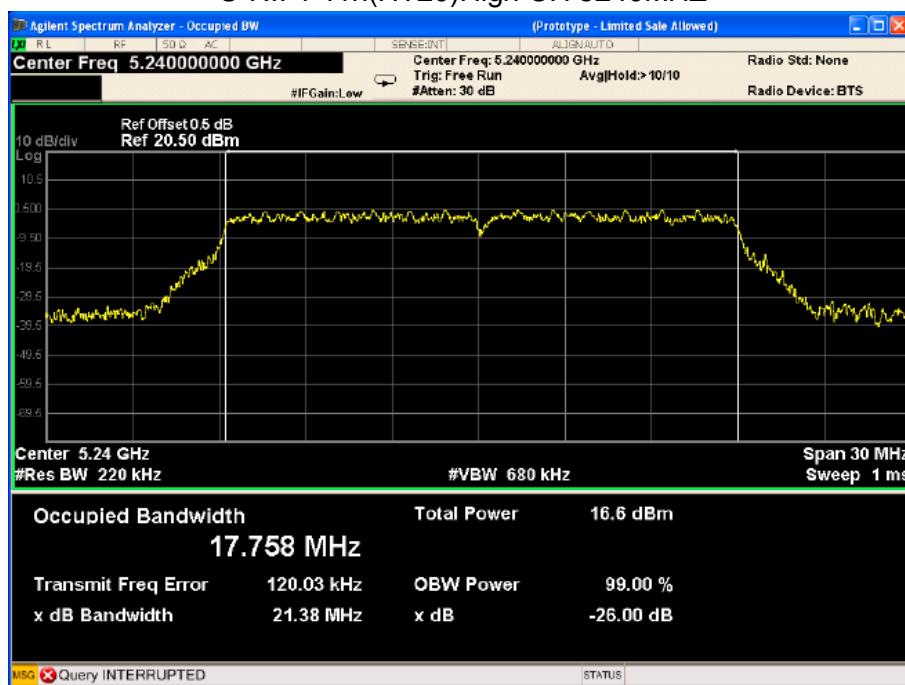


U-NII-1 11n(HT40) Low CH 5190MHZ

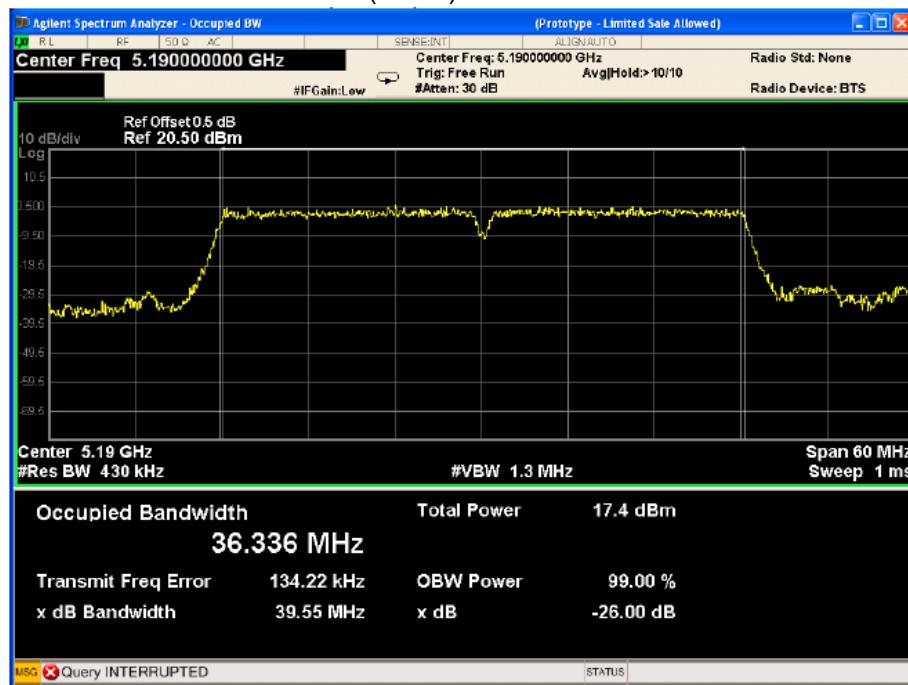


U-NII-1 11n(HT40)High CH 5240MHZ

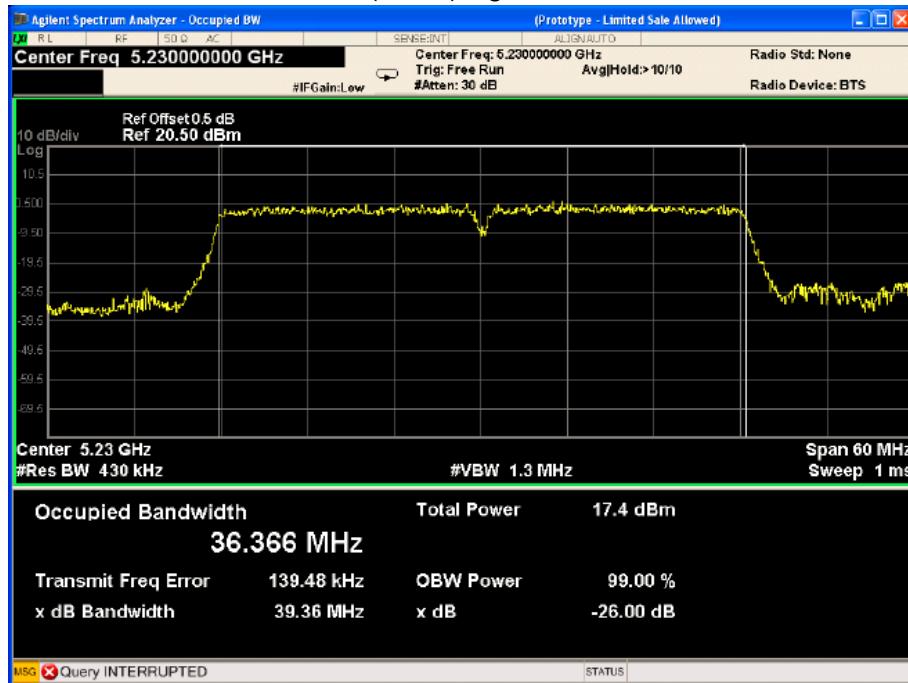


U-NII-1 ac(HT20) Low CH 5180MHZ

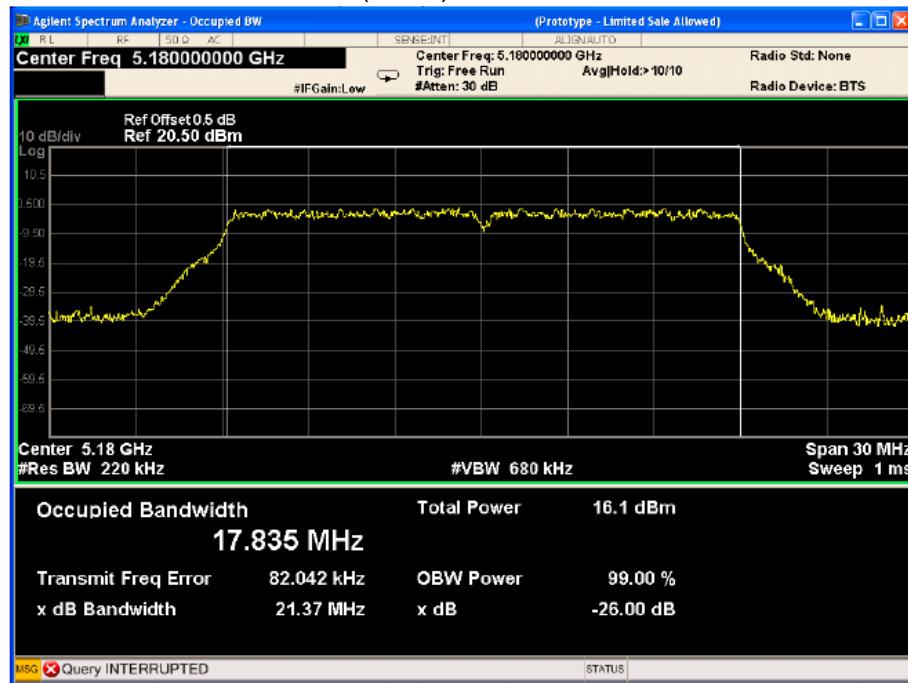

U-NII-1 ac(HT20) Middle CH 5200MHZ

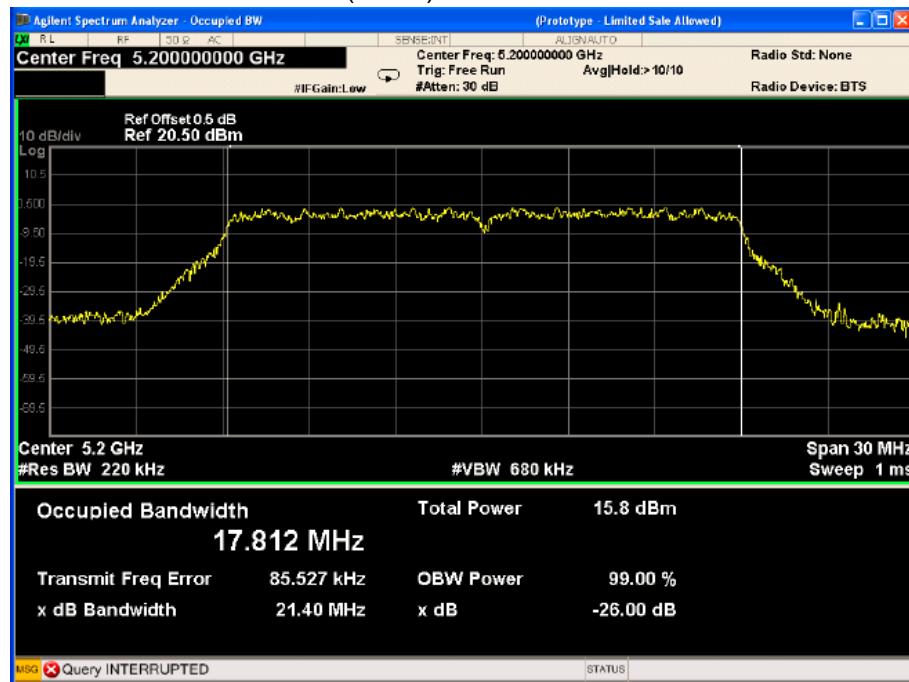


U-NII-1 ac(HT20)High CH 5240MHZ

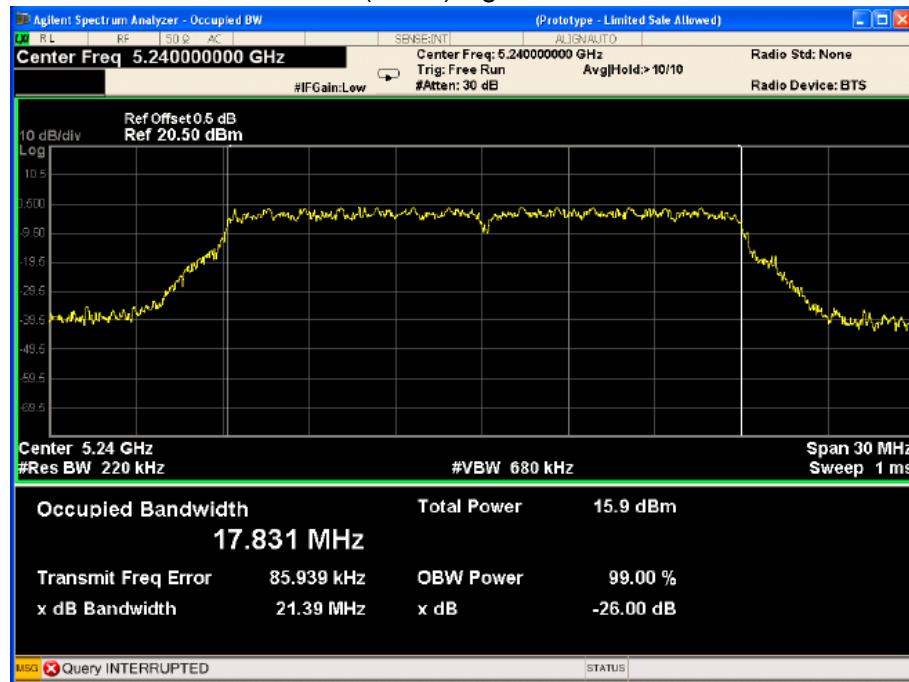


U-NII-1 ac(HT40) Low CH 5190MHZ



U-NII-1 ac(HT40) High CH 5230MHZ

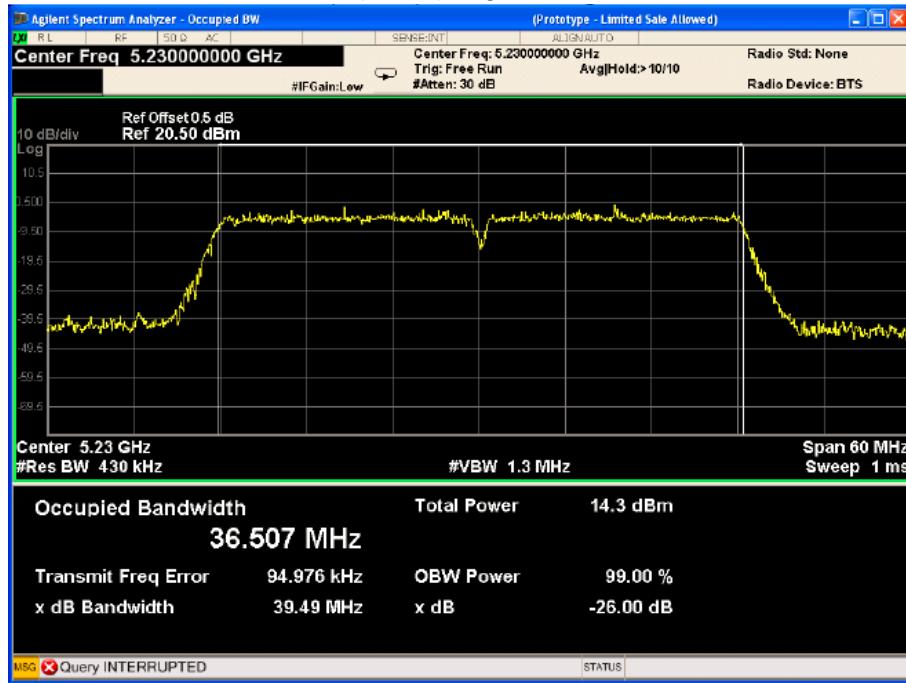


U-NII-1 ac(HT80) Low CH 5210MHZ

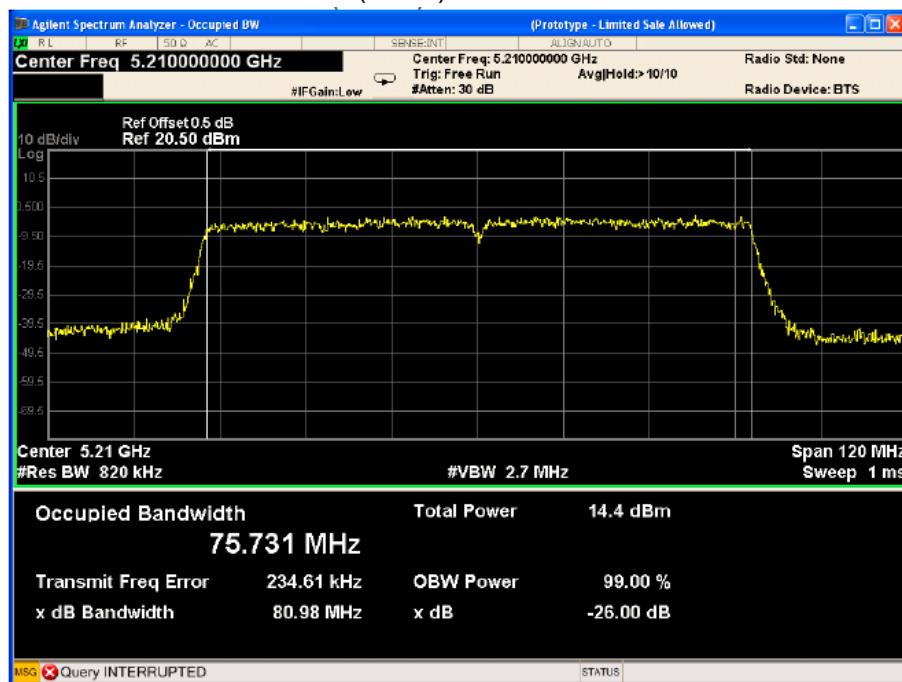


6dB Bandwidth test result


U-NII-3 11a Low CH 5745MHz

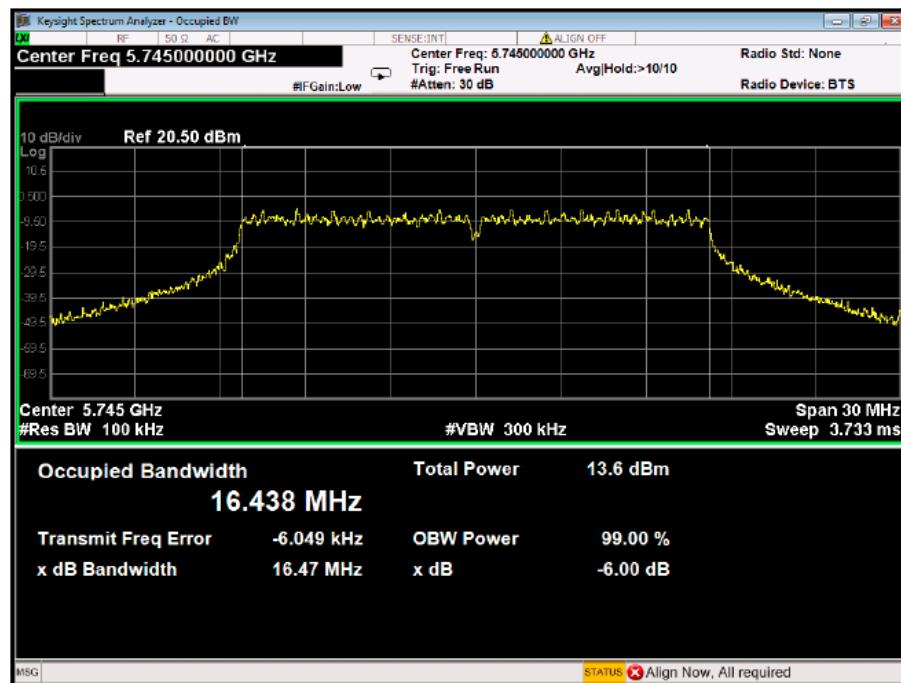


U-NII-3 11a Middle CH 5785MHz

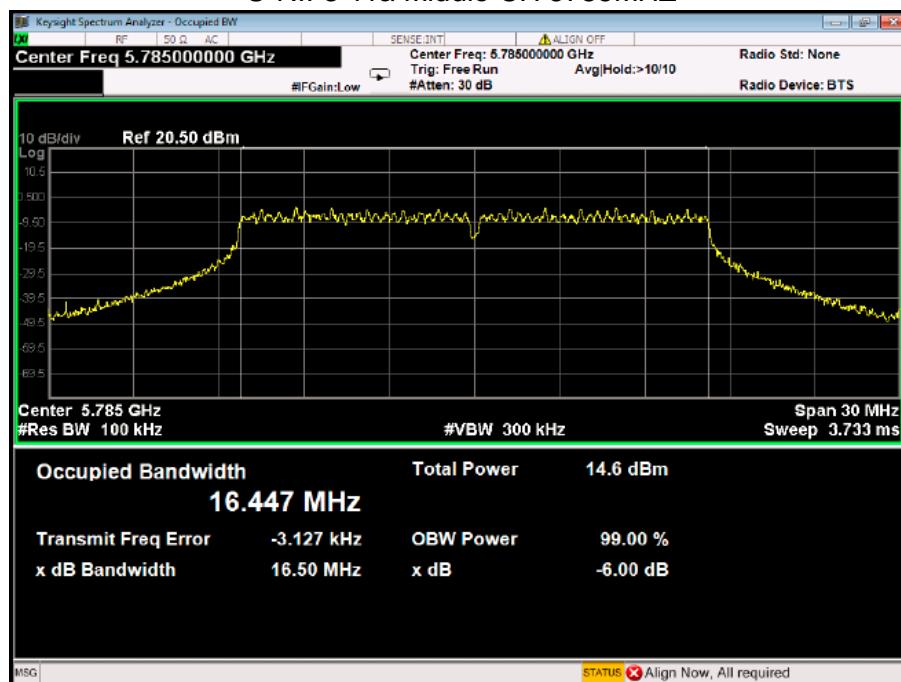


U-NII-3 11a High CH 5825MHz

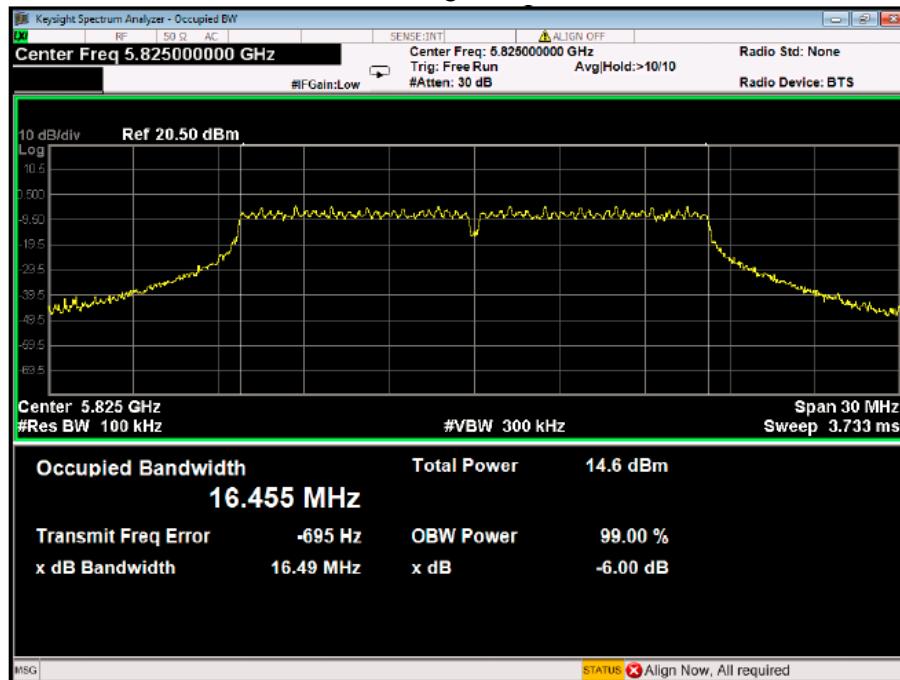


U-NII-3 11n(HT20) Low CH 5745MHz

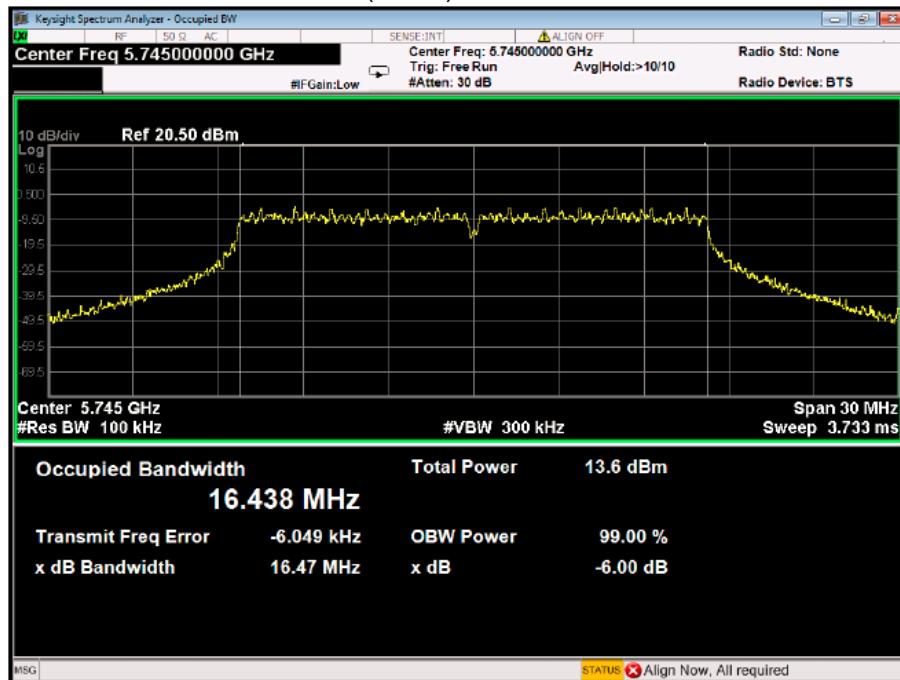


U-NII-3 11n(HT20) Middle CH 5785MHz

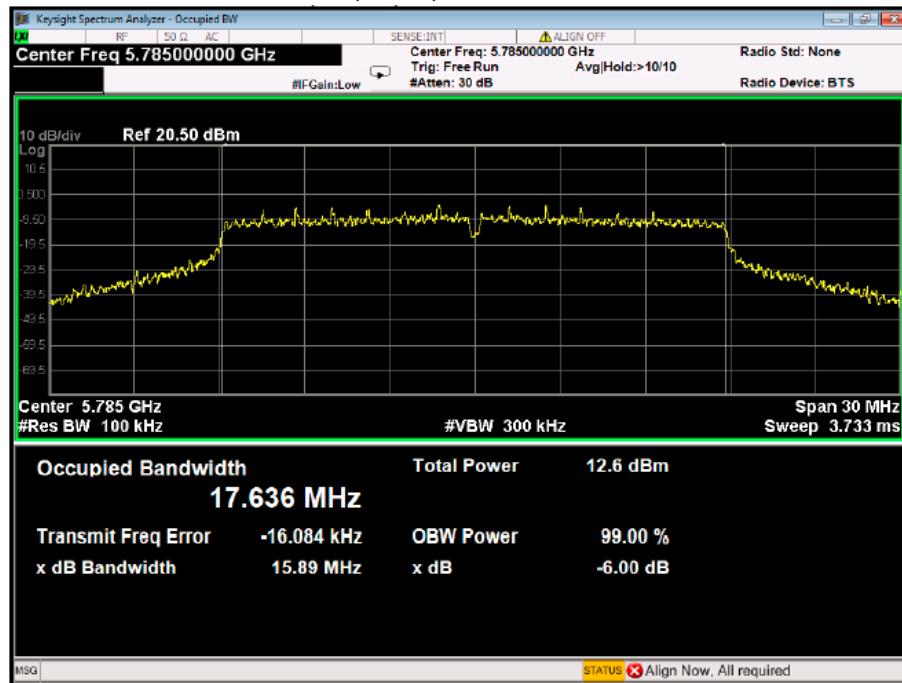


U-NII-3 11n(HT20) High CH 5825MHz

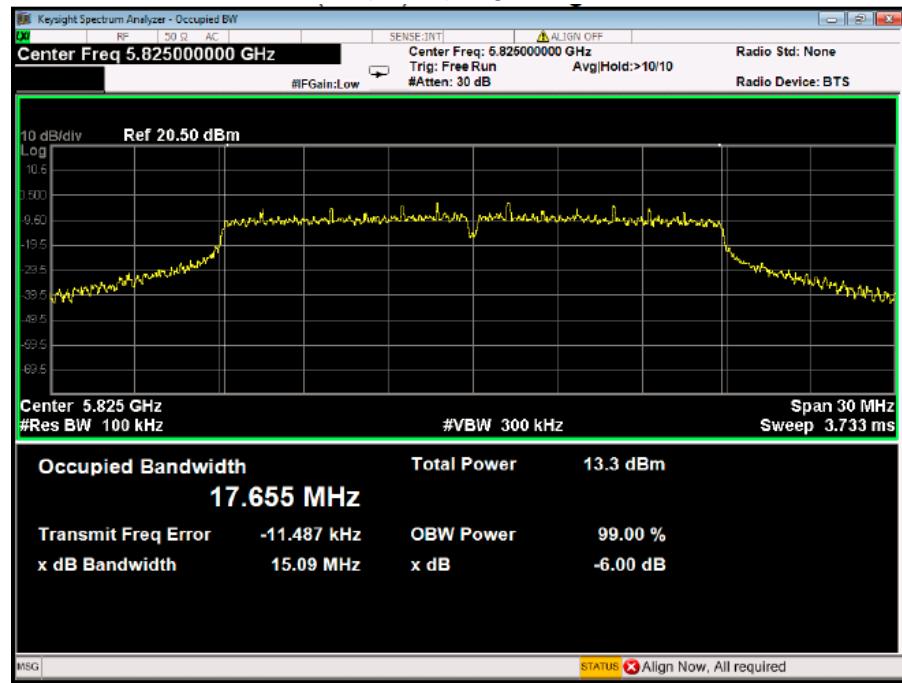


U-NII-3 11n(HT40) Low CH 5755MHz

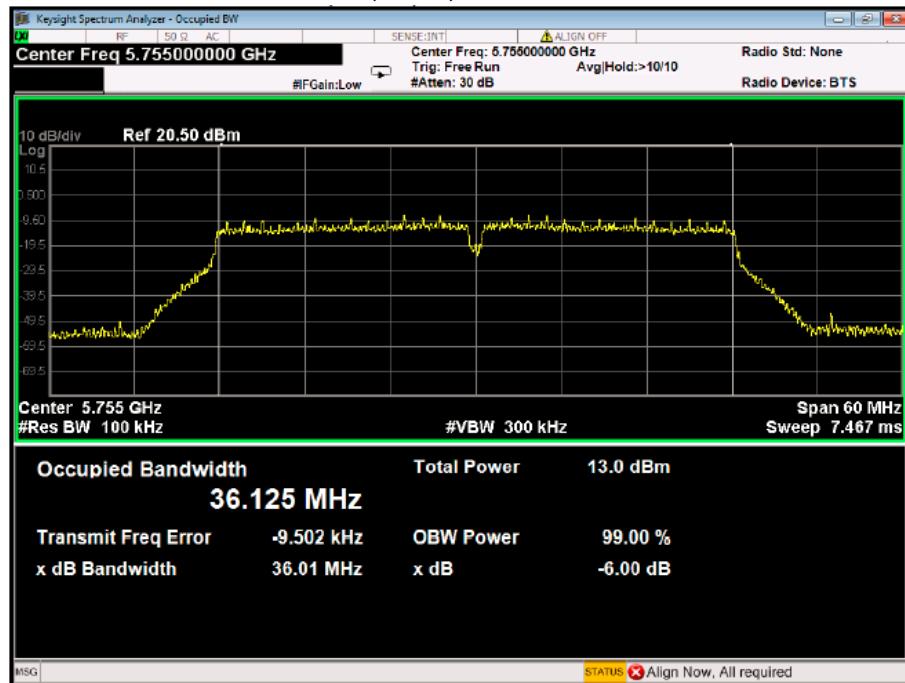


U-NII-3 11n(HT40) High CH 5795MHz

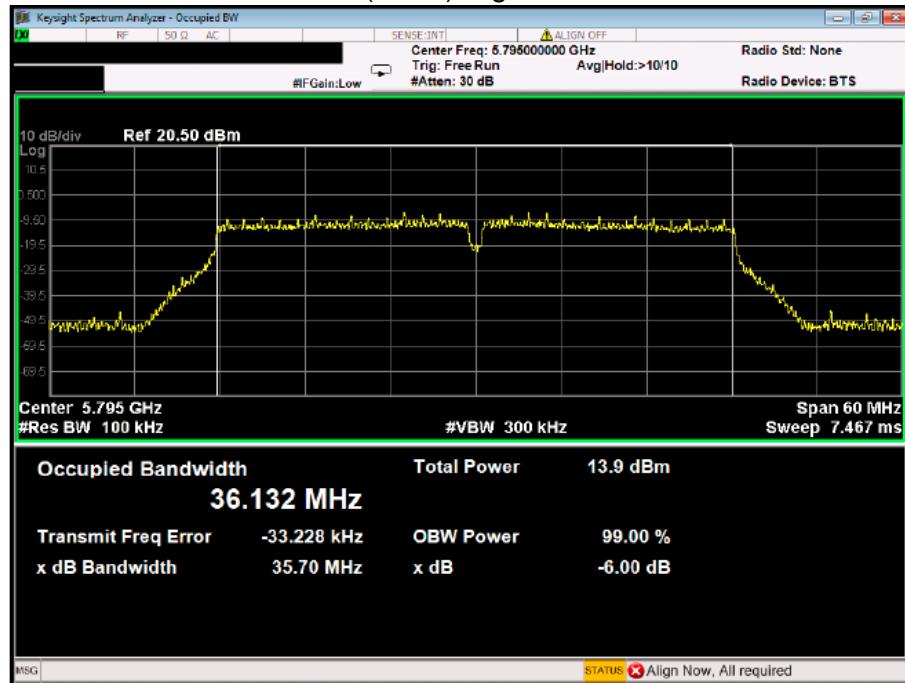


U-NII-3 11ac(HT20) Low CH 5745MHz

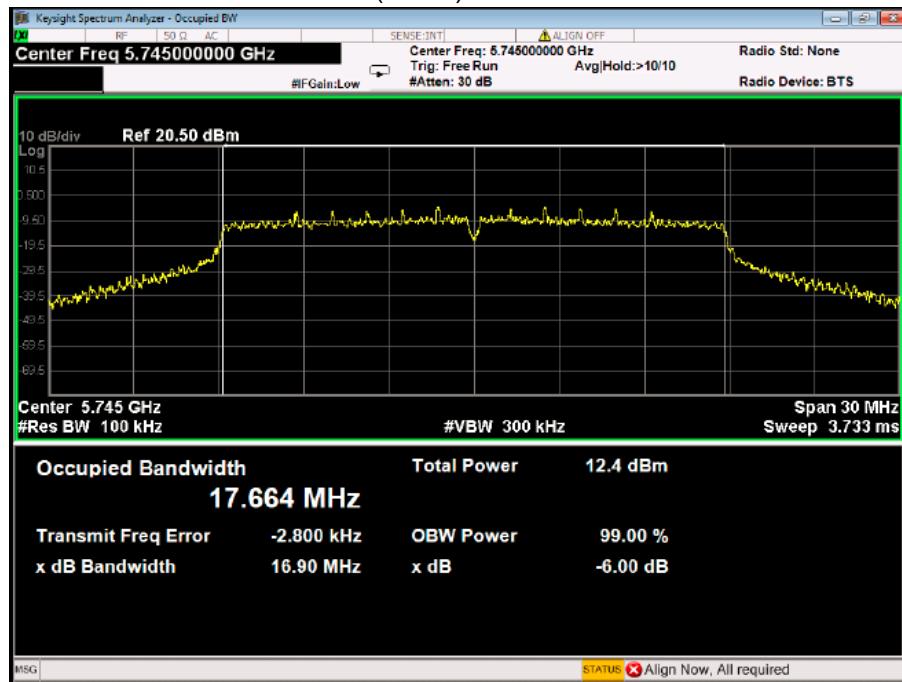


U-NII-3 11ac(HT20) Middle CH 5785MHz

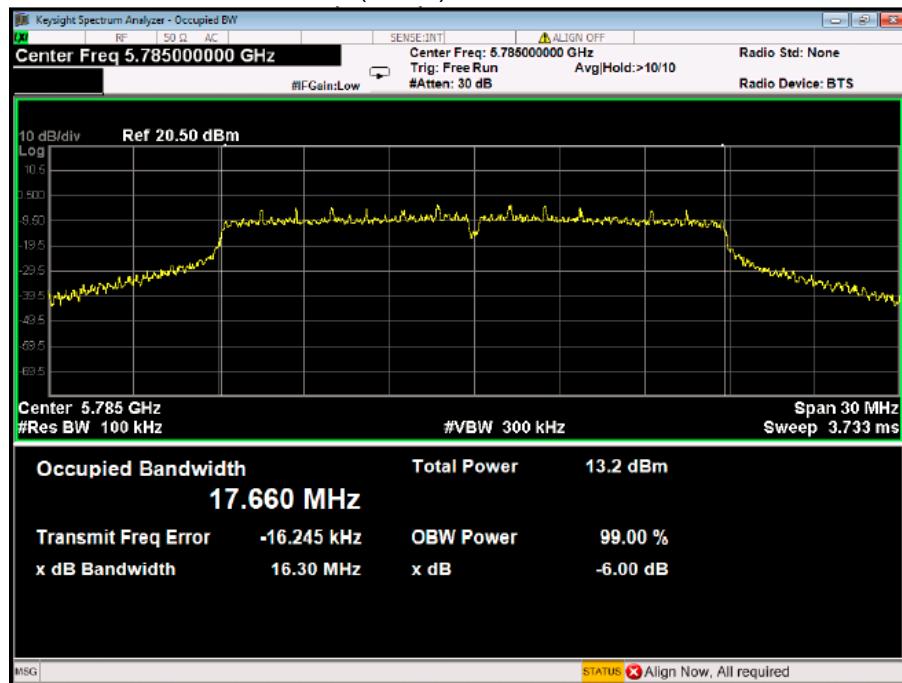


U-NII-3 11ac(HT20) High CH 5825MHZ

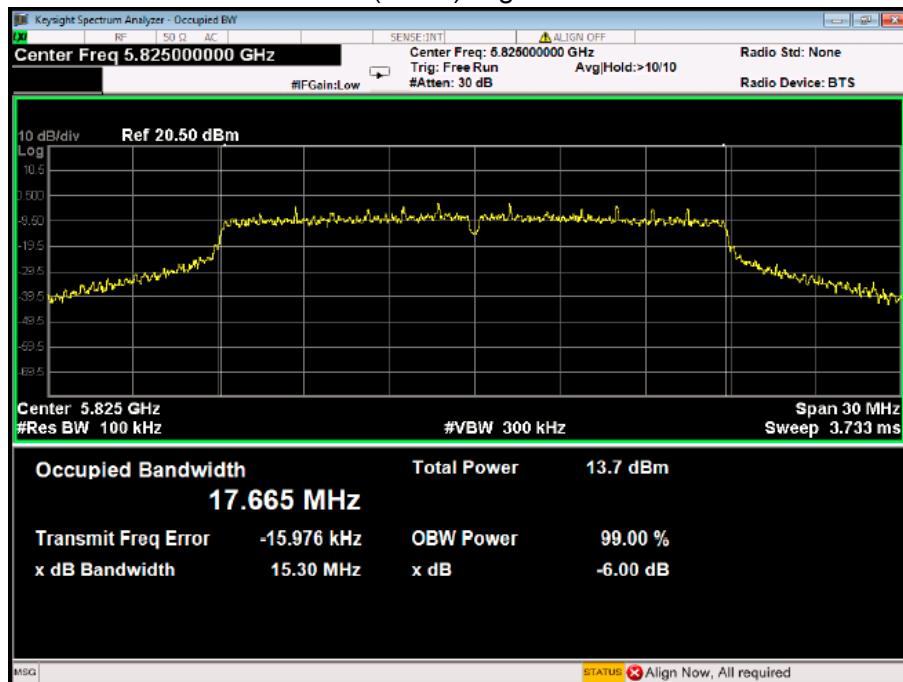


U-NII-3 11ac(HT40) Low CH 5755MHZ

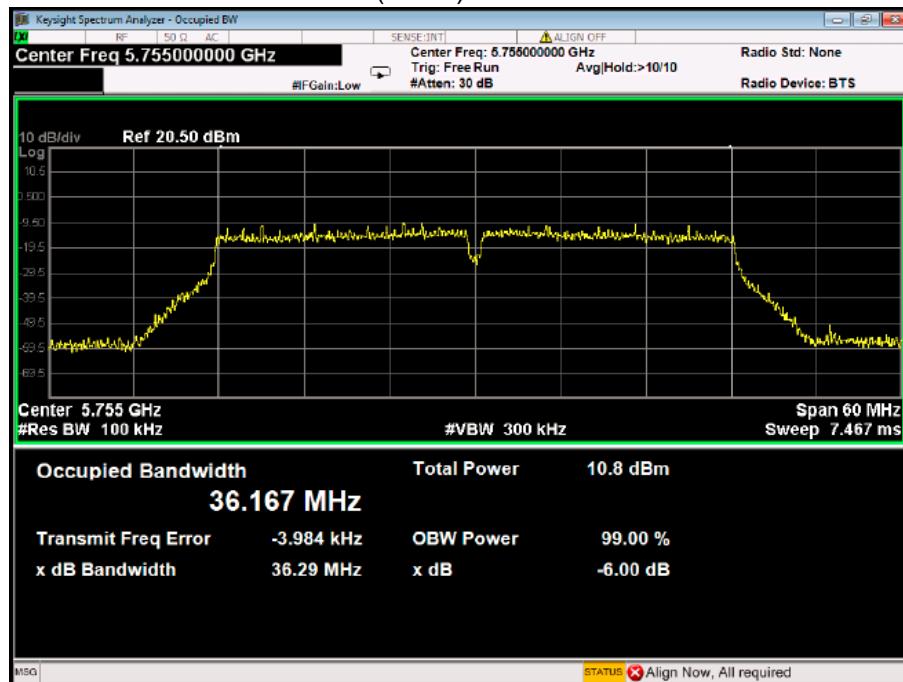

U-NII-3 11ac(HT40) High CH 5795MHz

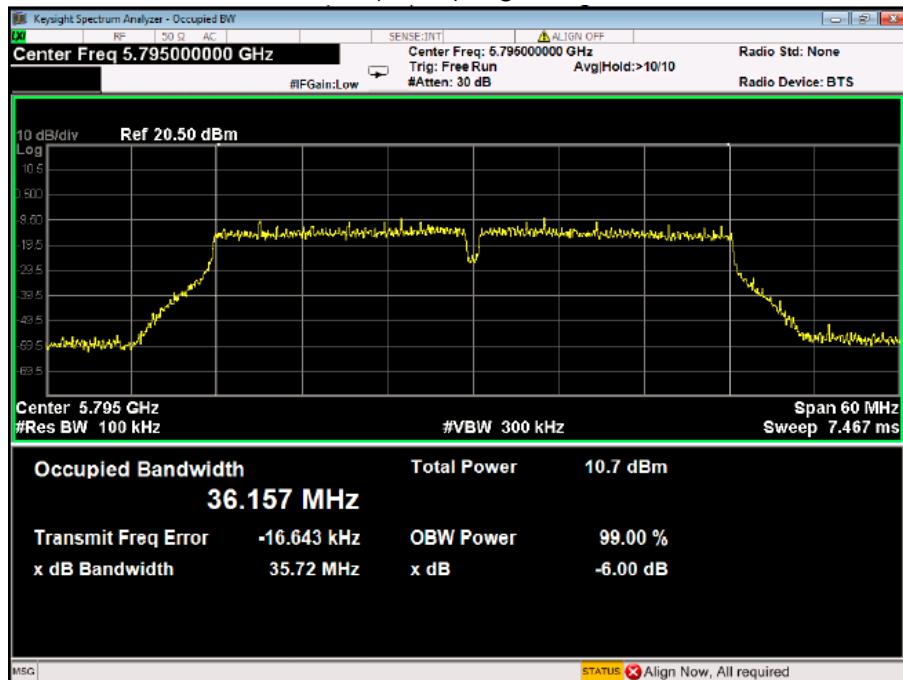

U-NII-3 11ac(HT80) Low CH 5775MHz

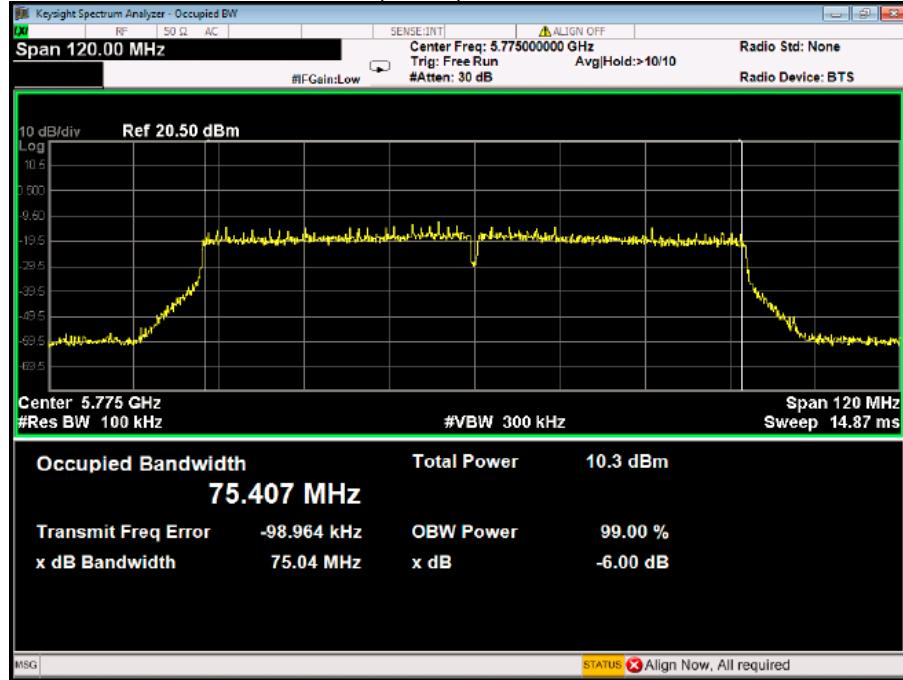

4 CONDUCTED OUTPUT POWER

4.1 limit

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	For FCC client devices: 250mW (24dBm)	5150-5250
	For RSS: e.i.r.p. power: not exceed 200 mW(23dBm) or $10 + 10 \log_{10} B$	
	250mW (24dBm) or $11 + 10 \log_{10} B$	5250-5350
	250mW (24dBm) or $11 + 10 \log_{10} B$	For FCC:5470-5725 For IC:5470-5600 5650-5725
	1 Watt (30dBm)	5725-5850

Note: For ISED: B=99% bandwidth.

4.2 test procedure

- Connect each EUT's antenna output to power meter by RF cable and attenuator
- Get each antenna port's output power of EUT.

4.3 TEST SETUP



4.4 test results

Band	Operation mode	Conducted Output Power (dBm)		
		Low	Middle	High
U-NII-1	802.11a	17.75	18.11	18.51
	802.11n(HT20)	16.31	16.99	16.81
	802.11n(HT40)	16.65	/	17.18
	802.11ac(HT20)	15.95	16.17	15.85
	802.11ac(HT40)	14.69	/	13.97
	802.11ac(HT80)	14.30	/	/
U-NII-3	802.11a	15.59	14.51	15.94
	802.11n(HT20)	13.57	12.73	13.57
	802.11n(HT40)	13.17	/	13.86
	802.11ac(HT20)	12.46	13.37	13.59
	802.11ac(HT40)	10.32	/	10.94
	802.11ac(HT80)	10.50	/	/

Limit: U-NII-1: 250mW(24dBm)
U-NII-3: 1W(30dBm)

5. POWER SPECTRAL DENSITY

5.1 LIMIT

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	For FCC: Other than Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250
	For RSS eirp:10dBm/MHz	
	11dBm/MHz	5250-5350
	11dBm/MHz	For FCC:5470-5725 For IC:5470-5600 5650-5725
	30dBm/500kHz	5725-5850

5.2 TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyser and use the following settings:

5725MHz-5850MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	500kHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto


Note:

1. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.

2. The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is - 3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

5.3 TEST SETUP

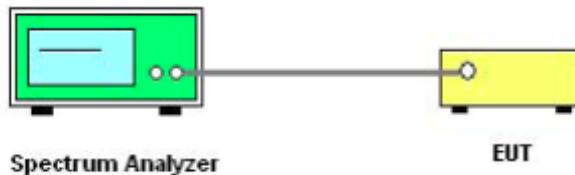

5.4 TEST RESULTS

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-1	802.11a	8.352	8.970	9.449
	802.11n(HT20)	7.247	8.185	7.687
	802.11n(HT40)	5.212	/	5.673
	802.11ac(HT20)	6.814	7.083	7.317
	802.11ac(HT40)	2.960	/	2.590
	802.11ac(HT80)	-0.037	/	/
	Limit	≤ 11.00 dBm/MHz		

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-3	802.11a	2.466	2.540	3.207
	802.11n(HT20)	1.266	1.101	1.660
	802.11n(HT40)	-0.455	/	0.881
	802.11ac(HT20)	-0.919	0.546	1.590
	802.11ac(HT40)	-4.752	/	-3.673
	802.11ac(HT80)	-7.231	/	/
	Limit	≤ 30 dBm/500kHz		


U-NII-3 Remark: PSD=PSD original data(RBW: 1MHZ, VBW: 3MHZ)+Factor
Factor= $10 \times \log (500/1000) = -0.301$

5.5 original test data

U-NII-1 802.11a Low CH




U-NII-1 802.11a Middle CH

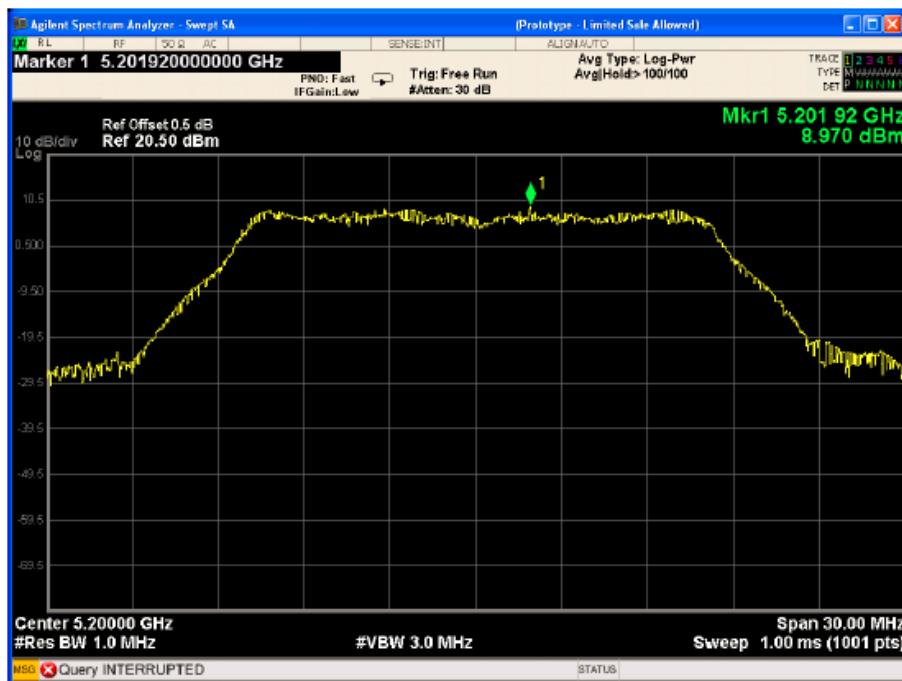


U-NII-1 802.11a High CH




U-NII-1 802.11n(HT20) Low CH

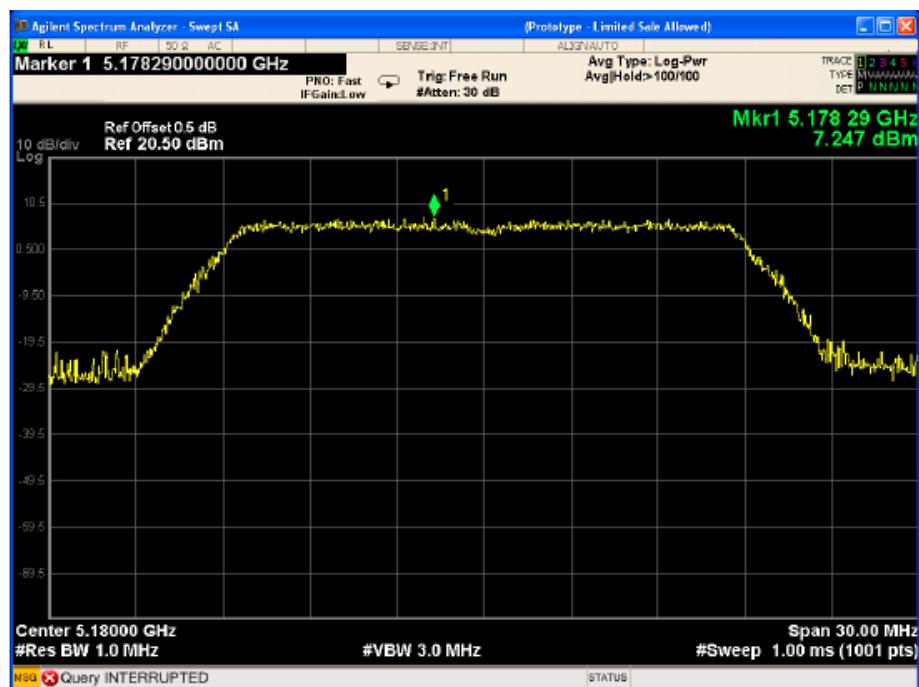

U-NII-1 802.11n(HT20) Middle CH

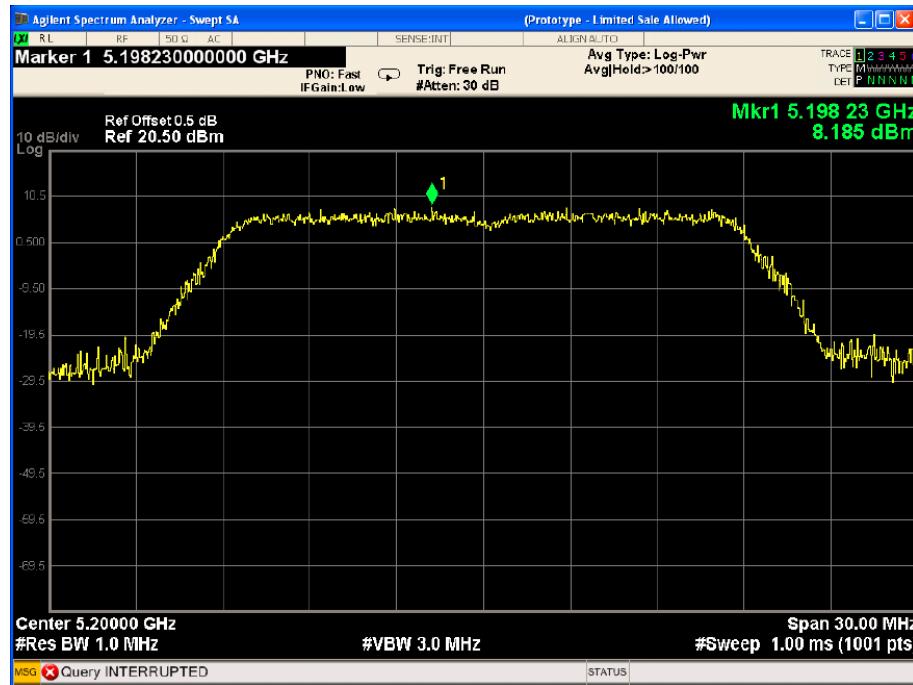

U-NII-1 802.11n(HT20) High CH

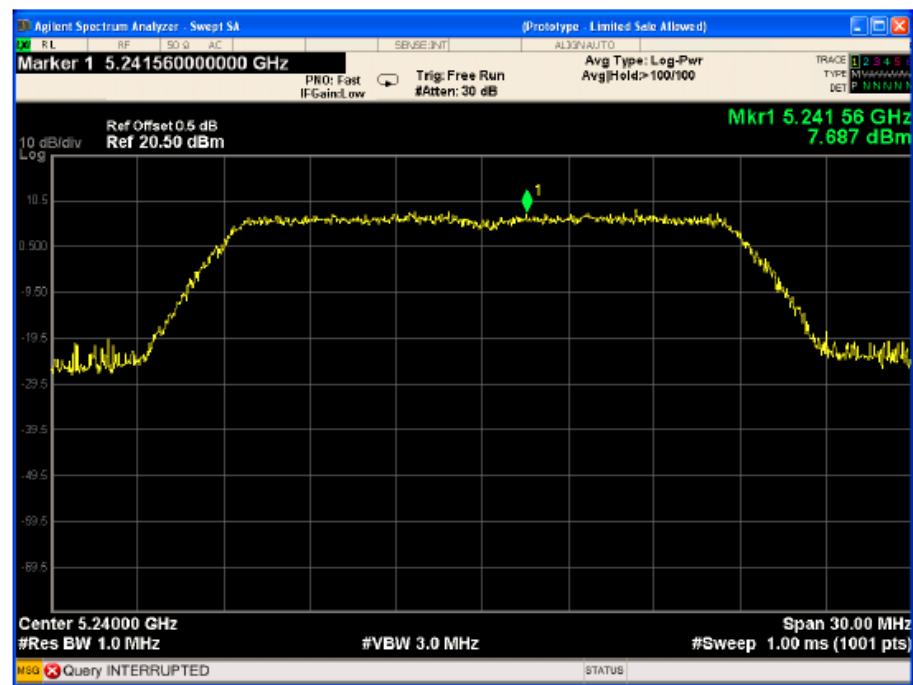


U-NII-1 802.11n(HT40) Low CH




U-NII-1 802.11n(HT40) High CH




U-NII-1 802.11ac(HT20) Low CH

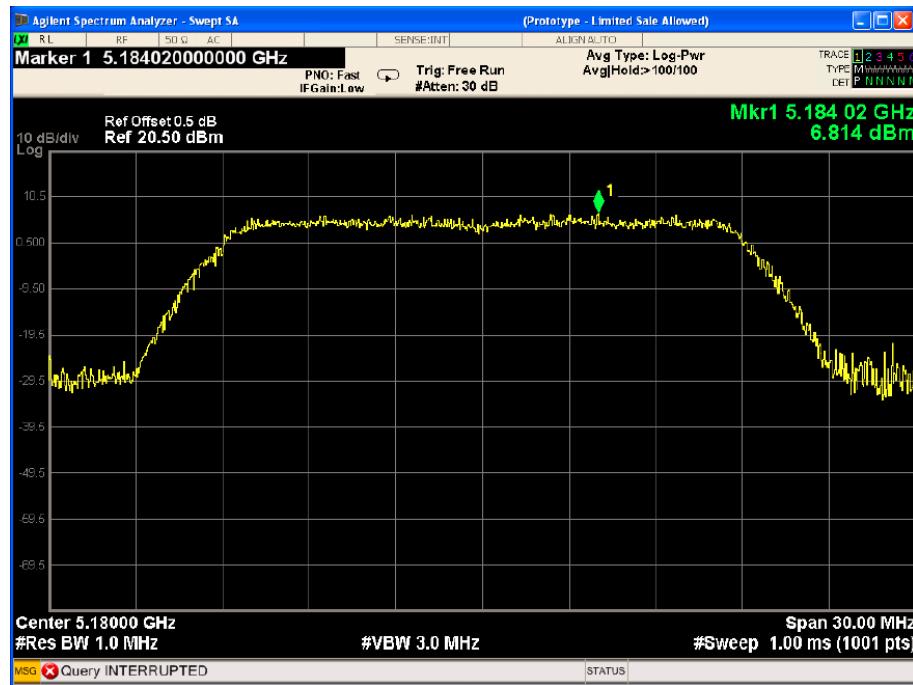


U-NII-1 802.11ac(HT20) Middle CH

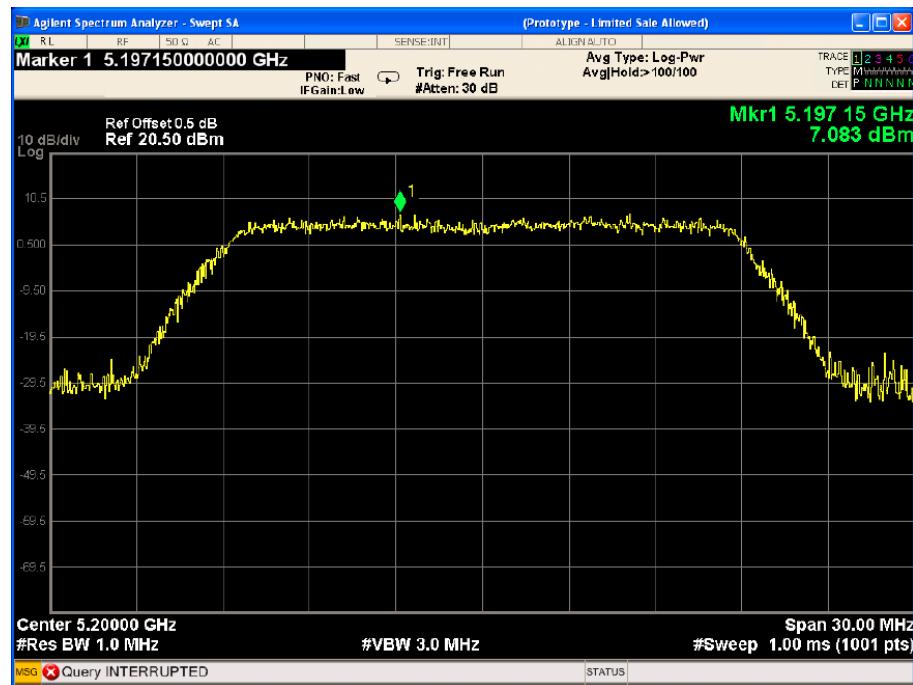


U-NII-1 802.11ac(HT20) High CH

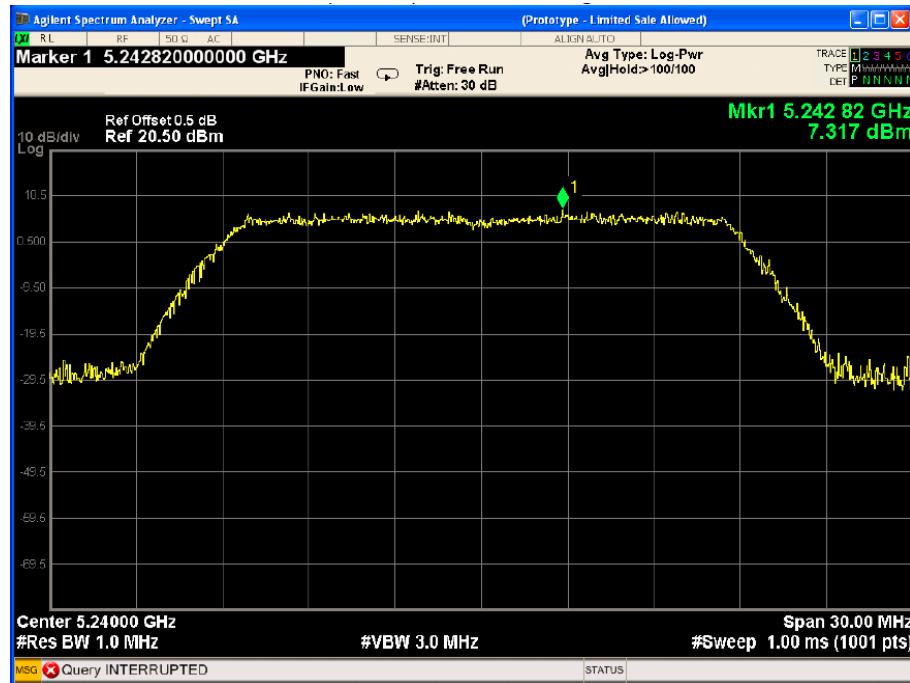

U-NII-1 802.11ac(HT40) Low CH

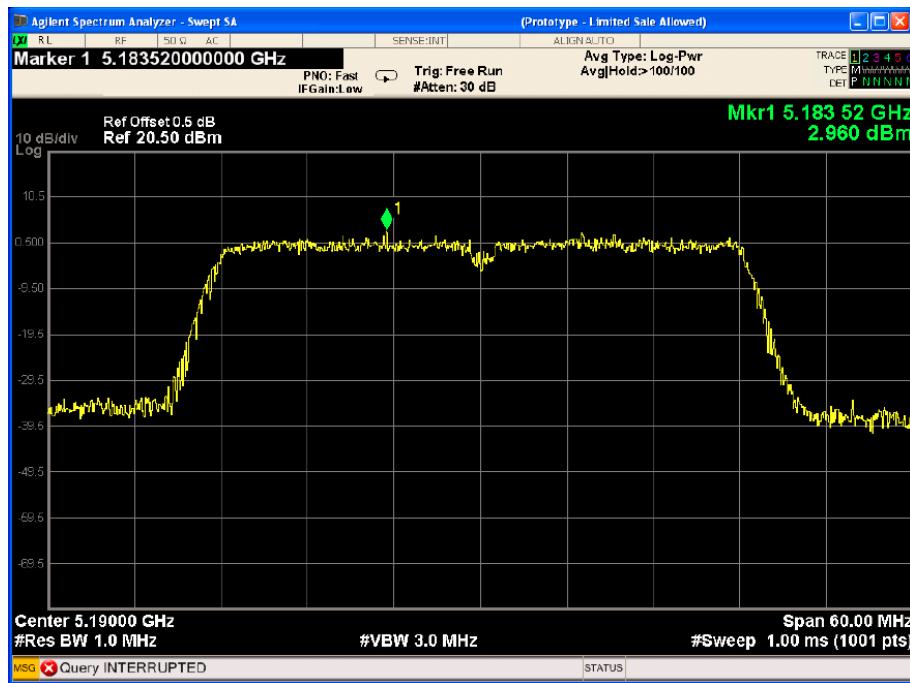

U-NII-1 802.11ac(HT40) High CH

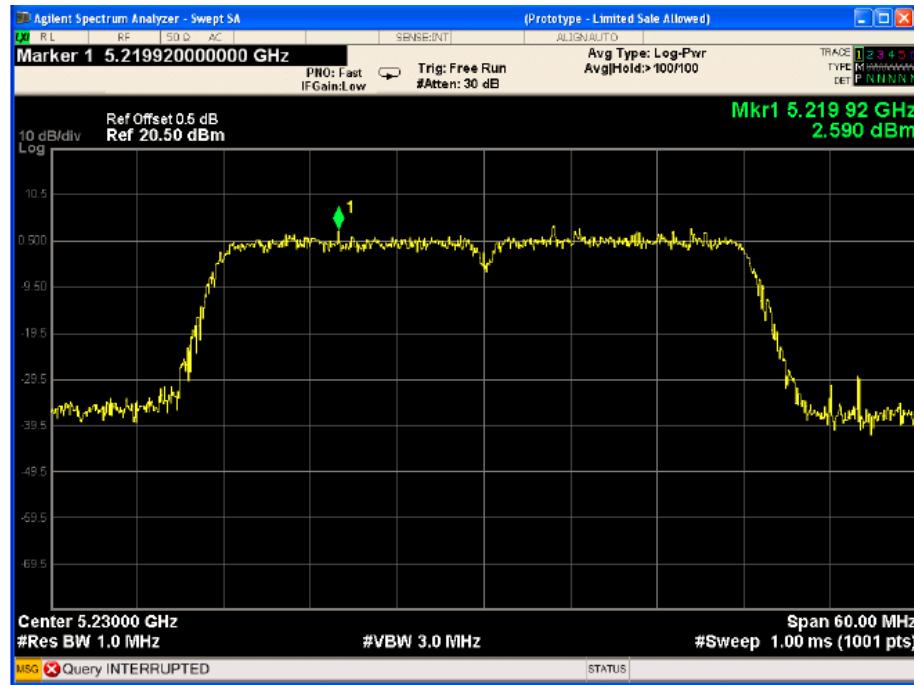

U-NII-1 802.11ac(HT80) Low CH



U-NII-3 802.11a Low CH




U-NII-3 802.11a Middle CH



U-NII-3 802.11a High CH



U-NII-3 802.11n(HT20) Low CH

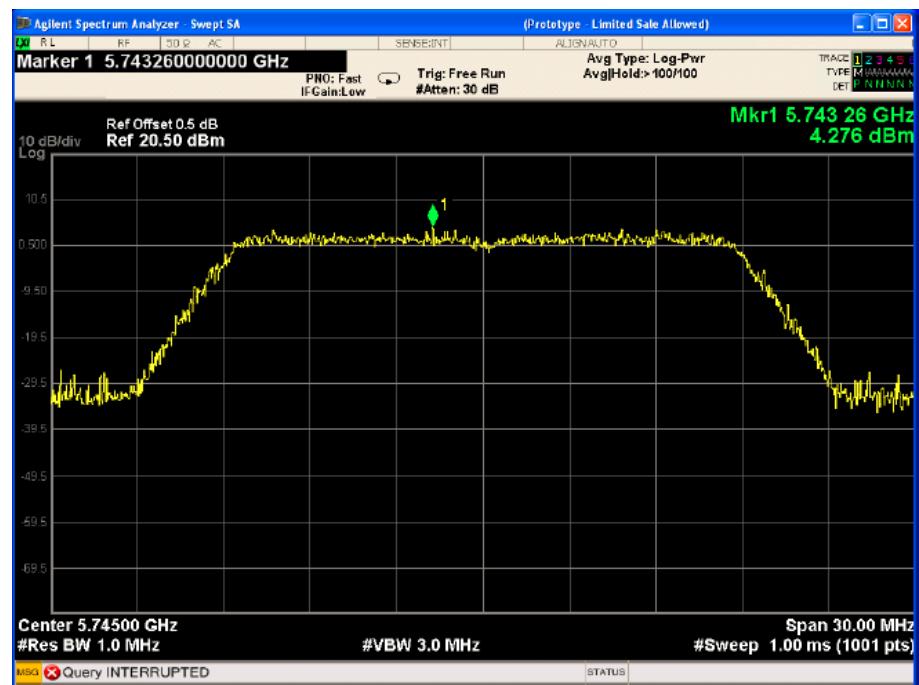

U-NII-3 802.11n(HT20) Middle CH



U-NII-3 802.11n(HT20) High CH




U-NII-3 802.11n(HT40) Low CH



U-NII-3 802.11n(HT40) High CH




U-NII-3 802.11ac(HT20) Low CH

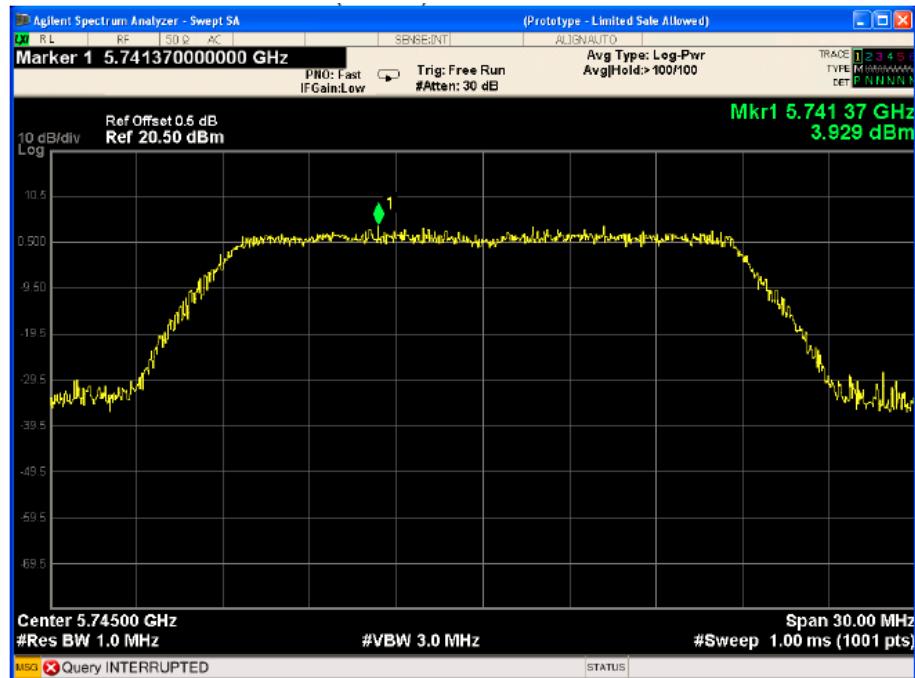

U-NII-3 802.11ac(HT20) Middle CH



U-NII-3 802.11ac(HT20) High CH

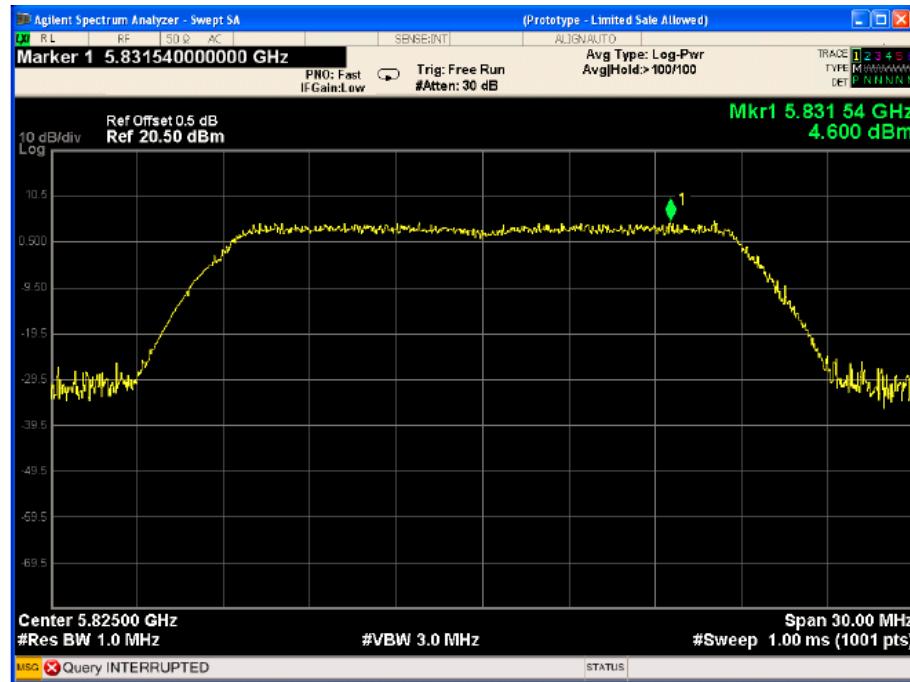


U-NII-3 802.11ac(HT40) Low CH



U-NII-3 802.11ac(HT40) High CH



U-NII-3 802.11ac(H840) Low CH

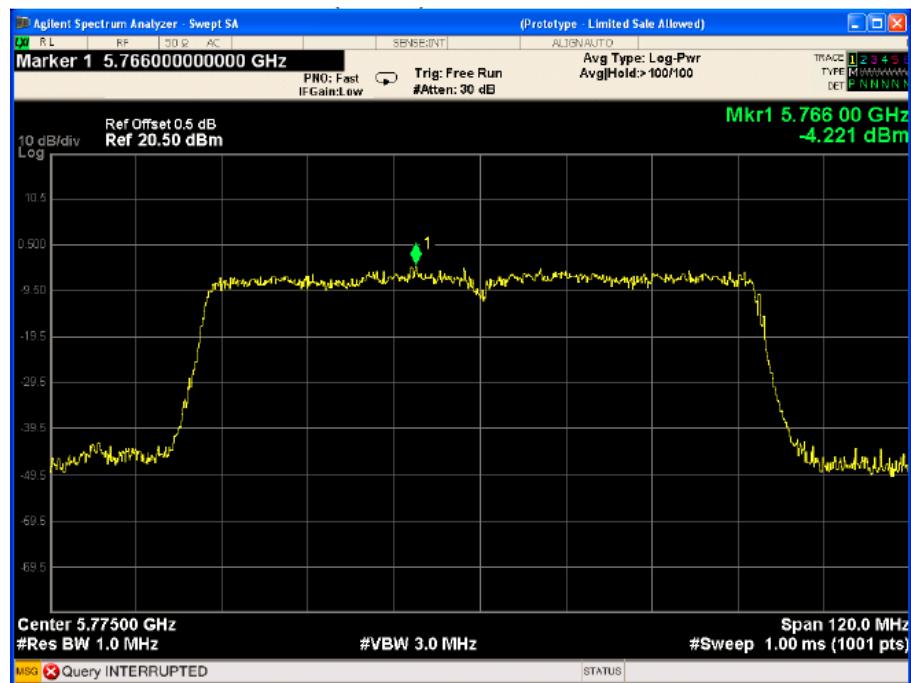

6. FREQUENCY STABILITY MEASUREMENT


6.1 LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual

6.2 TEST PROCEDURE

- (1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- (2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
- (3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

6.3 TEST SETUP

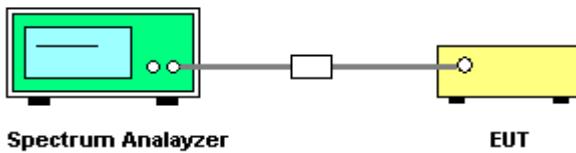

6.4 TEST RESULTS

U-NII-1 Test Frequency:5180MHz				
Temperature (°C)	Power Supply (DC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	12V	/	/	/
40		1807	2.1599	20
30		1800	2.1516	20
20		1806	2.1587	20
10		1800	2.1516	20
0		1803	2.1552	20
-10		1800	2.1516	20
-20		1809	2.1623	20
-30		/	/	/
20	10.2V	1810	2.1635	20
20	13.8V	1798	2.1492	20

U-NII-3 Test Frequency:5785MHz				
Temperature (°C)	Power Supply (DC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	12V	/	/	/
40		1919	2.2938	20
30		1911	2.2842	20
20		1915	2.2890	20
10		1923	2.2986	20
0		1907	2.2795	20
-10		1908	2.2807	20
-20		1914	2.2878	20
-30		/	/	/
20	10.2V	1918	2.2926	20
20	13.8V	1906	2.2783	20

7. BAND EDGE

7.1 LIMIT

For transmitters operating in the 5.15-5.25 GHz and 5.725-5.85G band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

$$-27 \text{ dBm/MHz Limit} = 95.2 + \text{EIRP[dBm]} = 95.2 - 27 = 68.2 \text{ dB}\mu\text{V/m}$$

7.2 TEST PROCEDURE

(1) EUT height should be 0.8m for below 1GHz at a semi-anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi-anechoic chamber ground with absorbers

(2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test distance
9kHz-30MHz	Active Loop antenna	3m
30MHz-1GHz	Trilog Broadband Antenna	3m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(4) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9kHz to 40GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m (Except loop antenna, it's fixed 1m above ground.)

- (b) Change work frequency or channel of device if practicable.
- (c) Change modulation type of device if practicable.
- (d) Change power supply range from 85% to 115% of the rated supply voltage
- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9kHz to 40GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 40GHz, so below final test was performed with frequency range from 30MHz to 18GHz.


(6) The emissions from 9kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz, for emissions from 9kHz-90kHz, 110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit

(7) The emissions from 9kHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9kHz-150kHz	200Hz
150kHz-30MHz	9kHz
30MHz-1GHz	120kHz

(8) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz, Peak detector for Peak measure, RMS detector for AV value

7.3 TEST SETUP

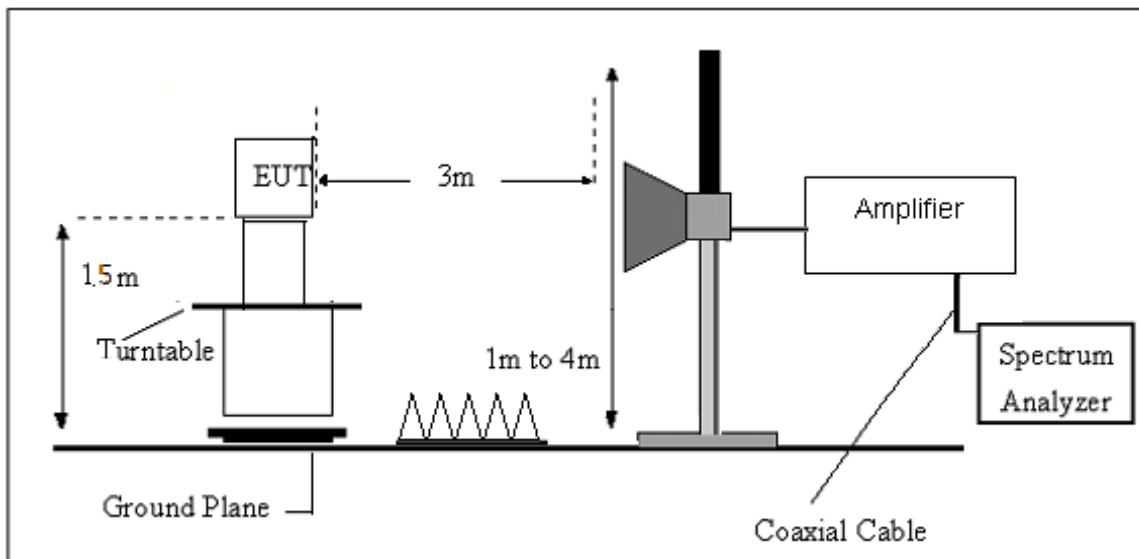


7.5 TEST RESULTS

7.5 Original test data


U-NII-1 802.11a left side




U-NII-1 802.11a Right side

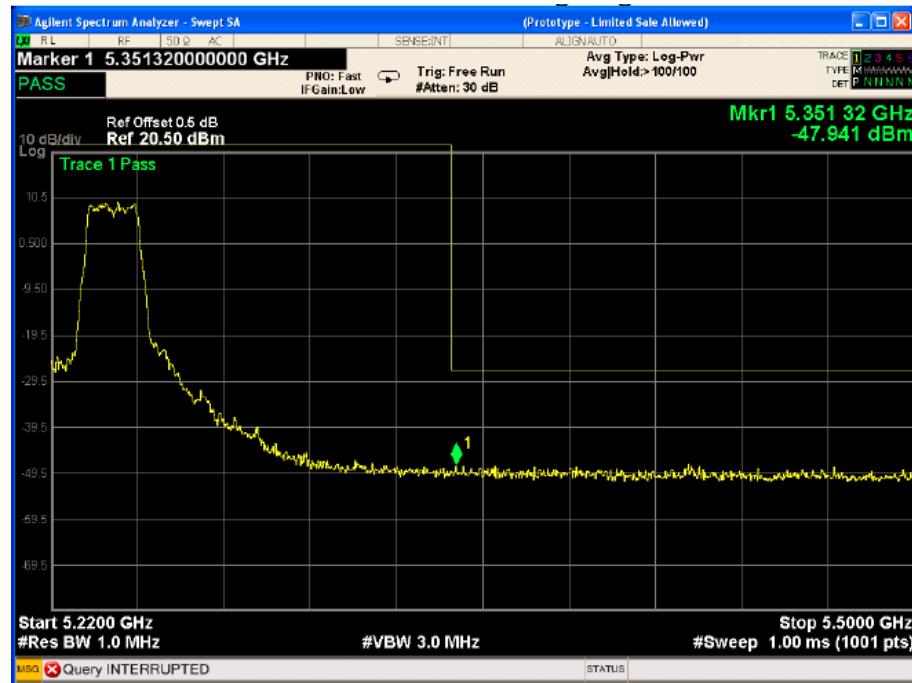


U-NII-3 802.11a left side

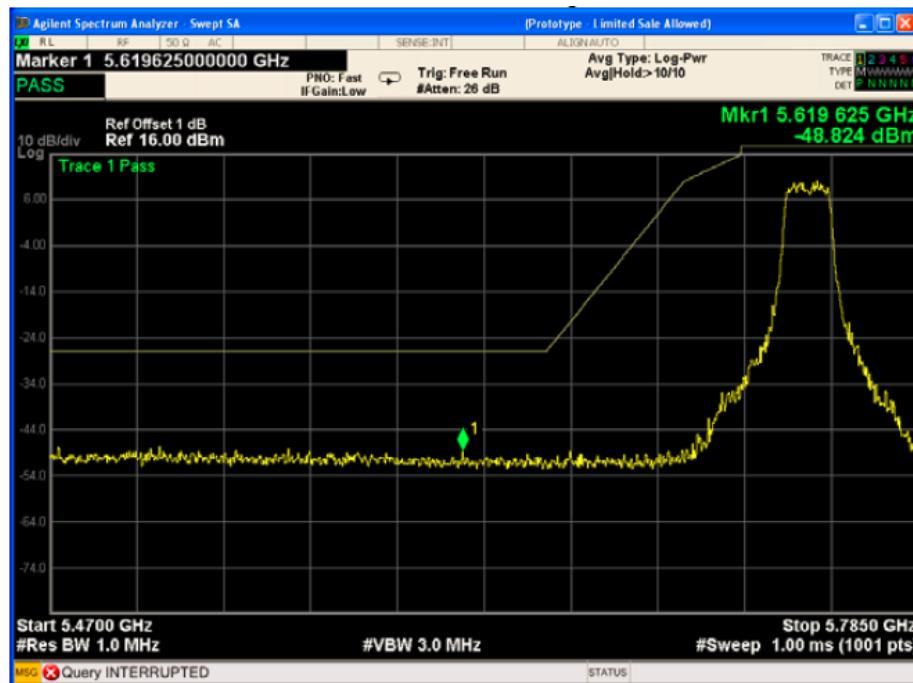


U-NII-3 802.11a right side

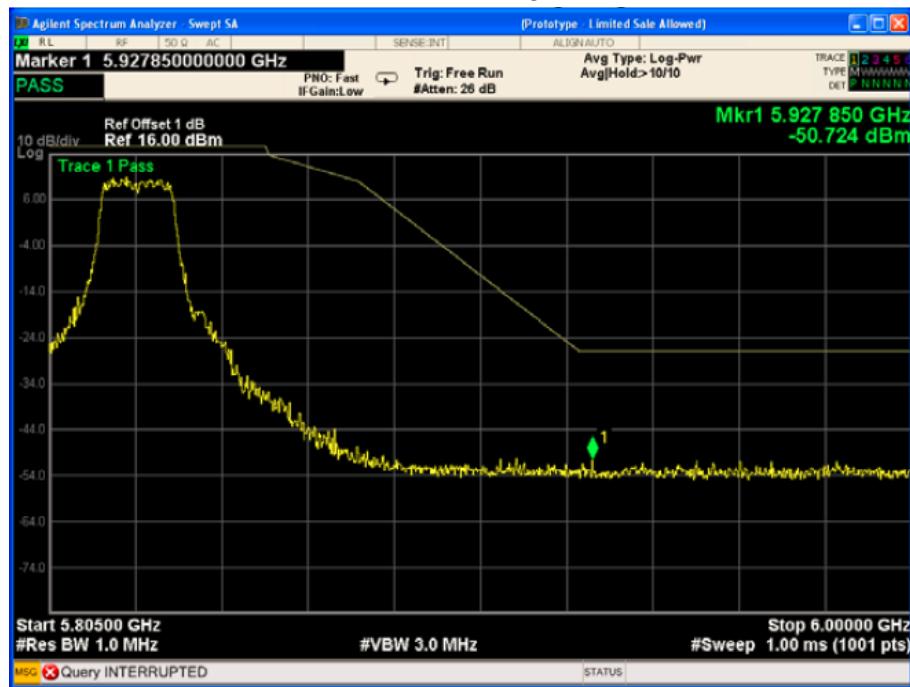


U-NII-1 802.11n(HT20) left side

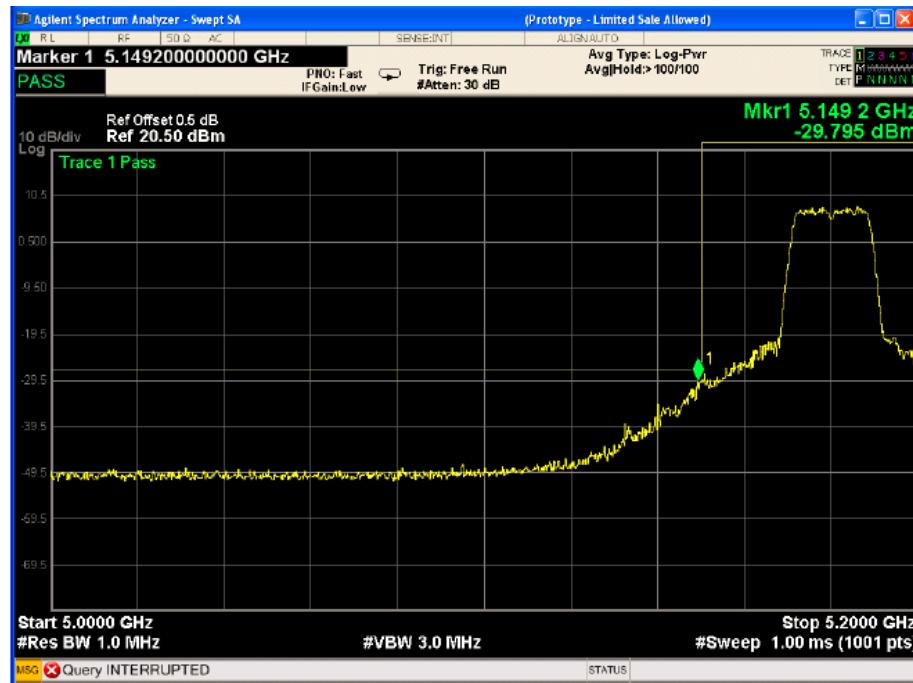


U-NII-1 802.11n(HT20) Right side

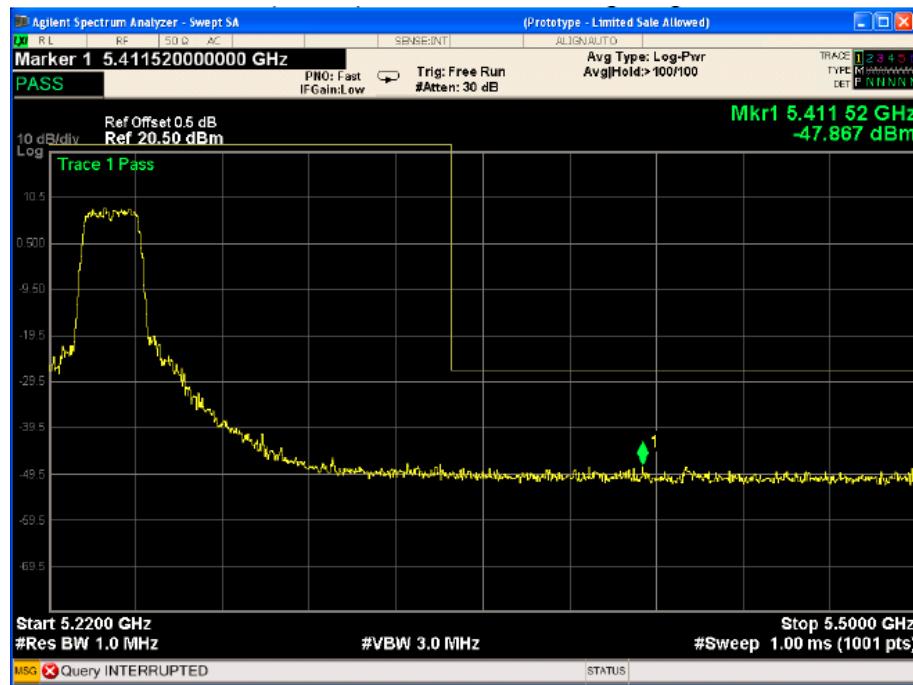


U-NII-3 802.11n(HT20) left side

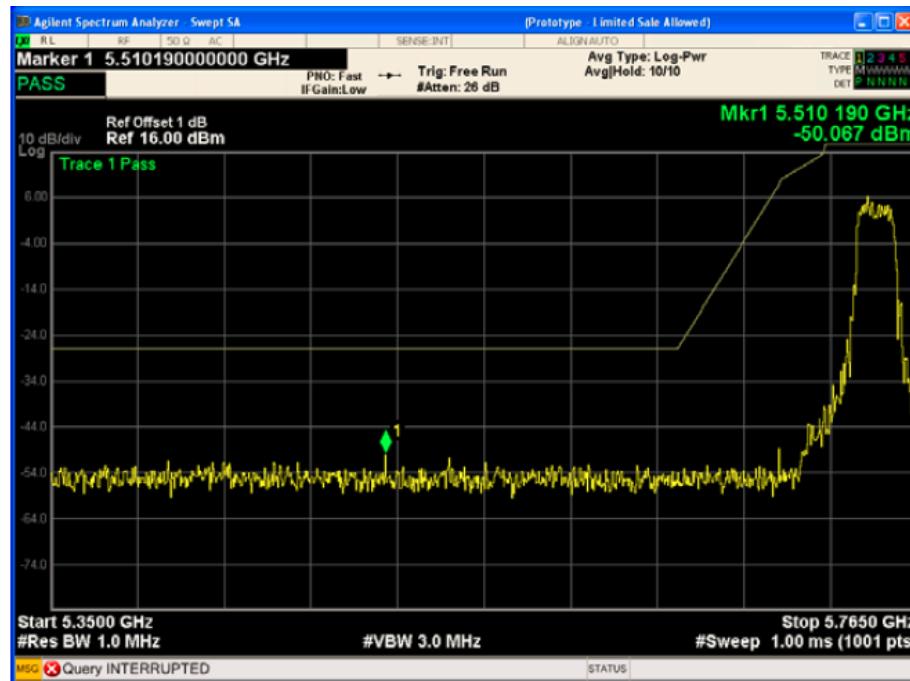


U-NII-3 802.11n(HT20) Right side

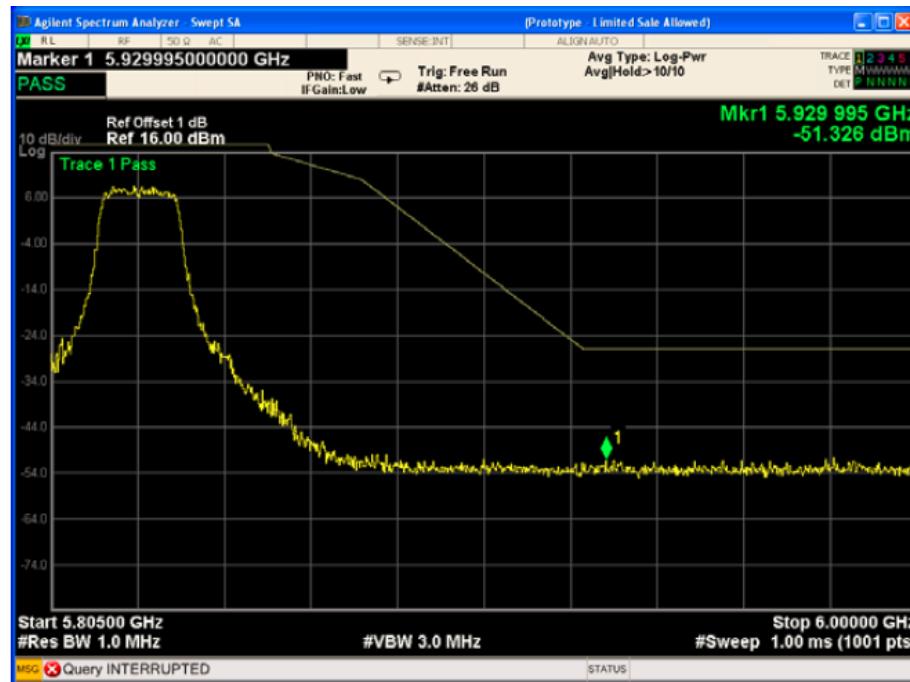


U-NII-1 802.11n(HT40) left side

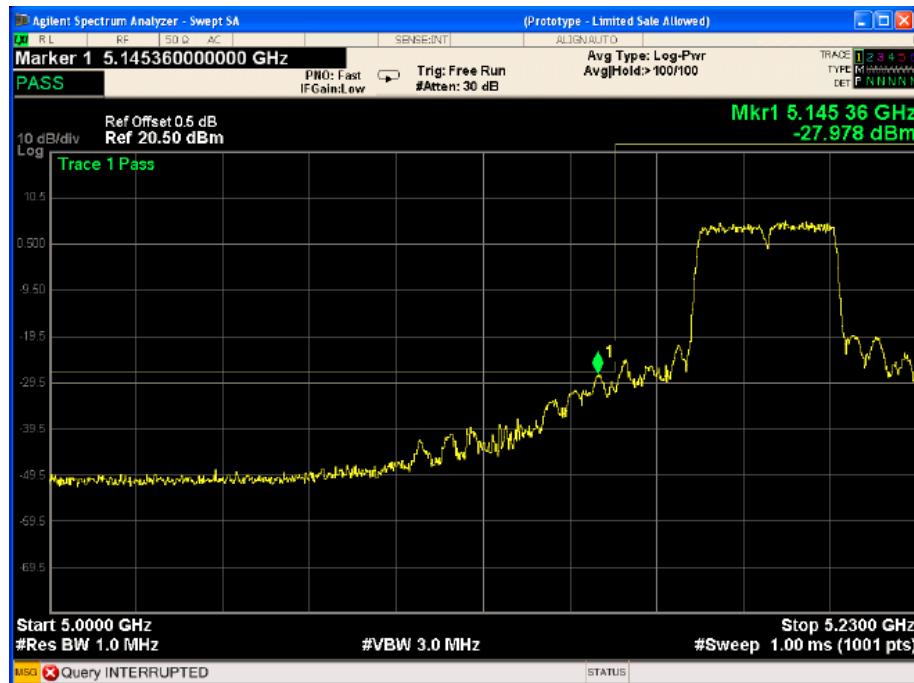

U-NII-1 802.11n(HT40) Right side

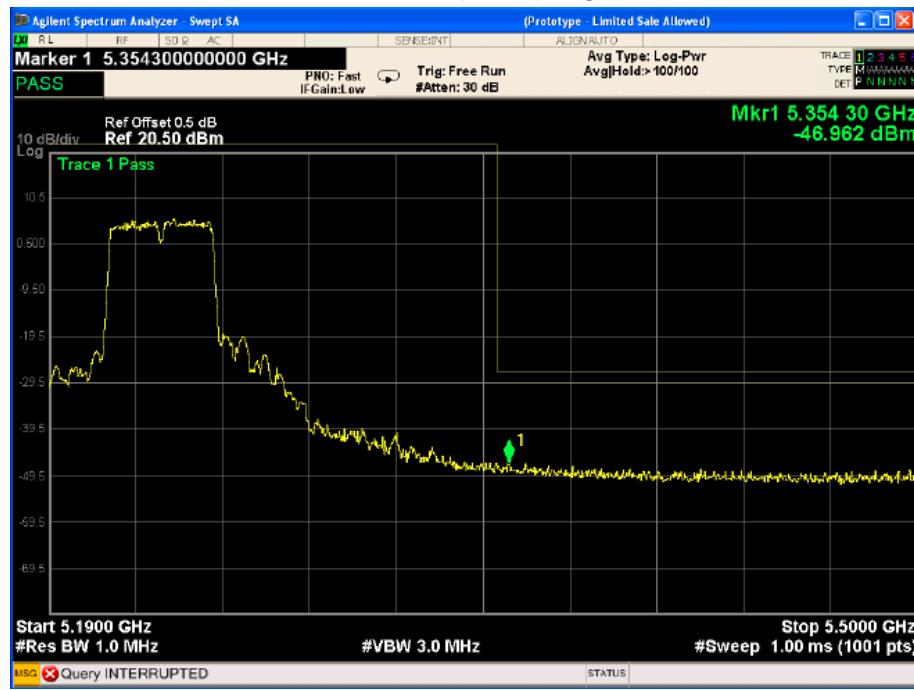

U-NII-3 802.11n(HT40) left side

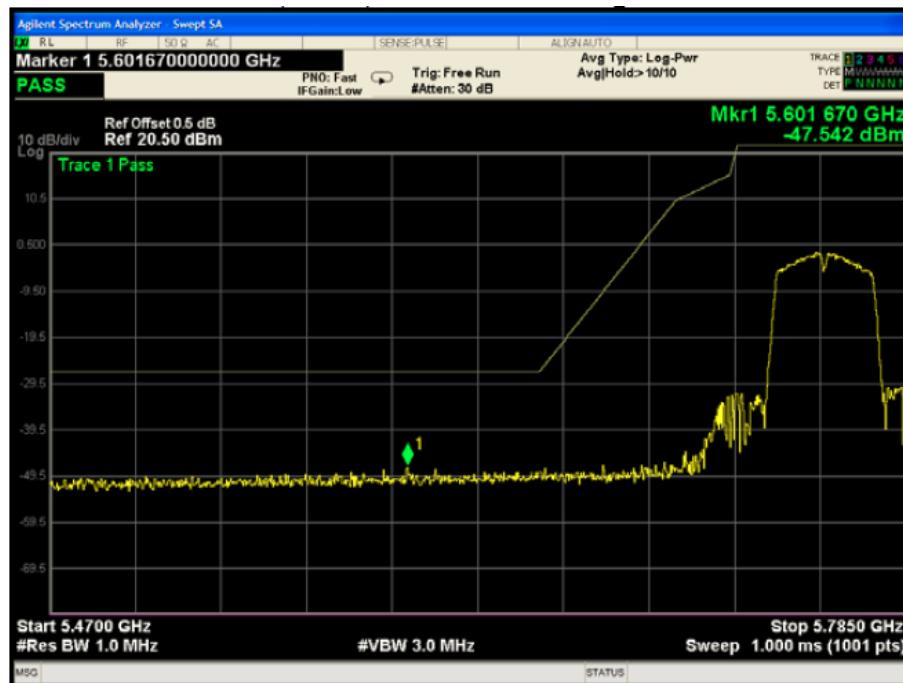


U-NII-3 802.11n(HT40) Right side




U-NII-1 802.11ac(HT20) left side




U-NII-1 802.11ac(HT20) Right side

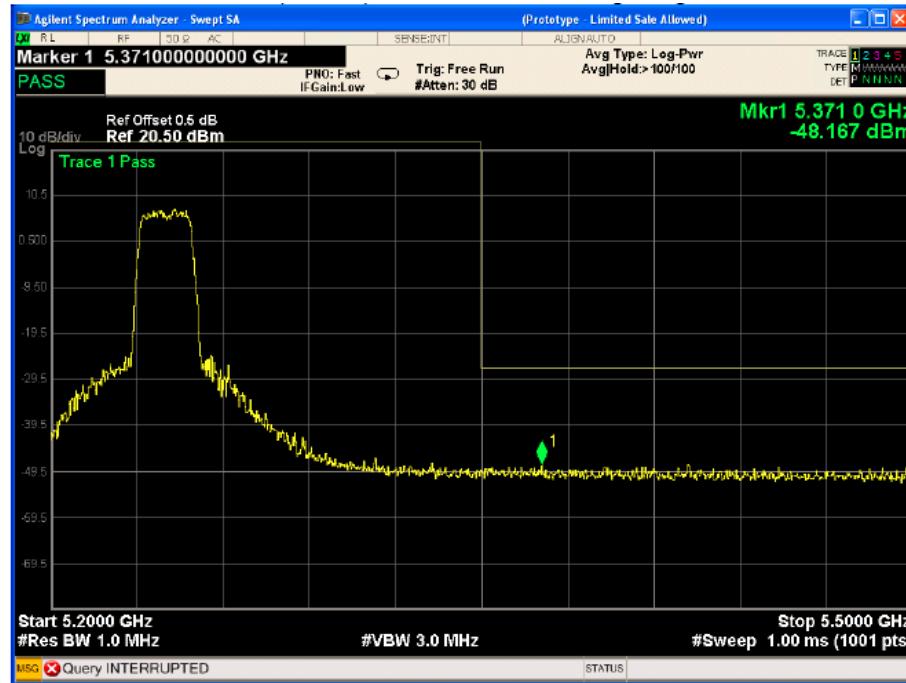


U-NII-3 802.11ac(HT20) left side

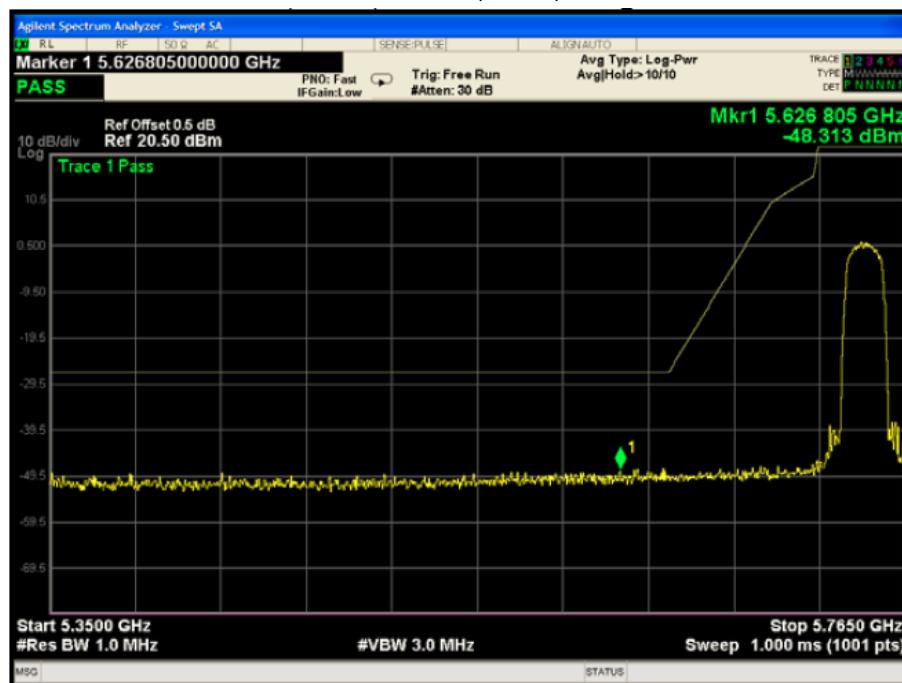

U-NII-3 802.11ac(HT20) Right side

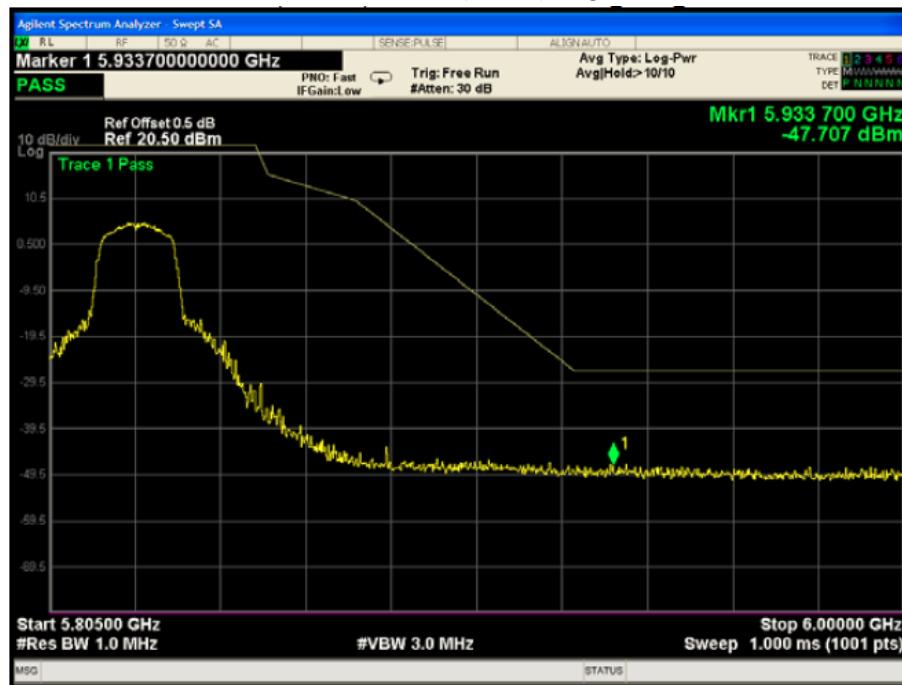


U-NII-1 802.11ac(HT40) left side

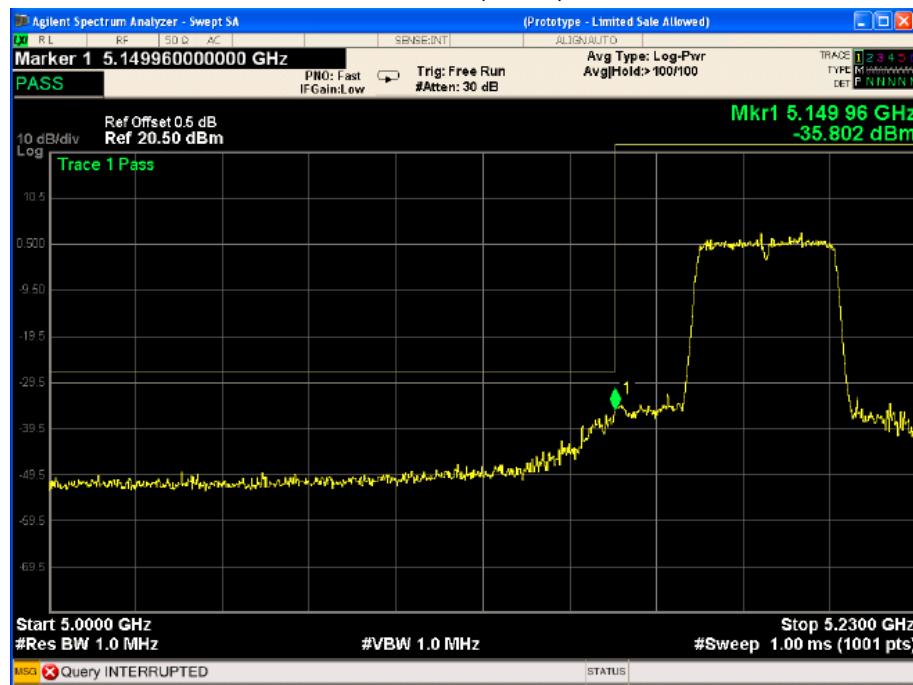


U-NII-1 802.11ac(HT40) Right side




U-NII-3 802.11ac(HT40) left side

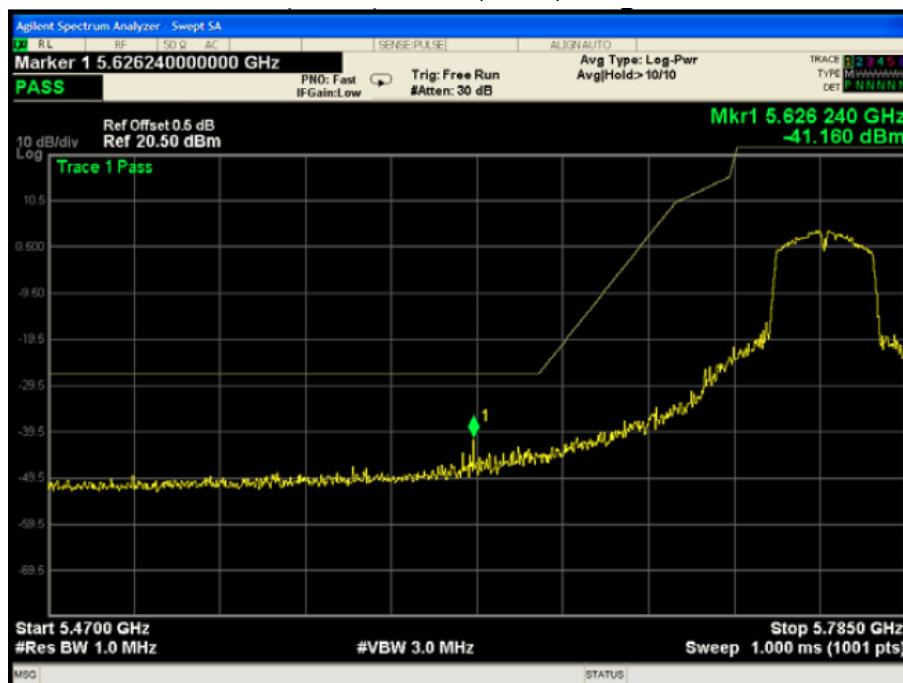


U-NII-3 802.11ac(HT40) Right side

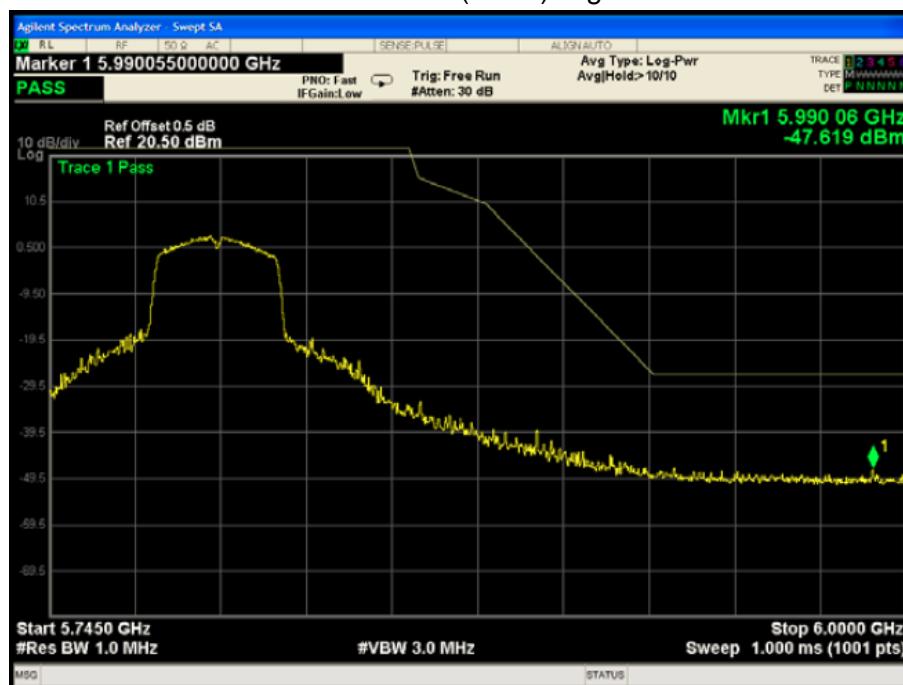

U-NII-1 802.11ac(HT80) left side

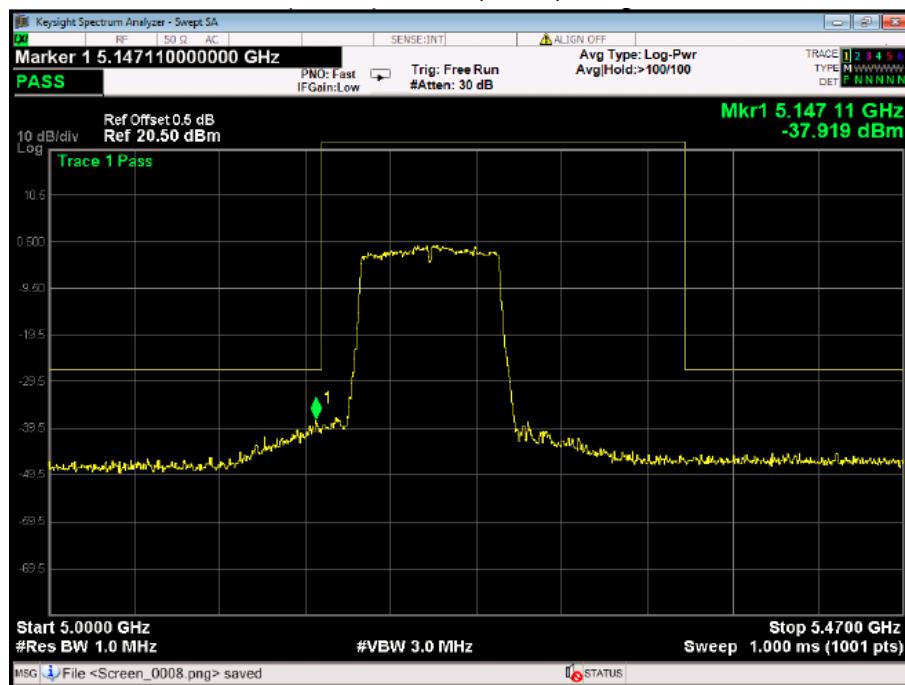

U-NII-1 802.11ac(HT80) Right side

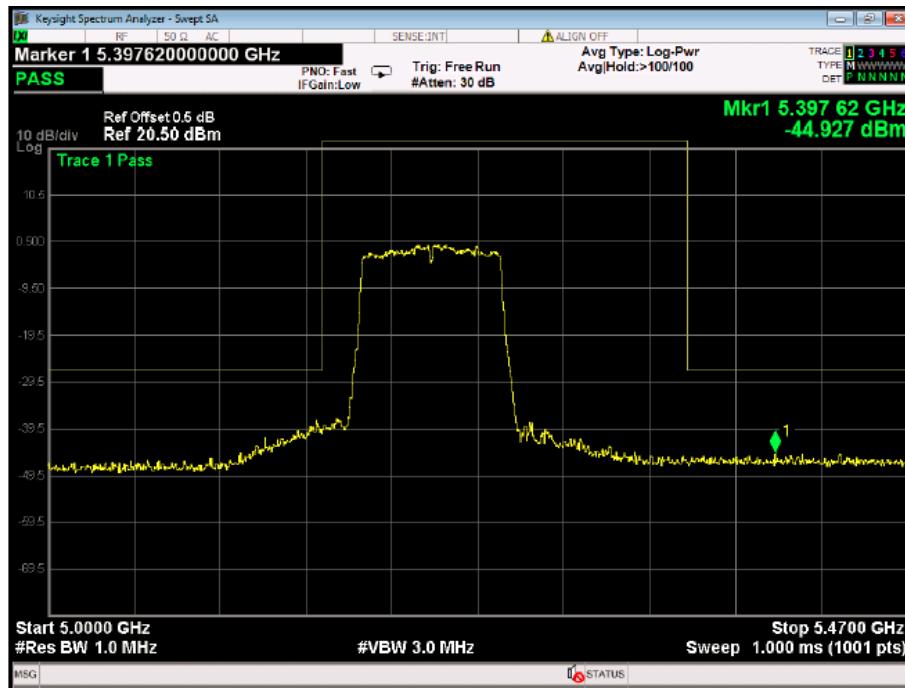

U-NII-3 802.11ac(HT80) left side



U-NII-3 802.11ac(HT80) Right side



8. Duty Cycle

8.1 TEST REQUIREMENT

47 CFR Part 15C 15.407 and 789033 D02 General UNII Test


Procedures New Rules v02r01(December 14, 2017), Section (B)

ANSI C63.10: 2013

8.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

7.3 TEST SETUP

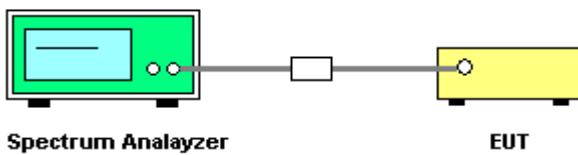

8.4 TEST RESULTS

802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
52	100	100	100
149	100	100	100

802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
52	100	100	100
149	100	100	100

802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
54	100	100	100
151	100	100	100

802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
52	100	100	100
149	100	100	100

802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
54	100	100	100

151	100	100	100
802.11ac(HT80) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100
58	100	100	100
155	100	100	100

9 RADIATED EMISSION MEASUREMENT

9.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz

9.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

9.3 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

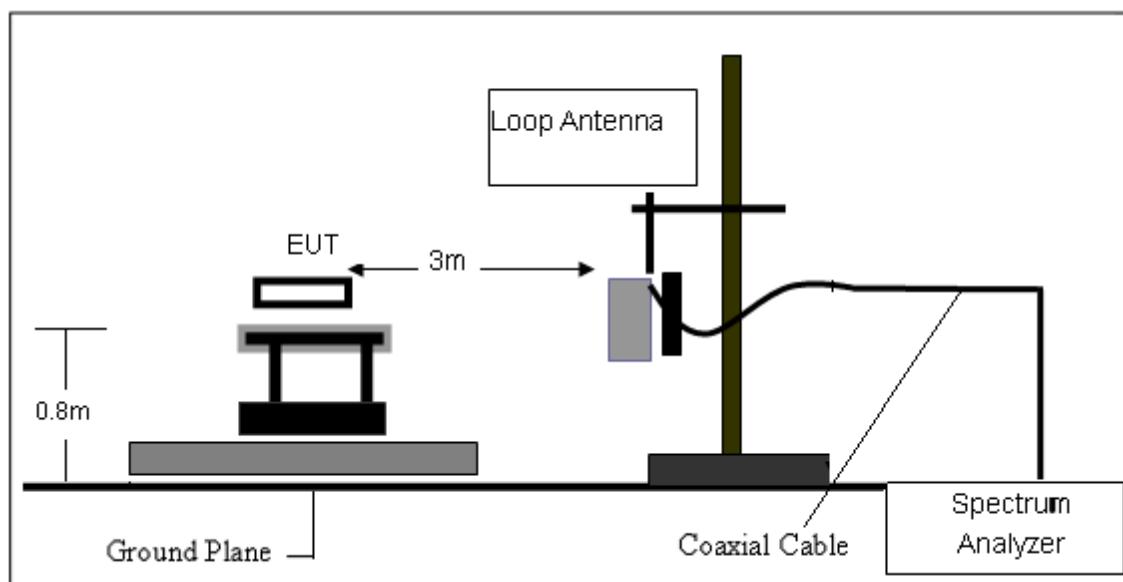

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

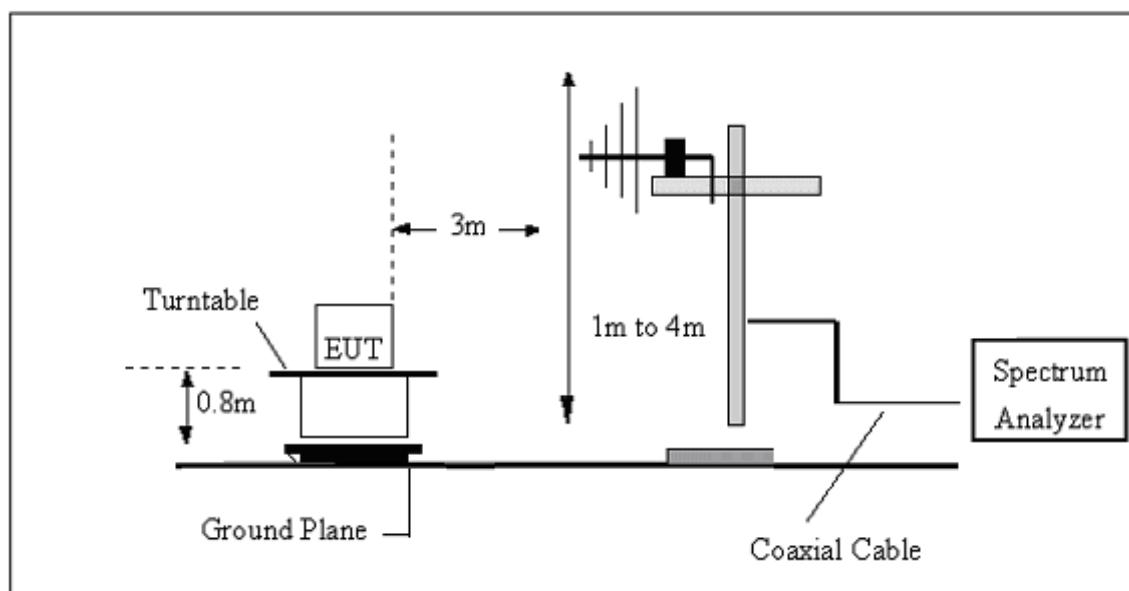

(C) Radiated Emission Test-Up Frequency Above 1GHz

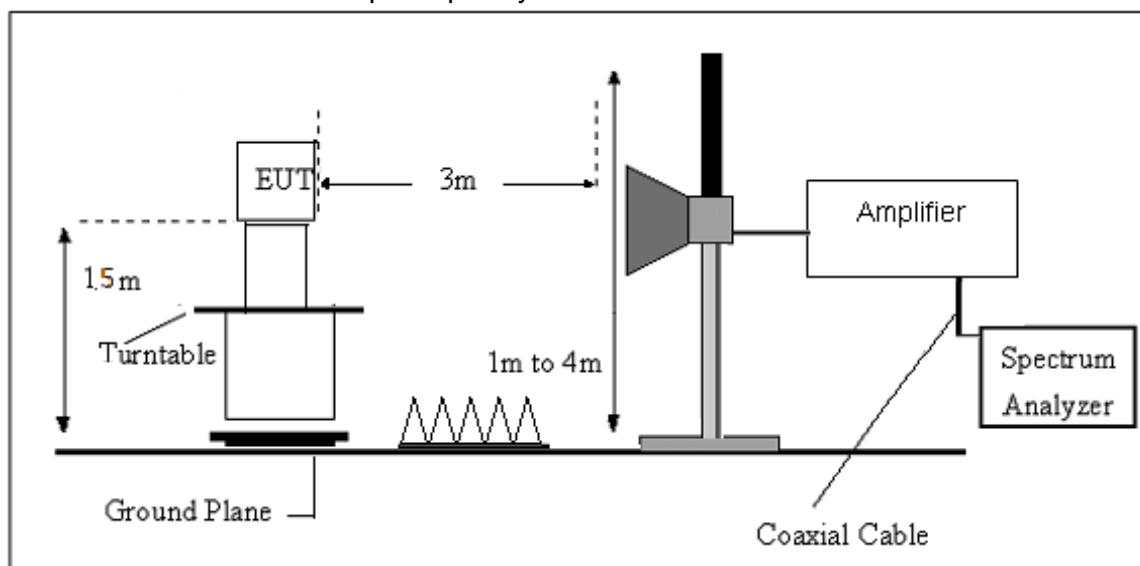

9.4. TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	/	Test Mode:	/

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

(30MHz~40GHz) Restricted band and Spurious emission Requirements

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
223.45	39.99	QP	242	1.2	H	-11.62	28.37	46.00	-17.63
223.45	35.21	QP	57	1.3	V	-11.62	23.59	46.00	-22.41
4500.37	49.00	PK	109	1.8	H	-2.03	46.97	74.00	-27.03
4500.37	45.66	Ave	109	1.8	H	-2.03	43.63	54.00	-10.37
10360.00	41.87	PK	359	1.3	H	5.33	47.20	74.00	-26.80
10360.00	36.00	Ave	359	1.3	H	5.33	41.33	54.00	-12.67
802.11a U-NII-1 Middle channel 5200MHz									
223.45	40.79	QP	286	1.2	H	-11.62	29.17	46.00	-16.83
223.45	34.59	QP	164	1.2	V	-11.62	22.97	46.00	-23.03
4531.52	50.05	PK	246	1.8	H	-1.94	48.11	74.00	-25.89
4531.52	44.98	Ave	246	1.8	H	-1.94	43.04	54.00	-10.96
10400.00	42.05	PK	110	1.6	H	5.21	47.26	74.00	-26.74
10400.00	36.17	Ave	110	1.6	H	5.21	41.38	54.00	-12.62
802.11a U-NII-1 High channel 5240MHz									
223.45	39.33	QP	308	1.5	H	-11.62	27.71	46.00	-18.29
223.45	35.16	QP	48	1.8	V	-11.62	23.54	46.00	-22.46
4502.74	49.98	PK	298	1.7	H	-2.24	47.74	74.00	-26.26
4502.74	43.84	Ave	298	1.7	H	-2.24	41.60	54.00	-12.40
10480.00	42.03	PK	118	1.4	H	5.14	47.17	74.00	-26.83
10480.00	35.42	Ave	118	1.4	H	5.14	40.56	54.00	-13.44

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a U-NII-3 Low Channel 5745MHz									
223.45	39.11	QP	339	1.4	H	-11.62	27.49	46.00	-18.51
223.45	33.84	QP	97	2.0	V	-11.62	22.22	46.00	-23.78
4504.10	49.22	PK	114	1.3	H	-2.06	47.16	74.00	-26.84
4504.10	44.02	Ave	114	1.3	H	-2.06	41.96	54.00	-12.04
11490.00	43.05	PK	327	1.5	H	5.93	48.98	74.00	-25.02
11490.00	37.22	Ave	327	1.5	H	5.93	43.15	54.00	-10.85
802.11a U-NII-3 Middle channel 5785MHz									
223.45	37.86	QP	197	1.2	H	-11.62	26.24	46.00	-19.76
223.45	33.33	QP	359	1.1	V	-11.62	21.71	46.00	-24.29
4505.68	49.64	PK	301	1.1	H	-2.03	47.61	74.00	-26.39
4505.68	44.19	Ave	301	1.1	H	-2.03	42.16	54.00	-11.84
11570.00	42.39	PK	67	1.2	H	5.81	48.20	74.00	-25.80
11570.00	37.03	Ave	67	1.2	H	5.81	42.84	54.00	-11.16
802.11a U-NII-3 High channel 5825MHz									
223.45	36.43	QP	134	1.3	H	-11.62	24.81	46.00	-21.19
223.45	33.58	QP	238	1.1	V	-11.62	21.96	46.00	-24.04
4506.47	49.90	PK	27	1.2	H	-1.84	48.06	74.00	-25.94
4506.47	45.26	Ave	27	1.2	H	-1.84	43.42	54.00	-10.58
11650.00	40.65	PK	188	1.5	H	5.84	46.49	74.00	-27.51
11650.00	36.39	Ave	188	1.5	H	5.84	42.23	54.00	-11.77

Note:

All model are tested. Only show worst data on report.

10 CONDUCTED EMISSION TEST

10.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

10.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

10.3 TEST SETUP

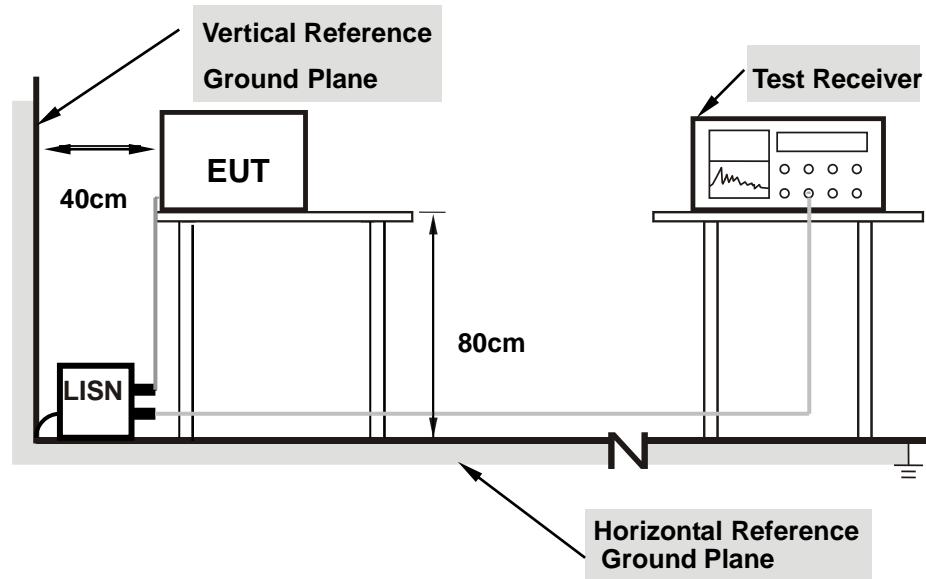


Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

10.4 TEST RESULT

Temperature:	22.1 °C	Relative Humidity:	56%
Test Voltage:	120V/60HZ	Phase:	L/N
Test Mode:	ON		

L-line

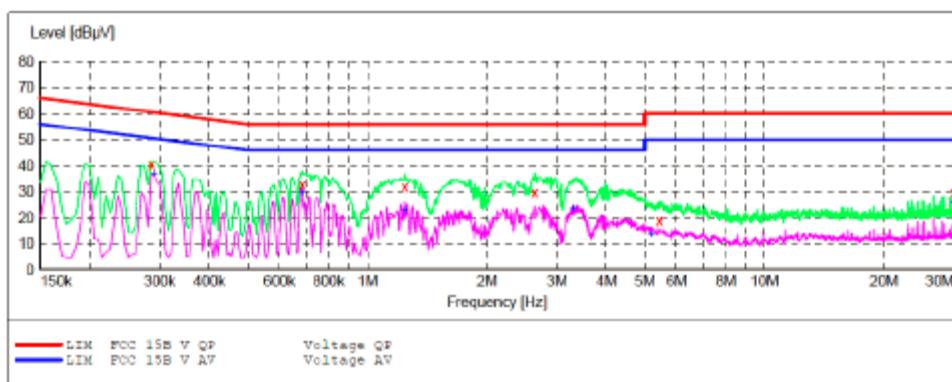


MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.285000	40.10	10.6	60.7	20.6	QP	L1	GND
0.685000	32.50	10.8	56	23.5	QP	L1	GND
1.245000	31.70	10.9	56	24.3	QP	L1	GND
2.640000	29.80	11.0	56	26.2	QP	L1	GND
5.450000	18.90	11.2	60	41.1	QP	L1	GND
30.000000	29.80	11.5	60	30.2	QP	L1	GND

MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.290000	37.10	10.6	50.5	13.4	AV	L1	GND
0.685000	30.00	10.8	46	16.0	AV	L1	GND
1.240000	23.00	10.9	46	23.0	AV	L1	GND
3.300000	23.60	11.1	46	22.4	AV	L1	GND
5.180000	13.70	11.2	50	36.3	AV	L1	GND
30.000000	25.60	11.5	50	24.4	AV	L1	GND

N-line

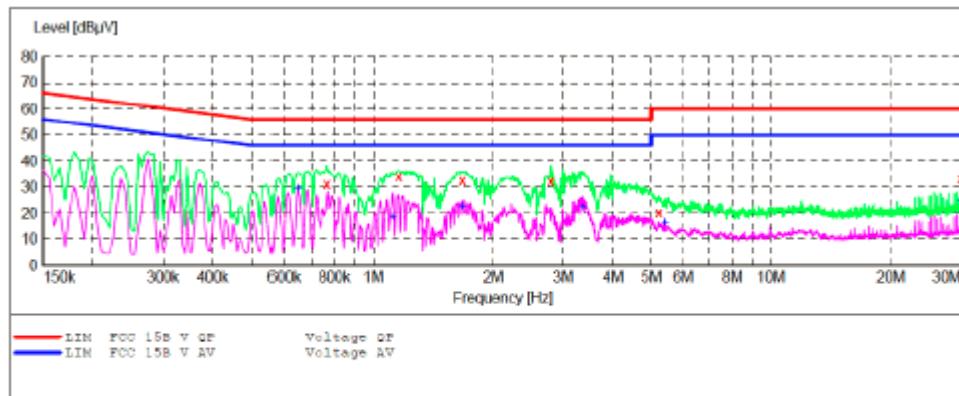

MEASUREMENT RESULT :

Frequency MHz	Level dBpV	Transd dB	Limit dBpV	Margin dB	Detector	Line	PE
0.765000	31.00	10.8	56	25.0	QP	N	GND
1.160000	34.00	10.9	56	22.0	QP	N	GND
1.675000	32.70	10.9	56	23.3	QP	N	GND
2.800000	32.20	11.0	56	23.8	QP	N	GND
5.210000	20.20	11.2	60	39.8	QP	N	GND
30.000000	33.30	11.5	60	26.7	QP	N	GND

MEASUREMENT RESULT :

Frequency MHz	Level dBpV	Transd dB	Limit dBpV	Margin dB	Detector	Line	PE
0.645000	29.80	10.8	46	16.2	AV	N	GND
1.120000	18.80	10.9	46	27.2	AV	N	GND
1.675000	22.80	10.9	46	23.2	AV	N	GND
3.360000	22.50	11.1	46	23.5	AV	N	GND
5.410000	16.50	11.2	50	33.5	AV	N	GND
30.000000	24.60	11.5	50	25.4	AV	N	GND

11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 RESULT

The antennas used for this product are external antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0.dBi.

※※※※※END OF THE REPORT※※※※※