



TESTING LABORATORY  
CERTIFICATE #4820.01



FCC PART 15.247

## TEST REPORT

For

**Anhui Sanan Technology Co., Ltd.**

No. 8 DONGLIANG ROAD, ECONOMIC TECHNOLOGICAL DEVELOPMENT AREA 241000 WUHU,  
ANHUI, CHINA

**FCC ID: 2ATK9-N002D4SK0115**

|                                        |                                                                                                                                                                                                                                                       |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report | <b>Product Name:</b><br>Splicing Light                                                                                                                                                                                                                |
| <b>Report Number:</b> RXM190613050-00A |                                                                                                                                                                                                                                                       |
| <b>Report Date:</b> 2019-07-15         |                                                                                                                                                                                                                                                       |
| <b>Reviewed By:</b>                    | Jerry Zhang<br>EMC Manager                                                                                                                                                                                                                            |
| <b>Test Laboratory:</b>                | Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industry Area,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

## **TABLE OF CONTENTS**

|                                                                                             |           |
|---------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                             | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                    | 4         |
| OBJECTIVE .....                                                                             | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                          | 4         |
| TEST METHODOLOGY .....                                                                      | 4         |
| MEASUREMENT UNCERTAINTY .....                                                               | 5         |
| TEST FACILITY .....                                                                         | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                       | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                                     | 6         |
| EQUIPMENT MODIFICATIONS .....                                                               | 6         |
| EUT EXERCISE SOFTWARE .....                                                                 | 6         |
| LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....                                              | 8         |
| SUPPORT CABLE LIST AND DETAILS .....                                                        | 8         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                           | 8         |
| <b>SUMMARY OF TEST RESULTS.....</b>                                                         | <b>9</b>  |
| <b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b> | <b>10</b> |
| APPLICABLE STANDARD .....                                                                   | 10        |
| <b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>                                               | <b>11</b> |
| APPLICABLE STANDARD .....                                                                   | 11        |
| ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....                                         | 11        |
| <b>FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS .....</b>                                   | <b>12</b> |
| APPLICABLE STANDARD .....                                                                   | 12        |
| EUT SETUP.....                                                                              | 12        |
| EMI TEST RECEIVER SETUP.....                                                                | 12        |
| TEST PROCEDURE .....                                                                        | 12        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                              | 13        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                        | 13        |
| TEST DATA .....                                                                             | 13        |
| <b>FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS .....</b>                          | <b>16</b> |
| APPLICABLE STANDARD .....                                                                   | 16        |
| EUT SETUP .....                                                                             | 16        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                                           | 17        |
| TEST PROCEDURE .....                                                                        | 17        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                              | 17        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                        | 18        |
| TEST DATA .....                                                                             | 18        |
| <b>FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH.....</b>                                     | <b>25</b> |
| APPLICABLE STANDARD .....                                                                   | 25        |
| TEST PROCEDURE .....                                                                        | 25        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                        | 25        |
| TEST DATA .....                                                                             | 25        |
| <b>FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>                        | <b>30</b> |
| APPLICABLE STANDARD .....                                                                   | 30        |
| TEST PROCEDURE .....                                                                        | 30        |

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| TEST EQUIPMENT LIST AND DETAILS.....                                  | 30        |
| TEST DATA .....                                                       | 31        |
| <b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b> | <b>32</b> |
| APPLICABLE STANDARD .....                                             | 32        |
| TEST PROCEDURE .....                                                  | 32        |
| TEST EQUIPMENT LIST AND DETAILS.....                                  | 32        |
| TEST DATA .....                                                       | 33        |
| <b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>                  | <b>36</b> |
| APPLICABLE STANDARD .....                                             | 36        |
| TEST PROCEDURE .....                                                  | 36        |
| TEST EQUIPMENT LIST AND DETAILS.....                                  | 36        |
| TEST DATA .....                                                       | 36        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                                          |                    |                                                                                                |
|------------------------------------------|--------------------|------------------------------------------------------------------------------------------------|
| <b>EUT Name:</b>                         |                    | Splicing Light                                                                                 |
| <b>EUT Model:</b>                        |                    | N002D4-S-K01-15                                                                                |
| <b>Operation Frequency:</b>              |                    | 2402~2480MHz                                                                                   |
| <b>Maximum Output Power (Conducted):</b> |                    | 1.07 dBm                                                                                       |
| <b>Modulation Type:</b>                  |                    | GFSK                                                                                           |
| <b>Adapter Information</b>               | <b>Model Name:</b> | XH2400-1500                                                                                    |
|                                          | <b>Input:</b>      | 100~240 Vac                                                                                    |
|                                          | <b>Output:</b>     | DC 24V 1.5A                                                                                    |
| <b>Rated Input Voltage:</b>              |                    | DC 24V from Adapter                                                                            |
| <b>External Dimension:</b>               |                    | Control board:185.2mm(L)*45.2 mm(W)* 9.5mm(H)<br>Splice panel:265.2mm(L)* 154.6mm(W)* 8.5mm(H) |
| <b>Serial Number:</b>                    |                    | 190613050                                                                                      |
| <b>EUT Received Date:</b>                |                    | 2019/6/17                                                                                      |

### Objective

This report is prepared on behalf of **Anhui Sanan Technology Co., Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209, 15.247 rules.

### Related Submittal(s)/Grant(s)

No related submittal.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 DTS Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

**Measurement Uncertainty**

| Parameter                         | Measurement Uncertainty                                                                                              |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Occupied Channel Bandwidth        | ±5 %                                                                                                                 |
| RF output power, conducted        | ±0.61dB                                                                                                              |
| Power Spectral Density, conducted | ±0.61 dB                                                                                                             |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Unwanted Emissions, conducted     | ±1.5 dB                                                                                                              |
| Temperature                       | ±1 °C                                                                                                                |
| Humidity                          | ±5%                                                                                                                  |
| DC and low frequency voltages     | ±0.4%                                                                                                                |
| Duty Cycle                        | 1%                                                                                                                   |
| AC Power Lines Conducted Emission | 3.12 dB (150 kHz to 30 MHz)                                                                                          |

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in engineering mode.

For Bluetooth LE mode, 40 channels are provided for testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ...     | ...             | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

EUT was tested with channel 0, 19 and 39.

### Equipment Modifications

No modification was made to the EUT tested.

### EUT Exercise Software


The software: 'startup\_window.exe' was used during test, which was provided by manufacturer. The maximum power level was configured by the software as below table:

| Mode     | Channel | Frequency (MHz) | Power level |
|----------|---------|-----------------|-------------|
| LE 1Mbps | Low     | 2402            | 2           |
|          | Middle  | 2440            | 2           |
|          | High    | 2480            | 2           |
| LE 2Mbps | Low     | 2402            | 2           |
|          | Middle  | 2440            | 2           |
|          | High    | 2480            | 2           |

The duty cycle as below:


| Model | T <sub>on</sub> (ms) | T <sub>on+off</sub> (ms) | Duty Cycle (%) |
|-------|----------------------|--------------------------|----------------|
| 1Mbps | 100                  | 100                      | 100            |
| 2Mbps | 100                  | 100                      | 100            |

# 1Mbps

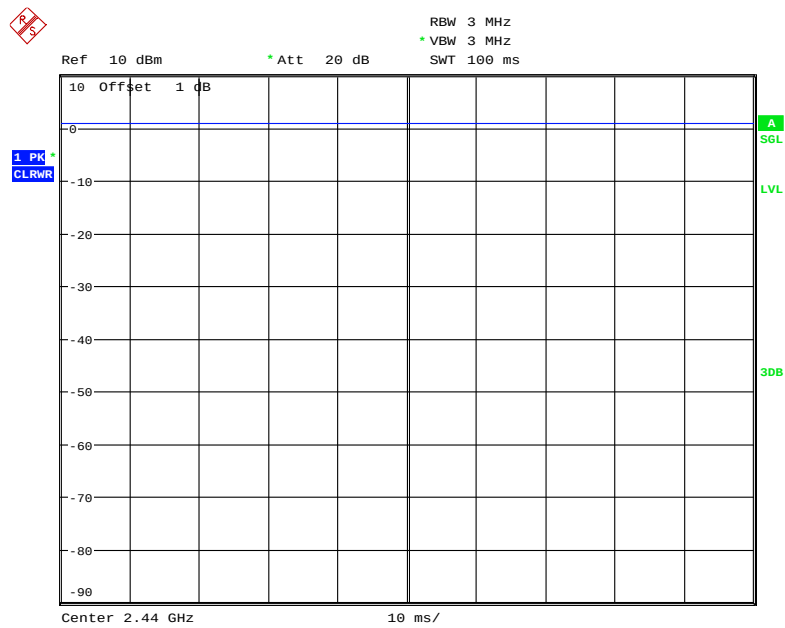

Date: 15.JUL.2019 14:17:44

# 2Mbps

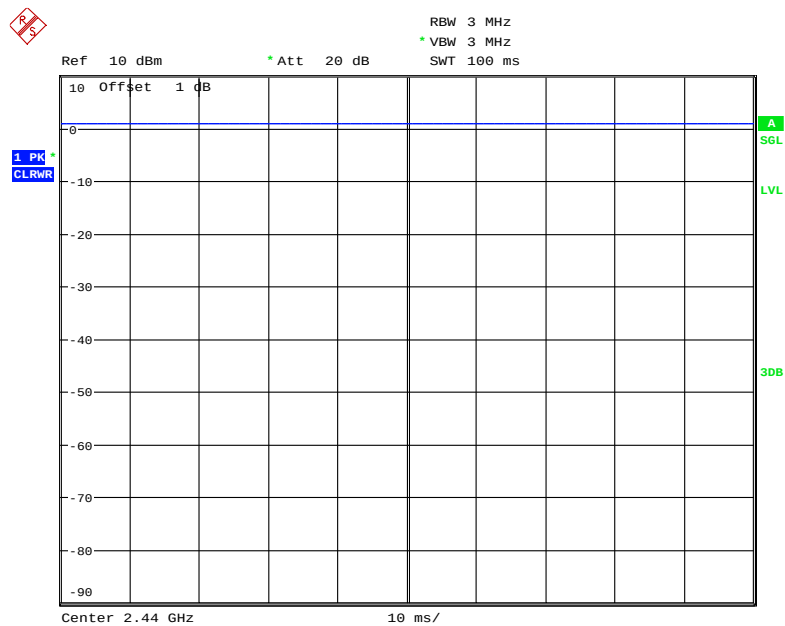


Date: 15.JUL.2019 14:18:37

**Local Support Equipment List and Details**

| Manufacturer | Description      | Model   | Serial Number |
|--------------|------------------|---------|---------------|
| Unknown      | Ceramic resistor | Unknown | Unknown       |

**Support Cable List and Details**

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To   |
|-------------------|----------------|--------------|------------|-----------|------|
| DC cable          | No             | No           | 1.2        | EUT       | Load |
| DC cable          | No             | No           | 2.0        | Adapter   | EUT  |

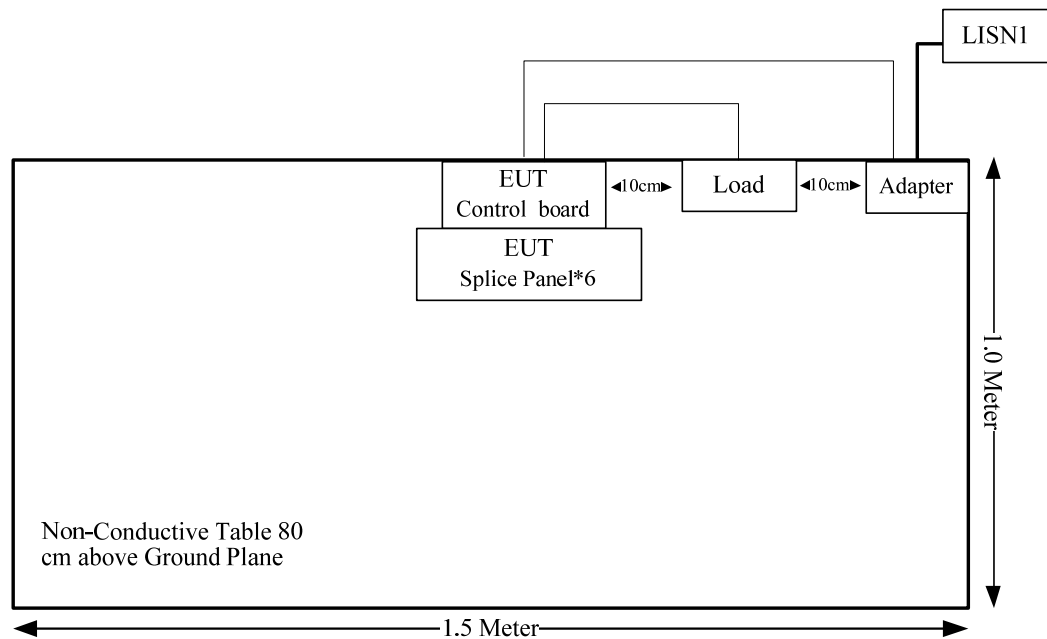**Block Diagram of Test Setup**



**SUMMARY OF TEST RESULTS**

| FCC Rules                          | Description of Test                      | Result     |
|------------------------------------|------------------------------------------|------------|
| FCC §15.247(i) & §1.1310 & §2.1091 | Maximum permissible exposure (MPE)       | Compliance |
| FCC §15.203                        | Antenna requirement                      | Compliance |
| FCC §15.207(a)                     | AC line conducted emissions              | Compliance |
| FCC §15.205, §15.209, §15.247(d)   | Spurious emissions                       | Compliance |
| FCC §15.247(a)(2)                  | 6 dB emission bandwidth                  | Compliance |
| FCC §15.247(b)(3)                  | Maximum conducted output power           | Compliance |
| FCC §15.247(d)                     | 100 kHz Bandwidth of frequency band edge | Compliance |
| FCC §15.247(e)                     | Power spectral density                   | Compliance |

## FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| (B) Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
|---------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz)                                   | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minutes) |
| 0.3–1.34                                                | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34–30                                                 | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30–300                                                  | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300–1500                                                | /                             | /                             | f/1500                              | 30                       |
| 1500–100,000                                            | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

### Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### Calculated Data:

| Frequency Range (MHz) | Antenna Gain |           | Max. Target Power including Tolerance |        | Evaluation Distance (cm) | Power Density (W/m <sup>2</sup> ) | MPE Limit (W/m <sup>2</sup> ) |
|-----------------------|--------------|-----------|---------------------------------------|--------|--------------------------|-----------------------------------|-------------------------------|
|                       | (dBi)        | (numeric) | (dBm)                                 | (mW)   |                          |                                   |                               |
| 2402-2480             | 1.5          | 1.41      | 2                                     | 1.5849 | 20.00                    | 0.0004                            | 1.0                           |

Note: the Max. Target Power including Tolerance was declared by manufacturer.

**Result: Compliance,** The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance  $\geq 20$  cm.

**FCC §15.203 - ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Antenna Information And Connector Construction**

The EUT has one internal antenna arrangement for BT, and the antenna gain is 1.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207(a)

### EUT Setup

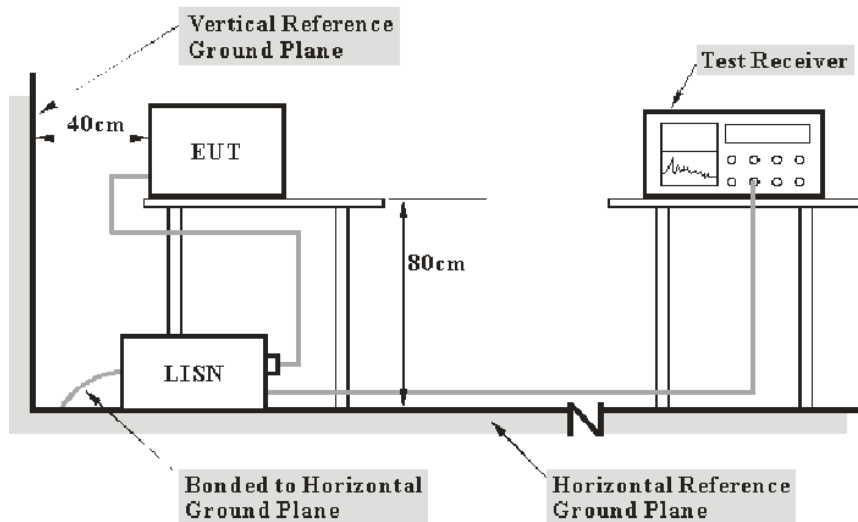

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

| Manufacturer | Description        | Model     | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|-----------|---------------|------------------|----------------------|
| Unknown      | Coaxial Cable      | C-NJNJ-50 | C-0200-01     | 2018-09-05       | 2019-09-05           |
| R&S          | Test Software      | EMC32     | Version8.53.0 | N/A              | N/A                  |
| R&S          | Two-line V-network | ENV 216   | 101614        | 2018-12-10       | 2019-12-10           |
| R&S          | EMI Test Receiver  | ESPI      | 100120        | 2019-05-09       | 2020-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


## Test Data

### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 28.2°C     |
| Relative Humidity: | 51%        |
| ATM Pressure:      | 100.3kPa   |
| Tester:            | Lily Xie   |
| Test Date:         | 2019-07-01 |


**Test Result:** Compliance

**Test Mode:** Transmitting

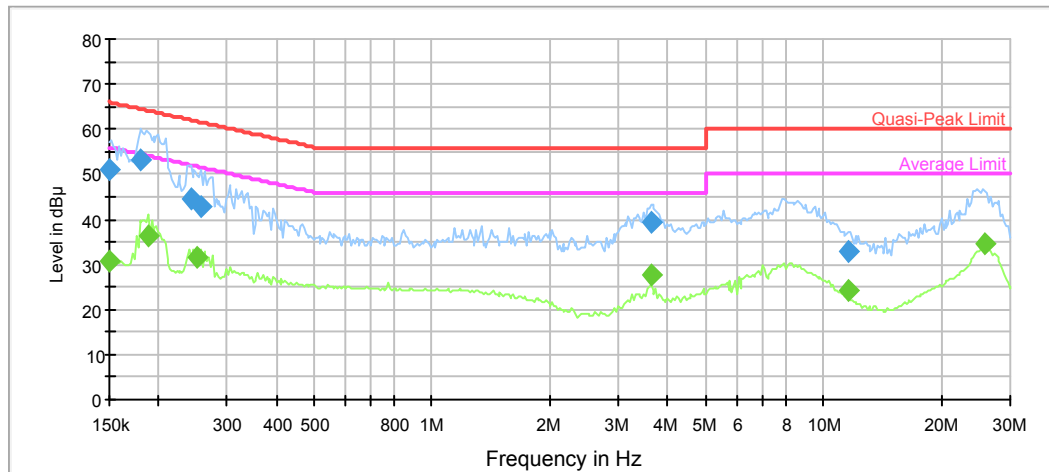**AC120 V, 60 Hz, Line:**

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) |
|-----------------|------------------------|-----------------|------|------------|-------------|--------------------|
| 0.150000        | 51.1                   | 9.000           | L1   | 11.2       | 14.9        | 66.0               |
| 0.181216        | 53.2                   | 9.000           | L1   | 10.8       | 11.2        | 64.4               |
| 0.241834        | 44.4                   | 9.000           | L1   | 10.4       | 17.6        | 62.0               |
| 0.256712        | 42.6                   | 9.000           | L1   | 10.3       | 18.9        | 61.5               |
| 3.621856        | 39.5                   | 9.000           | L1   | 9.8        | 16.5        | 56.0               |
| 11.601974       | 32.9                   | 9.000           | L1   | 9.8        | 27.1        | 60.0               |

| Frequency (MHz) | Average (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) |
|-----------------|----------------------|-----------------|------|------------|-------------|--------------------|
| 0.150000        | 30.5                 | 9.000           | L1   | 11.2       | 25.5        | 56.0               |
| 0.188575        | 36.2                 | 9.000           | L1   | 10.7       | 17.9        | 54.1               |
| 0.251654        | 31.5                 | 9.000           | L1   | 10.3       | 20.2        | 51.7               |
| 3.621856        | 27.7                 | 9.000           | L1   | 9.8        | 18.3        | 46.0               |
| 11.601974       | 24.2                 | 9.000           | L1   | 9.8        | 25.8        | 50.0               |
| 25.975455       | 34.7                 | 9.000           | L1   | 10.1       | 15.3        | 50.0               |


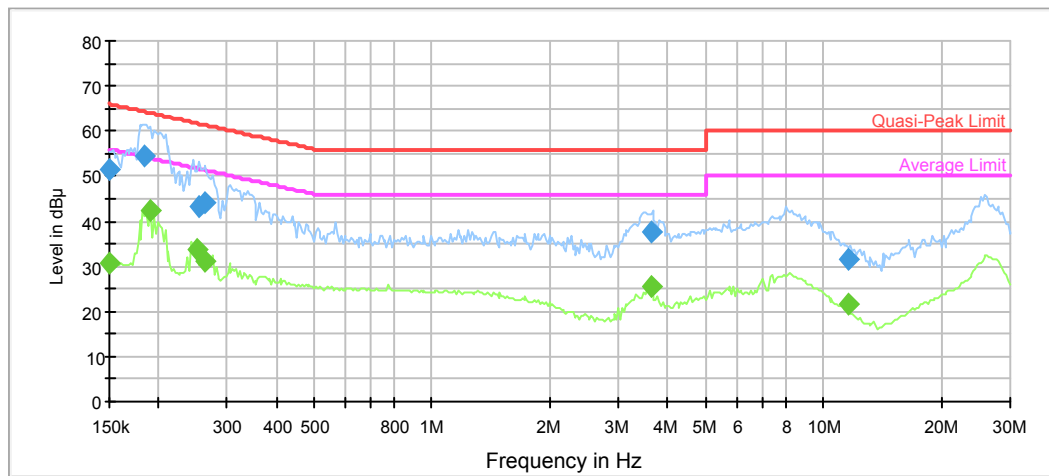
**AC120 V, 60 Hz, Neutral:**

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) |
|-----------------|------------------------|-----------------|------|------------|-------------|--------------------|
| 0.150000        | 51.4                   | 9.000           | N    | 11.2       | 14.6        | 66.0               |
| 0.184859        | 54.3                   | 9.000           | N    | 10.7       | 10.0        | 64.3               |
| 0.254170        | 43.2                   | 9.000           | N    | 10.3       | 18.4        | 61.6               |
| 0.264490        | 44.0                   | 9.000           | N    | 10.3       | 17.3        | 61.3               |
| 3.621856        | 37.6                   | 9.000           | N    | 9.8        | 18.4        | 56.0               |
| 11.601974       | 31.4                   | 9.000           | N    | 9.8        | 28.6        | 60.0               |

| Frequency (MHz) | Average (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) |
|-----------------|----------------------|-----------------|------|------------|-------------|--------------------|
| 0.150000        | 30.6                 | 9.000           | N    | 11.2       | 25.4        | 56.0               |
| 0.190460        | 42.4                 | 9.000           | N    | 10.7       | 11.6        | 54.0               |
| 0.251654        | 33.7                 | 9.000           | N    | 10.3       | 18.0        | 51.7               |
| 0.264490        | 31.3                 | 9.000           | N    | 10.3       | 20.0        | 51.3               |
| 3.621856        | 25.5                 | 9.000           | N    | 9.8        | 20.5        | 46.0               |
| 11.601974       | 21.8                 | 9.000           | N    | 9.8        | 28.2        | 50.0               |

**FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205

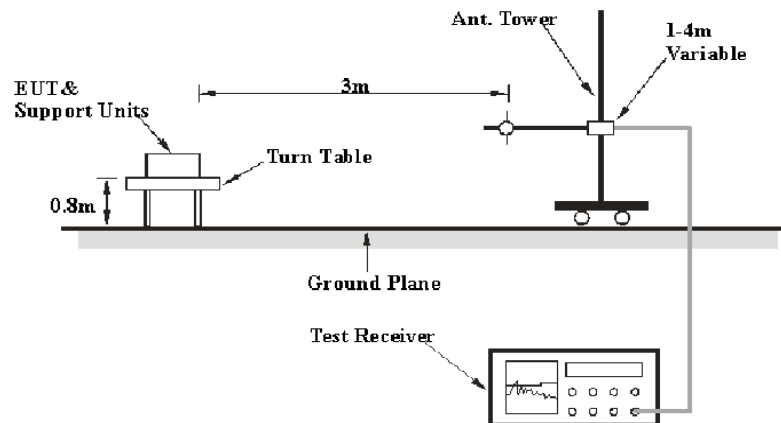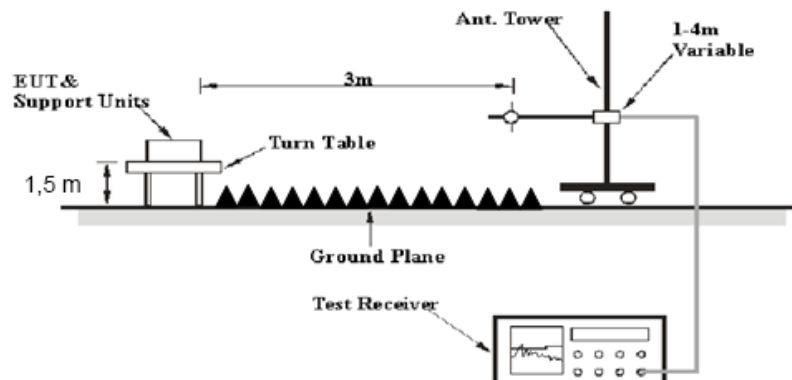**EUT Setup****Below 1GHz:****Above 1GHz:**

The radiated emission below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

| Measurement | RBW     | Video B/W | IF B/W |
|-------------|---------|-----------|--------|
| QP          | 120 kHz | 300 kHz   | 120kHz |

1GHz- 25GHz:

| Measurement | Duty cycle | RBW  | Video B/W |
|-------------|------------|------|-----------|
| PK          | Any        | 1MHz | 3 MHz     |
| AV          | >98%       | 1MHz | 10 Hz     |
|             | <98%       | 1MHz | 1/T       |

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

**Test Equipment List and Details**

| Manufacturer          | Description       | Model                      | Serial Number      | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|----------------------------|--------------------|------------------|----------------------|
| R&S                   | EMI Test Receiver | ESCI                       | 100224             | 2018-12-10       | 2019-12-10           |
| Farad                 | Test Software     | EZ-EMC                     | V1.1.4.2           | N/A              | N/A                  |
| Sunol Sciences        | Antenna           | JB3                        | A060611-1          | 2017-11-10       | 2020-11-10           |
| Unknown               | Coaxial Cable     | C-NJNJ-50                  | C-0400-01          | 2018-09-05       | 2019-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50                  | C-0075-01          | 2018-09-05       | 2019-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50                  | C-1400-01          | 2019-05-06       | 2020-05-06           |
| HP                    | Amplifier         | 8447D                      | 2727A05902         | 2018-09-05       | 2019-09-05           |
| Agilent               | Spectrum Analyzer | E4440A                     | SG43360054         | 2019-05-09       | 2020-05-09           |
| ETS-Lindgren          | Horn Antenna      | 3115                       | 000 527 35         | 2018-10-12       | 2021-10-12           |
| Ducommun Technologies | Horn Antenna      | ARH-4223-02                | 1007726-01<br>1304 | 2016-11-18       | 2019-11-18           |
| Unknown               | Coaxial Cable     | C-SJSJ-50                  | C-0800-01          | 2018-09-05       | 2019-09-05           |
| Unknown               | Coaxial Cable     | C-2.4J2.4J-50              | C-0700-02          | 2019-06-27       | 2020-06-27           |
| MITEQ                 | Amplifier         | AFS42-00101800-<br>25-S-42 | 2001271            | 2018-09-05       | 2019-09-05           |
| Quinstar              | Amplifier         | QLW-18405536-JO            | 15964001001        | 2019-06-27       | 2020-06-27           |
| E-Microwave           | Band-stop Filters | OBSF-2400-2483.5-<br>S     | OE01601525         | 2019-06-16       | 2020-06-16           |
| Micro-tronics         | High Pass Filter  | HPM50111                   | S/N-G217           | 2019-06-16       | 2020-06-16           |


\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


| Test Items         | Radiation Below 1GHz | Radiation Above 1GHz |
|--------------------|----------------------|----------------------|
| Temperature:       | 28 °C                | 28.6 °C              |
| Relative Humidity: | 52%                  | 62 %                 |
| ATM Pressure:      | 99.6 kPa             | 100.4 kPa            |
| Tester:            | Neil Liao            | Tyler Pan            |
| Test Date:         | 2019-07-01           | 2019-07-02           |

*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to the following table and plots.*

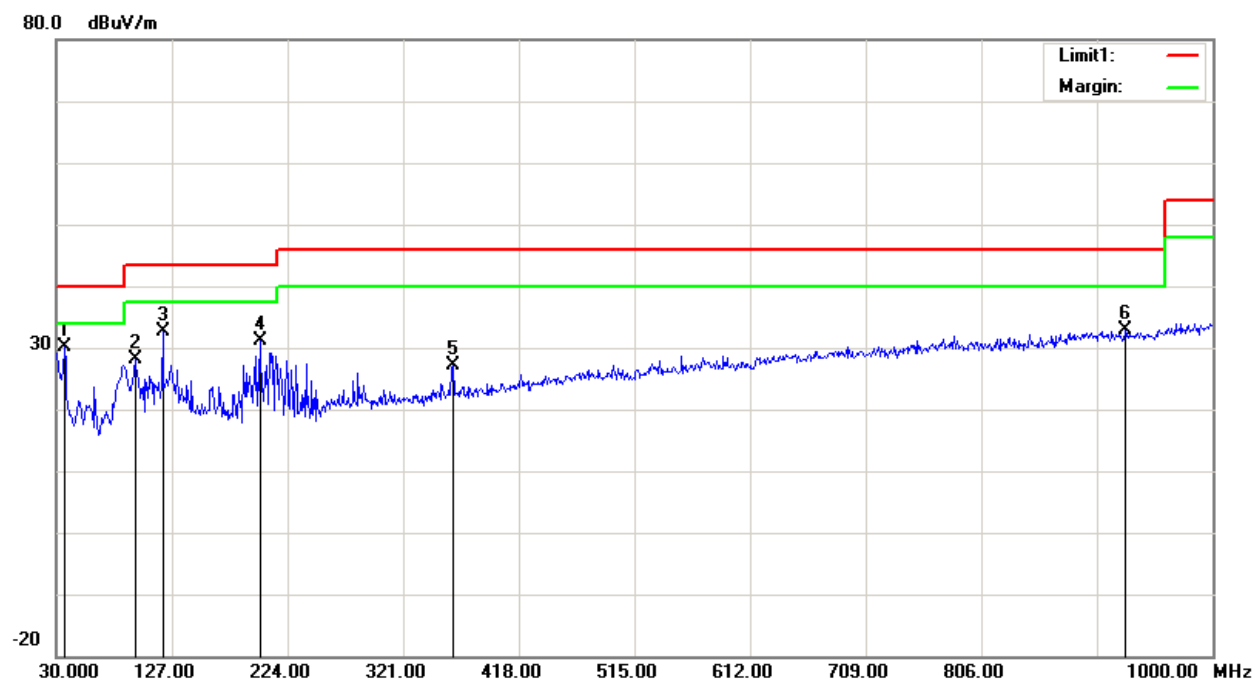**1) 30MHz-1GHz (1Mbps Low Channel was the worst):****Horizontal:**

| Frequency (MHz) | Receiver Reading (dBuV) | Detector | Correction Factor (dB/m) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------|--------------------------|---------------------|----------------|-------------|
| 36.7900         | 33.56                   | peak     | -3.38                    | 30.18               | 40.00          | 9.82        |
| 95.9600         | 38.12                   | peak     | -9.99                    | 28.13               | 43.50          | 15.37       |
| 119.2400        | 37.43                   | peak     | -4.84                    | 32.59               | 43.50          | 10.91       |
| 200.7200        | 37.09                   | peak     | -5.88                    | 31.21               | 43.50          | 12.29       |
| 362.7100        | 29.84                   | peak     | -2.81                    | 27.03               | 46.00          | 18.97       |
| 927.2500        | 32.27                   | peak     | 0.51                     | 32.78               | 46.00          | 13.22       |

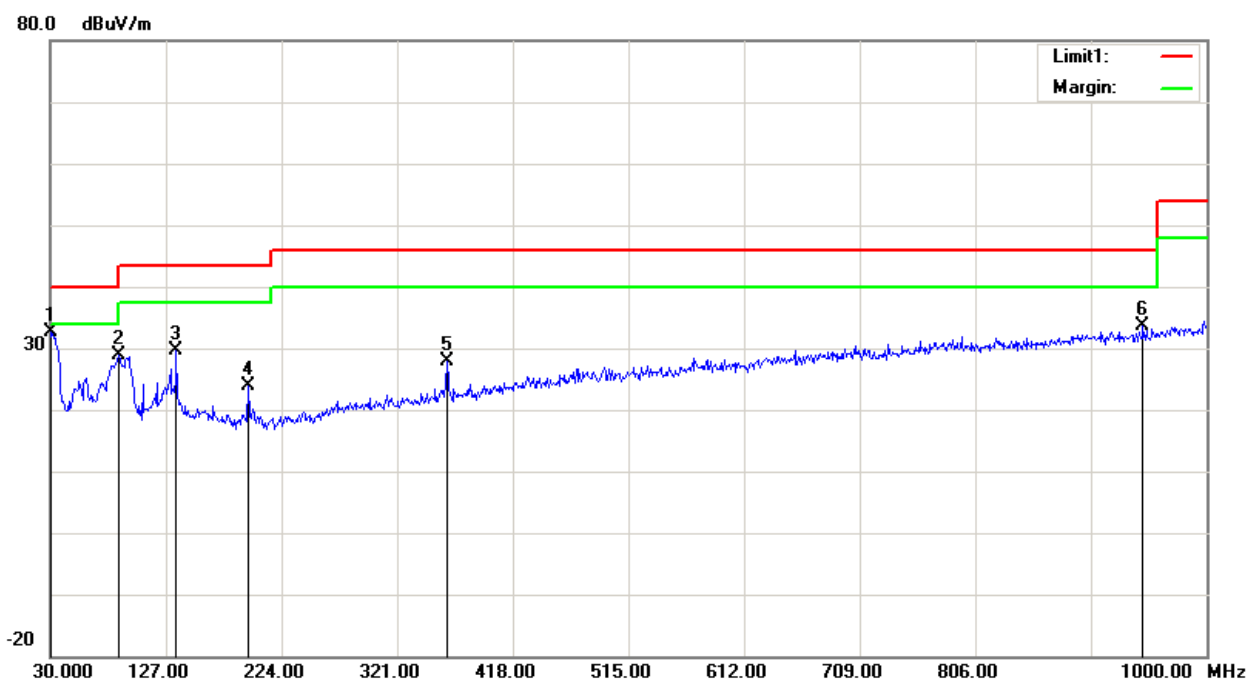**Vertical:**

| Frequency (MHz) | Receiver Reading (dBuV) | Detector | Correction Factor (dB/m) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------|--------------------------|---------------------|----------------|-------------|
| 30.9700         | 31.63                   | peak     | 0.91                     | 32.54               | 40.00          | 7.46        |
| 87.2300         | 40.33                   | peak     | -11.43                   | 28.90               | 40.00          | 11.10       |
| 135.7300        | 34.68                   | peak     | -5.15                    | 29.53               | 43.50          | 13.97       |
| 195.8700        | 30.59                   | peak     | -6.60                    | 23.99               | 43.50          | 19.51       |
| 362.7100        | 30.74                   | peak     | -2.81                    | 27.93               | 46.00          | 18.07       |
| 946.6500        | 32.75                   | peak     | 0.82                     | 33.57               | 46.00          | 12.43       |

**2) 1-25GHz:**

1 Mbps:




| Frequency<br>(MHz)       | Receiver          |                        | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------------------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector<br>(PK/QP/AV) | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2402 MHz    |                   |                        |                |                  |                       |                           |                                    |                   |                |
| 2402.00                  | 65.74             | PK                     | H              | 28.10            | 1.80                  | 0.00                      | 95.64                              | N/A               | N/A            |
| 2402.00                  | 63.56             | AV                     | H              | 28.10            | 1.80                  | 0.00                      | 93.46                              | N/A               | N/A            |
| 2402.00                  | 65.36             | PK                     | V              | 28.10            | 1.80                  | 0.00                      | 95.26                              | N/A               | N/A            |
| 2402.00                  | 63.25             | AV                     | V              | 28.10            | 1.80                  | 0.00                      | 93.15                              | N/A               | N/A            |
| 2390.00                  | 31.88             | PK                     | V              | 28.08            | 1.80                  | 0.00                      | 61.76                              | 74.00             | 12.24          |
| 2390.00                  | 14.77             | AV                     | V              | 28.08            | 1.80                  | 0.00                      | 44.65                              | 54.00             | 9.35           |
| 4804.00                  | 53.45             | PK                     | V              | 32.91            | 3.17                  | 37.20                     | 52.33                              | 74.00             | 21.67          |
| 4804.00                  | 41.22             | AV                     | V              | 32.91            | 3.17                  | 37.20                     | 40.10                              | 54.00             | 13.90          |
| 7206.00                  | 65.20             | PK                     | V              | 35.74            | 4.82                  | 37.23                     | 68.53                              | 74.00             | 5.47           |
| 7206.00                  | 48.02             | AV                     | V              | 35.74            | 4.82                  | 37.23                     | 51.35                              | 54.00             | 2.65           |
| Middle Channel: 2440 MHz |                   |                        |                |                  |                       |                           |                                    |                   |                |
| 2440.00                  | 64.32             | PK                     | H              | 28.18            | 1.82                  | 0.00                      | 94.32                              | N/A               | N/A            |
| 2440.00                  | 62.71             | AV                     | H              | 28.18            | 1.82                  | 0.00                      | 92.71                              | N/A               | N/A            |
| 2440.00                  | 66.14             | PK                     | V              | 28.18            | 1.82                  | 0.00                      | 96.14                              | N/A               | N/A            |
| 2440.00                  | 64.32             | AV                     | V              | 28.18            | 1.82                  | 0.00                      | 94.32                              | N/A               | N/A            |
| 4880.00                  | 52.52             | PK                     | V              | 33.06            | 3.27                  | 37.21                     | 51.64                              | 74.00             | 22.36          |
| 4880.00                  | 39.68             | AV                     | V              | 33.06            | 3.27                  | 37.21                     | 38.80                              | 54.00             | 15.20          |
| 7320.00                  | 62.97             | PK                     | V              | 36.03            | 4.62                  | 37.37                     | 66.25                              | 74.00             | 7.75           |
| 7320.00                  | 47.12             | AV                     | V              | 36.03            | 4.62                  | 37.37                     | 50.40                              | 54.00             | 3.60           |
| High Channel: 2480 MHz   |                   |                        |                |                  |                       |                           |                                    |                   |                |
| 2480.00                  | 64.15             | PK                     | H              | 28.26            | 1.84                  | 0.00                      | 94.25                              | N/A               | N/A            |
| 2480.00                  | 62.33             | AV                     | H              | 28.26            | 1.84                  | 0.00                      | 92.43                              | N/A               | N/A            |
| 2480.00                  | 66.64             | PK                     | V              | 28.26            | 1.84                  | 0.00                      | 96.74                              | N/A               | N/A            |
| 2480.00                  | 64.32             | AV                     | V              | 28.26            | 1.84                  | 0.00                      | 94.42                              | N/A               | N/A            |
| 2483.50                  | 23.23             | PK                     | V              | 28.27            | 1.84                  | 0.00                      | 53.34                              | 74.00             | 20.66          |
| 2483.50                  | 15.89             | AV                     | V              | 28.27            | 1.84                  | 0.00                      | 46.00                              | 54.00             | 8.00           |
| 4960.00                  | 51.07             | PK                     | V              | 33.22            | 3.23                  | 37.25                     | 50.27                              | 74.00             | 23.73          |
| 4960.00                  | 38.26             | AV                     | V              | 33.22            | 3.23                  | 37.25                     | 37.46                              | 54.00             | 16.54          |
| 7440.00                  | 60.17             | PK                     | V              | 36.34            | 4.41                  | 37.52                     | 63.40                              | 74.00             | 10.60          |
| 7440.00                  | 44.43             | AV                     | V              | 36.34            | 4.41                  | 37.52                     | 47.66                              | 54.00             | 6.34           |

2Mbps:




| Frequency<br>(MHz)       | Receiver          |                        | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------------------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector<br>(PK/QP/AV) | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2402 MHz    |                   |                        |                |                  |                       |                           |                                    |                   |                |
| 2402.00                  | 64.72             | PK                     | H              | 28.10            | 1.80                  | 0.00                      | 94.62                              | N/A               | N/A            |
| 2402.00                  | 61.36             | AV                     | H              | 28.10            | 1.80                  | 0.00                      | 91.26                              | N/A               | N/A            |
| 2402.00                  | 66.93             | PK                     | V              | 28.10            | 1.80                  | 0.00                      | 96.83                              | N/A               | N/A            |
| 2402.00                  | 63.01             | AV                     | V              | 28.10            | 1.80                  | 0.00                      | 92.91                              | N/A               | N/A            |
| 2390.00                  | 31.46             | PK                     | H              | 28.08            | 1.80                  | 0.00                      | 61.34                              | 74.00             | 12.66          |
| 2390.00                  | 15.35             | AV                     | H              | 28.08            | 1.80                  | 0.00                      | 45.23                              | 54.00             | 8.77           |
| 4804.00                  | 51.08             | PK                     | H              | 32.91            | 3.17                  | 37.20                     | 49.96                              | 74.00             | 24.04          |
| 4804.00                  | 38.22             | AV                     | H              | 32.91            | 3.17                  | 37.20                     | 37.10                              | 54.00             | 16.90          |
| 7206.00                  | 64.06             | PK                     | H              | 35.74            | 4.82                  | 37.23                     | 67.39                              | 74.00             | 6.61           |
| 7206.00                  | 46.87             | AV                     | H              | 35.74            | 4.82                  | 37.23                     | 50.20                              | 54.00             | 3.80           |
| Middle Channel: 2440 MHz |                   |                        |                |                  |                       |                           |                                    |                   |                |
| 2440.00                  | 65.18             | PK                     | H              | 28.18            | 1.82                  | 0.00                      | 95.18                              | N/A               | N/A            |
| 2440.00                  | 62.14             | AV                     | H              | 28.18            | 1.82                  | 0.00                      | 92.14                              | N/A               | N/A            |
| 2440.00                  | 67.58             | PK                     | V              | 28.18            | 1.82                  | 0.00                      | 97.58                              | N/A               | N/A            |
| 2440.00                  | 64.52             | AV                     | V              | 28.18            | 1.82                  | 0.00                      | 94.52                              | N/A               | N/A            |
| 4880.00                  | 50.68             | PK                     | H              | 33.06            | 3.27                  | 37.21                     | 49.80                              | 74.00             | 24.20          |
| 4880.00                  | 37.51             | AV                     | H              | 33.06            | 3.27                  | 37.21                     | 36.63                              | 54.00             | 17.37          |
| 7320.00                  | 62.57             | PK                     | H              | 36.03            | 4.62                  | 37.37                     | 65.85                              | 74.00             | 8.15           |
| 7320.00                  | 46.84             | AV                     | H              | 36.03            | 4.62                  | 37.37                     | 50.12                              | 54.00             | 3.88           |
| High Channel: 2480 MHz   |                   |                        |                |                  |                       |                           |                                    |                   |                |
| 2480.00                  | 63.98             | PK                     | H              | 28.26            | 1.84                  | 0.00                      | 94.08                              | N/A               | N/A            |
| 2480.00                  | 60.03             | AV                     | H              | 28.26            | 1.84                  | 0.00                      | 90.13                              | N/A               | N/A            |
| 2480.00                  | 65.35             | PK                     | V              | 28.26            | 1.84                  | 0.00                      | 95.45                              | N/A               | N/A            |
| 2480.00                  | 62.14             | AV                     | V              | 28.26            | 1.84                  | 0.00                      | 92.24                              | N/A               | N/A            |
| 2483.50                  | 36.59             | PK                     | H              | 28.27            | 1.84                  | 0.00                      | 66.70                              | 74.00             | 7.30           |
| 2483.50                  | 16.66             | AV                     | H              | 28.27            | 1.84                  | 0.00                      | 46.77                              | 54.00             | 7.23           |
| 4960.00                  | 49.99             | PK                     | H              | 33.22            | 3.23                  | 37.25                     | 49.19                              | 74.00             | 24.81          |
| 4960.00                  | 36.58             | AV                     | H              | 33.22            | 3.23                  | 37.25                     | 35.78                              | 54.00             | 18.22          |
| 7440.00                  | 58.24             | PK                     | H              | 36.34            | 4.41                  | 37.52                     | 61.47                              | 74.00             | 12.53          |
| 7440.00                  | 41.84             | AV                     | H              | 36.34            | 4.41                  | 37.52                     | 45.07                              | 54.00             | 8.93           |

# **Worst plots (1Mbps Low Channel)** **Horizontal**

Fundamental  
Test with Band  
Rejection Filter

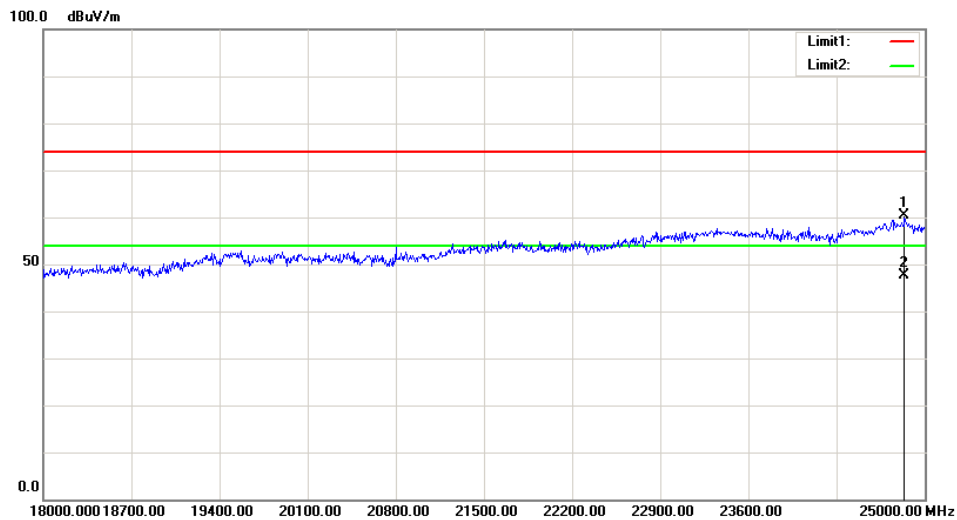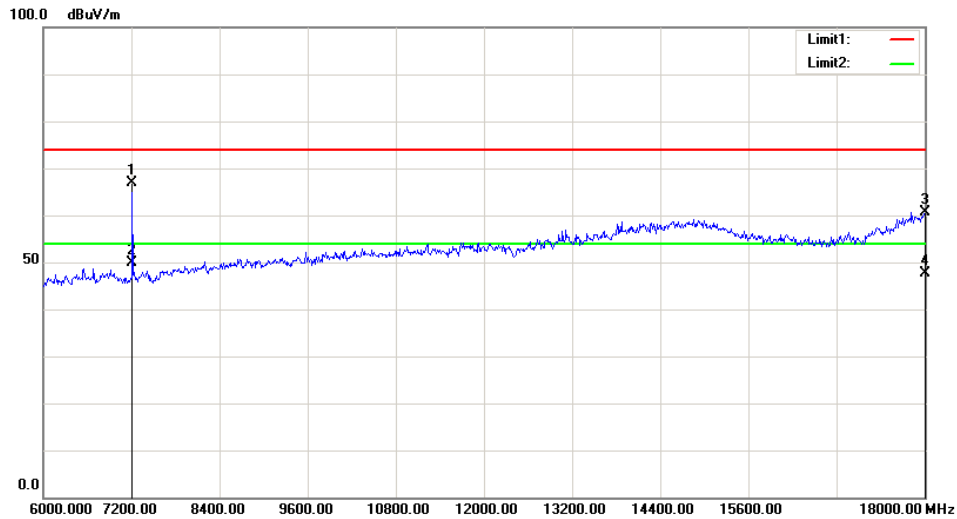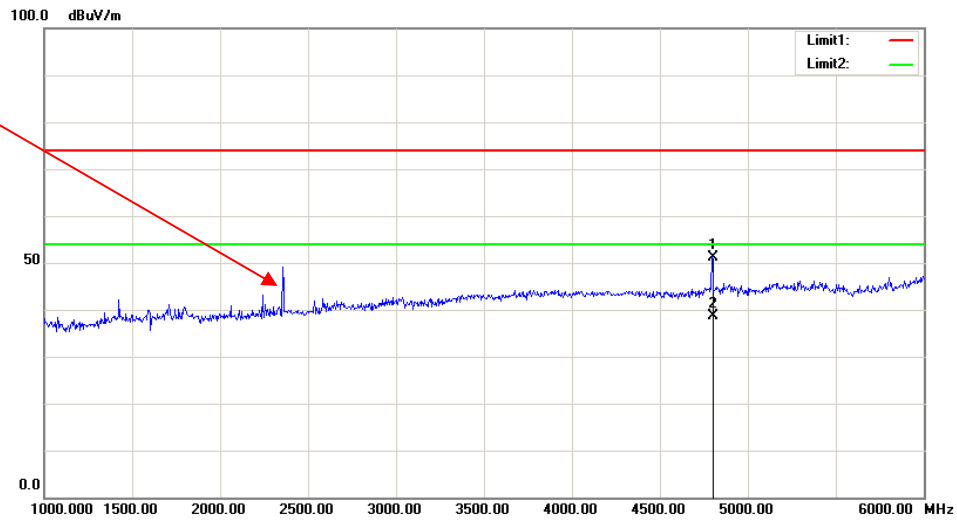

## Vertical

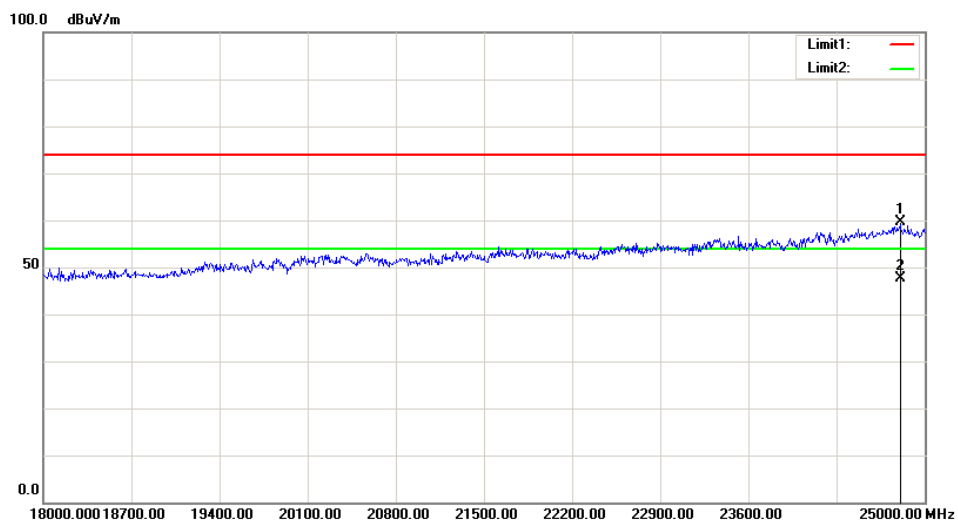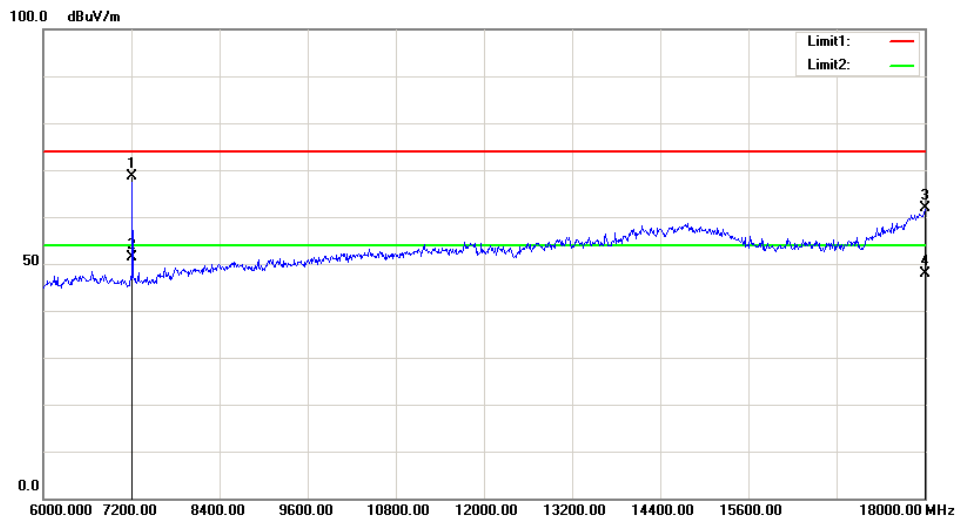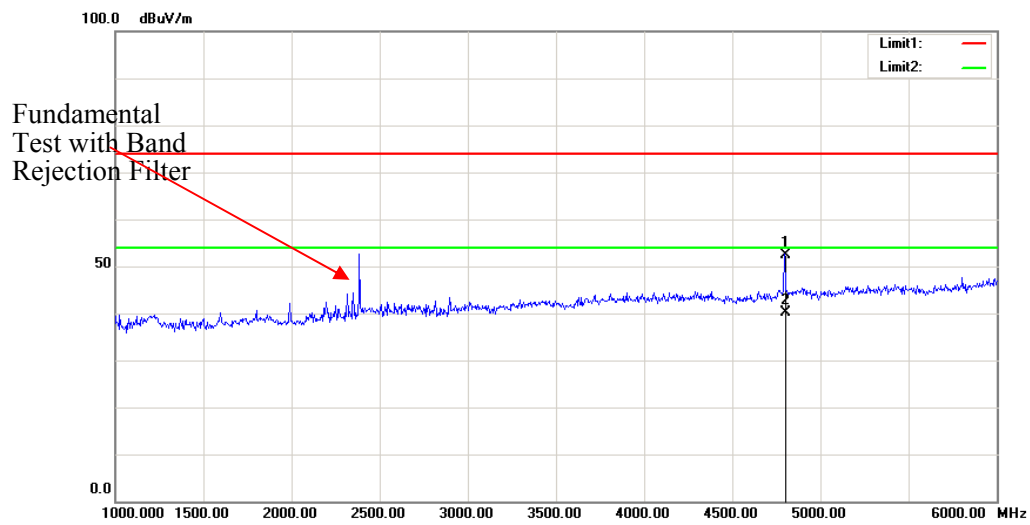



## FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH


### Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26      | 200256        | 2019-05-09       | 2020-05-09           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 28.2 °C    |
| Relative Humidity: | 52 %       |
| ATM Pressure:      | 100.6 kPa  |
| Tester:            | Elena Lei  |
| Test Date:         | 2019-06-25 |


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

| Mode   | Channel | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | Limit (MHz) |
|--------|---------|-----------------|-------------------------------|-------------|
| 1 Mbps | Low     | 2402            | 0.689                         | $\geq 0.5$  |
|        | Middle  | 2440            | 0.713                         | $\geq 0.5$  |
|        | High    | 2480            | 0.717                         | $\geq 0.5$  |
| 2 Mbps | Low     | 2402            | 1.465                         | $\geq 0.5$  |
|        | Middle  | 2440            | 1.423                         | $\geq 0.5$  |
|        | High    | 2480            | 1.558                         | $\geq 0.5$  |


## 1 Mbps

### Low Channel

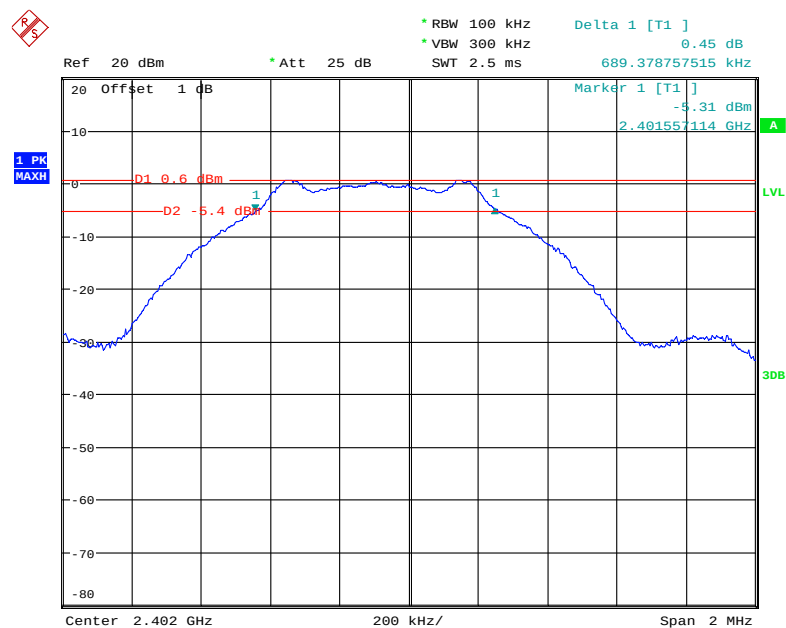


Date: 25.JUN.2019 14:42:31

### Middle Channel

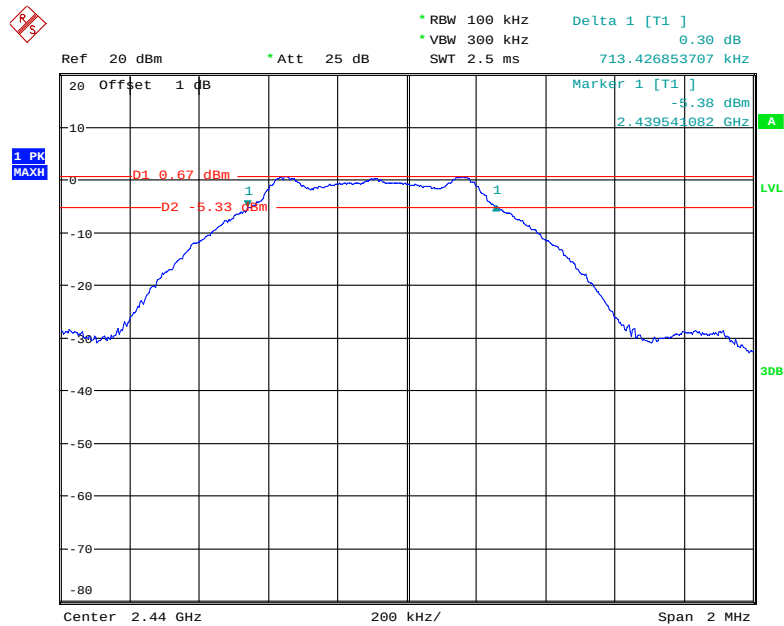

Date: 25.JUN.2019 14:49:47


### High Channel

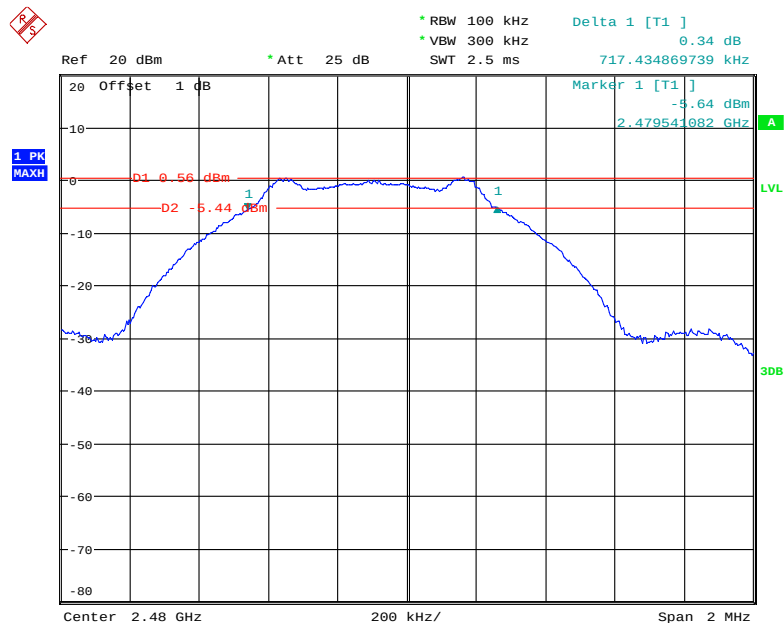

Date: 25.JUN.2019 14:45:42


2Mbps:

### Low Channel

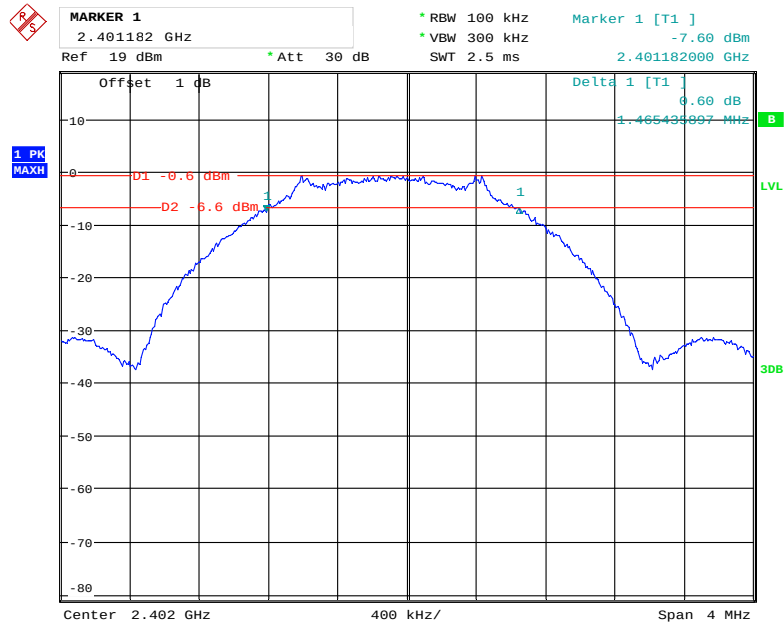


Date: 25.JUN.2019 15:05:40

### Middle Channel

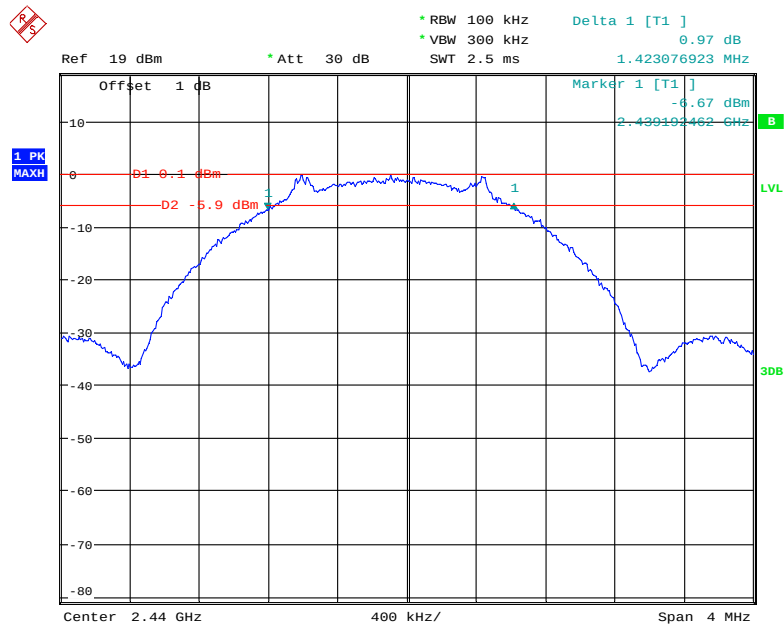

Date: 25.JUN.2019 15:04:25

### High Channel

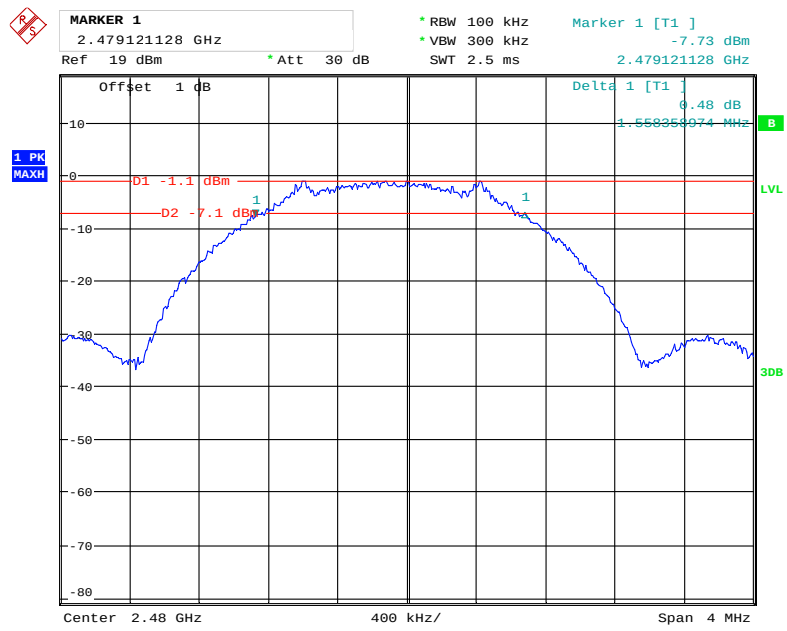


Date: 25.JUN.2019 15:06:27

**FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER****Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

**Test Procedure**

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
- 4.

**Test Equipment List and Details**

| Manufacturer | Description               | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|---------------------------|-------------|---------------|------------------|----------------------|
| Unknown      | Coaxial Cable             | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |
| Agilent      | USB Wideband Power Sensor | U2022XA     | MY5417006     | 2018-12-10       | 2019-12-10           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 28.2 °C    |
| <b>Relative Humidity:</b> | 52 %       |
| <b>ATM Pressure:</b>      | 100.6 kPa  |
| <b>Tester:</b>            | Elena Lei  |
| <b>Test Date:</b>         | 2019-06-25 |

*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to the following table.*

| <b>Mode</b> | <b>Channel</b> | <b>Frequency (MHz)</b> | <b>Max Peak Conducted Output Power (dBm)</b> | <b>Limit (dBm)</b> |
|-------------|----------------|------------------------|----------------------------------------------|--------------------|
| 1 Mbps      | Low            | 2402                   | 0.96                                         | 30                 |
|             | Middle         | 2440                   | 0.89                                         | 30                 |
|             | High           | 2480                   | 0.74                                         | 30                 |
| 2 Mbps      | Low            | 2402                   | 1.07                                         | 30                 |
|             | Middle         | 2440                   | 1.04                                         | 30                 |
|             | High           | 2480                   | 0.89                                         | 30                 |

**FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE****Applicable Standard**

According to FCC§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Equipment List and Details**

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26      | 200256        | 2019-05-09       | 2020-05-09           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).




**Test Data****Environmental Conditions**

|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 28.2 °C    |
| <b>Relative Humidity:</b> | 52 %       |
| <b>ATM Pressure:</b>      | 100.6 kPa  |
| <b>Tester:</b>            | Elena Lei  |
| <b>Test Date:</b>         | 2019-06-25 |


Test mode: Transmitting

Test Result: Compliance. Please refer to following plots.

1Mbps:

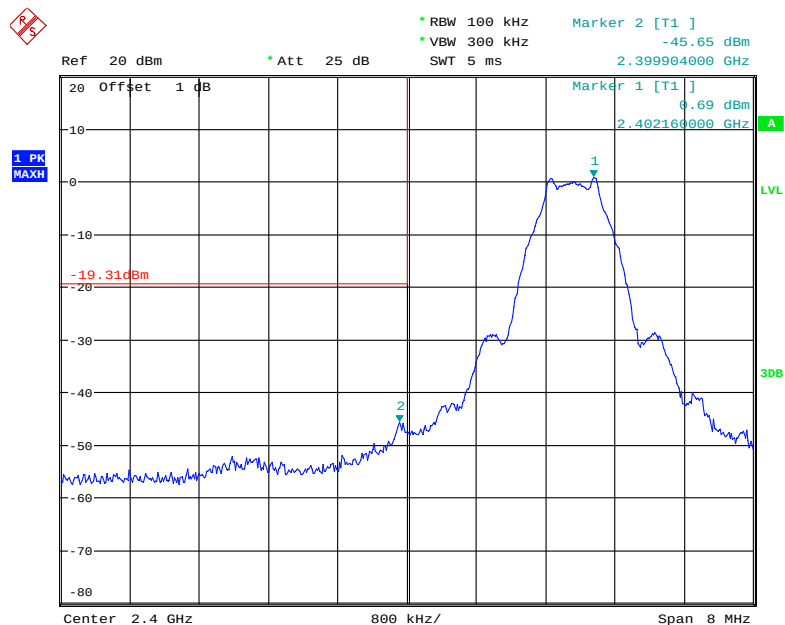**Band Edge, Left Side**


Date: 25.JUN.2019 14:44:58

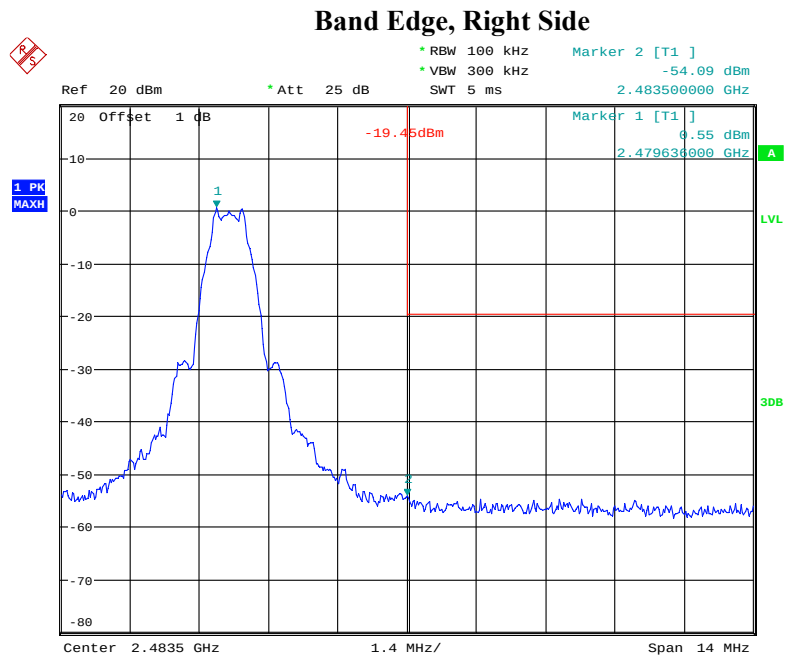

Date: 25.JUN.2019 14:47:31


2Mbps:

## Band Edge, Left Side

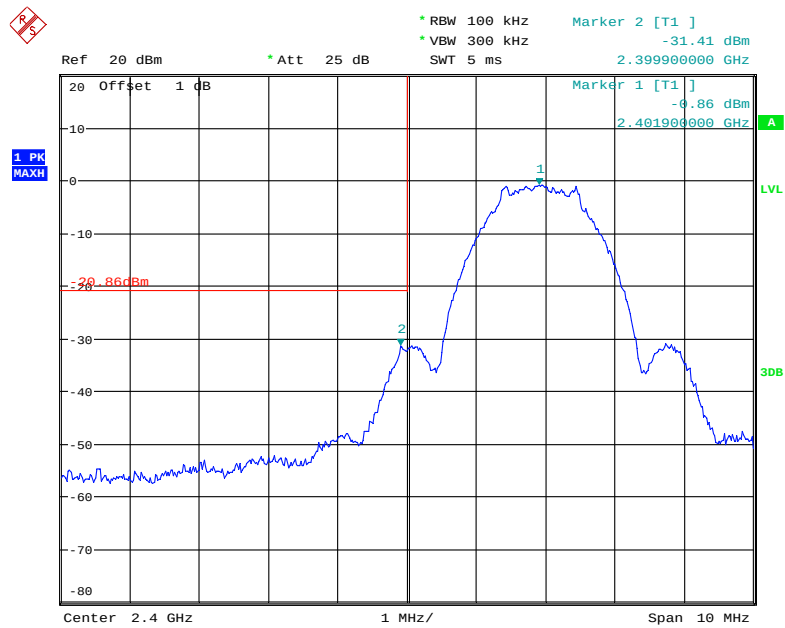

Date: 25.JUN.2019 15:11:46

## Band Edge, Right Side

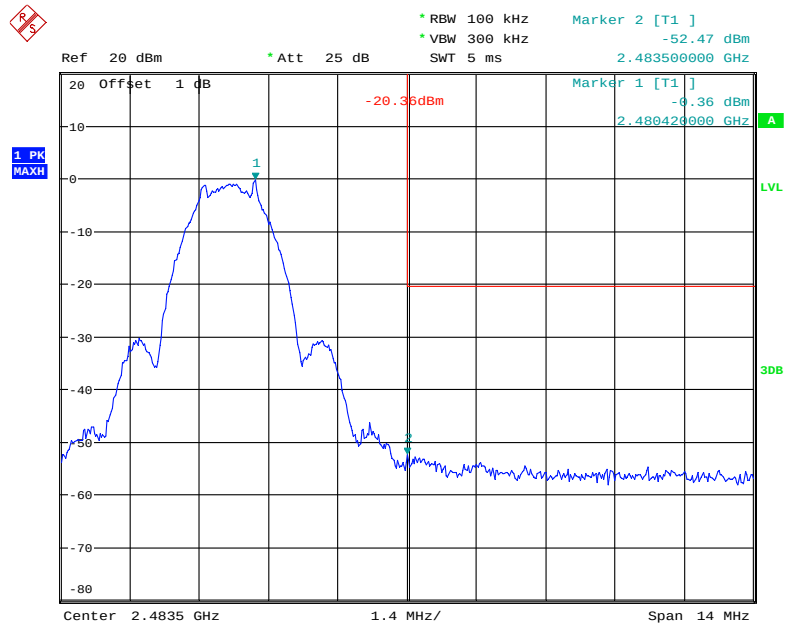

Date: 25.JUN.2019 15:14:21

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

According to FCC§15.247(e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

### Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26      | 200256        | 2019-05-09       | 2020-05-09           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 28.2 °C    |
| Relative Humidity: | 52 %       |
| ATM Pressure:      | 100.6 kPa  |
| Tester:            | Elena Lei  |
| Test Date:         | 2019-06-25 |


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots

| Mode   | Channel | Frequency (MHz) | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) |
|--------|---------|-----------------|-----------------------------------|------------------|
| 1 Mbps | Low     | 2402            | -10.70                            | ≤8               |
|        | Middle  | 2440            | -10.35                            | ≤8               |
|        | High    | 2480            | -11.42                            | ≤8               |
| 2 Mbps | Low     | 2402            | -11.71                            | ≤8               |
|        | Middle  | 2440            | -12.82                            | ≤8               |
|        | High    | 2480            | -13.29                            | ≤8               |


1Mbps:

## Power Spectral Density, Low Channel

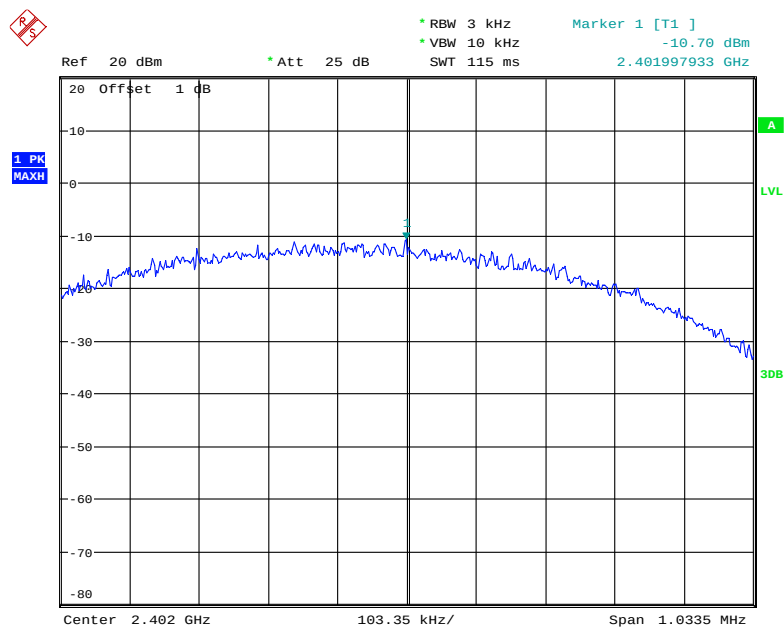


Date: 25.JUN.2019 14:44:31

### Power Spectral Density, Middle Channel

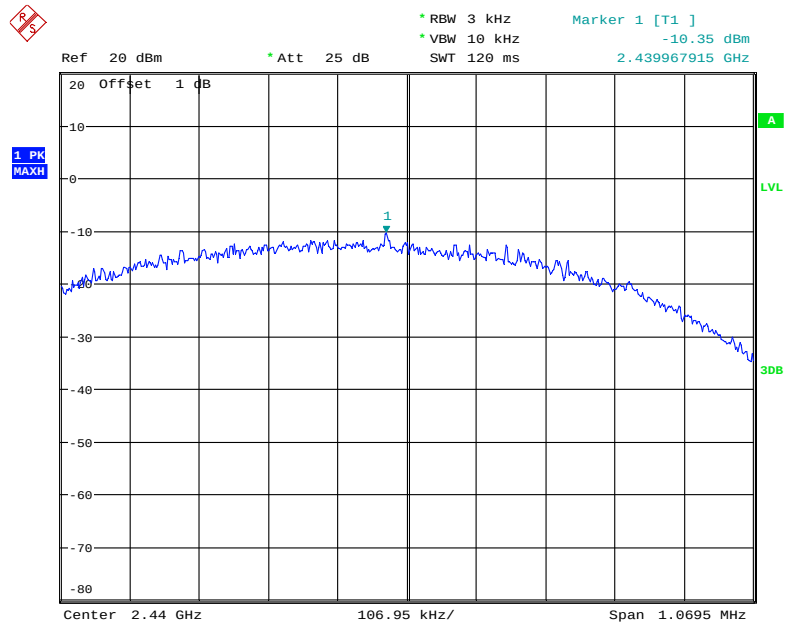

Date: 25.JUN.2019 14:51:17


### Power Spectral Density, High Channel

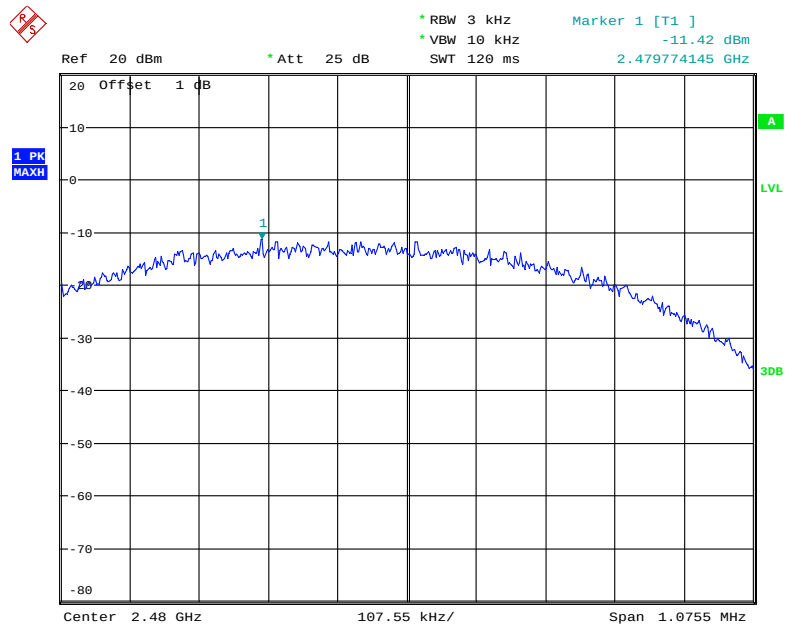

Date: 25.JUN.2019 14:46:57


2Mbps:

### Power Spectral Density, Low Channel

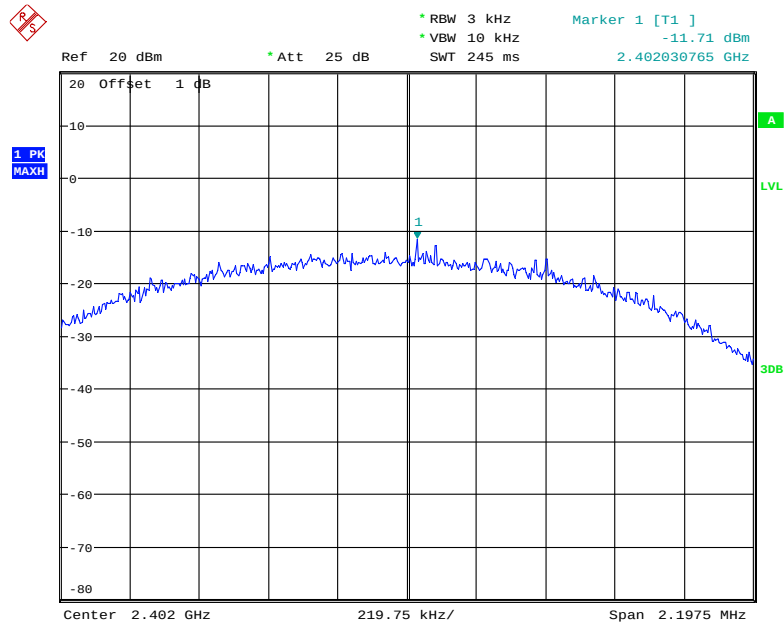


Date: 25.JUN.2019 15:18:39

### Power Spectral Density, Middle Channel

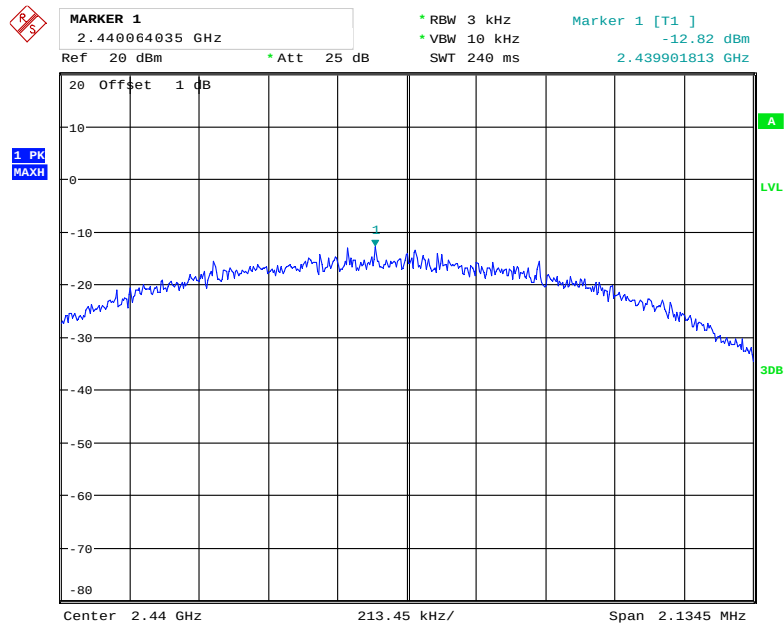

Date: 25.JUN.2019 15:08:41

### Power Spectral Density, High Channel

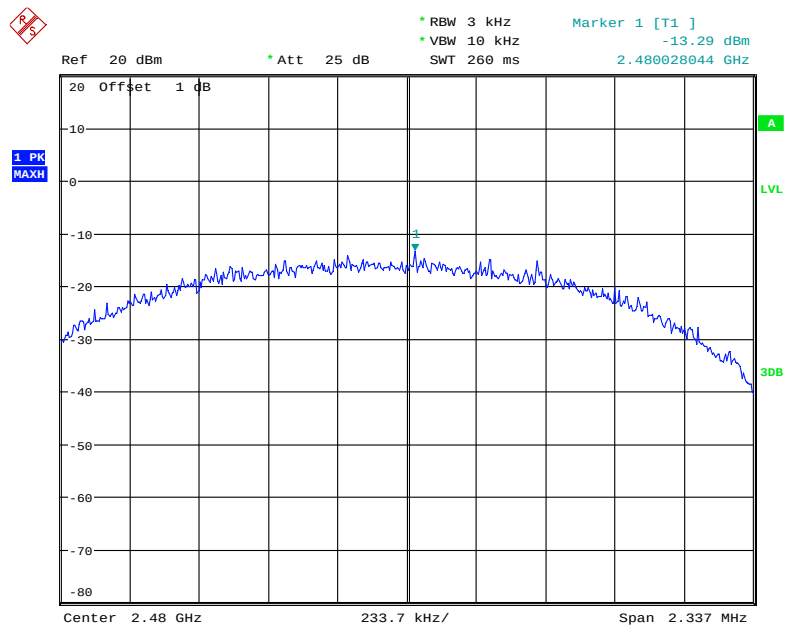

Date: 25.JUN.2019 15:13:44

\*\*\*\*\* END OF REPORT \*\*\*\*\*