

FCC RADIO TEST REPORT

For
FCC ID: 2ATKS-B90

Report Reference No.: 25EFSS05002 06191
Date Sample(s) Received: 2025-04-30
Date of Tested: From 2025-04-30 to 2025-05-10
Date of issue: 2025-05-12
Testing Laboratory: DongGuan ShuoXin Electronic Technology Co., Ltd.
Address: Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China

Applicant's name: LJ ELECTRONICS TECHNOLOGY LIMITED
Address: Suite 1003, 10/F., Chung Sheung Building, 9 Queen Victoria Street, Centra, HONG KONG
Manufacturer: LJ ELECTRONICS TECHNOLOGY LIMITED

Test specification:

Test item description: Wireless Dog Fence
Trade Mark: Aweec
Model/Type reference: B90
Ratings: I/P: DC 5V or DC 3.7V

Test Engineer:



Jelena OuYang

Responsible Engineer :



Leo Chen

Authorized Signatory:



Smile Wang

TABLE OF CONTENTS

1. Summary of test Standards and results	3
2. General test information.....	4
2.1. Description of EUT	4
2.2. Accessories of EUT.....	5
2.3. Assistant equipment used for test.....	5
2.4. Block diagram of EUT configuration for test.....	5
2.5. Test environment conditions.....	5
2.6. Measurement uncertainty.....	6
2.8. Table Of Parameters Of Test Software Setting	7
3. 99% Occupied Bandwidth	8
3.1. Test equipment	8
3.2. Block diagram of test setup.....	8
3.3. Limits	8
3.4. Test Procedure	8
3.5. Test Result.....	9
3.6. Original test data.....	9
5. Field Strength of Spurious Emissions And Field Strength of Fundamental.....	10
5.1. Test equipment	10
5.2. Block diagram of test setup.....	10
5.3. Limit	11
5.4. Test Procedure	13
5.5. Test result	14
6.Power line conducted emission	22
6.1 Test equipment	22
6.2 Block diagram of test setup.....	22
6.3 Power Line Conducted Emission Limits(Class B)	22
6.4 Test Procedure.....	23
6.5 Test Result.....	23

TEST REPORT DECLARE

Applicant	:	LJ ELECTRONICS TECHNOLOGY LIMITED
Address	:	Suite 1003, 10/F., Chung Sheung Building, 9 Queen Victoria Street, Centra, HONG KONG
Equipment under Test	:	Wireless Dog Fence
Test Model No	:	B90
Manufacturer	:	LJ ELECTRONICS TECHNOLOGY LIMITED
Address	:	Suite 1003, 10/F., Chung Sheung Building, 9 Queen Victoria Street, Centra, HONG KONG

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C (15.249)**Test procedure used:** ANSI C63.10:2013**We Declare:**

The equipment described above is tested by DongGuan ShuoXin Electronic Technology Co., Ltd(ATT), and in the configuration tested the equipment complied with the standards specified above.

The test results are contained in this test report and DongGuan ShuoXin Electronic Technology Co.,

Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

1. Summary of test Standards and results

The EUT have been tested according to the applicable standards as referenced below.

Description of Test Item	Standard	Results
AC Line Conducted Emissions	FCC Part 15.207 (a),	PASS
99% Bandwidth	FCC Part 15.215(c),	PASS
Radiated emission	FCC Part 15.209, 15.249 (a),	PASS
Bandedge	FCC Part 15.205	PASS

NOTE: "N/A" denotes test is not applicable in this Test Report

2. General test information

2.1. Description of EUT

EUT* Name	:	Wireless Dog Fence
Model Number	:	B90
EUT function description	:	Please reference user manual of this device
Power supply	:	I/P: DC 5V or DC 3.7V
Operation frequency	:	2420MHz, 1 Channel
Modulation	:	GFSK
Antenna Type	:	Internal Antenna Antenna number:2(MIMO Mode) Maximum PK gain:1.5dBi
Date of Receipt	:	2025/04/30
Sample Type	:	Single production

Note: EUT is the ab. of equipment under test.

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number or Type	Other
/	/	/	/

2.3. Assistant equipment used for test

Description of Assistant equipment	Manufacturer	Model number or Type	Other
/	/	/	/

2.4. Block diagram of EUT configuration for test



2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.6. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	±0.048kHz
Uncertainty for conducted RF Power	±0.32dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test Facility:

The Test site used by DongGuan ShuoXin Electronic Technology Co., Ltd. to collect test data is located on the Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China

The test facility is recognized, certified, or accredited by the following organizations:

Item	Registration No.	Expiration Date
CNAS	L3098	2030-08-27
A2LA	4893.01	2026-06-30
Innovation, Science and Economic Development Canada (ISED)	11033A CAB identifier:CN0083	2026-06-30
Federal Communications Commission (FCC)	171688 Designation No.:CN1235	2026-06-30

2.8. Table Of Parameters Of Test Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	N/A
Frequency (MHz)	2420MHz
Power Parameters	default


NOTE :Antenna 1 and Antenna 2 transmit simultaneously.

3. 99% Occupied Bandwidth

3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until	Calibrated Date
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	05/22/2025	05/23/2024
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A	N/A
3	RF Cable	Micable	C10-01-01-1	100309	N/A	N/A

3.2. Block diagram of test setup

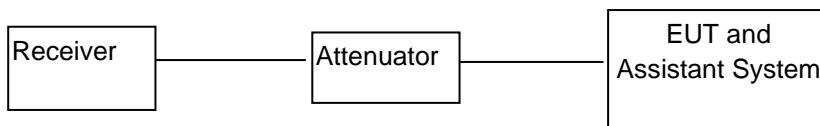

3.3. Limits

N/A

3.4. Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (3) Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- (4) Repeat above procedures until all frequencies measured were complete.

3.5. Test Result

Frequency (MHz)	20dB Bandwidth (MHz)	99% dB bandwidth (MHz)
2420	1.155	1.1449

3.6. Original test data

Test Frequency (MHz)	Test Data
2420	 <p>Test Data (Screenshot of Keysight Spectrum Analyzer):</p> <p>Center Freq: 2.420000000 GHz RBW: 30.000 kHz VBW: 100 kHz Span: 3 MHz Sweep: 4.133 ms Occupied Bandwidth: 1.1449 MHz Total Power: -21.5 dBm Transmit Freq Error: -36.744 kHz x dB Bandwidth: 1.155 MHz % of OBW Power: 99.00 % x dB: -20.00 dB</p>


5. Field Strength of Spurious Emissions And Field Strength of Fundamental

5.1. Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	101307	06/05/2025
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/17/2025
3	Loop antenna	SCHWARZBECK K	FMZB1519	1519-062	04/01/2028
4	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	03/28/2026
5	HORN ANTENNA	SCHWARZBECK	BBHA9120D	BBHA 9120D 1065	03/27/2026
6	Preamplifier Amplifier	HP	8447F	3113A05680	11/17/2025
7	PRE-AMPLIFIER	EMEC	EM01G26G	060679	03/27/2026
8	RF Cable	R&S	Test Cable 4	4	11/17/2025
9	RF Cable	R&S	Test Cable 5	5	11/17/2025
10	RF Cable	R&S	Test Cable 9	9	03/25/2026
11	RF Cable	R&S	Test Cable 10	10	03/25/2026
12	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

5.2. Block diagram of test setup

In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

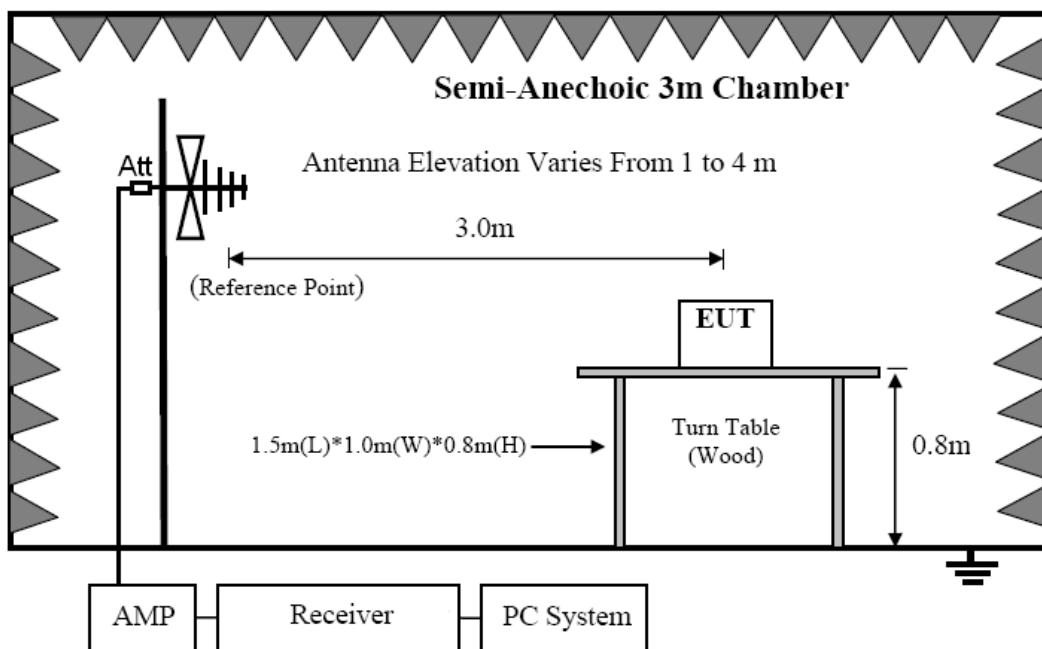

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

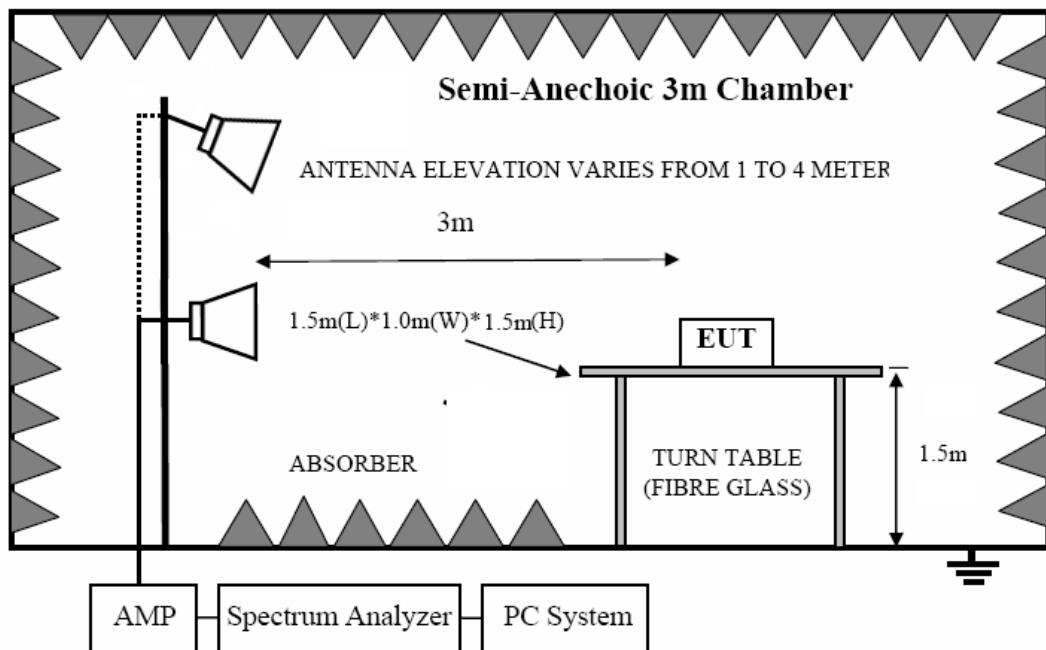

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

5.3. Limit

5.3.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1.0495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

5.3.2 FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μ V/m	dB(μ V)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

5.3.3 FCC 15.249(a) limit

Fundamental Frequency (MHz)	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (millivolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24.0-24.25	250	2500

5.4. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and assistant system according clause 2.4 and 8.2
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Change power supply range from 85% to 115% of the rated supply voltage
 - (d) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9MHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9KHz to 30MHz and 18GHz to 25GHz, so below final test was performed with frequency range from 30MHz to 18GHz.
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.
- (6) For emissions from 30MHz to 1GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 KHz.
- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure, Detector is at PK; RBW is set at 1MHz, VBW is set at 3MHz for Average measure, Detector is at RMS..
- (8) For Field Strength of Fundamental were measured with Spectrum Analyzer, and the RBW is set at above 99% Occupied Bandwidth , VBW is set at equal to RBW for Peak measure, Detector is at PK
- (9) The test result is calculated as the following:

Result = Reading + Correct Factor

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator

Margin = Result - Limit

5.5. Test result

ON TIME=0.63ms

TOTAL TIME=2.03ms

DUTY CYCLE=ON TIME/TOTAL TIME=0.63ms/2.03ms≈0.31

AVG=PEAK+20Log(DUTY CYCLE)

=PEAK+20Log(0.31)

=PEAK-10.17



Below 30M

EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	24°C	Relative Humidity:	55%
Distance:	3m	Test Power:	DC 3.7V
Polarization:	--	Test Result:	Pass
Test Mode:	TX	Test By:	Blue Qiu

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	P
--	--	--	--	P

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor


Between 30M – 1000 MHz

EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	23.4	Relative Humidity:	23.4
Distance:	3m	Test Power:	DC 3.7V
Polarization:	Vertical	Test Result:	Pass
Test Time:	2025/5/4	Test By:	Blue Qiu
Standard:	(RE)FCC PART 15 class B 3m		
Test Mode:	TX		

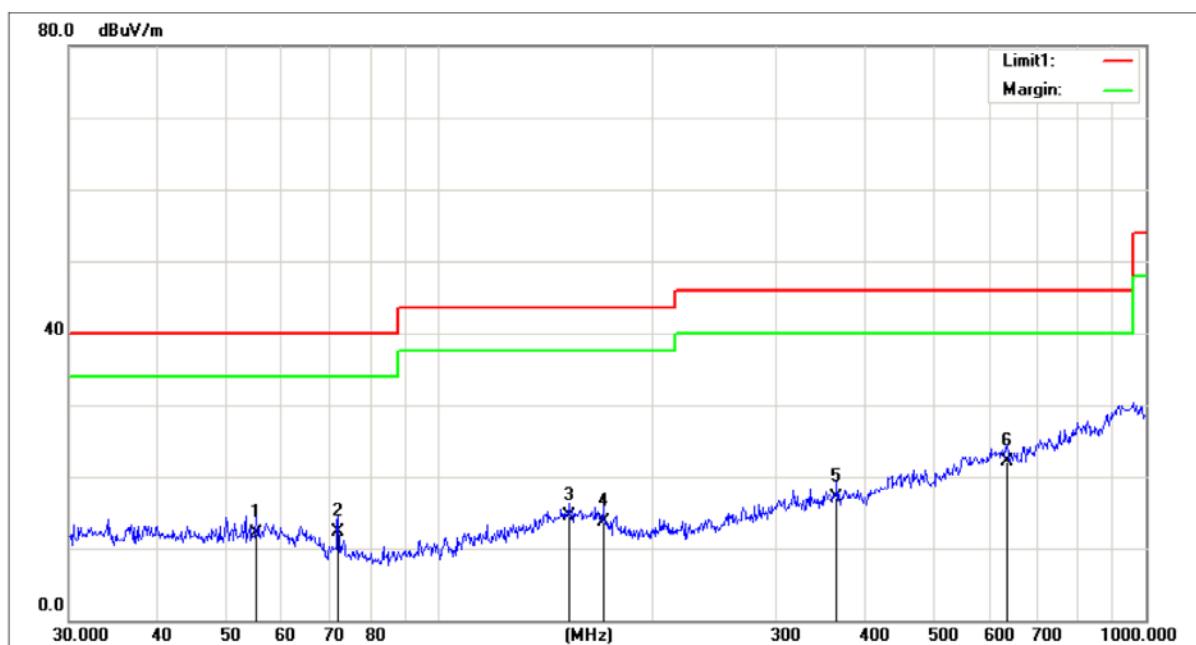

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	55.2207	26.14	-14.09	12.05	40.00	-27.95	QP
2	72.0841	28.72	-16.38	12.34	40.00	-27.66	QP
3	152.6640	25.29	-10.78	14.51	43.50	-28.99	QP
4	170.7925	25.38	-11.61	13.77	43.50	-29.73	QP
5	365.5391	25.48	-8.45	17.03	46.00	-28.97	QP
6	636.1340	25.75	-3.56	22.19	46.00	-23.81	QP

EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	23.4	Relative Humidity:	23.4
Distance:	3m	Test Power:	DC 3.7V
Polarization:	Horizontal	Test Result:	Pass
Test Time:	2025/5/4	Test By:	Blue Qiu
Standard:	(RE)FCC PART 15 class B 3m		
Test Mode:	TX		

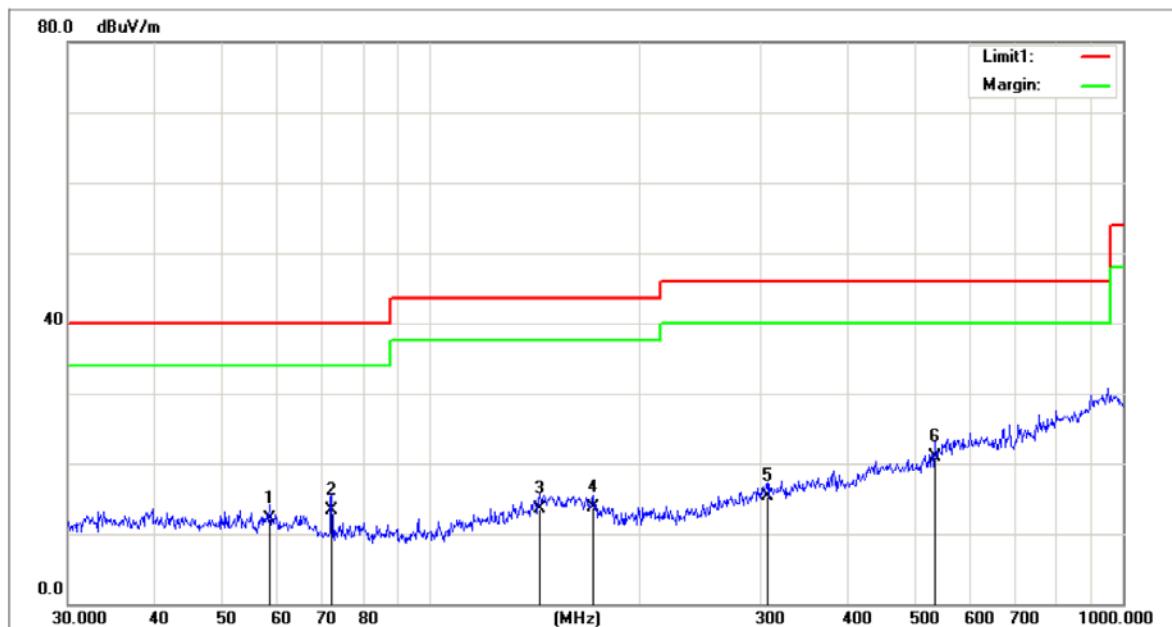


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	58.6126	26.10	-14.08	12.02	40.00	-27.98	QP
2	72.0841	29.72	-16.38	13.34	40.00	-26.66	QP
3	143.8294	25.13	-11.55	13.58	43.50	-29.92	QP
4	171.9945	25.70	-12.06	13.64	43.50	-29.86	QP
5	306.7536	24.64	-9.39	15.25	46.00	-30.75	QP
6	535.7073	26.47	-5.60	20.87	46.00	-25.13	QP

Above 1000MHz


EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	23°C	Relative Humidity:	54%
Distance:	3m	Test Power:	DC 3.7V
Polarization:	Vertical	Test Result:	Pass
Test Time:	2025/5/4	Test By:	Blue Qiu
Standard:	FCC PART 15 C 1-26.5G PEAK		
Test Mode:	TX		
Note:	2420 MHz		

80.0 dBuV/m

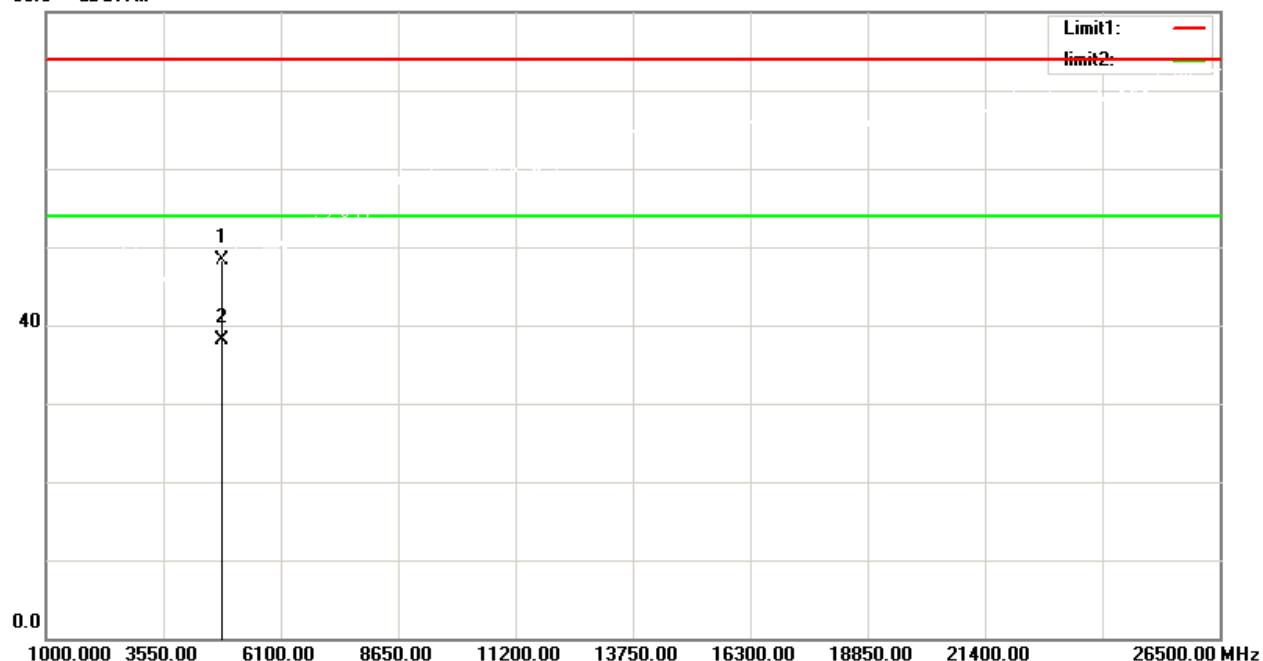

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4840.000	50.65	-2.29	48.36	74.00	-25.64	peak
2	4840.000			38.19	54.00	-15.81	AVG

EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	23°C	Relative Humidity:	54%
Distance:	3m	Test Power:	DC 3.7V
Polarization:	Horizontal	Test Result:	Pass
Test Time:	2025/5/4	Test By:	Blue Qiu
Standard:	FCC PART 15 C 1-26.5G PEAK		
Test Mode:	TX		
Note:	2420 MHz		

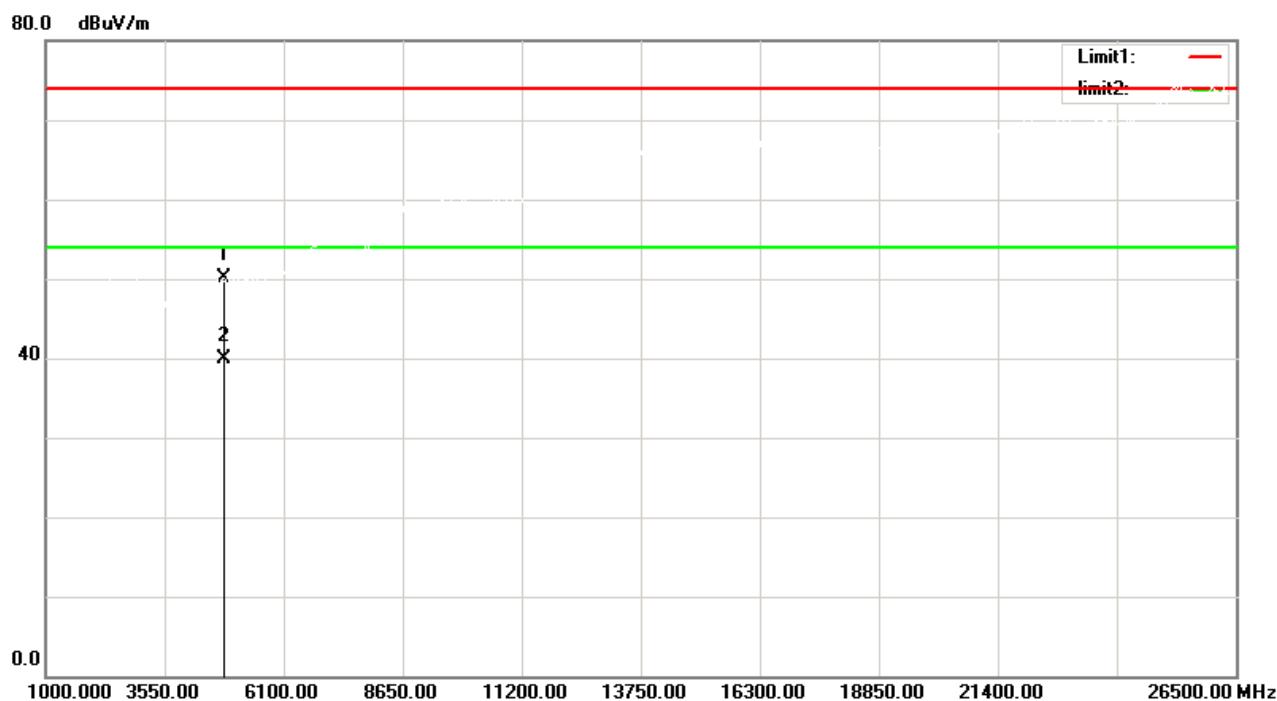

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4840.000	52.33	-2.29	50.04	74.00	-23.96	peak
2	4840.000			39.87	54.00	-14.13	AVG

Radiated band edge and Field Strength of Fundamental

EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	23°C	Relative Humidity:	54%
Distance:	3m	Test Power:	DC 3.7V
Polarization:	Vertical	Test Result:	Pass
Test Time:	2025/5/4	Test By:	Blue Qiu
Standard:	(RE)FCC PART 15.249		
Test Mode:	TX		
Note:	2420 MHz		

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2400.000	57.59	-8.44	49.15	74.00	-24.85	peak
2	2400.000			38.98	54.00	-15.02	AVG
3	2420.000	77.61	-8.39	69.22	114.00	-44.78	peak
4	2420.000			59.05	94.00	-34.95	AVG
5	2483.500	57.35	-8.12	48.23	74.00	-25.77	peak
6	2483.500			38.06	54.00	-15.94	AVG

EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	23°C	Relative Humidity:	54%
Distance:	3m	Test Power:	DC 3.7V
Polarization:	Horizontal	Test Result:	Pass
Test Time:	2025/5/4	Test By:	Blue Qiu
Standard:	(RE)FCC PART 15.249		
Test Mode:	TX		
Note:	2420 MHz		


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2400.000	57.81	-8.44	49.37	74.00	-24.63	peak
2	2400.000			39.20	54.00	-14.80	AVG
3	2419.750	86.80	-8.39	78.41	114.00	-35.59	peak
4	2419.750			68.24	94.00	-25.76	AVG
5	2483.500	56.79	-8.17	48.62	74.00	-25.38	peak
5	2483.500			38.45	54.00	-15.55	AVG

6. Power line conducted emission

6.1 Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-00 24	11/17/2025
2	EMI Test Receiver	R&S	ESCI	101308	06/05/2025
3	LISN	AFJ	LS16	16011103219	11/19/2025
4	LISN	Schwarzbeck	NSLK 8127	8127-432	11/19/2025
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

6.2 Block diagram of test setup

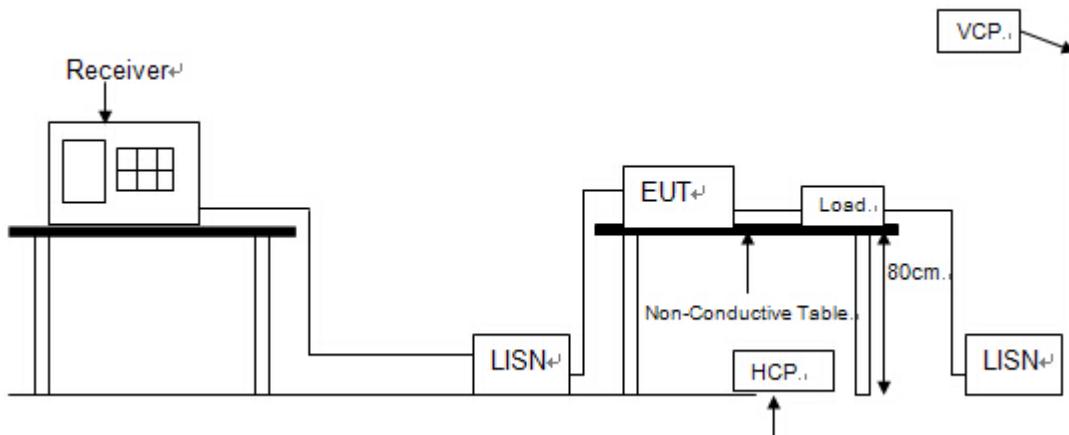

6.3 Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

6.4 Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.


6.5 Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “” means peak detection; “” mans average detection

EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	23°C	Relative Humidity:	54%
Distance:	3m	Test Power:	DC 3.7V (AC 120V 60Hz)
Probe:	L	Test Result:	Pass
Test Time:	2025/5/4	Test By:	Blue Qiu
Standard:	(CE)FCC PART 15 class B_QP		
Test Mode:	TX		

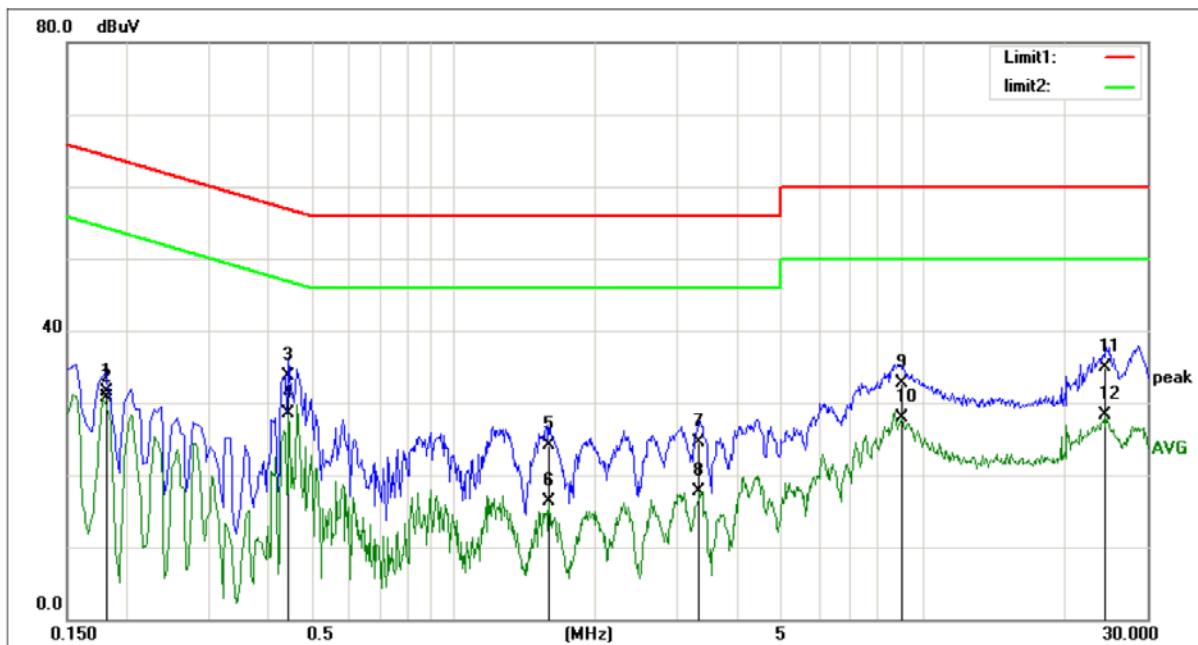


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1819	20.81	10.77	31.58	64.39	-32.81	QP
2	0.1819	19.84	10.77	30.61	54.39	-23.78	AVG
3	0.4460	22.80	10.82	33.62	56.95	-23.33	QP
4	0.4460	17.63	10.82	28.45	46.95	-18.50	AVG
5	1.5940	13.31	10.85	24.16	56.00	-31.84	QP
6	1.5940	5.49	10.85	16.34	46.00	-29.66	AVG
7	3.3300	13.11	11.44	24.55	56.00	-31.45	QP
8	3.3300	6.27	11.44	17.71	46.00	-28.29	AVG
9	8.9819	21.62	11.16	32.78	60.00	-27.22	QP
10	8.9819	16.82	11.16	27.98	50.00	-22.02	AVG
11	24.3500	21.91	13.05	34.96	60.00	-25.04	QP
12	24.3500	15.17	13.05	28.22	50.00	-21.78	AVG

The test result is calculated as the following:

- (1) Result = Reading + Correct Factor
- (2) Correct Factor = (LISN, ISN, PLC or Current Probe) Factor + Cable Loss +Attenuator
- (3) Margin = Result - Limit

EUT:	Wireless Dog Fence	Model No.:	B90
Temperature:	23°C	Relative Humidity:	54%
Distance:	3m	Test Power:	DC 3.7V (AC 120V 60Hz)
Probe:	N	Test Result:	Pass
Test Time:	2025/5/4	Test By:	Blue Qiu
Standard:	(CE)FCC PART 15 class B_QP		
Test Mode:	TX		

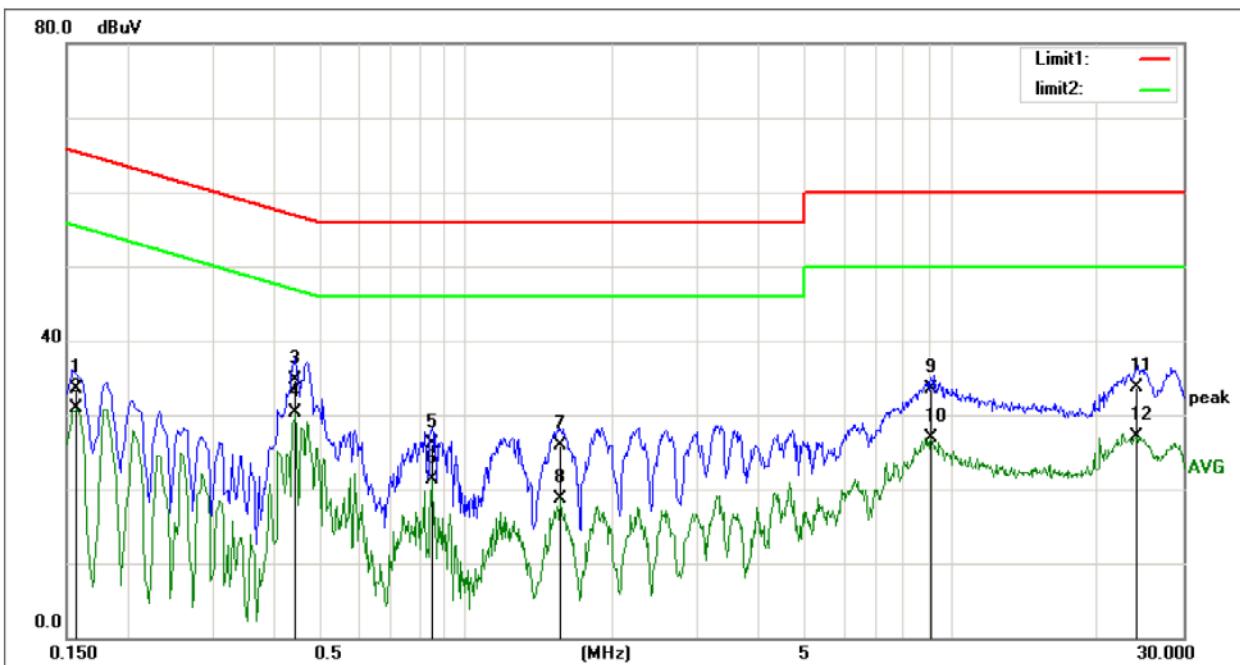

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	22.77	10.81	33.58	65.56	-31.98	QP
2	0.1580	20.05	10.81	30.86	55.56	-24.70	AVG
3	0.4460	23.81	10.82	34.63	56.95	-22.32	QP
4	0.4460	19.42	10.82	30.24	46.95	-16.71	AVG
5	0.8500	15.37	10.75	26.12	56.00	-29.88	QP
6	0.8500	10.55	10.75	21.30	46.00	-24.70	AVG
7	1.5660	15.03	10.84	25.87	56.00	-30.13	QP
8	1.5660	7.81	10.84	18.65	46.00	-27.35	AVG
9	9.1059	22.27	11.17	33.44	60.00	-26.56	QP
10	9.1059	15.81	11.17	26.98	50.00	-23.02	AVG
11	24.0459	20.67	13.08	33.75	60.00	-26.25	QP
12	24.0459	14.11	13.08	27.19	50.00	-22.81	AVG

The test result is calculated as the following:

- (1) Result = Reading + Correct Factor
- (2) Correct Factor = (LISN, ISN, PLC or Current Probe) Factor + Cable Loss +Attenuator
- (3) Margin = Result - Limit

END OF REPORT