

## Antenna specification

### Antenna Sample Confirmation From

Name of supplier	ShenZhen Aihui Technology Co. , Ltd				
Customer name	Sol dat				
Sample name	DC206				
model					
Sample size	Wire length: 70mm 3rd generation terminals				
Inspection item	Performance test	Visual inspection	Structure	In the news	Test results
Notes					
Quality Audit		Project Audit		Business confirm ation	
The following is to be completed by the client					
Customer feedback					

Customer signature/seal	
	<b>date:</b>

## Antenna Test Report

Test Unit: Shenzhen Aihui Technology Co. , Ltd.			
Materials	FPC coaxial line		
Antenna type	<b>Monopole</b>	Type	Polarization mode <b>Linear</b>
Application scenario			
Working band	2.4G-WIFI	VSWR	$\leq 2$
Power	Max: 2W	Impedance	50Ω

dB <sub>i</sub>	
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable

**Antenna Description::**

**1. Grounding processing and picture description: no**

**2. Need to change the motherboard to match: no**

- Test voltage: 3.6V, check the antenna contact is good before testing.
- The RF cable of the integrated tester is kept in a natural state and can not be curled.

Specification: test the specified power level, all indicators must conform to the specifications.

1.Project Image

2.Test Fixture

3.Antenna matching circuit

4.S11 test

5.Antenna passive efficiency and gain

6.Darkroom test equipment and data

7.Schematic diagram of antenna assembly

8.Antenna environment handling

9.Antenna mass production index

10.Structural drawing

## 1. Project Image


The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment

## 2. Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making

Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole), and the other end is connected to the SMA joint. The diagram is as follows:

## 3. Antenna matching circuit

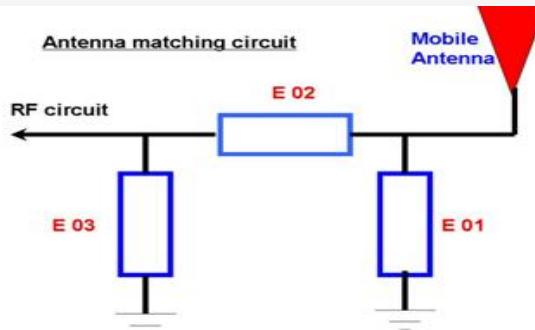


### Modify

E01	E02	E03
No	No	No

Note: The match is unmodified.

## 4.S11 test

4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

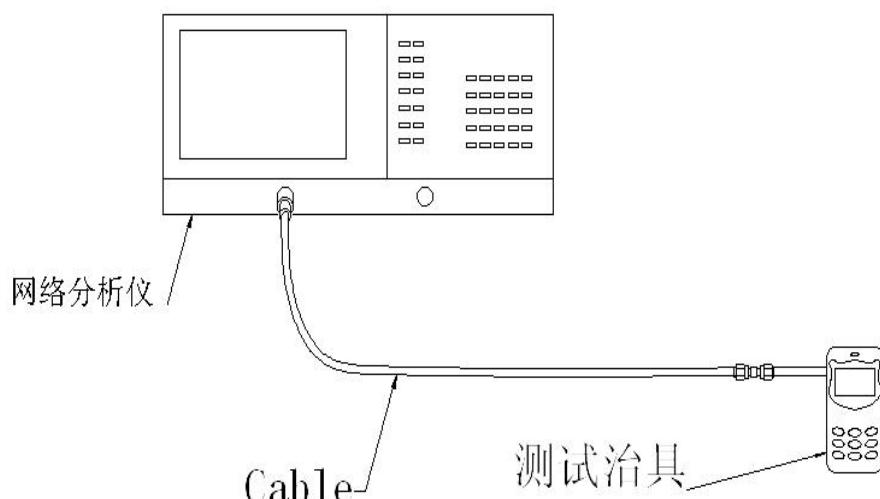


## 5. Darkroom test equipment and data

### 5.1. Test Equipment

Test system: shielded darkroom

The temperature was  $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$  and the humidity was  $50\% \pm 15\%$


Test equipment: when testing passive data, use the Network analyzer AGILENT E5071C to test active data, use the omnibus CMW500

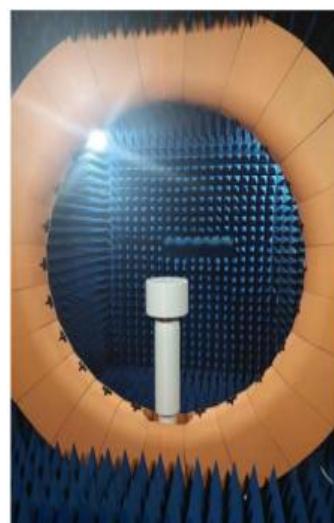


## 5.2. Passive antenna test data

Gain&Efficiency			
frequency (Hz)	gain (dB)	efficiency (dB)	efficiency
2400M	1.46	-3.96	56.47%
2410M	1.32	-3.88	55.16%
2420M	1.24	-3.73	55.11%
2430M	1.31	-3.81	54.21%
2440M	1.26	-3.35	53.03%
2450M	1.39	-3.14	54.41%
2460M	1.13	-3.26	53.74%
2470M	1.18	-3.12	52.38%
2480M	1.23	-3.31	51.37%
2490M	1.03	-3.76	50.28%
2500M	1.04	-3.84	50.66%


2400.0MHz H+V, Eff. 56.47%





Back View




2450.0MHz H+V, Eff. 54.41%




Back View




2500.0MHz H+V, Eff. 50.66%



Back View



## 6. Real-time WiFi results

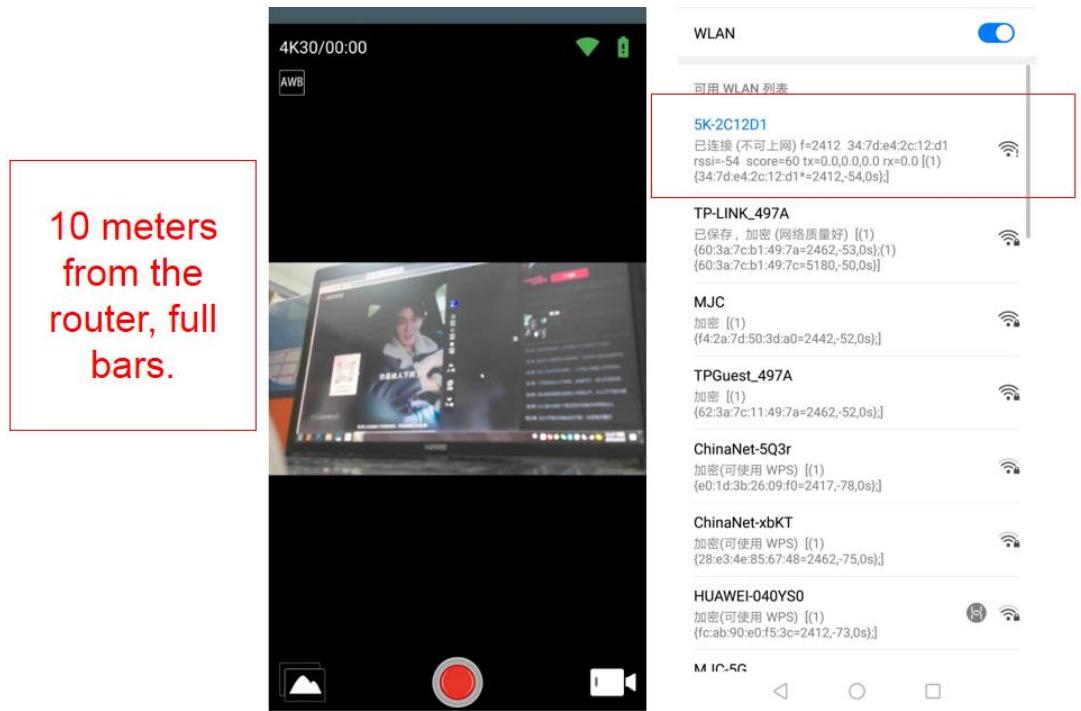

## 7. Schematic diagram of antenna assembly



## 8. Antenna environment handling

## Prototype environmental processing

## 9. Antenna mass production index

When the antenna is mass-produced, the SWR is taken as the mass-produced test standard. Based on the differences of the project itself, the following criteria are given:

Frequency	Standard for volume production
2400MHZ -2500MHZ	vSWR (Massproduction performance) <vSWR(Recognition of performance)+0.5

## 10. Structural drawings

