

FCC TEST REPORT

(PART 22)


Applicant:	ThingsMatrix Inc.
Address:	9442 North Capital of Texas Hwy, Plaza One, Suite 500, Austin, TX 78759

Manufacturer or Supplier:	ThingsMatrix Inc.
Address:	9442 North Capital of Texas Hwy, Plaza One, Suite 500, Austin, TX 78759
Product:	IoT Wireless Device
Brand Name:	ThingsMatrix
Model Name:	TMX08
FCC ID:	2ATV9TMX08
Date of tests:	Jul. 02, 2019 ~ Jul. 22, 2019

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC PART 22, Subpart H**
- ☒ **ANSI/TIA/EIA-603-D**
- ☒ **ANSI/TIA/EIA-603-E**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Alex Chen Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jul. 24, 2019	 Date: Jul. 24, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	6
1.2 TEST SITE AND INSTRUMENTS	7
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 CONFIGURATION OF SYSTEM UNDER TEST	10
2.3 TEST ITEM AND TEST CONFIGURATION.....	11
2.4 EUT OPERATING CONDITIONS.....	13
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3 TEST TYPES AND RESULTS.....	14
3.1 OUTPUT POWER MEASUREMENT	14
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	14
3.1.2 TEST PROCEDURES	14
3.1.3 TEST SETUP	15
3.1.4 TEST RESULTS	16
3.2 FREQUENCY STABILITY MEASUREMENT	25
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	25
3.2.2 TEST PROCEDURE.....	25
3.2.3 TEST SETUP	25
3.2.4 TEST RESULTS	25
3.3 OCCUPIED BANDWIDTH MEASUREMENT	26
3.3.1 TEST PROCEDURES	26
3.3.2 TEST SETUP	26
3.3.3 TEST RESULTS	26
3.4 BAND EDGE MEASUREMENT	27
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	27
3.4.2 TEST SETUP	27
3.4.3 TEST PROCEDURES	28
3.4.4 TEST RESULTS	28
3.5 CONDUCTED SPURIOUS EMISSIONS.....	29
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	29
3.5.2 TEST PROCEDURE.....	29
3.5.3 TEST SETUP	29
3.5.4 TEST RESULTS	29
3.6 RADIATED EMISSION MEASUREMENT	30
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	30
3.6.2 TEST PROCEDURES	30
3.6.3 DEVIATION FROM TEST STANDARD	30
3.6.4 TEST SETUP	31
3.6.5 TEST RESULTS	32



Test Report No.: RF190701W004-1

3.7	PEAK TO AVERAGE RATIO	60
3.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	60
3.7.2	TEST SETUP	60
3.7.3	TEST PROCEDURES	60
3.7.4	TEST RESULTS	60
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	61
5	INFORMATION ON THE TESTING LABORATORIES	62
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	63



Test Report No.: RF190701W004-1

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190701W004-1	Original release	Jul. 24, 2019

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 22.913 (a)	Effective Radiated Power	PASS	See Note
2.1055 22.355	Frequency Stability	PASS	See Note
2.1049 22.917b	Occupied Bandwidth	PASS	See Note
--	Peak to average ratio*	PASS	See Note
22.917	Band Edge Measurements	PASS	See Note
2.1051 22.917	Conducted Spurious Emissions	PASS	See Note
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -15.14dB at 56.230MHz.

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

Note: These items please refer to the LTE module report RXA1706-0199RF01R1 which The FCC ID is XMR201707BG96, and the LTE module has been certified by TA Technology(shanghai)Co.,Ltd on 09/12/2017.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Effective Radiated Power	$\pm 4.48\text{dB}$
Frequency Stability	$\pm 39.27\text{Hz}$
Radiated emissions	$\pm 4.48\text{dB}$
Conducted emissions	$\pm 2\text{ dB}$
Occupied Channel Bandwidth	$\pm 21.7\text{KHz}$
Band Edge Measurements	$\pm 4.48\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 26,19	Feb. 25,20
Bilog Antenna 1	ETS-LINDGREN	3143B	00161964	Feb. 26,19	Feb. 25,20
Bilog Antenna 2	ETS-LINDGREN	3143B	00161965	Feb. 26,19	Feb. 25,20
Horn Antenna 1	ETS-LINDGREN	3117	00168728	Feb. 26,19	Feb. 25,20
Horn Antenna 2	ETS-LINDGREN	3117	00168692	Nov. 30, 18	Nov. 29, 19
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40 -K-SG/QMS-00 361	15433	Nov. 21, 18	Nov. 20, 19
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 26,19	Feb. 25,20
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 24,19	Jun. 23,20
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 24,19	Jun. 23,20
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jun. 24,19	Jun. 23,20
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-1216	Feb. 26,19	Feb. 25,20
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jun. 24,19	Jun. 23,20
Power Meter	Anritsu	ML2495A	1506002	Feb. 26,19	Feb. 25,20
Power Sensor	Anritsu	MA2411B	1339352	Feb. 26,19	Feb. 25,20
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP -AR	IAA1504-001	Jun. 24,19	Jun. 23,20
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 26,19	Feb. 25,20

NOTE: 1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.

3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	IoT Wireless Device	
MODEL NAME	TMX08	
POWER SUPPLY	12Vdc (adapter or host equipment) 3.7Vdc (Li-ion, battery)	
MODULATION TYPE	LTE	QPSK/16QAM
FREQUENCY RANGE	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
	LTE Band 26 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 26 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 26 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 26 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
	LTE Band 26 (Channel Bandwidth: 15MHz)	831.5MHz ~ 841.5MHz
	LTE Band 26 (Channel Bandwidth: 15MHz)	831.5MHz ~ 841.5MHz
MAX. ERP POWER	LTE Band 5 (Channel Bandwidth: 1.4MHz)	93mW
	LTE Band 5 (Channel Bandwidth: 3MHz)	94mW
	LTE Band 5 (Channel Bandwidth: 5MHz)	93mW
	LTE Band 5 (Channel Bandwidth: 10MHz)	84mW
	LTE Band 26 (Channel Bandwidth: 1.4MHz)	111mW
	LTE Band 26 (Channel Bandwidth: 3MHz)	113mW
	LTE Band 26 (Channel Bandwidth: 5MHz)	124mW
	LTE Band 26 (Channel Bandwidth: 10MHz)	101mW
	LTE Band 26 (Channel Bandwidth: 15MHz)	102mW

ANTENNA TYPE	External Antenna with 2dBi gain for LTE Band 5 External Antenna with 1.4dBi gain for LTE Band 26
HW VERSION	BJ51AV01
SW VERSION	BJ51V01
I/O PORTS	Refer to user's manual
DATA CABLE	N/A

NOTE:


1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

List of Accessories:


ACCESSORIES	MODEL	SPECIFICATION
Power supply adapter	TDX-1201000	I/P:100~240VAC O/P:12VDC/1A
Battery	Li-ion Polymer Battery	DC 3.7V, 3000mAh, 11.1Wh
Sensor 1	Ultrasonic&Temperature sensor	-
Sensor 2	Ultrasonic sensor	-
Current draw sensor	Current draw sensor	-
Cellular Antenna	Cellular Antenna	-
GPS Antenna	GPS Antenna	-

2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION

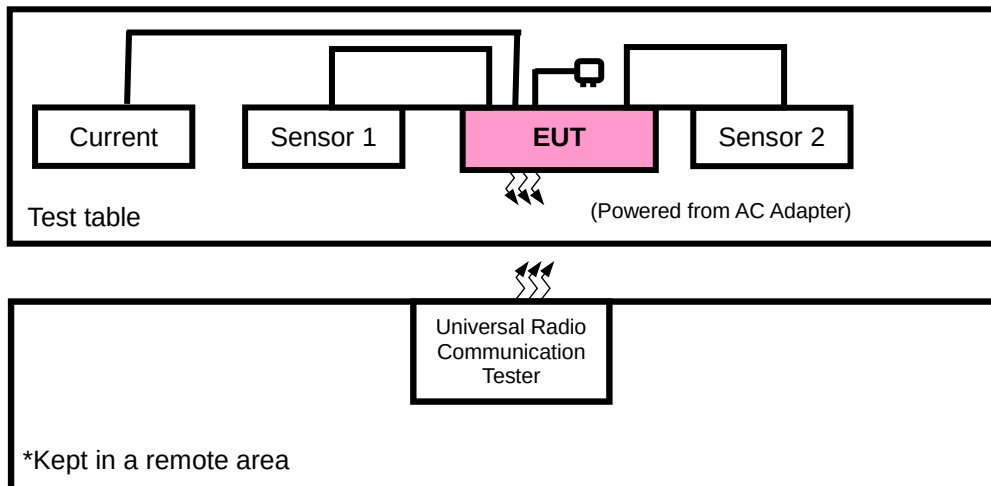

FOR CONDUCTED & E.R.P. TEST

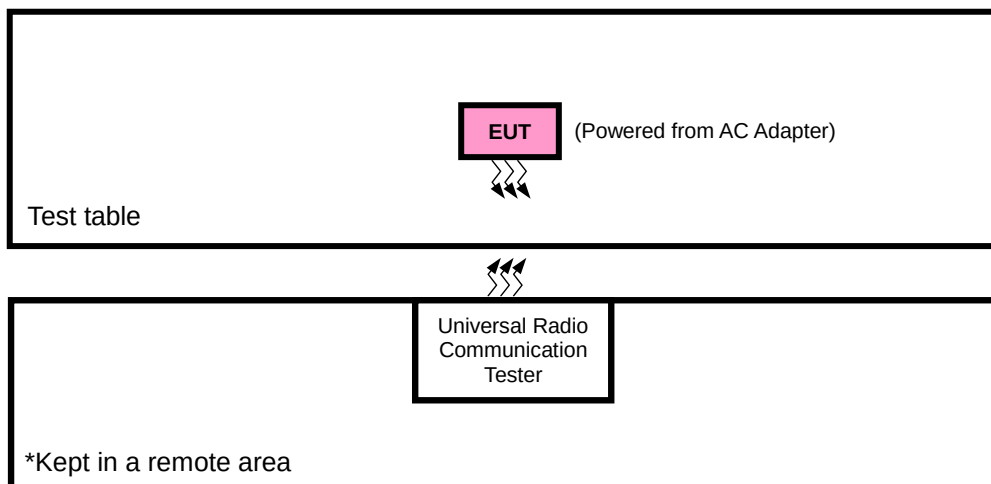



2.3 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM/EDGE/WCDMA/LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
–	EUT + Adapter with LTE link



LTE BAND 5 MODE

EUT CONFIGURE MODE	TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
B	ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset

LTE BAND 26 MODE

TEST ITEM		Available Channel	Tested Channel	Channel bandwidth	modulation	mode
B	ERP	26797 to 27033	26797, 26915, 27033	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26805 to 27025	26805, 26915, 27025	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	26797 to 27033	26915	1.4MHz	QPSK	1 RB / 0 RB Offset
		26805 to 27025	26915	3MHz	QPSK	1 RB / 0 RB Offset
		26815 to 27015	26915	5MHz	QPSK	1 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10MHz	QPSK	1 RB / 0 RB Offset
		26865 to 26965	26915	15MHz	QPSK	1 RB / 0 RB Offset

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 62%RH	3.7Vdc from Battery	Star Le
RADIATED EMISSION	23deg. C, 70%RH	12Vdc from adapter	Star Le



2.4 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE, 5MHz for WCDMA mode and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15dBi$.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


3.1.3 TEST SETUP

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

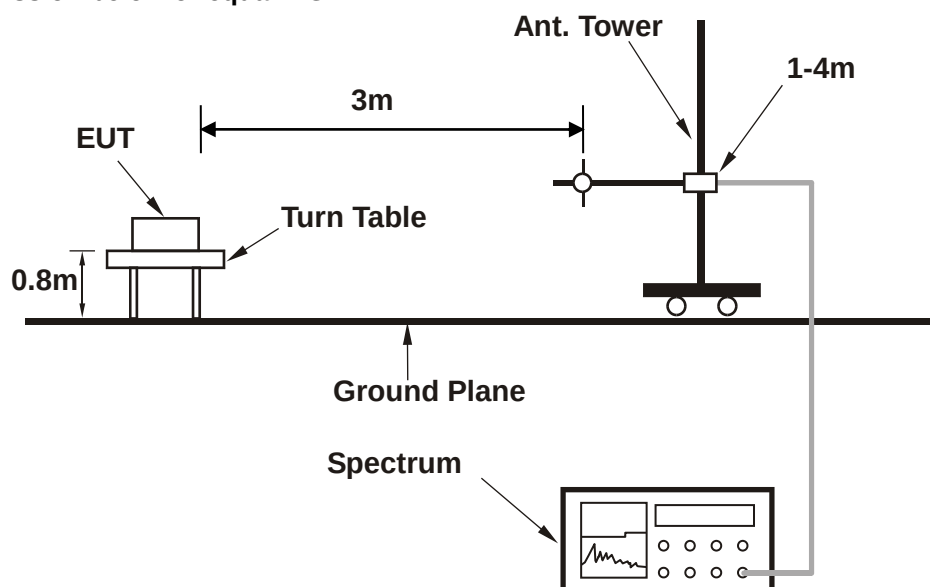


<Radiated Emission above 1 GHz>

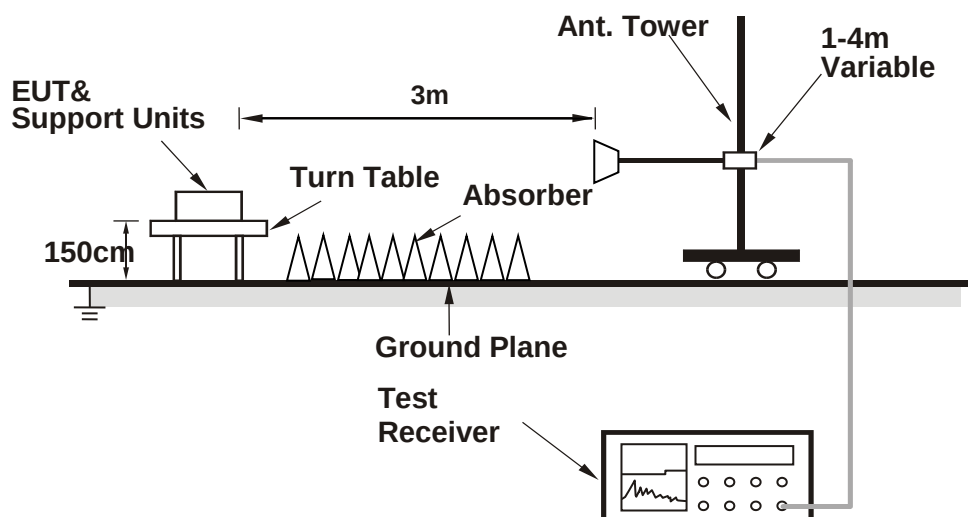

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Base on verify the Conducted Power is the same with module test report (RXA1706-0199RF01R1) by lab, the test results please refer the module Report No.: RXA1706-0199RF01R1, and the pre-scan data as below.

LTE BAND 5

LTE Band 5							
BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643	MPR
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
1.4	QPSK	1	0	22.57	23.06	23.65	0
		1	3	22.84	22.96	23.30	0
		1	5	22.74	23.04	23.11	0
		3	0	22.94	23.07	23.21	0
		3	2	22.87	23.01	23.25	0
		3	3	22.77	22.89	23.03	0
		6	0	22.35	23.15	22.79	0
	16QAM	1	0	22.95	22.58	23.40	0
		1	3	23.70	22.79	23.45	0
		1	5	23.72	22.84	23.21	0
		3	0	23.33	22.93	23.23	0
		3	2	23.28	22.69	23.07	0
		3	3	23.36	22.86	23.20	0
		6	0	22.75	22.94	23.01	0

LTE BAND 26

LTE Band 26							
BW	Modulation	RB Size	RB Offset	Low CH 26797	Mid CH 26915	High CH 27033	MPR
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
1.4	QPSK	1	0	22.57	23.07	23.66	0
		1	3	22.85	22.97	23.31	0
		1	5	22.74	23.05	23.12	0
		3	0	22.94	23.07	23.22	0
		3	2	22.88	23.01	23.26	0
		3	3	22.77	22.90	23.03	0
		6	0	22.35	23.15	22.79	0
	16QAM	1	0	22.95	22.59	23.40	0
		1	3	23.71	22.79	23.46	0
		1	5	23.72	22.85	23.22	0
		3	0	23.33	22.93	23.24	0
		3	2	23.29	22.70	23.07	0
		3	3	23.36	22.87	23.21	0
		6	0	22.76	22.95	23.02	0

ERP POWER (dBm)

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20407	824.7	-12.27	33.67	19.25	84.20	H	7
20525	836.5	-11.79	33.62	19.68	92.98	H	7
20643	848.3	-12.67	33.65	18.83	76.30	H	7
20407	824.7	-20.72	34.25	11.38	13.73	V	7
20525	836.5	-21.18	34.60	11.27	13.39	V	7
20643	848.3	-21.06	34.63	11.42	13.87	V	7



CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20407	824.7	-13.10	33.67	18.42	69.55	H	7
20525	836.5	-12.81	33.62	18.66	73.52	H	7
20643	848.3	-13.77	33.65	17.73	59.22	H	7
20407	824.7	-21.55	34.25	10.55	11.34	V	7
20525	836.5	-22.20	34.60	10.25	10.59	V	7
20643	848.3	-22.16	34.63	10.32	10.76	V	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20415	825.5	-12.08	33.72	19.49	88.94	H	7
20525	836.5	-11.73	33.62	19.74	94.28	H	7
20635	847.5	-12.54	33.65	18.96	78.69	H	7
20415	825.5	-20.53	34.30	11.62	14.52	V	7
20525	836.5	-21.12	34.60	11.33	13.58	V	7
20635	847.5	-20.93	34.57	11.49	14.10	V	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20415	825.5	-13.23	33.72	18.34	68.25	H	7
20525	836.5	-12.83	33.62	18.64	73.18	H	7
20635	847.5	-13.70	33.65	17.80	60.24	H	7
20415	825.5	-21.68	34.30	10.47	11.15	V	7
20525	836.5	-22.22	34.60	10.23	10.54	V	7
20635	847.5	-22.09	34.57	10.33	10.79	V	7

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20425	826.5	-12.09	33.69	19.45	88.19	H	7
20525	836.5	-11.80	33.62	19.67	92.77	H	7
20625	846.5	-12.61	33.66	18.90	77.64	H	7
20425	826.5	-20.54	34.85	12.16	16.44	V	7
20525	836.5	-21.19	34.60	11.26	13.36	V	7
20625	846.5	-21.00	34.59	11.44	13.94	V	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20425	826.5	-12.95	33.69	18.59	72.34	H	7
20525	836.5	-12.67	33.62	18.80	75.93	H	7
20625	846.5	-13.46	33.66	18.05	63.84	H	7
20425	826.5	-21.40	34.85	11.30	13.49	V	7
20525	836.5	-22.06	34.60	10.39	10.93	V	7
20625	846.5	-21.85	34.59	10.59	11.47	V	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20450	829.0	-12.67	33.73	18.91	77.71	H	7
20525	836.5	-12.25	33.62	19.22	83.64	H	7
20600	844.0	-13.19	33.51	18.17	65.66	H	7
20450	829.0	-21.12	34.54	11.27	13.38	V	7
20525	836.5	-21.64	34.60	10.81	12.04	V	7
20600	844.0	-21.58	34.46	10.73	11.82	V	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20450	829.0	-13.60	33.73	17.98	62.73	H	7
20525	836.5	-13.32	33.62	18.15	65.37	H	7
20600	844.0	-14.02	33.51	17.34	54.24	H	7
20450	829.0	-22.05	34.54	10.34	10.80	V	7
20525	836.5	-22.71	34.60	9.74	9.41	V	7
20600	844.0	-22.41	34.46	9.90	9.76	V	7

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



LTE BAND 26

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26797	824.7	-17.01	33.67	14.51	28.27	H	7
26915	836.5	-17.22	33.62	14.25	26.63	H	7
27033	848.3	-17.47	33.65	14.03	25.26	H	7
26797	824.7	-11.93	34.25	20.17	103.94	V	7
26915	836.5	-11.99	34.60	20.46	111.12	V	7
27033	848.3	-12.13	34.63	20.35	108.39	V	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26797	824.7	-17.84	33.67	13.68	23.35	H	7
26915	836.5	-18.24	33.62	13.23	21.06	H	7
27033	848.3	-18.57	33.65	12.93	19.61	H	7
26797	824.7	-12.76	34.25	19.34	85.86	V	7
26915	836.5	-13.01	34.60	19.44	87.86	V	7
27033	848.3	-13.23	34.63	19.25	84.14	V	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26805	825.5	-16.82	33.72	14.75	29.86	H	7
26915	836.5	-17.16	33.62	14.31	27.00	H	7
27015	847.5	-17.34	33.65	14.16	26.06	H	7
26805	825.5	-11.74	34.30	20.41	109.93	V	7
26915	836.5	-11.93	34.60	20.52	112.67	V	7
27015	847.5	-12.00	34.57	20.42	110.18	V	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26805	825.5	-17.97	33.72	13.60	22.91	H	7
26915	836.5	-18.26	33.62	13.21	20.96	H	7
27015	847.5	-18.50	33.65	13.00	19.95	H	7
26805	825.5	-12.89	34.30	19.26	84.35	V	7
26915	836.5	-13.03	34.60	19.42	87.46	V	7
27015	847.5	-13.16	34.57	19.26	84.35	V	7

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26815	826.5	-16.83	33.69	14.71	29.61	H	7
26915	836.5	-17.23	33.62	14.24	26.57	H	7
27015	846.5	-17.41	33.66	14.10	25.71	H	7
26815	826.5	-11.75	34.85	20.95	124.42	V	7
26915	836.5	-12.00	34.60	20.45	110.87	V	7
27015	846.5	-12.07	34.59	20.37	108.99	V	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26815	826.5	-17.69	33.69	13.85	24.29	H	7
26915	836.5	-18.10	33.62	13.37	21.75	H	7
27015	846.5	-18.26	33.66	13.25	21.14	H	7
26815	826.5	-12.61	34.85	20.09	102.07	V	7
26915	836.5	-12.87	34.60	19.58	90.74	V	7
27015	846.5	-12.92	34.59	19.52	89.62	V	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26840	829.0	-17.41	33.73	14.17	26.09	H	7
26915	836.5	-17.68	33.62	13.79	23.96	H	7
26990	844.0	-17.99	33.51	13.37	21.74	H	7
26840	829.0	-12.33	34.54	20.06	101.30	V	7
26915	836.5	-12.45	34.60	20.00	99.95	V	7
26990	844.0	-12.65	34.46	19.66	92.36	V	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26840	829.0	-18.34	33.73	13.24	21.06	H	7
26915	836.5	-18.75	33.62	12.72	18.72	H	7
26990	844.0	-18.82	33.51	12.54	17.96	H	7
26840	829.0	-13.26	34.54	19.13	81.77	V	7
26915	836.5	-13.52	34.60	18.93	78.13	V	7
26990	844.0	-13.48	34.46	18.83	76.30	V	7

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26865	831.5	-17.41	33.74	14.18	26.15	H	7
26915	836.5	-17.68	33.62	13.79	23.96	H	7
26965	841.5	-17.99	33.47	13.33	21.54	H	7
26865	831.5	-12.33	34.55	20.07	101.53	V	7
26915	836.5	-12.45	34.60	20.00	99.95	V	7
26965	841.5	-12.65	34.42	19.62	91.52	V	7

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
26865	831.5	-18.34	33.74	13.25	21.11	H	7
26915	836.5	-18.75	33.62	12.72	18.72	H	7
26965	841.5	-18.82	33.47	12.50	17.80	H	7
26865	831.5	-13.26	34.55	19.14	81.96	V	7
26915	836.5	-13.52	34.60	18.93	78.13	V	7
26965	841.5	-13.48	34.42	18.79	75.60	V	7

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

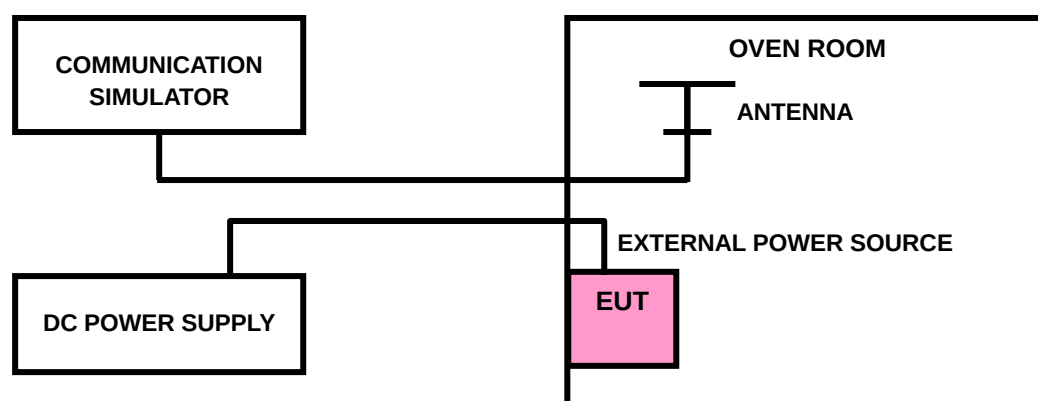

3.2.4 TEST RESULTS


The test results was recorded in Report No.: RXA1706-0199RF01R1.

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

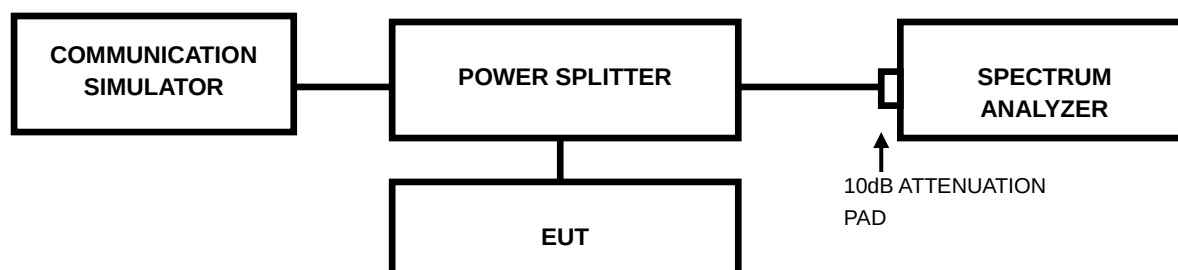

3.3.3 TEST RESULTS


The test results was recorded in Report No.: RXA1706-0199RF01R1.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

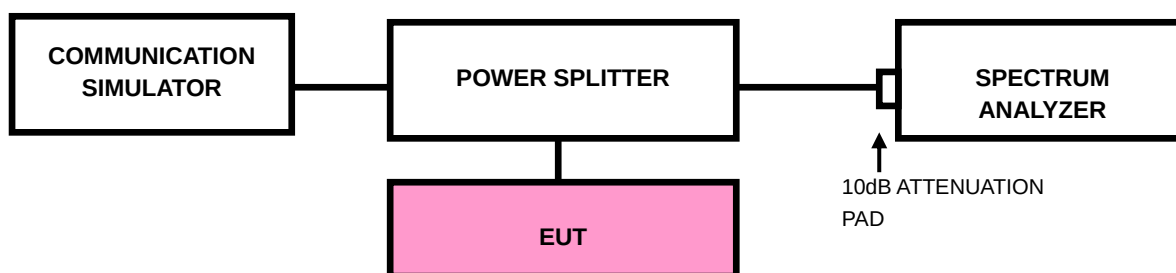

3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz).
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- f. Record the max trace plot into the test report.

3.4.4 TEST RESULTS

The test results was recorded in Report No.: RXA1706-0199RF01R1.

3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 9GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

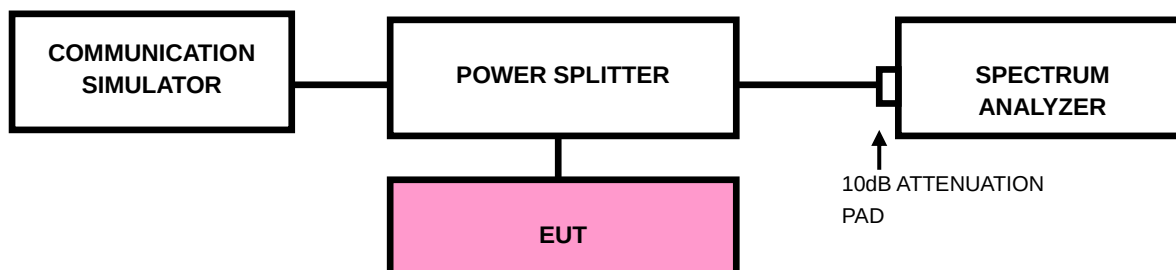

3.5.4 TEST RESULTS

The test results was recorded in Report No.: RXA1706-0199RF01R1.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP

< Frequency Range 30MHz~1GHz >

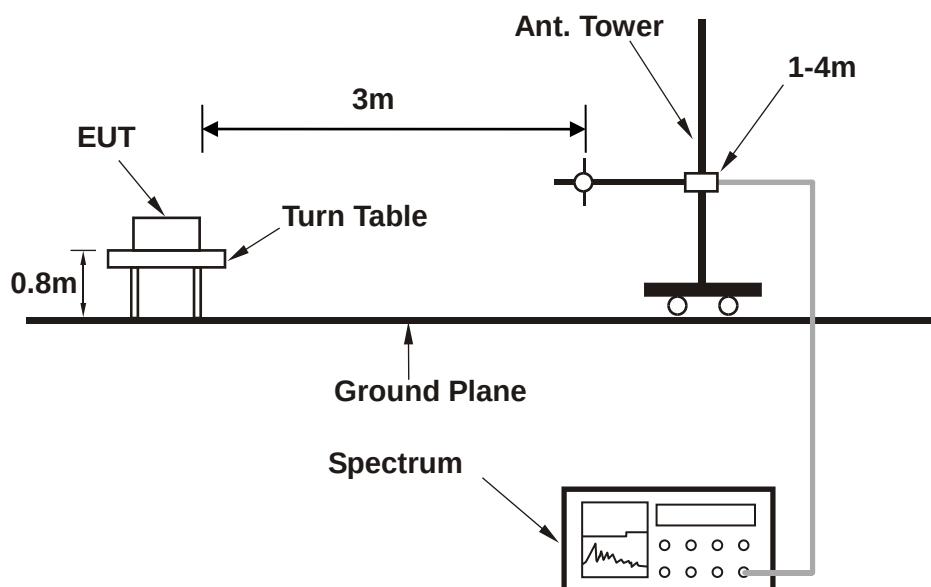

< Frequency Range above 1GHz >

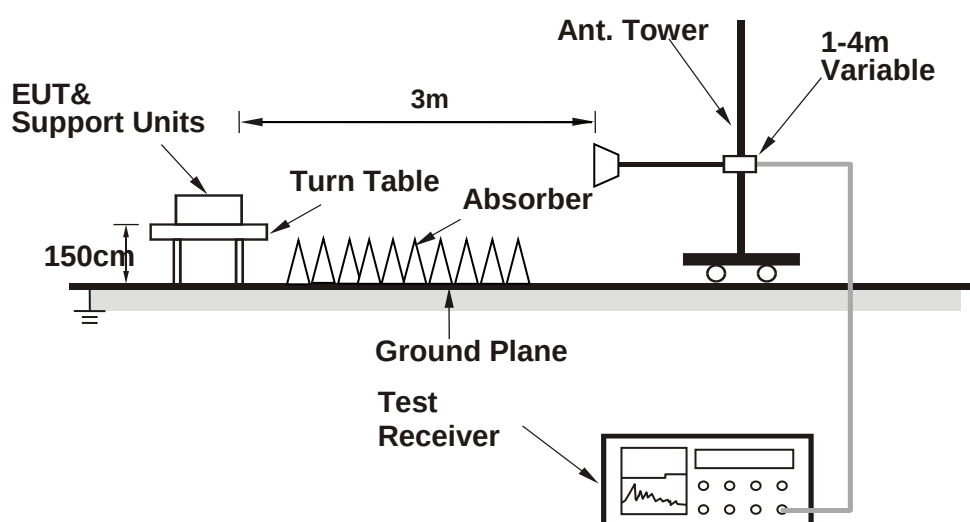

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS


BELOW 1GHz WORST-CASE DATA

30 MHz – 1GHz data:

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	56.230	-28.14	-35.12	-13.00	-15.14	6.98	Peak	Horizontal
2	89.670	-31.13	-39.62	-13.00	-18.13	8.49	Peak	Horizontal
3	156.640	-29.98	-40.21	-13.00	-16.98	10.23	Peak	Horizontal
4	254.120	-32.14	-45.23	-13.00	-19.14	13.09	Peak	Horizontal
5	365.240	-35.16	-51.28	-13.00	-22.16	16.12	Peak	Horizontal
6	423.160	-44.85	-62.35	-13.00	-31.85	17.50	Peak	Horizontal

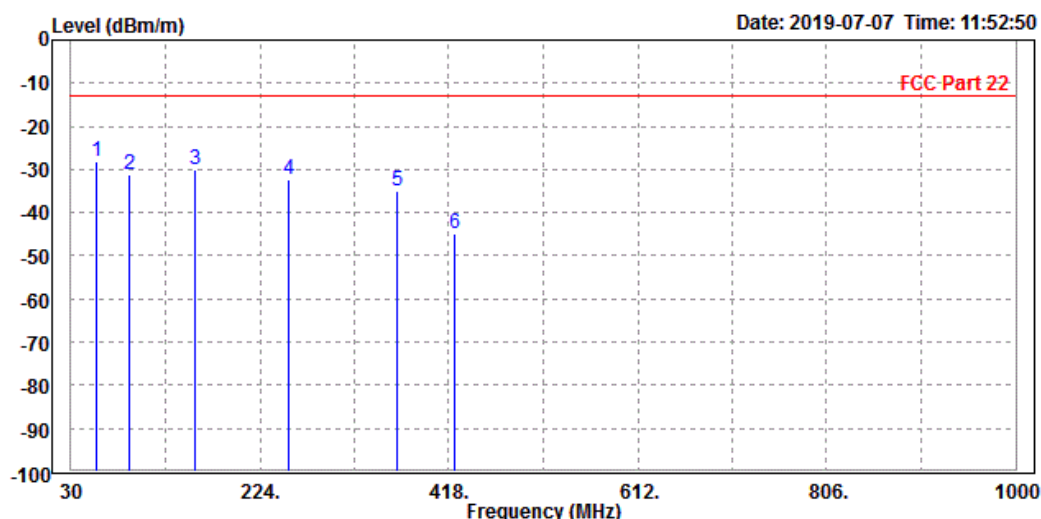

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	42.150	-31.11	-42.19	-13.00	-18.11	11.08	Peak	Vertical
2	89.650	-31.64	-40.23	-13.00	-18.64	8.59	Peak	Vertical
3	158.640	-38.26	-48.56	-13.00	-25.26	10.30	Peak	Vertical
4	201.210	-44.50	-55.36	-13.00	-31.50	10.86	Peak	Vertical
5	258.790	-46.04	-59.42	-13.00	-33.04	13.38	Peak	Vertical
6	458.650	-47.09	-65.21	-13.00	-34.09	18.12	Peak	Vertical

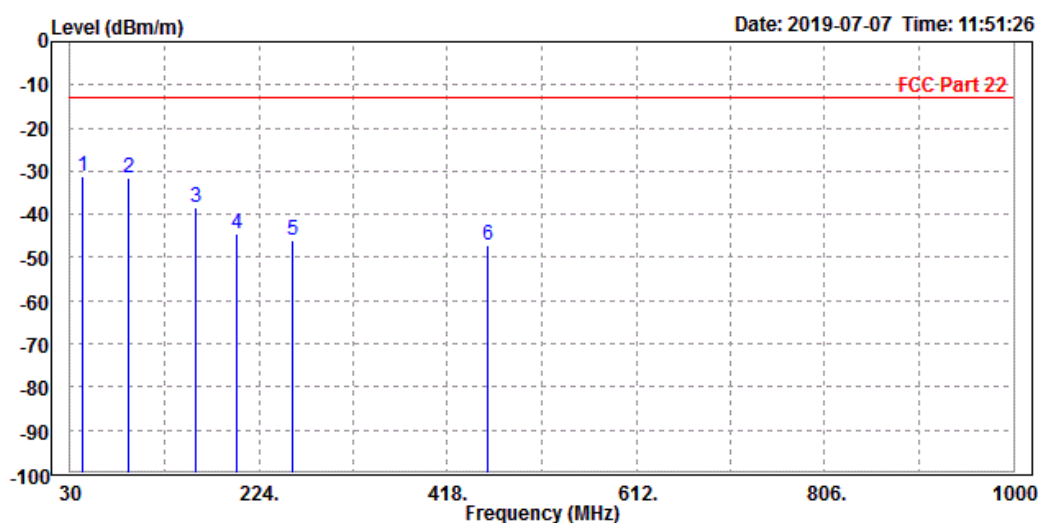



**BUREAU
VERITAS**

Test Report No.: RF190701W004-1

ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

LTE Band 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-64.08	-59.26	-13.00	-51.08	-4.82	Peak	Horizontal
2 PP	2512.000	-63.74	-62.15	-13.00	-50.74	-1.59	Peak	Horizontal

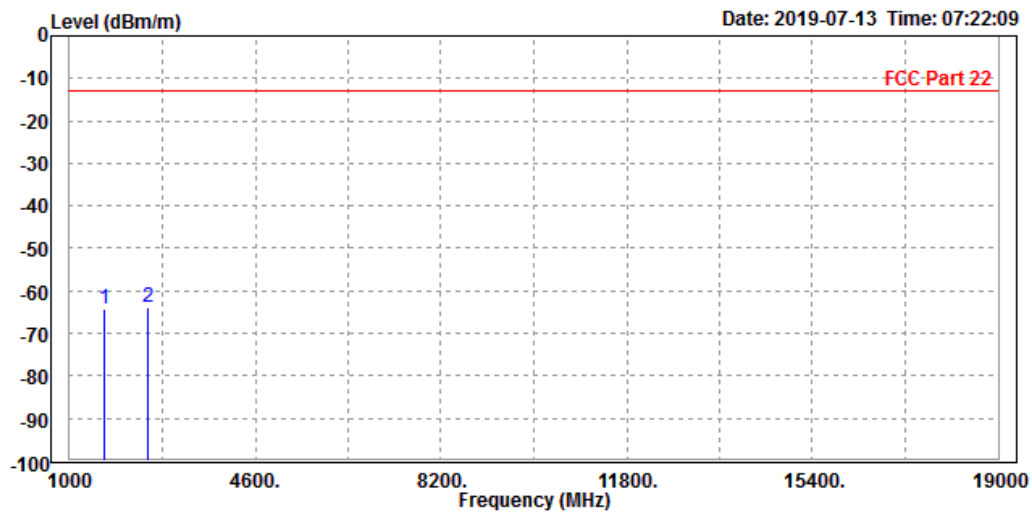

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-62.86	-59.48	-13.00	-49.86	-3.38	Peak	Vertical
2	2512.000	-63.35	-63.23	-13.00	-50.35	-0.12	Peak	Vertical

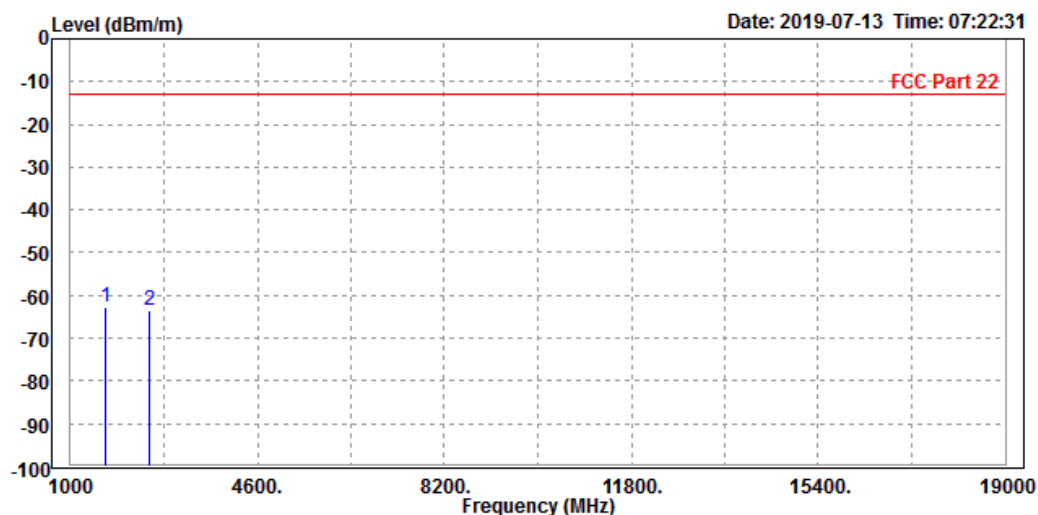




**BUREAU
VERITAS**

Test Report No.: RF190701W004-1

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1666.000	-63.56	-58.74	-13.00	-50.56	-4.82	Peak	Horizontal
2	2512.000	-63.97	-62.38	-13.00	-50.97	-1.59	Peak	Horizontal

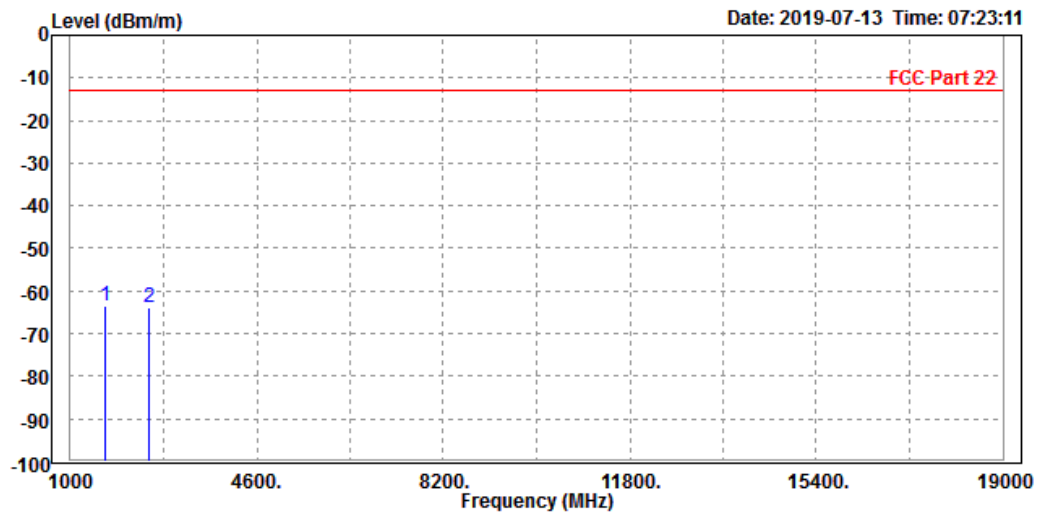

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-62.05	-58.67	-13.00	-49.05	-3.38	Peak	Vertical
2 PP	2512.000	-61.71	-61.59	-13.00	-48.71	-0.12	Peak	Vertical

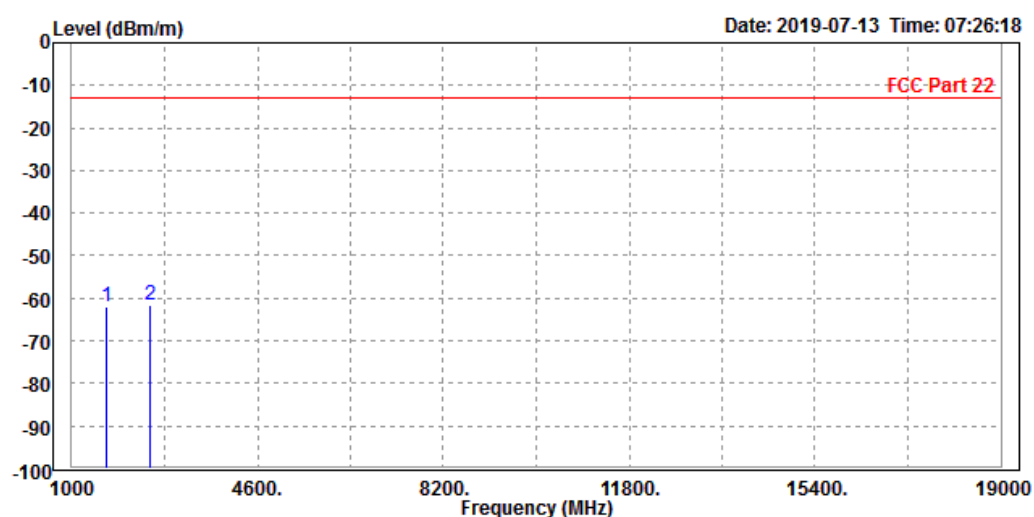



**BUREAU
VERITAS**


Test Report No.: RF190701W004-1

CHANNEL BANDWIDTH: 5MHz / QPSK

CH 20425


MODE	TX channel 20425	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-64.58	-59.61	-13.00	-51.58	-4.97	Peak	Horizontal
2 PP	2480.000	-64.18	-62.53	-13.00	-51.18	-1.65	Peak	Horizontal

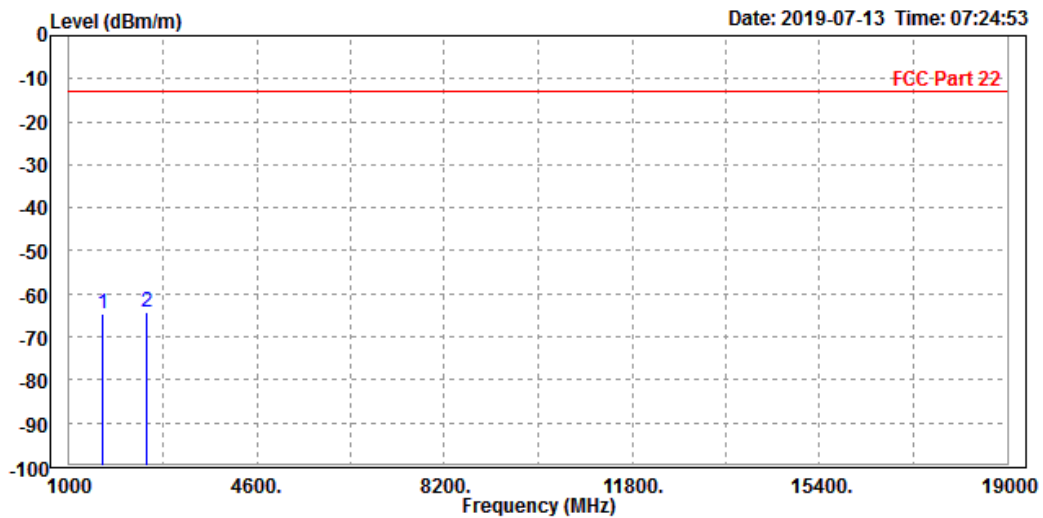

MODE	TX channel 20425	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-63.01	-59.46	-13.00	-50.01	-3.55	Peak	Vertical
2 PP	2480.000	-62.75	-62.58	-13.00	-49.75	-0.17	Peak	Vertical

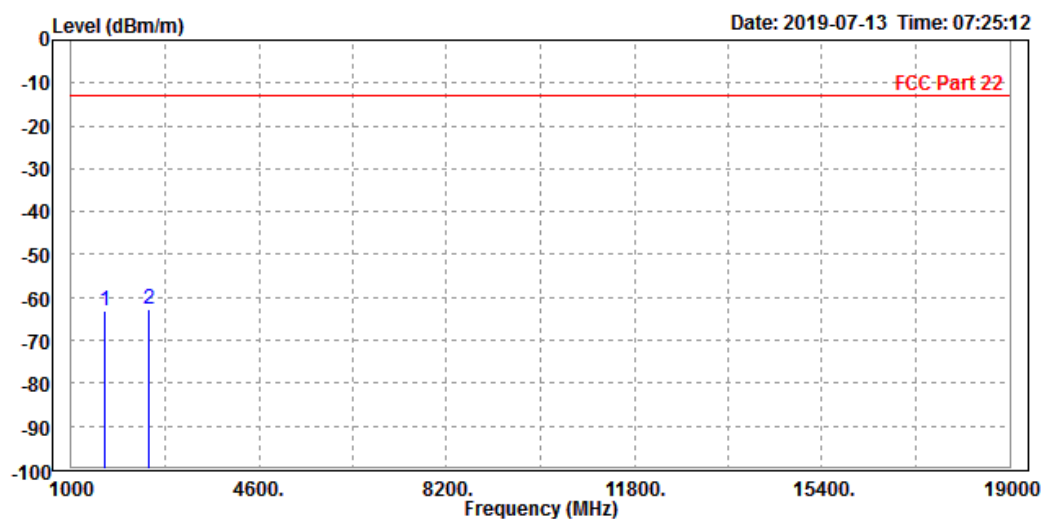

CH 20525


MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1666.000	-62.03	-57.21	-13.00	-49.03	-4.82	Peak	Horizontal
2	2512.000	-62.87	-61.28	-13.00	-49.87	-1.59	Peak	Horizontal

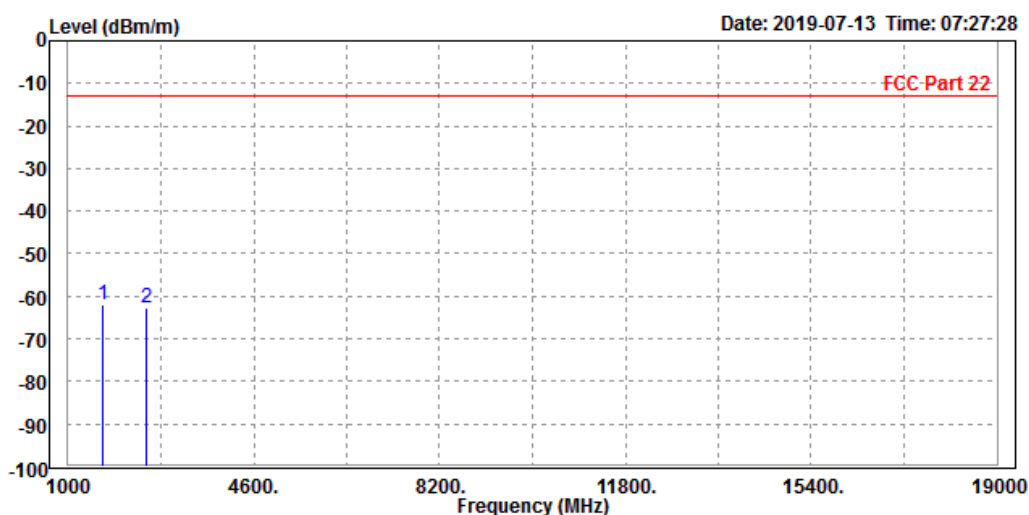

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-62.05	-58.67	-13.00	-49.05	-3.38	Peak	Vertical
2 PP	2512.000	-60.48	-60.36	-13.00	-47.48	-0.12	Peak	Vertical

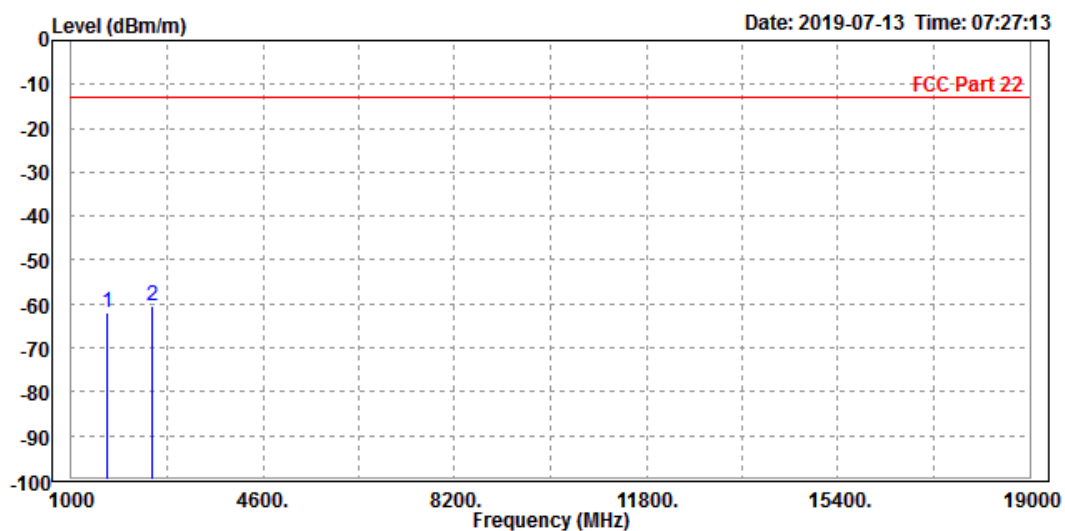

CH 20625


MODE	TX channel 20625	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1702.000	-63.19	-58.67	-13.00	-50.19	-4.52	Peak	Horizontal
2	2548.000	-63.90	-62.45	-13.00	-50.90	-1.45	Peak	Horizontal

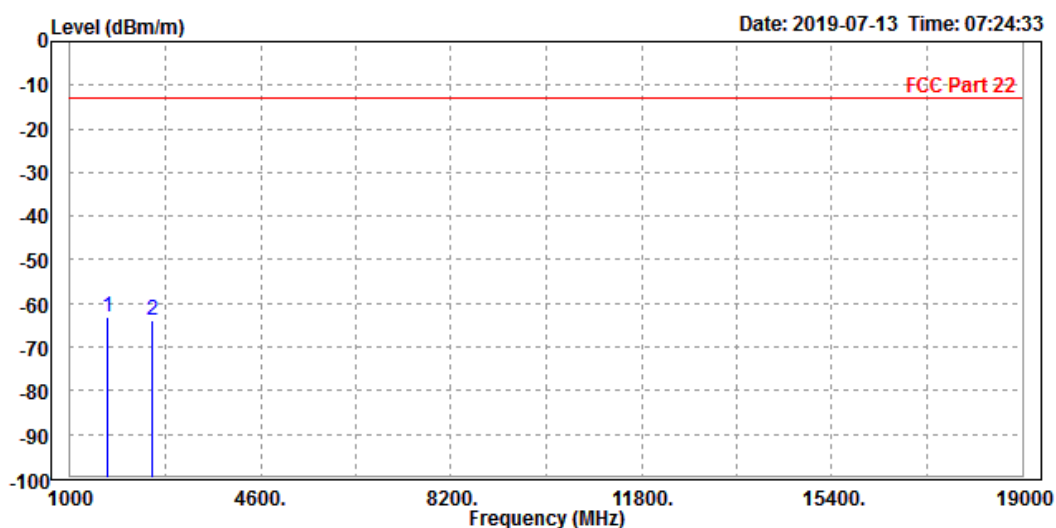

MODE	TX channel 20625	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1702.000	-60.94	-57.89	-13.00	-47.94	-3.05	Peak	Vertical
2	2548.000	-62.28	-62.31	-13.00	-49.28	0.03	Peak	Vertical

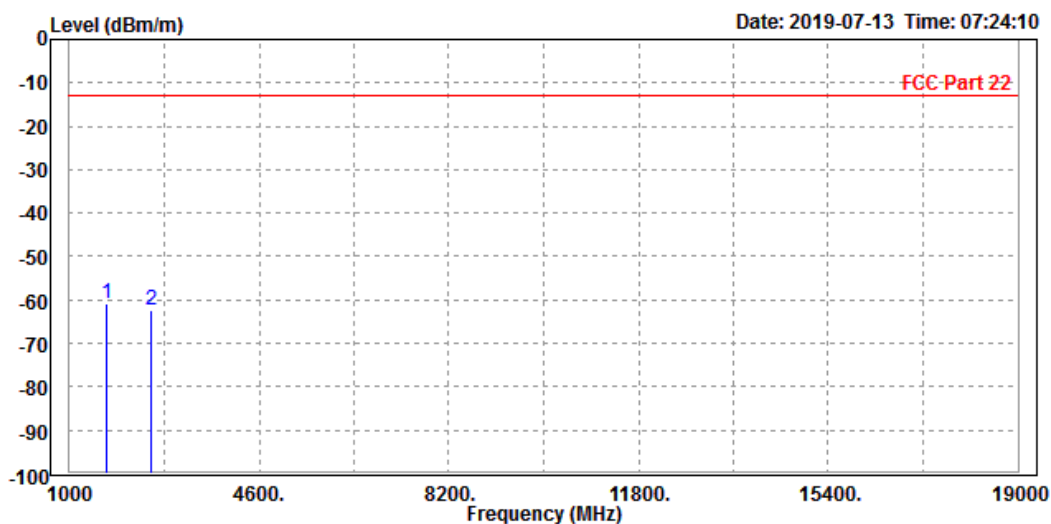




**BUREAU
VERITAS**

Test Report No.: RF190701W004-1

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1666.000	-65.03	-60.21	-13.00	-52.03	-4.82	Peak	Horizontal
2		2512.000	-65.23	-63.64	-13.00	-52.23	-1.59	Peak	Horizontal

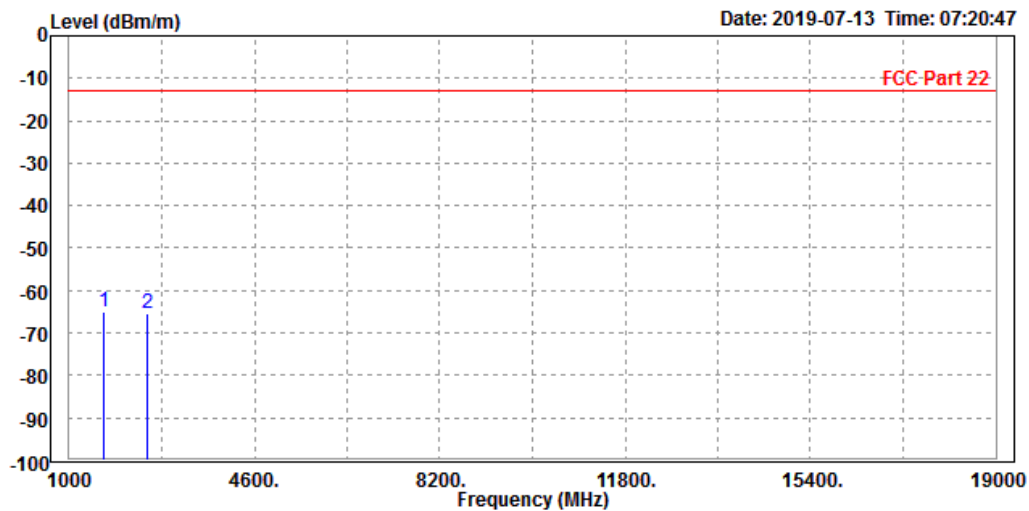

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-63.06	-59.68	-13.00	-50.06	-3.38	Peak	Vertical
2	PP 2512.000	-62.53	-62.41	-13.00	-49.53	-0.12	Peak	Vertical

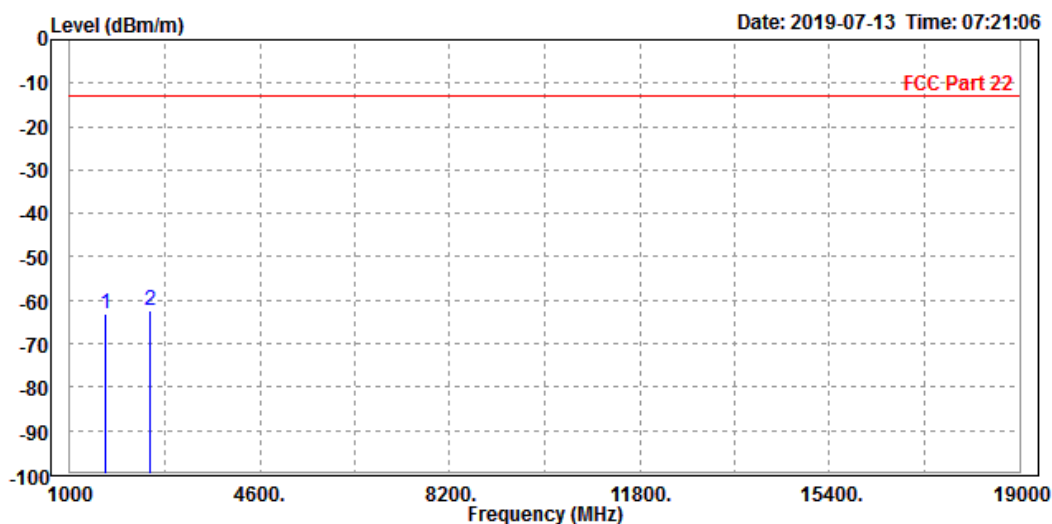



**BUREAU
VERITAS**


Test Report No.: RF190701W004-1

LTE Band 26

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

			Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1673.000	-64.65	-59.89	-13.00	-51.65	-4.76	Peak	Horizontal
2	2509.500	-65.18	-63.58	-13.00	-52.18	-1.60	Peak	Horizontal

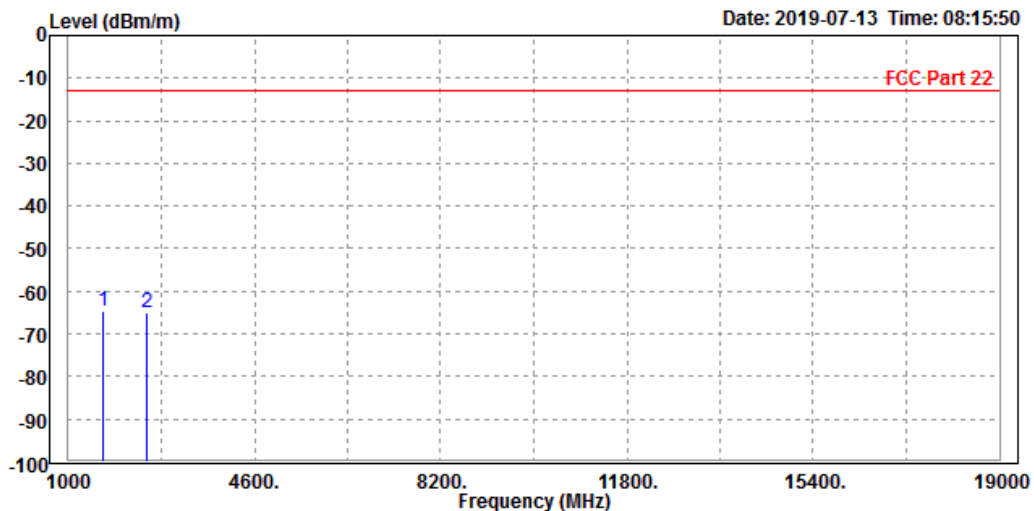

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1673.000	-63.44	-60.12	-13.00	-50.44	-3.32	Peak	Vertical
2	2509.500	-64.38	-64.25	-13.00	-51.38	-0.13	Peak	Vertical

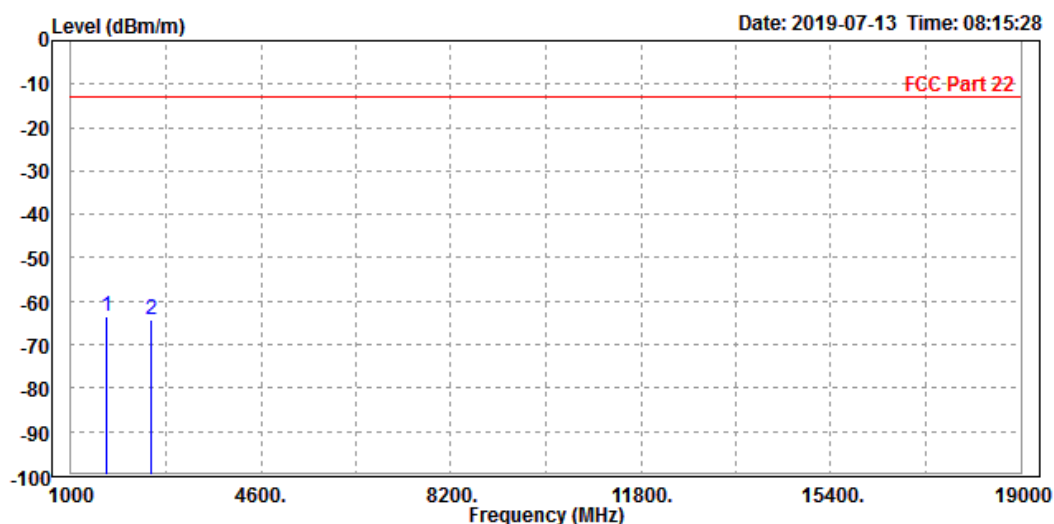




BUREAU
VERITAS

Test Report No.: RF190701W004-1

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

			Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1673.000	-64.54	-59.78	-13.00	-51.54	-4.76	Peak	Horizontal
2	2509.500	-64.83	-63.23	-13.00	-51.83	-1.60	Peak	Horizontal

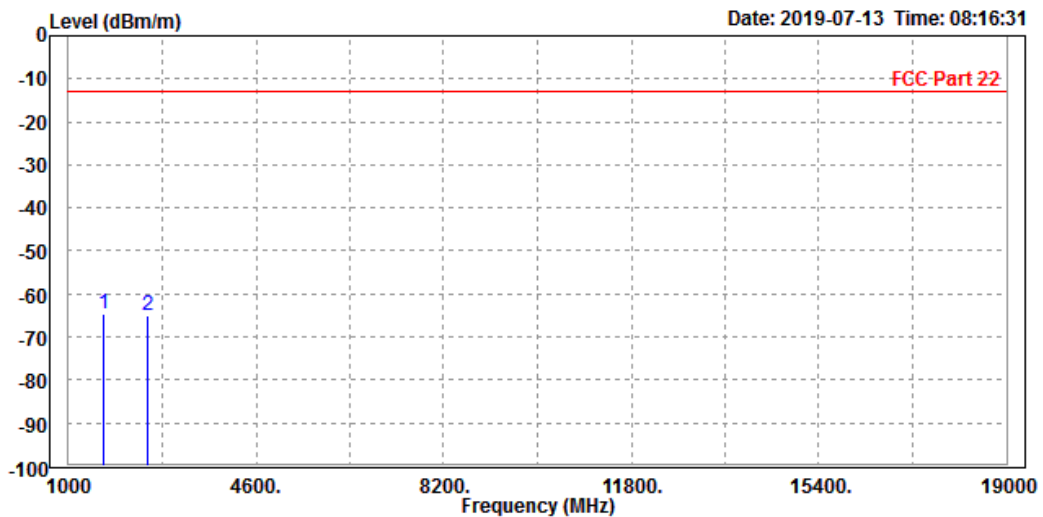

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1673.000	-63.53	-60.21	-13.00	-50.53	-3.32	Peak	Vertical
2	2509.500	-64.48	-64.35	-13.00	-51.48	-0.13	Peak	Vertical

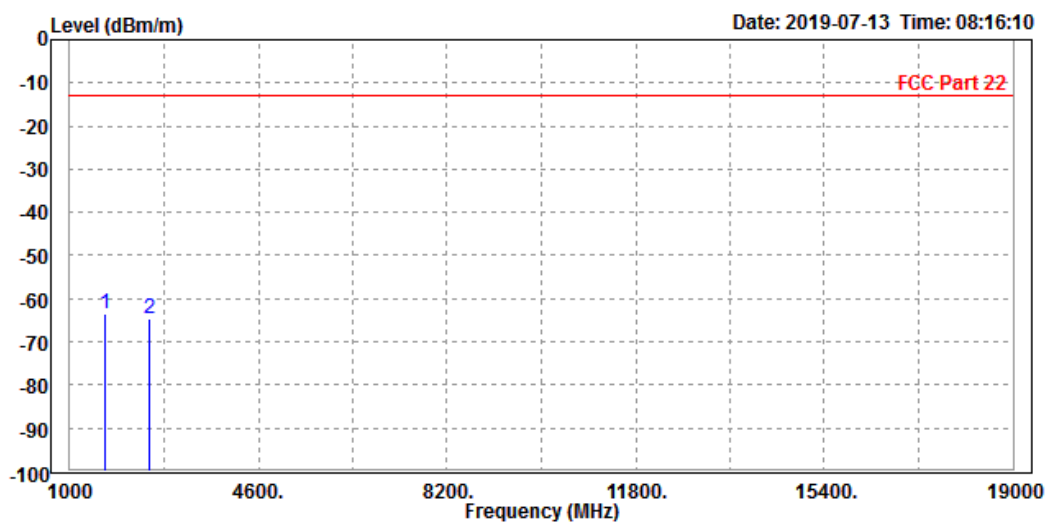




**BUREAU
VERITAS**

Test Report No.: RF190701W004-1

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1673.000	-64.62	-59.86	-13.00	-51.62	-4.76	Peak	Horizontal
2		2509.500	-65.18	-63.58	-13.00	-52.18	-1.60	Peak	Horizontal

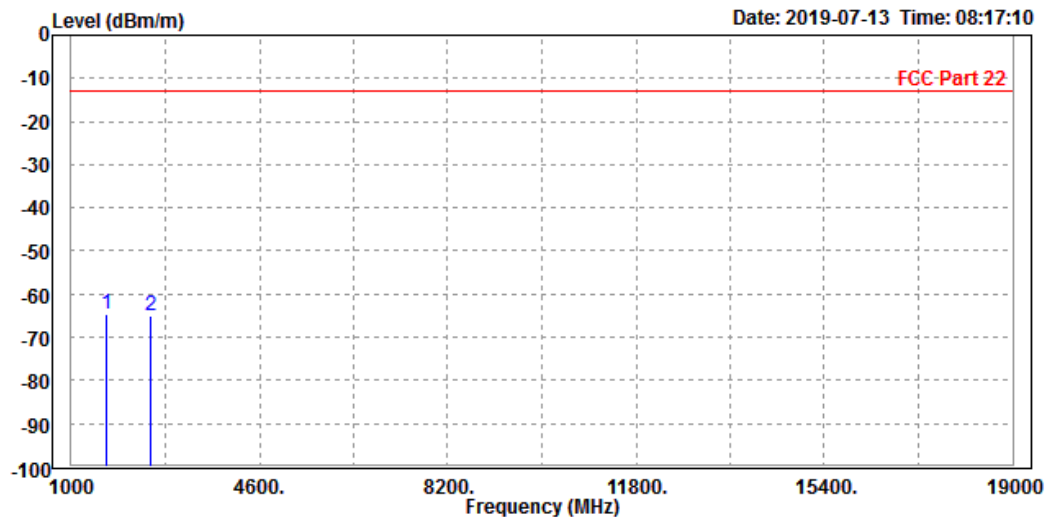

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1673.000	-63.53	-60.21	-13.00	-50.53	-3.32	Peak	Vertical
2	2509.500	-64.48	-64.35	-13.00	-51.48	-0.13	Peak	Vertical

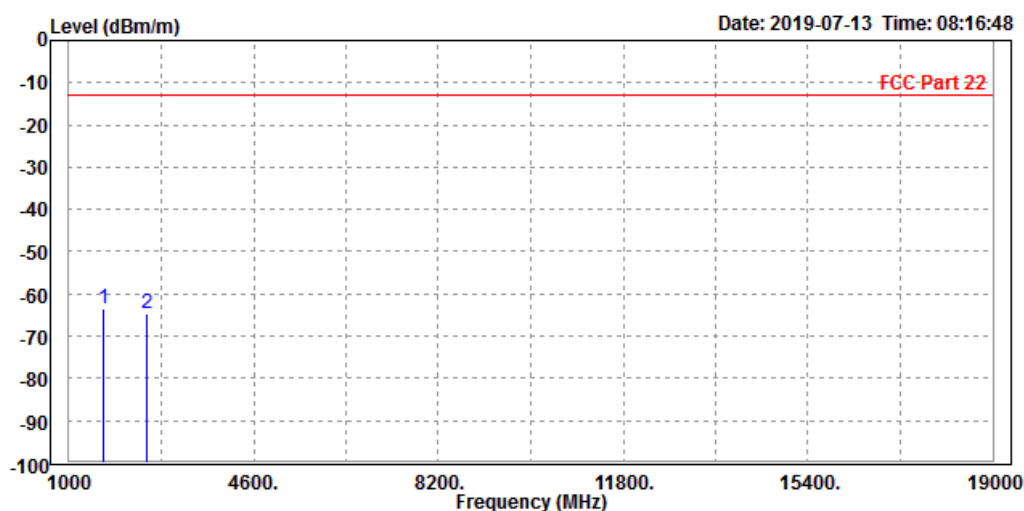



**BUREAU
VERITAS**


Test Report No.: RF190701W004-1

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 26840


MODE	TX channel 26840	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1658.000	-64.93	-60.05	-13.00	-51.93	-4.88	Peak	Horizontal
2	2487.000	-65.17	-63.52	-13.00	-52.17	-1.65	Peak	Horizontal

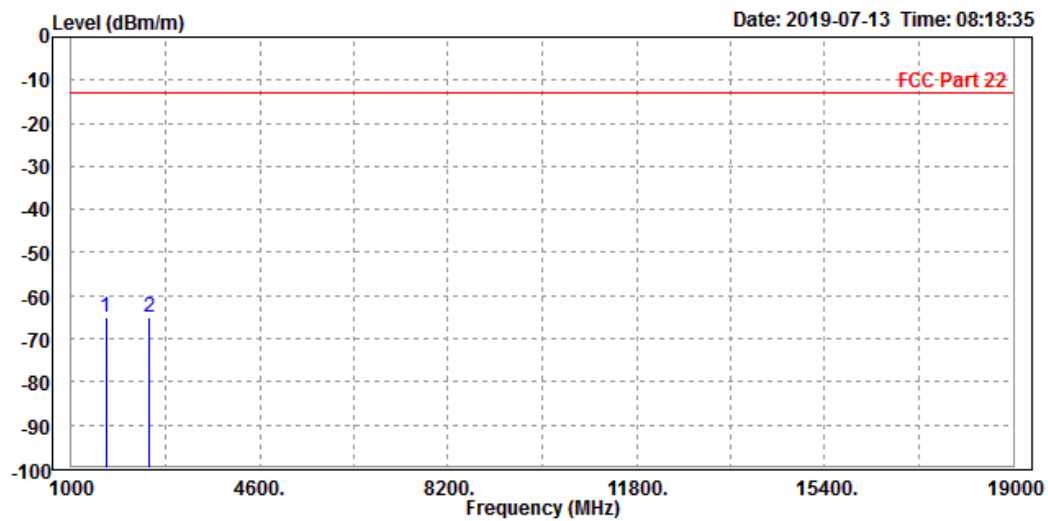


MODE	TX channel 26840	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1658.000	-63.35	-59.89	-13.00	-50.35	-3.46	Peak	Vertical
2	2487.000	-63.71	-63.54	-13.00	-50.71	-0.17	Peak	Vertical

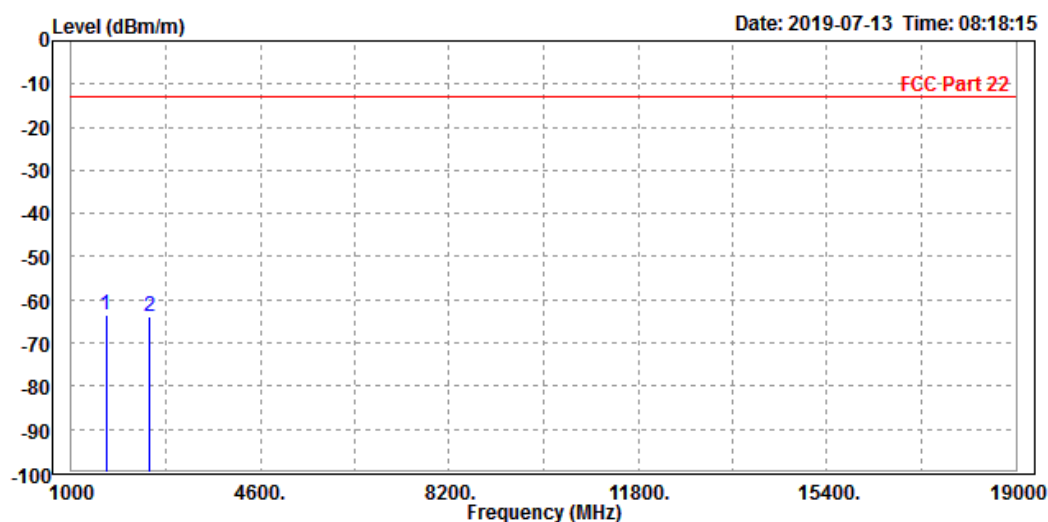


MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-64.08	-59.32	-13.00	-51.08	-4.76	Peak	Horizontal
2 PP	2509.500	-63.95	-62.35	-13.00	-50.95	-1.60	Peak	Horizontal

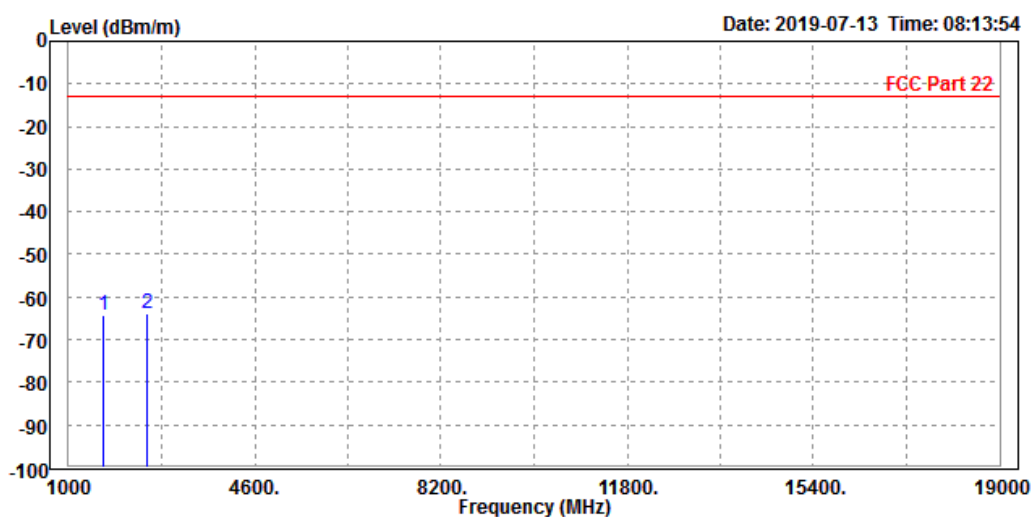


MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-61.78	-58.46	-13.00	-48.78	-3.32	Peak	Vertical
2	PP 2509.500	-61.38	-61.25	-13.00	-48.38	-0.13	Peak	Vertical

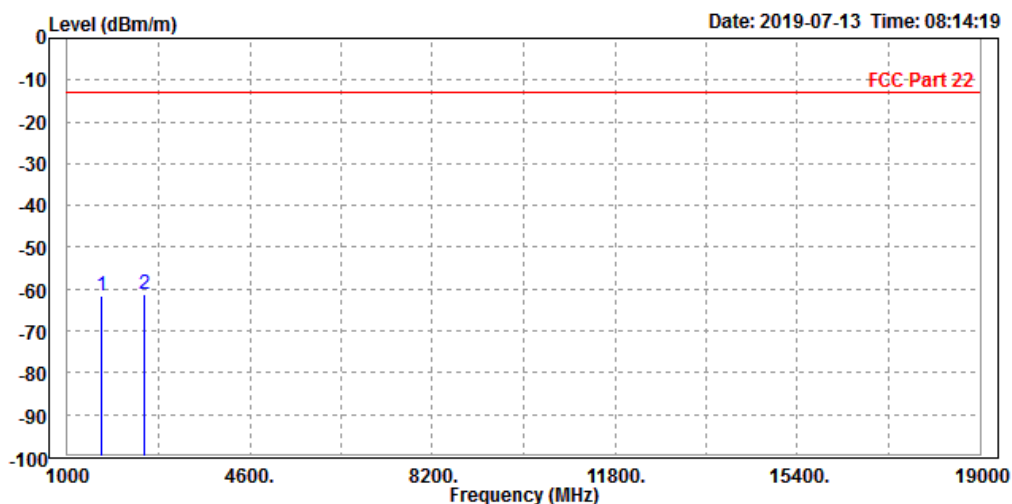


MODE	TX channel 26990	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1688.000	-64.27	-59.64	-13.00	-51.27	-4.63	Peak	Horizontal
2	2532.000	-65.07	-63.56	-13.00	-52.07	-1.51	Peak	Horizontal

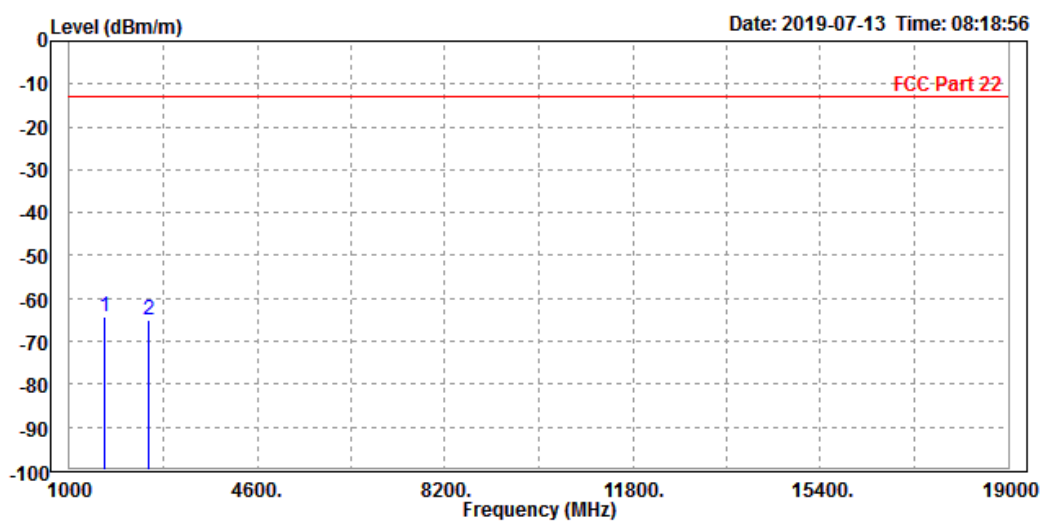

MODE	TX channel 26990	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1688.000	-63.33	-60.15	-13.00	-50.33	-3.18	Peak	Vertical
2	2532.000	-63.55	-63.52	-13.00	-50.55	-0.03	Peak	Vertical

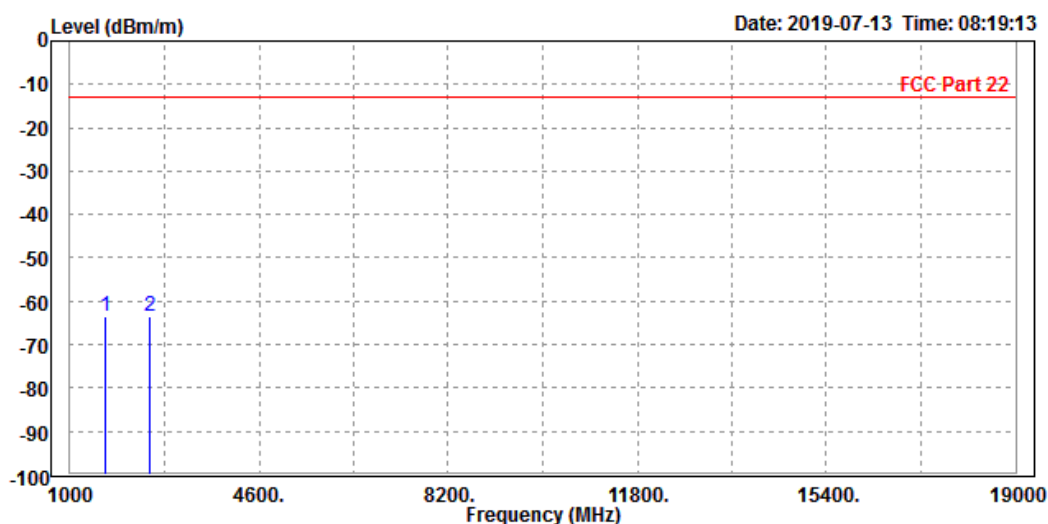




**BUREAU
VERITAS**

Test Report No.: RF190701W004-1

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1673.000	-65.04	-60.28	-13.00	-52.04	-4.76	Peak	Horizontal
2		2509.500	-65.16	-63.56	-13.00	-52.16	-1.60	Peak	Horizontal

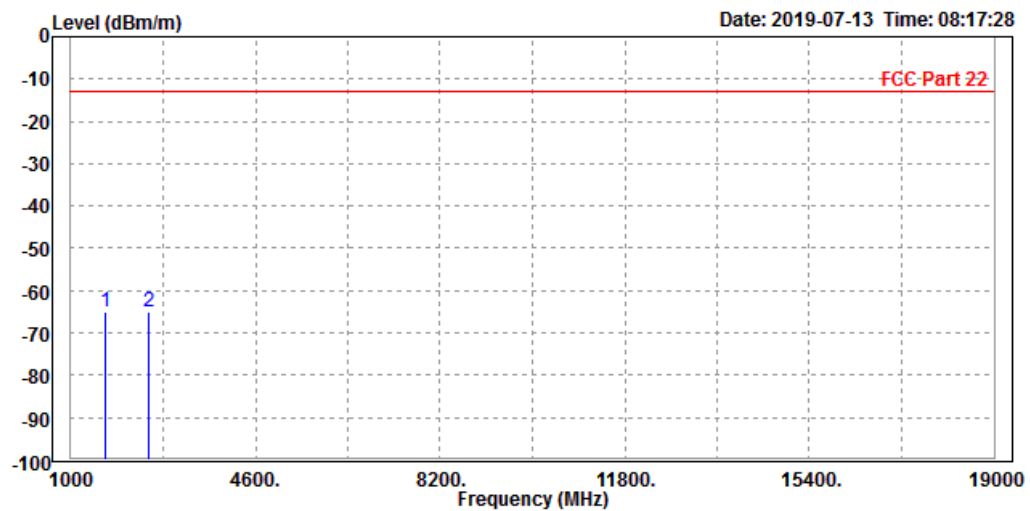

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1673.000	-63.00	-59.68	-13.00	-50.00	-3.32	Peak	Vertical
2	2509.500	-63.65	-63.52	-13.00	-50.65	-0.13	Peak	Vertical

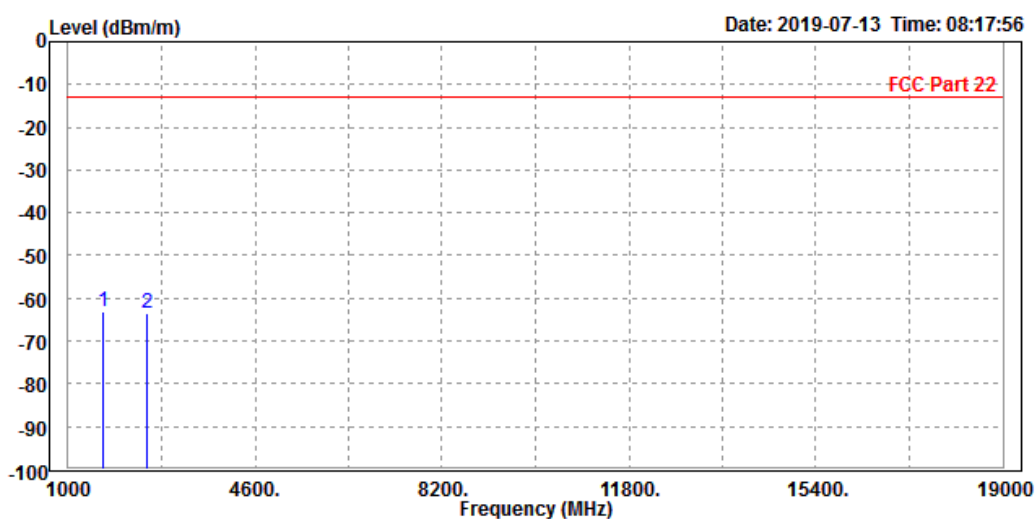


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

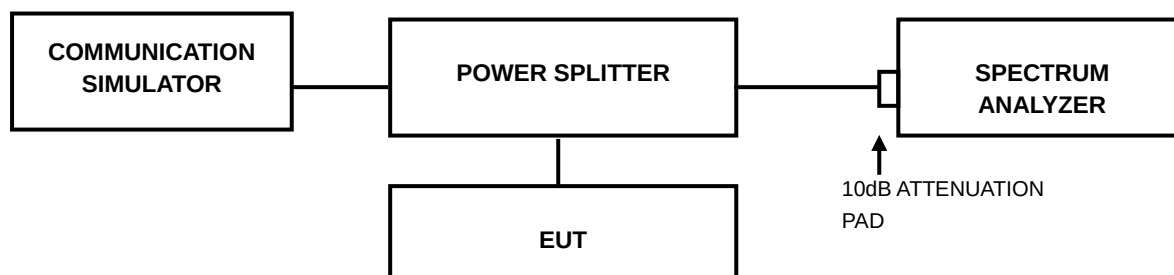

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.7.4 TEST RESULTS

The test results was recorded in Report No.: RXA1706-0199RF01R1.



Test Report No.: RF190701W004-1

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF190701W004-1

5 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---