



TEST REPORT

Report No. : CHTEW19070044 Report verification : 

Project No. : SHT1906060301EW

FCC ID..... : 2ATWR-WENC5719M

Applicant's name : Beijing Aiterfeixiang Technologies Co., Ltd.

Address..... : 1602 Building No.10, Changchunqiao Road No.5, Haidian District, Beijing, China

Manufacturer..... : Beijing Aiterfeixiang Technologies Co., Ltd.

Address..... : 1602 Building No.10, Changchunqiao Road No.5, Haidian District, Beijing, China

Test item description : Wireless Video & Audio Encoder/Extender

Trade Mark : -

Model/Type reference..... : HEV-2KW

Listed Model(s) : HEV-2KW,HEV-4KW,HEC-10,HEC-20,HEC-30,HEC-40,HEC-20B,HS-10,DD-2KW,DD-4KW,HDD-10,HDD-20,HDD-30,WHE-10,WHE-15,WHE-20

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of receipt of test sample..... : Jun.27, 2019

Date of testing..... : Jun.27, 2019- Jul.12, 2019

Date of issue..... : Jul.15, 2019

Result..... : PASS

Compiled by
(position+printedname+signature).... : File administrators Echo Wei

Echo Wei

Supervised by
(position+printedname+signature).... : Project Engineer Jerry Zhao

Jerry Zhao

Approved by
(position+printedname+signature).... : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	20
5.6.	Restricted band	24
5.7.	Band edge and Spurious Emissions (conducted)	28
5.8.	Spurious Emissions (radiated)	41
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>47</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>49</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 15.247 Meas Guidance v05](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2019-07-15	Original

2. TEST DESCRIPTION

Test Item	FCC Rule	Result	Test Engineer
Antenna requirement	15.203/15.247(c)	PASS	Bruce Wong
Line Conducted Emissions (AC Main)	15.207	PASS	Jiongsheng Feng
Conducted Peak Output Power	15.247(b)(3)	PASS	Bruce Wong
Power Spectral Density	15.247(e)	PASS	Bruce Wong
6dB Bandwidth	15.247(a)(2)	PASS	Bruce Wong
Restricted band	15.247(d)/15.205	PASS	Jiongsheng Feng
Spurious Emissions	15.247(d)/15.209	PASS	Jiongsheng Feng

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Beijing Aiterfeixiang Technologies Co., Ltd.
Address:	1602 Building No.10, Changchunqiao Road No.5, Haidian District, Beijing, China
Manufacturer:	Beijing Aiterfeixiang Technologies Co., Ltd.
Address:	1602 Building No.10, Changchunqiao Road No.5, Haidian District, Beijing, China

3.2. Product Description

Name of EUT:	Wireless Video & Audio Encoder/Extender
Trade Mark:	-
Model No.:	HEV-2KW
Listed Model(s):	HEV-2KW,HEV-4KW,HEC-10,HEC-20,HEC-30,HEC-40,HEC-20B,HS-10,DD-2KW,DD-4KW,HDD-10,HDD-20,HDD-30,WHE-10,WHE-15,WHE-20
Power supply:	DC 5V
Hardware version:	A1
Software version:	V1.1.0.0
WIFI	
Supported type:	802.11b/802.11g/802.11n(HT20)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)
Operation frequency:	2412MHz~2462MHz
Channel number:	11
Channel separation:	5MHz
Antenna type:	Internal Antenna
Antenna gain:	1 dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(HT20)	
Channel	Frequency (MHz)
01	2412
02	2417
...	...
06	2437
...	...
10	2457
11	2462

➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.02 dB	(1)
Radiated Emissions below 1GHz	4.90 dB	(1)
Radiated Emissions above 1GHz	4.96 dB	(1)
Occupied Bandwidth	70 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5. Equipments Used during the Test

● Conducted Emission						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
●	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
●	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
●	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
○	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
○	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
○	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
○	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
○	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
○	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26
● Radiated Emission-6th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
●	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2018/09/28	2019/09/27
●	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2018/09/28	2019/09/27
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A
● Radiated emission-7th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
●	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	Test Software	Audix	E3	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28
●	OSP	R&S	OSP120	101317	N/A	N/A
○	Radio communication tester	R&S	CMW500	137688-Lv	2018/09/29	2019/09/28
○	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

REQUIREMENT:

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULTS

☒ Passed ☐ Not Applicable

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

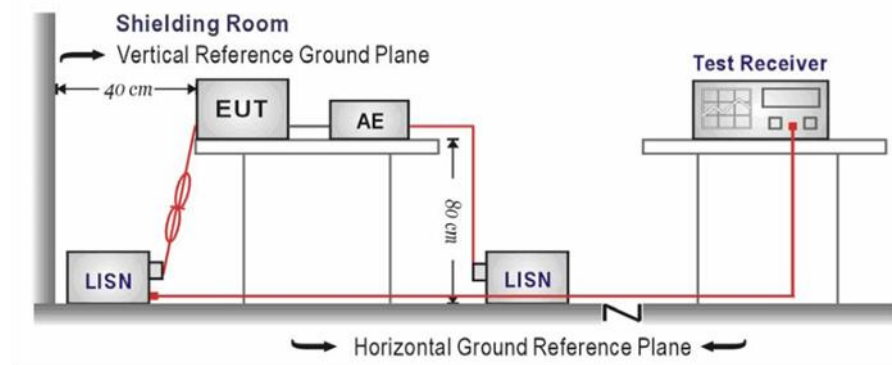

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS


☒ Passed ☐ Not Applicable

Note:

- 1) Transd=Cable lose+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

Test Line:

L

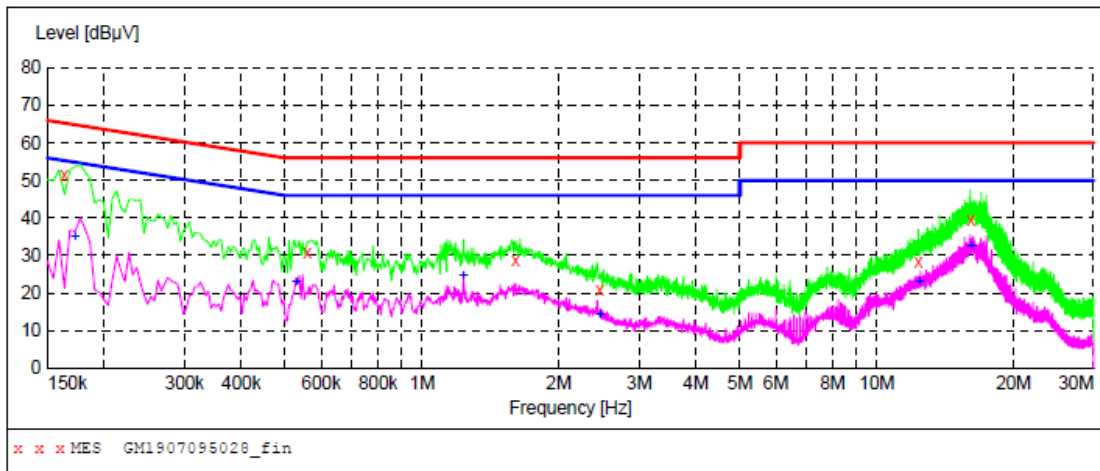**MEASUREMENT RESULT: "GM1907095028_fin"**

7/9/2019 5:12PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.163500	51.40	9.9	65	13.9	QP	L1	GND
0.559500	30.70	9.9	56	25.3	QP	L1	GND
1.603500	28.70	9.9	56	27.3	QP	L1	GND
2.458500	20.90	9.9	56	35.1	QP	L1	GND
12.358500	28.50	10.1	60	31.5	QP	L1	GND
16.107000	39.40	10.2	60	20.6	QP	L1	GND


MEASUREMENT RESULT: "GM1907095028_fin2"

7/9/2019 5:12PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.172500	34.90	9.9	55	19.9	AV	L1	GND
0.528000	23.10	9.9	46	22.9	AV	L1	GND
1.234500	24.50	9.9	46	21.5	AV	L1	GND
2.463000	14.40	9.9	46	31.6	AV	L1	GND
12.430500	23.00	10.1	50	27.0	AV	L1	GND
16.116000	32.60	10.2	50	17.4	AV	L1	GND

Test Line:

N

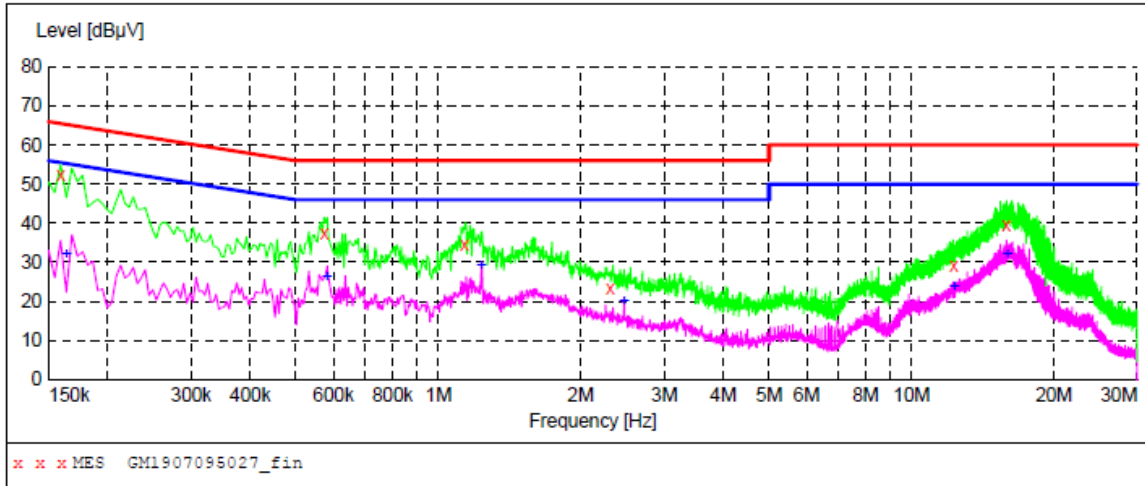**MEASUREMENT RESULT: "GM1907095027_fin"**

7/9/2019 5:10PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159000	52.20	9.9	66	13.3	QP	N	GND
0.573000	37.40	9.9	56	18.6	QP	N	GND
1.135500	34.40	9.9	56	21.6	QP	N	GND
2.305500	23.30	9.9	56	32.7	QP	N	GND
12.286500	29.10	10.1	60	30.9	QP	N	GND
15.877500	39.40	10.2	60	20.6	QP	N	GND

MEASUREMENT RESULT: "GM1907095027_fin2"

7/9/2019 5:10PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	32.00	9.9	55	23.3	AV	N	GND
0.582000	26.20	9.9	46	19.8	AV	N	GND
1.234500	29.00	9.9	46	17.0	AV	N	GND
2.467500	19.80	9.9	46	26.2	AV	N	GND
12.300000	23.80	10.1	50	26.2	AV	N	GND
15.913500	32.10	10.2	50	17.9	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION

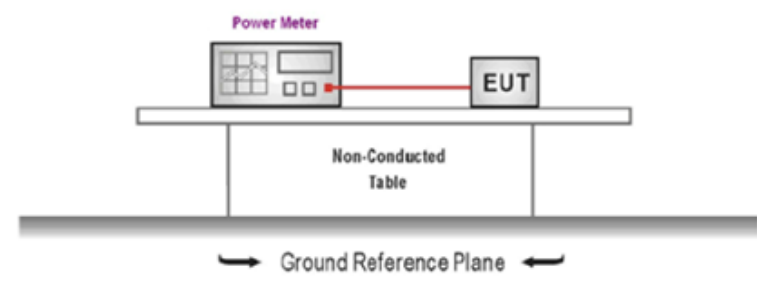

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Type	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11b	01	12.76	11.25	≤30.00	Pass
	06	12.21	10.37		
	11	12.57	11.14		
802.11g	01	12.06	8.83	≤30.00	Pass
	06	12.17	9.11		
	11	12.96	9.64		
802.11n(HT20)	01	12.01	8.48	≤30.00	Pass
	06	12.24	9.10		
	11	12.74	9.27		


5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

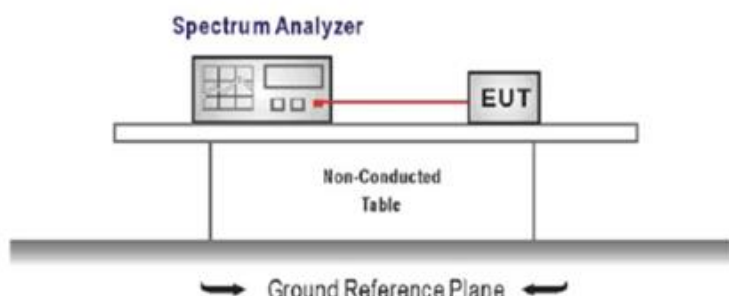

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:


Please refer to the clause 3.3


TEST RESULTS


☒ Passed ☐ Not Applicable

Type	Channel	Power Spectral Density (dBm/30KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-1.58	≤8.00	Pass
	06	-2.92		
	11	-3.24		
802.11g	01	-11.67	≤8.00	Pass
	06	-11.54		
	11	-10.86		
802.11n(HT20)	01	-10.89	≤8.00	Pass
	06	-10.37		
	11	-9.98		

Test plot as follows:

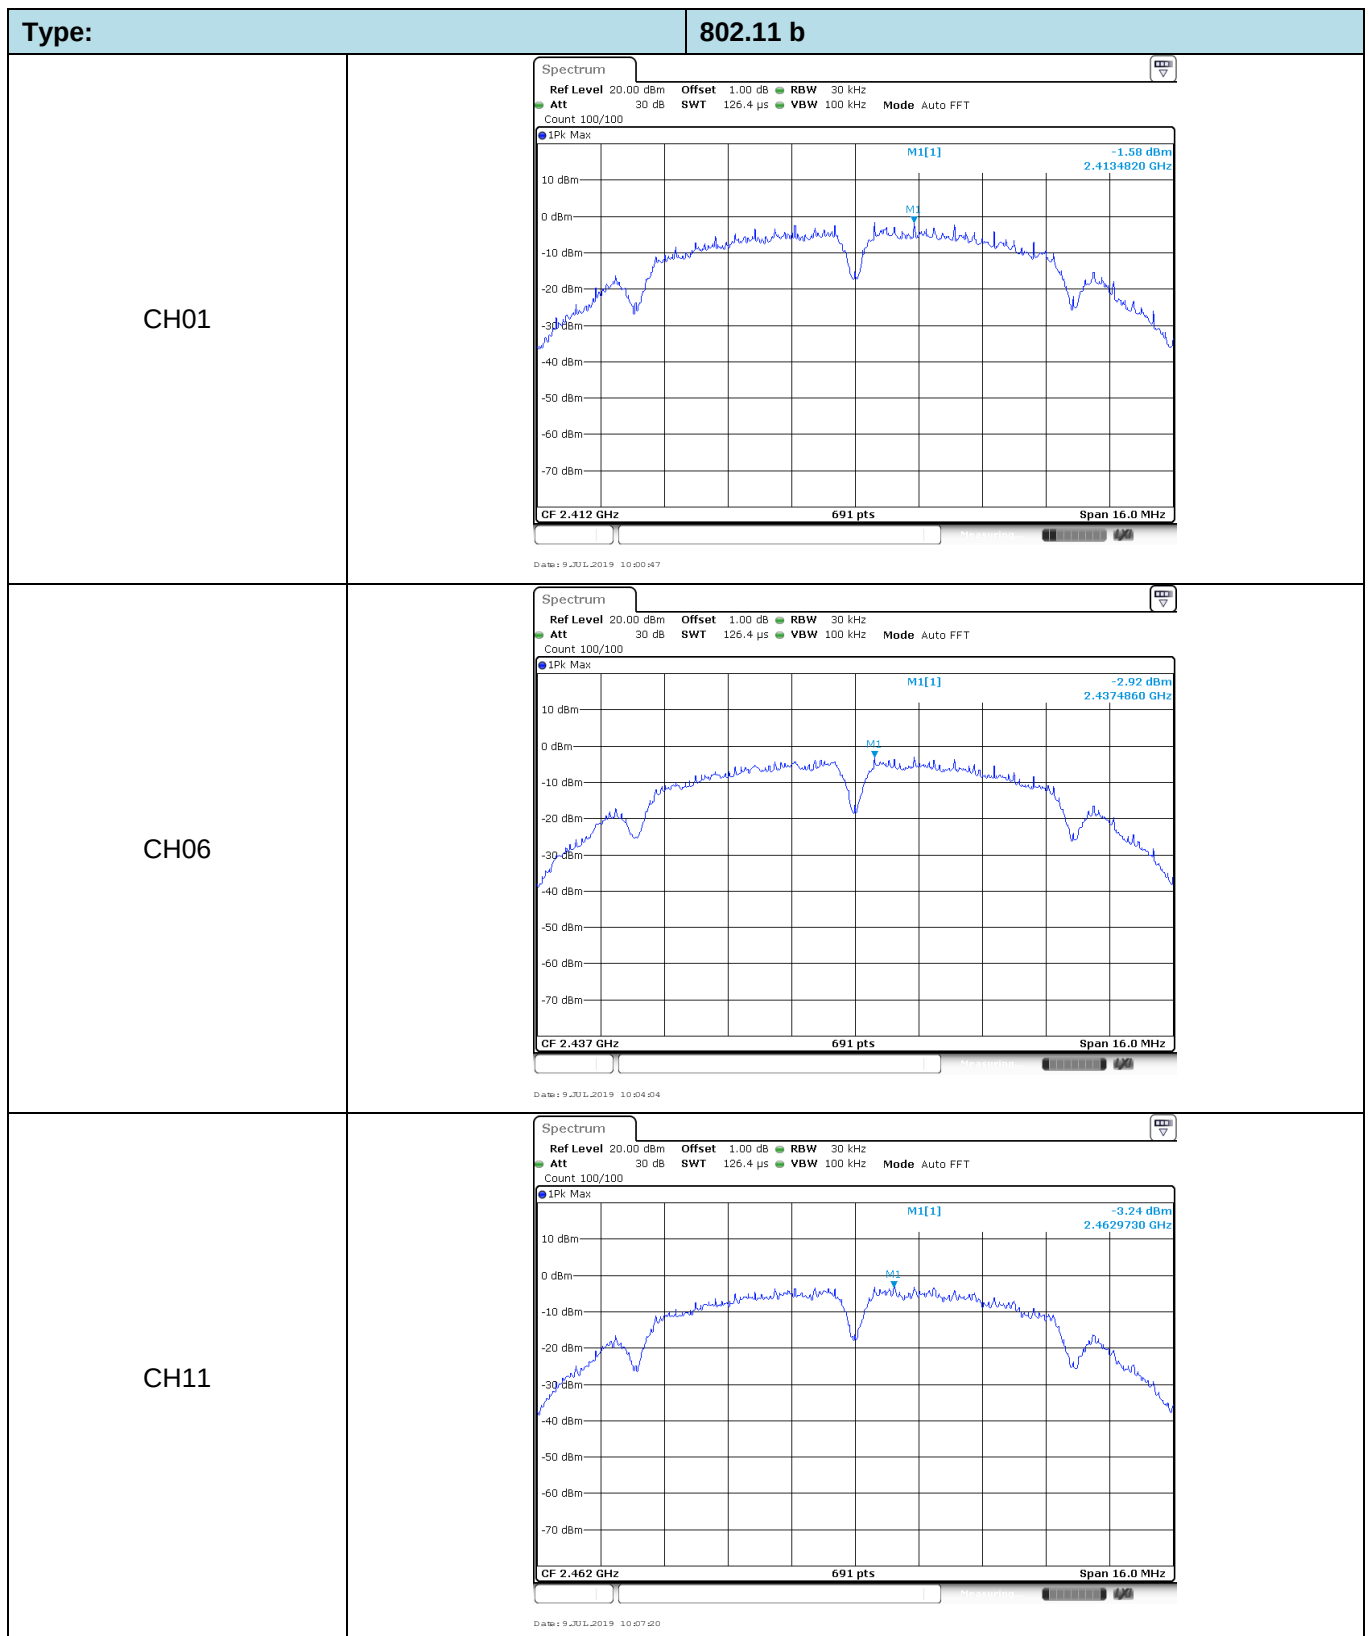

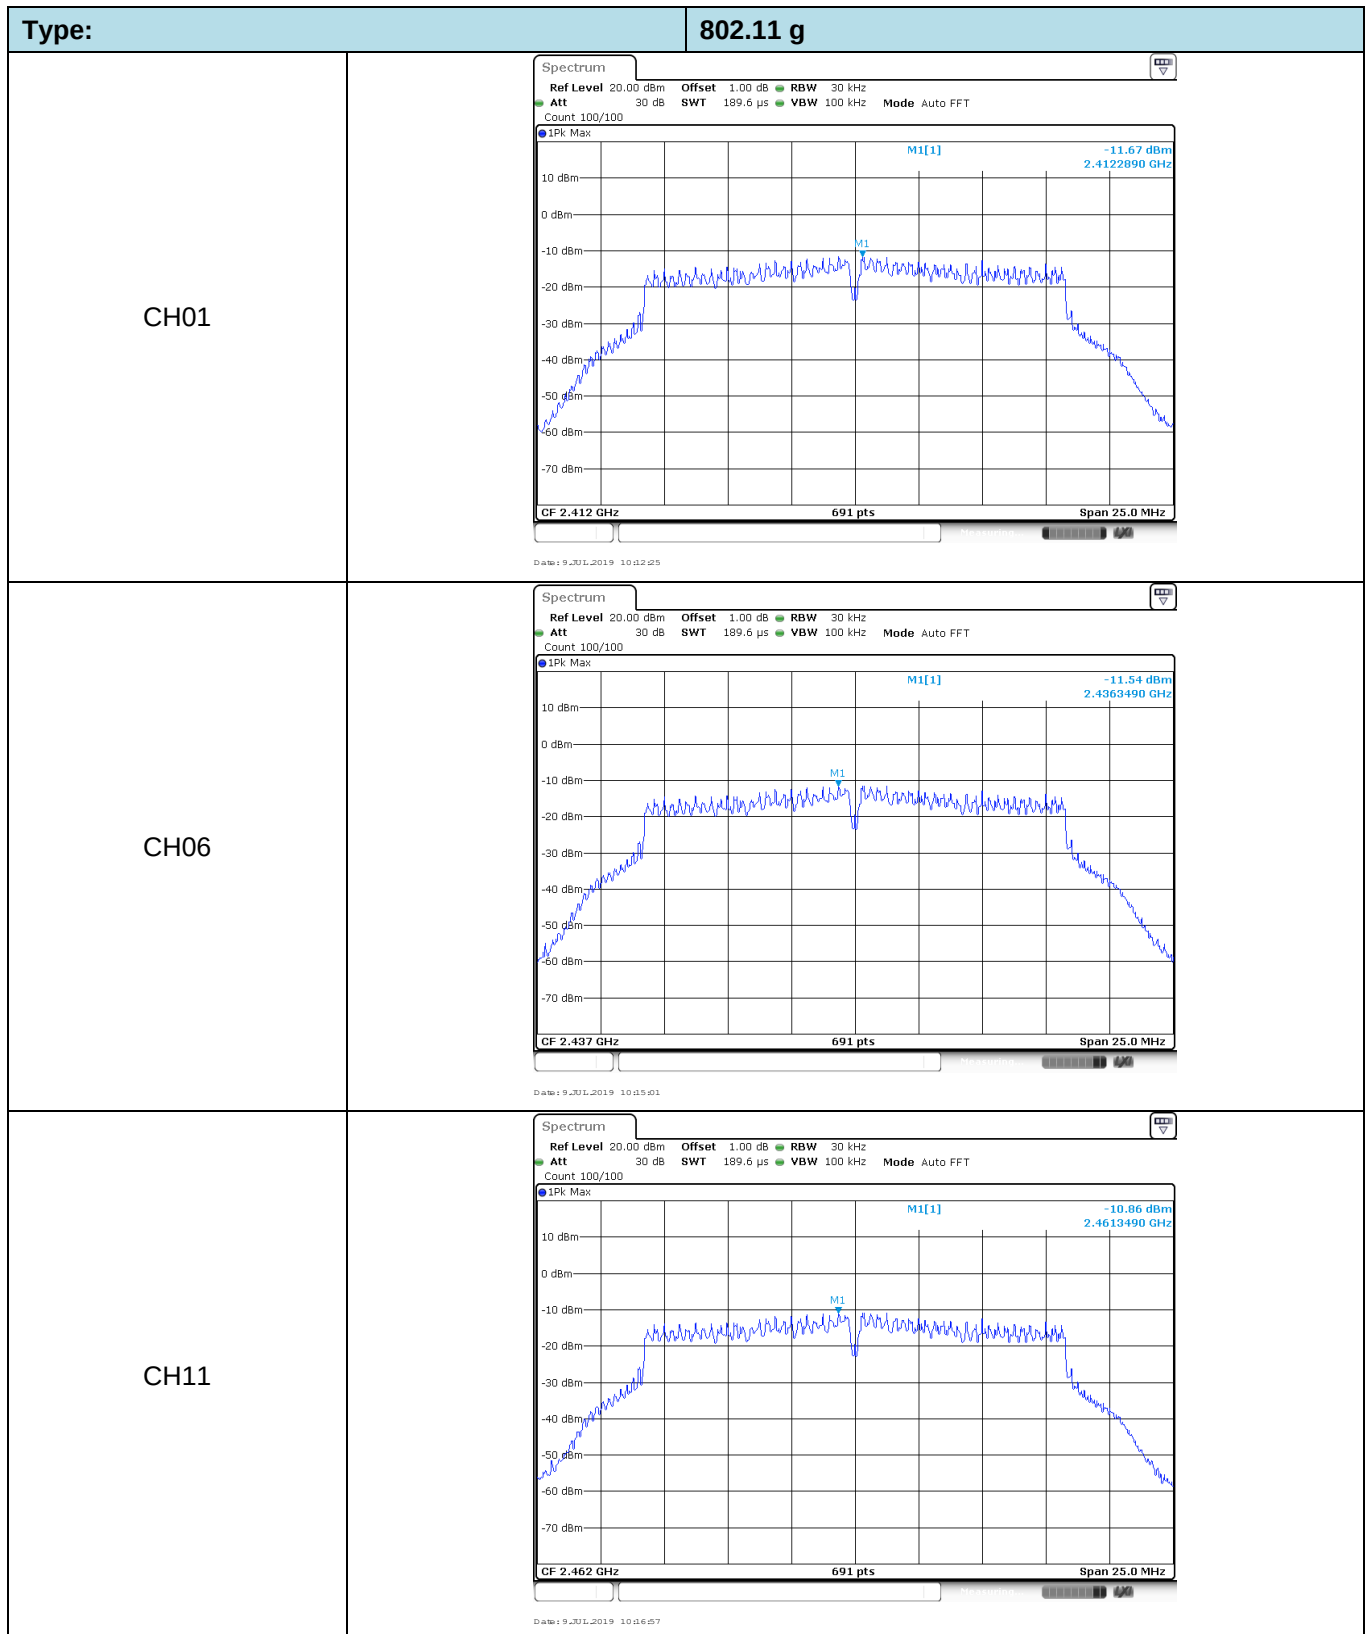

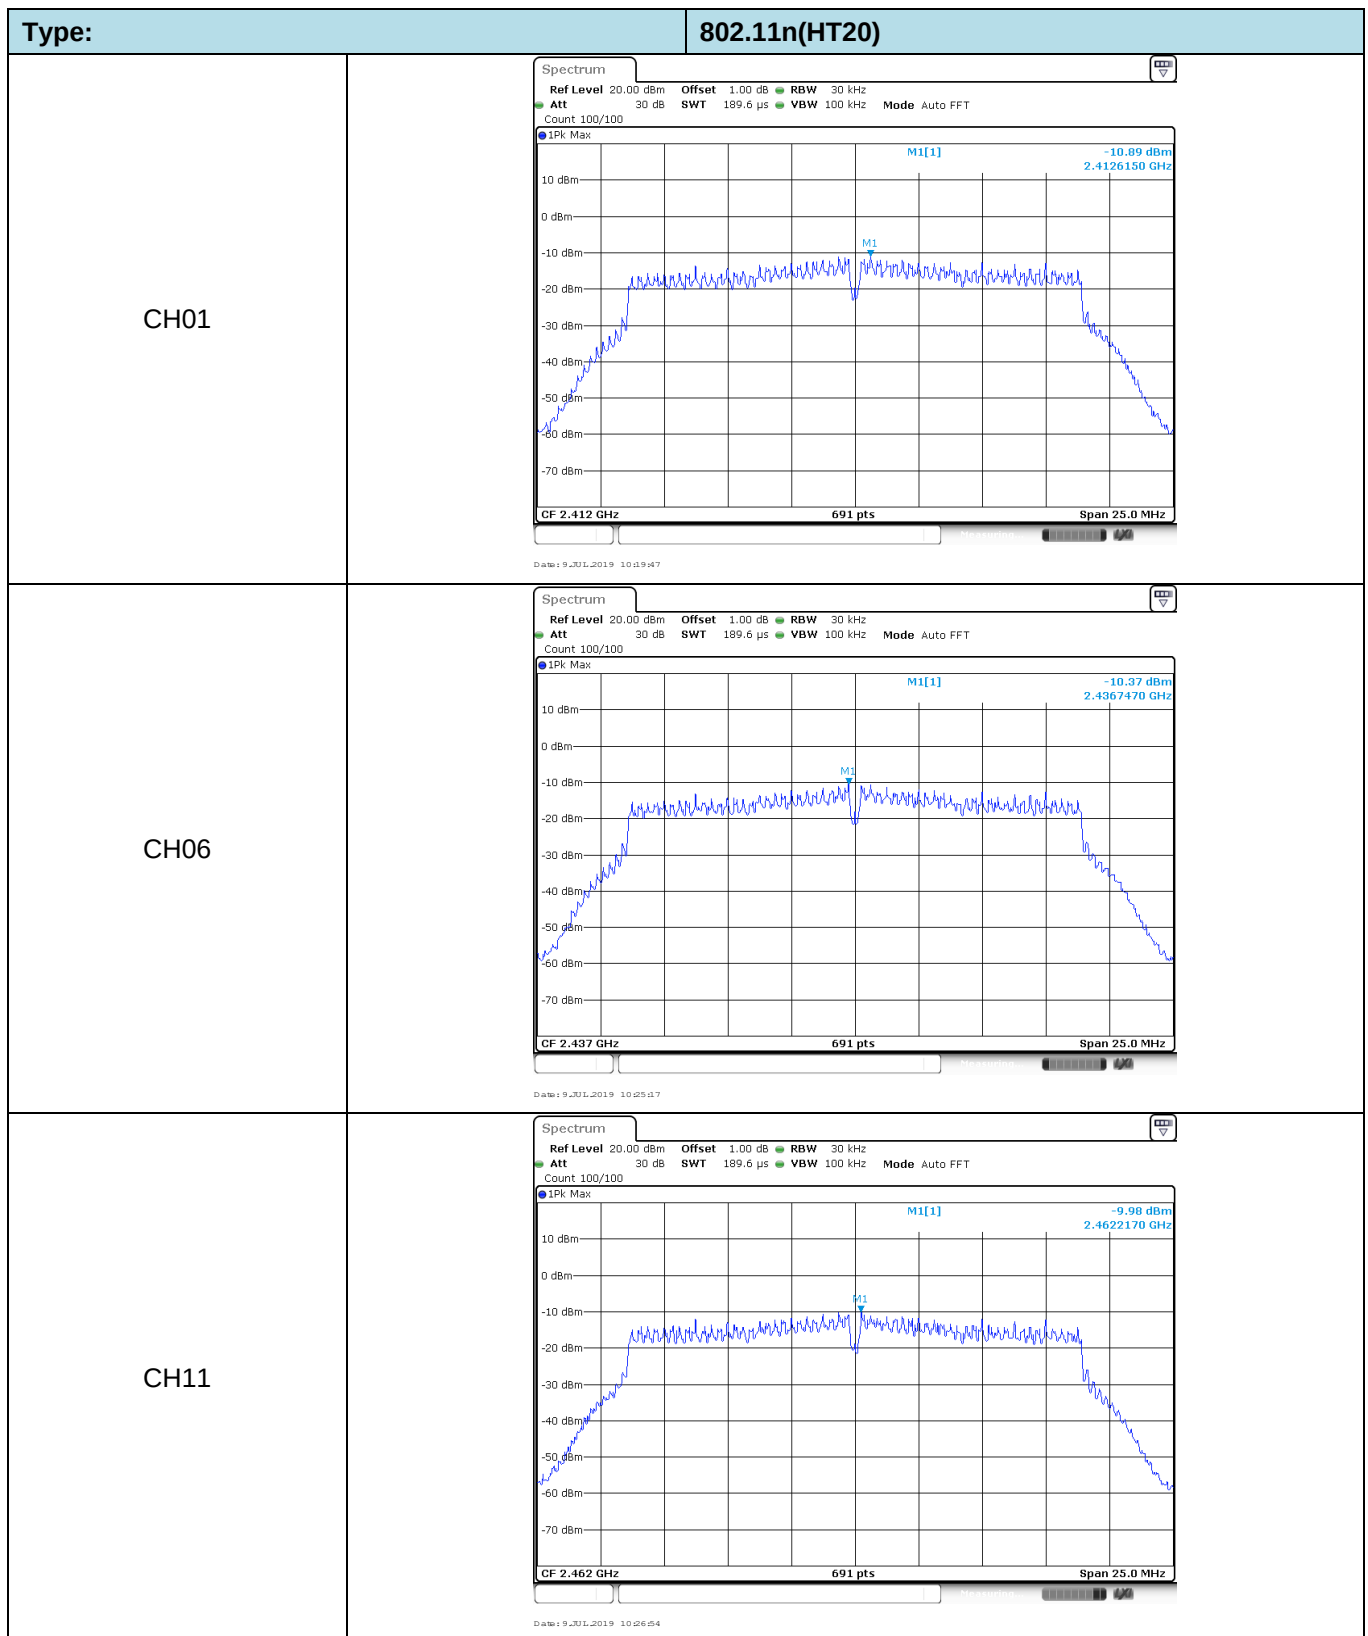


5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

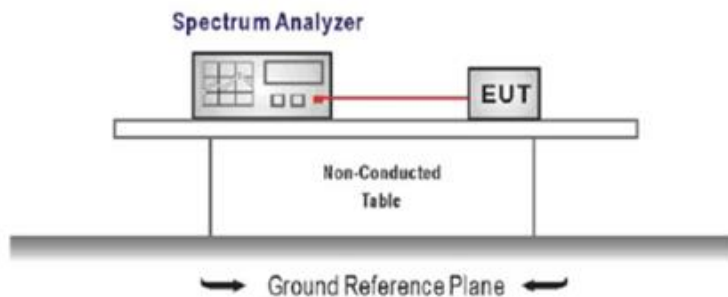

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
 Center Frequency = DTS channel center frequency
 Span = 2 x DTS bandwidth
 RBW = 100 kHz, VBW ≥ 3 x RBW
 Sweep time = auto couple
 Detector = Peak
 Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:


Please refer to the clause 3.3


TEST RESULTS

☒ Passed ☐ Not Applicable

Type	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	8.61	≥500	Pass
	06	8.61		
	11	8.61		
802.11g	01	16.35	≥500	Pass
	06	16.35		
	11	16.35		
802.11n(HT20)	01	17.61	≥500	Pass
	06	17.25		
	11	17.13		

Test plot as follows:

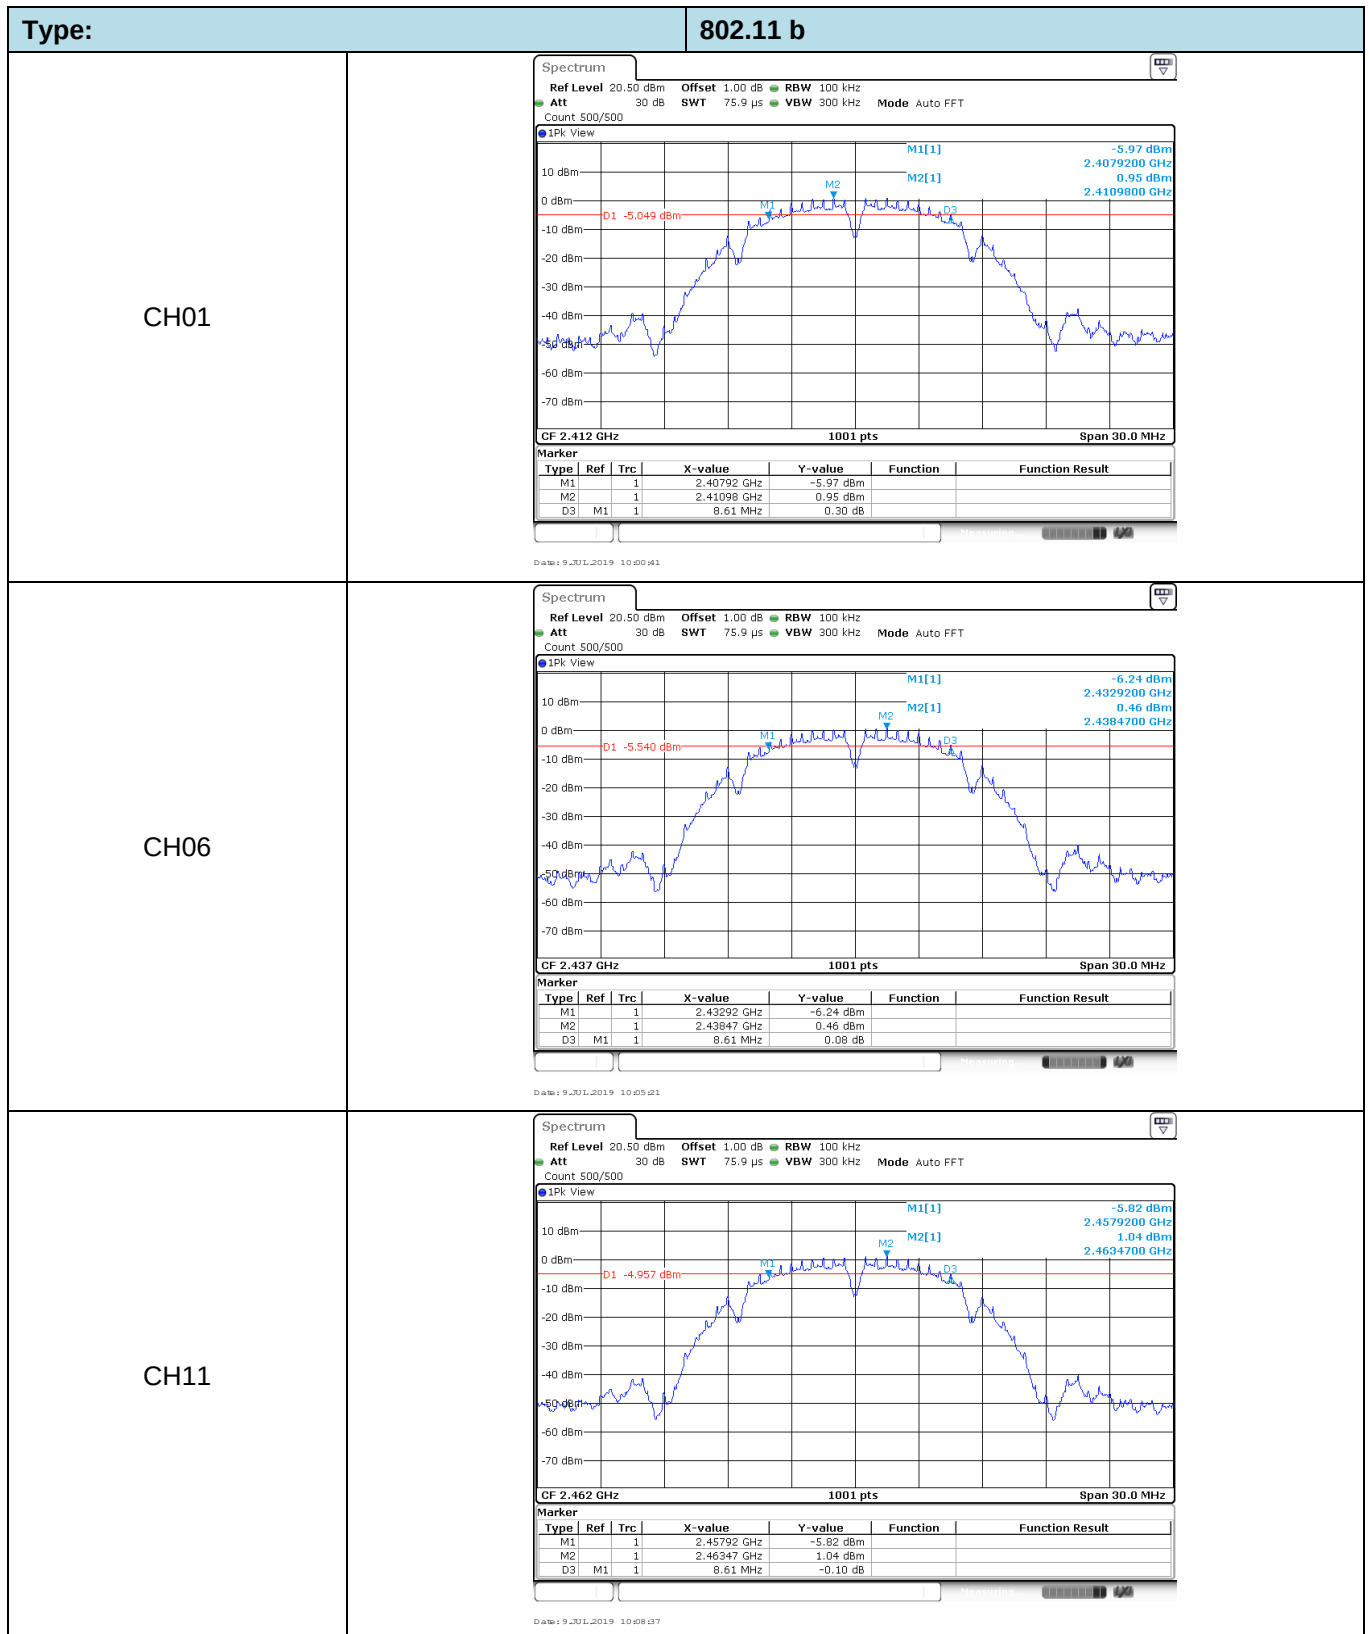


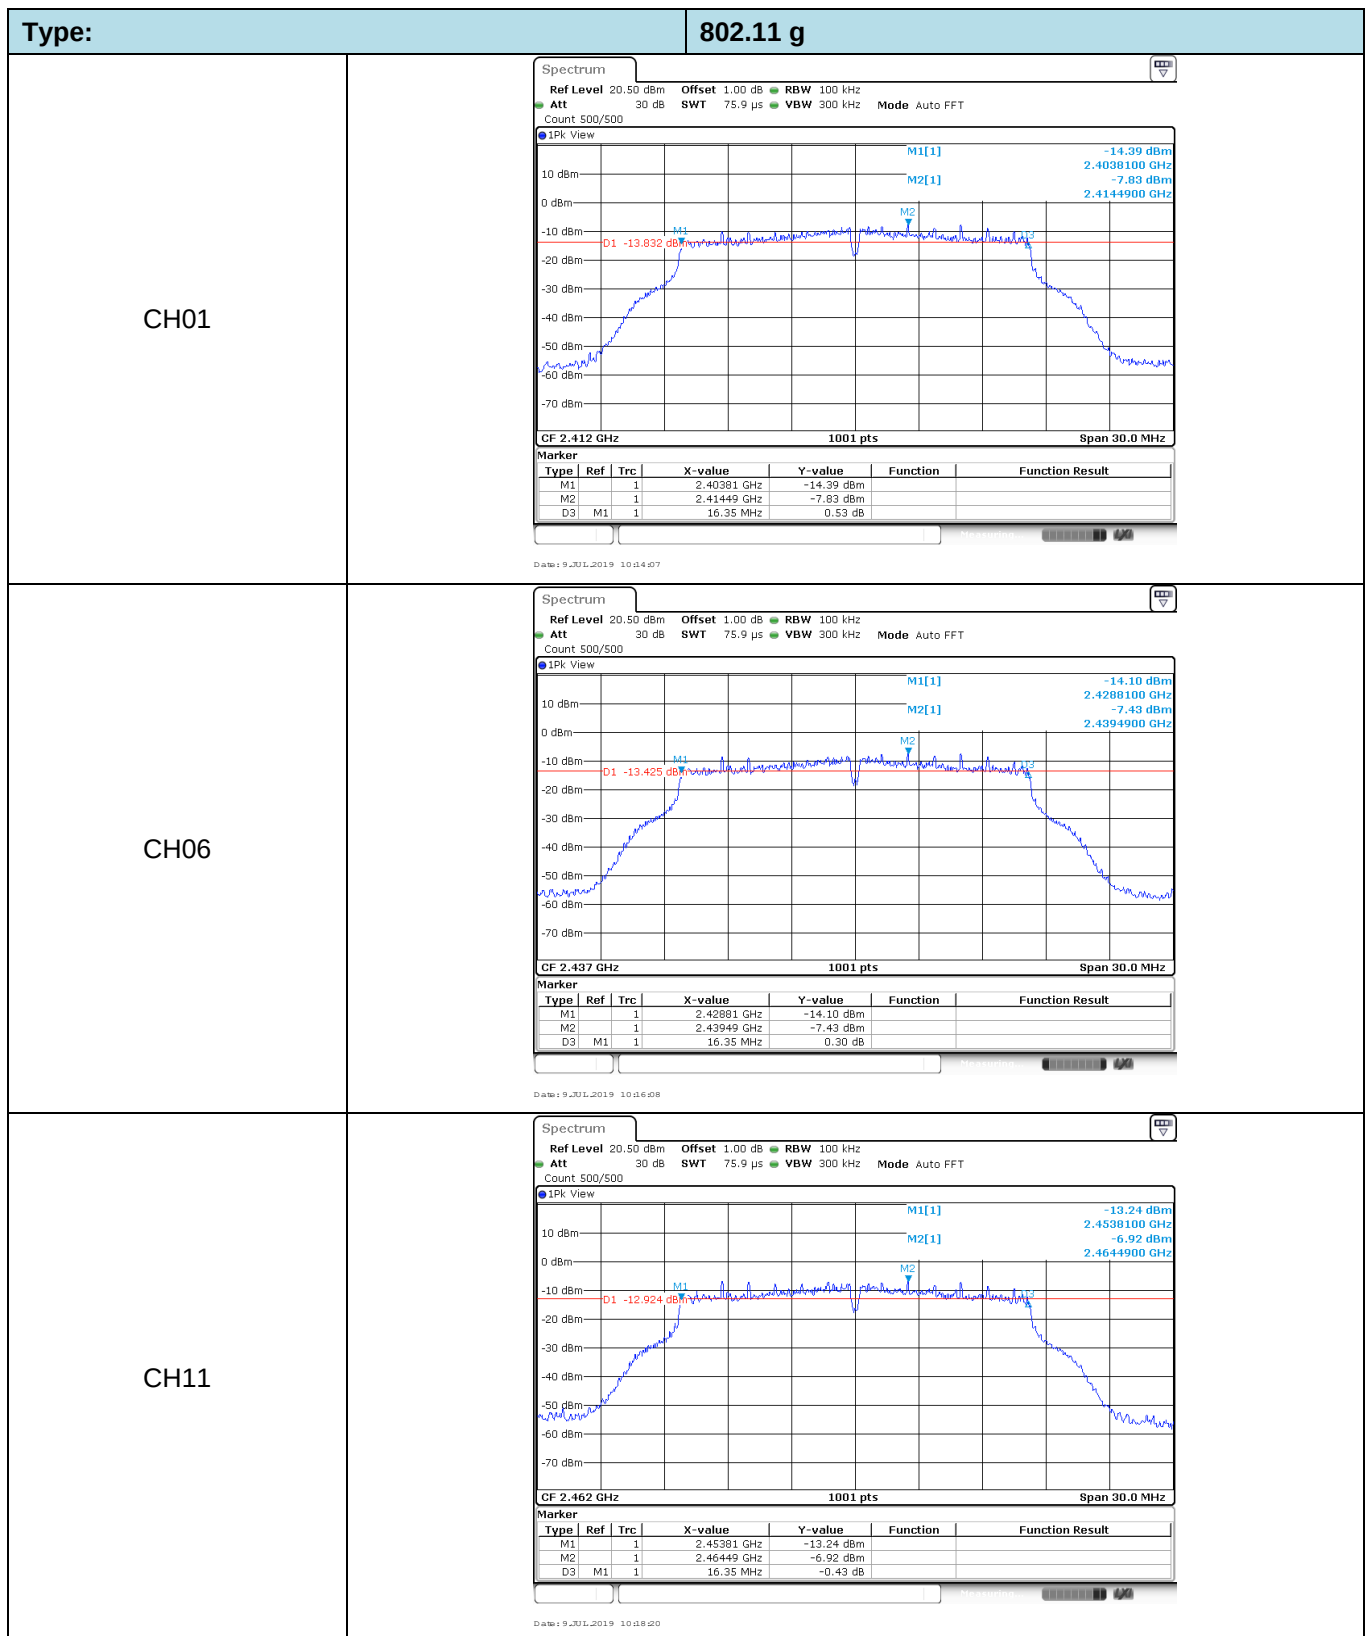


Type:

802.11n(HT20)


CH01

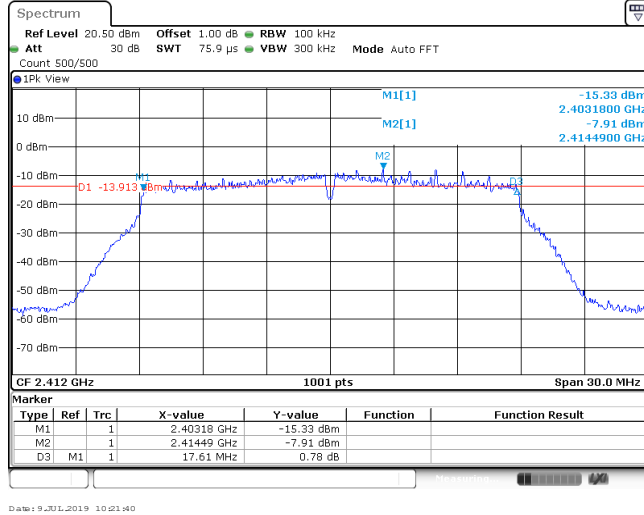

CH06

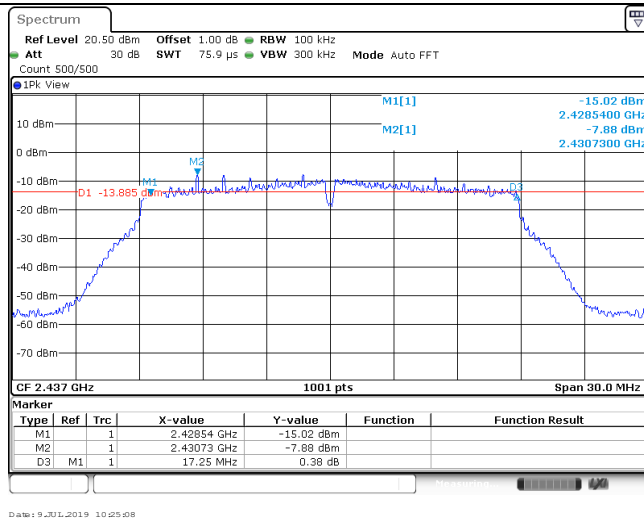

CH11

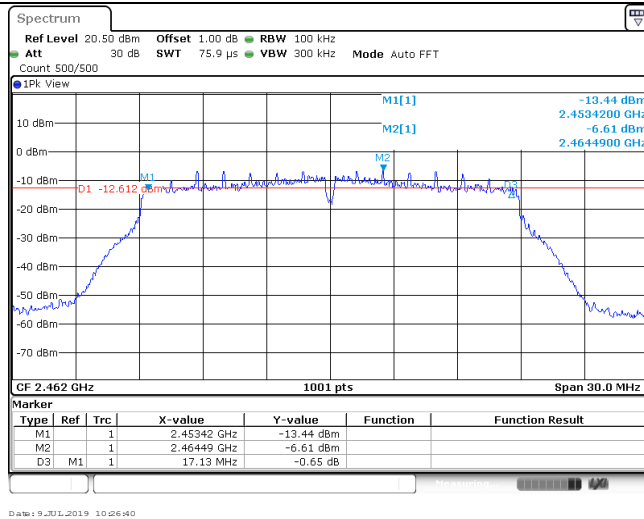


5.6. Restricted band

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

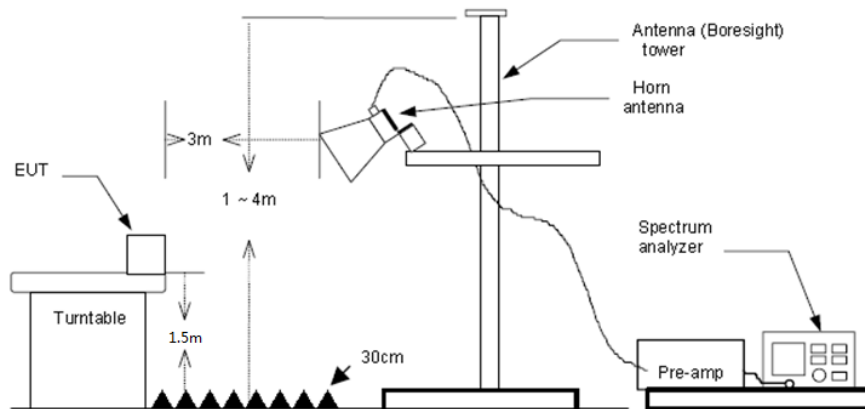

TEST PROCEDURE

- 1) The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2) The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3) The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow:
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Note:

- 1) Final level= Read level + Factor
Factor = Antenna Factor+ Cable Loss- Preamp Factor

802.11b					CH01		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.0000	14.61	35.78	50.39	74.00	23.61	Horizontal	PK
2390.0093	16.02	35.50	51.52	74.00	22.48	Horizontal	PK
2310.0000	14.58	35.78	50.36	54.00	3.64	Horizontal	AV
2390.0093	13.34	35.50	48.84	54.00	5.16	Horizontal	AV
2310.0000	16.45	35.78	52.23	74.00	21.77	Vertical	PK
2390.0226	14.19	35.50	49.69	74.00	24.31	Vertical	PK
2310.0000	15.28	35.78	51.06	54.00	2.94	Vertical	AV
2390.0226	12.95	35.50	48.45	54.00	5.55	Vertical	AV

802.11b					CH11		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.5041	14.20	35.31	49.51	74.00	24.49	Horizontal	PK
2500.0000	16.20	35.28	51.48	74.00	22.52	Horizontal	PK
2483.5041	13.68	35.31	48.99	54.00	5.01	Horizontal	AV
2500.0000	12.80	35.28	48.08	54.00	5.92	Horizontal	AV
2483.5041	12.87	35.31	48.18	74.00	25.82	Vertical	PK
2500.0000	13.71	35.28	48.99	74.00	25.01	Vertical	PK
2483.5041	12.64	35.31	47.95	54.00	6.05	Vertical	AV
2500.0000	13.11	35.28	48.39	54.00	5.61	Vertical	AV

802.11g					CH01		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.0000	17.45	35.78	53.23	74.00	20.77	Vertical	PK
2390.0093	14.79	35.50	50.29	74.00	23.71	Vertical	PK
2310.0000	14.14	35.78	49.92	54.00	4.08	Vertical	AV
2390.0093	13.34	35.50	48.84	54.00	5.16	Vertical	AV
2310.0000	13.84	35.78	49.62	74.00	24.38	Horizontal	PK
2390.0226	15.42	35.50	50.92	74.00	23.08	Horizontal	PK
2310.0000	13.25	35.78	49.03	54.00	4.97	Horizontal	AV
2390.0226	13.96	35.50	49.46	54.00	4.54	Horizontal	AV

802.11g					CH11		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.5041	16.28	35.31	51.59	74.00	22.41	Vertical	PK
2500.0000	15.86	35.28	51.14	74.00	22.86	Vertical	PK
2483.5041	13.76	35.31	49.07	54.00	4.93	Vertical	AV
2500.0000	14.94	35.28	50.22	54.00	3.78	Vertical	AV
2483.5041	14.55	35.31	49.86	74.00	24.14	Horizontal	PK
2500.0000	15.28	35.28	50.56	74.00	23.44	Horizontal	PK
2483.5041	13.66	35.31	48.97	54.00	5.03	Horizontal	AV
2500.0000	12.70	35.28	47.98	54.00	6.02	Horizontal	AV

802.11n(HT20)					CH01		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.0000	15.40	35.78	51.18	74.00	22.82	Horizontal	PK
2390.0093	14.48	35.50	49.98	74.00	24.02	Horizontal	PK
2310.0000	14.21	35.78	49.99	54.00	4.01	Horizontal	AV
2390.0093	14.06	35.50	49.56	54.00	4.44	Horizontal	AV
2310.0000	14.51	35.78	50.29	74.00	23.71	Vertical	PK
2390.0226	15.10	35.50	50.60	74.00	23.40	Vertical	PK
2310.0000	13.91	35.78	49.69	54.00	4.31	Vertical	AV
2390.0226	14.17	35.50	49.67	54.00	4.33	Vertical	AV

802.11n(HT20)					CH11		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.5041	15.47	35.31	50.78	74.00	23.22	Horizontal	PK
2500.0000	15.25	35.28	50.53	74.00	23.47	Horizontal	PK
2483.5041	13.38	35.31	48.69	54.00	5.31	Horizontal	AV
2500.0000	13.14	35.28	48.42	54.00	5.58	Horizontal	AV
2483.5041	16.99	35.31	52.30	74.00	21.70	Vertical	PK
2500.0000	14.61	35.28	49.89	74.00	24.11	Vertical	PK
2483.5041	14.44	35.31	49.75	54.00	4.25	Vertical	AV
2500.0000	12.87	35.28	48.15	54.00	5.85	Vertical	AV


5.7. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

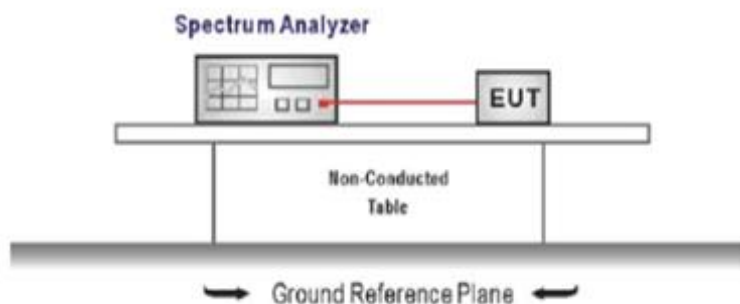

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level


Note: the channel found to contain the maximum PSD level can be used to establish the reference level.
3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

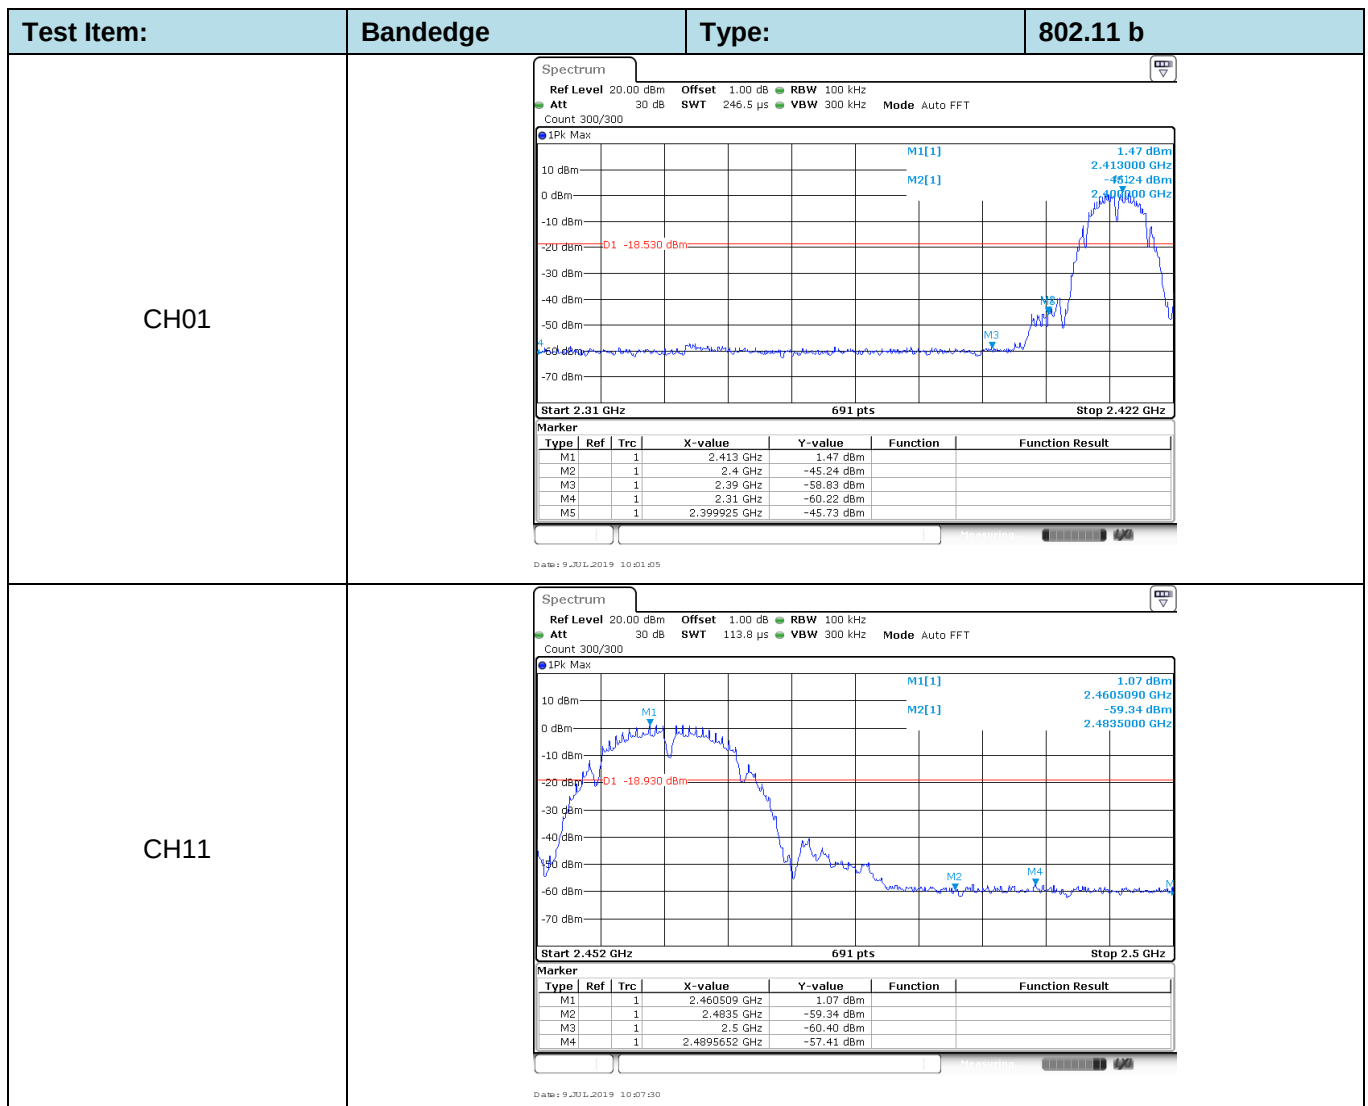


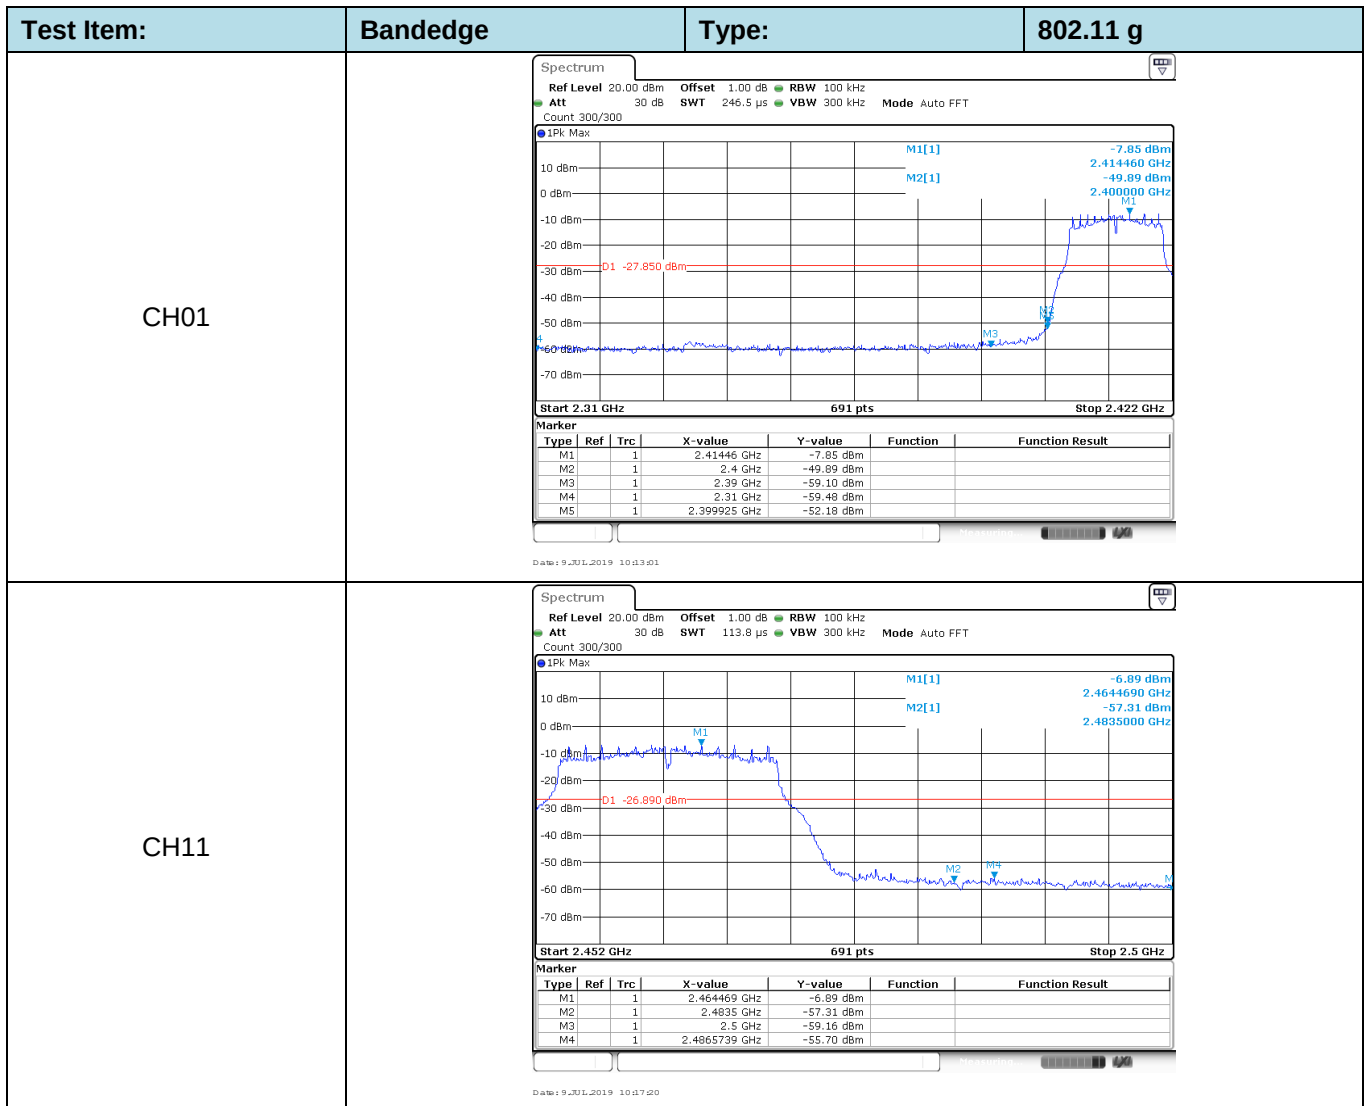


Test Item:	Bandedge	Type:	802.11 n(HT20)																																										
CH01	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 M5 -7.95 dBm 2.410740 GHz -50.66 dBm 2.400000 GHz -58.57 dBm 2.399925 GHz -59.83 dBm -52.79 dBm D1 -27.950 dBm Start 2.31 GHz 691 pts Stop 2.422 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.41074 GHz</td><td>-7.95 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-50.66 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-58.57 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-59.83 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399925 GHz</td><td>-52.79 dBm</td><td></td><td></td></tr></tbody></table> Date: 9 JUL 2019 10:20:01			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41074 GHz	-7.95 dBm			M2	1		2.4 GHz	-50.66 dBm			M3	1		2.39 GHz	-58.57 dBm			M4	1		2.31 GHz	-59.83 dBm			M5	1		2.399925 GHz	-52.79 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41074 GHz	-7.95 dBm																																									
M2	1		2.4 GHz	-50.66 dBm																																									
M3	1		2.39 GHz	-58.57 dBm																																									
M4	1		2.31 GHz	-59.83 dBm																																									
M5	1		2.399925 GHz	-52.79 dBm																																									
CH11	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 -6.93 dBm 2.4557160 GHz -57.52 dBm 2.4835000 GHz -56.09 dBm D1 -26.930 dBm Start 2.452 GHz 691 pts Stop 2.5 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.455716 GHz</td><td>-6.93 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-57.52 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-59.36 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4843478 GHz</td><td>-56.09 dBm</td><td></td><td></td></tr></tbody></table> Date: 9 JUL 2019 10:27:10			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.455716 GHz	-6.93 dBm			M2	1		2.4835 GHz	-57.52 dBm			M3	1		2.5 GHz	-59.36 dBm			M4	1		2.4843478 GHz	-56.09 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.455716 GHz	-6.93 dBm																																									
M2	1		2.4835 GHz	-57.52 dBm																																									
M3	1		2.5 GHz	-59.36 dBm																																									
M4	1		2.4843478 GHz	-56.09 dBm																																									

Test Item:	SE	Type:	802.11 b
CH01 Reference level	Spectrum Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 1Pk Max M1[1] 1.46 dBm 2.4134760 GHz M1 CF 2.412 GHz 691 pts Span 30.0 MHz Date: 9_JUL_2019 10:01:25		
CH01 30MHz~1000MHz	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1Pk Max M1[1] -51.98 dBm 781.7730 MHz D1 -18.540 dBm M1 Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 9_JUL_2019 10:01:41		
CH01 1GHz~26GHz	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1Pk Max M1[1] -44.43 dBm 17.949167 GHz D1 -18.540 dBm M1 Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 9_JUL_2019 10:01:57		


CH06
Reference level

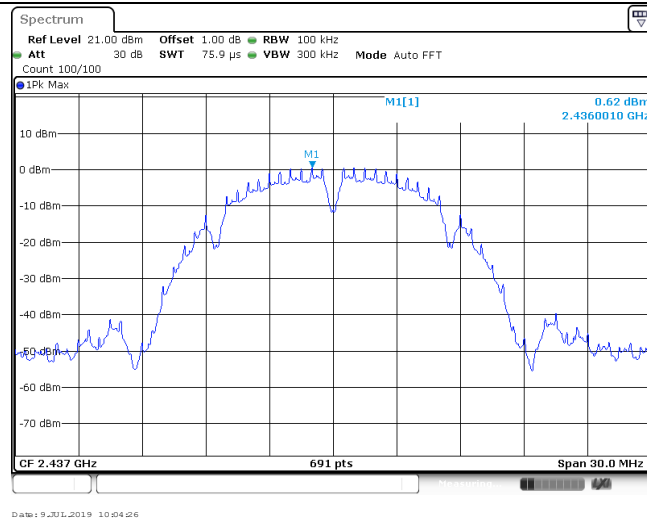


CH06
30MHz~1000MHz

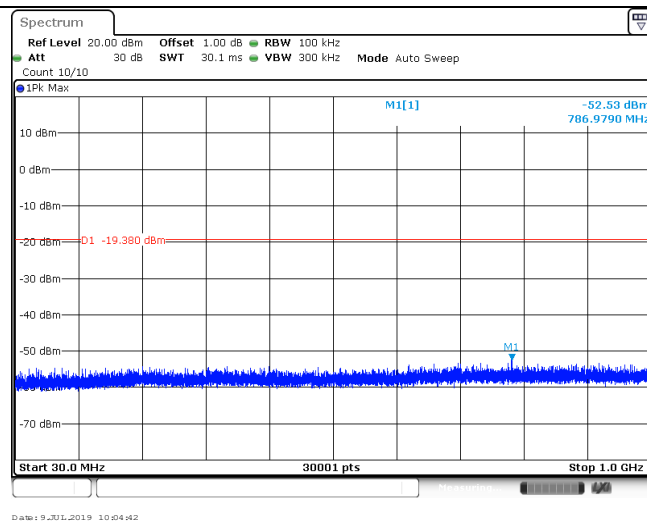


CH06
1GHz~26GHz

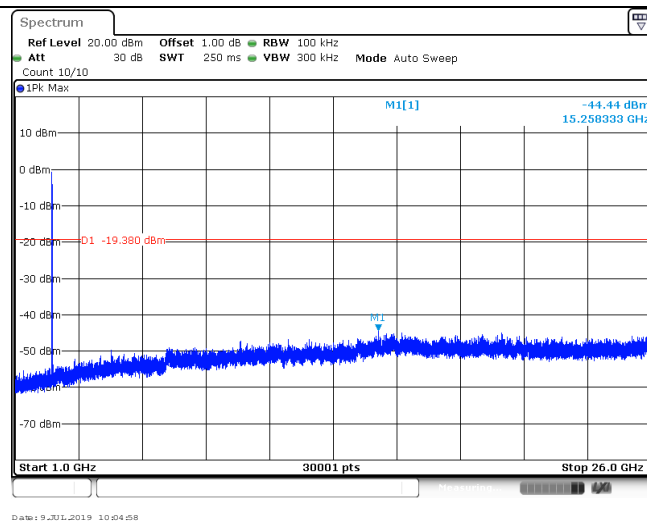


CH11
Reference level



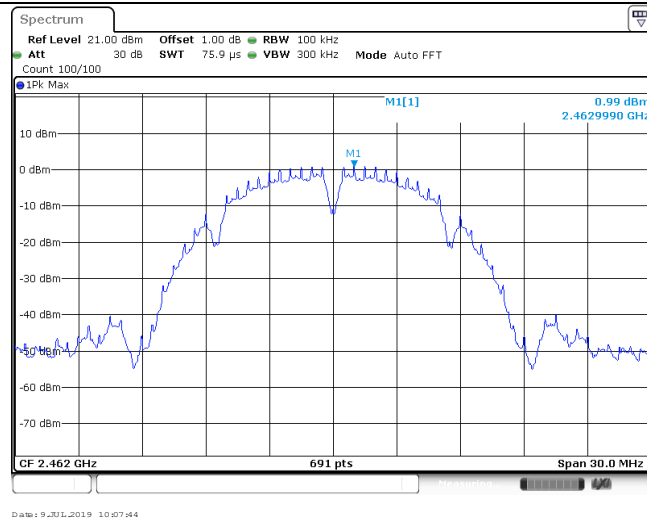


CH11
30MHz~1000MHz

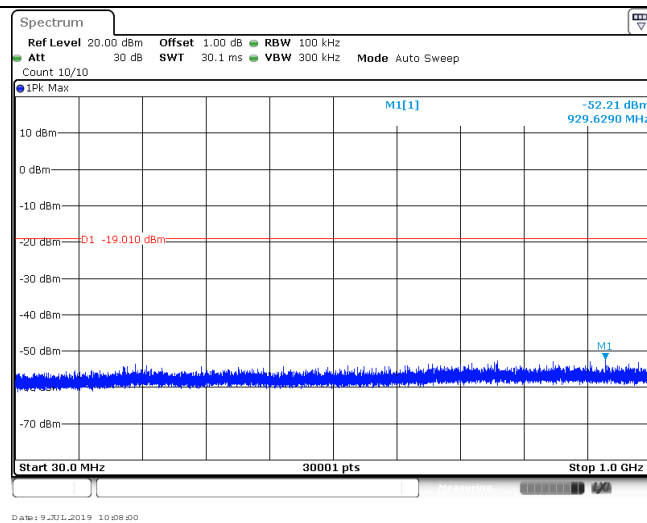


CH11
1GHz~26GHz

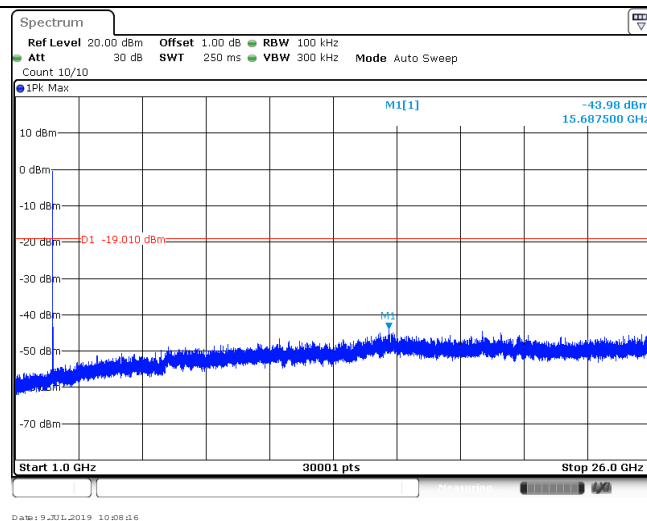


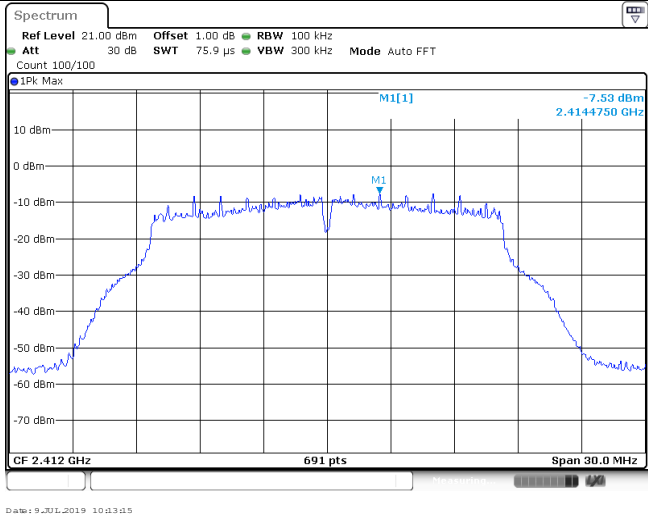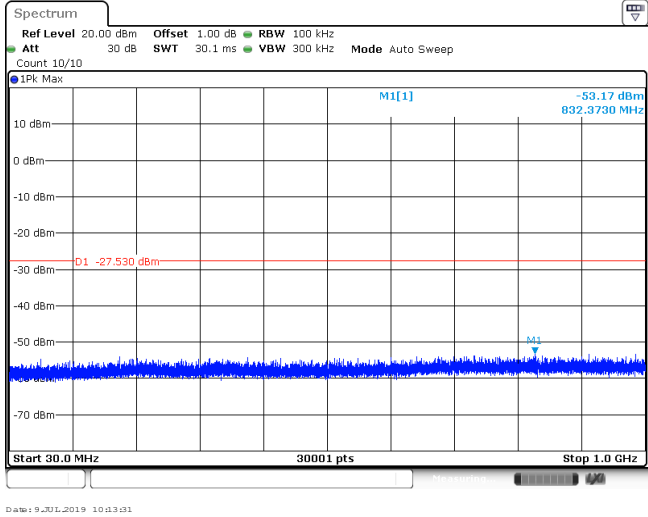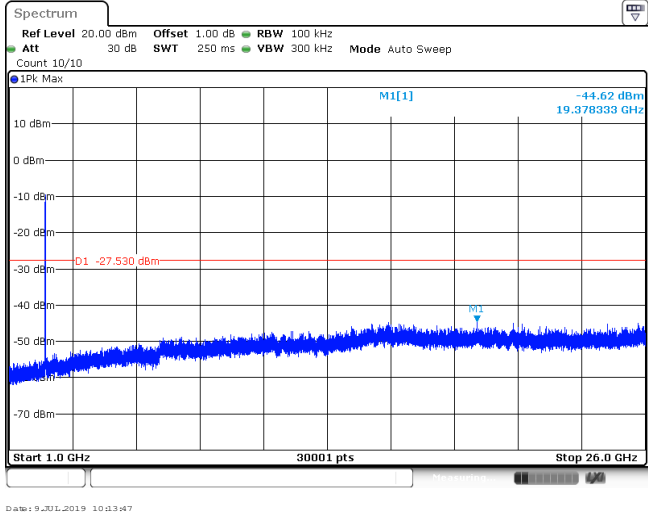Test Item:	SE	Type:	802.11 g
CH01 Reference level			
CH01 30MHz~1000MHz			
CH01 1GHz~26GHz			


CH06
Reference level

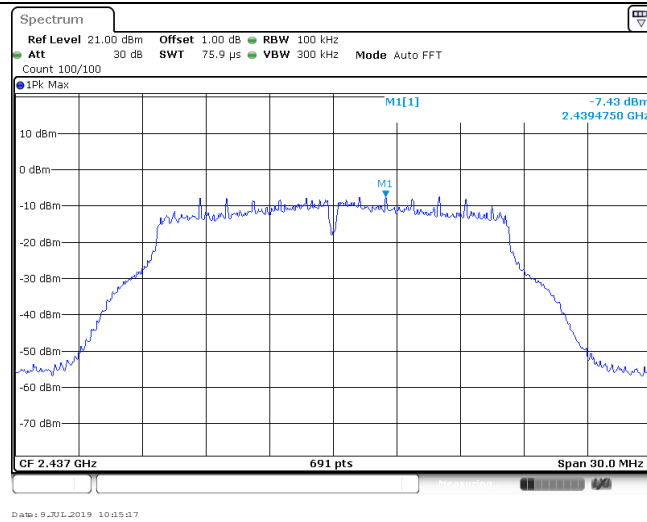


CH06
30MHz~1000MHz

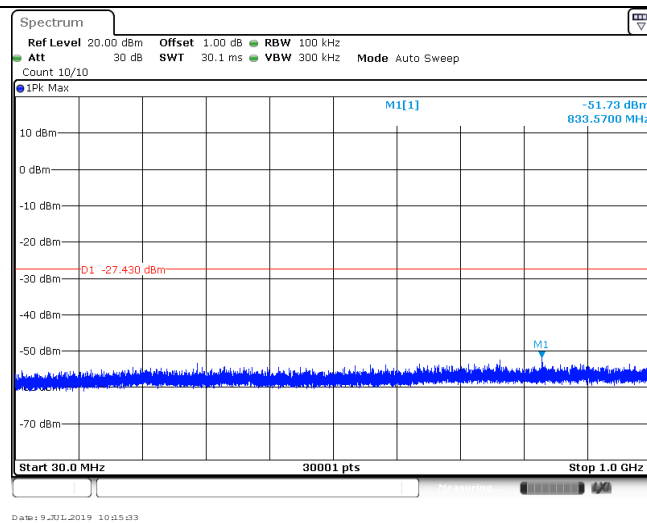


CH06
1GHz~26GHz

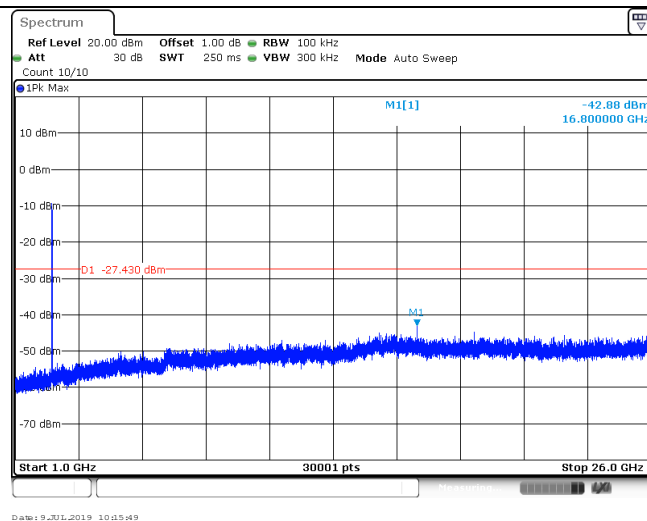


CH11
Reference level



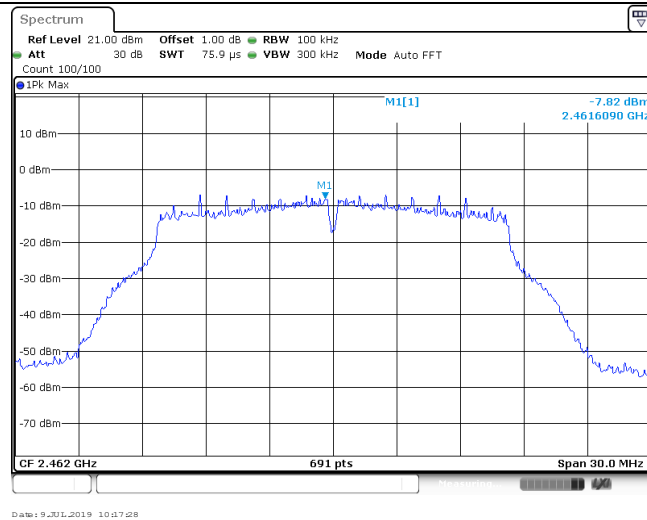


CH11
30MHz~1000MHz

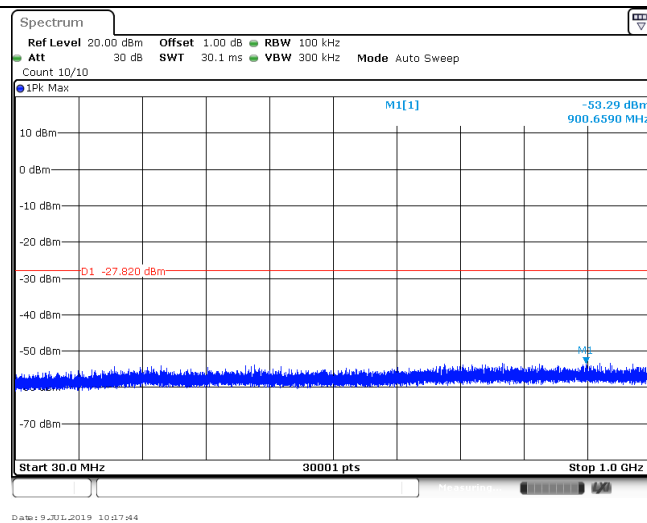


CH11
1GHz~26GHz

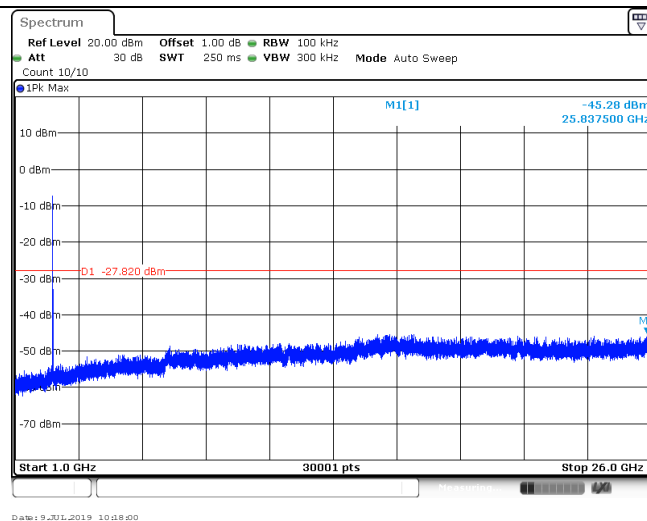


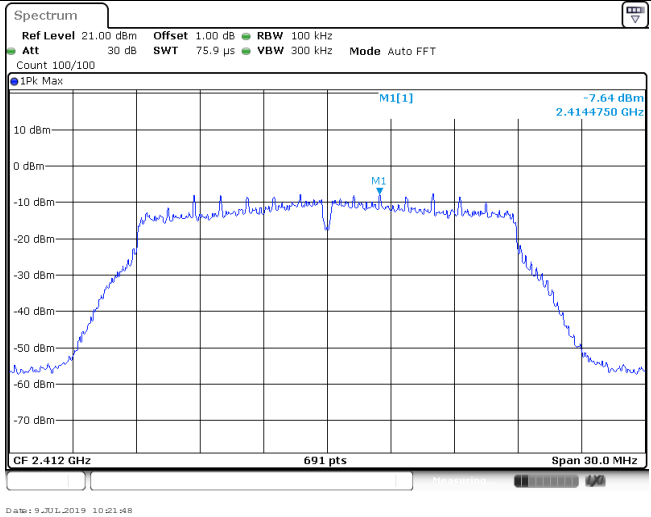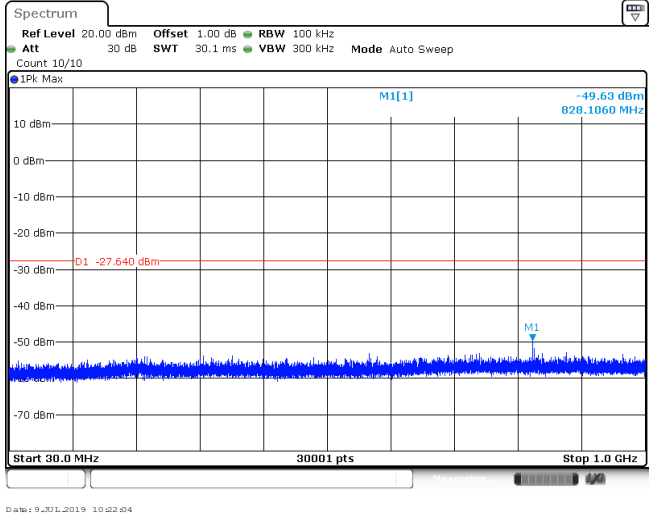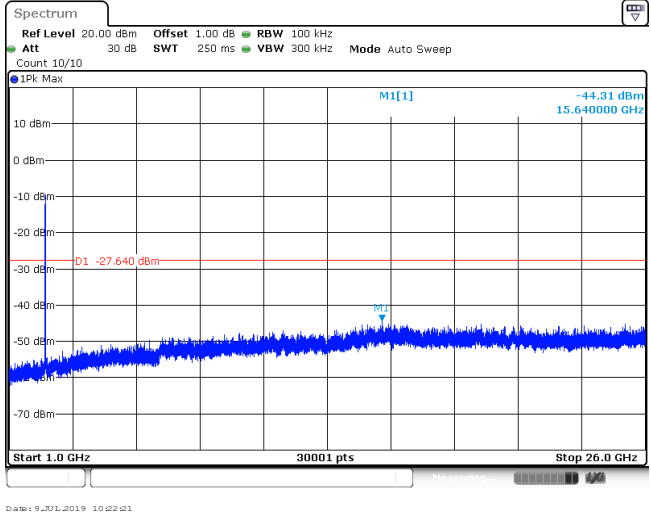Test Item:	SE	Type:	802.11 n(HT20)
CH01 Reference level			
CH01 30MHz~1000MHz			
CH01 1GHz~26GHz			


CH06
Reference level

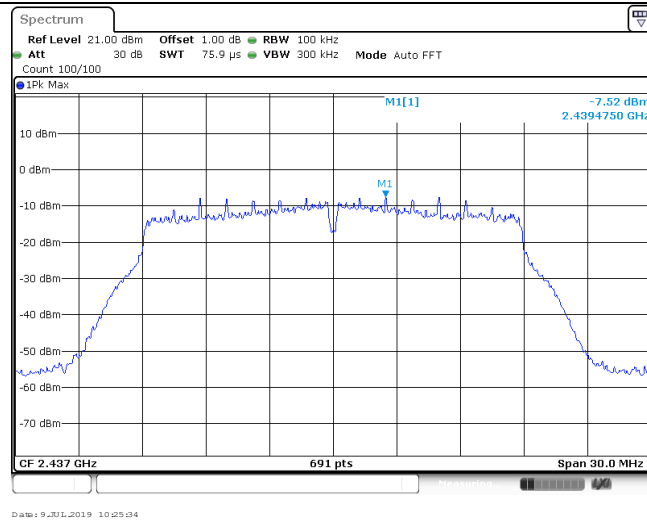


CH06
30MHz~1000MHz

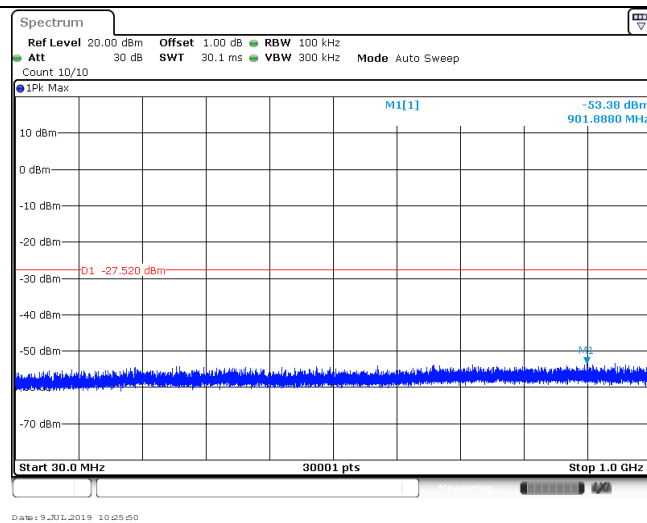


CH06
1GHz~26GHz

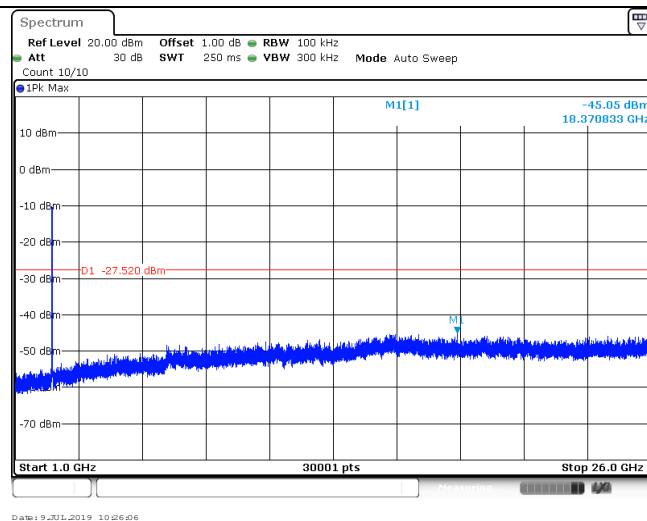


CH11
Reference level

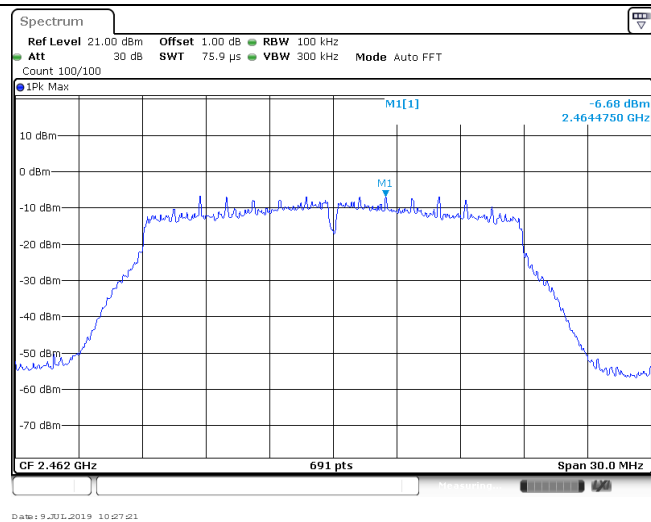

CH11
30MHz~1000MHz

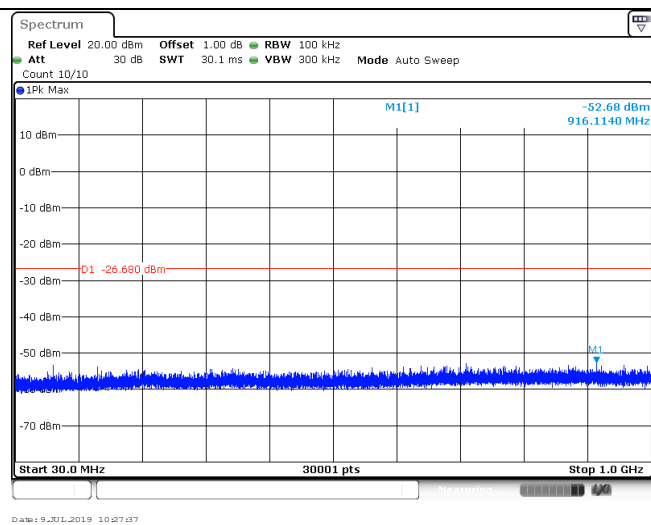

CH11
1GHz~26GHz

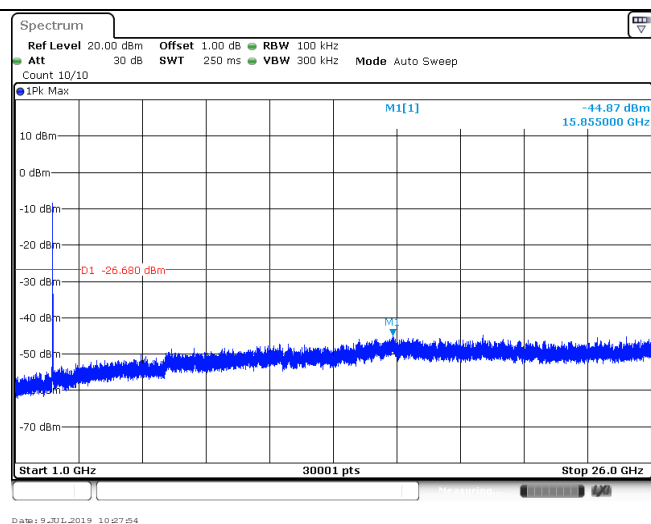

5.8. Spurious Emissions (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


➤ 9kHz ~30MHz

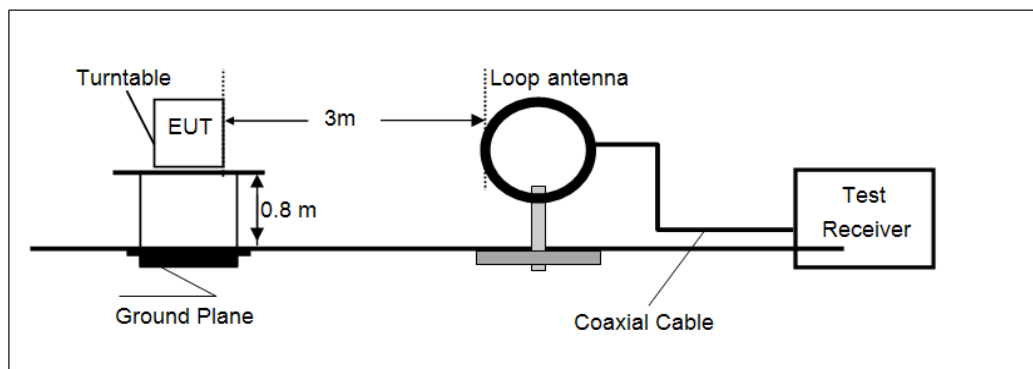

➤ 30MHz ~ 1GHz

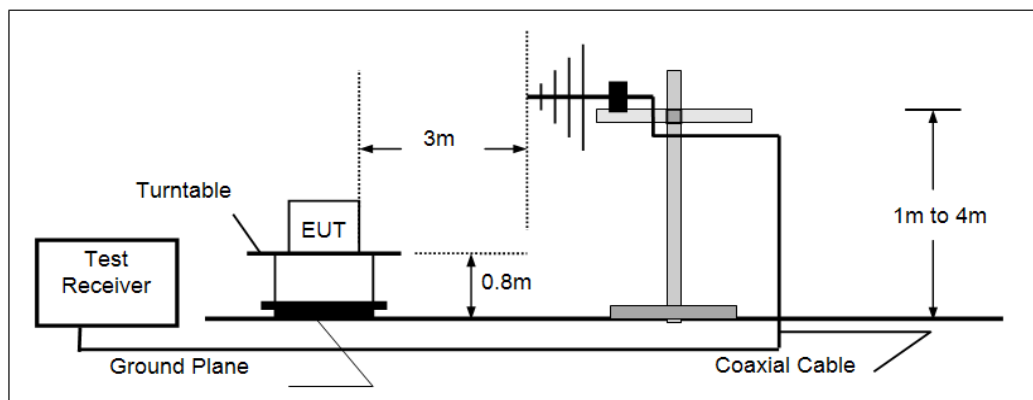

➤ Above 1GHz

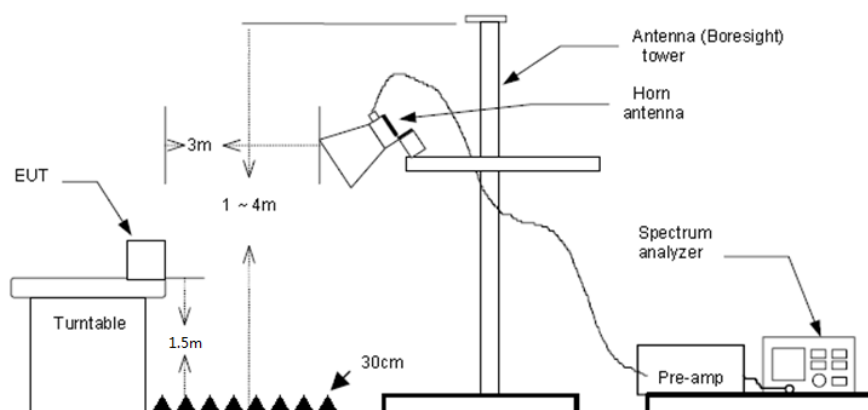

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note:

- 1) Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.

➤ **9kHz ~ 30MHz**

The EUT was pre-scanned the frequency band (9kHz~30MHz), found the radiated level lower than the limit, so don't show on the report.


➤ **30MHz ~1000MHz**

Have pre-scan all modulation mode, found the 802.11b mode CH01 which it was worst case, so only the worst case's data on the test report.

➤ 30MHz ~ 1GHz

Polarization:

Vertical

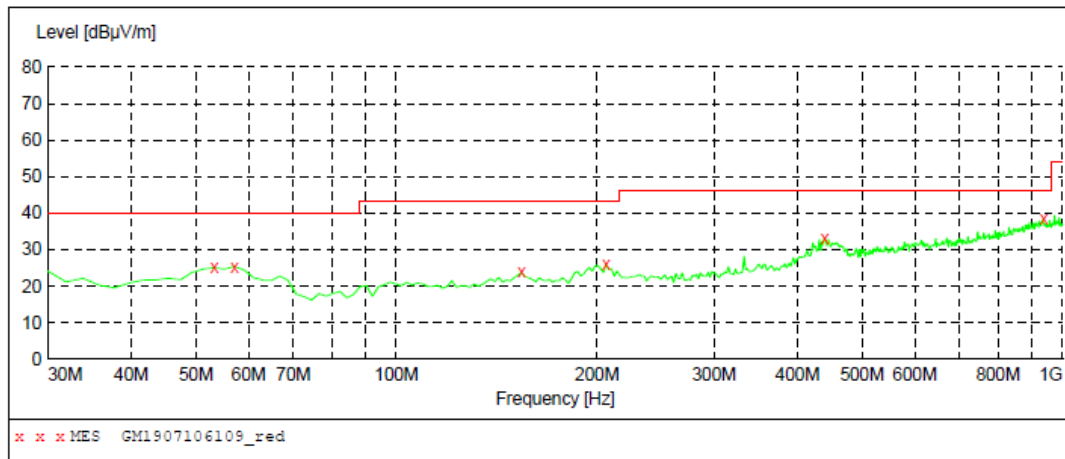
**MEASUREMENT RESULT: "GM1907106109_red"**

7/10/2019 10:01AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	25.10	-5.1	40.0	14.9	QP	100.0	9.00	VERTICAL
57.160000	25.40	-5.5	40.0	14.6	QP	100.0	0.00	VERTICAL
154.160000	23.80	-9.9	43.5	19.7	QP	100.0	0.00	VERTICAL
206.540000	26.00	-6.6	43.5	17.5	QP	100.0	142.00	VERTICAL
439.340000	33.10	0.3	46.0	12.9	QP	100.0	52.00	VERTICAL
935.980000	38.30	10.8	46.0	7.7	QP	100.0	343.00	VERTICAL

Polarization:

Horizontal

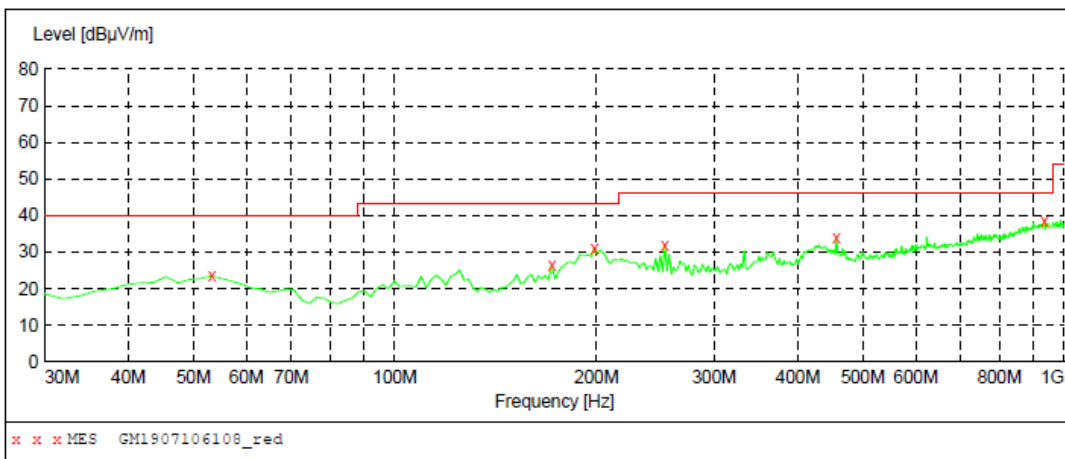**MEASUREMENT RESULT: "GM1907106108_red"**

7/10/2019 9:59AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	23.50	-5.1	40.0	16.5	QP	300.0	274.00	HORIZONTAL
171.620000	26.30	-9.1	43.5	17.2	QP	100.0	93.00	HORIZONTAL
198.780000	31.10	-5.8	43.5	12.4	QP	100.0	93.00	HORIZONTAL
253.100000	31.90	-4.6	46.0	14.1	QP	100.0	161.00	HORIZONTAL
456.800000	34.00	0.6	46.0	12.0	QP	100.0	281.00	HORIZONTAL
934.040000	38.60	10.8	46.0	7.4	QP	300.0	31.00	HORIZONTAL

➤ 1 GHz ~ 25 GHz

802.11b				CH01			
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1309.9063	33.88	-5.57	28.31	74.00	45.69	Horizontal	PK
3054.7813	35.09	0.12	35.21	74.00	38.79	Horizontal	PK
3988.9063	35.48	2.98	38.46	74.00	35.54	Horizontal	PK
7218.6875	30.25	16.00	46.25	74.00	27.75	Horizontal	PK
1675.6250	34.59	-6.14	28.45	74.00	45.55	Vertical	PK
3709.8438	33.00	1.63	34.63	74.00	39.37	Vertical	PK
4392.8125	31.25	4.84	36.09	74.00	37.91	Vertical	PK
6156.7813	30.21	10.81	41.02	74.00	32.98	Vertical	PK

802.11b				CH06			
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1737.3125	34.02	-5.99	28.03	74.00	45.97	Vertical	PK
3818.5313	33.43	2.12	35.55	74.00	38.45	Vertical	PK
5262.3125	32.04	8.65	40.69	74.00	33.31	Vertical	PK
7416.9688	30.75	16.38	47.13	74.00	26.87	Vertical	PK
1638.9063	34.48	-6.21	28.27	74.00	45.73	Horizontal	PK
2987.2188	39.79	-0.05	39.74	74.00	34.26	Horizontal	PK
3984.5000	36.23	2.97	39.20	74.00	34.80	Horizontal	PK
5300.5000	31.18	8.45	39.63	74.00	34.37	Horizontal	PK

802.11b				CH11			
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1539.0313	33.33	-5.88	27.45	74.00	46.55	Horizontal	PK
2985.7500	38.09	-0.04	38.05	74.00	35.95	Horizontal	PK
4495.6250	32.09	5.33	37.42	74.00	36.58	Horizontal	PK
5755.8125	30.57	9.23	39.80	74.00	34.20	Horizontal	PK
1650.6563	33.62	-6.19	27.43	74.00	46.57	Vertical	PK
3680.4688	33.22	1.56	34.78	74.00	39.22	Vertical	PK
5984.9375	30.85	10.39	41.24	74.00	32.76	Vertical	PK
6716.3750	30.61	13.43	44.04	74.00	29.96	Vertical	PK

Remark:

1. Final Level = Receiver Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
4. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

802.11g					CH01		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1674.1563	34.16	-6.15	28.01	74.00	45.99	Vertical	PK
3223.6875	34.52	0.56	35.08	74.00	38.92	Vertical	PK
5197.6875	30.93	8.98	39.91	74.00	34.09	Vertical	PK
6656.1563	30.28	13.33	43.61	74.00	30.39	Vertical	PK
1368.6563	33.71	-5.58	28.13	74.00	45.87	Horizontal	PK
3186.9688	33.75	0.77	34.52	74.00	39.48	Horizontal	PK
3874.3438	33.17	2.50	35.67	74.00	38.33	Horizontal	PK
5874.7813	30.60	9.87	40.47	74.00	33.53	Horizontal	PK

802.11g					CH06		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1895.9375	31.94	-5.83	26.11	74.00	47.89	Horizontal	PK
3502.7500	33.07	1.06	34.13	74.00	39.87	Horizontal	PK
4594.0313	30.64	5.74	36.38	74.00	37.62	Horizontal	PK
5942.3438	30.54	10.18	40.72	74.00	33.28	Horizontal	PK
1860.6875	32.27	-5.82	26.45	74.00	47.55	Vertical	PK
3872.8750	32.05	2.49	34.54	74.00	39.46	Vertical	PK
6192.0313	29.78	10.87	40.65	74.00	33.35	Vertical	PK
6688.4688	29.94	13.43	43.37	74.00	30.63	Vertical	PK

802.11g					CH11		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1807.8125	32.99	-5.80	27.19	74.00	46.81	Vertical	PK
3095.9063	33.61	0.30	33.91	74.00	40.09	Vertical	PK
4787.9063	30.45	6.97	37.42	74.00	36.58	Vertical	PK
6612.0938	30.82	13.19	44.01	74.00	29.99	Vertical	PK
1331.9375	32.71	-5.57	27.14	74.00	46.86	Horizontal	PK
3847.9063	31.61	2.32	33.93	74.00	40.07	Horizontal	PK
4992.0625	32.37	7.80	40.17	74.00	33.83	Horizontal	PK
6268.4063	30.89	10.96	41.85	74.00	32.15	Horizontal	PK

Remark:

1. Final Level = Receiver Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The peak level is lower than average limit (54 dBμV/m), this data is too weak; instrument of signal is unable to test.
4. The emission levels of other frequencies (test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

802.11n(HT20)					CH01		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1774.0313	33.29	-5.88	27.41	74.00	46.59	Horizontal	PK
3523.3125	32.89	1.14	34.03	74.00	39.97	Horizontal	PK
4052.0625	31.70	3.14	34.84	74.00	39.16	Horizontal	PK
5613.3438	30.47	8.84	39.31	74.00	34.69	Horizontal	PK
1752.0000	33.61	-5.94	27.67	74.00	46.33	Vertical	PK
3618.7813	32.87	1.48	34.35	74.00	39.65	Vertical	PK
4542.6250	32.54	5.53	38.07	74.00	35.93	Vertical	PK
6707.5625	30.60	13.45	44.05	74.00	29.95	Vertical	PK

802.11n(HT20)					CH06		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1515.5313	32.61	-5.73	26.88	74.00	47.12	Vertical	PK
3827.3438	32.57	2.18	34.75	74.00	39.25	Vertical	PK
5003.8125	30.05	7.89	37.94	74.00	36.06	Vertical	PK
6706.0938	30.98	13.45	44.43	74.00	29.57	Vertical	PK
1891.5313	32.32	-5.83	26.49	74.00	47.51	Horizontal	PK
3513.0313	32.67	1.10	33.77	74.00	40.23	Horizontal	PK
5209.4375	30.63	8.93	39.56	74.00	34.44	Horizontal	PK
6640.0000	30.82	13.28	44.10	74.00	29.90	Horizontal	PK

802.11n(HT20)					CH11		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1640.3750	32.58	-6.21	26.37	74.00	47.63	Horizontal	PK
3427.8438	32.27	0.18	32.45	74.00	41.55	Horizontal	PK
4498.5625	31.26	5.34	36.60	74.00	37.40	Horizontal	PK
6628.2500	29.87	13.24	43.11	74.00	30.89	Horizontal	PK
1682.9688	34.74	-6.13	28.61	74.00	45.39	Vertical	PK
3370.5625	33.44	-0.21	33.23	74.00	40.77	Vertical	PK
3897.8438	31.72	2.66	34.38	74.00	39.62	Vertical	PK
5231.4688	30.74	8.81	39.55	74.00	34.45	Vertical	PK

Remark:


1. Final Level = Receiver Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier Factor
3. The peak level is lower than average limit (54 dBμV/m), this data is too weak; instrument of signal is unable to test.
4. The emission levels of other frequencies (test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.


6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)






Radiated Emissions



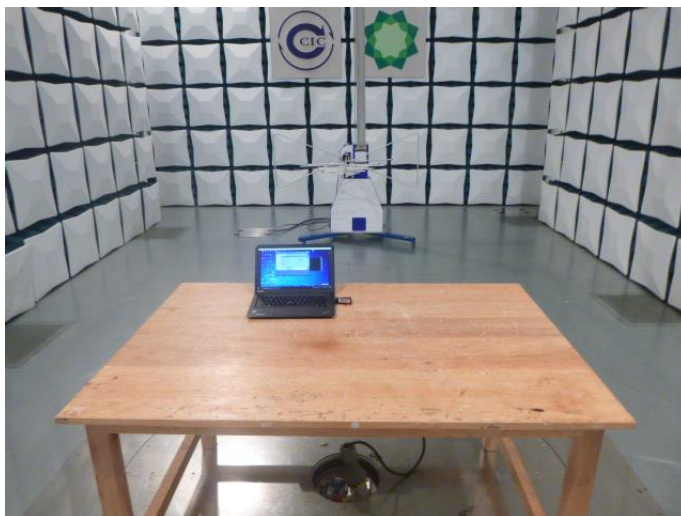


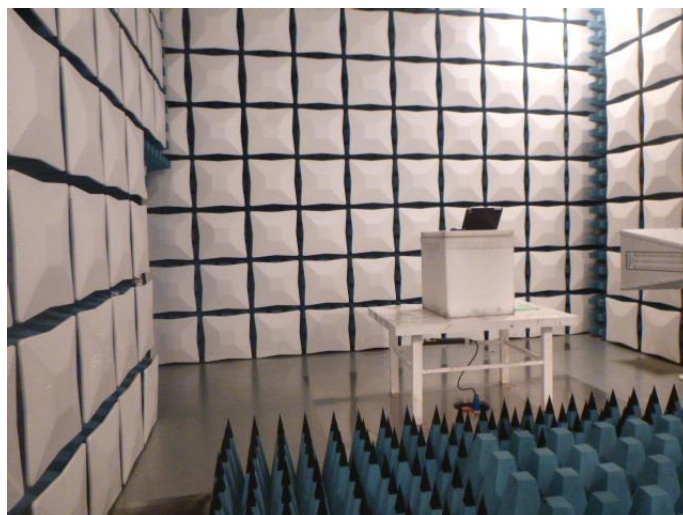



7. EXTERNAL AND INTERNAL PHOTOS



External Photos

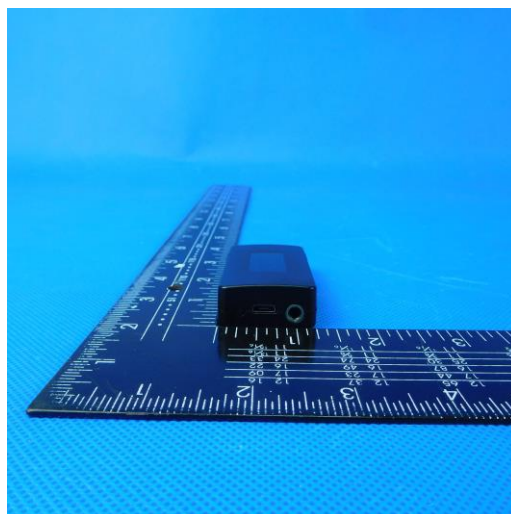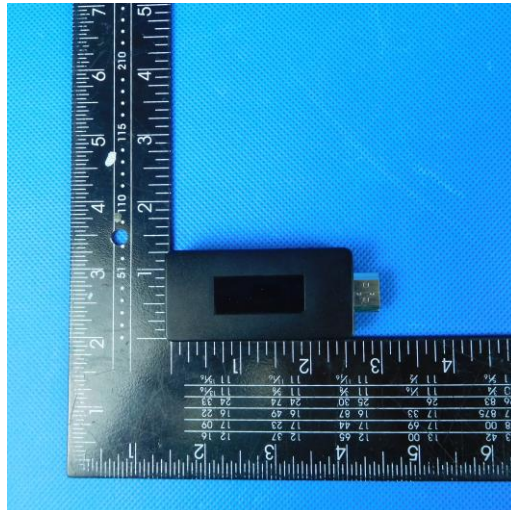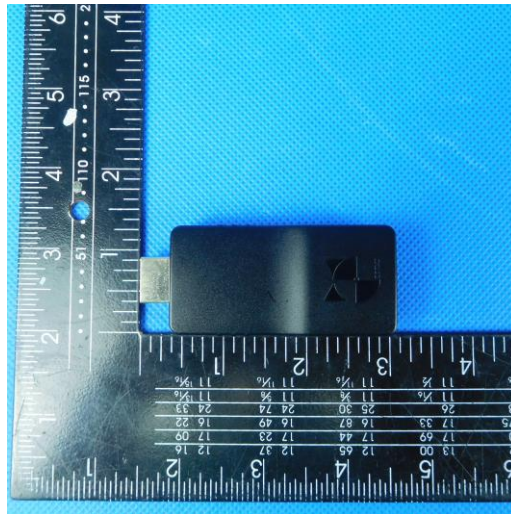

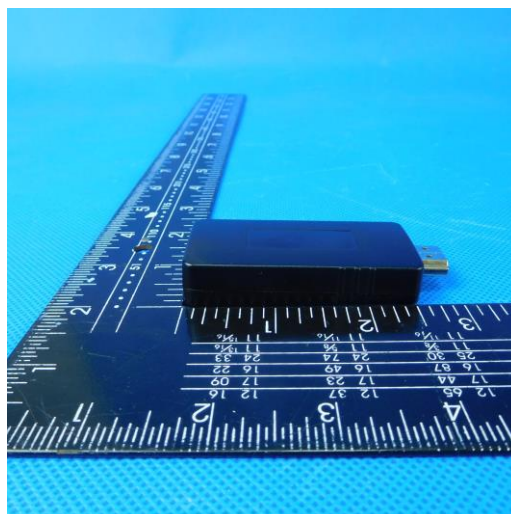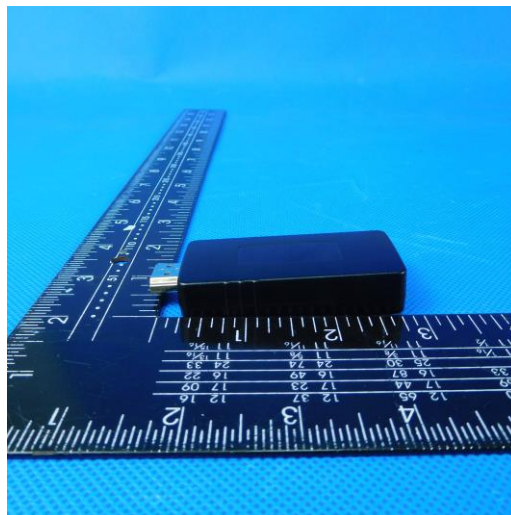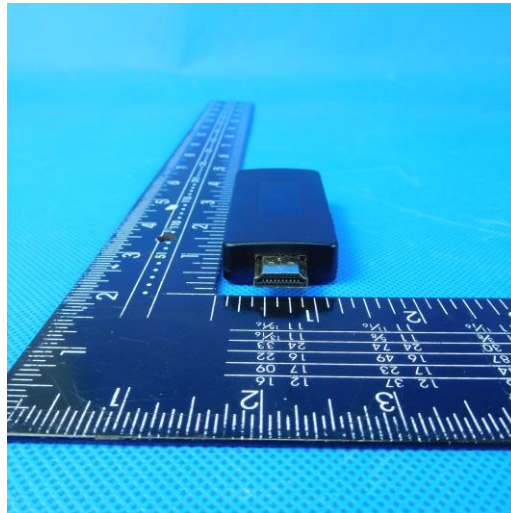

Internal Photos

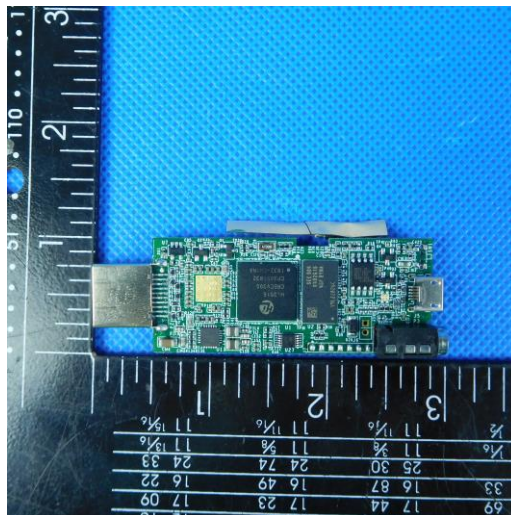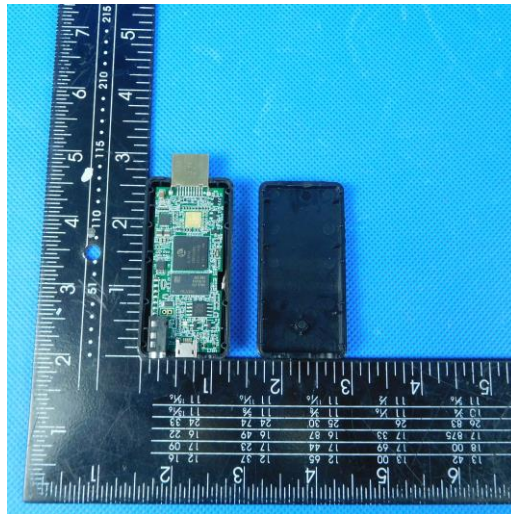

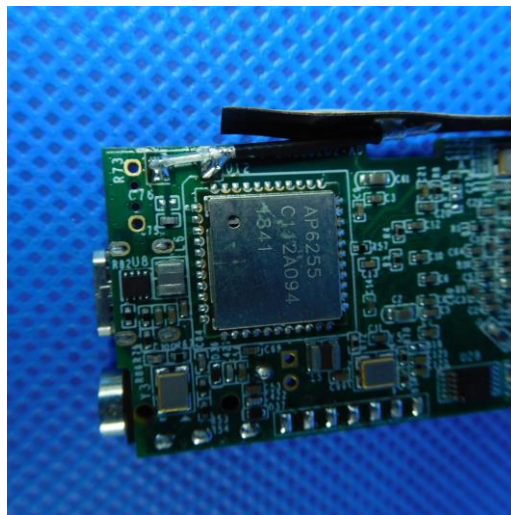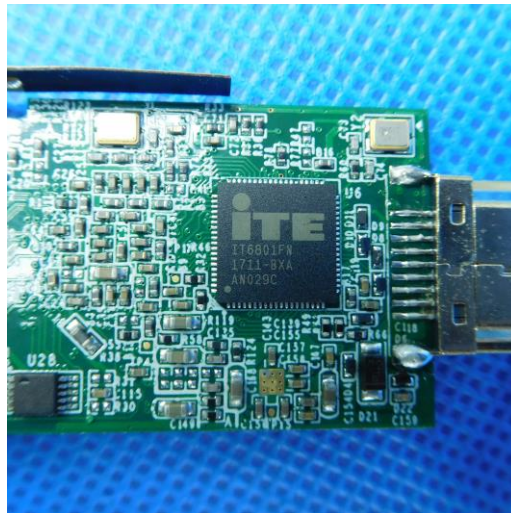



-----End of Report-----