



FCC TEST REPORT

FCC ID: 2ATXBG01-CWF01

On Behalf of

Gallant Precision Machining Co., Ltd.
Intelligent Diagnosis & Wi-Fi Control Module
Model No.: G01-CWF01

Prepared for : Gallant Precision Machining Co., Ltd.
Address : No.5-1, Innovation 1st Rd., Science-Based Industrial Park, HsinChu,
Taiwan

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : T1890011 01
Date of Receipt : March 3, 2019
Date of Test : March 4- 28, 2019
Date of Report : September 23, 2019
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	9
2.6. Test Conditions	10
2.7. Test Facility	10
2.8. Measurement Uncertainty	11
2.9. Test Equipment List	12
3. Spurious Emission	13
3.1. Test Limits	13
3.2. Test Procedure	13
3.3. Test Setup	14
3.4. Test Results	15
4. Power line Conducted Emission	22
4.1. Test Limits	22
4.2. Test Procedure	22
4.3. Test Setup	22
4.4. Test Results	23
5. Conducted Maximum Output Power	25
5.1. Test limits	25
5.2. Test Procedure	25
5.3. Test Setup	25
5.4. Test Results	25
6. Peak Power Spectral Density	27
6.1. Test limits	27
6.2. Test Procedure	27
6.3. Test Setup	27
6.4. Test Results	28
7. Bandwidth	31
7.1. Test limits	31
7.2. Test Procedure	31
7.3. Test Setup	31
7.4. Test Results	31
8. Band Edge Check	34
8.1. Test limits	34
8.2. Test Procedure	34
8.3. Test Setup	34
8.4. Test Results	34

9. Antenna Requirement	41
9.1. Standard Requirement	41
9.2. Antenna Connected Construction	41
9.3. Results	41
10. Test setup photo	42
10.1. Photos of Radiated emission	42
10.2. Photos of Conducted Emission test	43
11. Photos of EUT	44

TEST REPORT DECLARATION

Applicant : Gallant Precision Machining Co., Ltd.
Address : No.5-1, Innovation 1st Rd., Science-Based Industrial Park, HsinChu, Taiwan
Manufacturer : Gallant Precision Machining Co., Ltd.
Address : No.5-1, Innovation 1st Rd., Science-Based Industrial Park, HsinChu, Taiwan
EUT Description : Intelligent Diagnosis & Wi-Fi Control Module
(A) Model No. : G01-CWF01
(B) Trademark : GPM IDMS

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Lucas Pang
Project Engineer



Approved by (name + signature).....:

Simple Guan
Project Manager



Date of issue.....

September 23, 2019

Revision History

Revision	Issue Date	Revisions	Revised By
V0	September 23, 2019	Initial released Issue	Simple Guan

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Conducted Emission	FCC PART 15	15.207	P
6dB Bandwidth	FCC PART 15	15.247 (a)(2)	P
Output Power	FCC PART 15	15.247 (b)(3)	P
Radiated Spurious Emission	FCC PART 15	15.247 (c)	P
Conducted Spurious & Band Edge Emission	FCC PART 15	15.247 (d)	P
Power Spectral Density	FCC PART 15	15.247 (e)	P
Radiated Band Edge Emission	FCC PART 15	15.205	P
Antenna Requirement	FCC PART 15	15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.			

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: Intelligent Diagnosis & Wi-Fi Control Module
Model Number	: G01-CWF01
Diff	: N/A
Trademark	: GPM IDMS
Test Voltage	: DC 5V from adapter.
Operation frequency	: 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20, 2422MHz~2452MHz for IEEE802.11n/HT40
Channel No.	: 802.11b/802.11g /802.11n(HT20): 11 802.11(HT40): 7
Modulation type	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	: External antenna, Maximum Gain is 3.0dBi
Software version	: V1.0
Hardware version	: V1.0
Note	: N/A


2.2.Accessories of Device (EUT)

Accessories1 : /
Manufacturer : /
Model : /
Power supply : /

2.3.Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1	Notebook	ACER	ZQT	N/A	DOC
2	Adapter	MW	SGA18U05	N/A	N/A

2.4.Block Diagram of connection between EUT and simulators



2.5.Test Mode Description

Duty cycle :100%Keeping TX			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20 with 2.4G	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40 with 2.4G	13	Low :CH3	2422
	13	Middle: CH6	2437
	13	High: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate. so those data rate were used for all test.			

Channel list:					
For IEEE 802.11b, g, n/HT20 and IEEE 802.11 n/HT40 with 2.4G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

Setting output power (Max)			
802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
20dBm	20dBm	20dBm	20dBm

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	27℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 25, 2017 Certificated by IC

Registration Number: 12135A

2.8.Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9.Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	2018.09.21	1 Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2018.09.21	1 Year
Receiver	R&S	ESCI	1166.5950K03-1011	2018.09.21	1 Year
Receiver	R&S	ESCI	101202	2018.09.21	1 Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2018.04.13	2 Year
Horn Antenna	EMCO	3115	640201028-06	2018.04.13	2 Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2018.04.13	2 Year
Cable	Resenberger	N/A	No.1	2018.09.21	1 Year
Cable	SCHWARZBECK	N/A	No.2	2018.09.21	1 Year
Cable	SCHWARZBECK	N/A	No.3	2018.09.21	1 Year
Pre-amplifier	Schwarzbeck	BBV9743	9743-019	2018.09.21	1 Year
Pre-amplifier	R&S	AFS33-1800265 0-30-8P-44	SEL0080	2018.09.21	1 Year
Temperature controller	Terchy	MHQ	120	2018.09.21	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2018.09.21	1 Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2018.09.21	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2018.09.21	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170294	2018.04.13	2 Year
Power Meter	Anritsu	ML2487A	6K00001491	2018.09.21	1 Year

3. SPURIOUS EMISSION

3.1. Test Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:

- The tighter limit applies at the band edges.
- Emission Level(dB uV/m)=20log Emission Level(Uv/m)

3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation


The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured


If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


3.3. Test Setup

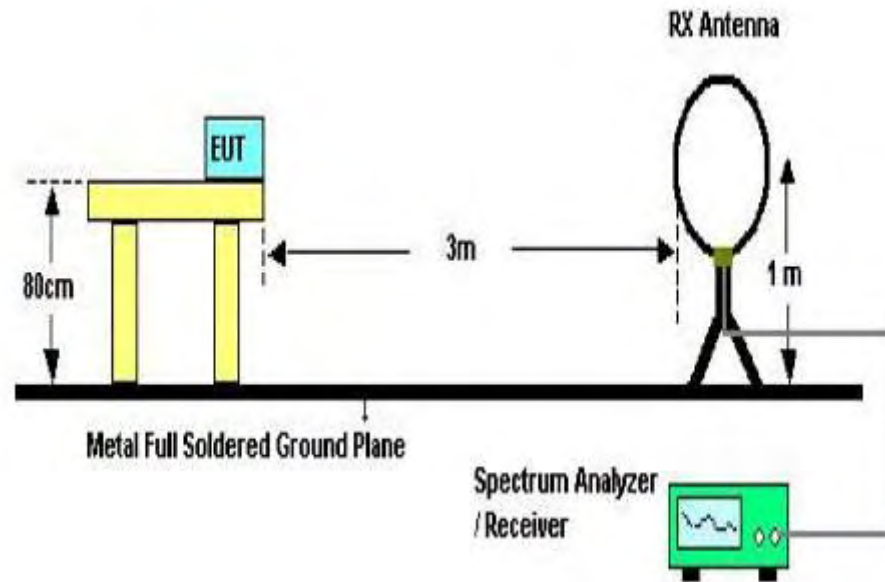

Below 30MHz Test Setup

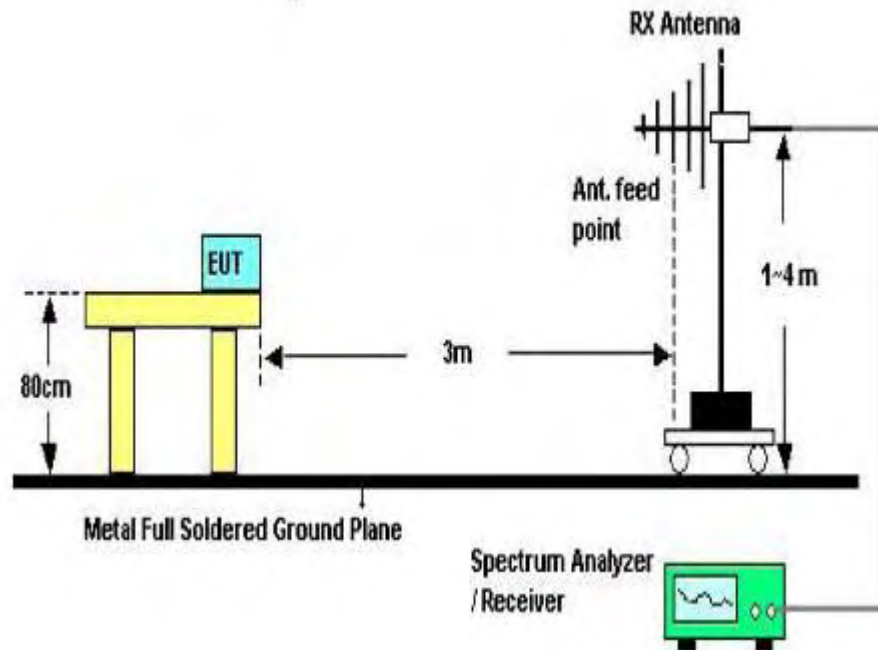

Above 30MHz Test Setup

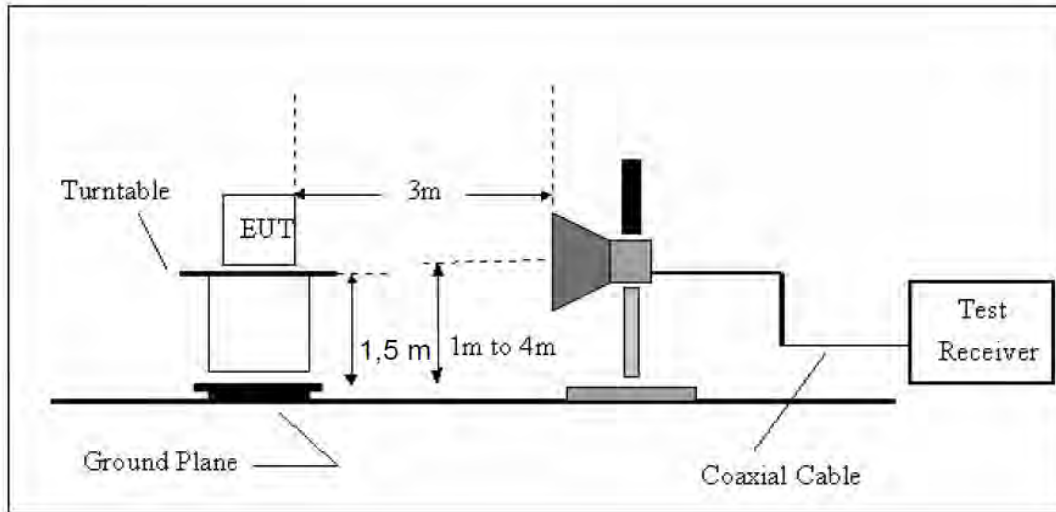

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the 10th harmonic from 9 kHz to the EUT.


Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note:1.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2.Only show the test data of the worst Channel in this report.

Test result for 802.11 b (Low Channel), AC 120V/ 60Hz
Vertical

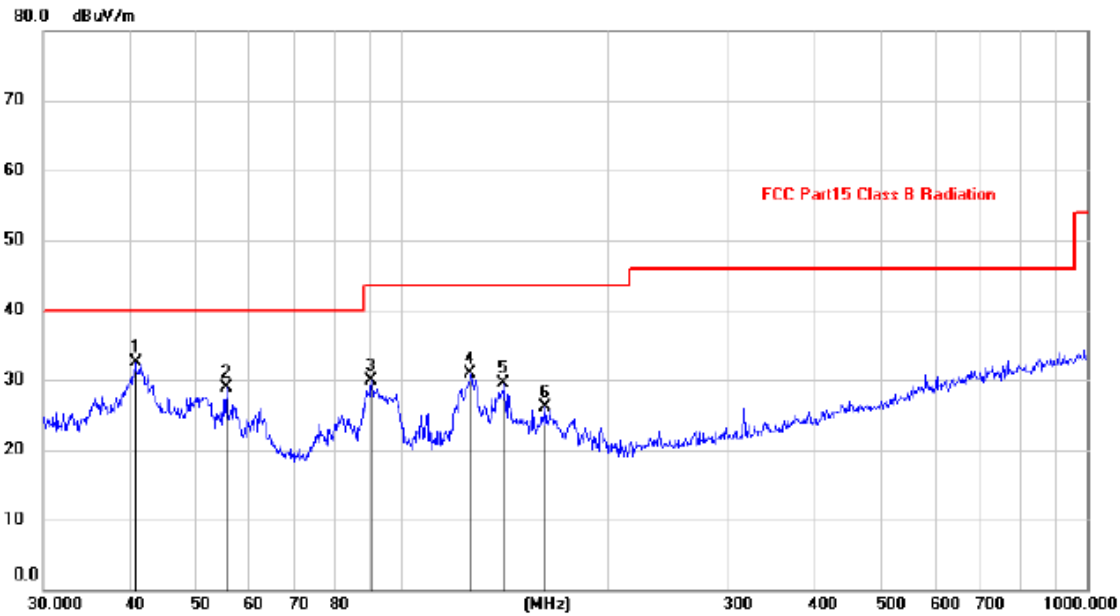


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	40.9880	18.46	14.11	32.57	40.00	-7.43	peak		
2		55.4147	15.57	13.24	28.81	40.00	-11.19	peak		
3		90.2205	20.04	9.81	29.85	43.50	-13.65	peak		
4		126.3285	17.95	13.00	30.95	43.50	-12.55	peak		
5		141.3296	15.63	13.93	29.56	43.50	-13.94	peak		
6		162.6105	11.83	14.37	26.20	43.50	-17.30	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal

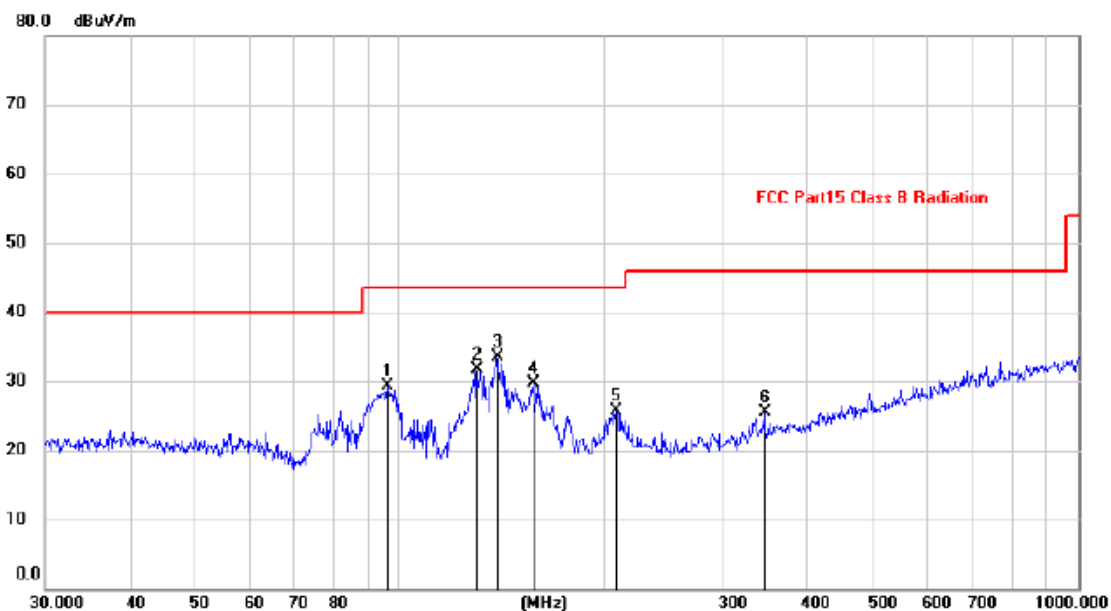

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Test Mode: IEEE 802.11b TX Low (worst case)									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	42.50	V	33.98	10.22	34.25	52.45	74	21.55	PK
4824	32.49	V	33.98	10.22	34.25	42.44	54	11.56	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	42.18	H	33.98	10.22	34.25	52.13	74	21.87	PK
4824	31.64	H	33.98	10.22	34.25	41.59	54	12.41	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX Mid									
4874	42.05	V	33.98	10.22	34.25	52.00	74	22.00	PK
4874	32.43	V	33.98	10.22	34.25	42.38	54	11.62	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	42.23	H	33.98	10.22	34.25	52.18	74	21.82	PK
4874	31.91	H	33.98	10.22	34.25	41.86	54	12.14	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX High									
4924	41.91	V	33.98	10.22	34.25	51.86	74	22.14	PK
4924	32.25	V	33.98	10.22	34.25	42.20	54	11.80	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	42.67	H	33.98	10.22	34.25	52.62	74	21.38	PK
4924	32.26	H	33.98	10.22	34.25	42.21	54	11.79	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/

Note:

- 1, Result = Read level + Antenna factor + cable loss-Amp factor
- 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: IEEE 802.11g TX Low (worst case)									
Freq (MHz)	Read Level (dBUV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
4824	42.71	V	33.98	10.22	34.25	52.66	74	21.34	PK
4824	32.27	V	33.98	10.22	34.25	42.22	54	11.78	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	42.04	H	33.98	10.22	34.25	51.99	74	22.01	PK
4824	32.04	H	33.98	10.22	34.25	41.99	54	12.01	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11g TX Mid									
4874	42.47	V	33.98	10.22	34.25	52.42	74	21.58	PK
4874	32.25	V	33.98	10.22	34.25	42.20	54	11.80	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	42.70	H	33.98	10.22	34.25	52.65	74	21.35	PK
4874	31.65	H	33.98	10.22	34.25	41.60	54	12.40	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11g TX High									
4924	42.08	V	33.98	10.22	34.25	52.03	74	21.97	PK
4924	32.19	V	33.98	10.22	34.25	42.14	54	11.86	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	42.86	H	33.98	10.22	34.25	52.81	74	21.19	PK
4924	32.04	H	33.98	10.22	34.25	41.99	54	12.01	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Note:

$$1, \text{ Result} = \text{Read level} + \text{Antenna factor} + \text{cable loss-Amp factor}$$

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: IEEE 802.11n HT40 TX Low (worst case)									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844	41.99	V	33.98	10.22	34.25	51.94	74	22.06	PK
4844	32.21	V	33.98	10.22	34.25	42.16	54	11.84	AV
7266	/	/	/	/	/	/	/	/	/
9688	/	/	/	/	/	/	/	/	/
4844	42.10	H	33.98	10.22	34.25	52.05	74	21.95	PK
4844	31.61	H	33.98	10.22	34.25	41.56	54	12.44	AV
7266	/	/	/	/	/	/	/	/	/
9688	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT40 TX Mid									
4874	41.85	V	33.98	10.22	34.25	51.80	74	22.20	PK
4874	32.36	V	33.98	10.22	34.25	42.31	54	11.69	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	42.08	H	33.98	10.22	34.25	52.03	74	21.97	PK
4874	31.76	H	33.98	10.22	34.25	41.71	54	12.29	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT40 TX High									
4904	42.15	V	33.98	10.22	34.25	52.10	74	21.90	PK
4904	33.04	V	33.98	10.22	34.25	42.99	54	11.01	AV
7356	/	/	/	/	/	/	/	/	/
9808	/	/	/	/	/	/	/	/	/
4904	42.80	H	33.98	10.22	34.25	52.75	74	21.25	PK
4904	31.59	H	33.98	10.22	34.25	41.54	54	12.46	AV
7356	/	/	/	/	/	/	/	/	/
9808	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Note: All models have been tested to reflect the data of the worst models.

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


Notes: 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.


4.3. Test Setup

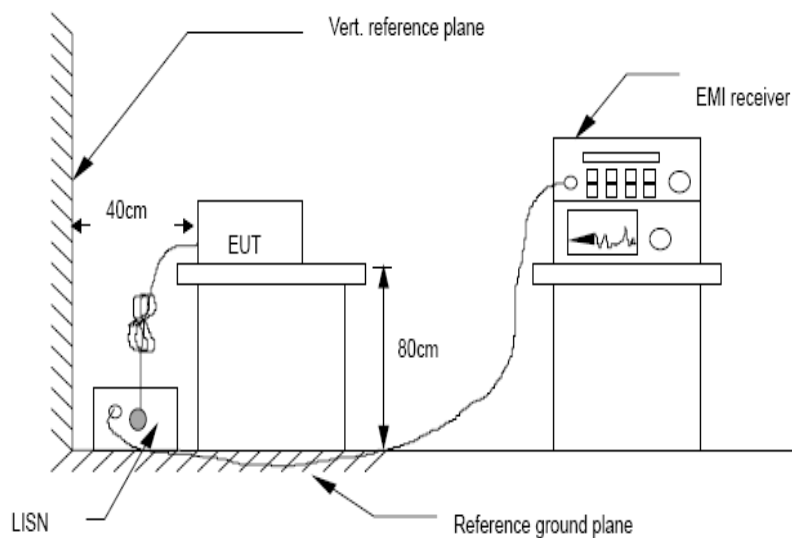

4.4. Test Results


Test result for 802.11b (Low Channel), AC 120V/ 60Hz

Line:

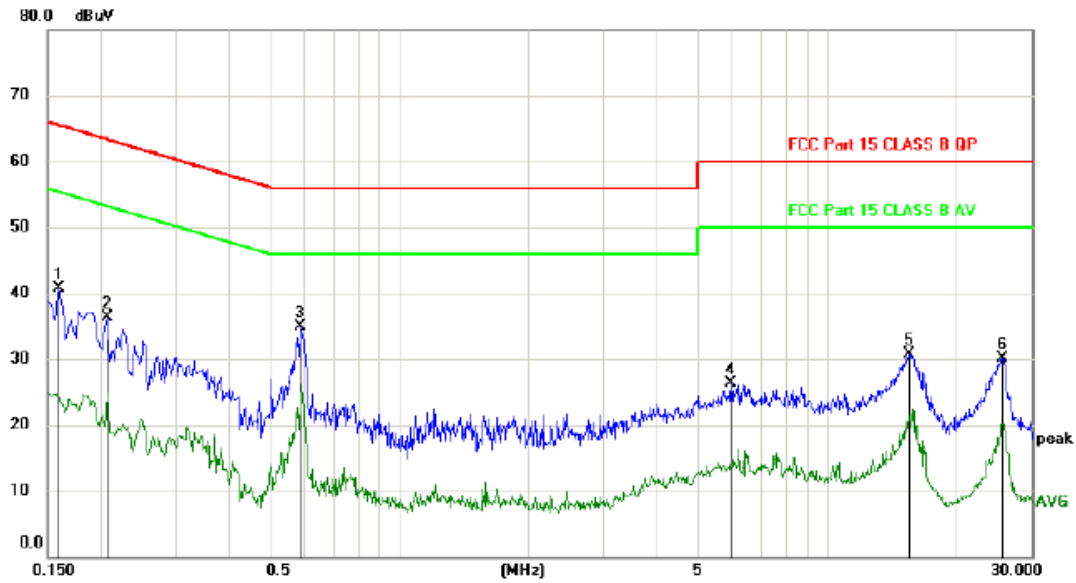

No. Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Margin dB	Detector	Comment
1	0.1590	31.13	9.63	40.76	65.52	-24.76	peak	
2	0.2070	26.74	9.64	36.38	63.32	-26.94	peak	
3 *	0.5880	25.25	9.69	34.94	56.00	-21.06	peak	
4	5.9430	16.21	10.11	26.32	60.00	-33.68	peak	
5	15.5160	20.59	10.18	30.77	60.00	-29.23	peak	
6	25.6560	19.76	10.34	30.10	60.00	-29.90	peak	

Neutral:

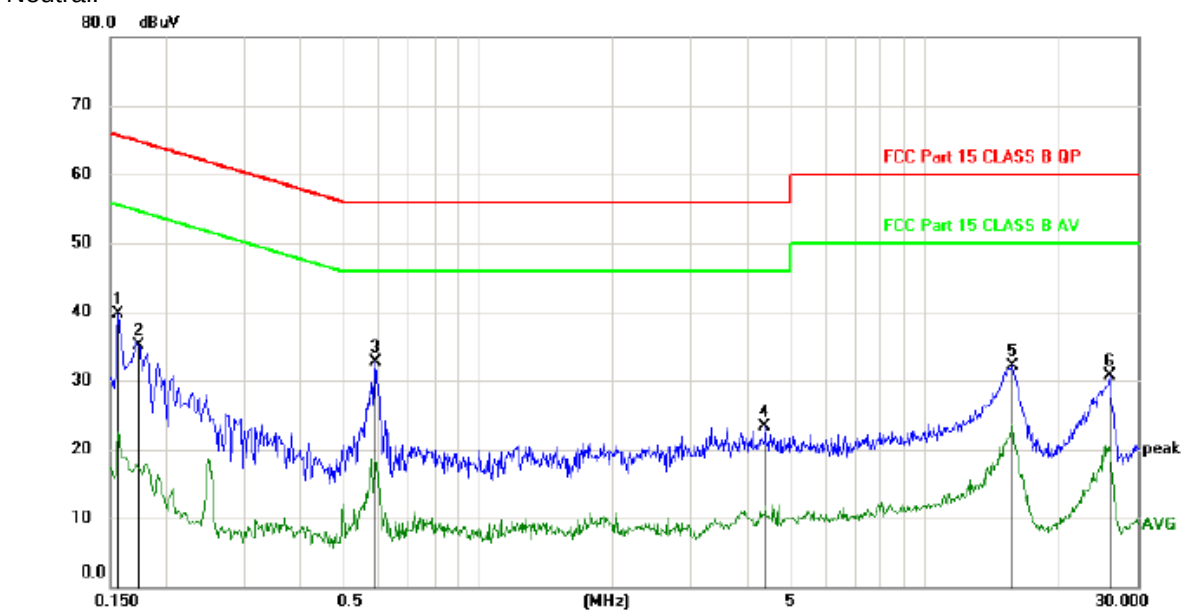

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1560	30.13	9.63	39.76	65.67	-25.91	peak	
2		0.1731	25.48	9.63	35.11	64.81	-29.70	peak	
3	*	0.5910	22.97	9.69	32.66	56.00	-23.34	peak	
4		4.3980	13.32	10.03	23.35	56.00	-32.65	peak	
5		15.7380	21.98	10.18	32.16	60.00	-27.84	peak	
6		25.9200	20.28	10.35	30.63	60.00	-29.37	peak	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All models have been tested to reflect the data of the worst models.

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer section 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)

5.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r01


5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Connected the EUT's antenna port to peak power meter by 20dB attenuator.

5.2.3 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results

PASS

Detailed information please see the following page.

Mode	Frequency (MHz)	PK Output power(dBm)	Limit (dBm)	Result
IEEE 802.11 b	CH1: 2412	16.915	30	PASS
	CH6: 2437	17.734	30	PASS
	CH11: 2462	17.581	30	PASS
IEEE 802.11 g	CH1: 2412	14.813	30	PASS
	CH6: 2437	15.455	30	PASS
	CH11: 2462	15.152	30	PASS
IEEE 802.11 n/HT20	CH1: 2412	14.869	30	PASS
	CH6: 2437	15.230	30	PASS
	CH11: 2462	14.938	30	PASS
IEEE 802.11 n/HT40	CH3: 2422	14.478	30	PASS
	CH6: 2437	14.487	30	PASS
	CH9: 2452	14.656	30	PASS

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer section 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r01

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as $RBW = 3\text{kHz}$ (Set the RBW to: $3\text{ kHz} \leq RBW \leq 100\text{ kHz}$), $VBW = 10\text{kHz}$ (Set the $VBW \geq 3 \times RBW$), $\text{span} = 1.5 \times \text{DTS bandwidth}$, detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

6.3. Test Setup




6.4. Test Results

Mode	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)	Result
IEEE 802.11 b	Lowest	-6.295	8	PASS
	Middle	-5.363	8	PASS
	Highest	-5.637	8	PASS
IEEE 802.11 g	Lowest	-12.564	8	PASS
	Middle	-11.264	8	PASS
	Highest	-12.155	8	PASS
IEEE 802.11 n/HT20	Lowest	-12.618	8	PASS
	Middle	-12.099	8	PASS
	Highest	-12.382	8	PASS
IEEE 802.11 n/HT40	Lowest	-15.823	8	PASS
	Middle	-14.015	8	PASS
	Highest	-15.308	8	PASS


802.11b




802.11g

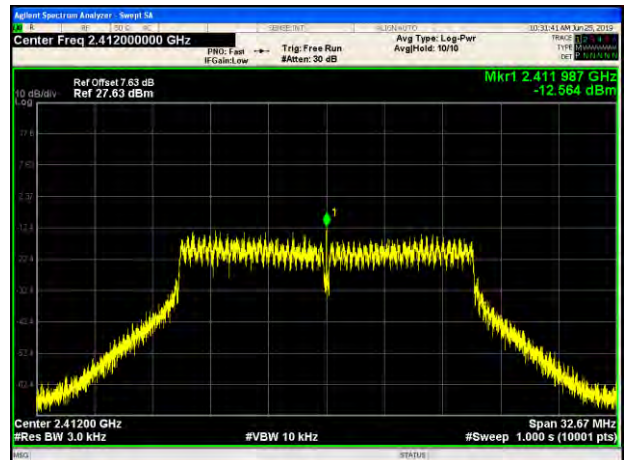

Lowest channel

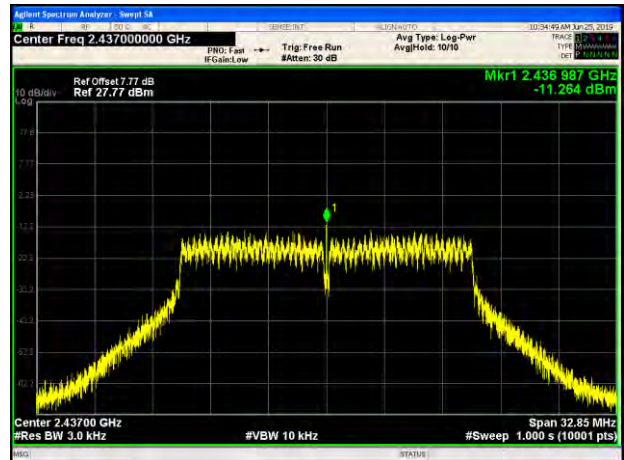


Middle channel

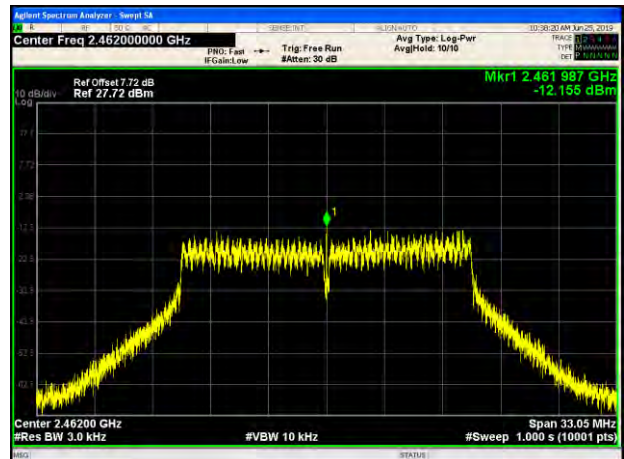


Highest channel



802.11n(HT20)

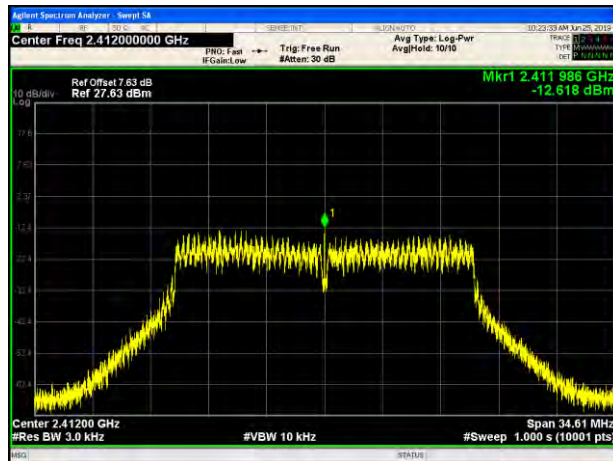


802.11n(HT40)

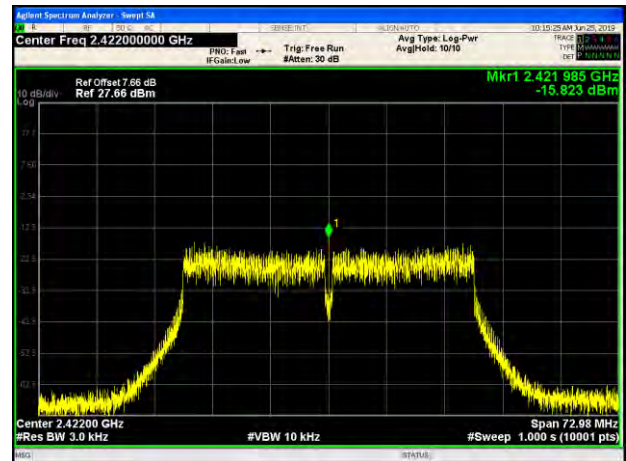

Lowest channel

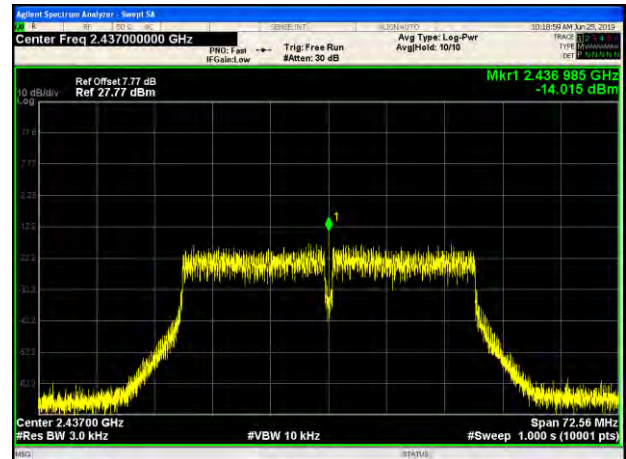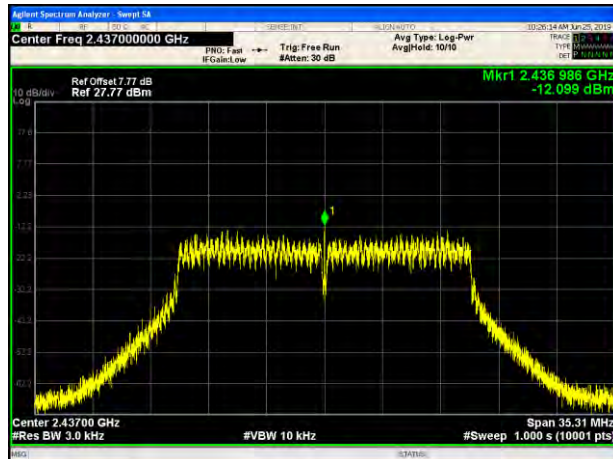

Middle channel

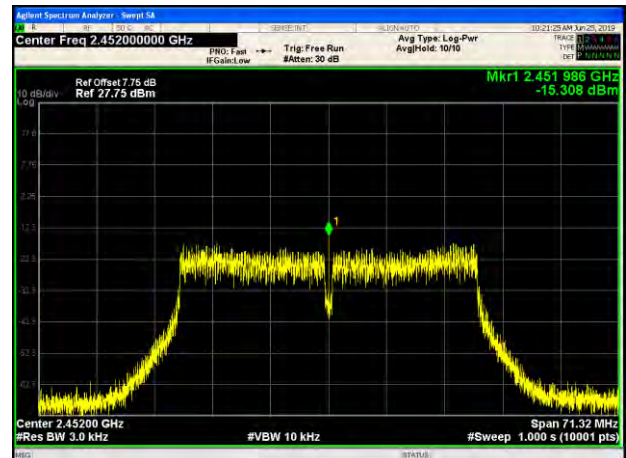

Highest channel

7. BANDWIDTH

7.1. Test limits

Please refer section 15.2.4.7


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r01

- a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set RBW = 100kHz, VBW $\geq 3 \times$ RBW = 300kHz, Peak Detector, Sweep time set auto, detail see the test plot.

7.3. Test Setup




7.4. Test Results

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
802.11b	2412	Ant 1	15.1289	9.4619	0.5	Pass
802.11b	2437	Ant 1	15.166	10.0114	0.5	Pass
802.11b	2462	Ant 1	15.2376	11.12	0.5	Pass
802.11g	2412	Ant 1	16.4774	16.3339	0.5	Pass
802.11g	2437	Ant 1	16.4366	16.4251	0.5	Pass
802.11g	2462	Ant 1	16.4717	16.5231	0.5	Pass
802.11n(HT20)	2412	Ant 1	17.6698	17.3038	0.5	Pass
802.11n(HT20)	2437	Ant 1	17.6661	17.6567	0.5	Pass
802.11n(HT20)	2462	Ant 1	17.6687	17.5247	0.5	Pass
802.11n(HT40)	2422	Ant 1	36.2618	36.4907	0.5	Pass
802.11n(HT40)	2437	Ant 1	36.1682	36.281	0.5	Pass
802.11n(HT40)	2452	Ant 1	36.2547	35.6615	0.5	Pass

IEEE 802.11b:




IEEE 802.11g:

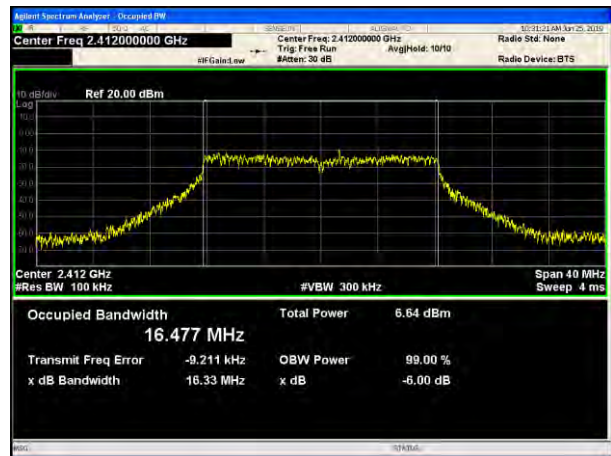

Lowest channel




Middle channel

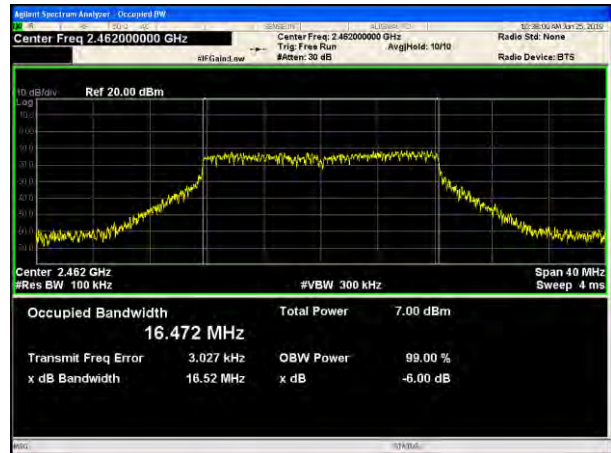


Highest channel



IEEE 802.11n/HT20

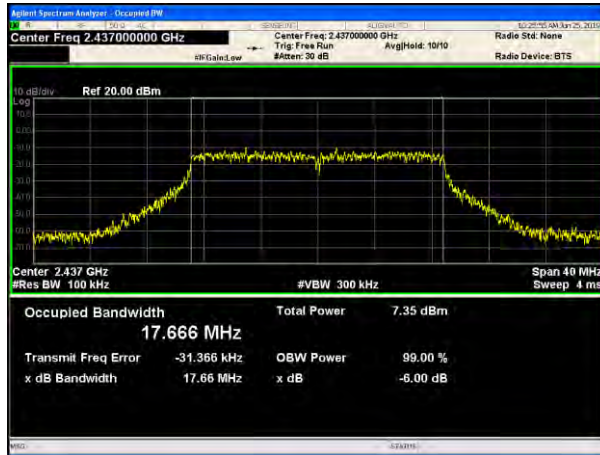


IEEE 802.11n/HT40

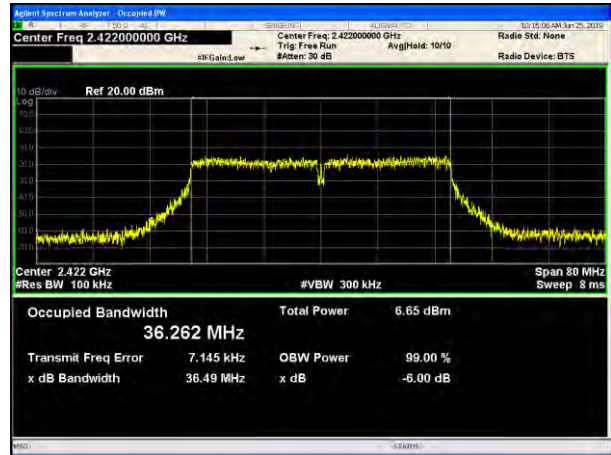

Lowest channel

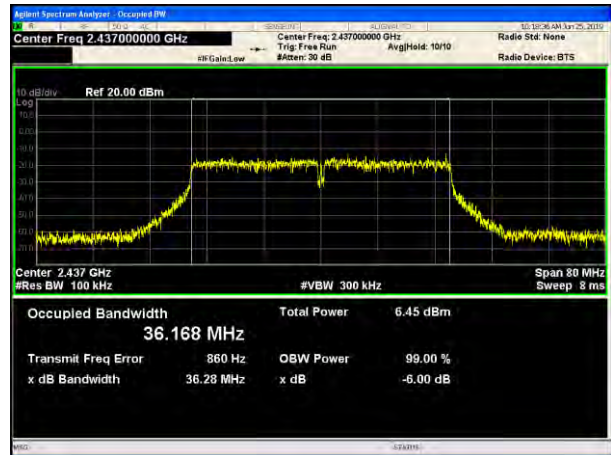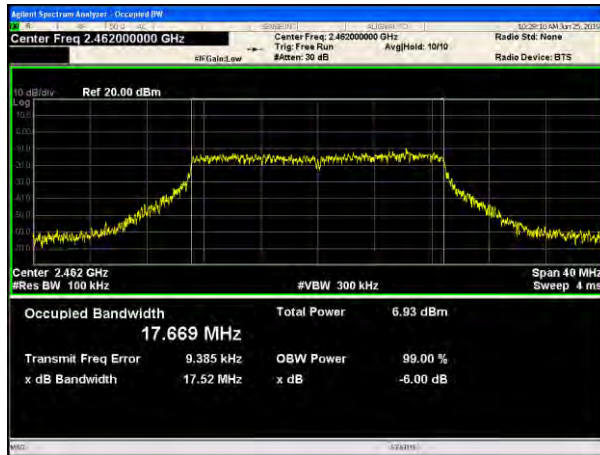

Middle channel

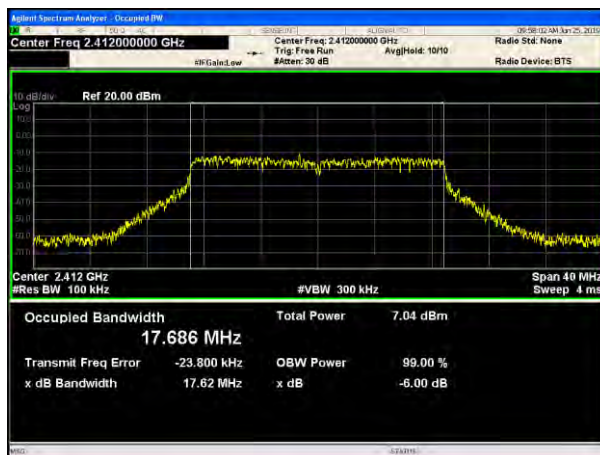

Highest channel

8. BAND EDGE CHECK

8.1. Test limits

Please refer section 15.247

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz and 5725MHz to 5850MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r01

8.2.1 Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz, VBW 3MHz, peak detector for peak value , RBW 1MHz ,VBW 10Hz , RMS detector for AV value.

8.3. Test Setup

Same as 5.2.2.

8.4. Test Results


PASS.

Detailed information please see the following page.

Worst case


Test Mode: IEEE 802.11b-Low

Polarization: Vertical

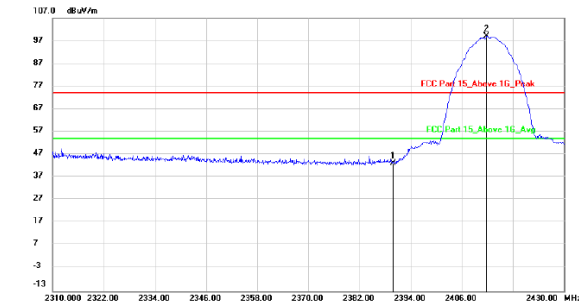

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2390.000	46.70	-3.40	43.30	74.00	-30.70	peak		
2	*	2411.880	102.39	-3.40	98.99	74.00	24.99	peak		


Polarization: Horizontal

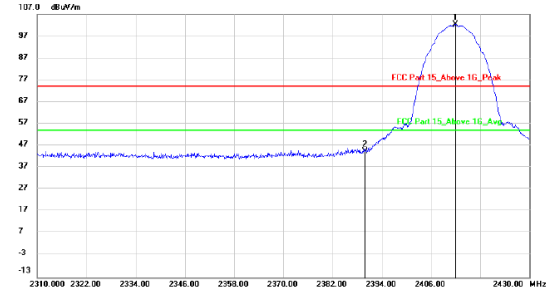

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2412.000	105.82	-3.40	102.42	74.00	28.42	peak		
2	*	2390.000	47.99	-3.40	44.59	74.00	-29.41	peak		


Test Mode: IEEE 802.11b-High

Polarization: Vertical

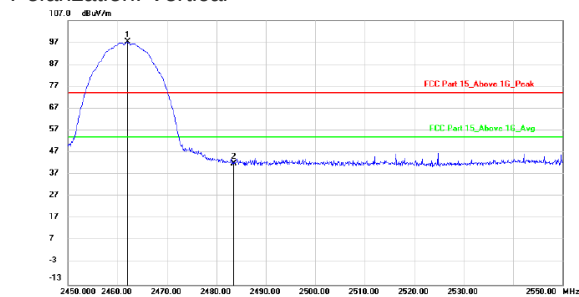

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2462.000	100.52	-3.39	97.13	74.00	23.13	peak		
2	*	2483.500	45.43	-3.38	42.05	74.00	-31.95	peak		

Polarization: Horizontal

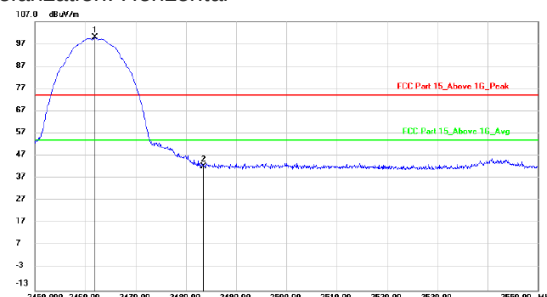


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2461.900	103.23	-3.39	99.84	74.00	25.84	peak		
2	*	2483.500	45.69	-3.38	42.31	74.00	-31.69	peak		


Worst case

Test Mode: IEEE 802.11g-Low

Polarization: Vertical

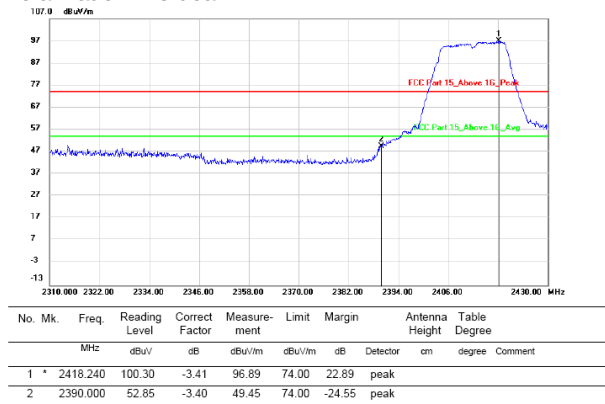


Polarization: Horizontal

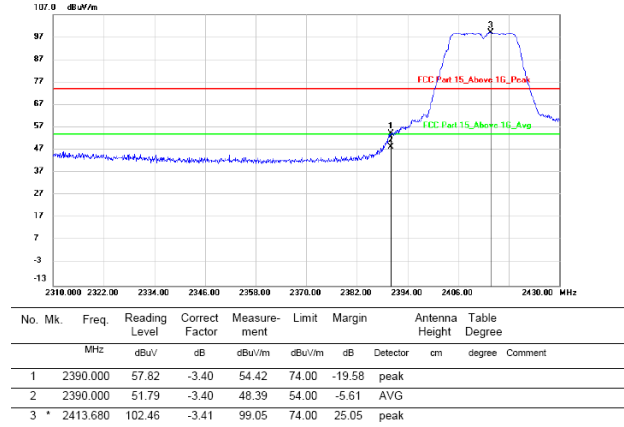


Test Mode: IEEE 802.11g-High


Polarization: Vertical

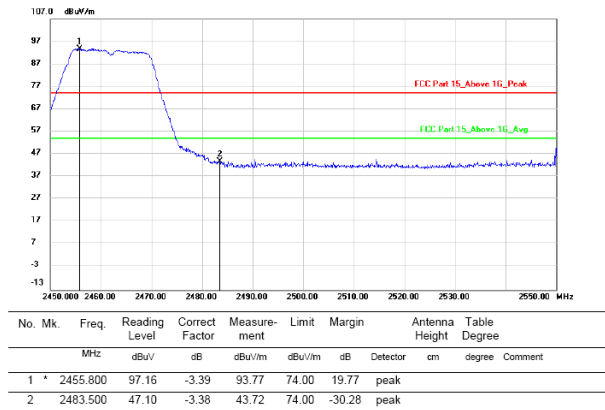


Polarization: Horizontal

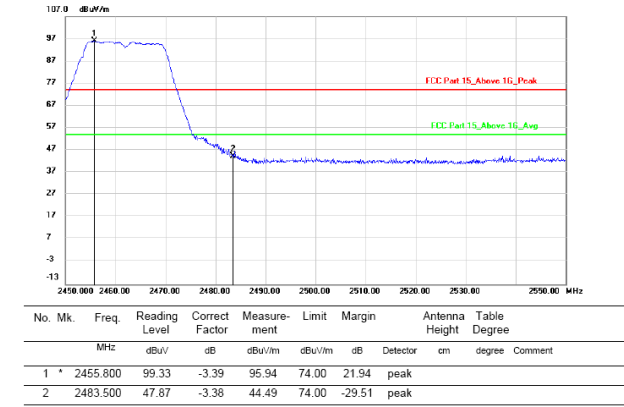


Test Mode: IEEE 802.11n(HT20)-Low
Polarization: Vertical

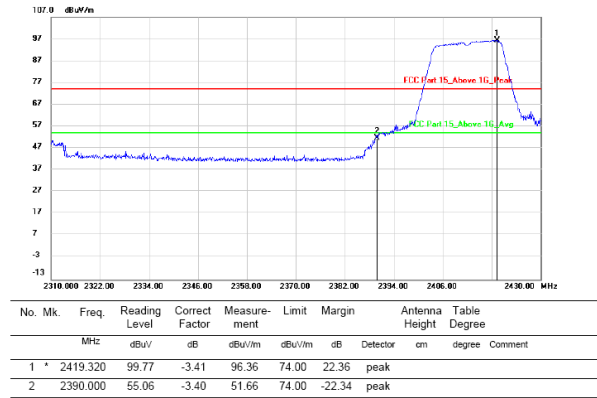


Polarization: Horizontal

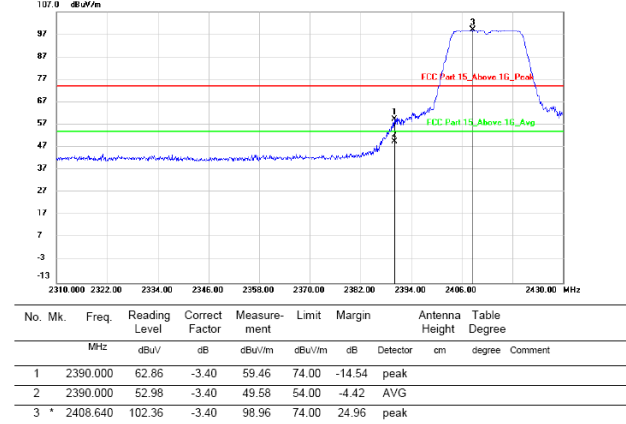

Test Mode: IEEE 802.11n(HT20)-High
Polarization: Vertical

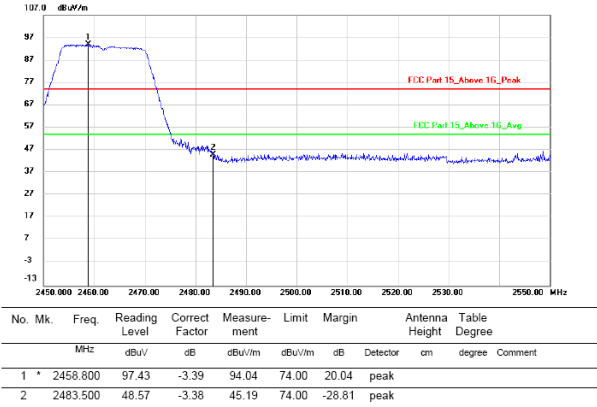


Polarization: Horizontal

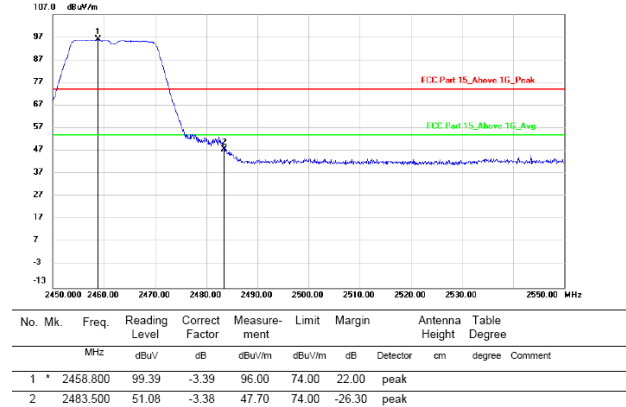


Worst case

Test Mode: IEEE 802.11n(HT40)-Low

Polarization: Vertical

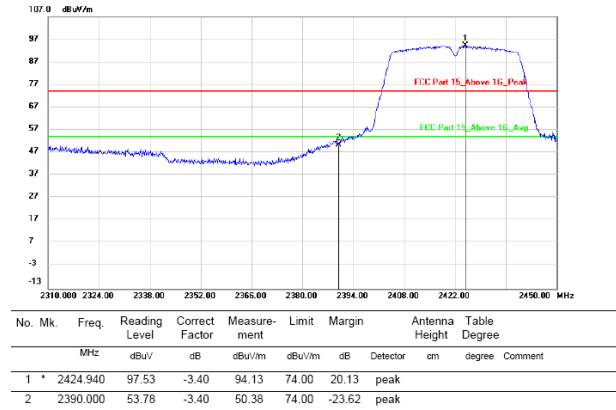


Polarization: Horizontal

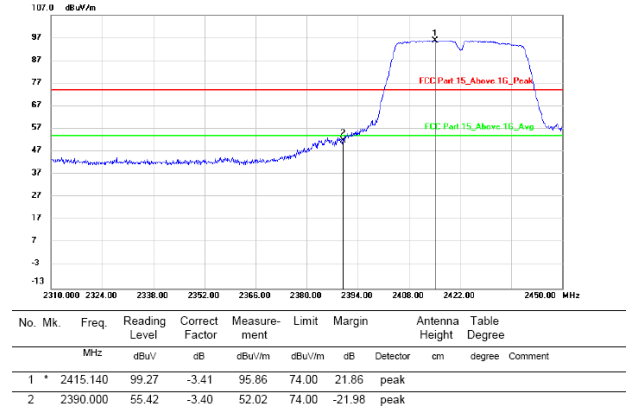


Test Mode: IEEE 802.11n(HT40)-High

Polarization: Vertical

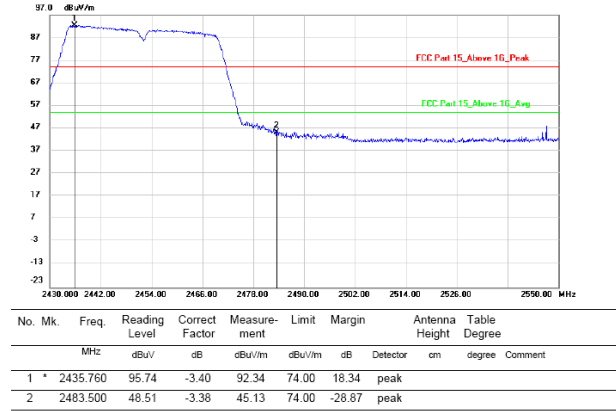

Polarization: Horizontal

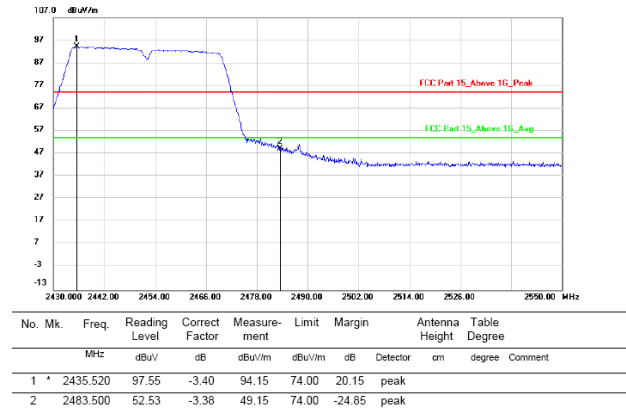


Note: 1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Test mode: 802.11b



Lowest channel

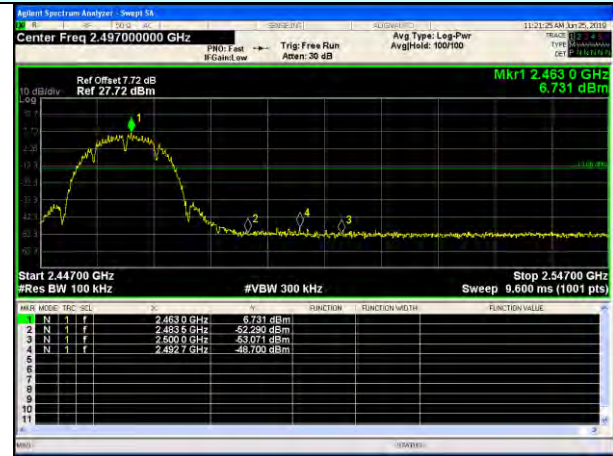

Highest channel

Test mode: 802.11g



Lowest channel




Highest channel

Test mode: 802.11n(HT20)




Lowest channel

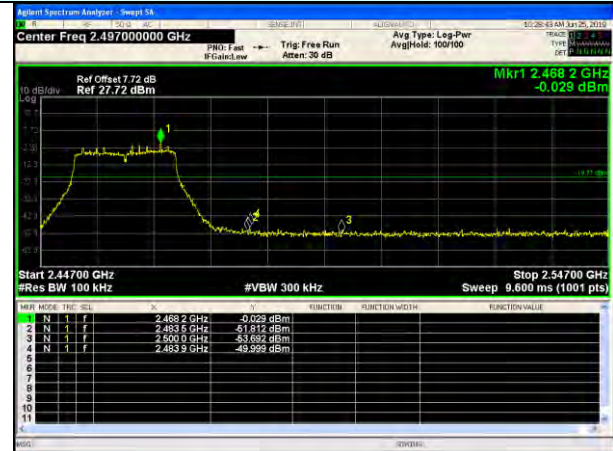

Highest channel

Test mode: 802.11n(HT40)

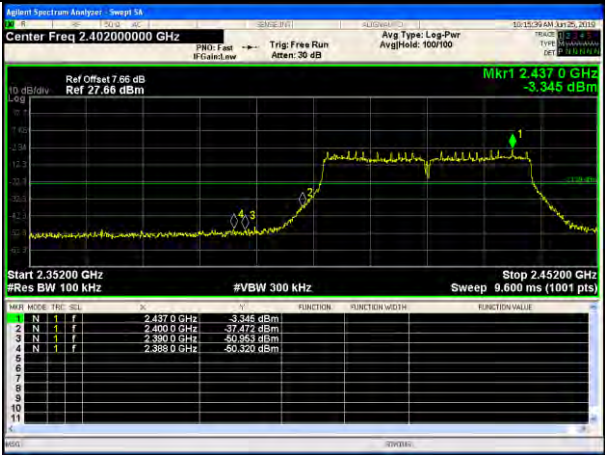

Lowest channel



Highest channel

9. ANTENNA REQUIREMENT

9.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.



9.3. Results

The product has an external antenna. It meets the standard requirements.


Antenna Connector Impedance: 50Ω

10. TEST SETUP PHOTO



10.1. Photos of Radiated emission

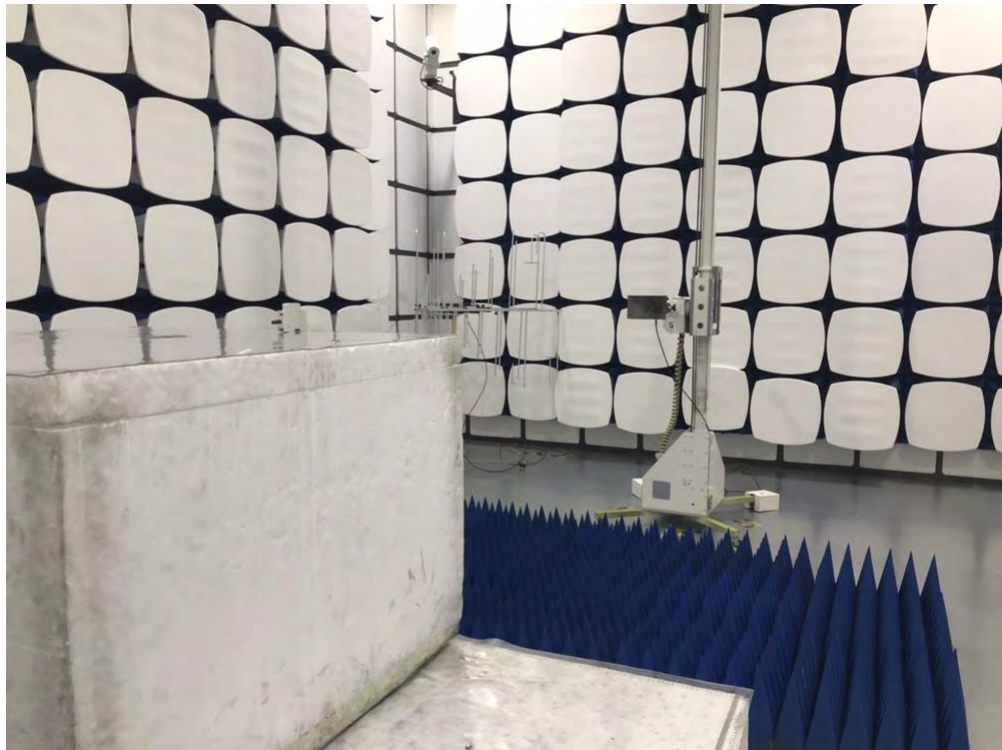
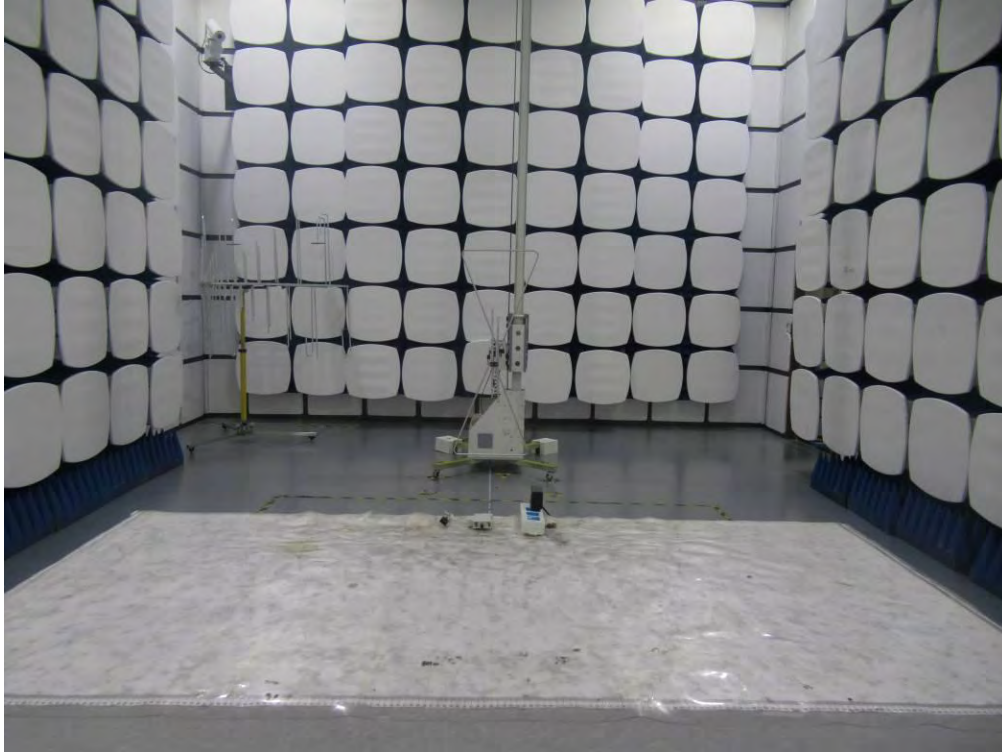




10.2.Photos of Conducted Emission test

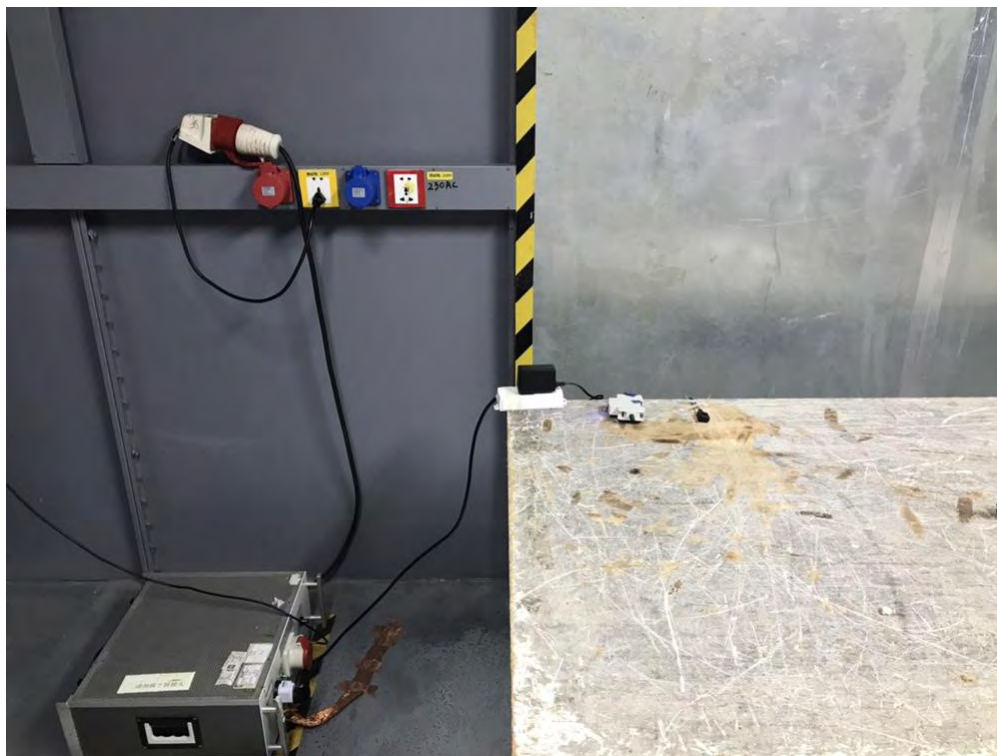




11. PHOTOS OF EUT

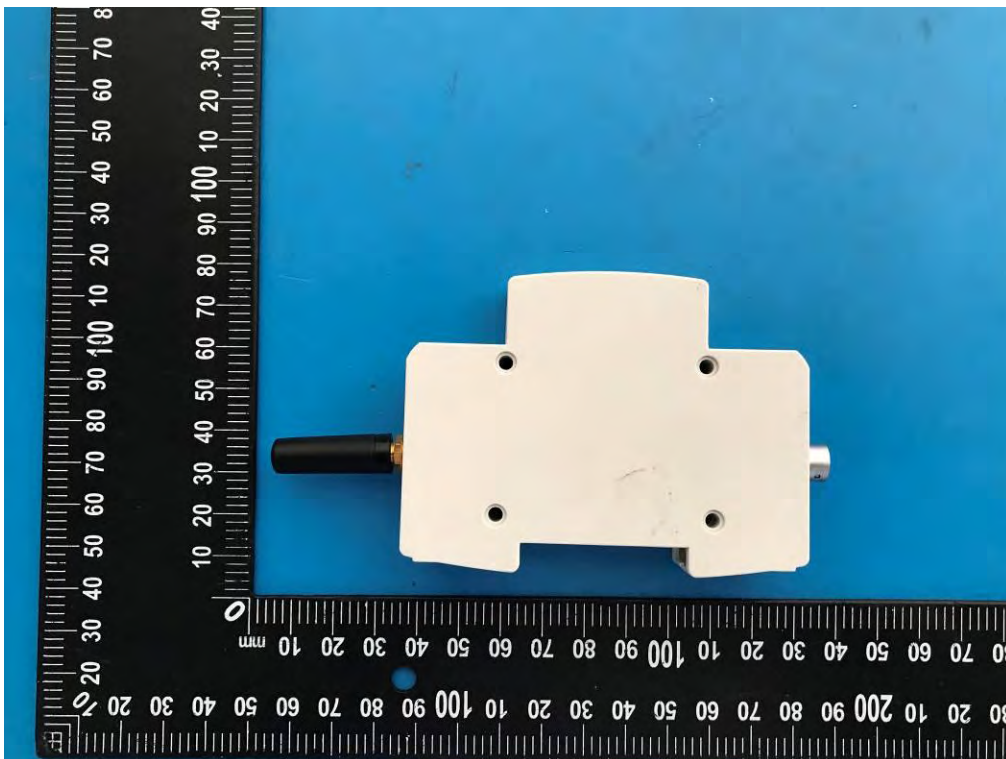
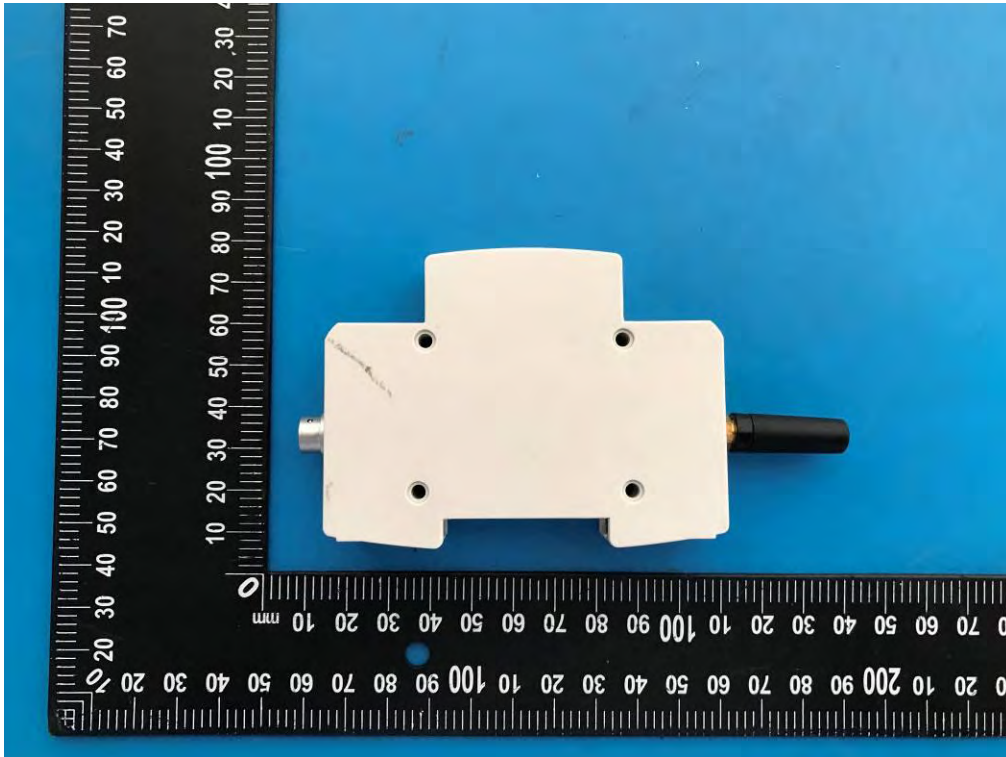


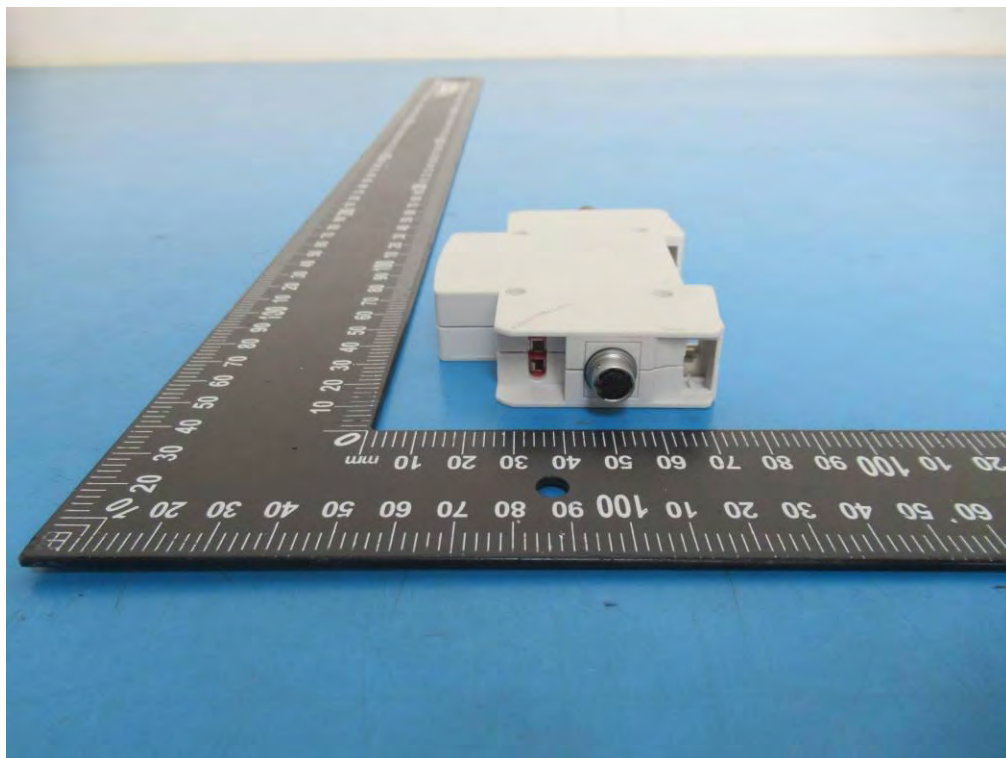
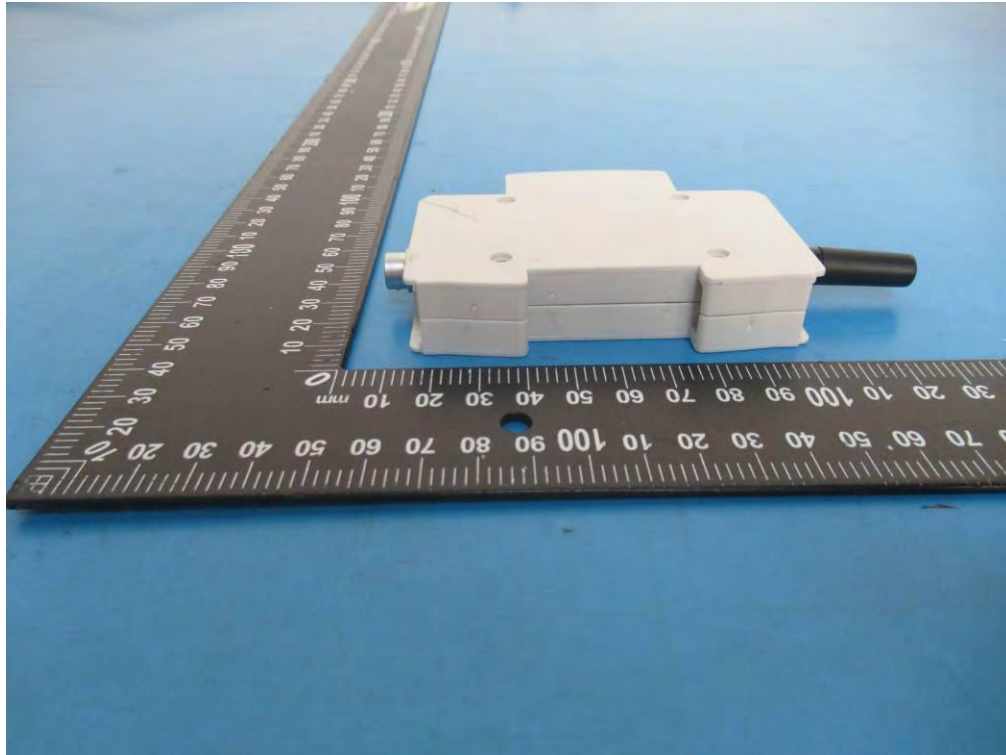


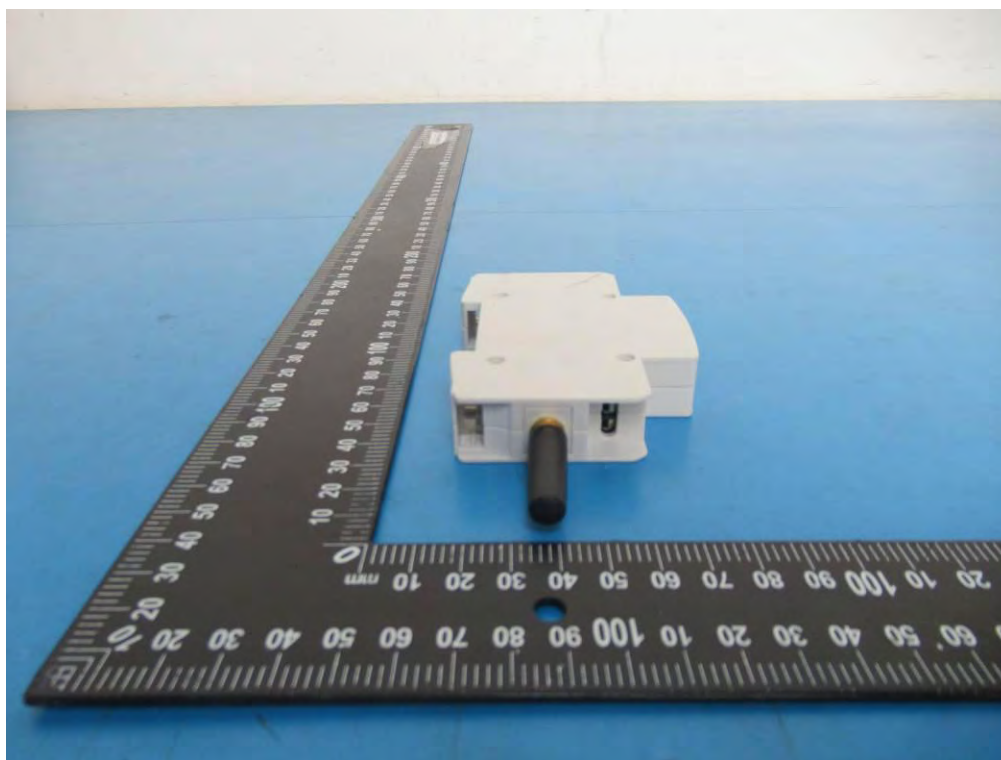
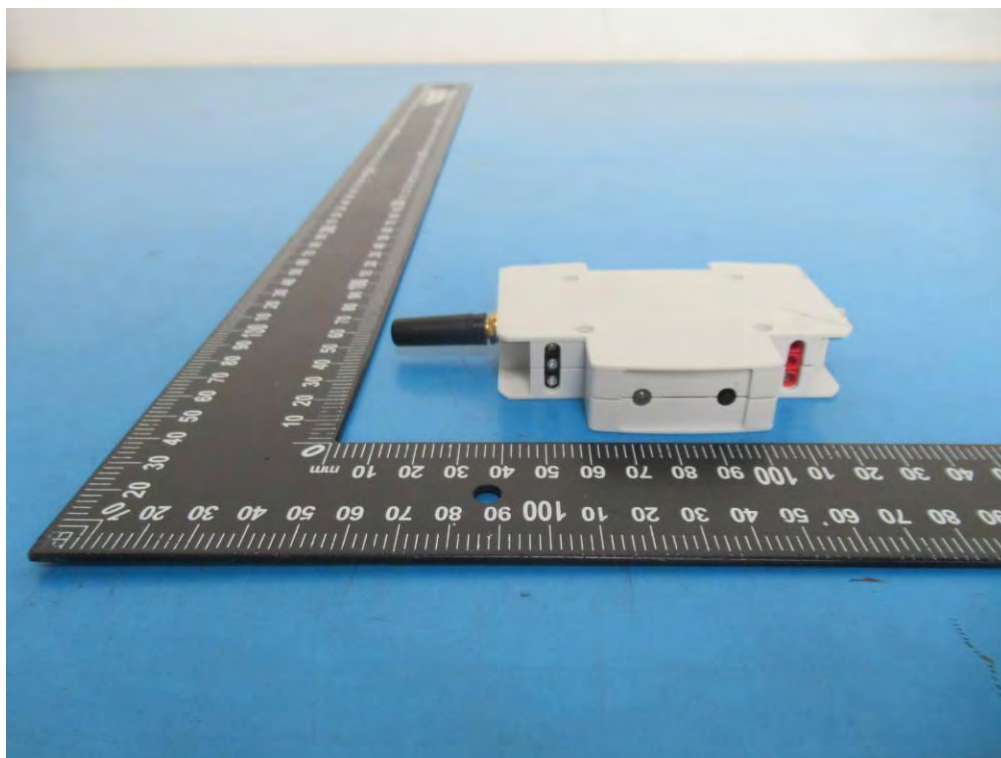



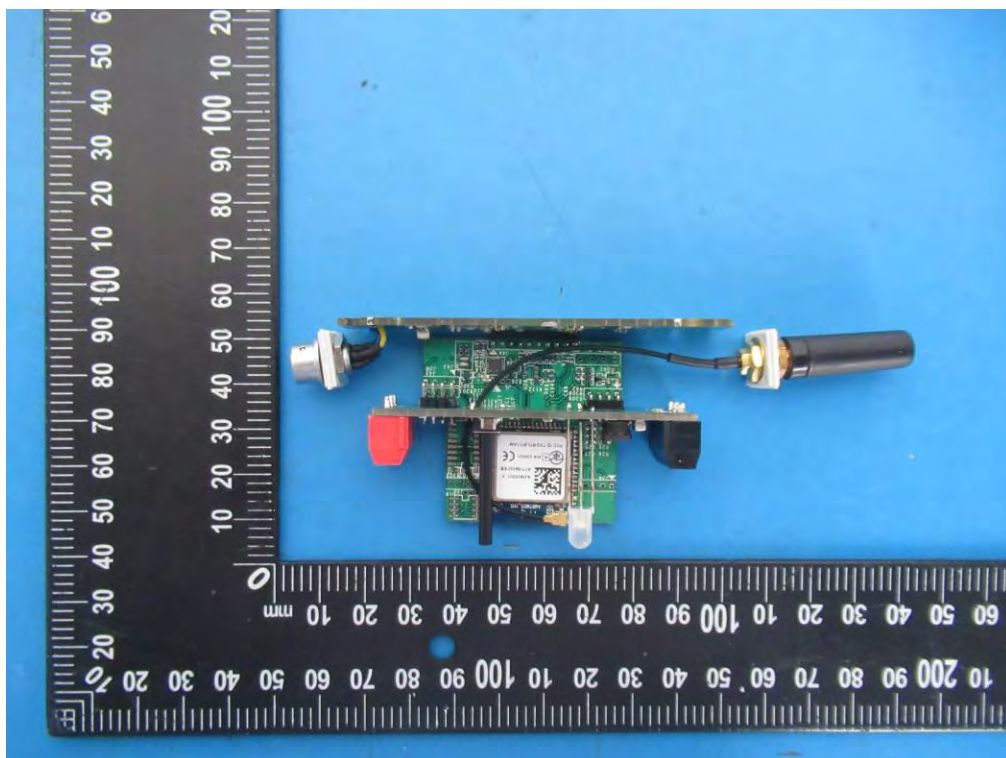


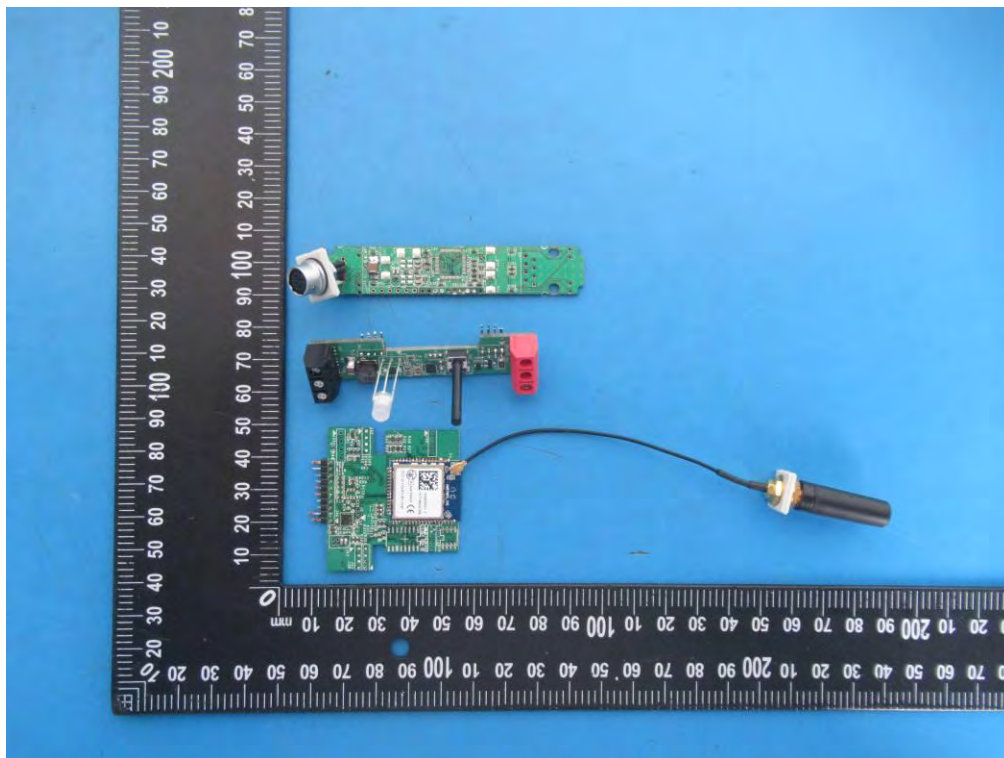
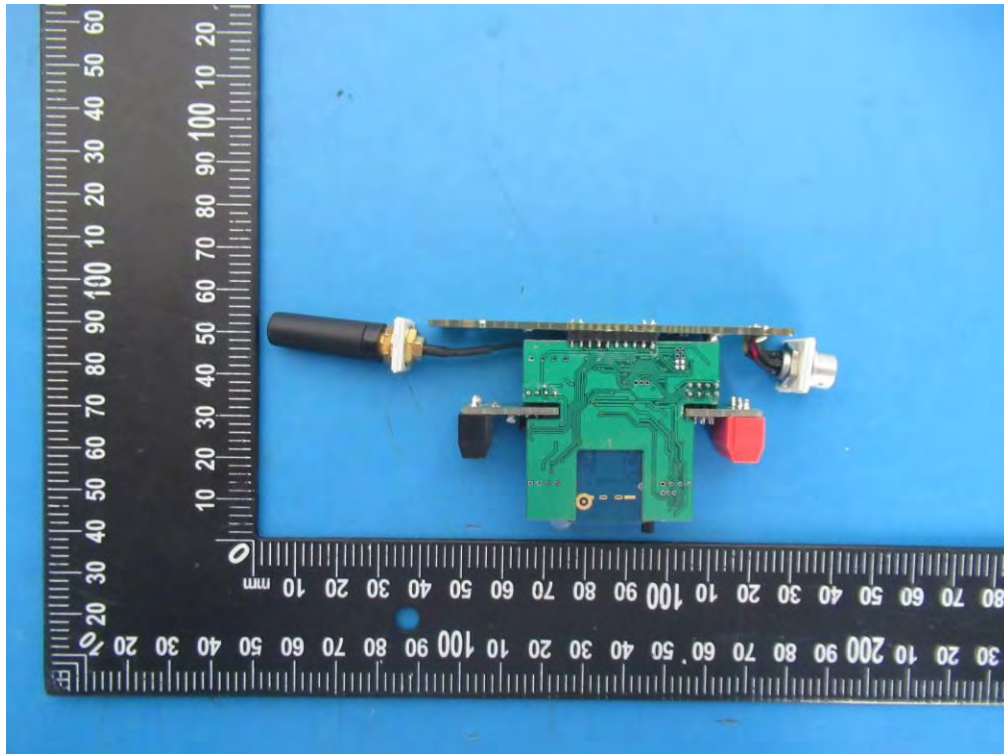


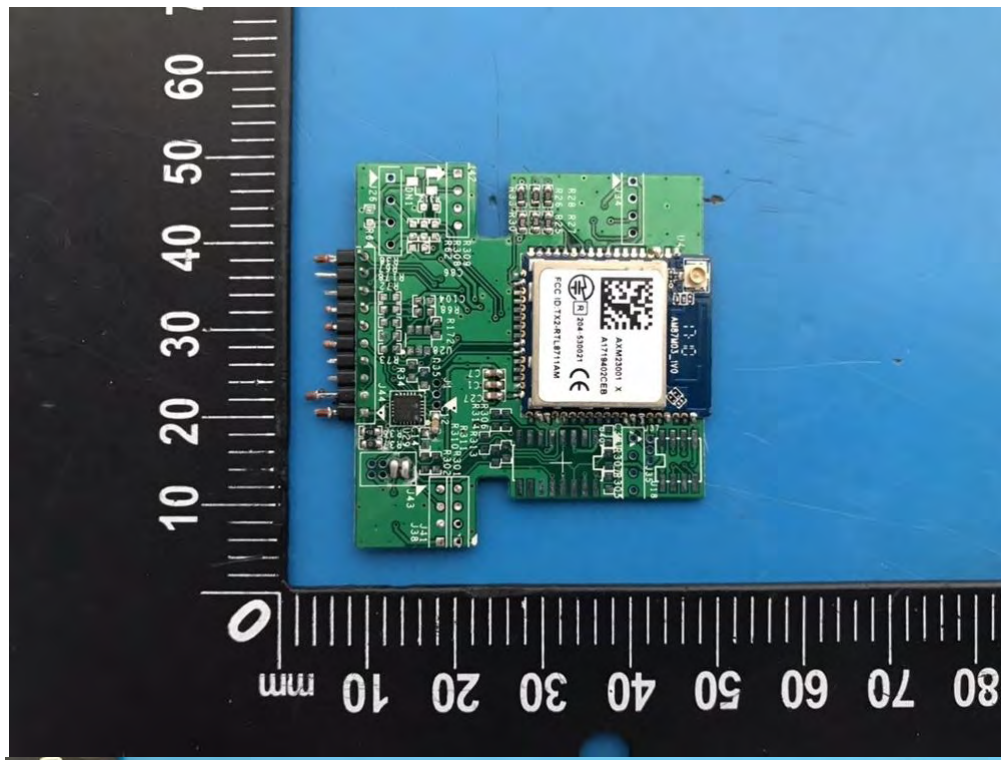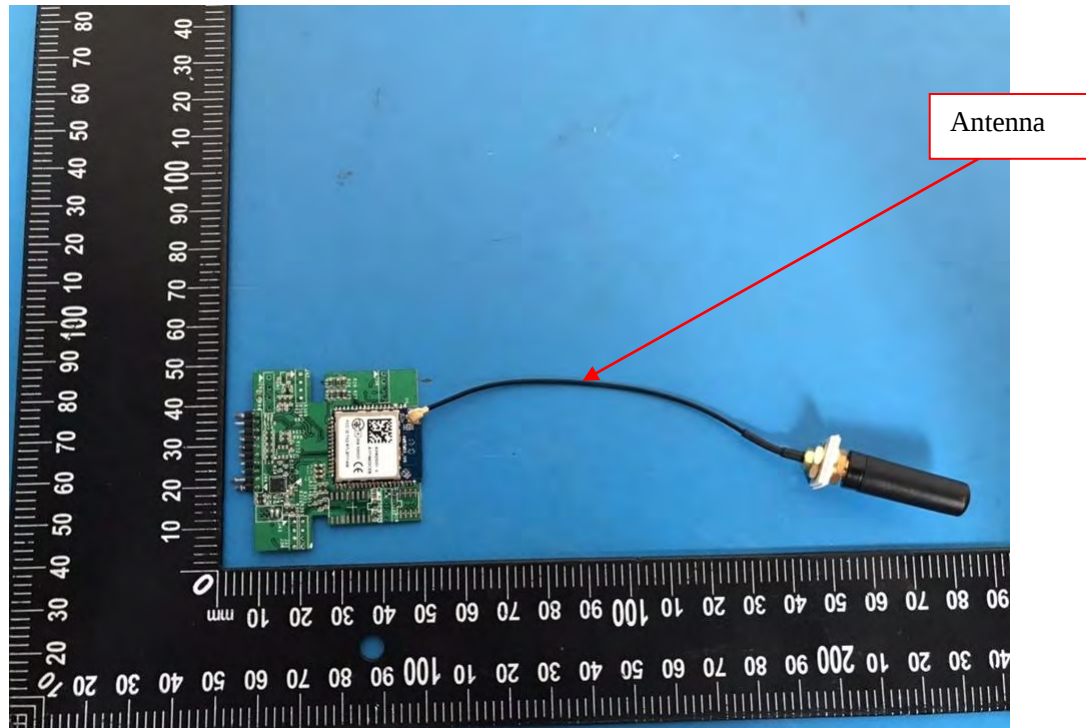

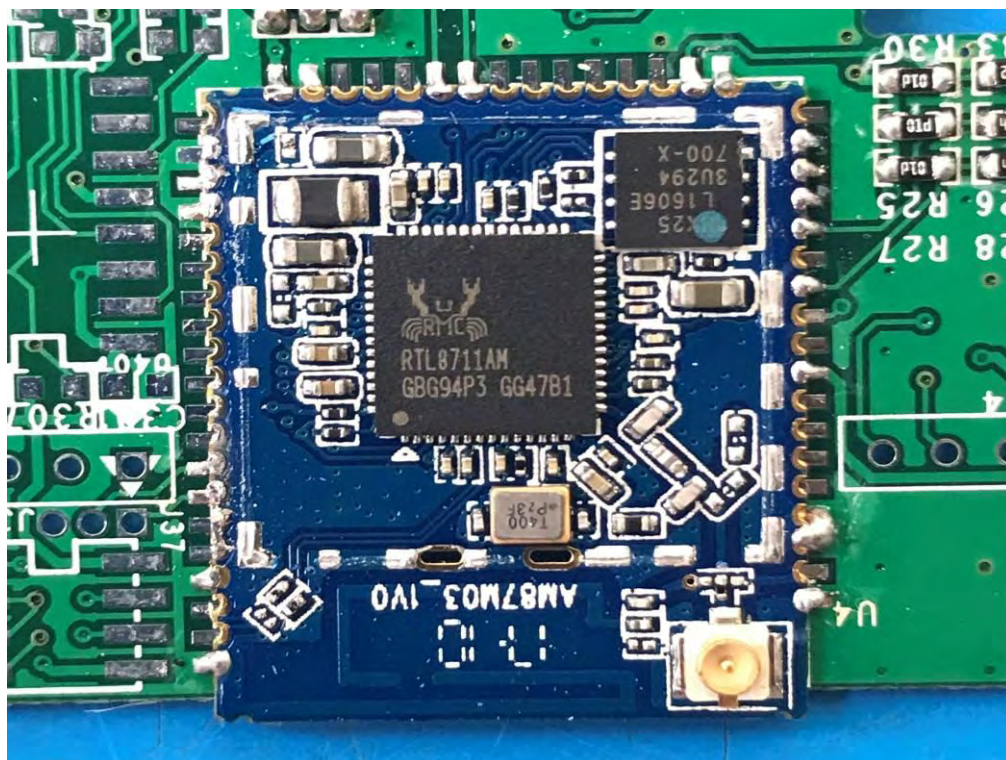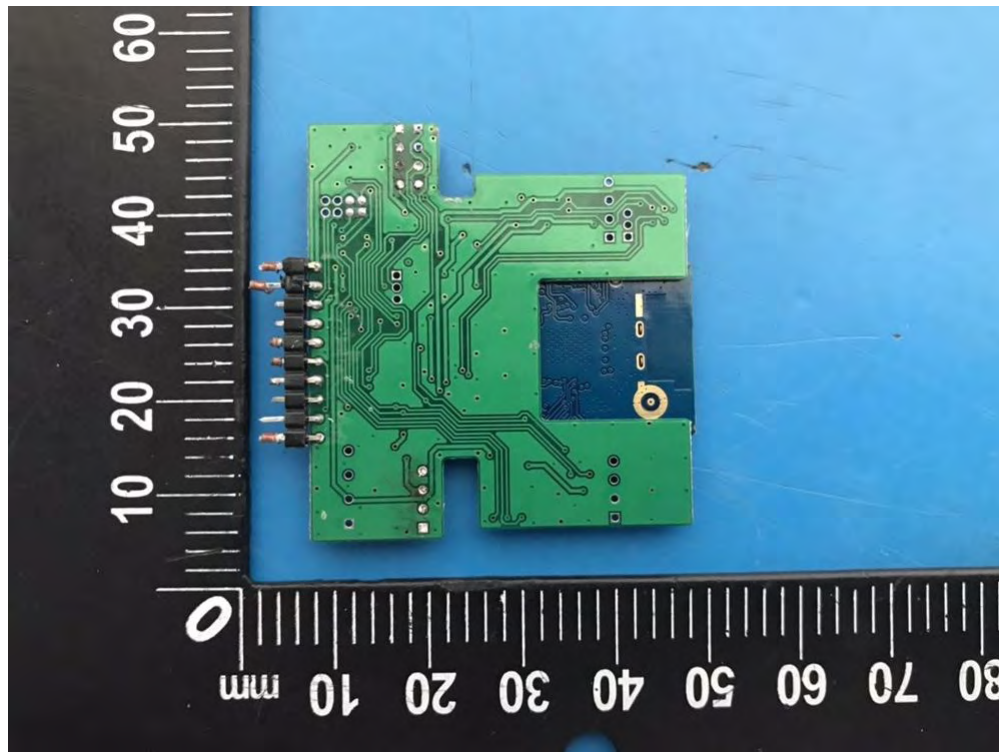

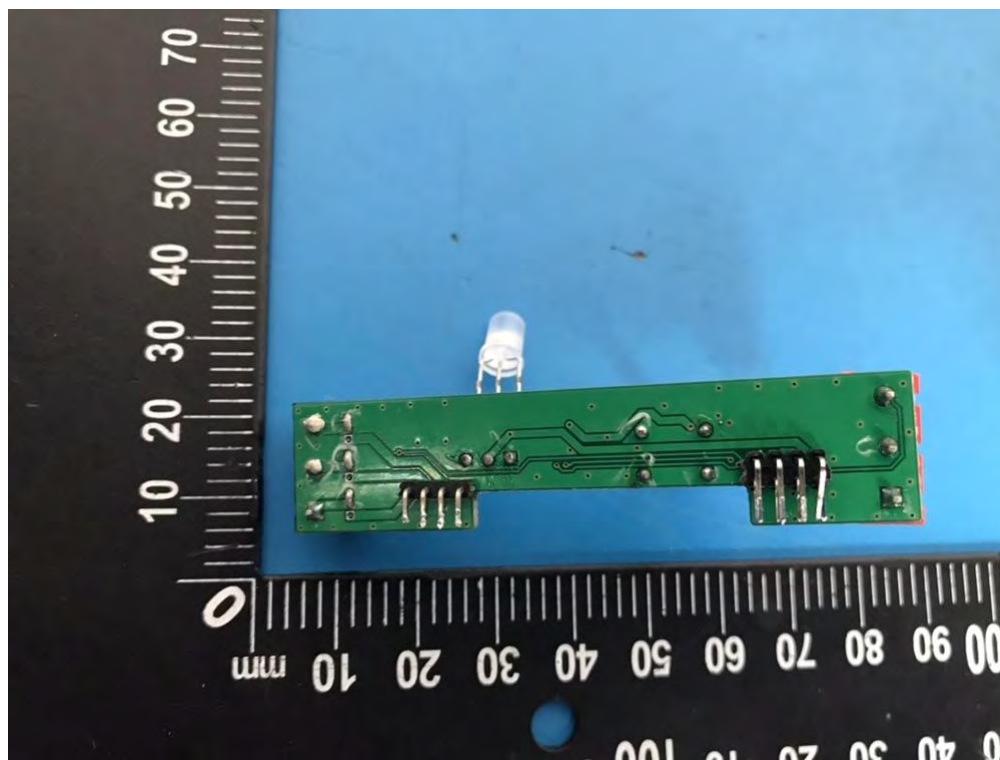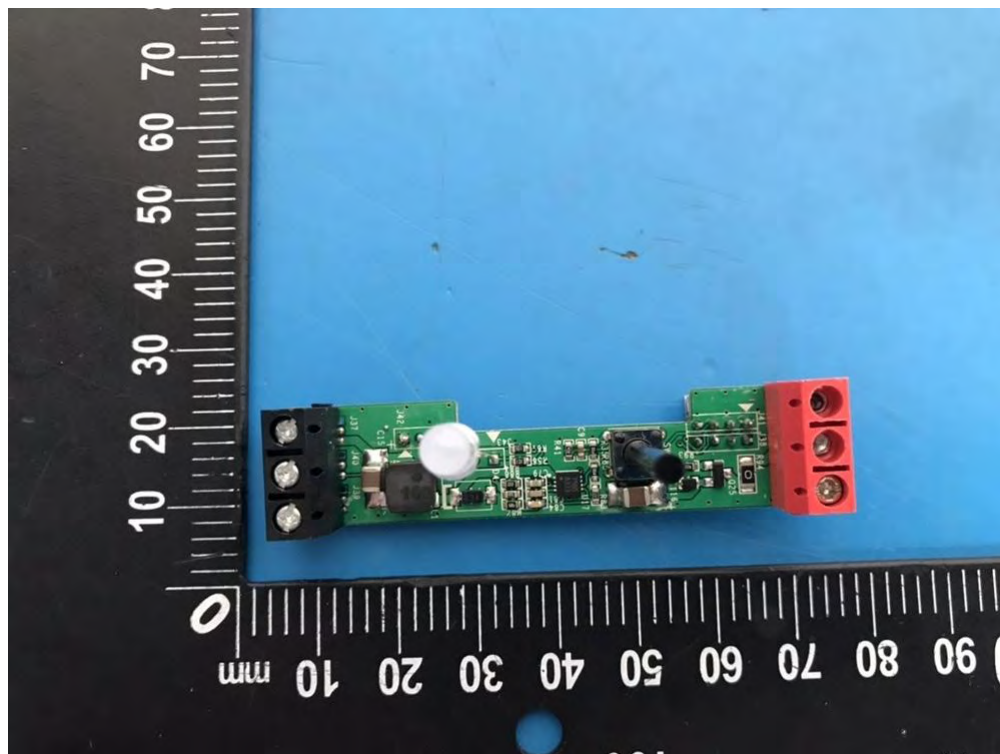

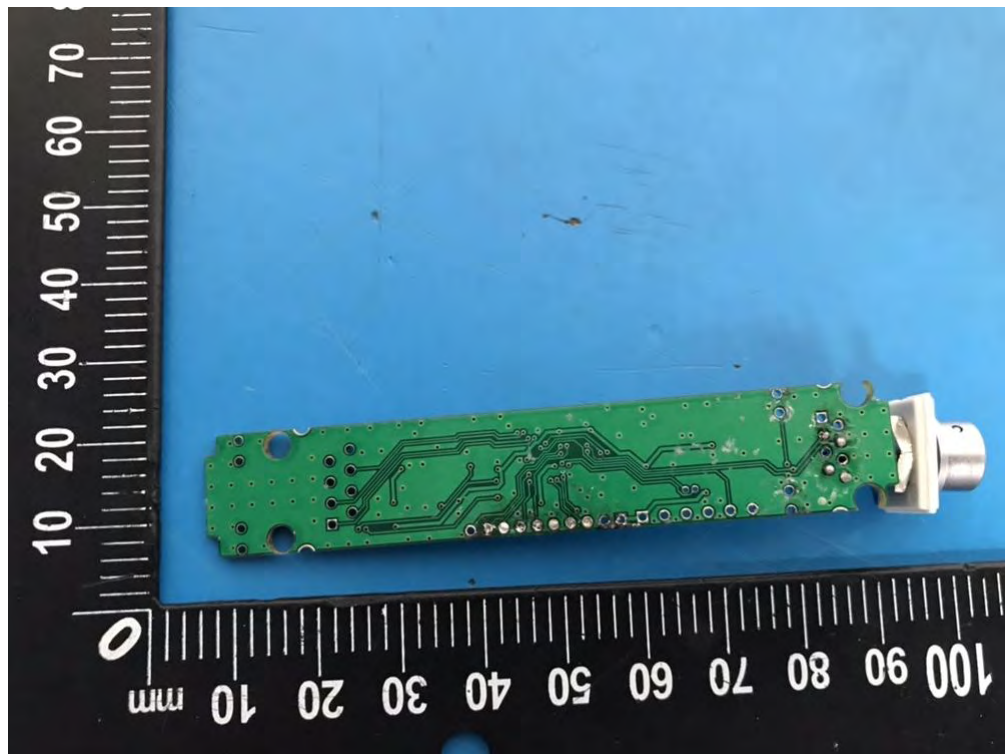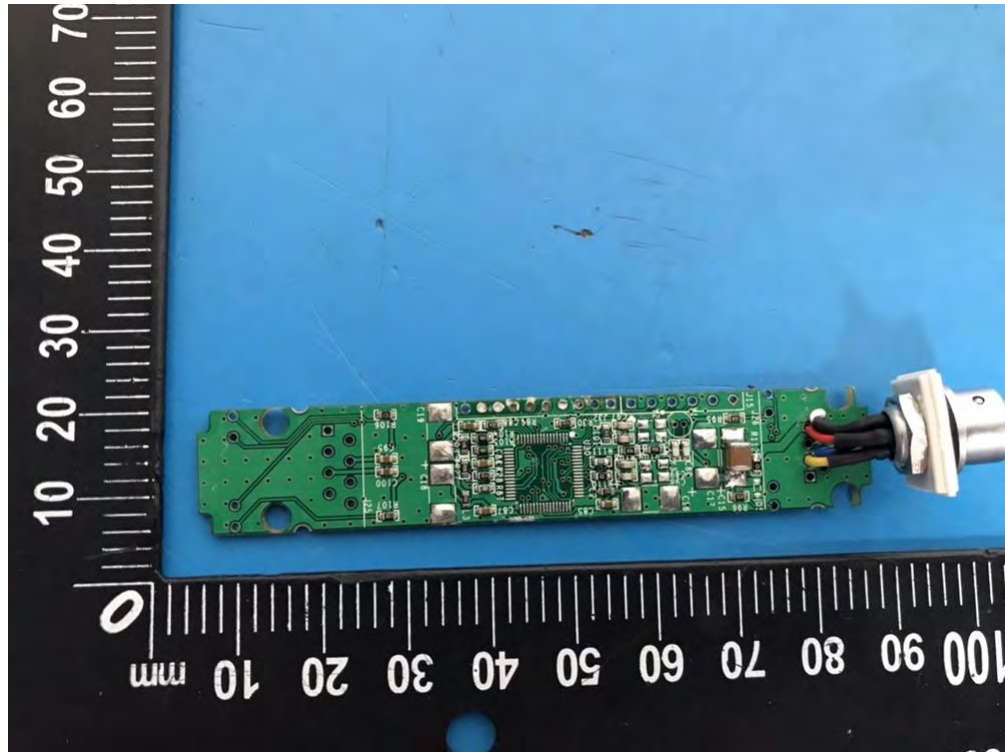

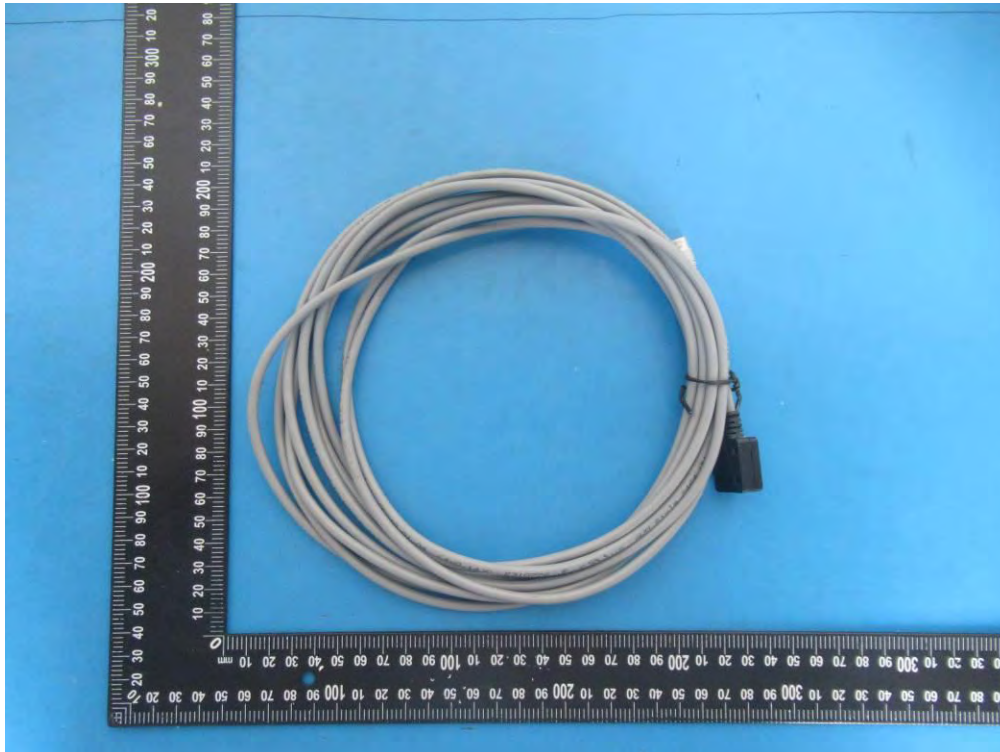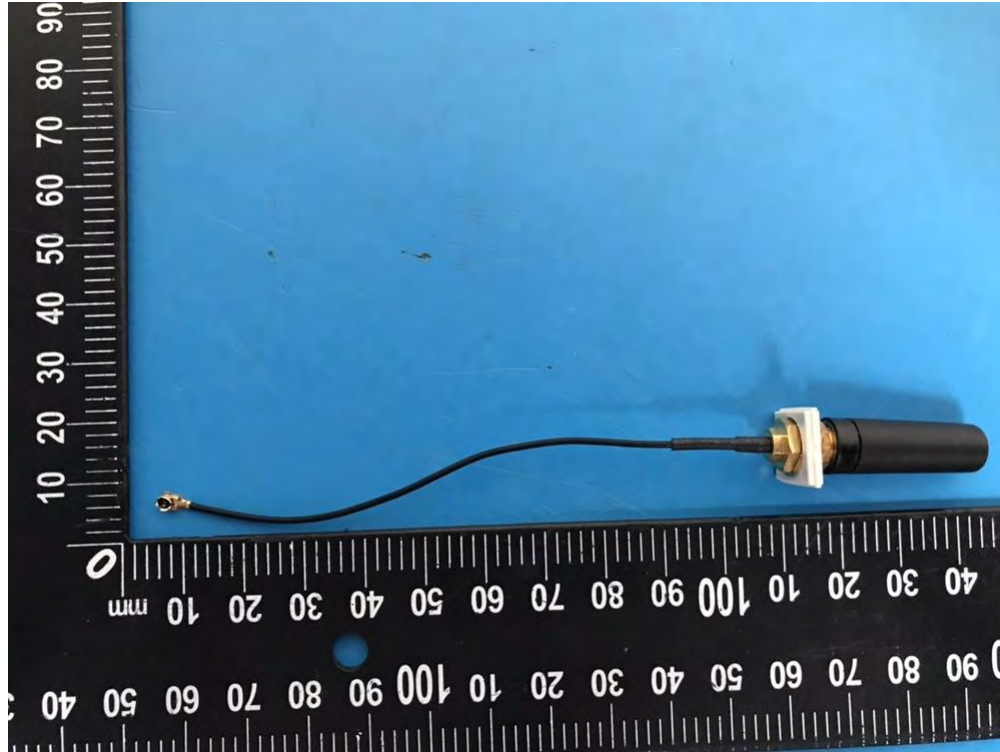

-----THE END OF REPORT-----