



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Shenzhen Youmi Intelligent Technology Co., Ltd.

Address: 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

FCC ID: 2ATZ4-G5TAB

IC: 26074-G5TAB

HVIN: T30-T616-G5TAB

Product Name: Smart Tablet Computer

Standard(s): 47 CFR Part 15, Subpart E(15.407)

RSS-247 Issue 2, February 2017

RSS-Gen, Issue 5, February 2021 Amendment 2

ANSI C63.10-2013

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230846390-00D

Date Of Issue: 2023/10/30

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	9
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	15
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	19
3.2.5 Corrected Amplitude & Margin Calculation.....	19
3.3 26DB ATTENUATED BELOW THE CHANNEL POWER:	20
3.3.1 Applicable Standard.....	20
3.3.2 EUT Setup.....	20
3.3.3 Test Procedure	20
3.4 EMISSION BANDWIDTH:	21
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	21
3.4.3 Test Procedure	21
3.5 MAXIMUM CONDUCTED OUTPUT POWER:	23
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	24
3.5.3 Test Procedure	24
3.6 MAXIMUM POWER SPECTRAL DENSITY:	25
3.6.1 Applicable Standard.....	25
3.6.2 EUT Setup.....	26
3.6.3 Test Procedure	26

3.7 DUTY CYCLE:	27
3.7.1 EUT Setup.....	27
3.7.2 Test Procedure	27
3.8 ANTENNA REQUIREMENT.....	28
3.8.1 Applicable Standard.....	28
3.8.2 Judgment.....	28
3.9 ADDITIONAL REQUIREMENT	29
3.9.1 Applicable Standard.....	29
3.9.2 Judgment.....	30
3.10 FREQUENCY STABILITY.....	31
3.10.1 Applicable Standard.....	31
3.10.2 Test Setup Block:.....	32
4. Test DATA AND RESULTS	33
4.1 AC LINE CONDUCTED EMISSIONS.....	33
4.2 RADIATION SPURIOUS EMISSIONS	36
4.3 26dB ATTENUATED BELOW THE CHANNEL POWER:	51
4.4 EMISSION BANDWIDTH:	55
4.5 MAXIMUM CONDUCTED OUTPUT POWER:	69
4.6 MAXIMUM POWER SPECTRAL DENSITY:	71
4.6 DUTY CYCLE:	79
4.7 FREQUENCY STABILITY:	81
5. EUT PHOTOGRAPHS	86
6. TEST SETUP PHOTOGRAPHS	87

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230846390-00D	Original Report	2023/10/30

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smart Tablet Computer
Trade Name:	UMIDIGI
EUT Model:	G5 Tab
Multiple Models:	G5 Tab Kids
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775MHz(802.11ac vht80)
Maximum Average Output Power (Conducted):	17.10 dBm (5150-5250 MHz) 18.10 dBm (5725-5850 MHz)
Modulation Type:	OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
Rated Input Voltage:	DC3.8V from battery or DC5V from adapter
Serial Number:	29PD-1,29PD-2
EUT Received Date:	2023/8/1
EUT Received Status:	Good

1.1.2 Operation Frequency Detail: For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:			
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

For 802.11ac vht80:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:			
42	5210	155	5775

1.1.3 Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	5150~5250MHz	0.9 dBi
		5725~5850MHz	0.9 dBi

The Method of §15.203 Compliance:

- ☒ Antenna must be permanently attached to the unit.
☐ Antenna must use a unique type of connector to attach to the EUT.
☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter 1	UMIDIGI	HF-0502000U	Input: 100-240V~50/60Hz, 0.3A Output: 5.0V, 2A
Adapter 1	UMIDIGI	HJ-0502000W2-US	Input: 100-240V~50/60Hz, 0.3A Output: 5.0V, 2A

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.			
	According to the test result of DSS report, for AC line conducted emission and radiated emission below 1GHz, the adapter HJ-0502000W2-US was the worst case, so in this report, only the adapter HJ-0502000W2-US was tested.			
Equipment Modifications:	No			
EUT Exercise Software:	RTL8852A MP Toolkit.exe			
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲：				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	17
	Middle	5200	6Mbps	17
	Highest	5240	6Mbps	17
802.11n ht20	Lowest	5180	MCS0	16
	Middle	5200	MCS0	16
	Highest	5240	MCS0	16
802.11n ht40	Lowest	5190	MCS0	11
	Highest	5230	MCS0	11
802.11ac vht80	Middle	5210	MCS0	11
5725-5850 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	24
	Middle	5785	6Mbps	24
	Highest	5825	6Mbps	24
802.11n ht20	Lowest	5745	MCS0	24
	Middle	5785	MCS0	24
	Highest	5825	MCS0	24
802.11n ht40	Lowest	5755	MCS0	24
	Highest	5795	MCS0	24
802.11ac vht80	Middle	5775	MCS0	24
Note:				
The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.				
The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.				

1.2.2 Support Equipment List and Details

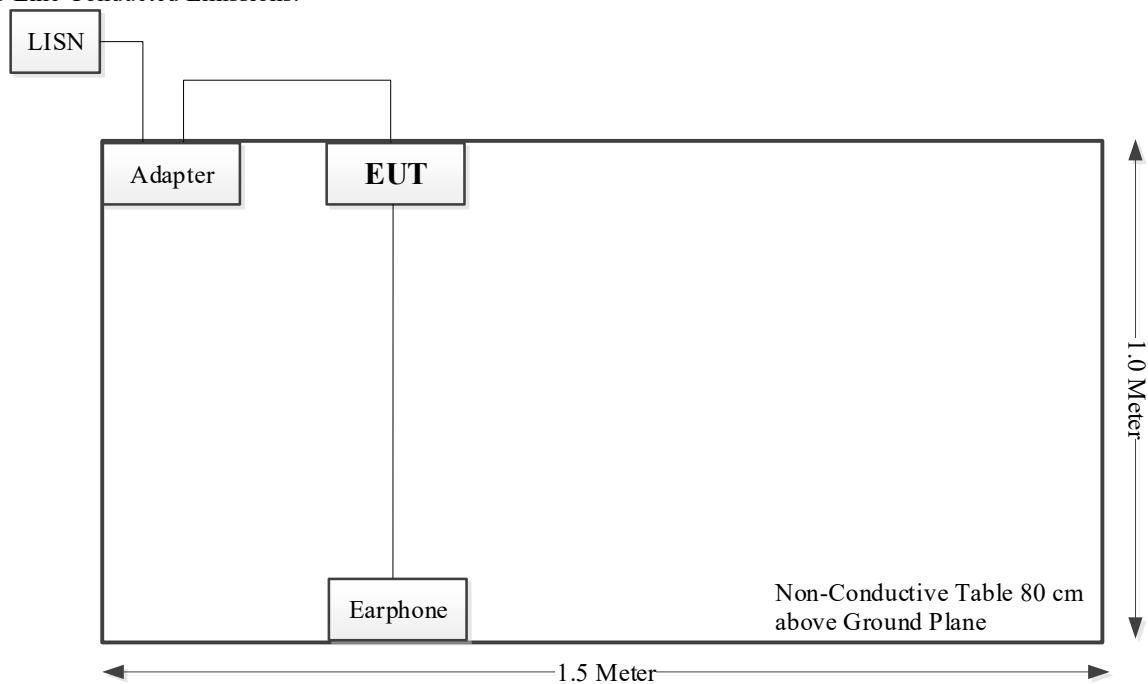
Manufacturer	Description	Model	Serial Number
UMIDIGI	Adapter	HF-0502000U	Unknown
UMIDIGI	Adapter	HJ-0502000W2-US	Unknown
IPRO	Earphone	Phonenix 5.0s	EP221126001

1.2.3 Support Cable List and Details

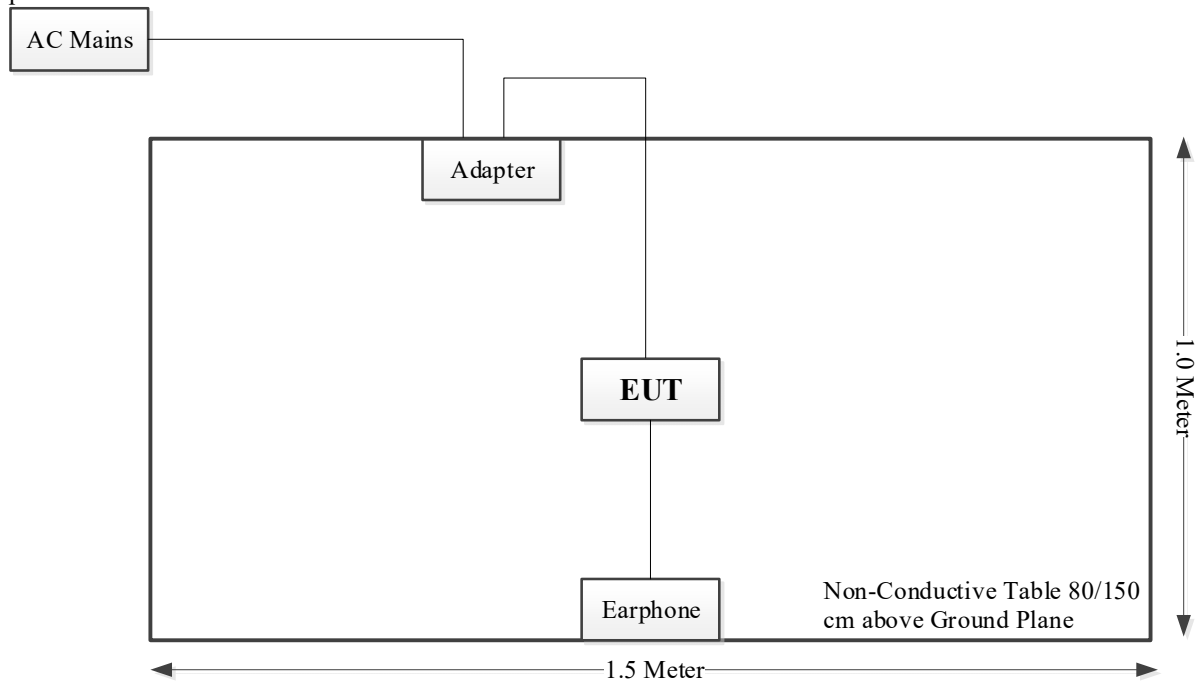
Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	NO	NO	1	Adapter	EUT
Earphone Cable	NO	NO	1.2	EUT	Earphone

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:



Spurious emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Power Spectral Density, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.26\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a) RSS-Gen Clause 8.8	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b) RSS-247 Clause 6.2	Undesirable Emission& Restricted Bands	Compliant
RSS-247 Clause 6.2.1.2	26dB attenuated below the channel power	Compliant
FCC§15.407(a) (e) RSS-247 Clause 6.2 RSS-Gen Clause 6.7	Emission Bandwidth	Compliant
FCC§15.407(a) RSS-247 Clause 6.2	Maximum Conducted Output Power	Compliant
FCC§15.407 (a) RSS-247 Clause 6.2	Power Spectral Density	Compliant
§15.203 RSS-GEN Clause 6.8	Antenna Requirement	Compliant
RSS-247 Clause 6.4	Additional requirements	Compliant
RSS-Gen clause 6.11	Frequency Stability	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the

boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

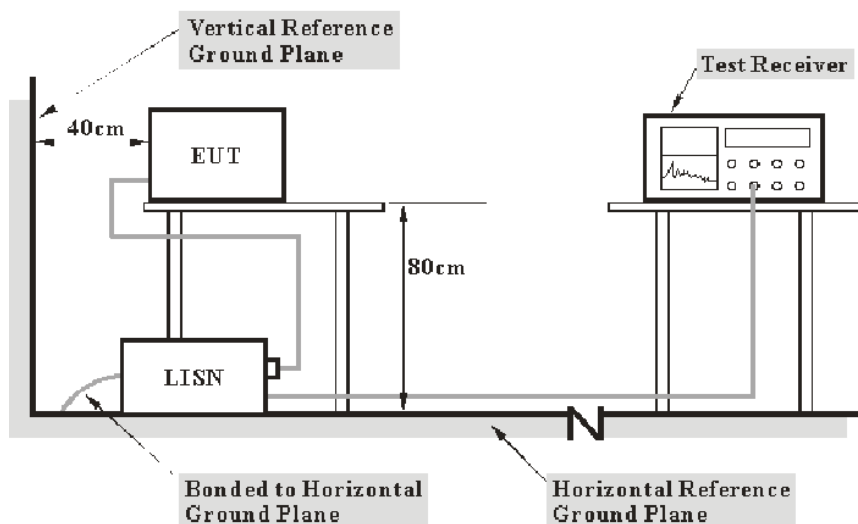
Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207,RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

RSS-247 Clause 6.2

Frequency band 5150-5250 MHz

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5725-5850 MHz

6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.

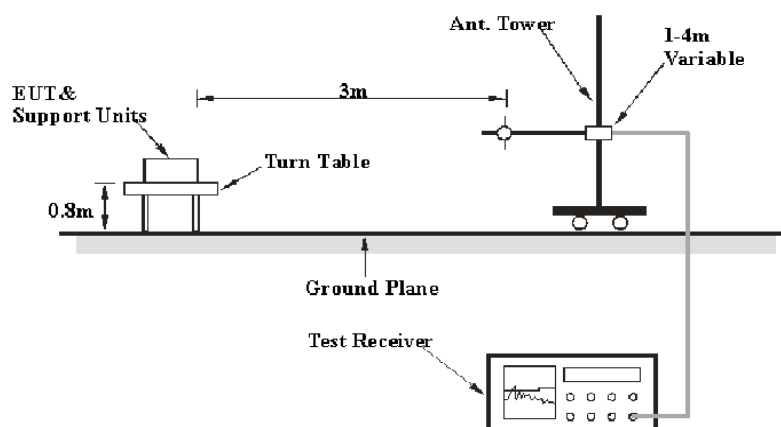
Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.

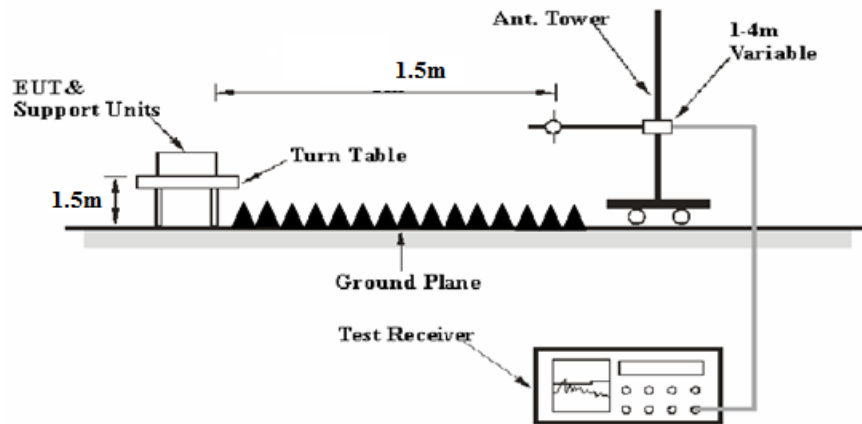
Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

3.2.2 EUT Setup

Below 1GHz:



1-40 GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407, RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Detector	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor $= 20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor - Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

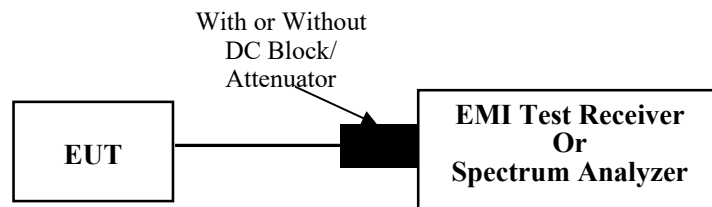
3.3 26dB Attenuated Below The Channel Power:

3.3.1 Applicable Standard

RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

3.3.2 EUT Setup



3.3.3 Test Procedure

- Set RBW = 1%~5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = RMS.
- Trace mode = max hold
- Measure the emission attenuated below the channel power

3.4 Emission Bandwidth:

3.4.1 Applicable Standard

FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

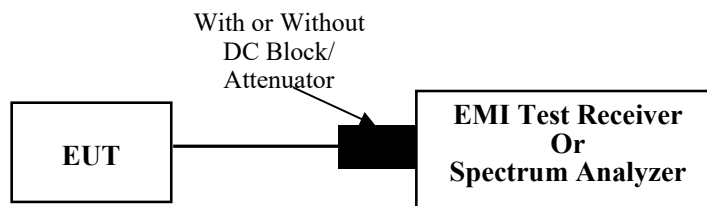
RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

RSS-247 Clause 6.2.4.1

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.4.2 EUT Setup



3.4.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

3.5 Maximum Conducted Output Power:

3.5.1 Applicable Standard

FCC §15.407(a)(1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a)(3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 6.2.3.1

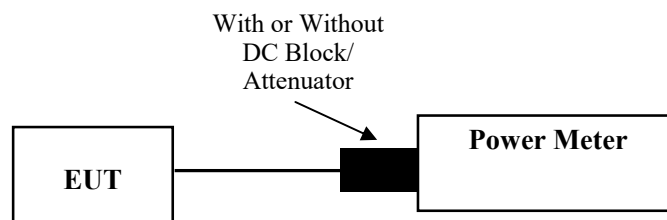
The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.6 Maximum Power Spectral Density:

3.6.1 Applicable Standard

FCC §15.407(a)(1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a)(3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 6.2.3.1

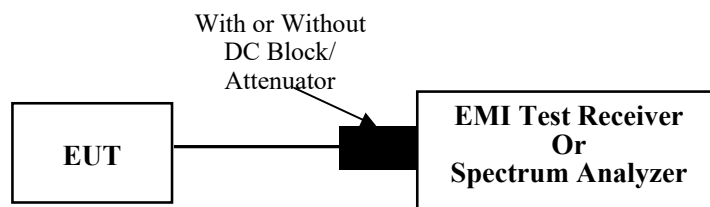
The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

3.6.2 EUT Setup



3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.2

Duty cycle $\geq 98\%$

Method SA-1 was used.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

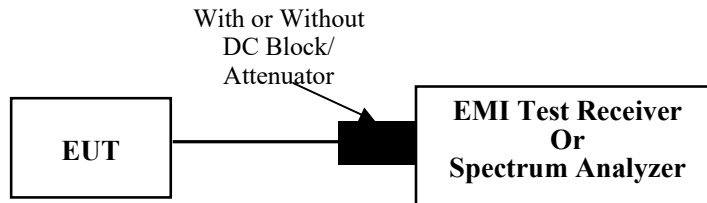
Method SA-2 was used.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

Method SA-3 was used.

3.7 Duty Cycle:

3.7.1 EUT Setup



3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-GEN Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISCED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

3.8.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

3.9 Additional requirement

3.9.1 Applicable Standard

According to RSS-247 Clause 6.4 Additional requirement

The following requirements shall apply:

- a) The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b) All LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c) The user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
 - i. the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;⁴
 - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
 - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
 - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

3.9.2 Judgment

RSS-247 Clause 6.4 a):

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. Please refer to the declaration

RSS-247 Clause 6.4 b):

The devices must contain security features to protect against modification of software by unauthorized parties. Please refer to the declaration

RSS-247 Clause 6.4 c):

i). The device operates on 5150-5250MHz is only for indoor use.

ii). The device not operates on 5250-5350MHz/5470-5725MHz.

iii). The antenna is not detachable, and all the EIPR compliance with RSS-247 requirement. Please refer to the conducted output power test result.

iv). Not Applicable.

3.10 Frequency Stability

3.10.1 Applicable Standard

RSS-GEN Clause 6.11

Frequency stability is a measure of frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at an appropriate reference temperature and the rated supply voltage.

When the measurement method of transmitter frequency stability is not stated in the applicable RSS or reference standards, the following conditions apply:

- a. The reference temperature for radio transmitters is +20°C (+68°F).
- b. A hand-held device that is only capable of operating using internal batteries shall be tested at the battery's nominal voltage, and again at the battery's operating end-point voltage, which shall be specified by the equipment manufacturer. For this test, either a battery or an external power supply can be used.
- c. The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency-determining circuit element shall be made subsequent to this initial set-up.

With the transmitter installed in an environmental test chamber, the unmodulated carrier frequency and frequency stability shall be measured under the conditions specified below for licensed and licence-exempt devices, unless specified otherwise in the applicable RSS. A sufficient stabilization period at each temperature shall be used prior to each frequency measurement.

For licensed devices, the following measurement conditions apply:

- a. at the temperatures of -30°C (-22°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- b. at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

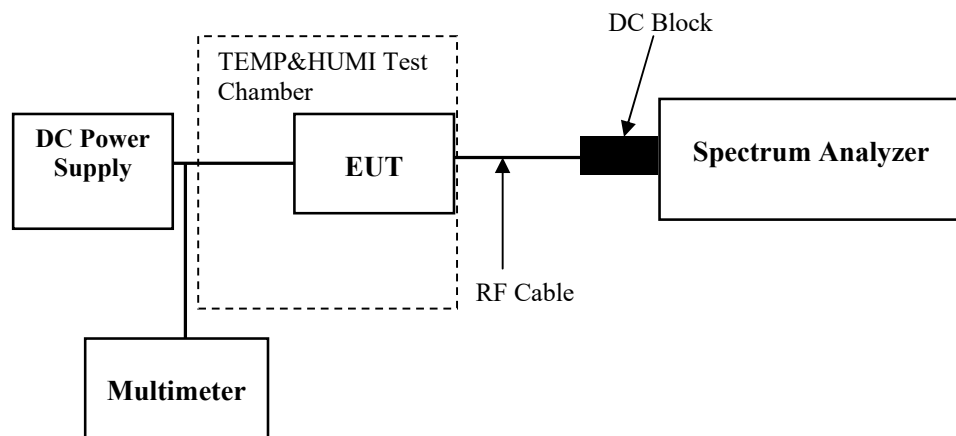
For licence-exempt devices, the following conditions apply:

- a. at the temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- b. at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

If the frequency stability limits are only met within a temperature range that is smaller than the range specified in (a) for licensed or licence-exempt devices, the frequency stability requirement will be deemed to be met if the transmitter is automatically prevented from operating outside this smaller temperature range and if the published operating characteristics for the equipment are revised to reflect this restricted temperature range.

If the device contains both licence and licence-exempt transmitter modules, the device's frequency stability shall be measured under the most stringent condition specified in the applicable RSS of the transmitter module.

In addition, if an unmodulated carrier is not available, the method used to measure frequency stability shall be described in the test report.

3.10.2 Test Setup Block:

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	29PD-1	Test Date:	2023/8/30
Test Site:	CE	Test Mode:	Transmitting (The maximum output power channel 802.11a 5745MHz)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5	Relative Humidity: (%)	53	ATM Pressure: (kPa)	99.7
----------------------	------	------------------------------	----	------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

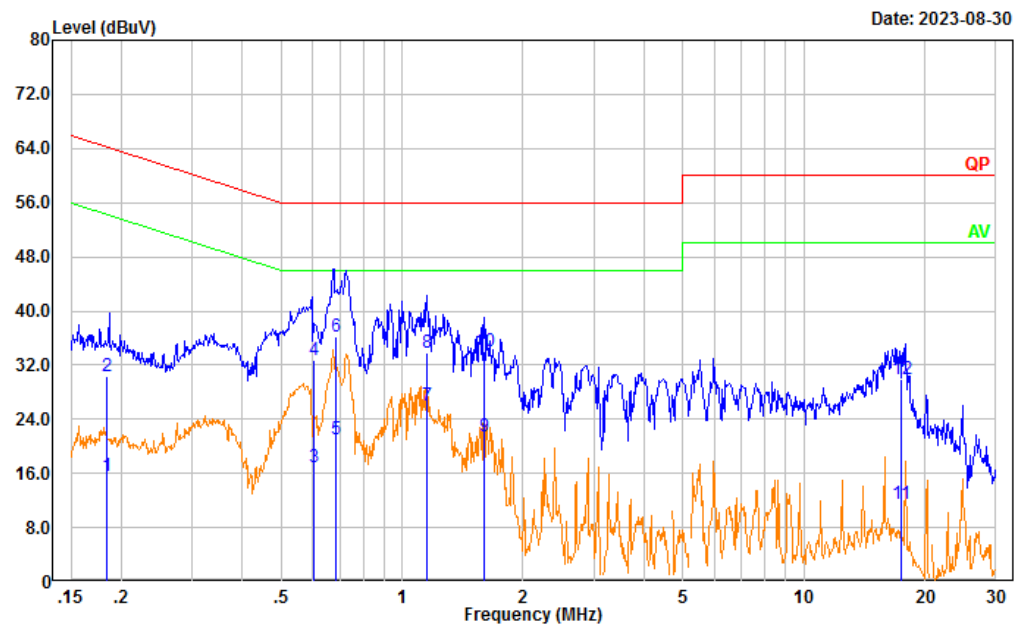
Test Data:

Project No.: CR230846390-RF

Tester: David Huang

Port: Line

Note:



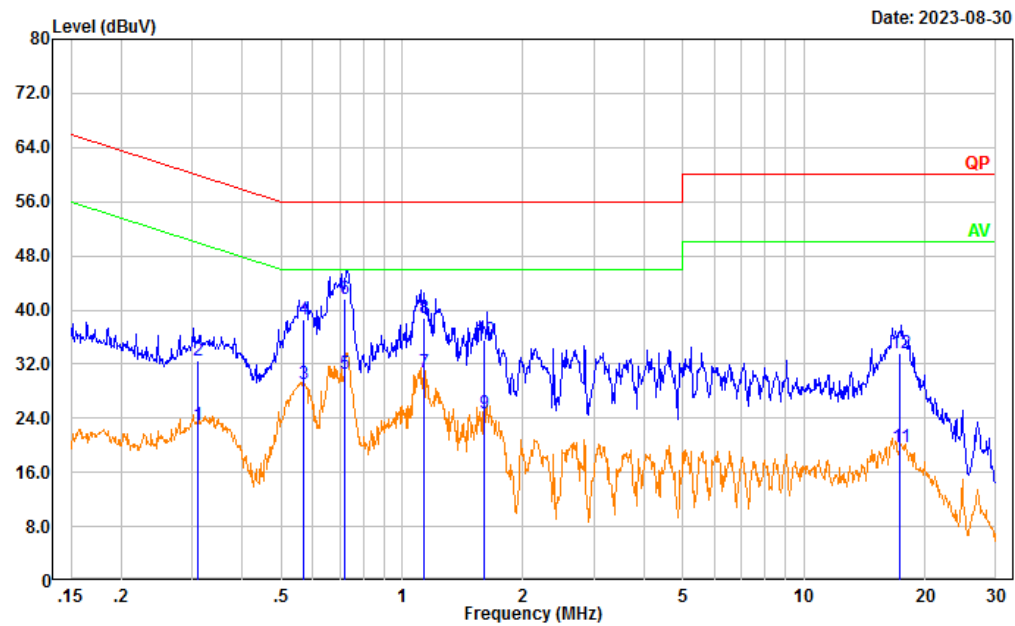
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.184	6.10	9.61	15.71	54.30	38.59	Average
2	0.184	20.76	9.61	30.37	64.30	33.93	QP
3	0.605	7.20	9.62	16.82	46.00	29.18	Average
4	0.605	23.02	9.62	32.64	56.00	23.36	QP
5	0.683	11.49	9.62	21.11	46.00	24.89	Average
6	0.683	26.58	9.62	36.20	56.00	19.80	QP
7	1.152	16.40	9.62	26.02	46.00	19.98	Average
8	1.152	24.30	9.62	33.92	56.00	22.08	QP
9	1.602	11.86	9.63	21.49	46.00	24.51	Average
10	1.602	24.40	9.63	34.03	56.00	21.97	QP
11	17.468	1.72	9.74	11.46	50.00	38.54	Average
12	17.468	20.24	9.74	29.98	60.00	30.02	QP

Project No.: CR230846390-RF

Tester: David Huang

Port: neutral

Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.309	13.38	9.61	22.99	49.99	27.00	Average
2	0.309	22.94	9.61	32.55	59.99	27.44	QP
3	0.568	19.38	9.62	29.00	46.00	17.00	Average
4	0.568	28.87	9.62	38.49	56.00	17.51	QP
5	0.718	20.86	9.62	30.48	46.00	15.52	Average
6	0.718	32.00	9.62	41.62	56.00	14.38	QP
7	1.132	21.11	9.62	30.73	46.00	15.27	Average
8	1.132	29.13	9.62	38.75	56.00	17.25	QP
9	1.600	15.07	9.63	24.70	46.00	21.30	Average
10	1.600	25.93	9.63	35.56	56.00	20.44	QP
11	17.358	10.12	9.69	19.81	50.00	30.19	Average
12	17.358	23.93	9.69	33.62	60.00	26.38	QP

4.2 Radiation Spurious Emissions

Serial Number:	29PD-1	Test Date:	2023/8/29~2023/9/8
Test Site:	966-2,966-1	Test Mode:	Transmitting
Tester:	Carl Xue, Tao Zhu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3~26.1	Relative Humidity: (%)	63~65	ATM Pressure: (kPa)	99.7~100
----------------------	-----------	------------------------------	-------	------------------------	----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2022/9/16	2023/9/15
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

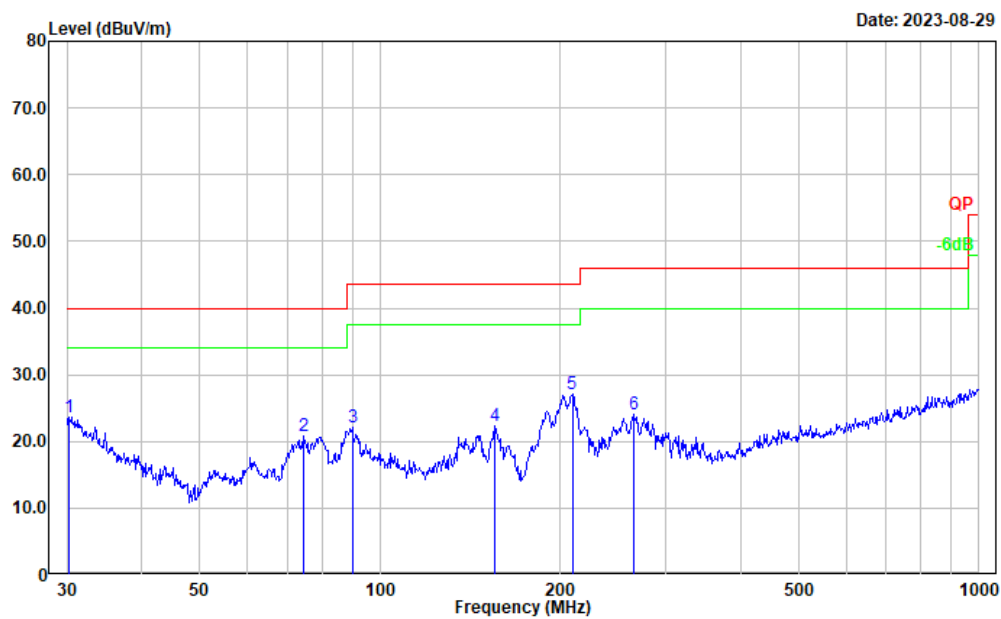
Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 Figure 8, the worst orientation was photographed and it's data was recorded.

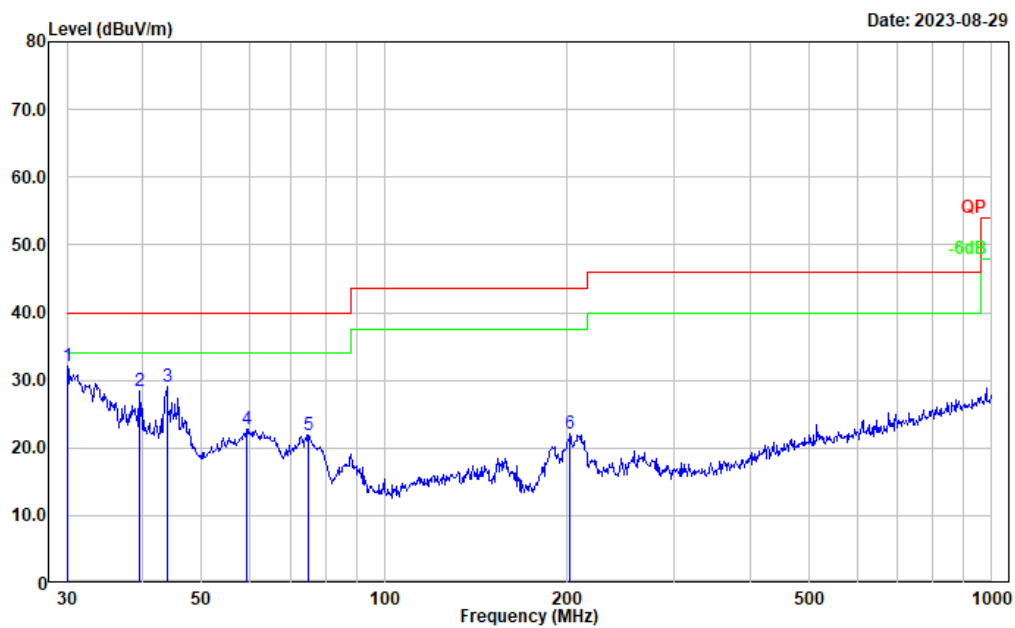
1) 30MHz-1GHz(The maximum output power channel 802.11a 5745MHz)

Test Mode: Transmitting
Polarization: horizontal
Note: HJ-050200W2-US



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	27.58	-3.85	23.73	40.00	16.27	Peak
2	74.396	37.67	-16.92	20.75	40.00	19.25	Peak
3	89.905	39.00	-16.93	22.07	43.50	21.43	Peak
4	155.364	34.29	-12.06	22.23	43.50	21.27	Peak
5	209.313	39.59	-12.46	27.13	43.50	16.37	Peak
6	265.676	36.33	-12.26	24.07	46.00	21.93	Peak

Test Mode: Transmitting
Polarization: vertical
Note: HJ-0502000W2-US



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	35.69	-3.68	32.01	40.00	7.99	Peak
2	39.437	39.32	-10.87	28.45	40.00	11.55	Peak
3	43.812	42.66	-13.56	29.10	40.00	10.90	Peak
4	59.232	40.15	-17.42	22.73	40.00	17.27	Peak
5	74.919	38.91	-16.92	21.99	40.00	18.01	Peak
6	202.100	34.32	-12.28	22.04	43.50	21.46	Peak

2) 1GHz-40GHz:**5150-5250MHz****802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180 MHz							
5150.000	34.90	PK	H	38.64	67.52	74.00	6.48
5150.000	18.28	AV	H	38.64	50.90	54.00	3.10
5150.000	22.86	PK	V	38.64	55.48	74.00	18.52
5150.000	18.28	AV	V	38.64	50.90	54.00	3.10
10360.000	35.80	PK	H	19.18	48.96	68.20	19.24
10360.000	35.47	PK	V	19.18	48.63	68.20	19.57
Middle Channel: 5200 MHz							
10400.000	36.61	PK	H	19.16	49.75	68.20	18.45
10400.000	36.03	PK	V	19.16	49.17	68.20	19.03
High Channel: 5240 MHz							
5350.000	29.66	PK	H	39.03	62.67	74.00	11.33
5350.000	16.52	AV	H	39.03	49.53	54.00	4.47
5350.000	24.90	PK	V	39.03	57.91	74.00	16.09
5350.000	16.23	AV	V	39.03	49.24	54.00	4.76
10480.000	37.08	PK	H	18.86	49.92	68.20	18.28
10480.000	36.63	PK	V	18.86	49.47	68.20	18.73

802.11n ht20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5150.000	36.38	PK	H	38.64	69.00	74.00	5.00
5150.000	17.69	AV	H	38.64	50.31	54.00	3.69
5150.000	24.34	PK	V	38.64	56.96	74.00	17.04
5150.000	17.69	AV	V	38.64	50.31	54.00	3.69
10360.000	36.30	PK	H	19.18	49.46	68.20	18.74
10360.000	35.84	PK	V	19.18	49.00	68.20	19.20
Middle Channel: 5200 MHz							
10400.000	36.51	PK	H	19.16	49.65	68.20	18.55
10400.000	36.07	PK	V	19.16	49.21	68.20	18.99
High Channel: 5240 MHz							
5350.000	29.74	PK	H	39.03	62.75	74.00	11.25
5350.000	16.53	AV	H	39.03	49.54	54.00	4.46
5350.000	24.61	PK	V	39.03	57.62	74.00	16.38
5350.000	14.53	AV	V	39.03	47.54	54.00	6.46
10480.000	36.93	PK	H	18.86	49.77	68.20	18.43
10480.000	36.37	PK	V	18.86	49.21	68.20	18.99

802.11n ht40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5150.000	33.11	PK	H	38.64	65.73	74.00	8.27
5150.000	18.30	AV	H	38.64	50.92	54.00	3.08
5150.000	21.98	PK	V	38.64	54.60	74.00	19.40
5150.000	16.17	AV	V	38.64	48.79	54.00	5.21
10380.000	35.72	PK	H	19.17	48.87	68.20	19.33
10380.000	35.34	PK	V	19.17	48.49	68.20	19.71
High Channel: 5230 MHz							
5350.000	24.88	PK	H	39.03	57.89	74.00	16.11
5350.000	11.43	AV	H	39.03	44.44	54.00	9.56
5350.000	24.83	PK	V	39.03	57.84	74.00	16.16
5350.000	11.11	AV	V	39.03	44.12	54.00	9.88
10460.000	36.20	PK	H	18.94	49.12	68.20	19.08
10460.000	36.15	PK	V	18.94	49.07	68.20	19.13

802.11ac vht80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
5150.000	29.89	PK	H	38.64	62.51	74.00	11.49
5150.000	16.94	AV	H	38.64	49.56	54.00	4.44
5150.000	24.50	PK	V	38.64	57.12	74.00	16.88
5150.000	16.94	AV	V	38.64	49.56	54.00	4.44
5350.000	24.64	PK	H	39.03	57.65	74.00	16.35
5350.000	11.55	AV	H	39.03	44.56	54.00	9.44
5350.000	24.02	PK	V	39.03	57.03	74.00	16.97
5350.000	11.08	AV	V	39.03	44.09	54.00	9.91
10420.000	35.82	PK	H	19.09	48.89	68.20	19.31
10420.000	35.20	PK	V	19.09	48.27	68.20	19.93

Note:

Result = Reading + Factor- Distance extrapolation Factor

For 1-40GHz:

Distance extrapolation Factor = $20 \log (\text{specific distance } [3\text{m}] / \text{test distance } [1.5\text{m}]) \text{ dB} = 6.02 \text{ dB}$

5725-5850MHz:**802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5725.000	46.12	PK	H	39.48	79.58	122.20	42.62
5720.000	40.45	PK	H	39.49	73.92	110.80	36.88
5700.000	28.23	PK	H	39.51	61.72	105.20	43.48
5650.000	23.06	PK	H	39.49	56.53	68.20	11.67
5725.000	45.55	PK	V	39.48	79.01	122.20	43.19
5720.000	39.92	PK	V	39.49	73.39	110.80	37.41
5700.000	28.10	PK	V	39.51	61.59	105.20	43.61
5650.000	22.44	PK	V	39.49	55.91	68.20	12.29
11490.000	33.87	PK	H	20.67	48.52	74.00	25.48
11490.000	20.36	AV	H	20.67	35.01	54.00	18.99
11490.000	33.69	PK	V	20.67	48.34	74.00	25.66
11490.000	20.09	AV	V	20.67	34.74	54.00	19.26
Middle Channel: 5785 MHz							
11570.000	34.72	PK	H	20.83	49.53	74.00	24.47
11570.000	20.78	AV	H	20.83	35.59	54.00	18.41
11570.000	34.68	PK	V	20.83	49.49	74.00	24.51
11570.000	20.15	AV	V	20.83	34.96	54.00	19.04
High Channel: 5825 MHz							
5850.000	40.41	PK	H	39.49	73.88	122.20	48.32
5855.000	37.91	PK	H	39.51	71.40	110.80	39.40
5875.000	24.69	PK	H	39.60	58.27	105.20	46.93
5925.000	24.00	PK	H	39.68	57.66	68.20	10.54
5850.000	40.17	PK	V	39.49	73.64	122.20	48.56
5855.000	37.24	PK	V	39.51	70.73	110.80	40.07
5875.000	24.61	PK	V	39.60	58.19	105.20	47.01
5925.000	23.81	PK	V	39.68	57.47	68.20	10.73
11650.000	35.24	PK	H	21.07	50.29	74.00	23.71
11650.000	21.06	AV	H	21.07	36.11	54.00	17.89
11650.000	34.78	PK	V	21.07	49.83	74.00	24.17
11650.000	21.01	AV	V	21.07	36.06	54.00	17.94

802.11n ht20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5725.000	49.39	PK	H	39.48	82.85	122.20	39.35
5720.000	40.74	PK	H	39.49	74.21	110.80	36.59
5700.000	29.15	PK	H	39.51	62.64	105.20	42.56
5650.000	24.45	PK	H	39.49	57.92	68.20	10.28
5725.000	49.37	PK	V	39.48	82.83	122.20	39.37
5720.000	39.84	PK	V	39.49	73.31	110.80	37.49
5700.000	28.97	PK	V	39.51	62.46	105.20	42.74
5650.000	23.76	PK	V	39.49	57.23	68.20	10.97
11490.000	34.79	PK	H	20.67	49.44	74.00	24.56
11490.000	20.39	AV	H	20.67	35.04	54.00	18.96
11490.000	34.72	PK	V	20.67	49.37	74.00	24.63
11490.000	19.59	AV	V	20.67	34.24	54.00	19.76
Middle Channel: 5785 MHz							
11570.000	34.85	PK	H	20.83	49.66	74.00	24.34
11570.000	21.20	AV	H	20.83	36.01	54.00	17.99
11570.000	33.90	PK	V	20.83	48.71	74.00	25.29
11570.000	20.61	AV	V	20.83	35.42	54.00	18.58
High Channel: 5825 MHz							
5850.000	42.48	PK	H	39.49	75.95	122.20	46.25
5855.000	38.84	PK	H	39.51	72.33	110.80	38.47
5875.000	24.64	PK	H	39.60	58.22	105.20	46.98
5925.000	24.10	PK	H	39.68	57.76	68.20	10.44
5850.000	42.04	PK	V	39.49	75.51	122.20	46.69
5855.000	38.54	PK	V	39.51	72.03	110.80	38.77
5875.000	24.28	PK	V	39.60	57.86	105.20	47.34
5925.000	23.80	PK	V	39.68	57.46	68.20	10.74
11650.000	34.54	PK	H	21.07	49.59	74.00	24.41
11650.000	21.16	AV	H	21.07	36.21	54.00	17.79
11650.000	34.35	PK	V	21.07	49.40	74.00	24.60
11650.000	20.33	AV	V	21.07	35.38	54.00	18.62

802.11n ht40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5725.000	48.09	PK	H	39.48	81.55	122.20	40.65
5720.000	45.91	PK	H	39.49	79.38	110.80	31.42
5700.000	34.08	PK	H	39.51	67.57	105.20	37.63
5650.000	24.75	PK	H	39.49	58.22	68.20	9.98
5725.000	47.80	PK	V	39.48	81.26	122.20	40.94
5720.000	45.76	PK	V	39.49	79.23	110.80	31.57
5700.000	33.30	PK	V	39.51	66.79	105.20	38.41
5650.000	24.12	PK	V	39.49	57.59	68.20	10.61
11510.000	34.65	PK	H	20.67	49.30	74.00	24.70
11510.000	21.60	AV	H	20.67	36.25	54.00	17.75
11510.000	33.69	PK	V	20.67	48.34	74.00	25.66
11510.000	20.87	AV	V	20.67	35.52	54.00	18.48
High Channel: 5795 MHz							
5850.000	36.36	PK	H	39.49	69.83	122.20	52.37
5855.000	34.16	PK	H	39.51	67.65	110.80	43.15
5875.000	26.60	PK	H	39.60	60.18	105.20	45.02
5925.000	23.86	PK	H	39.68	57.52	68.20	10.68
5850.000	35.95	PK	V	39.49	69.42	122.20	52.78
5855.000	34.03	PK	V	39.51	67.52	110.80	43.28
5875.000	26.33	PK	V	39.60	59.91	105.20	45.29
5925.000	23.37	PK	V	39.68	57.03	68.20	11.17
11590.000	34.78	PK	H	20.88	49.64	74.00	24.36
11590.000	21.70	AV	H	20.88	36.56	54.00	17.44
11590.000	34.67	PK	V	20.88	49.53	74.00	24.47
11590.000	21.53	AV	V	20.88	36.39	54.00	17.61

802.11ac vht80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
5725.000	45.05	PK	H	39.48	78.51	122.20	43.69
5720.000	43.94	PK	H	39.49	77.41	110.80	33.39
5700.000	40.85	PK	H	39.51	74.34	105.20	30.86
5650.000	27.17	PK	H	39.49	60.64	68.20	7.56
5725.000	44.98	PK	V	39.48	78.44	122.20	43.76
5720.000	43.39	PK	V	39.49	76.86	110.80	33.94
5700.000	40.66	PK	V	39.51	74.15	105.20	31.05
5650.000	26.37	PK	V	39.49	59.84	68.20	8.36
5850.000	43.97	PK	H	39.49	77.44	122.20	44.76
5855.000	41.61	PK	H	39.51	75.10	110.80	35.70
5875.000	38.33	PK	H	39.60	71.91	105.20	33.29
5925.000	28.01	PK	H	39.68	61.67	68.20	6.53
5850.000	43.80	PK	V	39.49	77.27	122.20	44.93
5855.000	40.80	PK	V	39.51	74.29	110.80	36.51
5875.000	37.41	PK	V	39.60	70.99	105.20	34.21
5925.000	27.58	PK	V	39.68	61.24	68.20	6.96
11550.000	35.43	PK	H	20.78	50.19	74.00	23.81
11550.000	21.97	AV	H	20.78	36.73	54.00	17.27
11550.000	47.48	PK	V	20.78	62.24	74.00	11.76
11550.000	34.61	AV	V	20.78	49.37	54.00	4.63

Note:

Result = Reading + Factor- Distance extrapolation Factor

For 1-40GHz:

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6.02 dB

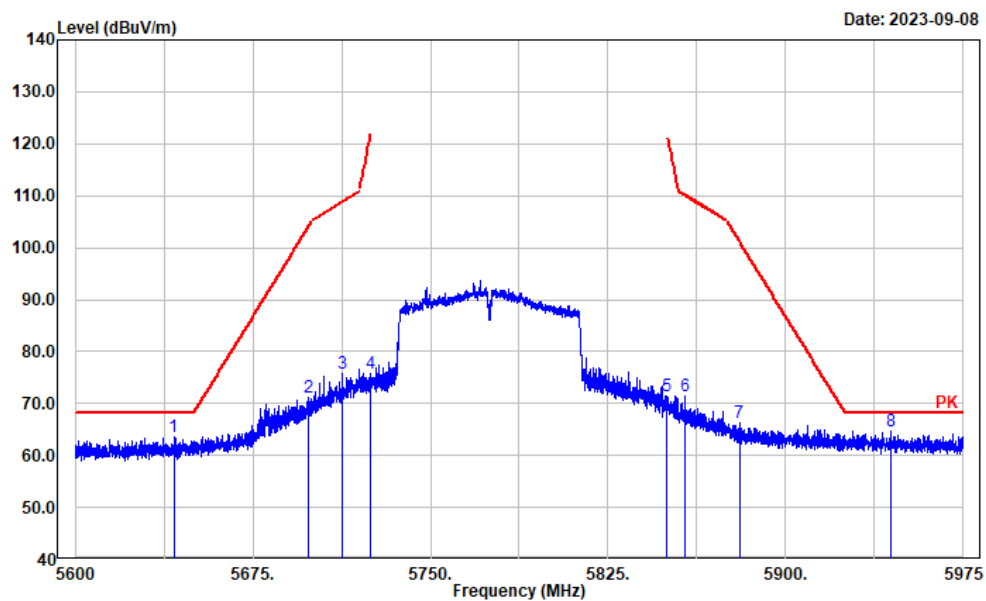
Worst Test plots for Band Edge Measurements (Radiated)**802.11ac vht80****Test Channel:****5775MHz****Ant. Polar. :****Horizontal**

Project No.: CR230846390-RF

Tester: Tao Zhu

Polarization: horizontal

Note:



802.11ac vht80

Test Channel:

5775MHz

Ant. Polar. :

Vertical

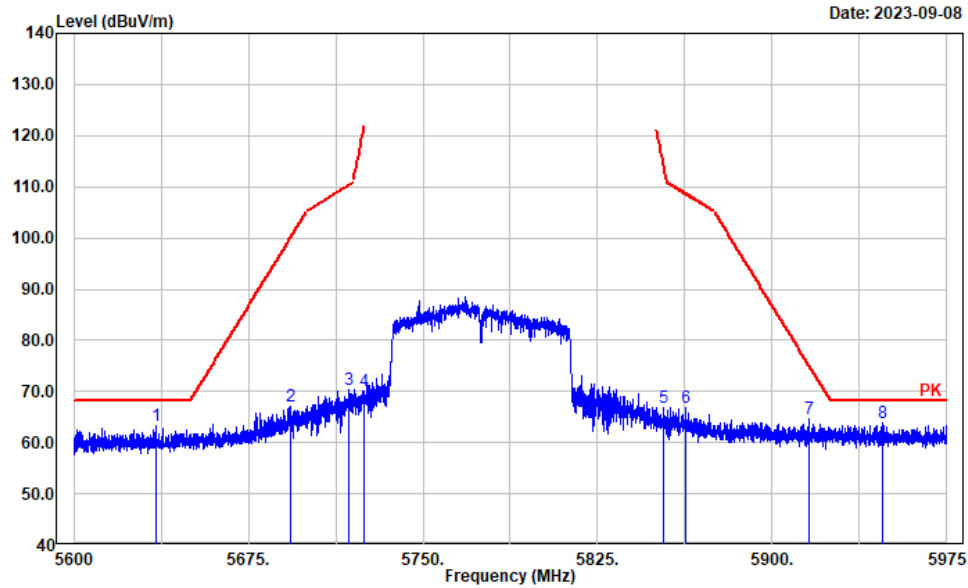
Project No.: CR230846390-RF

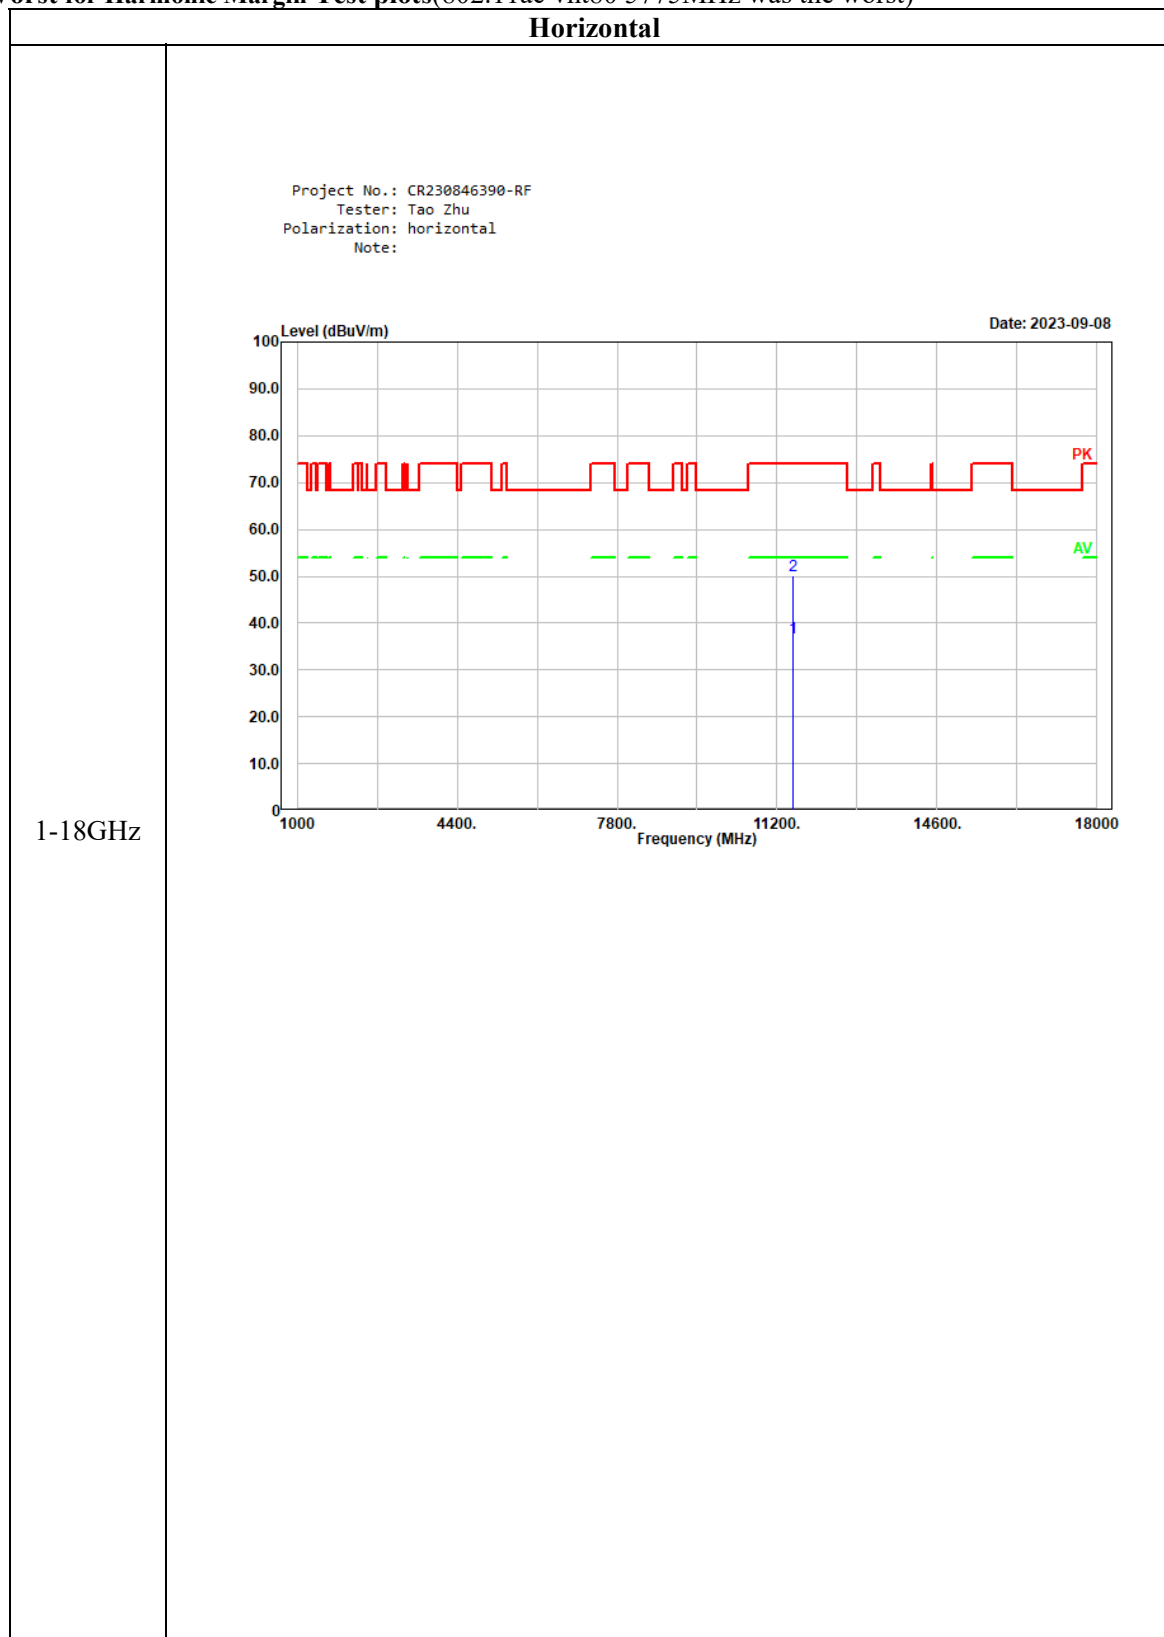
Tester: Tao Zhu

Polarization: Vertical

Note:

Date: 2023-09-08

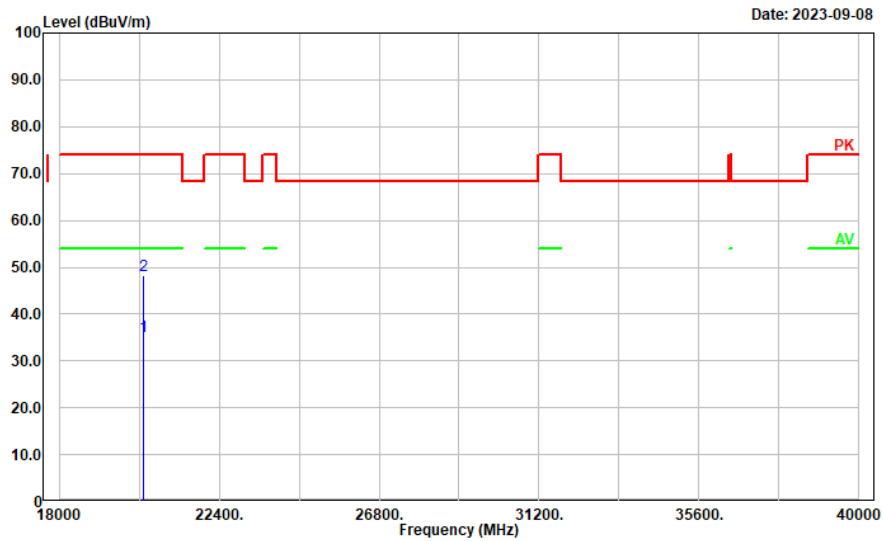


Worst for Harmonic Margin Test plots(802.11ac vht80 5775MHz was the worst)

Horizontal

Project No.: CR230846390-RF
Tester: Tao Zhu
Polarization: Horizontal
Note:

Date: 2023-09-08

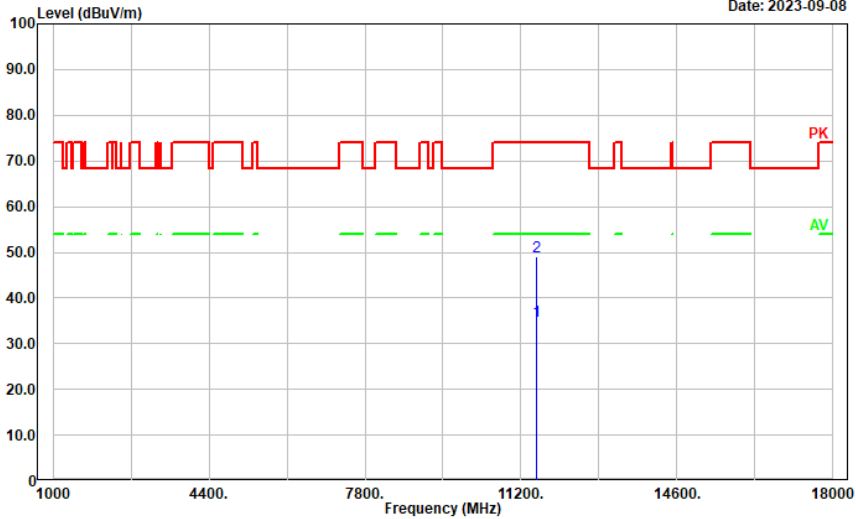


18-40GHz

Vertical

Project No.: CR230846390-RF
Tester: Tao Zhu
Polarization: Vertical
Note:

Date: 2023-09-08

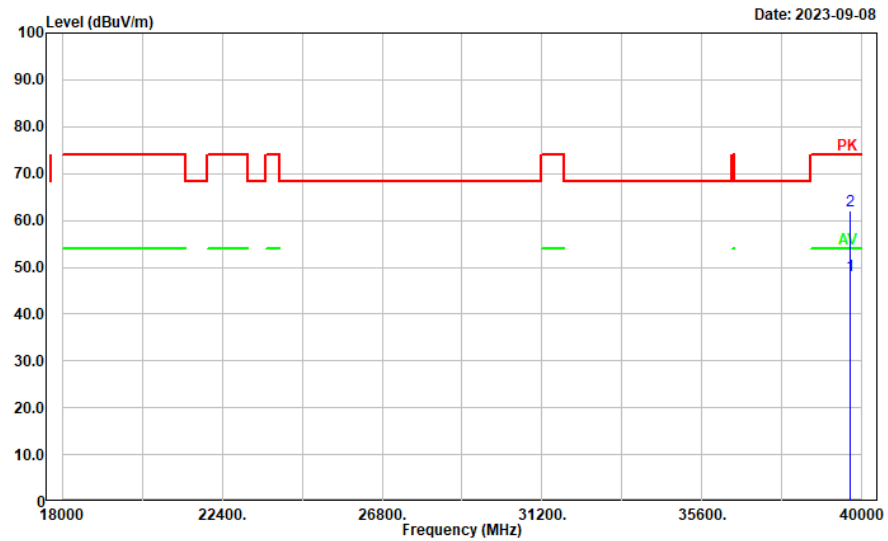


1-18GHz

Vertical

Project No.: CR230846390-RF
Tester: Tao Zhu
Polarization: vertical
Note:

Date: 2023-09-08



18-40GHz

4.3 26dB attenuated below the channel power:

Serial Number:	29PD-2	Test Date:	2023/8/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda Sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

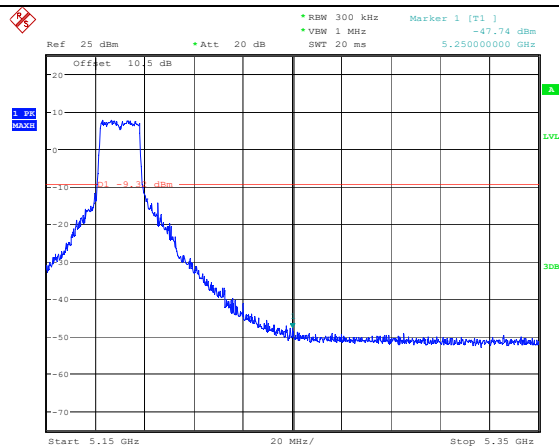
** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

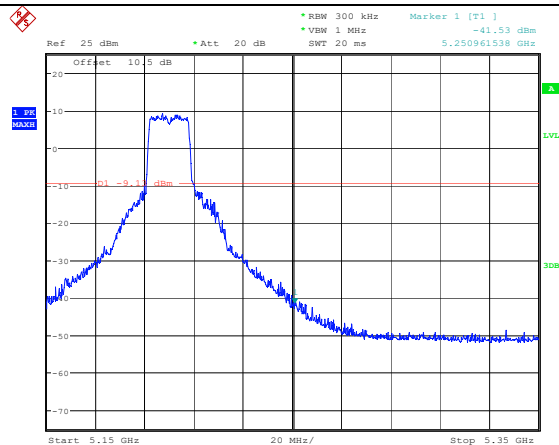
Note: the requirement is for 5150-5250 MHz band. The channel power please refer to the power test result in section 4.5.

5150-5250MHz:

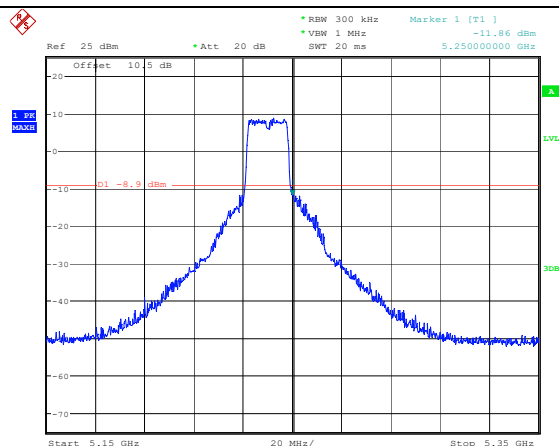
26dB attenuated below the channel power

802.11a
Lowest Channel

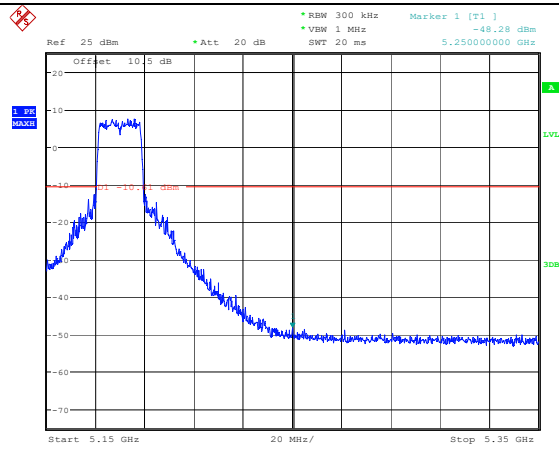
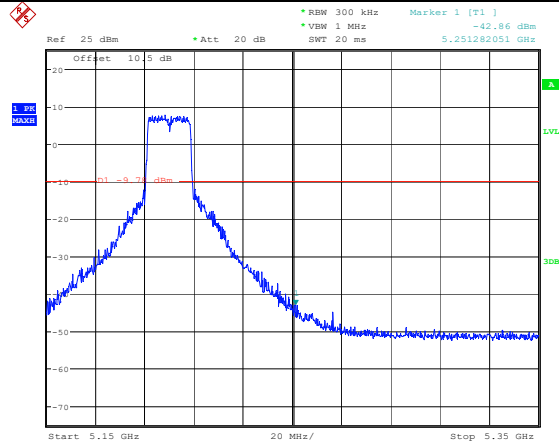
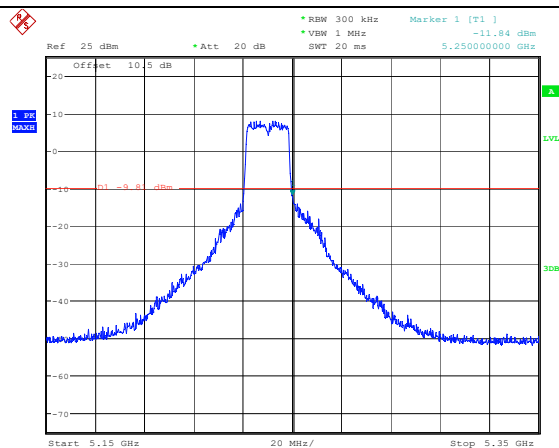
Date: 9.AUG.2023 11:47:43

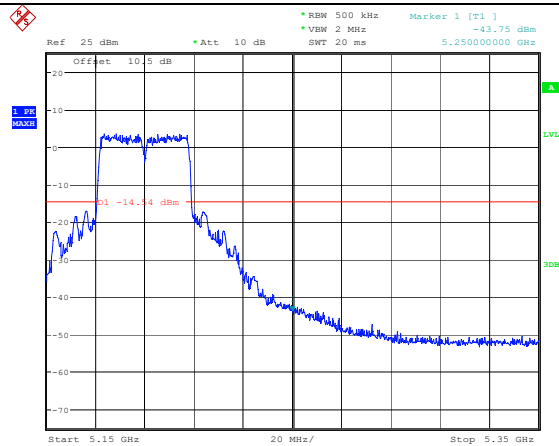
802.11a
Middle Channel

Date: 9.AUG.2023 11:50:05

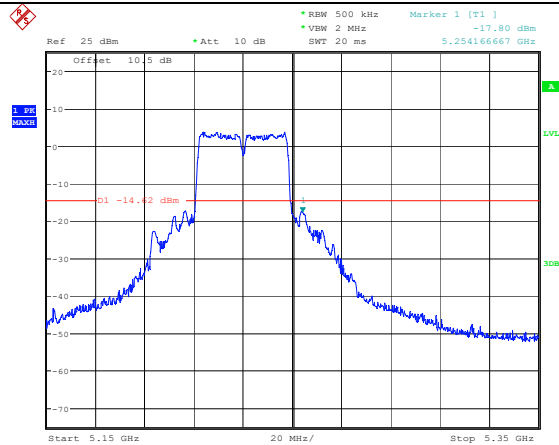
802.11a
Highest Channel

Date: 9.AUG.2023 11:50:49

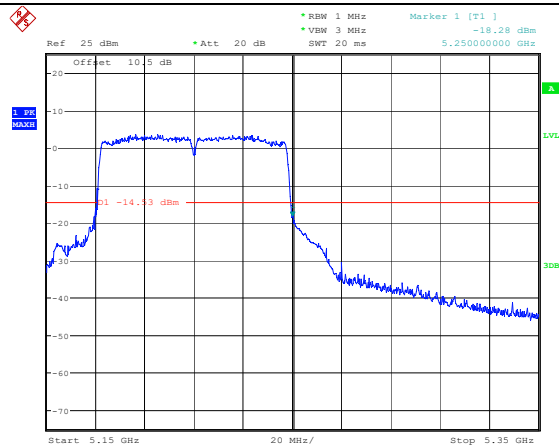
26dB attenuated below the channel power802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel

26dB attenuated below the channel power802.11n ht40
Lowest Channel

Date: 9.AUG.2023 12:17:21

802.11n ht40
Highest Channel

Date: 9.AUG.2023 12:15:30

802.11ac vht80
Middle Channel

Date: 9.AUG.2023 11:58:33

4.4 Emission Bandwidth:

Serial Number:	29PD-2	Test Date:	2023/8/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda Sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	34.24	17.4
	5200	36.16	17.56
	5240	33.56	17.52
802.11n ht20	5180	34.00	18.04
	5200	36.28	18.08
	5240	35.84	18.08
802.11n ht40	5190	54.48	36.8
	5230	54.24	36.8
802.11ac vht80	5210	88.00	75.52
Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.			

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.44	19.84
	5785	16.4	20.4
	5825	16.48	19.12
802.11n ht20	5745	17.32	21.84
	5785	17.32	20.6
	5825	17.60	19.4
802.11n ht40	5755	35.76	40.32
	5795	35.76	38
802.11ac vht80	5775	75.84	76.8
Note: 6dB Emission Bandwidth Limit: ≥ 0.5 MHz the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.			

26dB Emission Bandwidth

Ref 25 dBm Att 30 dB BW 300 kHz Delta 2 [T1] -1.64 dB
VMW 1 MHz SWT 20 ms 34.240000000 MHz

Offset 1015 dB Marker 1 [T1] -1.64 dBm
5.163760000 GHz

1 dB MAX1

Center 5.18 GHz 4 MHz/ Span 40 MHz

Ref 25 dBm * Att 30 dB * RRM 300 kHz Delta 2 [T1] 1.03 dB
 * VIM 1 MHz 36.16000000 GHz
 * SWT 20 ms

Offset 10.5 dB Marker 1 [T1] -10.13 dBm
 5.18340000 GHz

1 PR MAXH

1 2 3dB

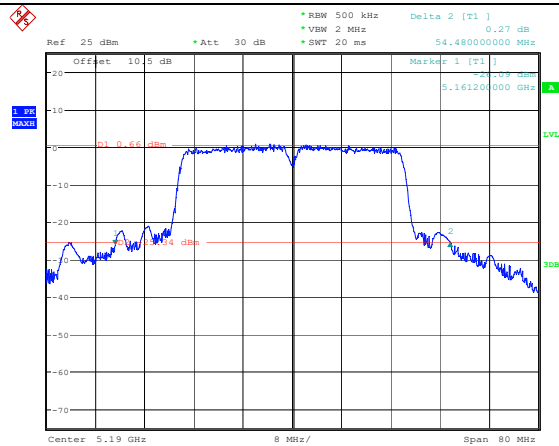
Center 5.2 GHz 4 MHz/ Span 40 MHz

Ref 25 dBm * Att 30 dB * RBW 300 kHz Delta 2 [T1] -0.43 dB
 * VBW 1 MHz 33.560000000 MHz
 * SWT 20 ms

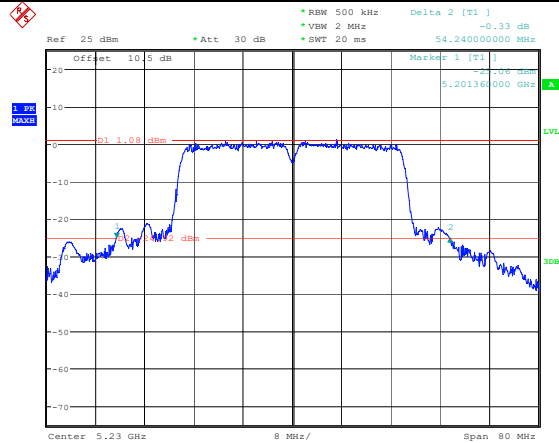
Offset 1015 dB Marker 1 [T1] 5.224200000 GHz
 2.81 dBm
 6.19 dBm

Center 5.24 GHz 4 MHz/ Span 40 MHz

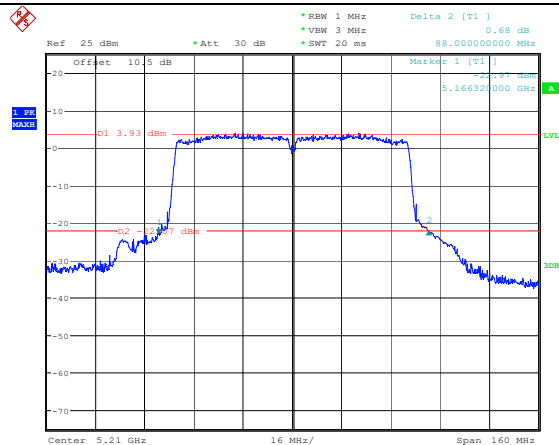
Page 57 of 87

26dB Emission Bandwidth802.11n ht40
Lowest Channel

Date: 9.AUG.2023 10:56:23

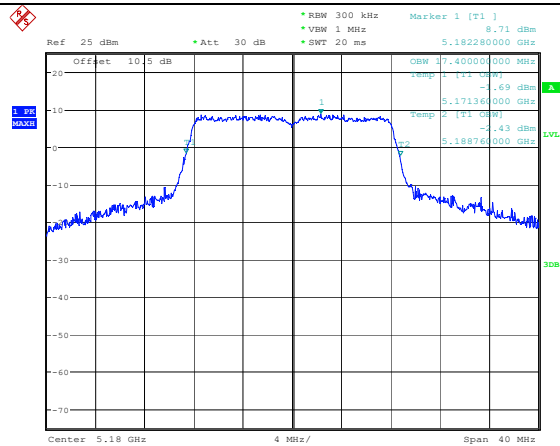
802.11n ht40
Highest Channel

Date: 9.AUG.2023 10:55:03

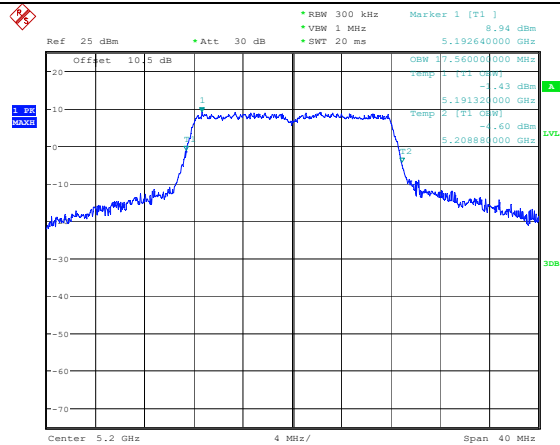
802.11ac vht80
Middle Channel

Date: 9.AUG.2023 10:03:04

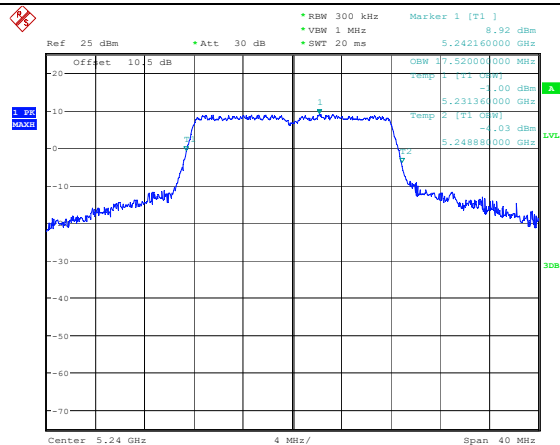
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 9.AUG.2023 09:10:47

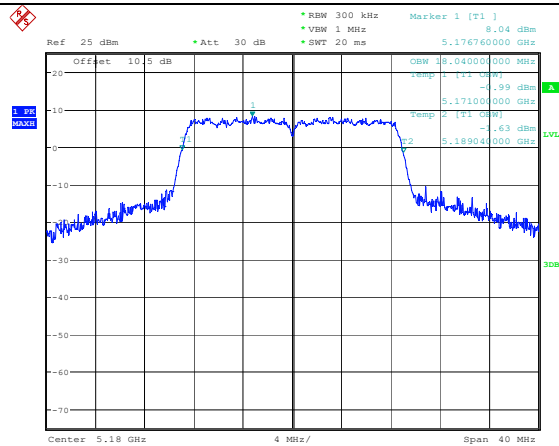
802.11a
Middle Channel

Date: 9.AUG.2023 09:05:24

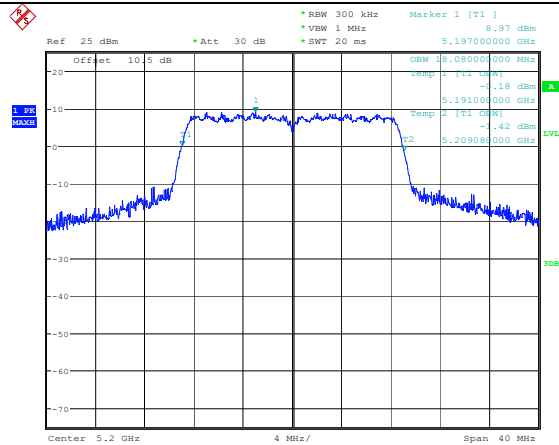
802.11a
Highest Channel

Date: 9.AUG.2023 09:12:59

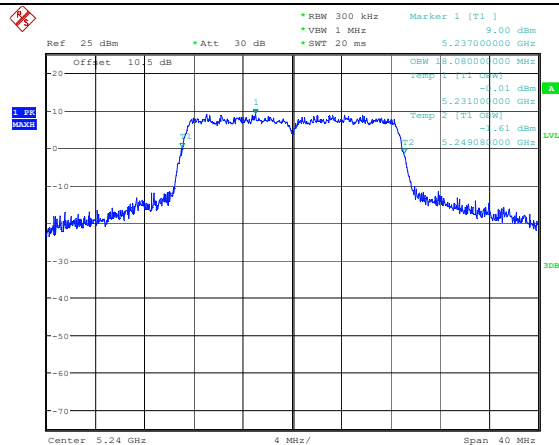
99% Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 9.AUG.2023 09:40:50

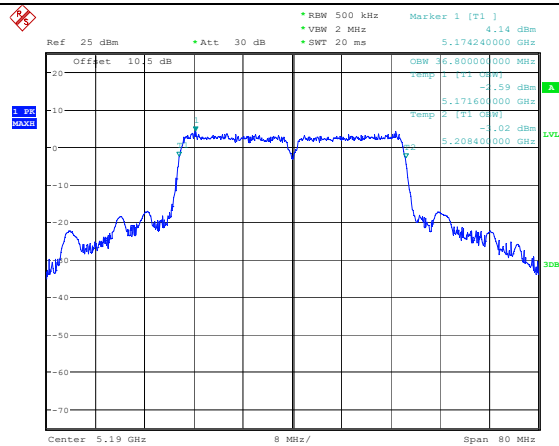
802.11n ht20
Middle Channel

Date: 9.AUG.2023 09:37:01

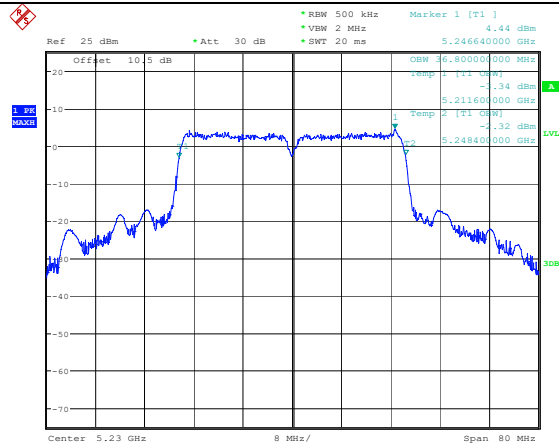
802.11n ht20
Highest Channel

Date: 9.AUG.2023 09:19:32

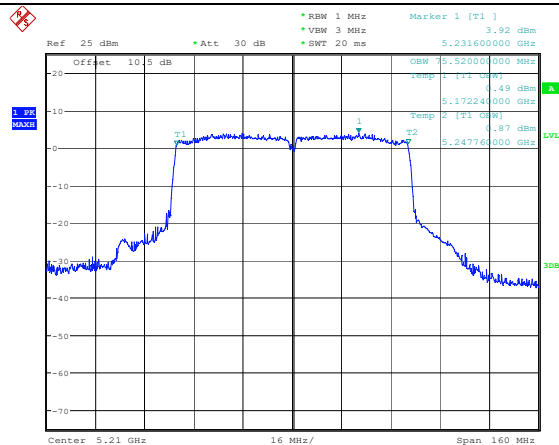
99% Emission Bandwidth

802.11n ht40
Lowest Channel

Date: 9.AUG.2023 09:52:30

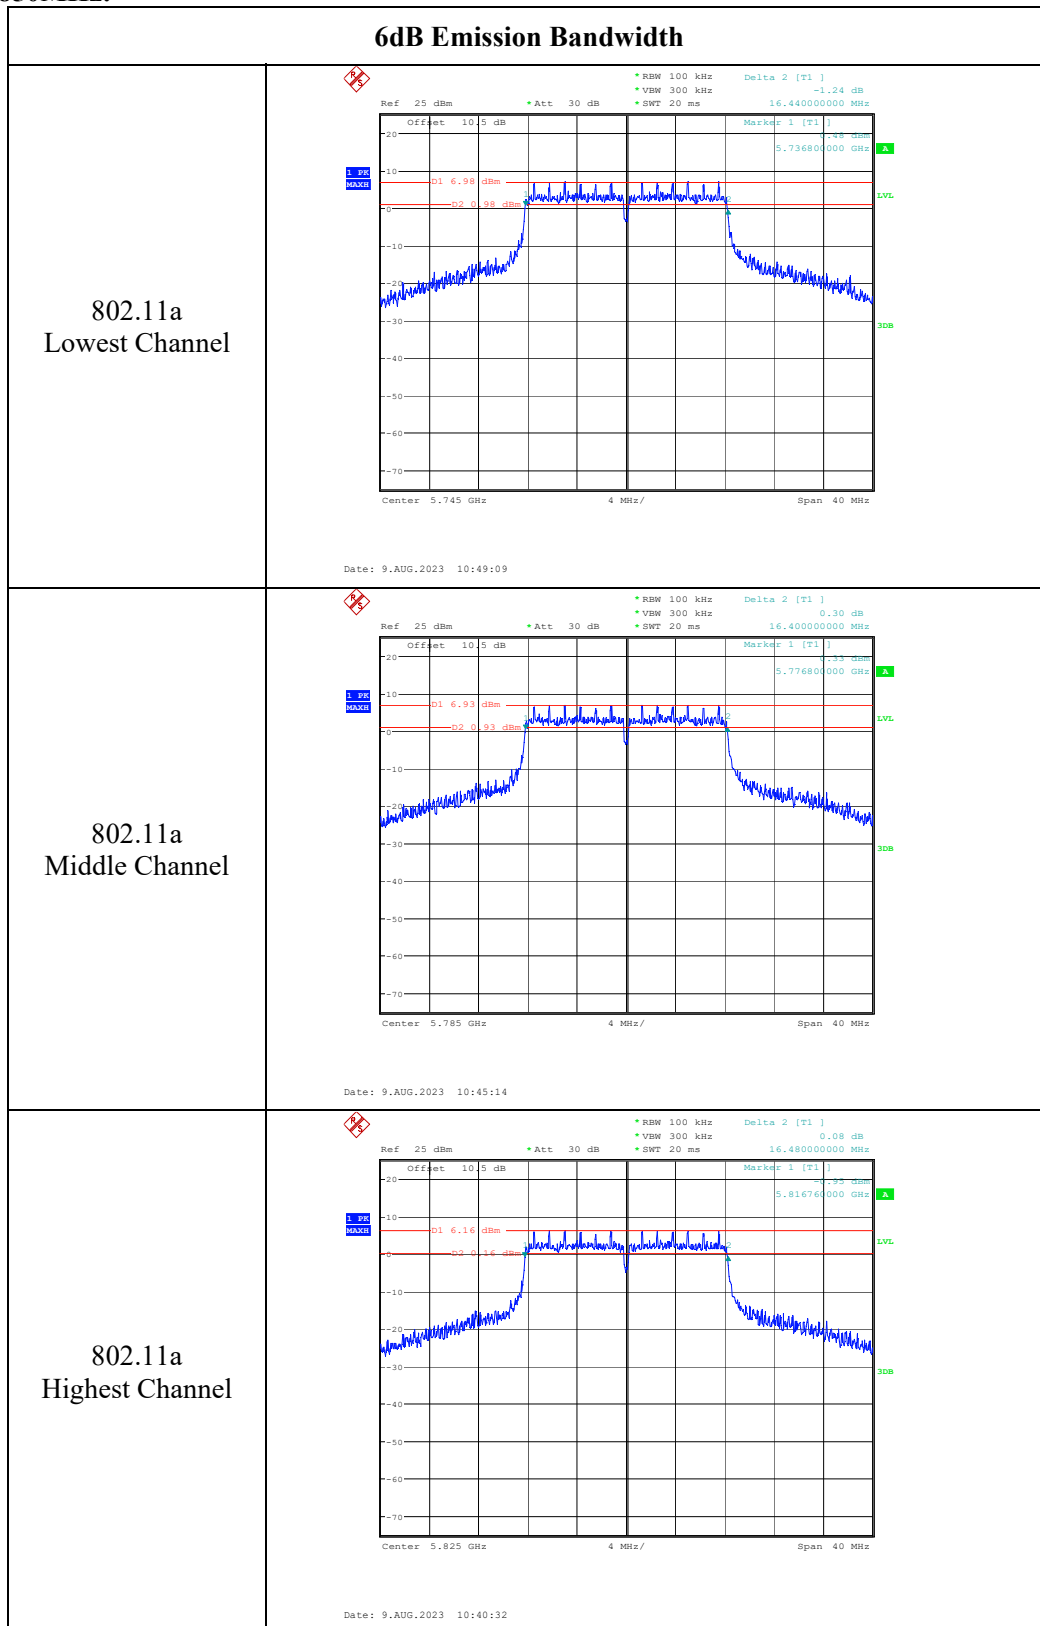
802.11n ht40
Highest Channel

Date: 9.AUG.2023 09:56:42

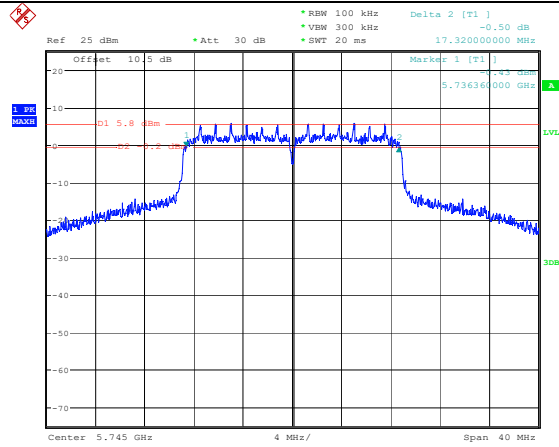
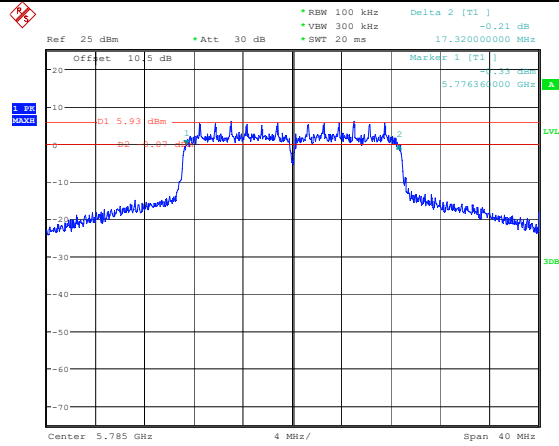
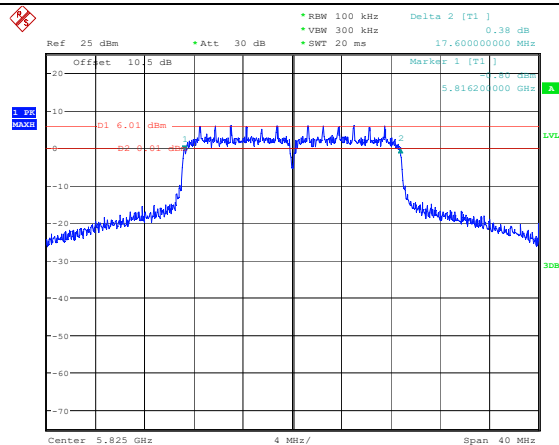
802.11ac vht80
Middle Channel

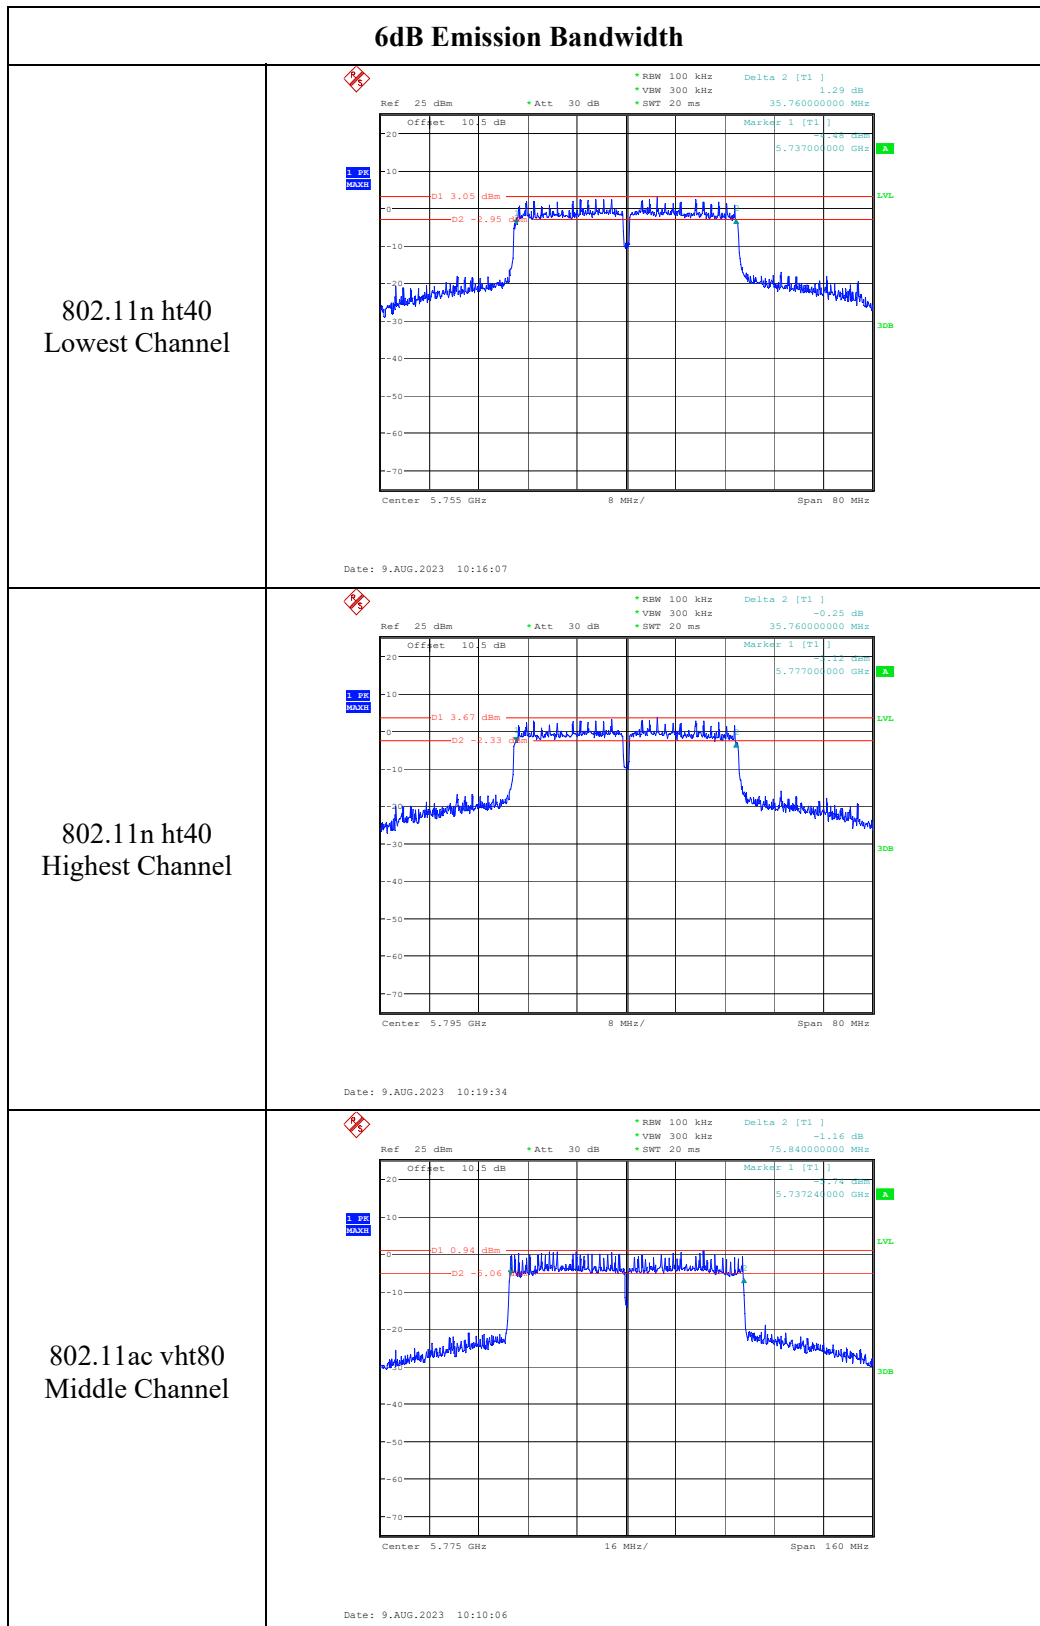
Date: 9.AUG.2023 10:02:33

5725-5850MHz:

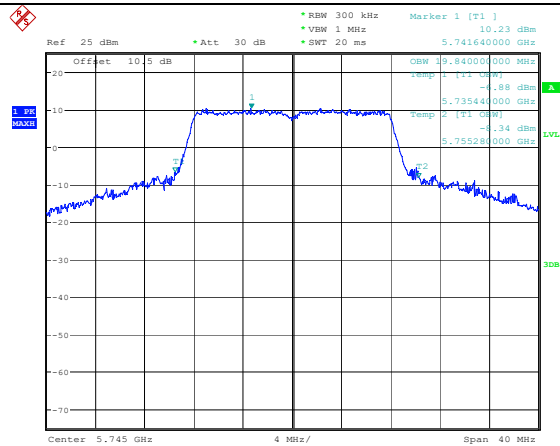


6dB Emission Bandwidth

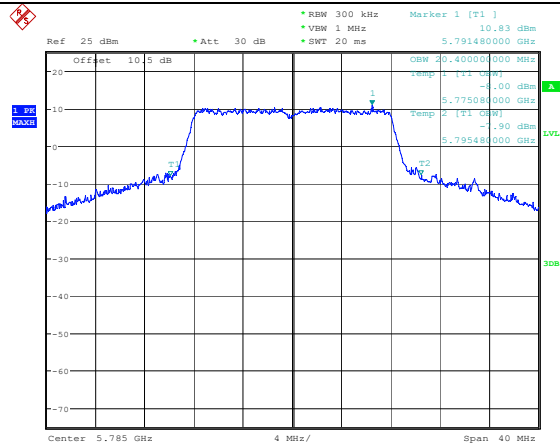
802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel



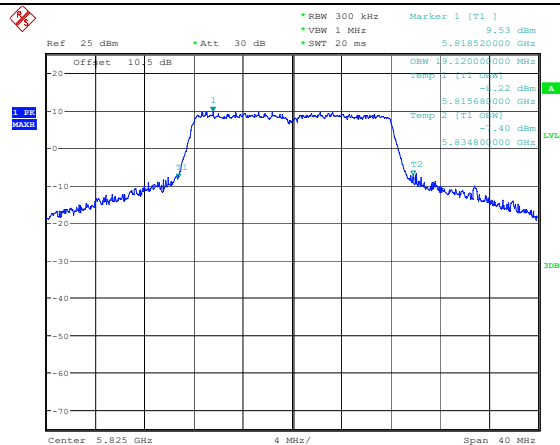
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 9.AUG.2023 10:48:37

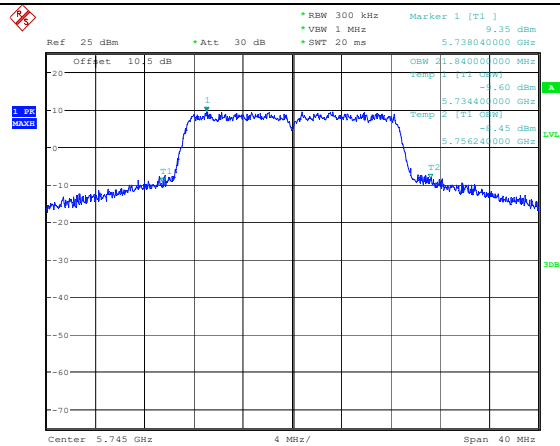
802.11a
Middle Channel

Date: 9.AUG.2023 10:44:43

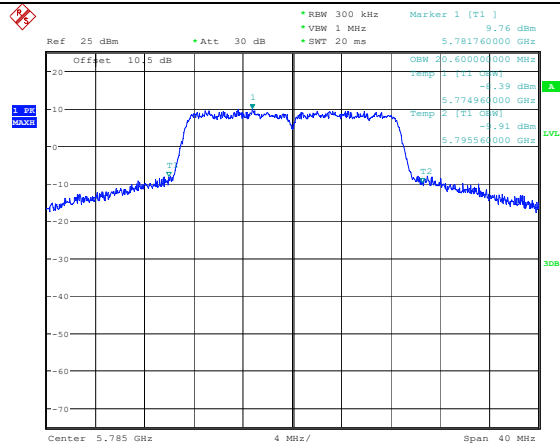
802.11a
Highest Channel

Date: 9.AUG.2023 10:39:59

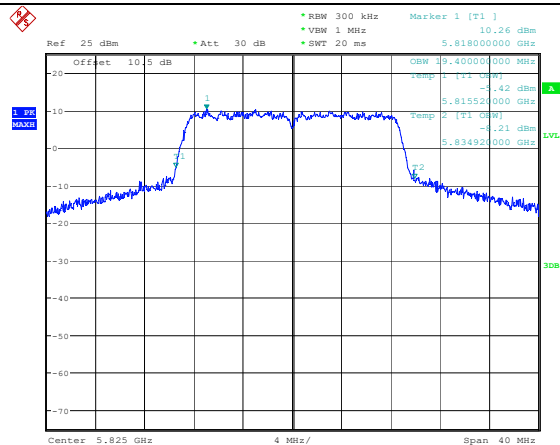
99% Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 9.AUG.2023 10:25:26

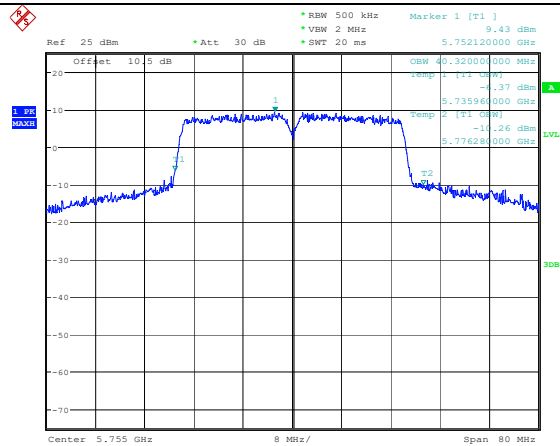
802.11n ht20
Middle Channel

Date: 9.AUG.2023 10:29:49

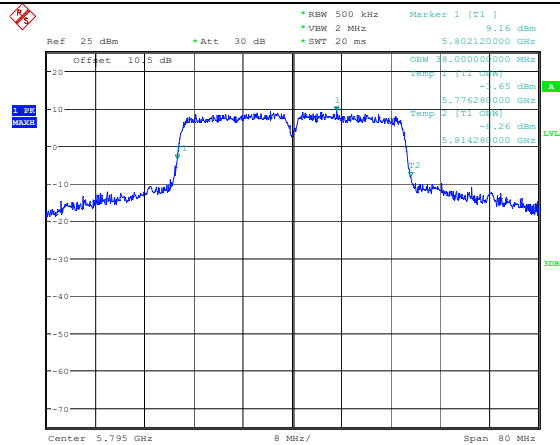
802.11n ht20
Highest Channel

Date: 9.AUG.2023 10:36:32

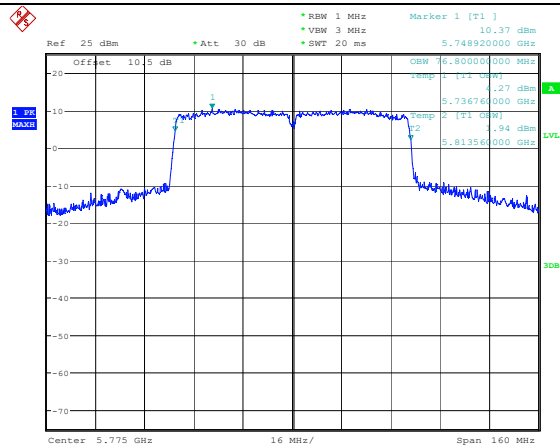
99% Emission Bandwidth

802.11n ht40
Lowest Channel

Date: 9.AUG.2023 10:15:36

802.11n ht40
Highest Channel

Date: 9.AUG.2023 10:19:03

802.11ac vht80
Middle Channel

Date: 9.AUG.2023 10:52:01

4.5 Maximum Conducted Output Power:

Serial Number:	29PD-2	Test Date:	2023/8/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda Sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)		EIRP (dBm)	
		Result	FCC Limit	Result	RSS-247 Limit
802.11a	5180	16.68	24	17.58	22.41
	5200	16.87	24	17.77	22.45
	5240	17.10	24	18.00	22.44
802.11n ht20	5180	15.39	24	16.29	22.56
	5200	16.22	24	17.12	22.57
	5240	16.19	24	17.09	22.57
802.11n ht40	5190	11.46	24	12.36	23.00
	5230	11.38	24	12.28	23.00
802.11ac vht80	5210	11.47	24	12.37	23.00

Note:

The duty cycle factor has been calculated into the test data.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)	
		Result	Limit
802.11a	5745	18.1	30
	5785	17.75	30
	5825	17.42	30
802.11n ht20	5745	16.9	30
	5785	16.88	30
	5825	17.31	30
802.11n ht40	5755	16.58	30
	5795	16.38	30
802.11ac vht80	5775	16.86	30
Note: The duty cycle factor has been calculated into the test data.			

4.6 Maximum power spectral density:

Serial Number:	29PD-2	Test Date:	2023/8/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda Sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

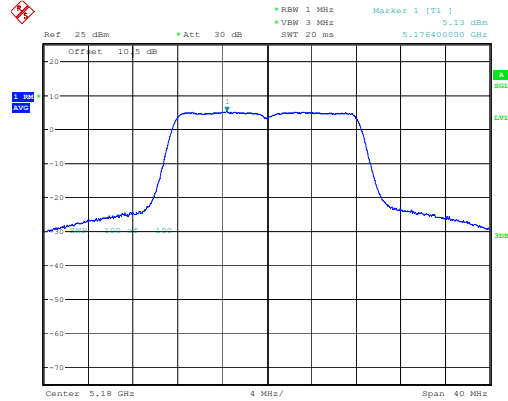
Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Maximum Conducted Power Spectral Density (dBm/MHz)		Maximum EIRP Power Spectral Density (dBm/MHz)	
				Result	FCC Limit	Result	RSS-247 Limit
802.11a	5180	5.13	0.43	5.56	11	6.46	10
	5200	5.35	0.43	5.78	11	6.68	10
	5240	5.49	0.43	5.92	11	6.82	10
802.11n ht20	5180	4.08	0.53	4.61	11	5.51	10
	5200	4.65	0.53	5.18	11	6.08	10
	5240	4.48	0.53	5.01	11	5.91	10
802.11n ht40	5190	-3.37	1.05	-2.32	11	-1.42	10
	5230	-3.33	1.05	-2.28	11	-1.38	10
802.11ac vht80	5210	-7.45	1.72	-5.73	11	-4.83	10

5725-5850 MHz:

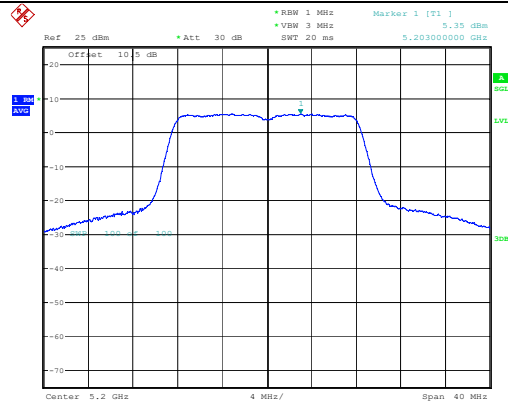
Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
				Result	Limit
802.11a	5745	3.59	0.43	4.02	30
	5785	3.49	0.43	3.92	30
	5825	2.79	0.43	3.22	30
802.11n ht20	5745	2.23	0.53	2.76	30
	5785	1.53	0.53	2.06	30
	5825	3.27	0.53	3.80	30
802.11n ht40	5755	-1.36	1.05	-0.31	30
	5795	-0.75	1.05	0.30	30
802.11ac vht80	5775	-5.01	1.72	-3.29	30

5150-5250MHz:

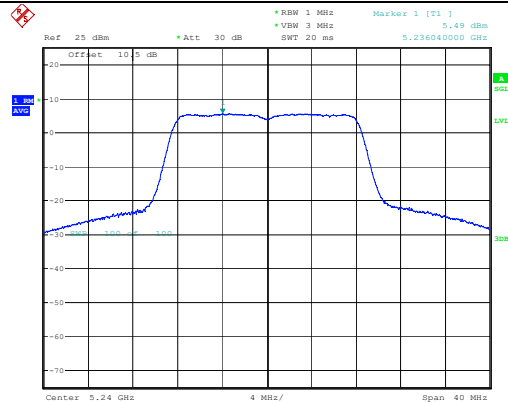
Maximum power spectral density

802.11a
Lowest Channel

Date: 9.AUG.2023 09:09:52

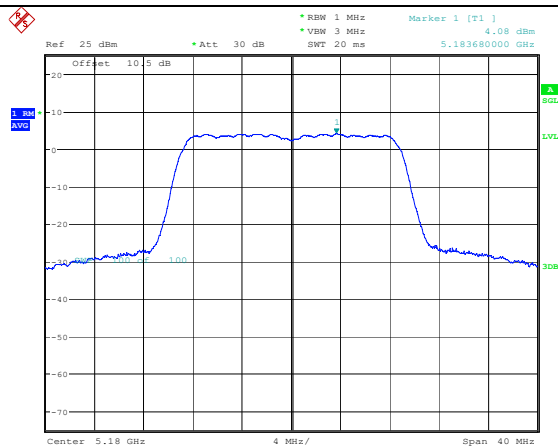
802.11a
Middle Channel

Date: 9.AUG.2023 09:06:12

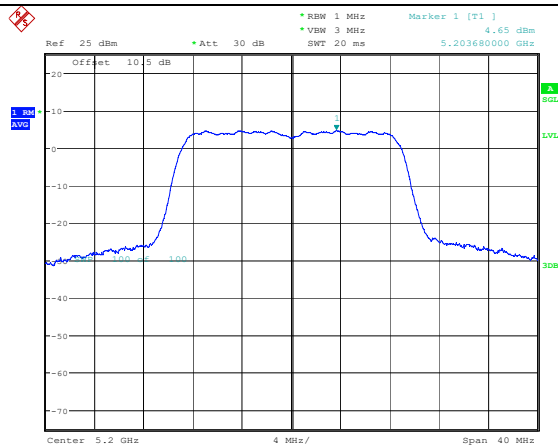
802.11a
Highest Channel

Date: 9.AUG.2023 09:14:24

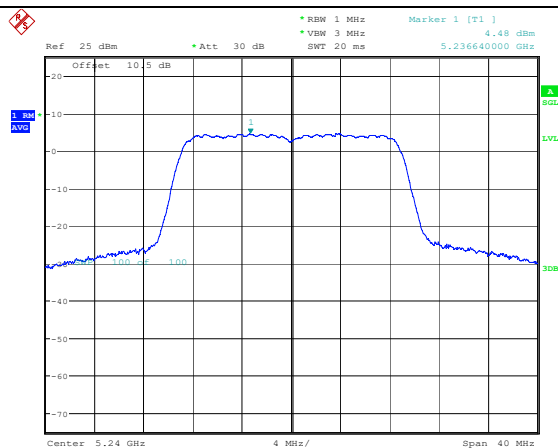
Maximum power spectral density

802.11n ht20
Lowest Channel

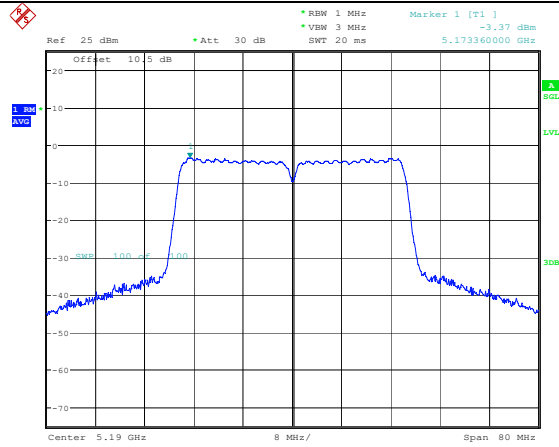
Date: 9.AUG.2023 09:42:41

802.11n ht20
Middle Channel

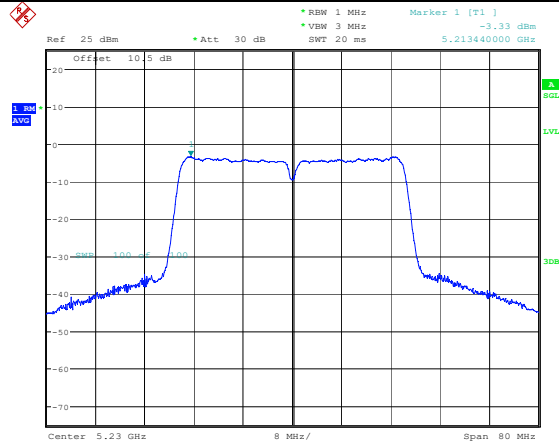
Date: 9.AUG.2023 09:35:14

802.11n ht20
Highest Channel

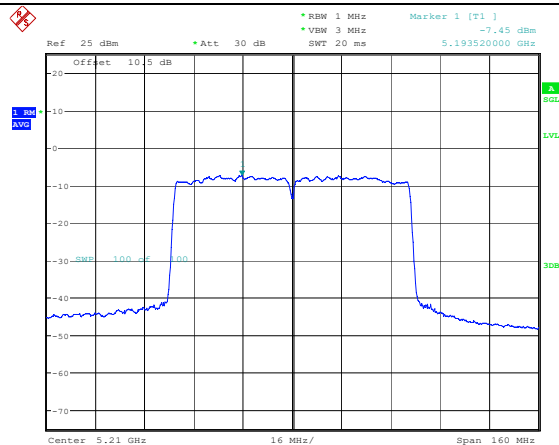
Date: 9.AUG.2023 09:20:40

Maximum power spectral density802.11n ht40
Lowest Channel

Date: 9.AUG.2023 09:53:20

802.11n ht40
Highest Channel

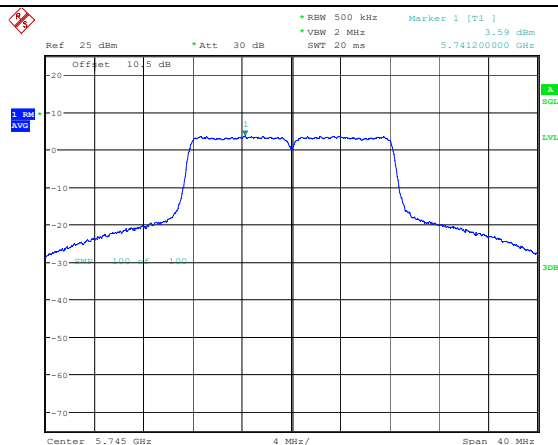
Date: 9.AUG.2023 09:57:32

802.11ac vht80
Middle Channel

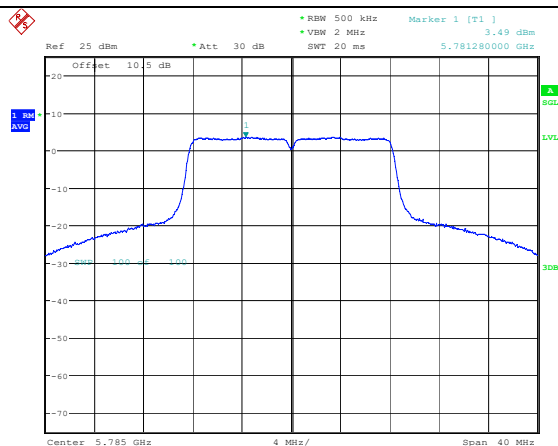
Date: 9.AUG.2023 10:03:22

5725-5850MHz

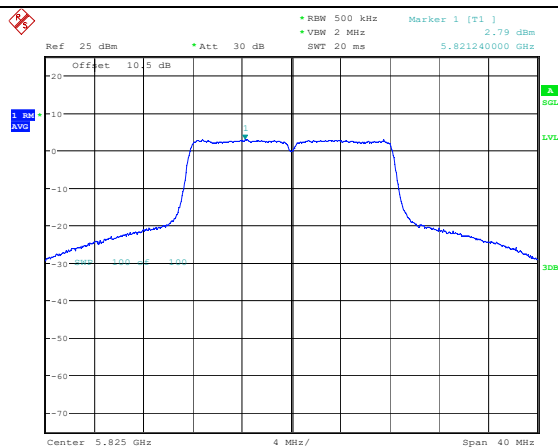
Maximum power spectral density

802.11a
Lowest Channel

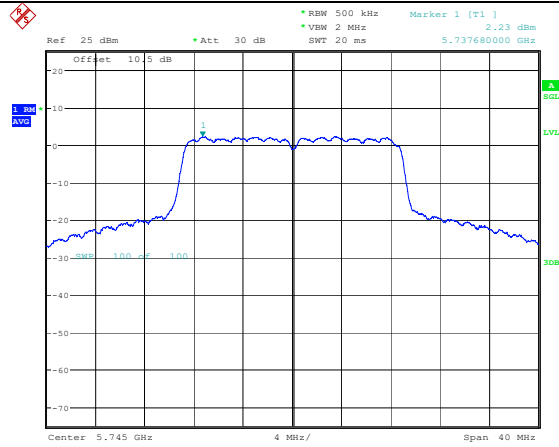
Date: 9.AUG.2023 10:49:24

802.11a
Middle Channel

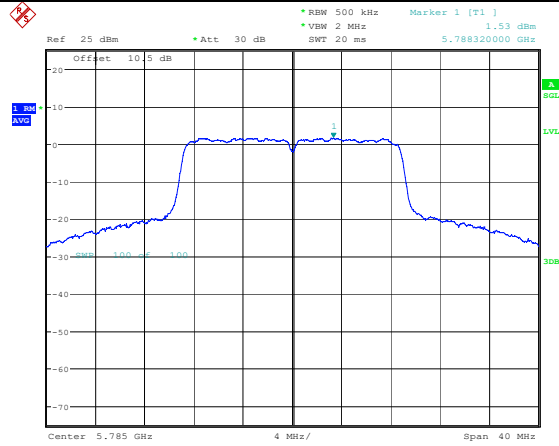
Date: 9.AUG.2023 10:45:28

802.11a
Highest Channel

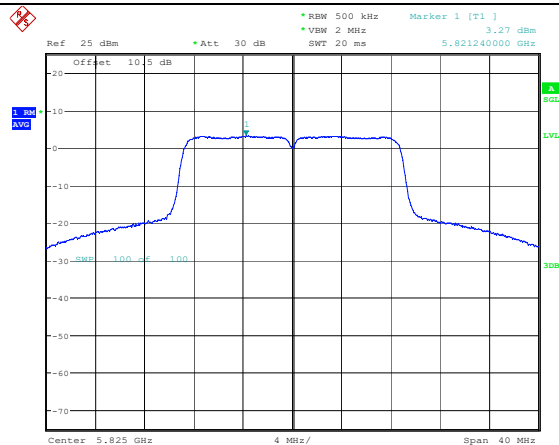
Date: 9.AUG.2023 10:40:48

Maximum power spectral density802.11n ht20
Lowest Channel

Date: 9.AUG.2023 10:26:12

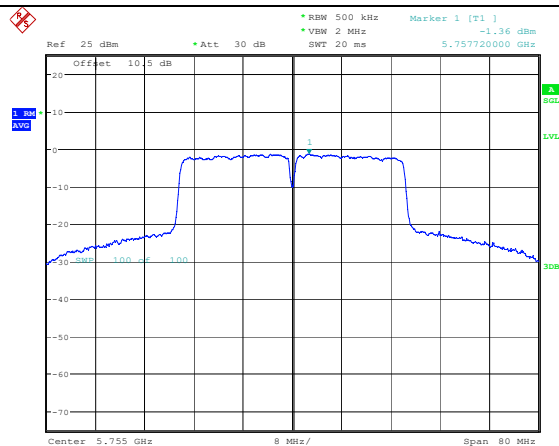
802.11n ht20
Middle Channel

Date: 9.AUG.2023 10:31:26

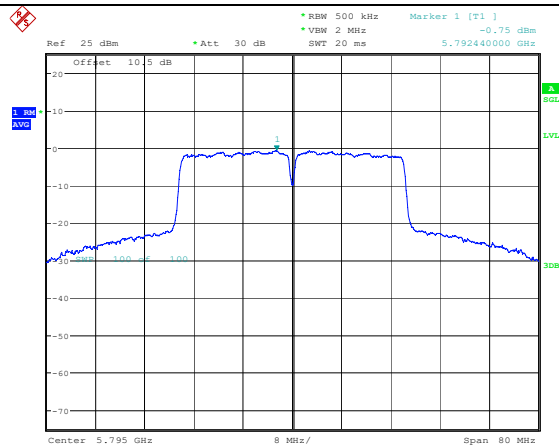
802.11n ht20
Highest Channel

Date: 9.AUG.2023 10:37:23

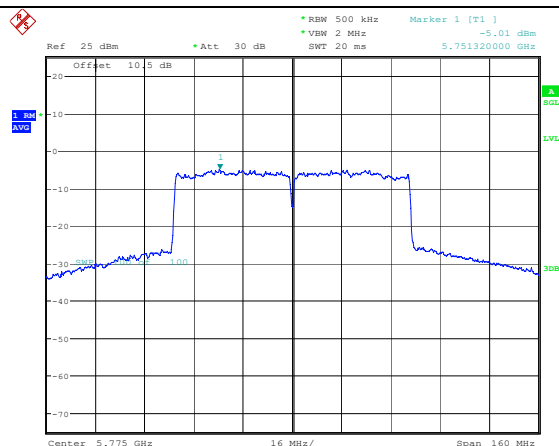
Maximum power spectral density

802.11n ht40
Lowest Channel

Date: 9.AUG.2023 10:17:05

802.11n ht40
Highest Channel

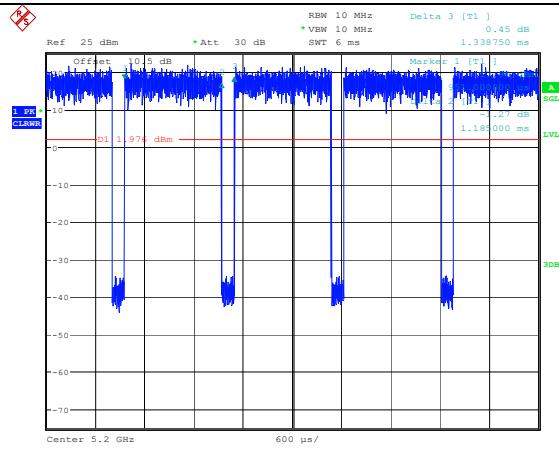
Date: 9.AUG.2023 10:19:52

802.11 ac 80
Middle Channel

Date: 9.AUG.2023 10:10:29

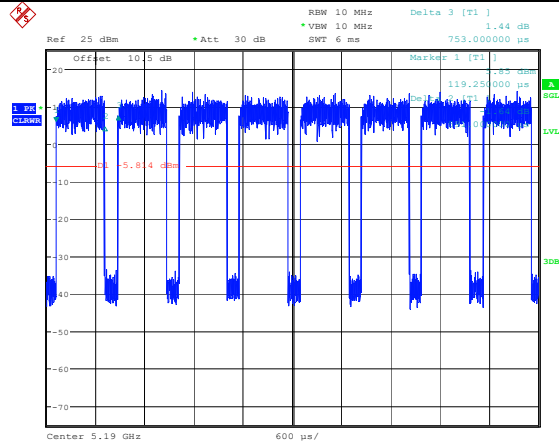
Duty Cycle

802.11n ht20



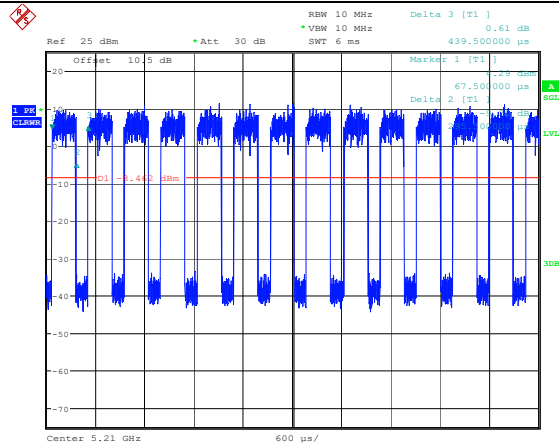
Date: 9.AUG.2023 09:33:21

802.11n ht40



Date: 9.AUG.2023 09:51:33

802.11ac vht80



Date: 9.AUG.2023 10:01:35

4.7 Frequency Stability:

Serial Number:	29PD-2	Test Date:	2023/10/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda Sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.4	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.5
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**5150-5250 MHz:**

Test Channel:	Lowest for Lower Edge, Highest for Upper Edge					
Test Mode:	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
802.11a	-20	4.4	5171.5500	5150.000	5248.9700	5250.000
	20	4.4	5172.0000	5150.000	5249.7100	5250.000
	50	4.4	5171.7600	5150.000	5248.9600	5250.000
	-20	3.8	5172.1000	5150.000	5249.1000	5250.000
	20	3.8	5171.3600	5150.000	5248.8800	5250.000
	50	3.8	5172.2000	5150.000	5249.4200	5250.000
	-20	3.45	5172.2000	5150.000	5249.0400	5250.000
	20	3.45	5172.2700	5150.000	5249.5700	5250.000
	50	3.45	5171.3700	5150.000	5249.4600	5250.000
Result:					Pass	

Test Channel:	Lowest for Lower Edge, Highest for Upper Edge					
Test Mode:	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
802.11n ht20	-20	4.4	5170.4800	5150.000	5249.4700	5250.000
	20	4.4	5170.3800	5150.000	5249.2500	5250.000
	50	4.4	5170.1900	5150.000	5249.8700	5250.000
	-20	3.8	5170.0500	5150.000	5249.6400	5250.000
	20	3.8	5170.0000	5150.000	5249.0800	5250.000
	50	3.8	5170.2500	5150.000	5249.2500	5250.000
	-20	3.45	5170.1900	5150.000	5249.4000	5250.000
	20	3.45	5170.1700	5150.000	5249.1100	5250.000
	50	3.45	5170.5100	5150.000	5249.6400	5250.000
Result:					Pass	

Test Channel:	Lowest for Lower Edge, Highest for Upper Edge					
Test Mode:	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
802.11n ht40	-20	4.4	5171.6100	5150.000	5248.4300	5250.000
	20	4.4	5171.6800	5150.000	5248.4200	5250.000
	50	4.4	5171.6700	5150.000	5248.4600	5250.000
	-20	3.8	5171.6700	5150.000	5248.4000	5250.000
	20	3.8	5171.6000	5150.000	5248.4000	5250.000
	50	3.8	5171.6400	5150.000	5248.4500	5250.000
	-20	3.45	5171.6800	5150.000	5248.4900	5250.000
	20	3.45	5171.6300	5150.000	5248.4300	5250.000
	50	3.45	5171.6900	5150.000	5248.4000	5250.000
Result:					Pass	

Test Channel:	Lowest for Lower Edge, Highest for Upper Edge					
Test Mode:	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
802.11ac vht80	-20	4.4	5172.3300	5150.000	5247.8100	5250.000
	20	4.4	5172.2900	5150.000	5247.8400	5250.000
	50	4.4	5172.3400	5150.000	5247.7600	5250.000
	-20	3.8	5172.3100	5150.000	5247.8100	5250.000
	20	3.8	5172.2400	5150.000	5247.7500	5250.000
	50	3.8	5172.2400	5150.000	5247.7600	5250.000
	-20	3.45	5172.2400	5150.000	5247.7700	5250.000
	20	3.45	5172.3200	5150.000	5247.7800	5250.000
	50	3.45	5172.2900	5150.000	5247.7900	5250.000
					Result:	Pass

5725-5850 MHz:

Test Channel:	Lowest for Lower Edge, Highest for Upper Edge					
Test Mode:	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
802.11a	-20	4.4	5735.5000	5725.000	5834.9000	5850.000
	20	4.4	5735.5100	5725.000	5834.8300	5850.000
	50	4.4	5735.5000	5725.000	5834.8200	5850.000
	-20	3.8	5735.4900	5725.000	5834.8600	5850.000
	20	3.8	5735.4400	5725.000	5834.8000	5850.000
	50	3.8	5735.5100	5725.000	5834.8200	5850.000
	-20	3.45	5735.4400	5725.000	5834.8400	5850.000
	20	3.45	5735.4600	5725.000	5834.8500	5850.000
	50	3.45	5735.5300	5725.000	5834.8800	5850.000
					Result:	Pass

Test Channel:	Lowest for Lower Edge, Highest for Upper Edge					
Test Mode:	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
802.11n ht20	-20	4.4	5734.4500	5725.000	5834.9400	5850.000
	20	4.4	5734.4100	5725.000	5835.0000	5850.000
	50	4.4	5734.4300	5725.000	5834.9900	5850.000
	-20	3.8	5734.4400	5725.000	5834.9800	5850.000
	20	3.8	5734.4000	5725.000	5834.9200	5850.000
	50	3.8	5734.4000	5725.000	5834.9500	5850.000
	-20	3.45	5734.4800	5725.000	5834.9400	5850.000
	20	3.45	5734.4800	5725.000	5834.9700	5850.000
	50	3.45	5734.4600	5725.000	5834.9600	5850.000
					Result:	Pass

Test Channel:	Lowest for Lower Edge, Highest for Upper Edge					
Test Mode:	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
802.11n ht40	-20	4.4	5736.0200	5725.000	5814.3500	5850.000
	20	4.4	5735.9900	5725.000	5814.3800	5850.000
	50	4.4	5736.0500	5725.000	5814.3600	5850.000
	-20	3.8	5736.0400	5725.000	5814.3500	5850.000
	20	3.8	5735.9600	5725.000	5814.2800	5850.000
	50	3.8	5735.9800	5725.000	5814.2800	5850.000
	-20	3.45	5736.0000	5725.000	5814.2800	5850.000
	20	3.45	5736.0300	5725.000	5814.2900	5850.000
	50	3.45	5735.9800	5725.000	5814.3800	5850.000
					Result:	Pass

Test Channel:	Lowest for Lower Edge, Highest for Upper Edge					
Test Mode:	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
802.11ac vht80	-20	4.4	5736.8100	5725.000	5813.6400	5850.000
	20	4.4	5736.8500	5725.000	5813.6500	5850.000
	50	4.4	5736.8300	5725.000	5813.6200	5850.000
	-20	3.8	5736.8000	5725.000	5813.5700	5850.000
	20	3.8	5736.7600	5725.000	5813.5600	5850.000
	50	3.8	5736.8200	5725.000	5813.6500	5850.000
	-20	3.45	5736.7900	5725.000	5813.6500	5850.000
	20	3.45	5736.8400	5725.000	5813.6400	5850.000
	50	3.45	5736.8000	5725.000	5813.6400	5850.000
					Result:	Pass

5. EUT PHOTOGRAPHS

Please refer to the attachment CR230846390-EXP EUT EXTERNAL PHOTOGRAPHS and CR230846390-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230846390-00D-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====