



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: Oct 21,2020 ~ Oct 28,2020

Test Report S/N: LR500112011Q

Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID

2ATZYSDK-0502

APPLICANT

SONIC DUTCH KOREA Co.,Ltd.

Equipment Class	:	Part 15 Spread Spectrum Transmitter (DSS)
Manufacturing Description	:	Coffee Pot
Manufacturer	:	SONIC DUTCH KOREA Co.,Ltd.
Model name	:	SDK-0502
Variant Model name	:	-
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013
Frequency Range	:	BDR,EDR (2402 ~ 2480 MHz)
RF power	:	Max 5.27 dBm - Conducted
Data of issue	:	

This test report is issued under the authority of:

Ja-Beom, Koo

Ja-Beom Koo, Manager

The test was supervised by:

Gyeong hun, Ko

Gyeong hun KO, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP[®]

NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	3
2. INFORMATION ABOUT TEST ITEM -----	4
3. TEST REPORT -----	5
3.1 SUMMARY OF TESTS -----	5
3.2 FREQUENCY HOPPING SYSTEM REQUIREMENTS-----	6
3.3 TECHNICAL CHARACTERISTICS TEST -----	7
3.3.1 CARRIER FREQUENCY SEPARATION -----	7
3.3.2 NUMBER OF HOPPING FREQUENCIES -----	9
3.3.3 20 dB BANDWIDTH -----	11
3.3.4 TIME OF OCCUPANCY (Dwell Time) -----	18
3.3.5 TRANSMITTER OUTPUT POWER -----	20
3.3.6 BAND EDGE -----	22
3.3.7 CONDUCTED SPURIOUS EMISSIONS -----	25
3.3.8 RADIATED SPURIOUS EMISSIONS -----	30
3.3.9 AC Conducted Emissions -----	66

APPENDIX

APPENDIX TEST EQUIPMENT USED FOR TESTS -----	69
--	----

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2021-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2021-04-13	FCC CAB
VCCI	JAPAN	C-4948,	2021-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2021-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2021-10-15	VCCI registration
VCCI	JAPAN	G-847	2021-12-13	VCCI registration
IC	CANADA	5799A-1	updating	IC filing
KOLAS	KOREA	NO.551	2021-08-20	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Client Company name : SONIC DUTCH KOREA Co.,Ltd
 Address : 410, 160, Hyanggyo-ro, Paldal-gu, Suwon-si, Gyeonggi-do, Korea.
 Tel / Fax : +82-31-247-3999 / +82-31-247-3999
 Manufacturer : SONIC DUTCH KOREA Co.,Ltd
 Address : 410, 160, Hyanggyo-ro, Paldal-gu, Suwon-si, Gyeonggi-do, Korea.
 Tel / Fax : +82-31-247-3999 / +82-31-247-3999

2-2 Equipment Under Test (EUT)

Model name : SDK-0502
 Serial number : Identical prototype
 Date of receipt : OCT 29, 2020
 EUT condition : Pre-production, not damaged
 Antenna type : Pattern Antenna (Max Gain : 0 dBi)
 Frequency Range : 2402 ~ 2480MHz
 RF output power : Max 5.27 dBm – Conducted
 Type of Modulation : GFSK
 Power Source : AC 120 V
 Firmware Version : V0.1

2-3 Tested frequency

Bluetooth	LOW	MID	HIGH
Frequency (MHz) –	2402	2442	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	-	MS-1736	MSI

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	$\geq 2/3$ of 20dB BW	Conducted	C
15.247(a)	Number of Hopping Frequencies	≥ 15 channels		C
15.247(a)	20 dB Bandwidth 99% Bandwidth	—		C
15.247(a)	Dwell Time	≤ 0.4 seconds		C
15.247(b)	Transmitter Output Power	$\leq 1W$ for 1Mbps $\leq 125mW$ for 2,3Mbps		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.109	Field Strength	—		C
15.207 /15.107	AC Conducted Emissions	EN 55022	Line Conducted	N/A
15.203	Antenna requirement	—	—	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: This product operates only with battery and does not operate during charging.

Note 1: Antenna Requirement

Alien Technology Asia. FCC ID: 2ATZYSDK-0502 unit complies with the requirement of §15.203.

The antenna type is Pattern Antenna

The sample was tested according to the following specification:

*FCC Parts 15.247; ANSI C-63.4-2014;ANSI C-63.10-2013

*FCC KDB Publication No. 558074 D01 v03r05

*FCC TCB Workshop 2012, April

3.2 Frequency Hopping System Requirements

3.2.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.3 TECHNICAL CHARACTERISTIC TEST

3.3.1 Carrier Frequency Separation

Procedure:

The test follows ANSI C63.10. The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 2~3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1% of the span or more) Sweep = auto

VBW = 10 kHz Detector function = peak

Trace = max hold

Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
2.001 (BDR)	Complies
1.999 (EDR)	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of 20 dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup


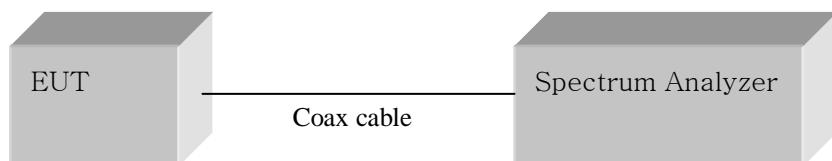



Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency Separation

BDR Mode

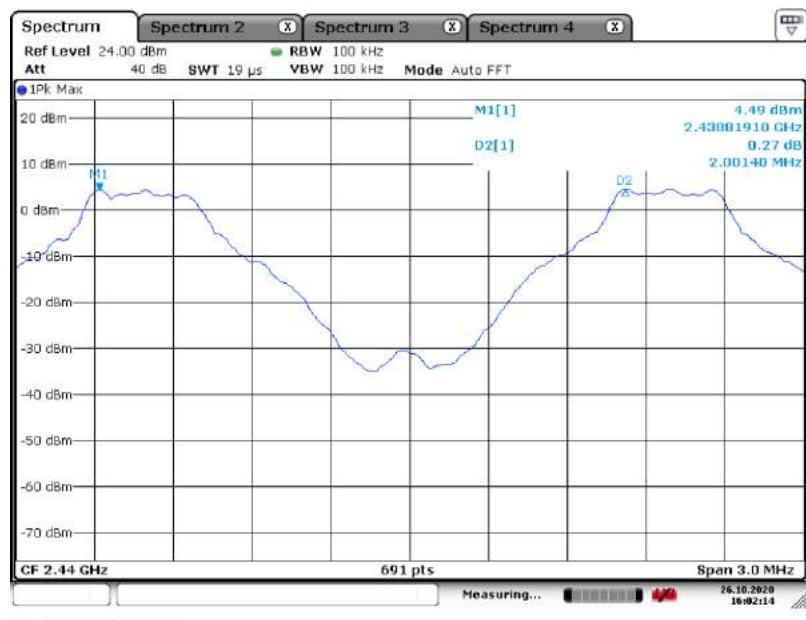

EDR Mode

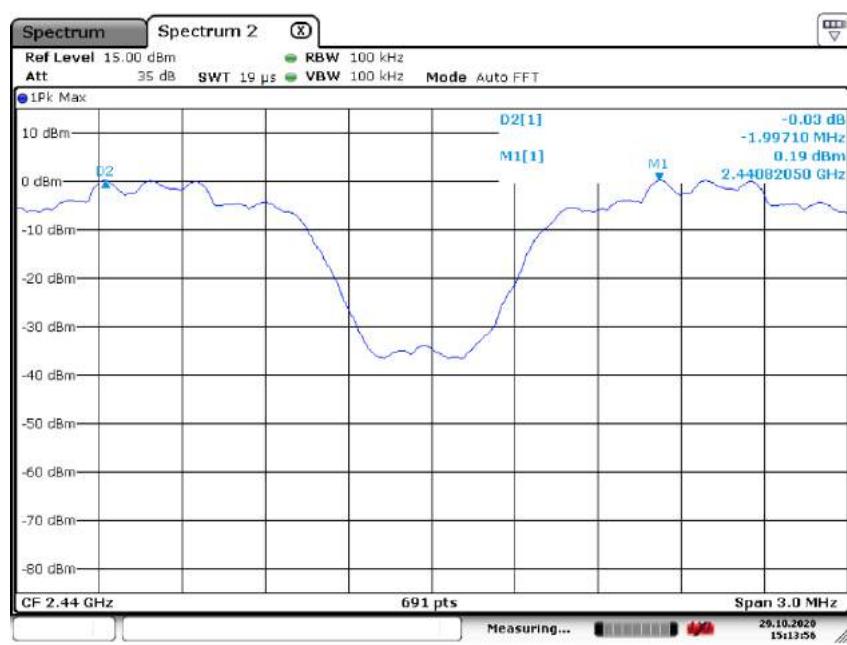

3.3.2 Number of Hopping Frequencies

Procedure:

The test follows ANSI C63.10. The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to (Bluetooth):

Frequency range Start = 2400.0 MHz, Stop = 2483.5 MHz

RBW = 100 kHz (1% of the span or more) Sweep = auto

VBW = 100 kHz (VBW \geq RBW) Detector function = peak

Trace = max hold Span > 40 MHz

Measurement Data : **Complies**

Total number of Hopping Channels	79 (BDR, EDR)
---	---------------


- See next pages for actual measured spectrum plots.

Minimum Standard:


At least 15 channels

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

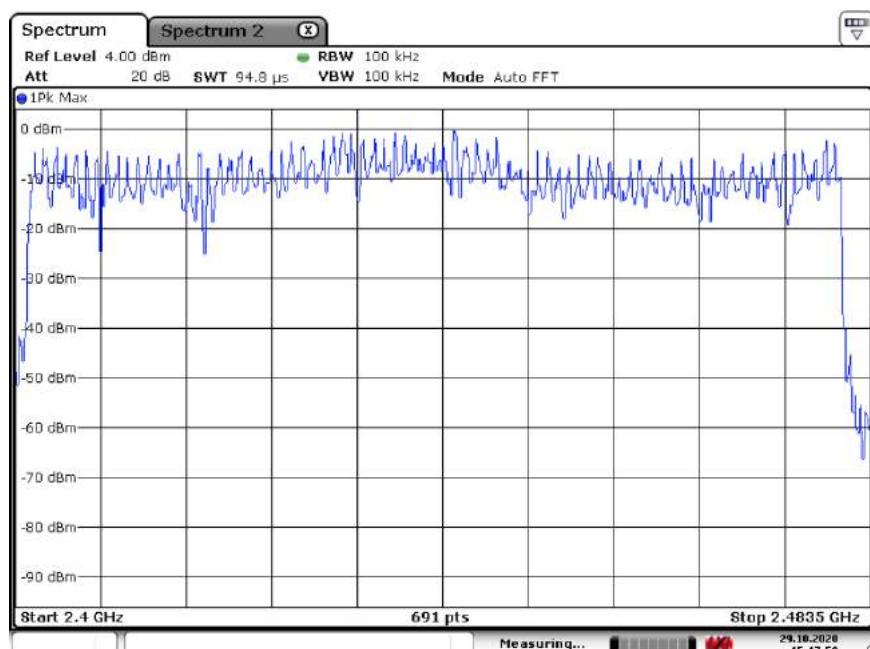Number of Hopping Frequencies (BDR)

Date: 29.OCT.2020 15:17:59

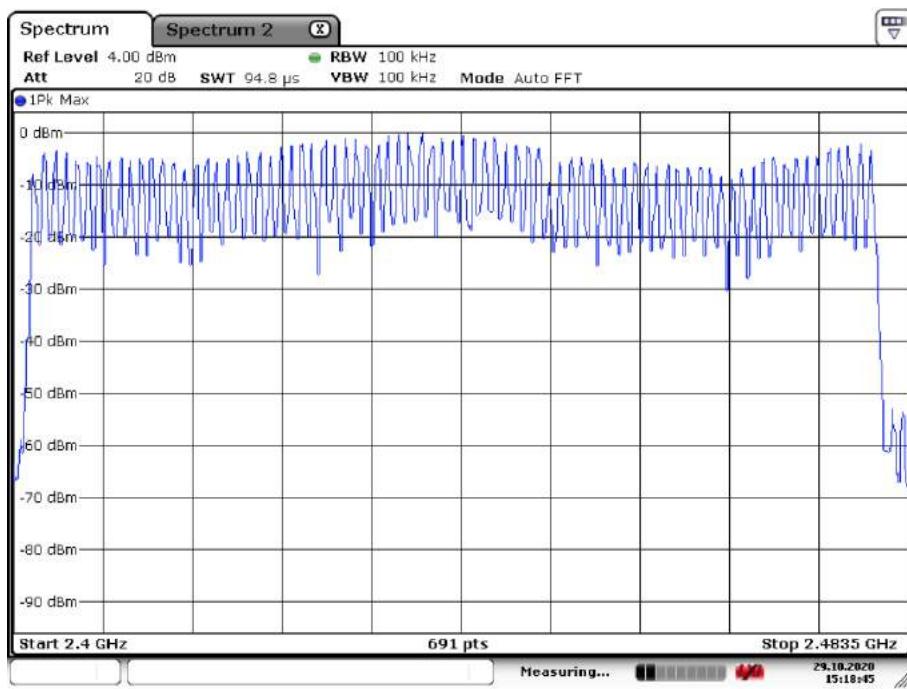Number of Hopping Frequencies (EDR)

Date: 29.OCT.2020 15:18:45

3.3.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to (Bluetooth):

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Measurement Data: BDR Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2402	0	0.903	0.842
2441	39	0.898	0.846
2480	78	0.898	0.846

Measurement Data: EDR Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2402	0	1.22	1.15
2441	39	1.22	1.16
2480	78	1.23	1.16


- See next pages for actual measured spectrum plots.

Minimum Standard:


N/A

Measurement Setup


Same as the Chapter 3.3.1 (Figure 1)

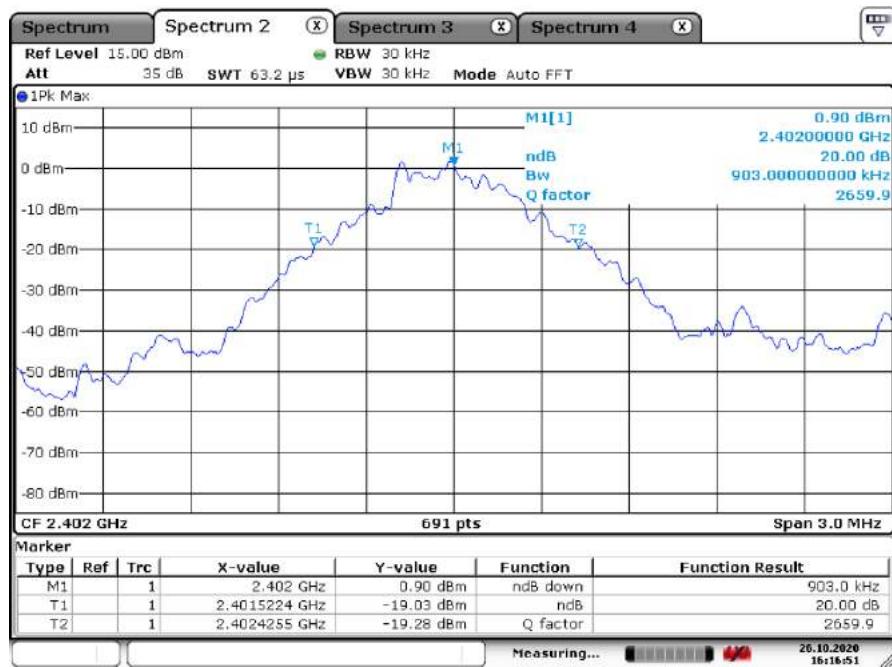Channel 0 of EDR mode**20 dB Bandwidth**

Date: 26.OCT.2020 16:16:51

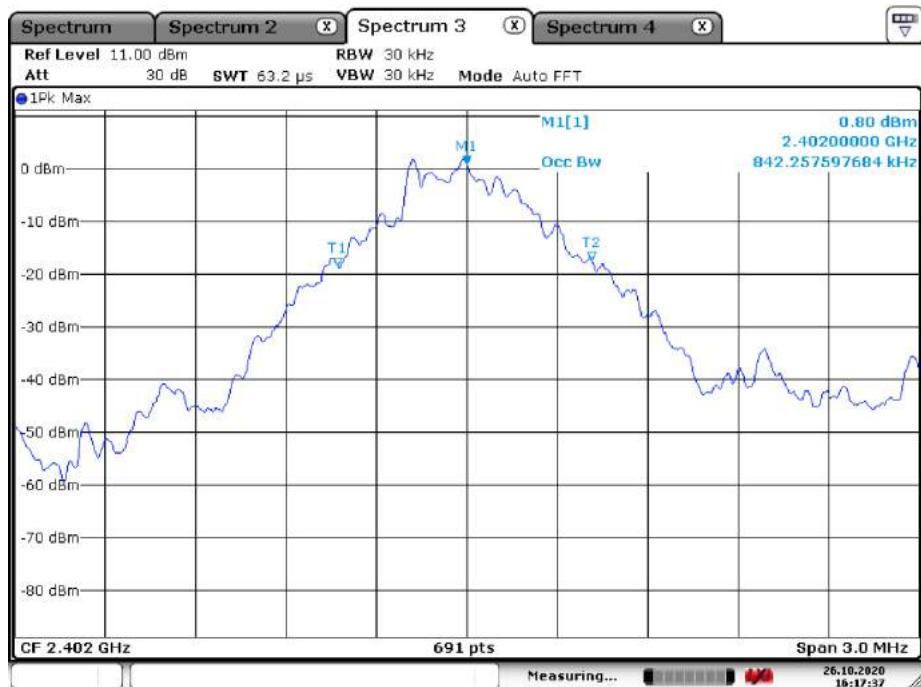99% Bandwidth


Date: 26.OCT.2020 16:17:37

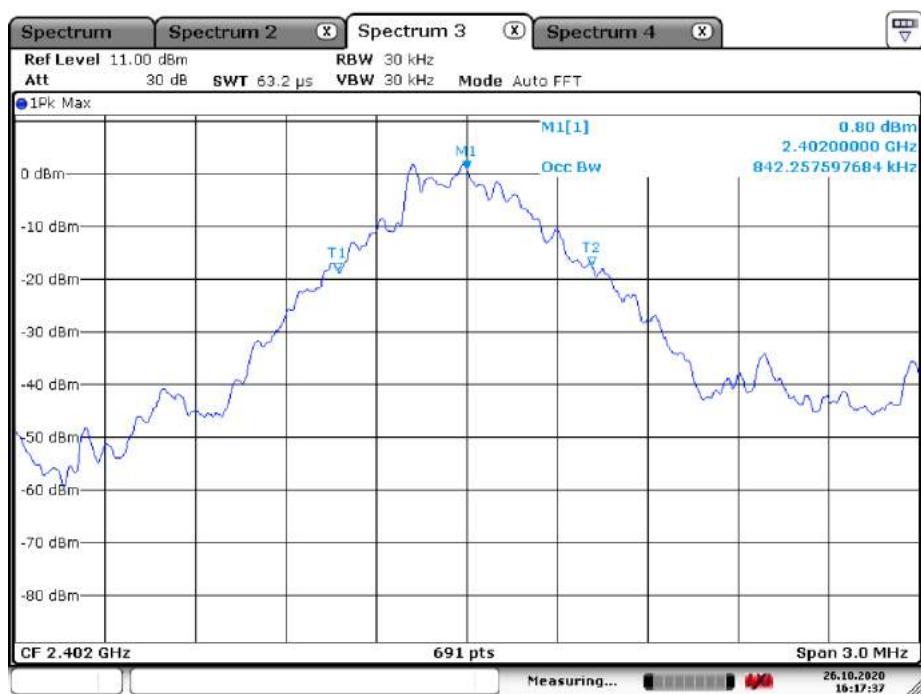Channel 39 of EDR mode20 dB Bandwidth

Date: 26 OCT 2020 16:17:37

99% Bandwidth


Date: 26.OCT.2020 16:26:16

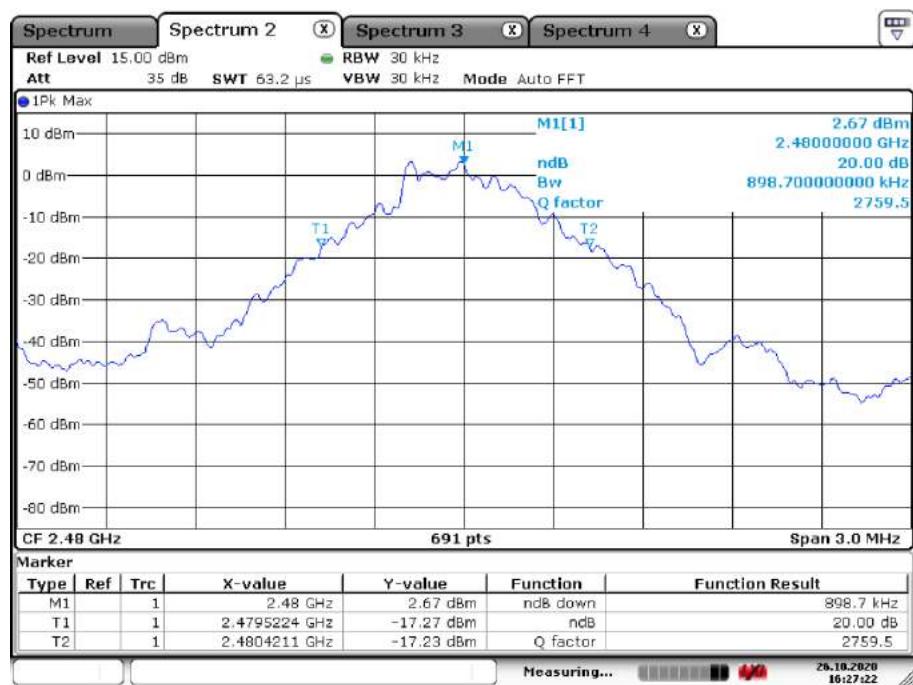Channel 78 of EDR mode20 dB Bandwidth


Date: 26.OCT.2020 16:27:22

99% Bandwidth


Date: 26.OCT.2020 16:27:36

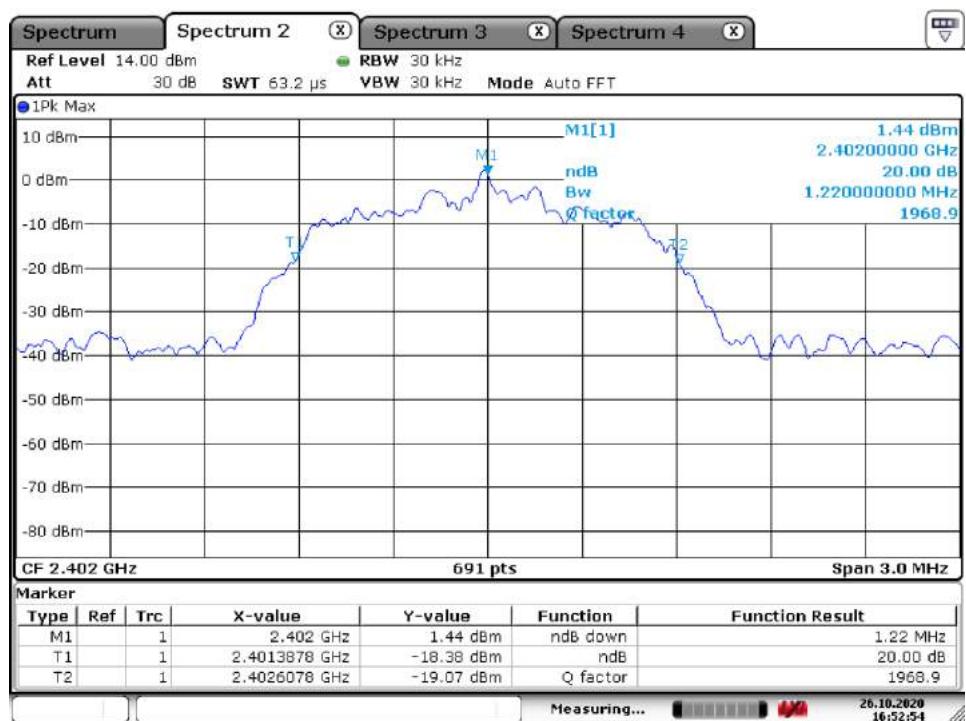Channel 0 of EDR mode20 dB Bandwidth


Date: 26.OCT.2020 16:52:54

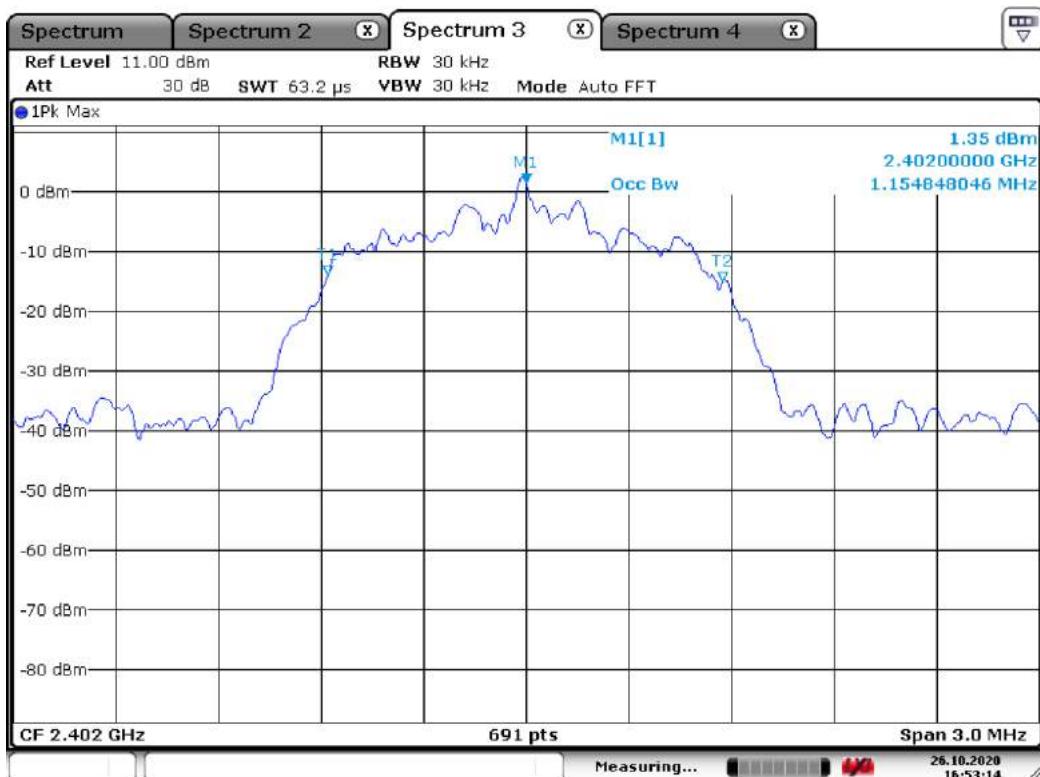99% Bandwidth


Date: 26.OCT.2020 16:53:15

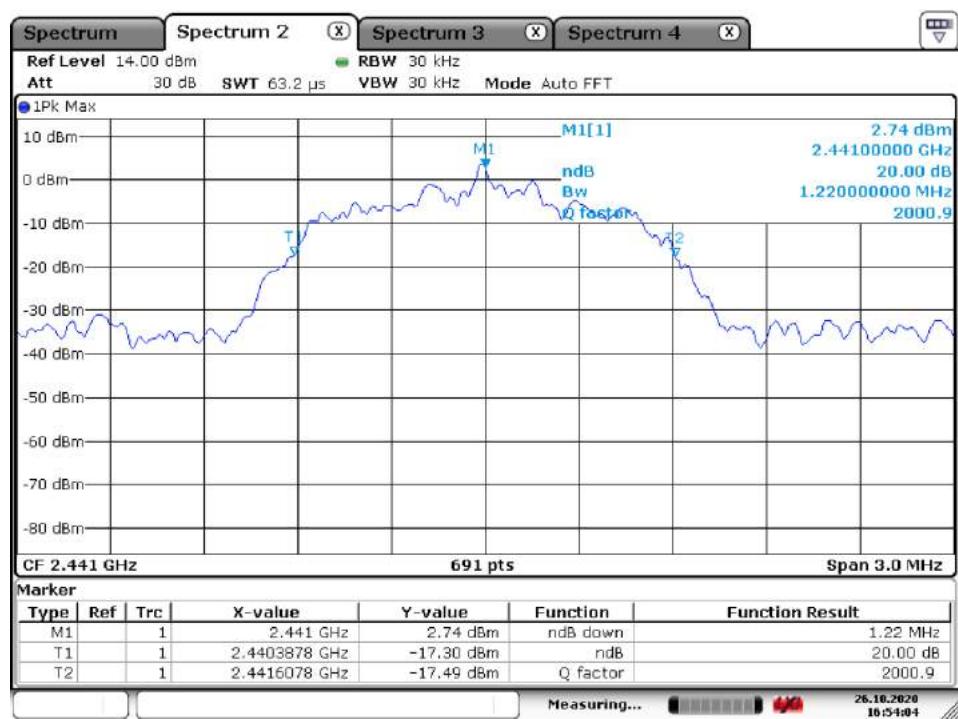Channel 39 of EDR mode**20 dB Bandwidth**


Date: 26.OCT.2020 16:54:04

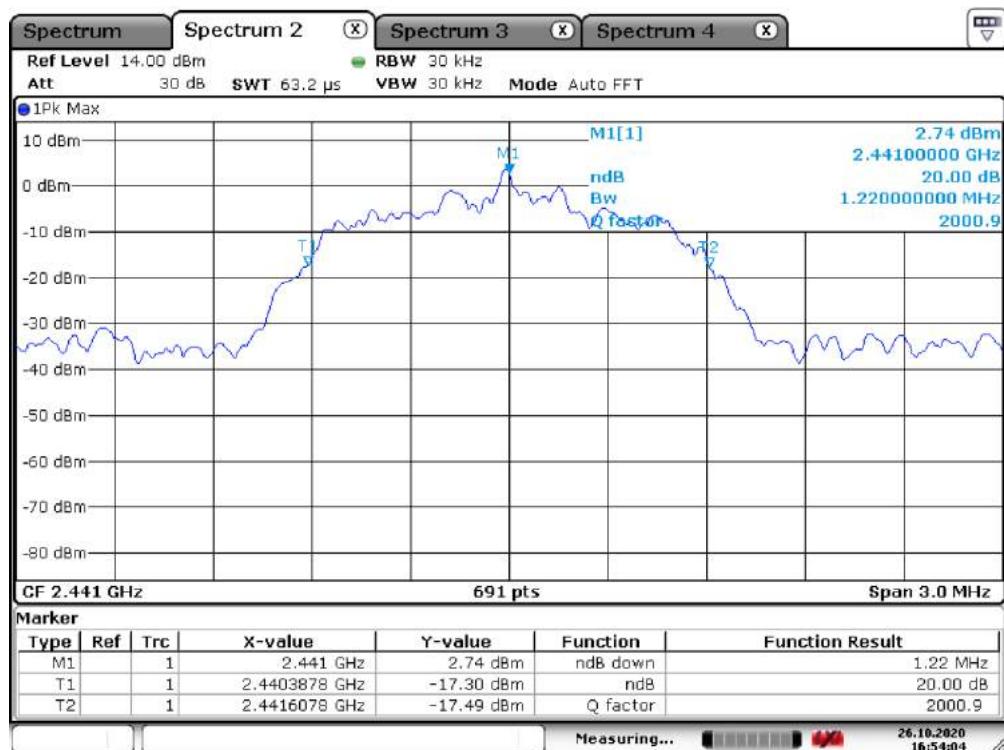99% Bandwidth

Date: 26.OCT.2020 16:54:04

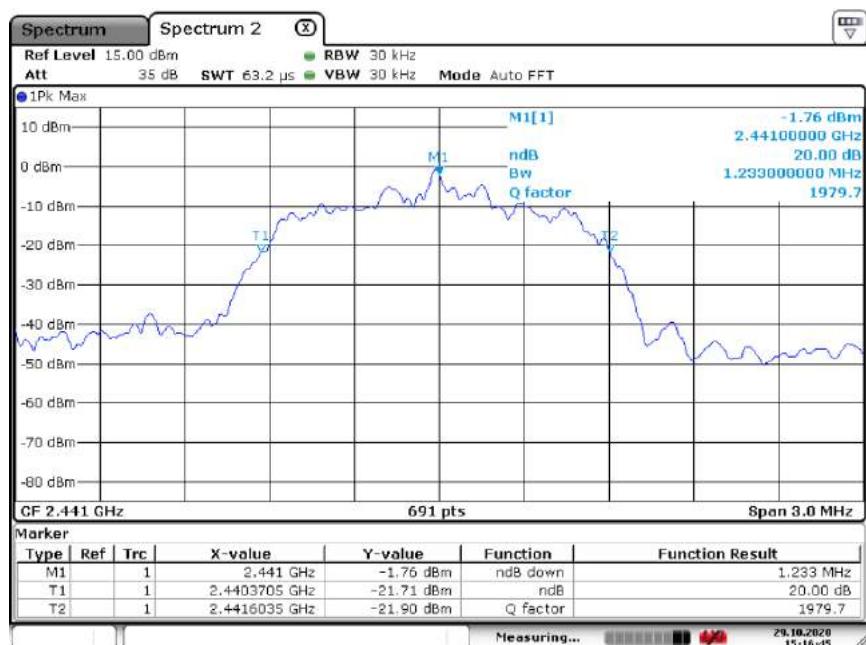Channel 78 of EDR mode**20 dB Bandwidth**

Date: 29.OCT.2020 15:16:45

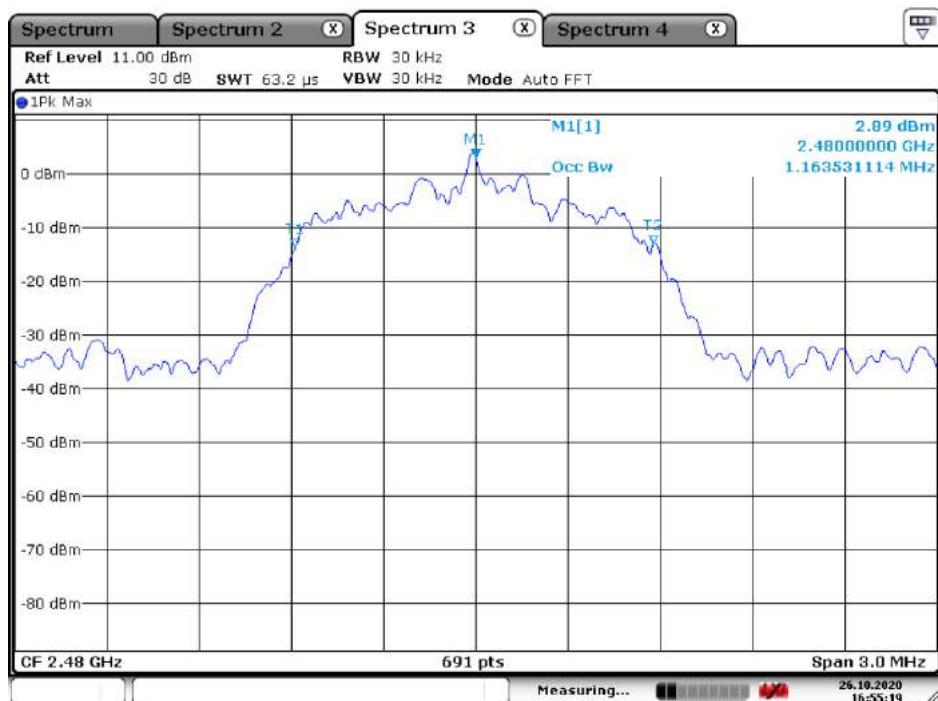99% Bandwidth

Date: 26.OCT.2020 16:55:19

3.3.4 Time of Occupancy (Dwell Time)

Procedure:

The test follows ANSI C63.10. The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW \geq RBW)

Trace = max hold

Detector function = peak

Measurement Data (Basic,EDR):

Mode	Number of transmission in a 31.6s (79Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
3-DH5	31(Times/3sec)*10.533	0.378	123.42	400


- See next pages for actual measured spectrum plots.
- dwell time = {(number of hopping per second / number of slot) x duration time per channel} x 0.4 ms

Minimum Standard:


0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

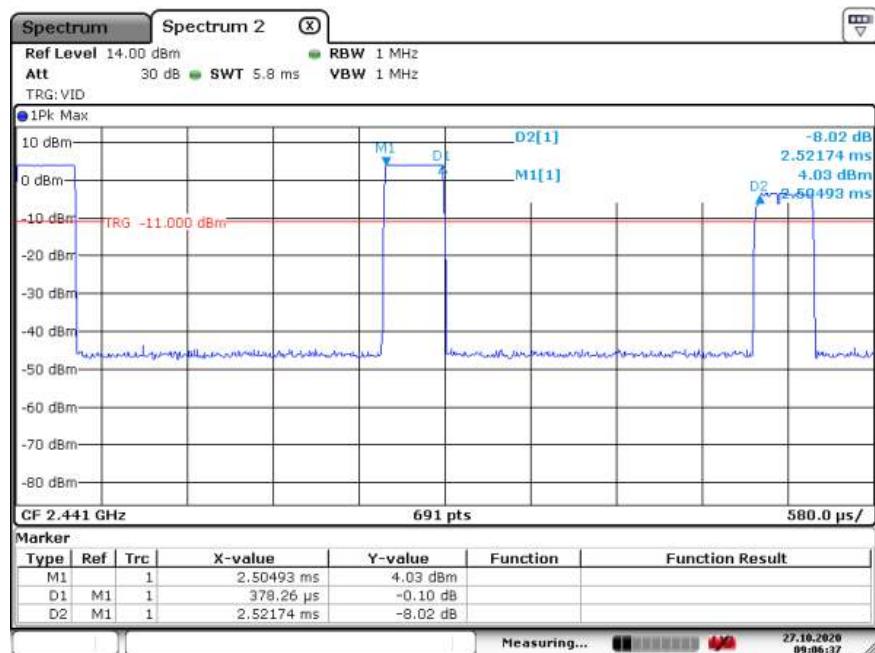

Date: 27.OCT.2020 09:06:37

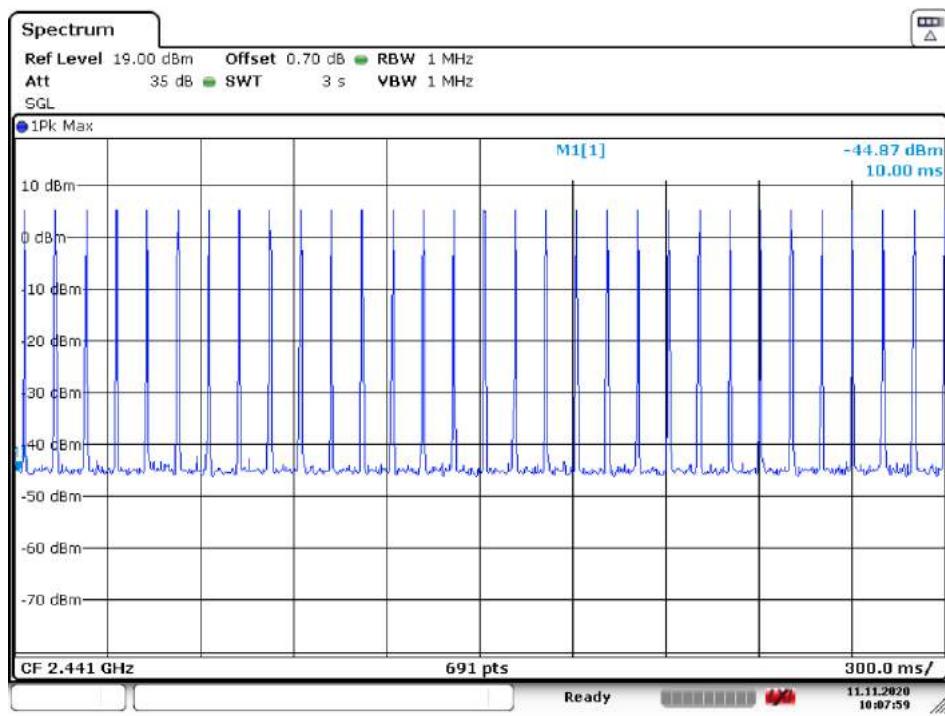

Date: 11.NOV.2020 10:08:00

3.3.5 Transmitter Output Power

Procedure:

The test follows ANSI C63.10. The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to :

Center frequency = the highest, middle and the lowest channels

Span = 10 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data : EDR Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	3.39	2.18	Complies
2442	39	4.83	3.04	Complies
2480	78	4.81	3.02	Complies

Measurement Data : EDR Mode


Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	4.08	2.55	Complies
2442	39	5.16	3.28	Complies
2480	78	5.27	3.36	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:	For frequency hopping systems with at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems: 0.125 W.
--------------------------	--

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

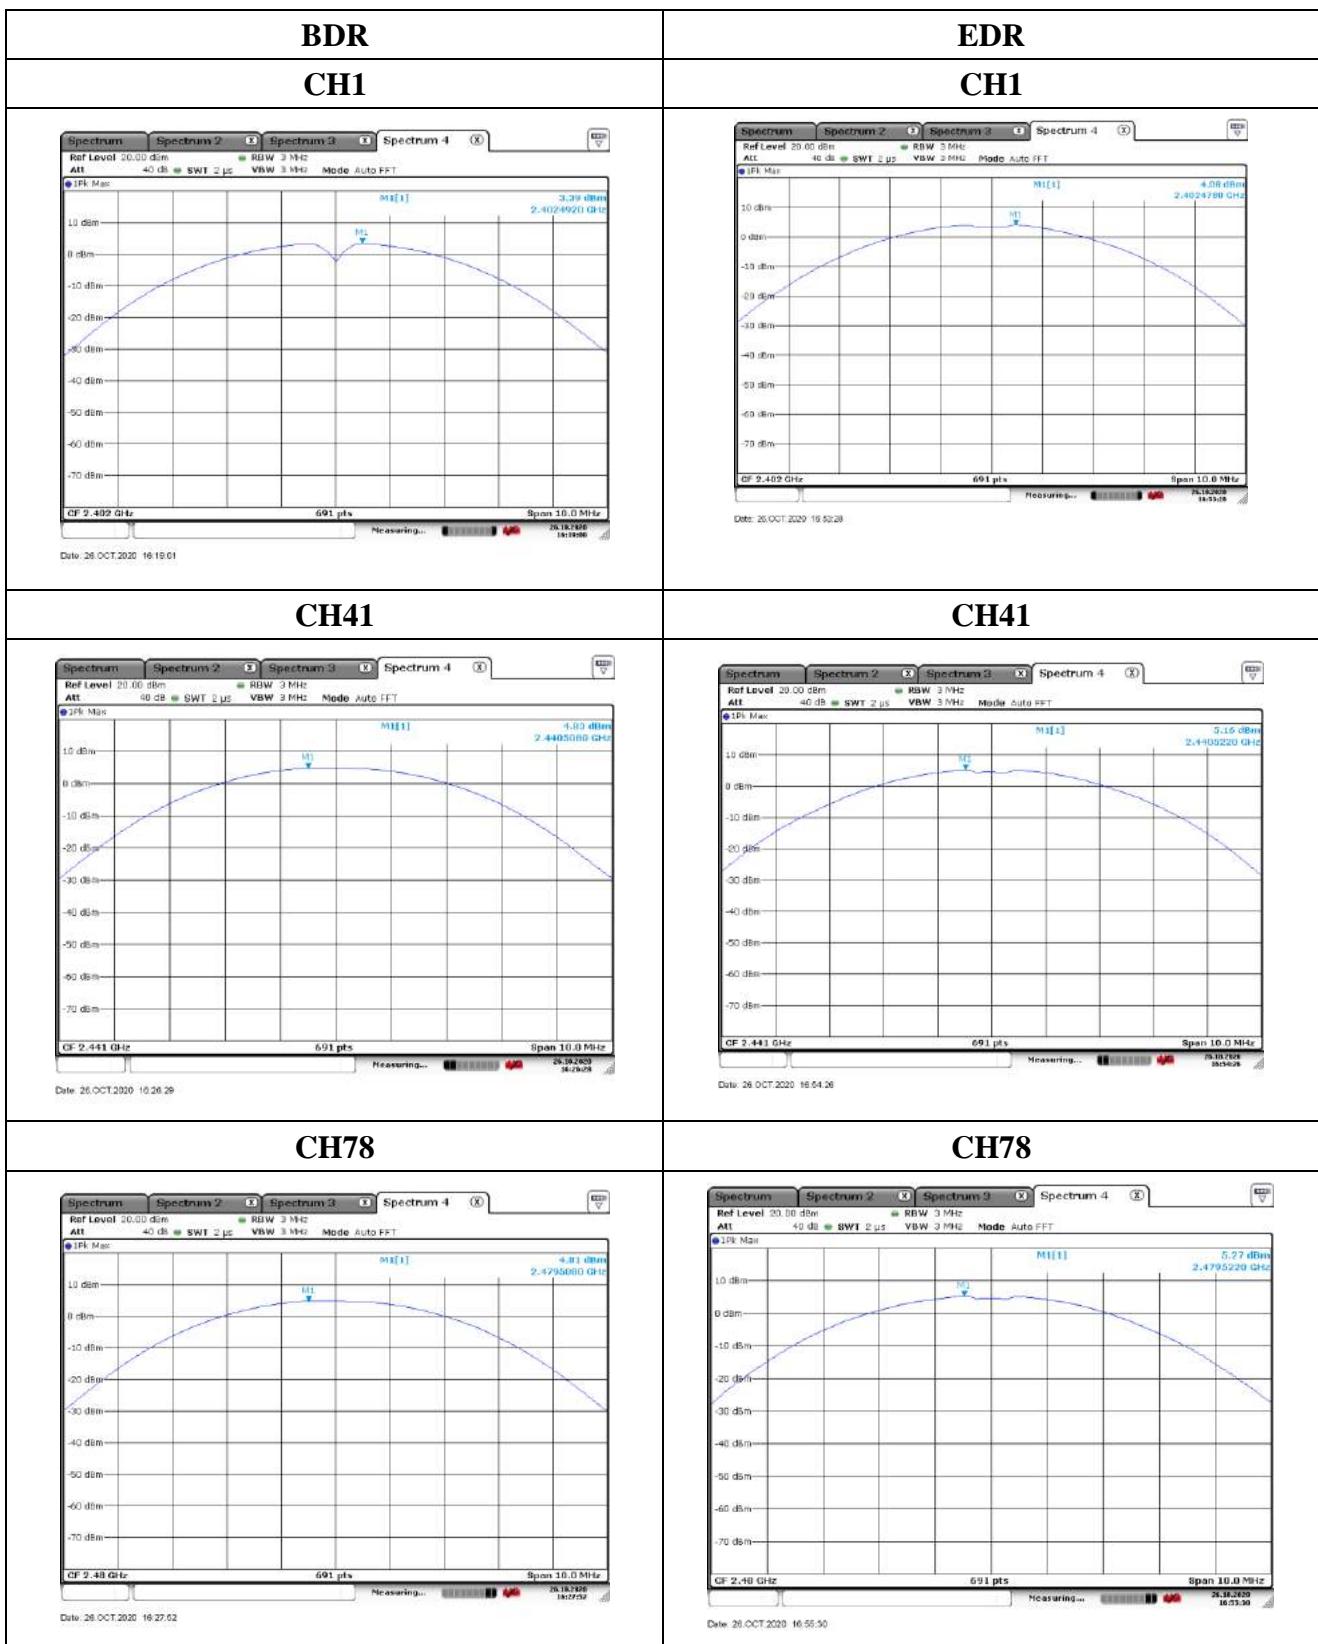

3.3.6 Band Edge

Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels	
RBW = 100 kHz	VBW = 100 kHz
Span = 10~30 MHz	Detector function = peak
Trace = max hold	Sweep = auto



Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------


Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

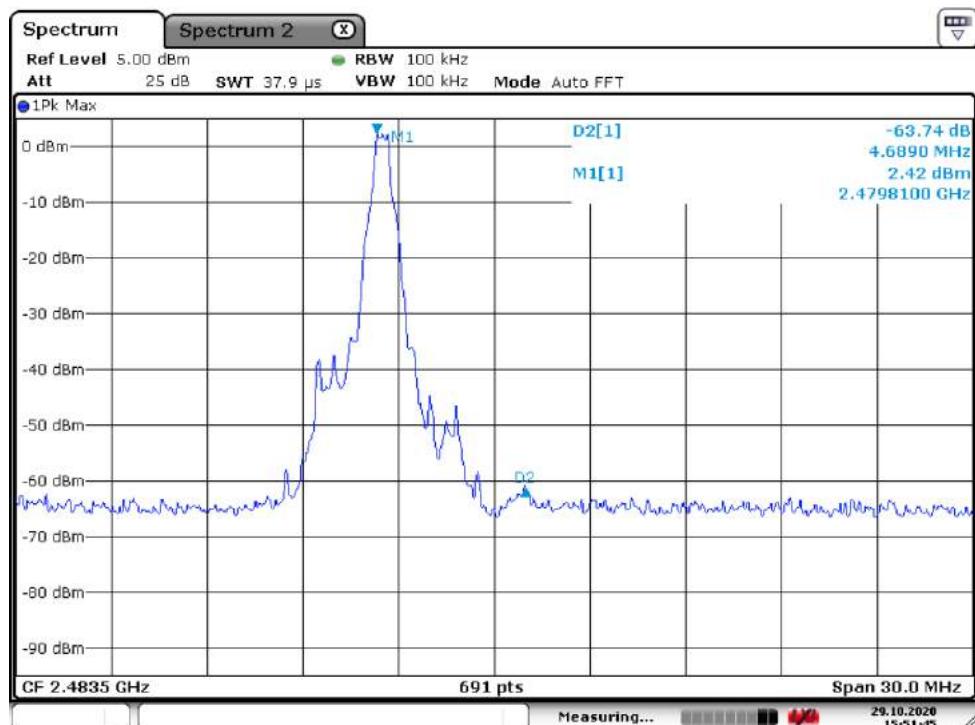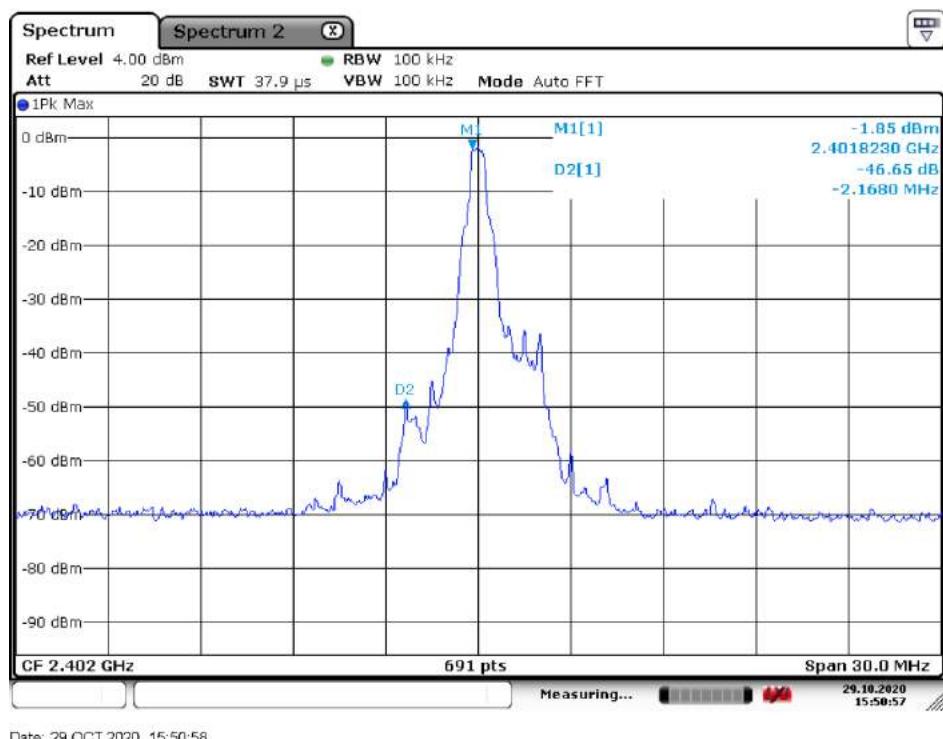BDR

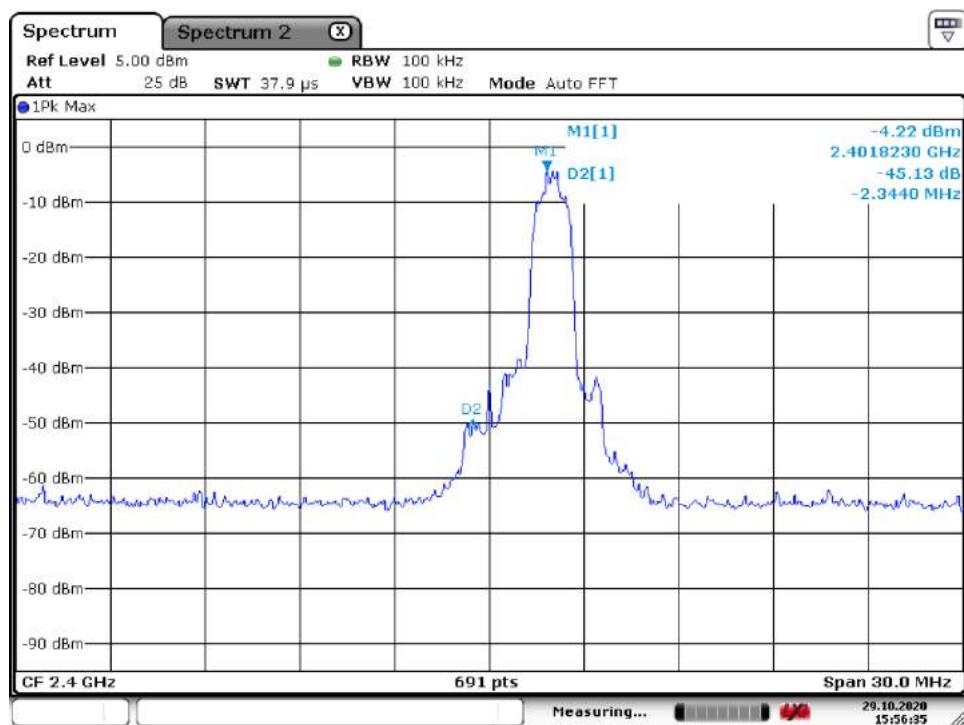EDR

Date: 29.OCT.2020 15:56:35

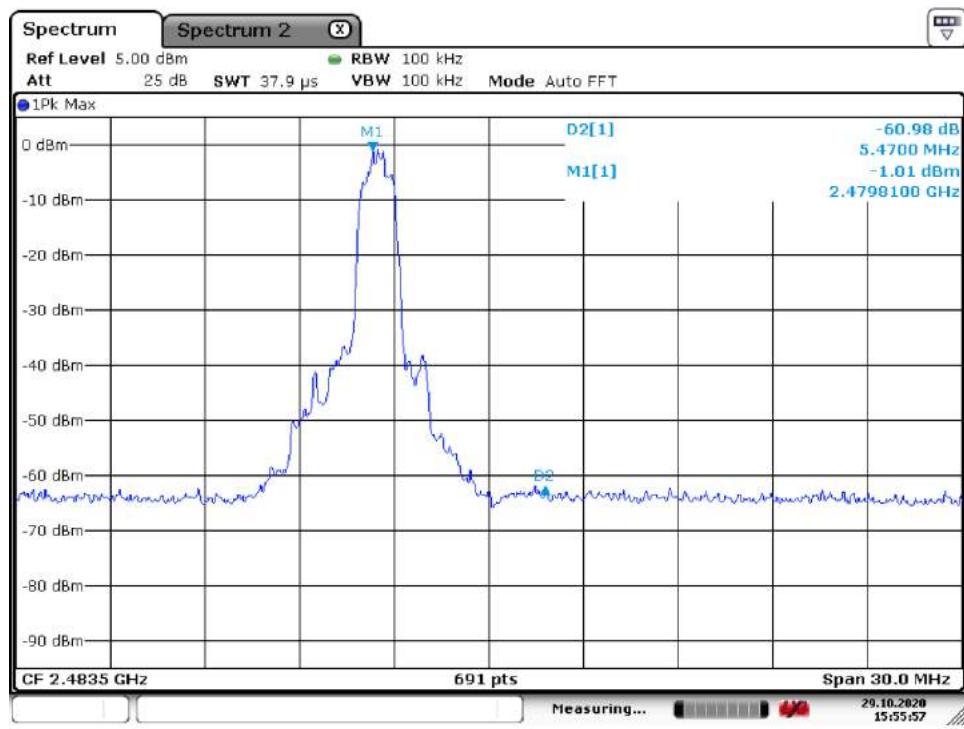

Date: 29.OCT.2020 15:55:56

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.

3.3.7 Conducted Spurious Emissions

Procedure:

The test follows ANSI C63.10. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz Sweep = auto

VBW = 100 kHz Detector function = peak

Trace = max hold

Measurement Data: **Complies**

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)


BDR

Unwanted Emission – Low channel
Frequency Range = 30 MHz ~ 26.5 GHz

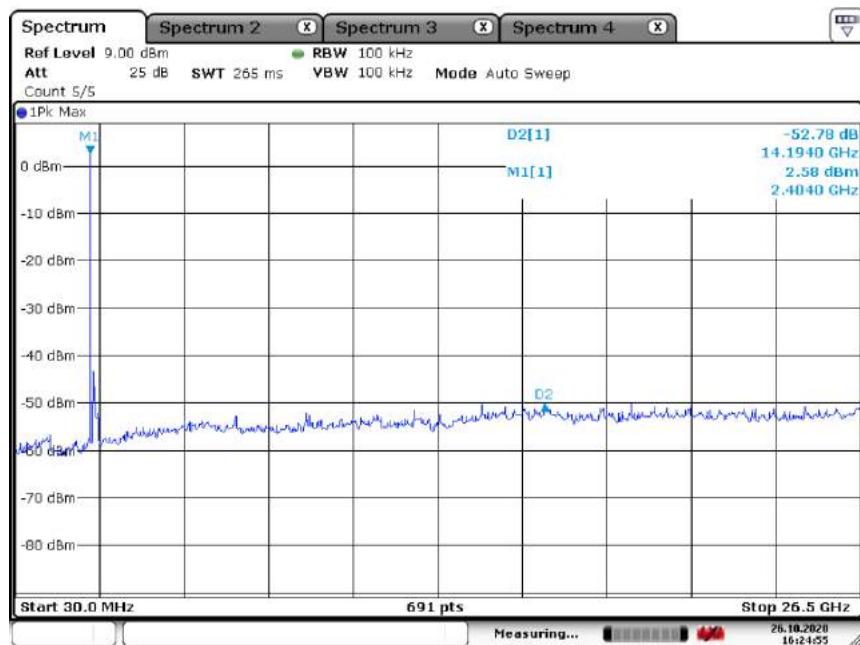

Date: 26.OCT.2020 16:24:55


Unwanted Emission – Middle channel
Frequency Range = 30 MHz ~ 26.5 GHz

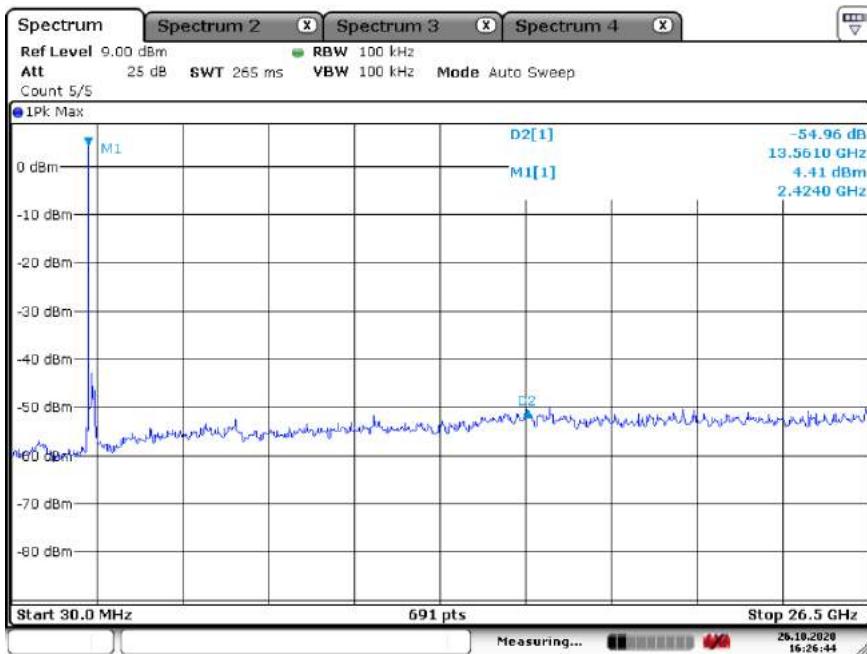

Date: 26.OCT.2020 16:26:44

Unwanted Emission – High channel


Frequency Range = 30 MHz ~ 26.5 GHz

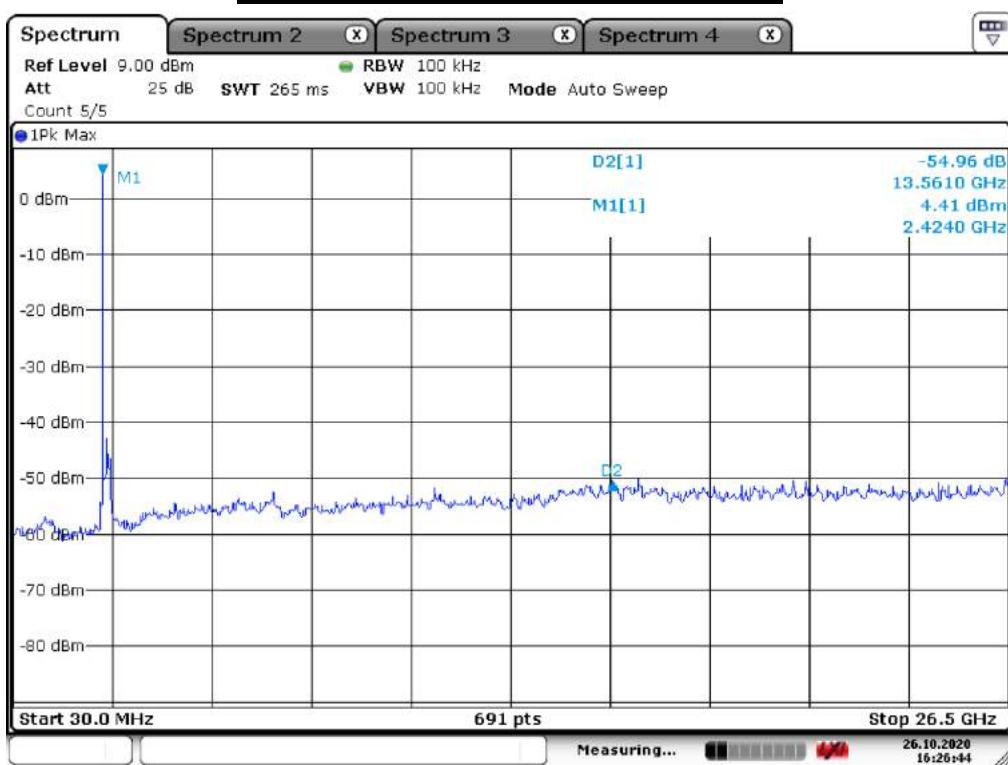

Date: 26.OCT.2020 16:26:45


EDR

Unwanted Emission – Low channel
Frequency Range = 30 MHz ~ 26.5 GHz

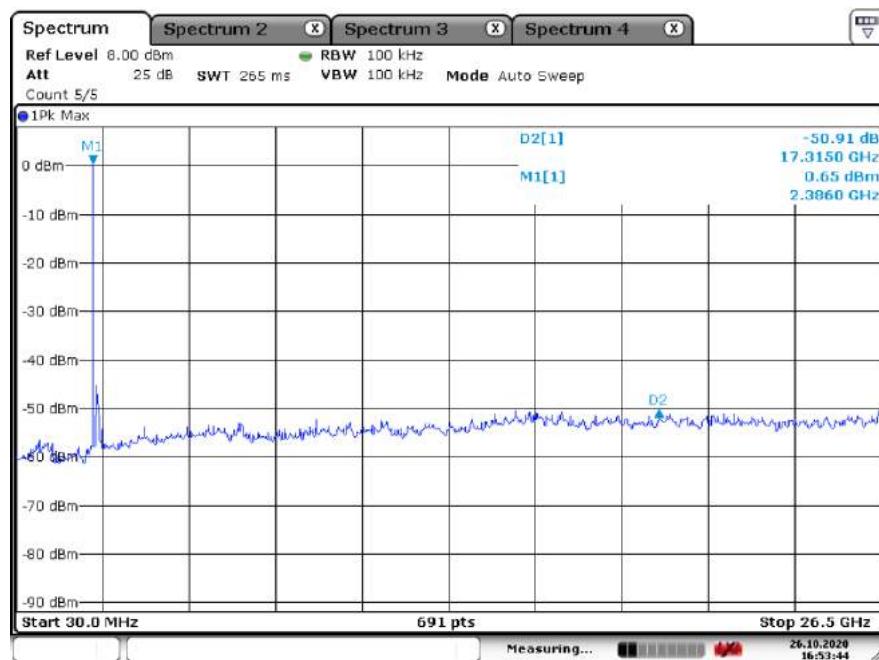


Date: 26 OCT 2020 16:53:44

Unwanted Emission – Middle channel
Frequency Range = 30 MHz ~ 26.5 GHz

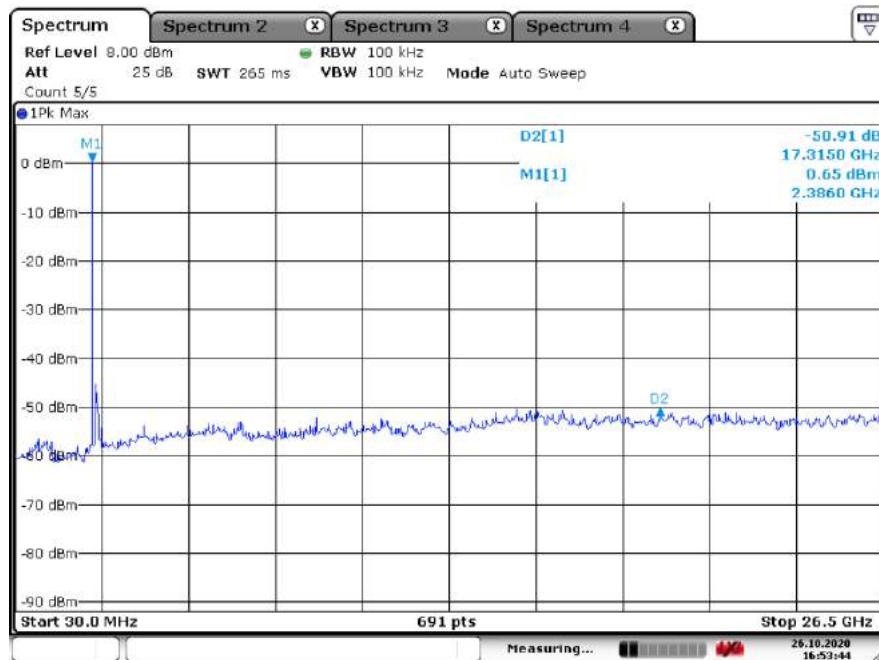

Date: 26 OCT 2020 16:53:44

Unwanted Emission – High channel
Frequency Range = 30 MHz ~ 26.5 GHz

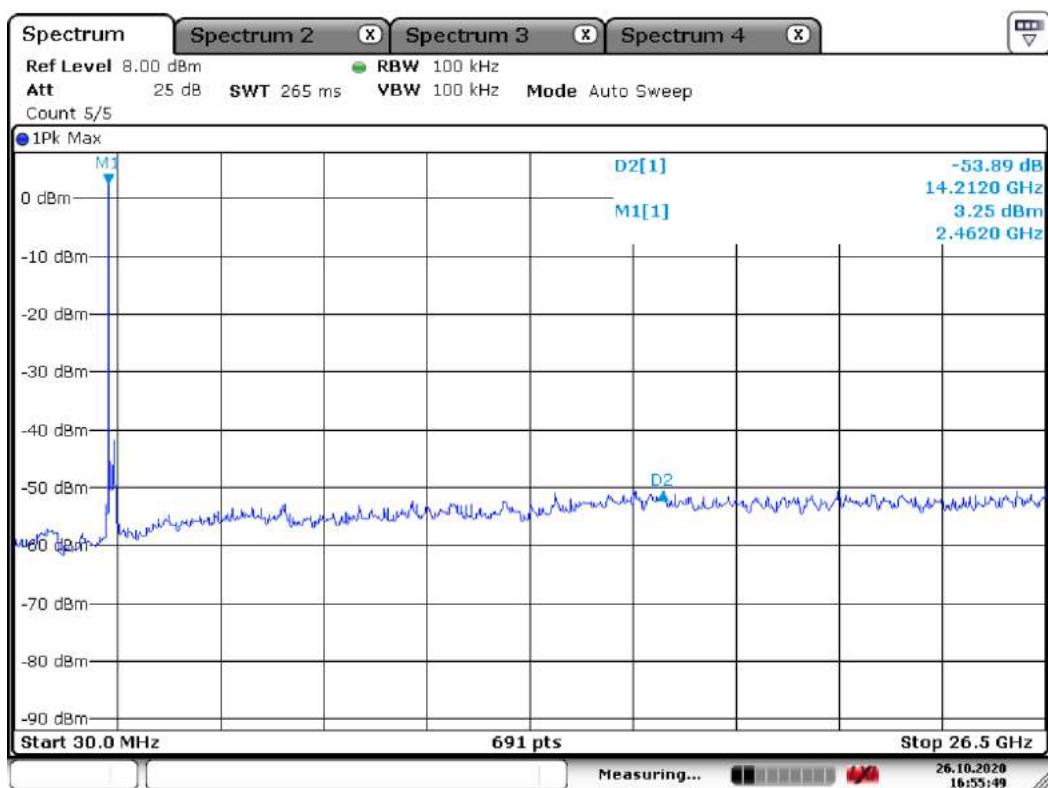

Date: 26.OCT.2020 16:55:48

3.3.8 Radiated Spurious Emissions

Procedure:

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10. The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

- (a) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 3 m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30 MHz, Bi-Log Test Antenna (30 MHz to 1 GHz) and Horn Test Antenna (above 1 GHz) are used. Test Antenna is 3 m away from the EUT. Test Antenna height is carried from 1 m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 120 kHz (30 MHz ~ 1 GHz)

VBW \geq RBW

= 1 MHz (1 GHz ~ 10th harmonic)


Span = 100 MHz

Detector function = peak


Trace = max hold

Sweep = auto


below 30 MHz

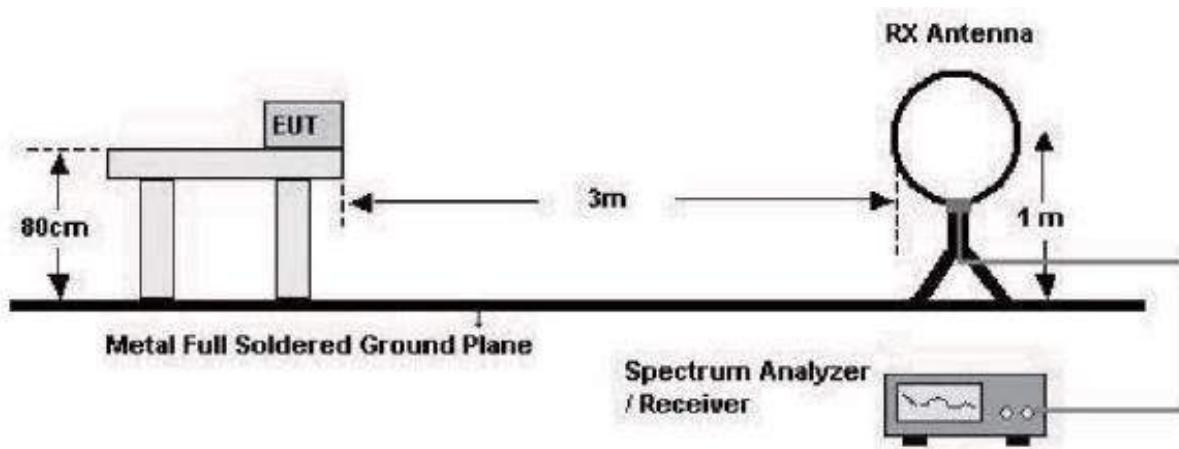

below 1 GHz (30 MHz to 1 GHz)

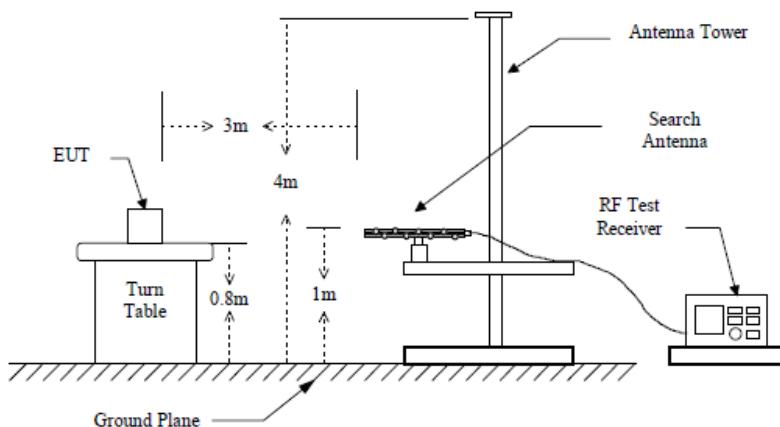

above 1 GHz

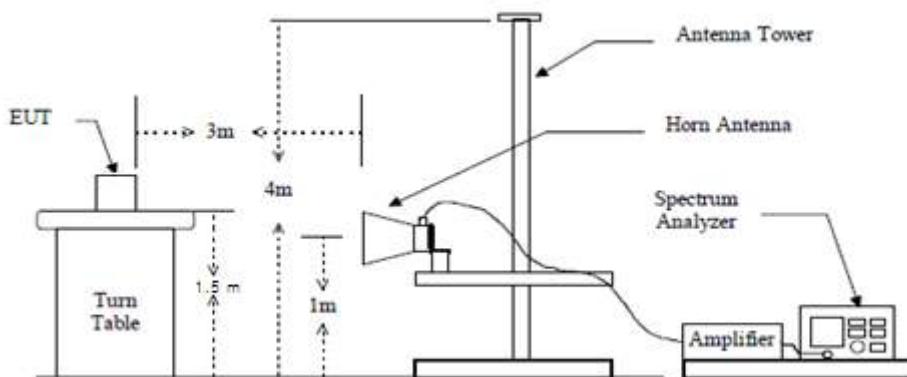

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30 MHz.
- The test results for the worst of the various operating modes are presented in accordance with 6.3.4 of ANSI C63.10.
- Checked with a red circle is the fundamental frequency.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
0.009 ~ 0.490	2400/F(kHz) (@ 300m)
0.490 ~ 1.705	24000/F(kHz) (@ 30m)
1.705 ~ 30	30(@ 30m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Radiated Emissions(BDR)

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR HIGH

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

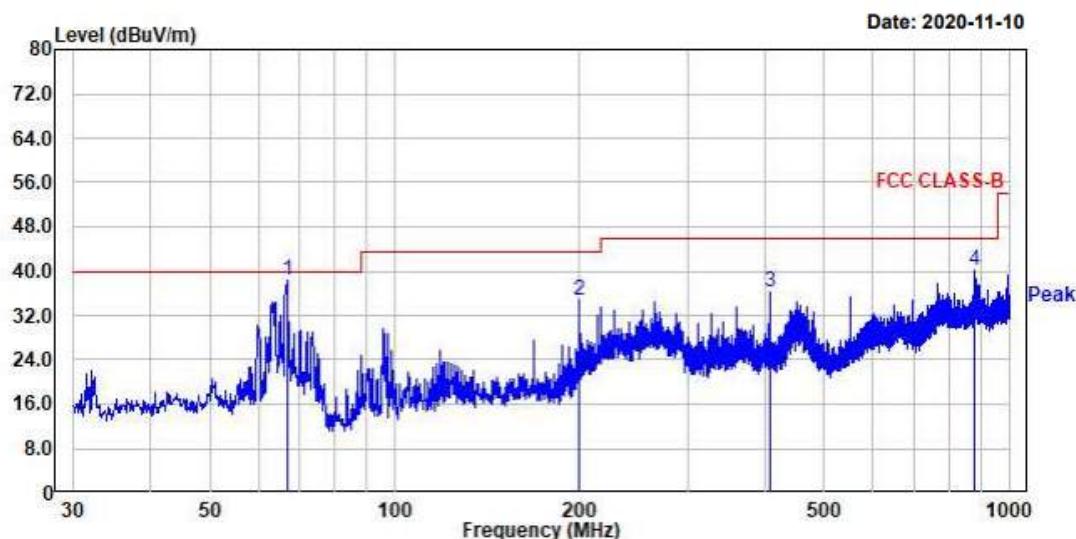

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	66.74	52.05	-13.70	38.35	40.00	1.65	100	160	horizontal
2.	199.75	48.96	-14.19	34.77	43.50	8.73	100	160	horizontal
3.	408.06	43.19	-7.10	36.09	46.00	9.91	100	259	horizontal
4.	876.33	38.46	1.71	40.17	46.00	5.83	100	357	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: RF Temp/Humi: BDR HIGH

Test Mode : 20 'C / 36 % R.H. Tested by:

Power :

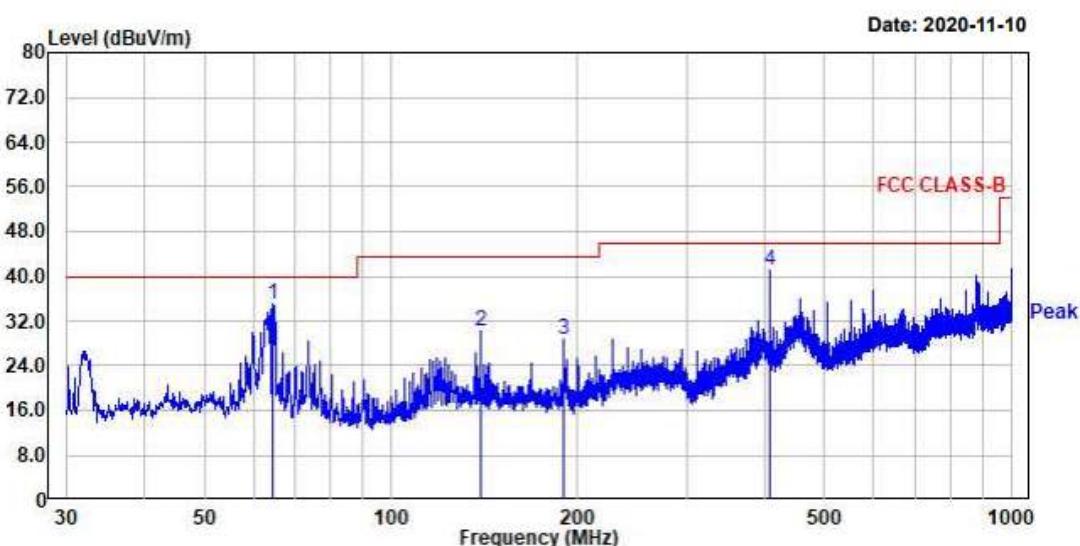

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	64.56	48.37	-13.43	34.94	40.00	5.06	100	0	vertical
2.	139.49	41.48	-11.44	30.04	43.50	13.46	100	0	vertical
3.	189.69	42.32	-13.61	28.71	43.50	14.79	100	170	vertical
4.	408.06	48.04	-7.10	40.94	46.00	5.06	100	170	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR LOW

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

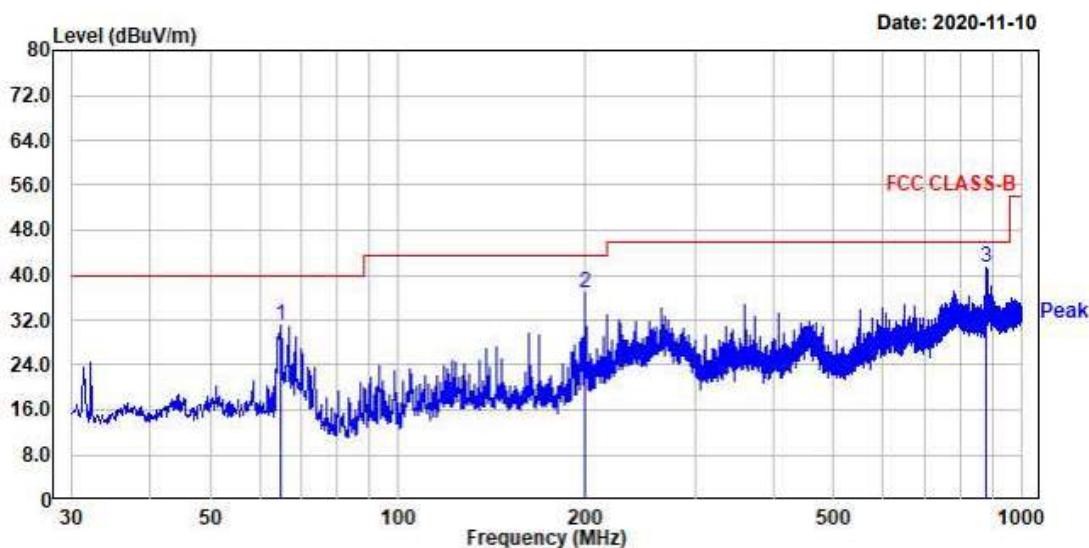

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB μ V		dB	dB μ V/m	dB	cm	deg	
1.	64.80	44.53	-13.45	31.08	40.00	8.92	100	0	horizontal
2.	199.39	50.97	-14.16	36.81	43.50	6.69	100	208	horizontal
3.	877.05	39.63	1.72	41.35	46.00	4.65	100	345	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR LOW

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

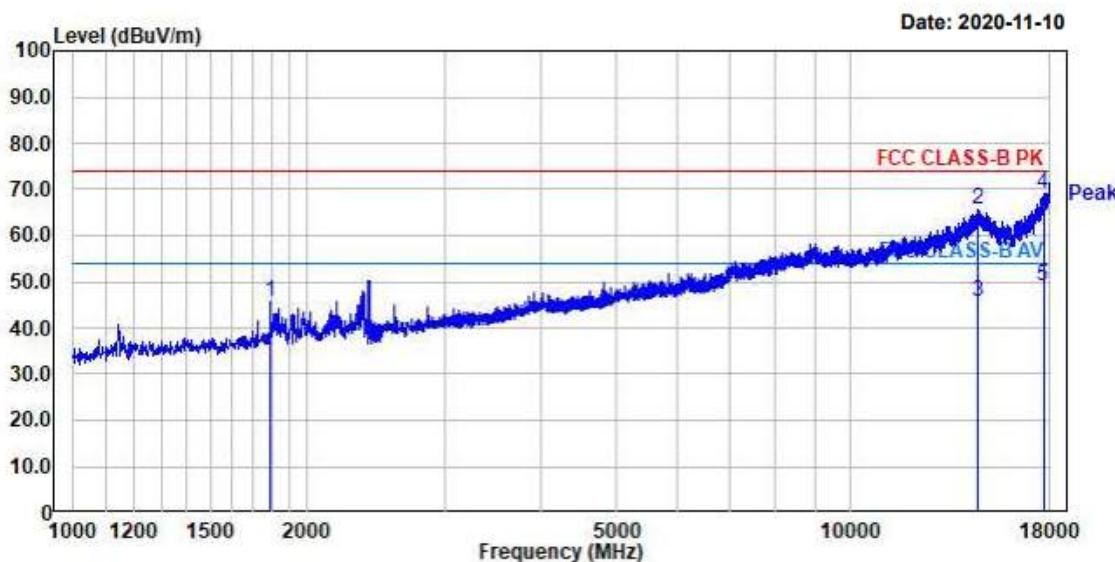

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1. 1794.75	50.24	-4.47	45.77	74.00	28.23	1	0	0	horizontal
2. 14602.13	41.70	24.12	65.82	74.00	8.18	224	217	217	horizontal
3. 14602.13	21.70	24.12	45.82	54.00	8.18	224	217	217	horizontal
4. 17696.13	41.59	27.53	69.12	74.00	4.88	0	0	0	horizontal
5. 17696.13	21.59	27.53	49.12	54.00	4.88	0	0	0	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR HIGH

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

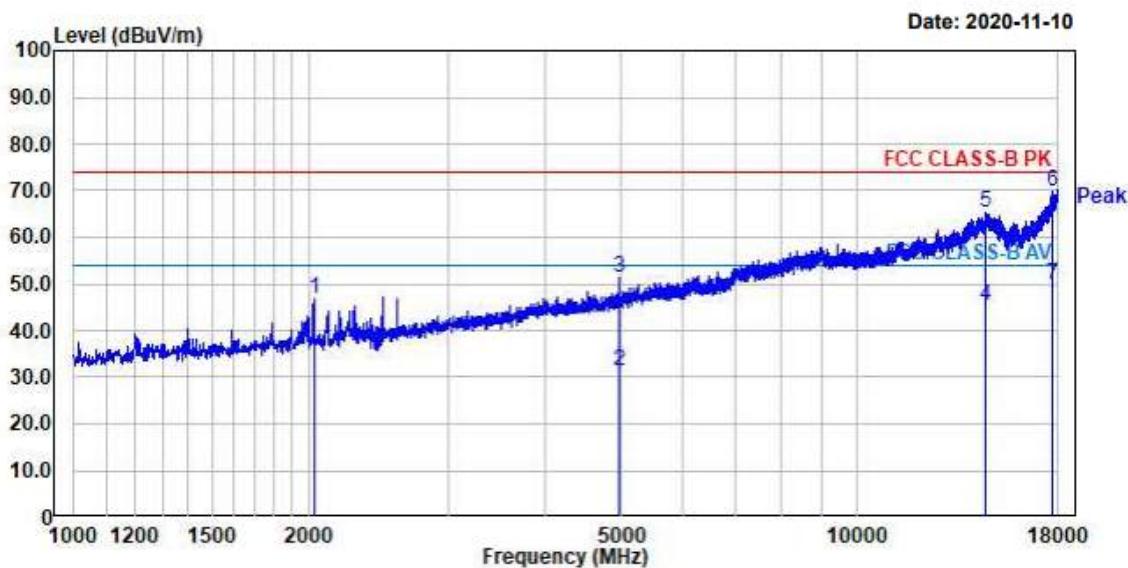

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	2026.38	49.48	-2.77	46.71	74.00	27.29	39	44	horizontal
2.	4958.88	21.70	9.55	31.25	54.00	22.75	23	30	horizontal
3.	4958.88	41.70	9.55	51.25	74.00	22.75	23	30	horizontal
4.	14591.50	21.07	24.14	45.21	54.00	8.79	329	338	horizontal
5.	14591.50	41.07	24.14	65.21	74.00	8.79	329	338	horizontal
6.	17704.63	42.27	27.58	69.85	74.00	4.15	231	236	horizontal
7.	17704.63	22.27	27.58	49.85	54.00	4.15	231	236	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR HIGH

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

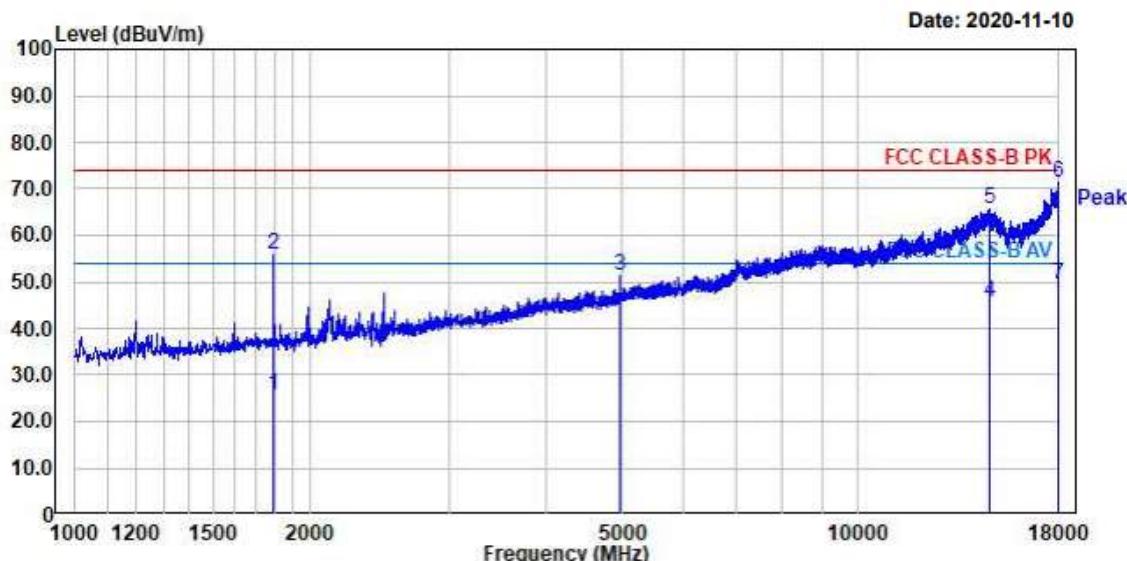

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	1792.63	30.22	-4.48	25.74	54.00	28.26	162	154	vertical
2.	1792.63	60.35	-4.48	55.87	74.00	18.13	162	154	vertical
3.	4958.88	41.94	9.55	51.49	74.00	22.51	360	360	vertical
4.	14723.25	21.99	23.80	45.79	54.00	8.21	177	170	vertical
5.	14723.25	41.94	23.80	65.74	74.00	8.26	177	170	vertical
6.	17997.88	42.13	29.19	71.32	74.00	2.68	360	360	vertical
7.	17997.88	20.11	29.19	49.30	54.00	4.70	360	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR LOW

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

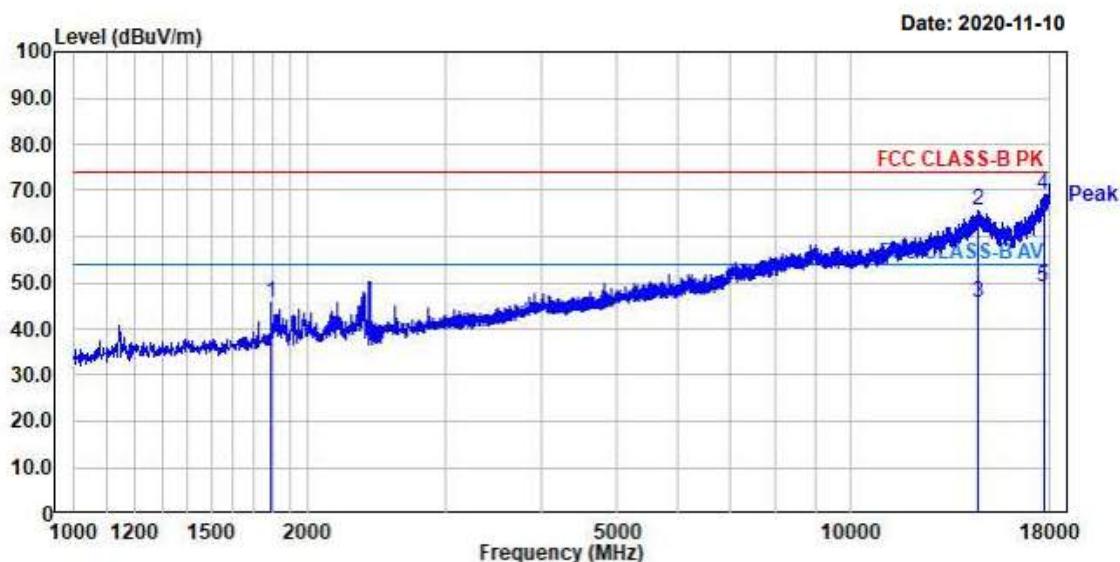

No.	Freq MHz	Reading dB μ V	C.F. dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	1794.75	50.24	-4.47	45.77	74.00	28.23	1	0	horizontal
2.	14602.13	41.70	24.12	65.82	74.00	8.18	224	217	horizontal
3.	14602.13	21.70	24.12	45.82	54.00	8.18	224	217	horizontal
4.	17696.13	41.59	27.53	69.12	74.00	4.88	0	0	horizontal
5.	17696.13	21.59	27.53	49.12	54.00	4.88	0	0	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR LOW

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

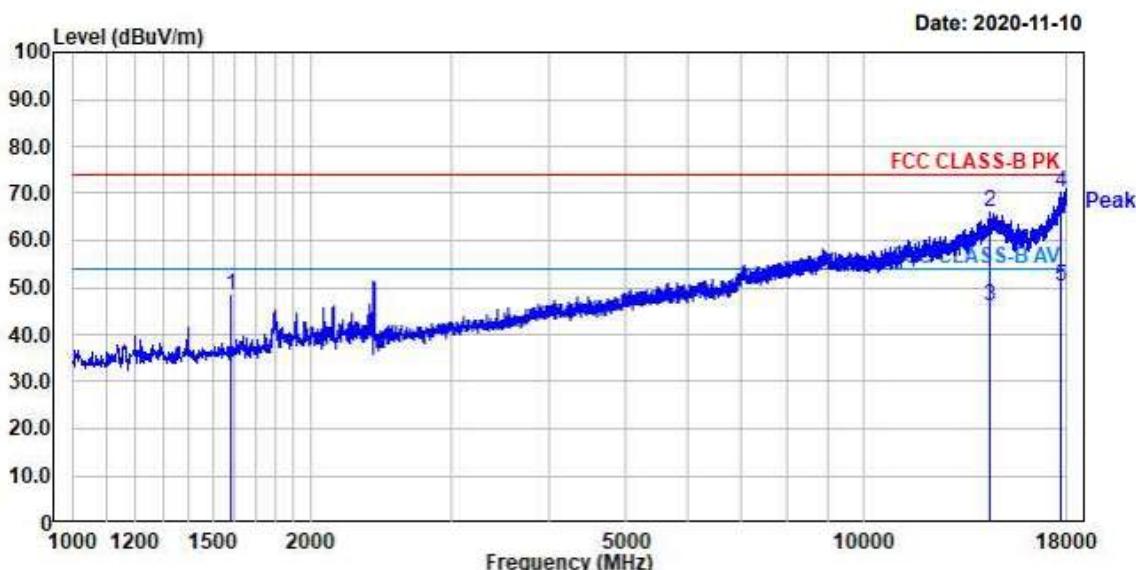

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	1582.25	54.27	-6.01	48.26	74.00	25.74	326	334	vertical
2.	14410.88	41.73	24.12	65.85	74.00	8.15	248	255	vertical
3.	14410.88	21.73	24.12	45.85	54.00	8.15	248	255	vertical
4.	17704.63	42.53	27.58	70.11	74.00	3.89	167	172	vertical
5.	17704.63	22.53	27.58	50.11	54.00	3.89	167	172	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR MID

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

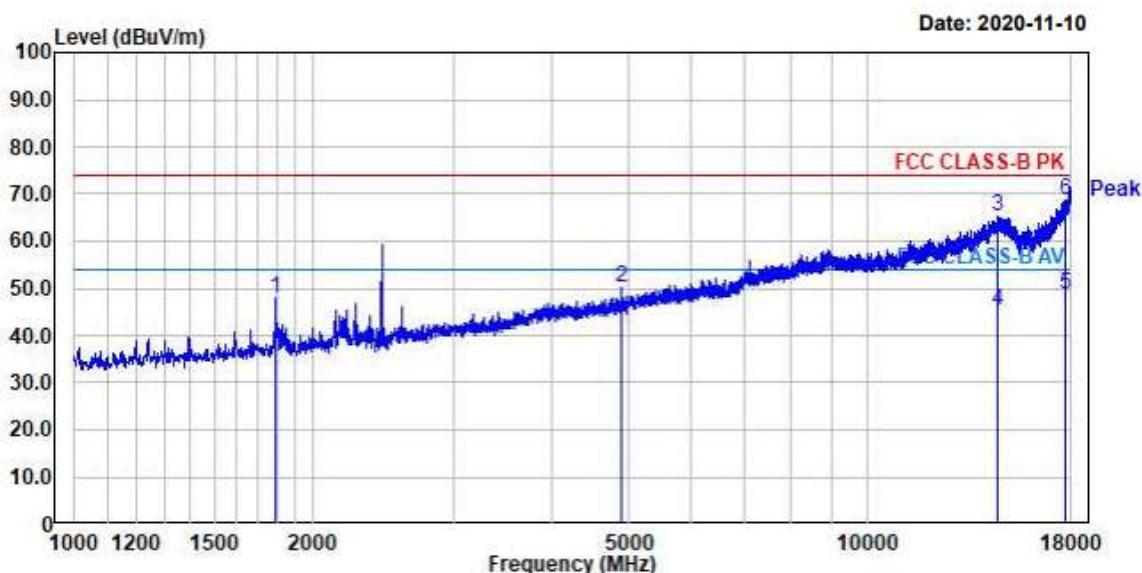

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	1794.75	52.39	-4.47	47.92	74.00	26.08	58	52	vertical
2.	4882.38	40.95	9.26	50.21	74.00	23.79	204	199	vertical
3.	14580.88	41.01	24.17	65.18	74.00	8.82	0	0	vertical
4.	14580.88	21.01	24.17	45.18	54.00	8.82	0	0	vertical
5.	17715.25	21.23	27.63	48.86	54.00	5.14	360	360	vertical
6.	17715.25	41.23	27.63	68.86	74.00	5.14	360	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BDR MID

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

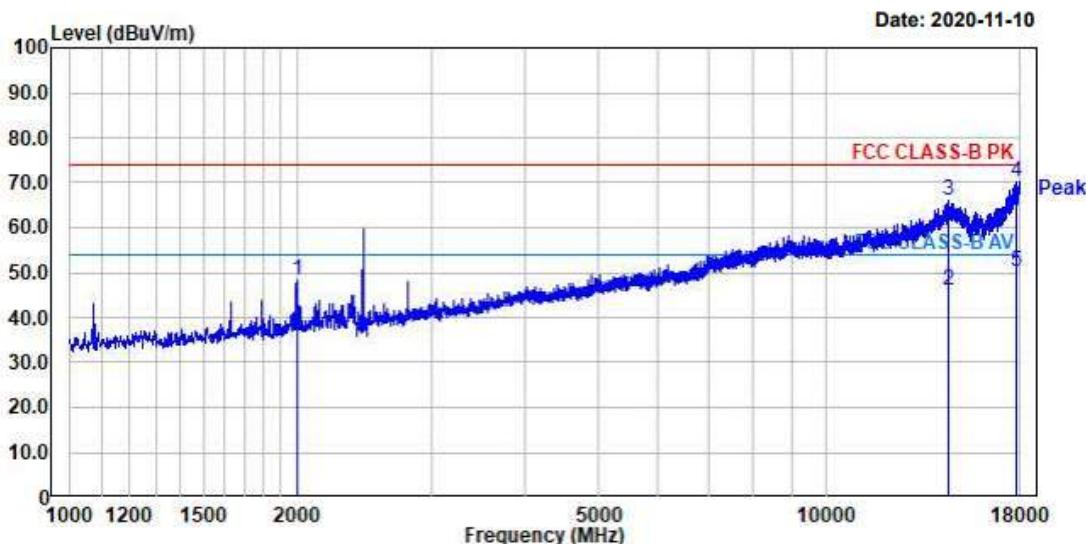

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	1994.50	51.34	-2.94	48.40	74.00	25.60	22	30	horizontal
2.	14515.00	21.65	24.34	45.99	54.00	8.01	2	3	horizontal
3.	14515.00	41.65	24.34	65.99	74.00	8.01	2	3	horizontal
4.	17832.13	41.75	28.28	70.03	74.00	3.97	86	90	horizontal
5.	17832.13	21.75	28.28	50.03	54.00	3.97	86	90	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: Temp/Humi: 24 'C / 51 % R.H.

Test Mode : BDR HIGH Tested by:

Power :

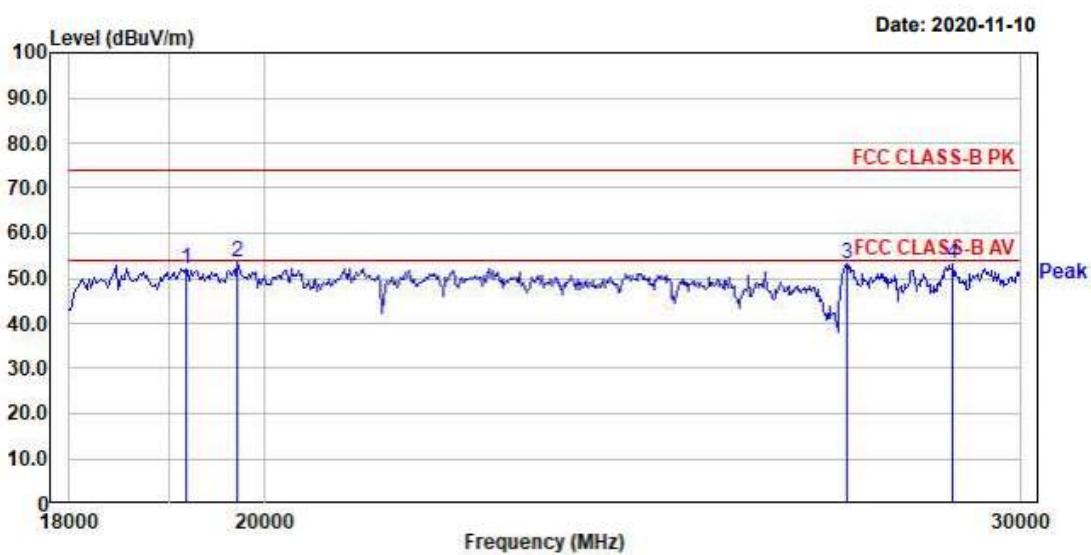

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
	1.19165.22	35.46	16.57	52.03	74.00	21.97	1	4	horizontal
	2.19704.35	37.51	16.07	53.58	74.00	20.42	87	93	horizontal
	3.27321.74	34.50	18.54	53.04	74.00	20.96	160	164	horizontal
	4.28939.13	32.27	20.95	53.22	74.00	20.78	220	222	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: ----- Temp/Humi: 24 'C / 51 % R.H.

Test Mode : BDR HIGH Tested by: -----

Power : -----

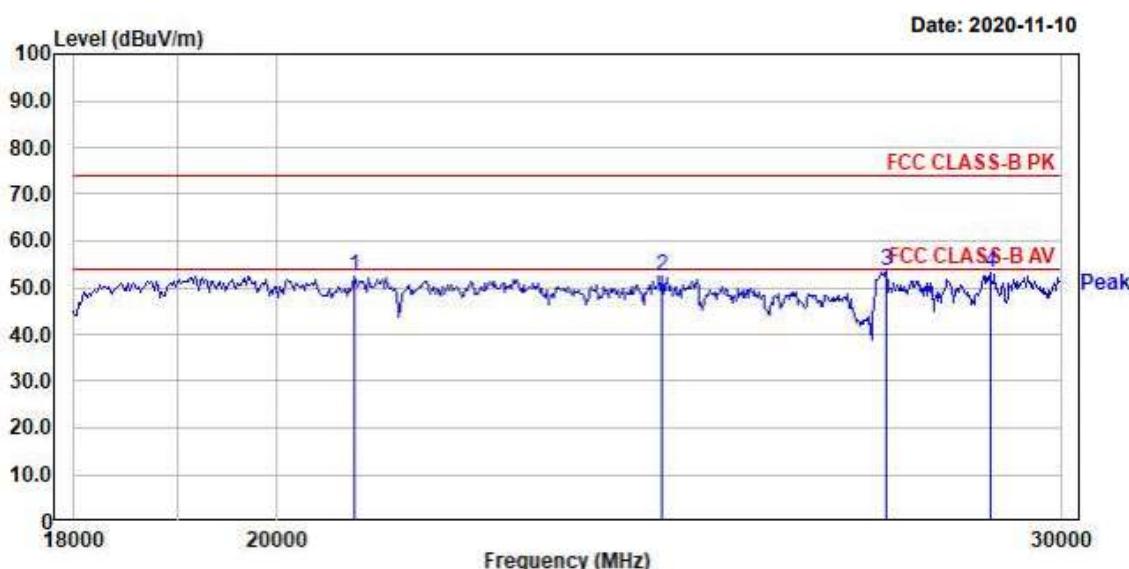

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.20817.39	17.39	36.76	15.67	52.43	74.00	21.57	360	360	vertical
2.24400.00	24400.00	35.99	16.62	52.61	74.00	21.39	360	360	vertical
3.27408.70	27408.70	35.08	18.46	53.54	74.00	20.46	0	0	vertical
4.28921.74	28921.74	32.36	20.95	53.31	74.00	20.69	360	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 24 'C / 51 % R.H.

Test Mode : BDR LOW

Tested by:

Power :

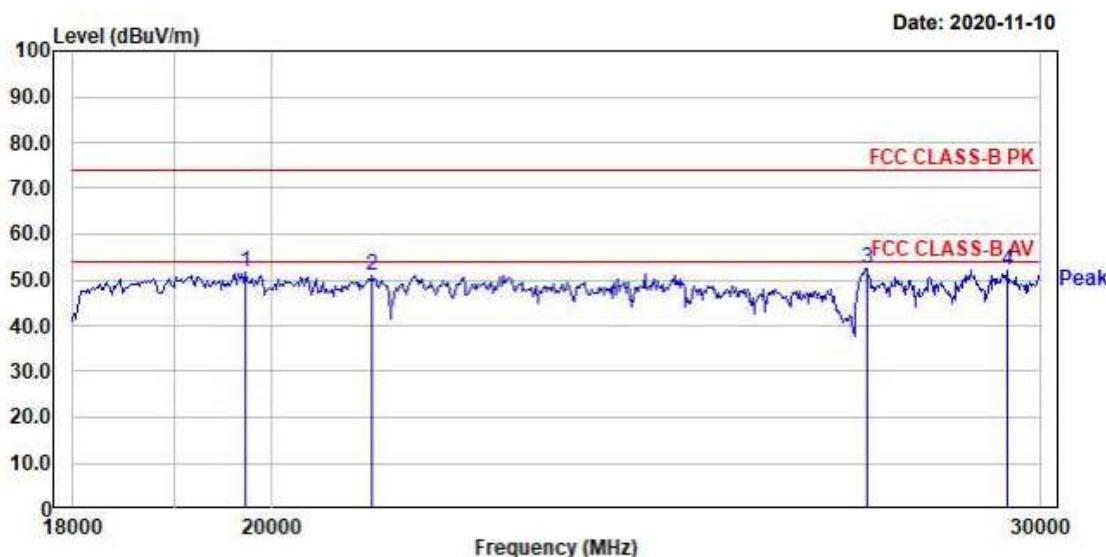

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.19721.74	35.50	16.04	51.54	74.00	22.46	144	151	horizontal	
2.21078.26	35.11	15.85	50.96	74.00	23.04	76	81	horizontal	
3.27373.91	34.12	18.48	52.60	74.00	21.40	0	0	horizontal	
4.29478.26	30.60	21.37	51.97	74.00	22.03	7	11	horizontal	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: Temp/Humi: 24 'C / 51 % R.H.

Test Mode : BDR LOW Tested by:

Power :

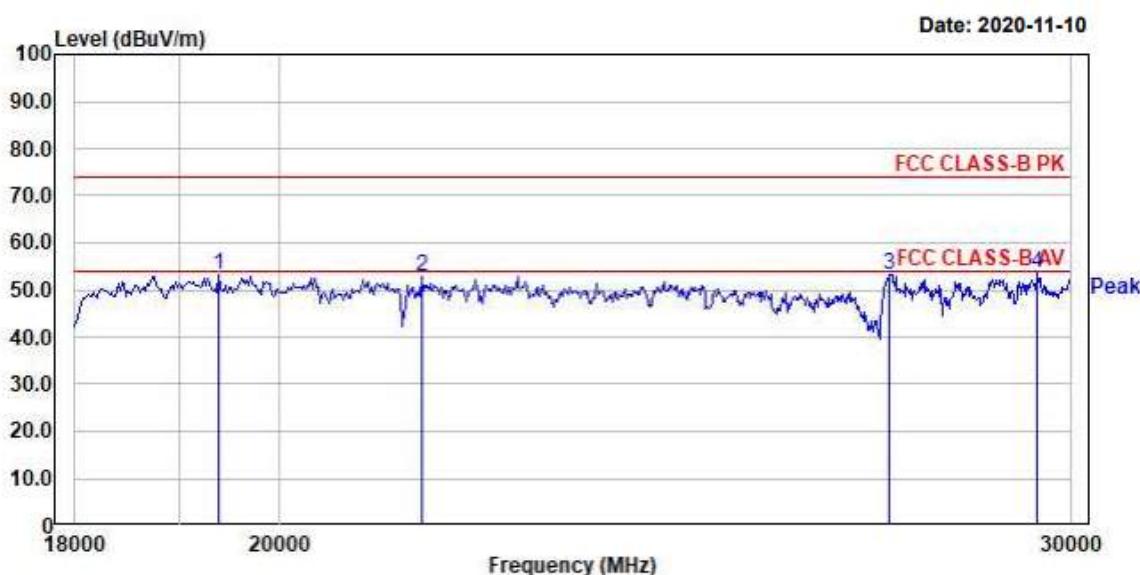

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.19373.91	36.71	16.52	53.23	74.00	20.77	0	0	vertical	
2.21513.04	37.56	15.40	52.96	74.00	21.04	22	18	vertical	
3.27339.13	34.75	18.52	53.27	74.00	20.73	360	360	vertical	
4.29495.65	32.29	21.40	53.69	74.00	20.31	81	73	vertical	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 24 'C / 51 % R.H.

Test Mode : BDR MID

Tested by:

Power :

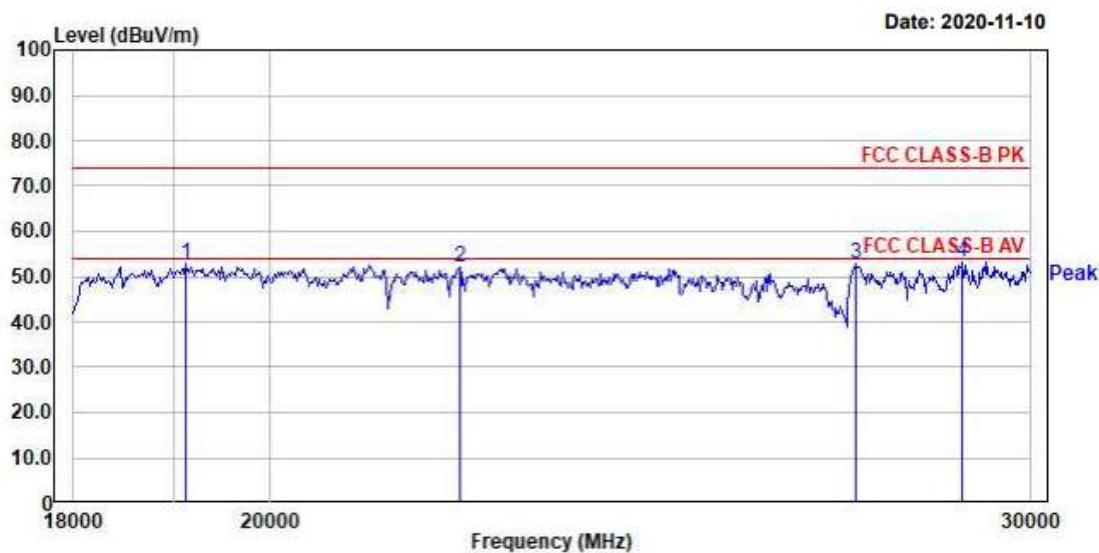

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.19113.04	36.20	16.54	52.74	74.00	21.26	360	360	horizontal	
2.22121.74	36.33	15.71	52.04	74.00	21.96	90	98	horizontal	
3.27339.13	34.14	18.52	52.66	74.00	21.34	77	85	horizontal	
4.28939.13	32.23	20.95	53.18	74.00	20.82	19	26	horizontal	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: ----- Temp/Humi: 24 'C / 51 % R.H.

Test Mode : BDR MID Tested by: -----

Power : -----

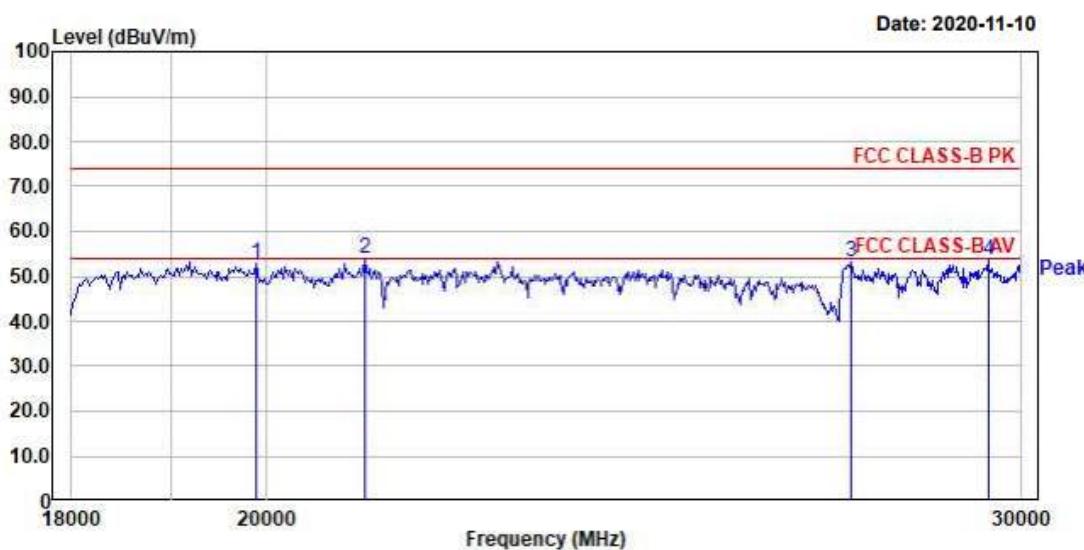

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
									Vertical
1.19878.26	36.80	15.89	52.69	74.00	21.31	195	191	191	vertical
2.21078.26	38.07	15.85	53.92	74.00	20.08	47	45	45	vertical
3.27391.30	34.66	18.48	53.14	74.00	20.86	241	236	236	vertical
4.29478.26	32.11	21.37	53.48	74.00	20.52	328	320	320	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions(EDR)

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR HIGH

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

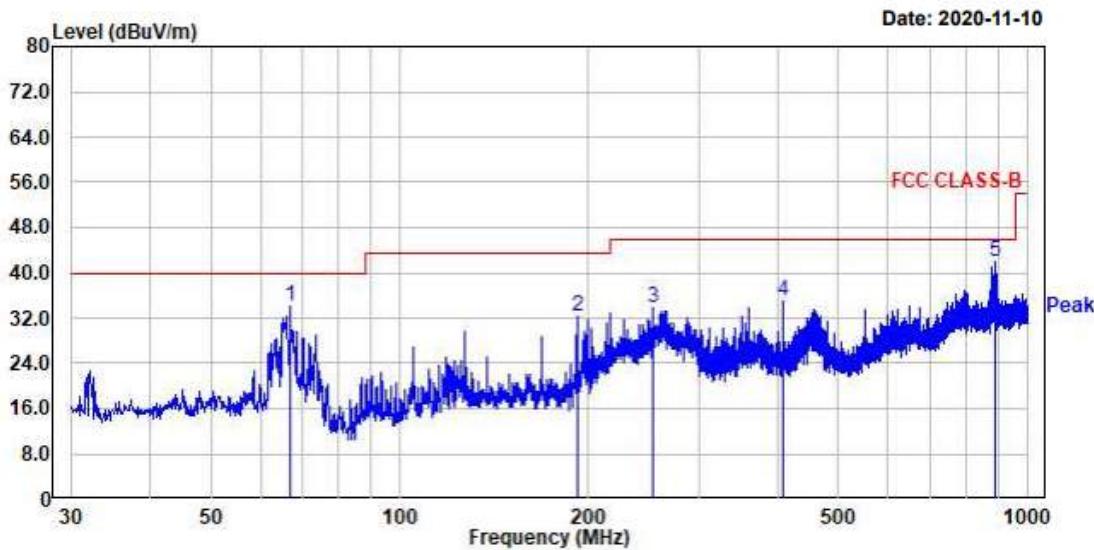

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	cm	deg	
1.	66.86	47.81	-13.72	34.09	40.00	5.91	100	360	horizontal
2.	191.99	45.91	-13.71	32.20	43.50	11.30	100	259	horizontal
3.	253.83	45.69	-11.89	33.80	46.00	12.20	100	39	horizontal
4.	407.94	42.10	-7.10	35.00	46.00	11.00	100	276	horizontal
5.	888.09	39.97	2.00	41.97	46.00	4.03	100	87	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR HIGH

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

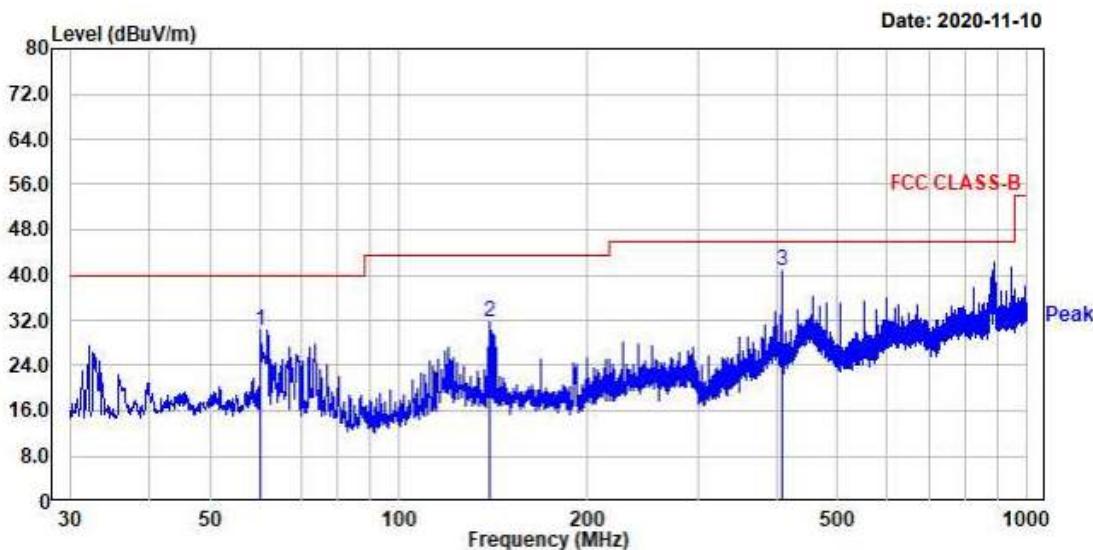

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	60.19	43.17	-13.03	30.14	40.00	9.86	100	33	vertical
2.	139.25	43.23	-11.47	31.76	43.50	11.74	100	236	vertical
3.	407.94	47.83	-7.10	40.73	46.00	5.27	100	169	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR LOW

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

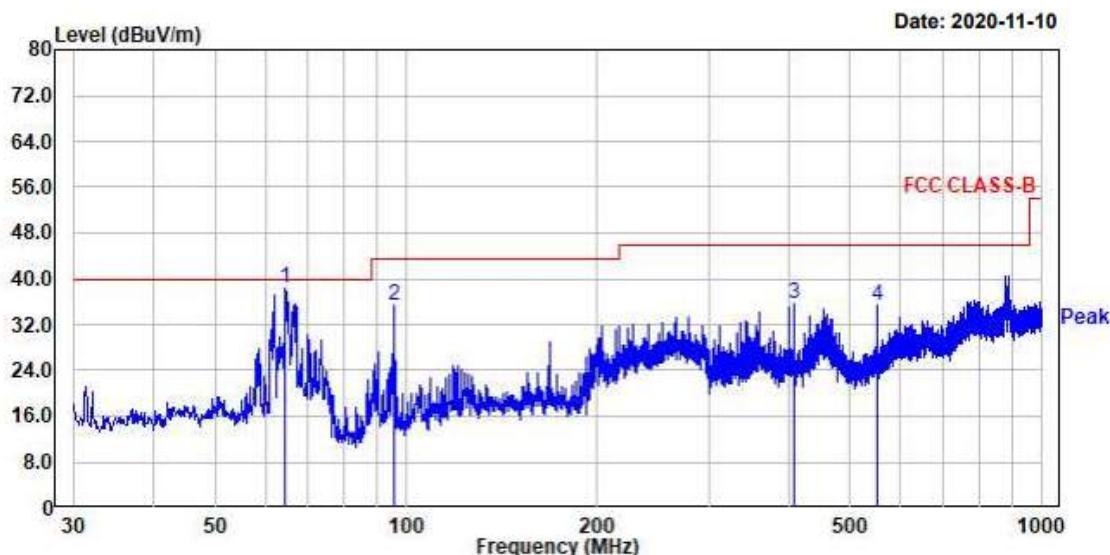

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	64.56	51.84	-13.43	38.41	40.00	1.59	100	295	horizontal
2.	95.96	51.29	-15.95	35.34	43.50	8.16	100	175	horizontal
3.	408.06	42.77	-7.10	35.67	46.00	10.33	100	259	horizontal
4.	551.98	39.34	-3.92	35.42	46.00	10.58	100	125	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR LOW

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

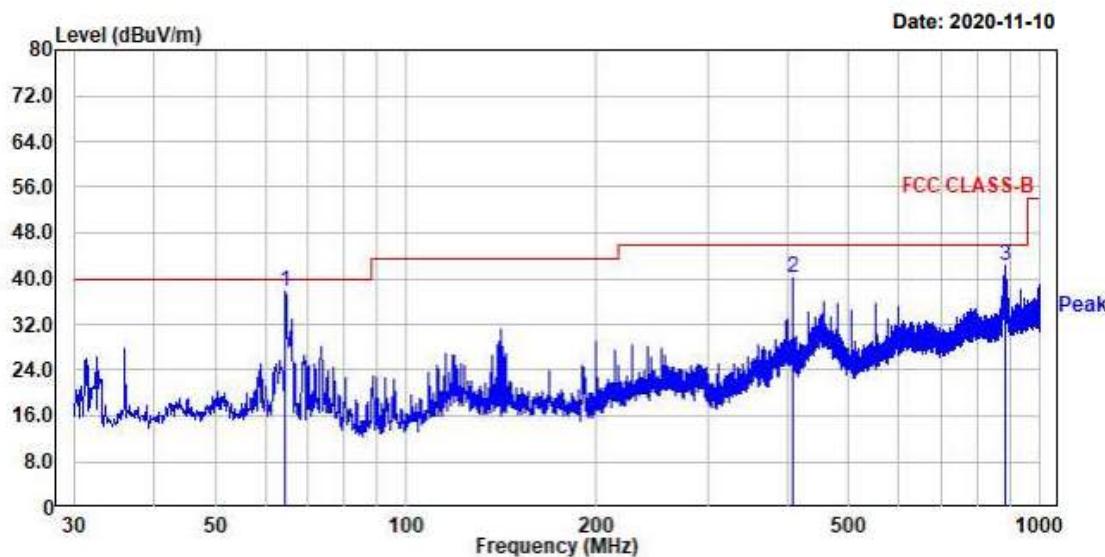

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	64.56	51.10	-13.43	37.67	40.00	2.33	100	120	vertical
2.	408.06	47.22	-7.10	40.12	46.00	5.88	100	169	vertical
3.	884.93	40.29	2.00	42.29	46.00	3.71	100	273	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR MID

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

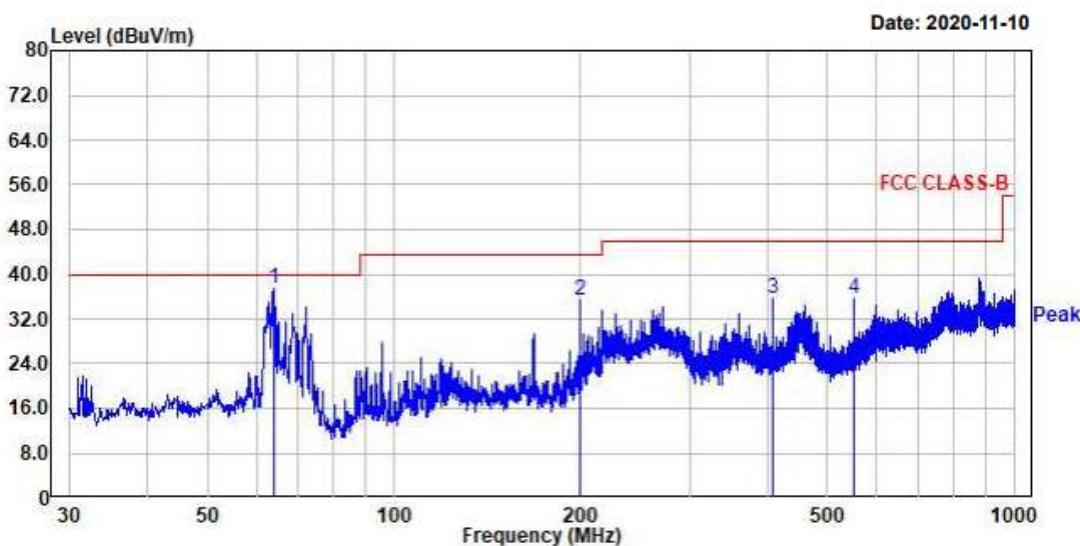

No.	Freq	Reading	C.F	Result QP	Limit	Margin	Height	Angle	Polarity
	MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	cm	deg	
1.	63.95	50.79	-13.37	37.42	40.00	2.58	100	294	horizontal
2.	199.39	49.36	-14.16	35.20	43.50	8.30	100	93	horizontal
3.	408.06	42.76	-7.10	35.66	46.00	10.34	100	244	horizontal
4.	551.98	39.49	-3.92	35.57	46.00	10.43	100	145	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR MID

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

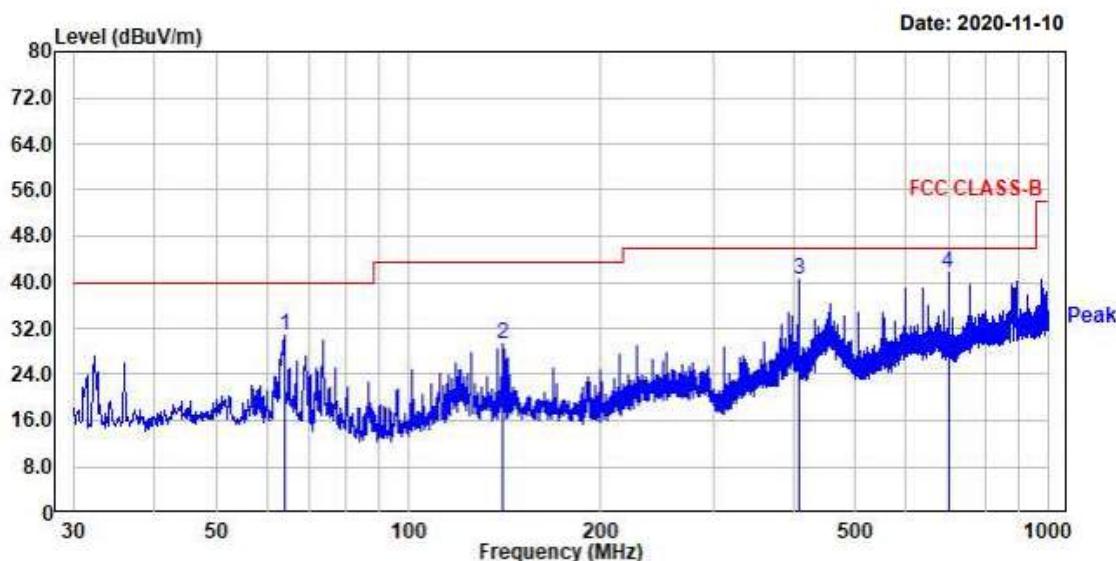

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	64.07	44.27	-13.38	30.89	40.00	9.11	100	249	vertical
2.	140.58	40.53	-11.33	29.20	43.50	14.30	100	360	vertical
3.	408.06	47.58	-7.10	40.48	46.00	5.52	100	183	vertical
4.	697.97	42.98	-1.30	41.68	46.00	4.32	100	268	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: RF Temp/Humi: EDR HIGH

Test Mode : 20 'C / 36 % R.H. Tested by:

Power :

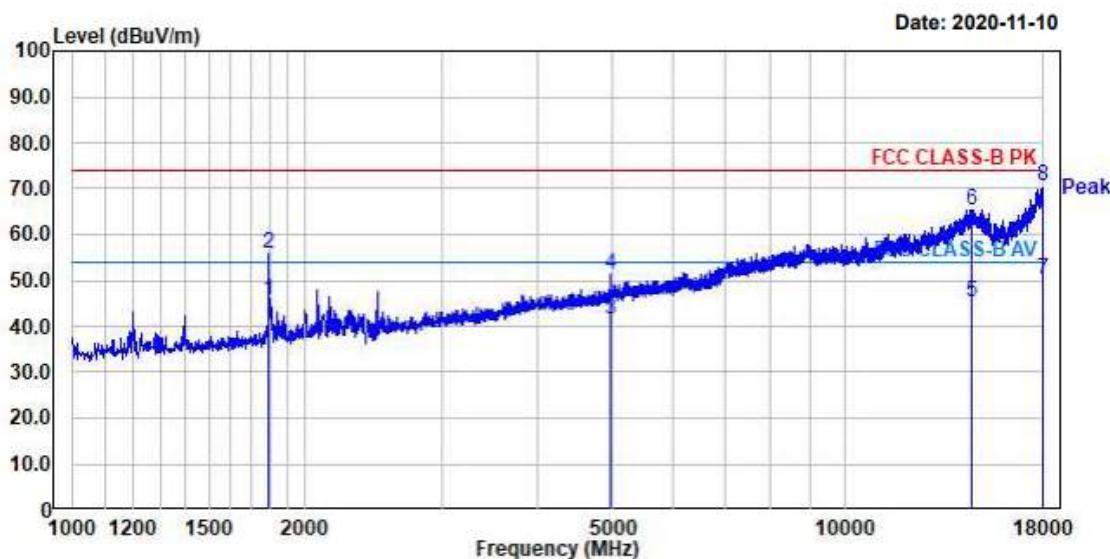

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	1794.75	50.27	-4.47	45.80	54.00	8.20	144	139	vertical
2.	1794.75	60.27	-4.47	55.80	74.00	18.20	144	139	vertical
3.	4958.88	31.79	9.55	41.34	54.00	12.66	360	360	vertical
4.	4958.88	41.79	9.55	51.34	74.00	22.66	360	360	vertical
5.	14587.25	21.13	24.16	45.29	54.00	8.71	303	297	vertical
6.	14587.25	41.28	24.16	65.44	74.00	8.56	303	297	vertical
7.	18000.00	21.14	29.20	50.34	54.00	3.66	30	24	vertical
8.	18000.00	41.24	29.20	70.44	74.00	3.56	30	24	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR LOW

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

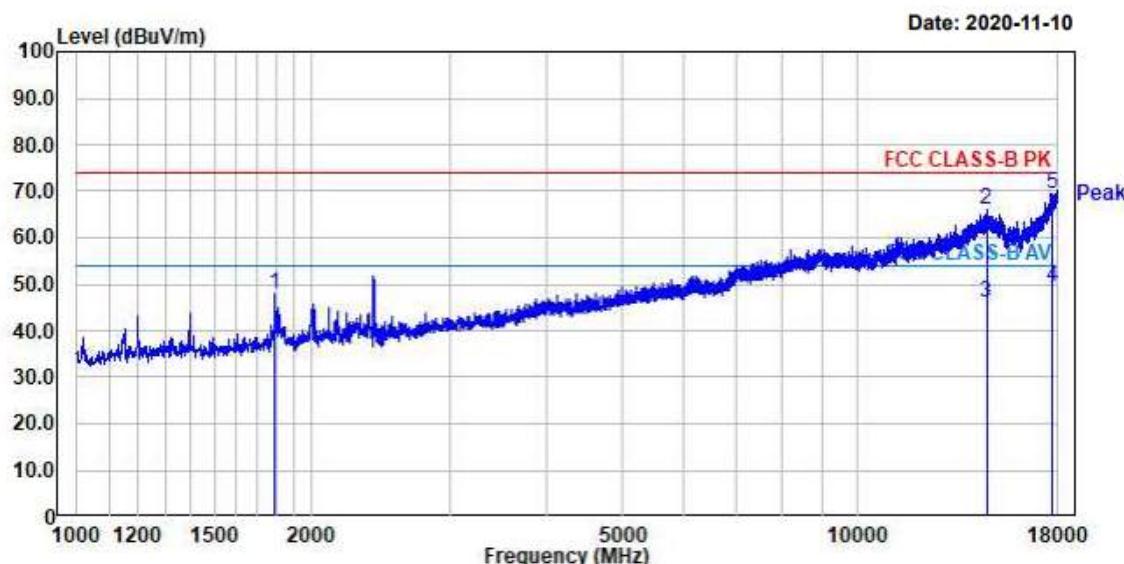

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	1792.63	52.42	-4.48	47.94	74.00	26.06	159	154	horizontal
2.	14610.63	41.80	24.09	65.89	74.00	8.11	46	41	horizontal
3.	14610.63	21.80	24.09	45.89	54.00	8.11	46	41	horizontal
4.	17728.00	21.85	27.70	49.55	54.00	4.45	323	315	horizontal
5.	17728.00	41.85	27.70	69.55	74.00	4.45	323	315	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR LOW

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

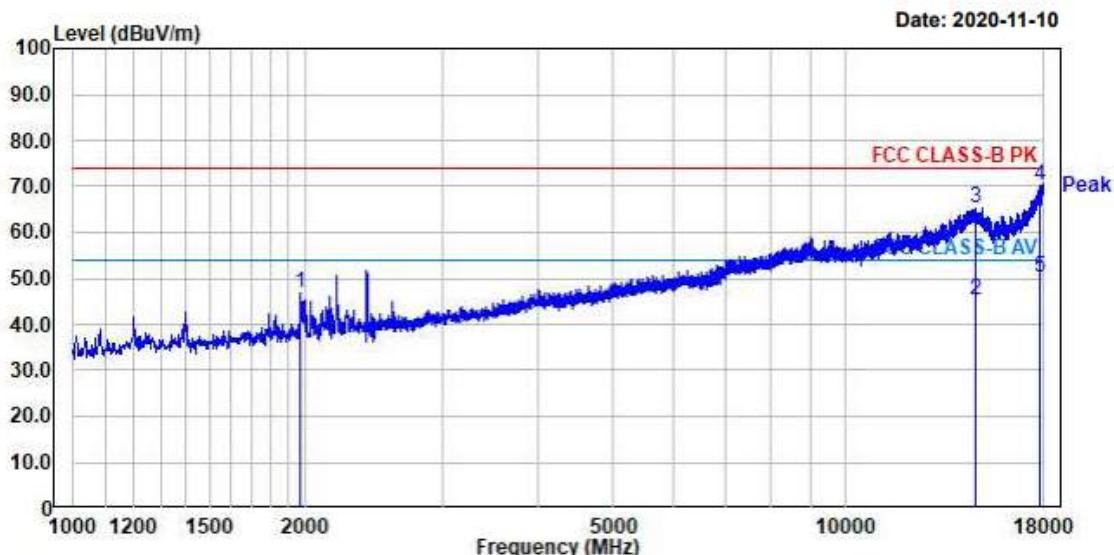

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	1966.88	49.82	-3.15	46.67	74.00	27.33	38	45	vertical
2.	2.14744.50	21.60	23.74	45.34	54.00	8.66	0	0	vertical
3.	3.14744.50	41.60	23.74	65.34	74.00	8.66	0	0	vertical
4.	4.17793.88	42.14	28.07	70.21	74.00	3.79	0	0	vertical
5.	5.17793.88	22.14	28.07	50.21	54.00	3.79	0	0	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR MID

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

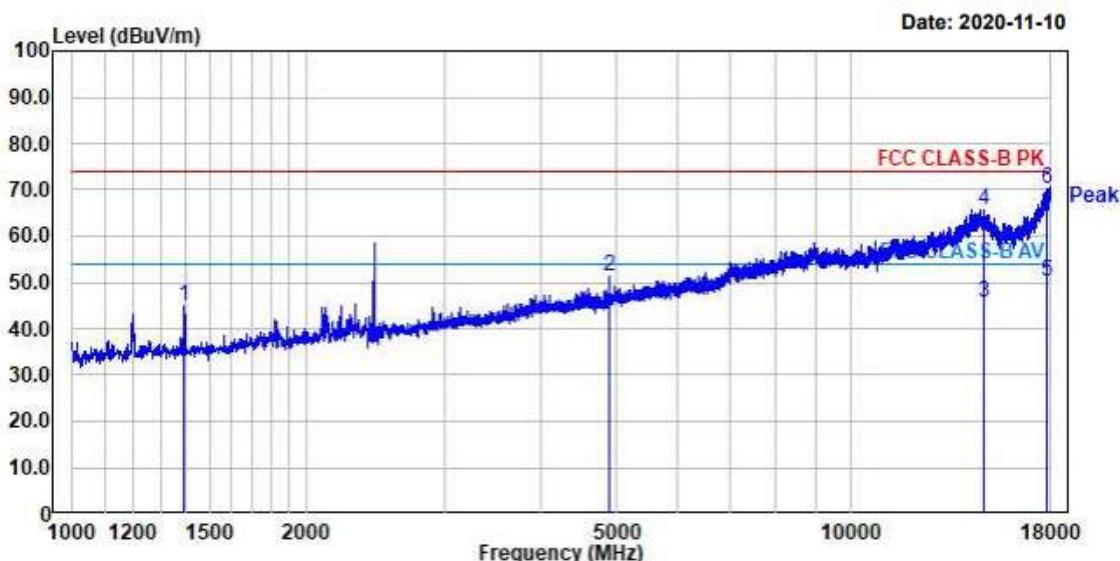

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	cm	deg	
1.	1393.13	52.13	-7.36	44.77	74.00	29.23	0	0	horizontal
2.	4884.50	42.17	9.27	51.44	74.00	22.56	211	216	horizontal
3.	14808.25	22.10	23.58	45.68	54.00	8.32	353	357	horizontal
4.	14808.25	42.10	23.58	65.68	74.00	8.32	353	357	horizontal
5.	17791.75	22.24	28.05	50.29	54.00	3.71	132	138	horizontal
6.	17791.75	42.24	28.05	70.29	74.00	3.71	132	138	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: EDR MID

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

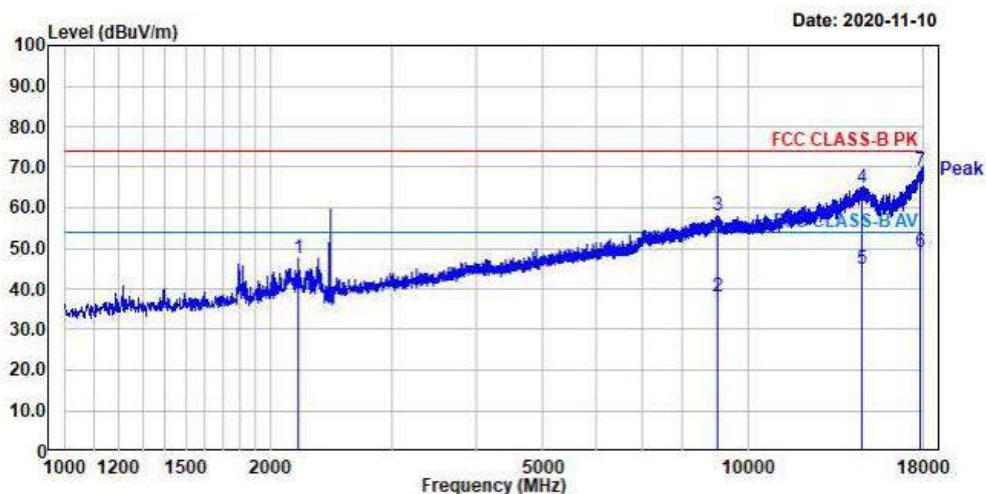

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	2198.50	49.60	-1.93	47.67	74.00	26.33	206	201	vertical
2.	9011.25	20.78	17.45	38.23	54.00	15.77	360	360	vertical
3.	9011.25	40.78	17.45	58.23	74.00	15.77	360	360	vertical
4.	14631.88	40.83	24.03	64.86	74.00	9.14	337	330	vertical
5.	14631.88	20.83	24.03	44.86	54.00	9.14	337	330	vertical
6.	17813.00	20.71	28.17	48.88	54.00	5.12	291	282	vertical
7.	17813.00	40.71	28.17	68.88	74.00	5.12	291	282	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: ----- Temp/Humi: 24 'C / 51 % R.H.

Test Mode : EDR HIGH Tested by: -----

Power : -----

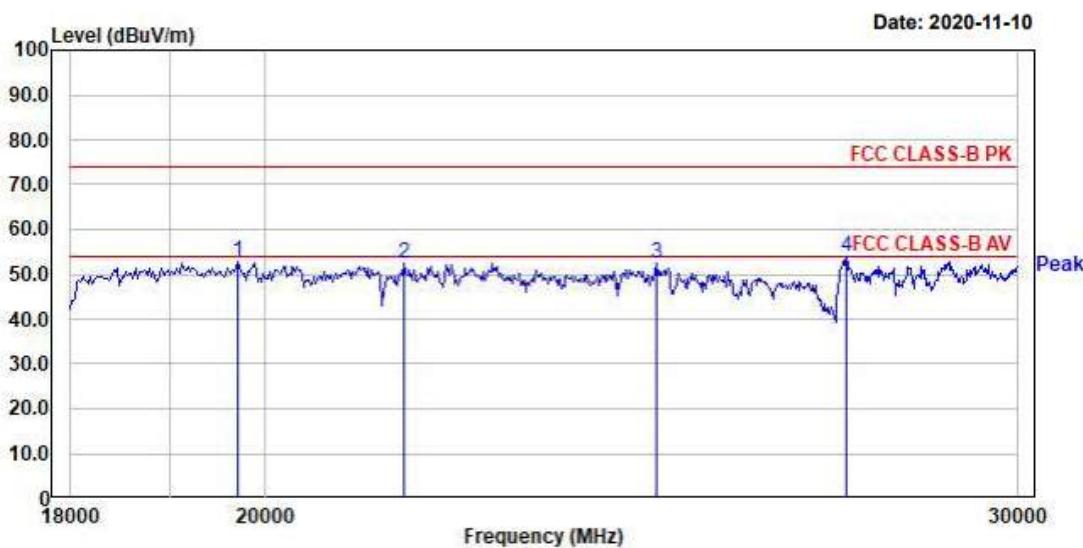

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
	1.19704.35	36.81	16.07	52.88	74.00	21.12	79	84	horizontal
	2.21547.83	37.06	15.45	52.51	74.00	21.49	220	225	horizontal
	3.24695.65	35.86	16.59	52.45	74.00	21.55	35	40	horizontal
	4.27356.52	35.48	18.50	53.98	74.00	20.02	250	252	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: Temp/Humi: 24 'C / 51 % R.H.

Test Mode : EDR HIGH Tested by:

Power :

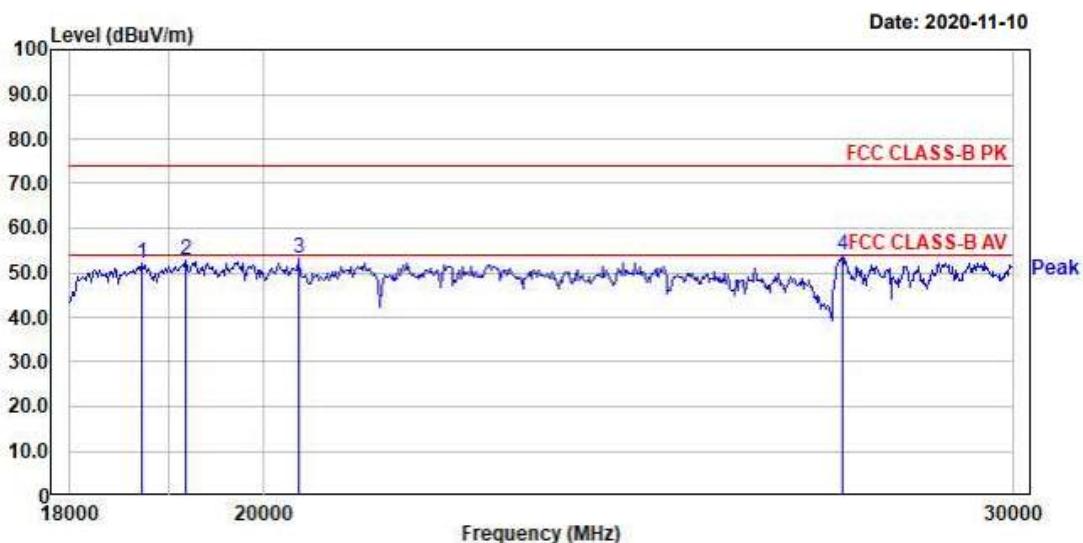

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.18713.04	35.13	16.79	51.92	74.00	22.08	359	357	vertical	
2.19165.22	36.09	16.57	52.66	74.00	21.34	184	175	vertical	
3.20382.61	37.90	15.28	53.18	74.00	20.82	360	360	vertical	
4.27356.52	35.53	18.50	54.03	74.00	19.97	0	0	vertical	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: ----- Temp/Humi: 24 'C / 51 % R.H.

Test Mode : EDR LOW Tested by: -----

Power : -----

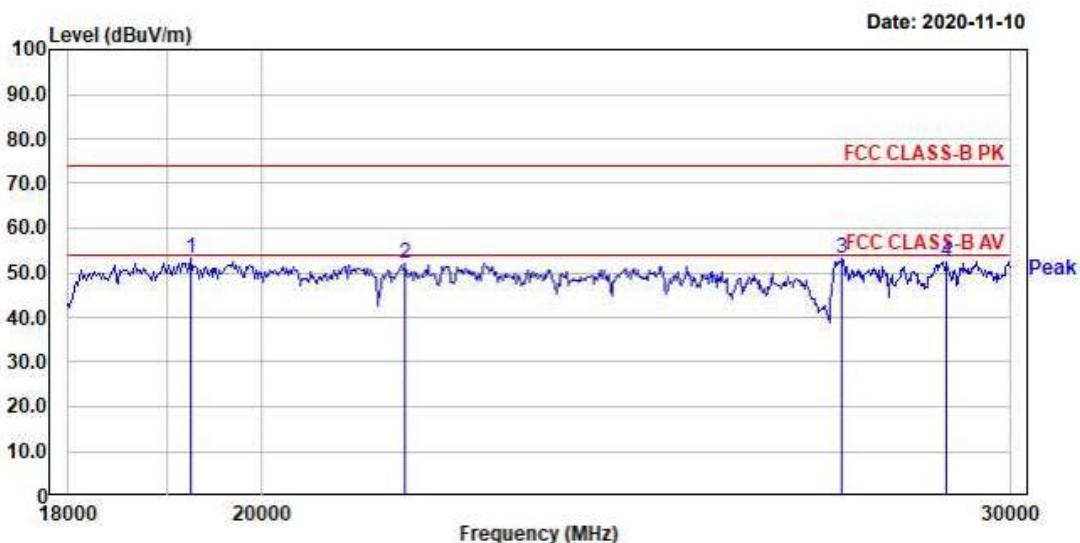

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.19234.78	36.57	16.58	53.15	74.00	20.85	18	27	horizontal	
2.21617.39	36.56	15.51	52.07	74.00	21.93	89	97	horizontal	
3.27391.30	34.78	18.48	53.26	74.00	20.74	2	3	horizontal	
4.28991.30	31.62	20.98	52.60	74.00	21.40	6	12	horizontal	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: ----- Temp/Humi: 24 'C / 51 % R.H.

Test Mode : EDR LOW Tested by: -----

Power : -----

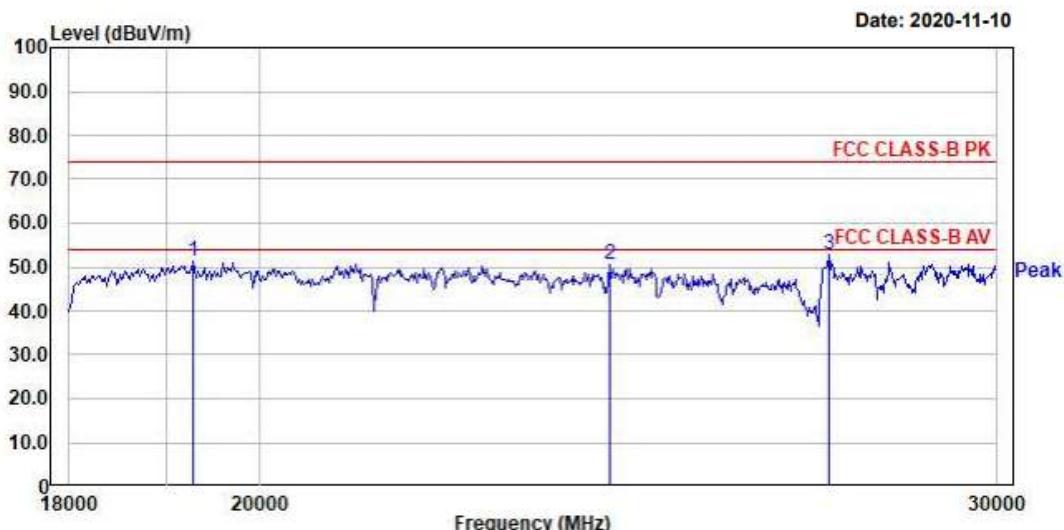

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	cm	deg	
	1.19269.56	34.89	16.57	51.46	74.00	22.54	151	144	vertical
	2.24243.48	34.25	16.31	50.56	74.00	23.44	94	90	vertical
	3.27356.52	34.33	18.50	52.83	74.00	21.17	192	187	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: Temp/Humi: 24 'C / 51 % R.H.

Test Mode : EDR MID Tested by:

Power : -----

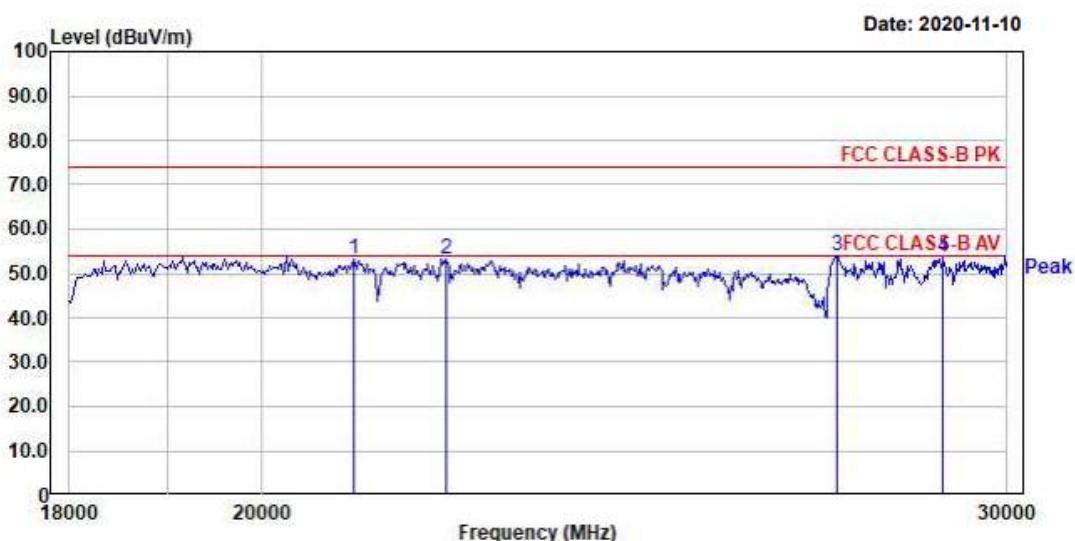


No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.21026.09	37.29	15.84	53.13	74.00	20.87	233	240	horizontal	
2.22104.35	37.52	15.72	53.24	74.00	20.76	19	26	horizontal	
3.27356.52	35.43	18.50	53.93	74.00	20.07	277	281	horizontal	
4.28991.30	32.71	20.98	53.69	74.00	20.31	277	281	horizontal	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: ----- Temp/Humi: 24 'C / 51 % R.H.
Test Mode : EDR MID Tested by: -----
Power : -----

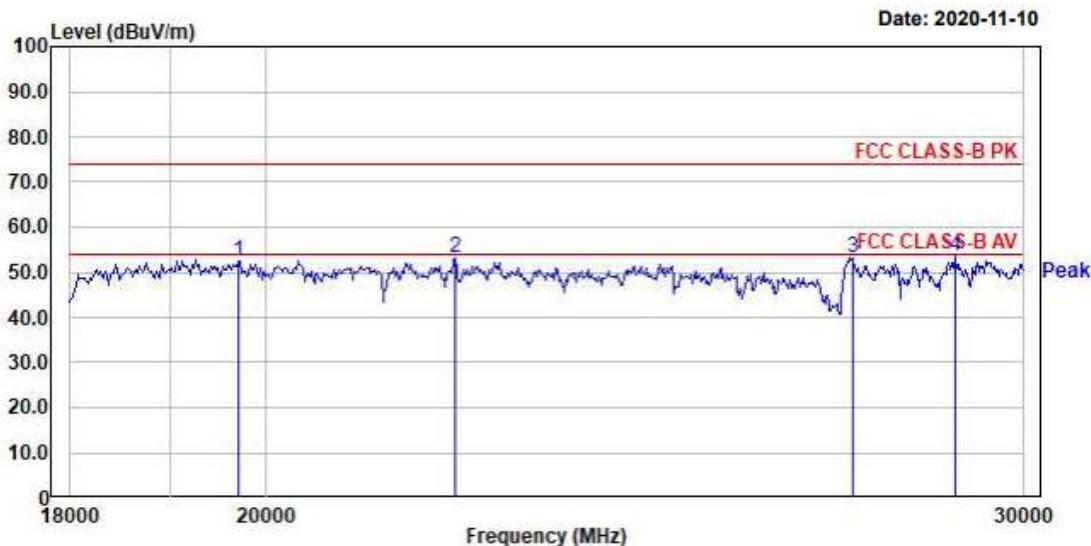

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
									vertical
1.19704.35	36.26	16.07	52.33	74.00	21.67	360	360	360	vertical
2.22121.74	37.50	15.71	53.21	74.00	20.79	75	69	69	vertical
3.27373.91	34.90	18.48	53.38	74.00	20.62	360	360	360	vertical
4.28921.74	32.81	20.95	53.76	74.00	20.24	360	360	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.3.9 AC Conducted Emissions

Procedure:

AC power line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2003.

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.


Measurement Data: : Complies

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

EUT /Model No. : SDK-0502
 Test Mode : Operating mode
 Temp./ Humi. : 23 'C / 43 % R.H.

Phase : Line
 Test Power : 120 V / 60 Hz
 Test Engineer : KIM C B

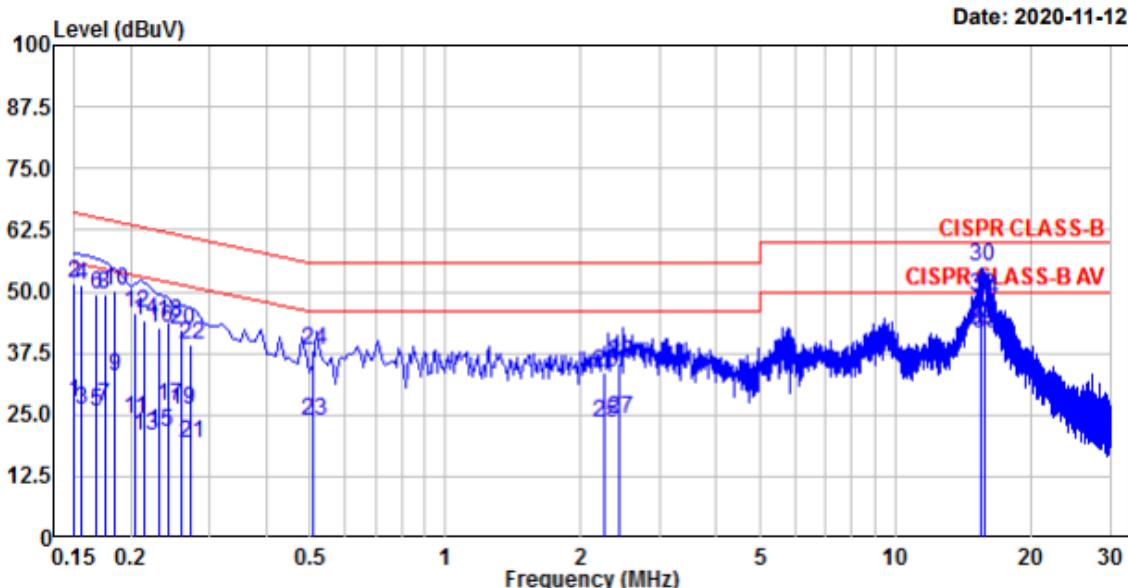


No.	Freq MHz	RD QP	RD AV	C.F.	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Phase
		dB μ V	dB μ V	dB	dB μ V	dB μ V	dB μ V	dB μ V	dB	dB	
2.	0.150	32.15	8.19	19.47	51.62	27.66	65.99	55.99	14.37	28.33	Line
4.	0.155	31.75	6.62	19.47	51.22	26.09	65.71	55.71	14.49	29.62	Line
6.	0.169	30.06	6.23	19.47	49.53	25.70	65.03	55.03	15.50	29.33	Line
8.	0.175	29.86	7.51	19.47	49.33	26.98	64.71	54.71	15.38	27.73	Line
10.	0.185	30.78	13.21	19.47	50.25	32.68	64.24	54.24	13.99	21.56	Line
12.	0.205	26.34	4.63	19.47	45.81	24.10	63.41	53.41	17.60	29.31	Line
14.	0.215	24.80	1.38	19.47	44.27	20.85	63.01	53.01	18.74	32.16	Line
16.	0.232	23.33	1.97	19.47	42.80	21.44	62.37	52.37	19.57	30.93	Line
18.	0.243	24.28	7.29	19.47	43.75	26.76	62.01	52.01	18.26	25.25	Line
20.	0.259	22.98	6.76	19.47	42.45	26.23	61.46	51.46	19.01	25.23	Line
22.	0.272	19.85	-0.23	19.47	39.32	19.24	61.06	51.06	21.74	31.82	Line
24.	0.508	18.74	4.22	19.49	38.23	23.71	56.00	46.00	17.77	22.29	Line
26.	2.259	13.96	3.86	19.58	33.54	23.44	56.00	46.00	22.46	22.56	Line
28.	2.441	15.77	4.44	19.58	35.35	24.02	56.00	46.00	20.65	21.98	Line
30.	15.429	35.12	22.43	19.97	55.09	42.40	60.00	50.00	4.91	7.60	Line
32.	15.448	29.10	22.39	19.97	49.07	42.36	60.00	50.00	10.93	7.64	Line
34.	15.777	28.25	21.35	19.97	48.22	41.32	60.00	50.00	11.78	8.68	Line

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Windows 저프 이즈

EUT /Model No. : SDK-0502
 Test Mode : Operating mode
 Temp./ Humi. : 23 °C / 43 % R.H.

Phase : Neutral
 Test Power : 120 V / 60 Hz
 Test Engineer : KIM C B

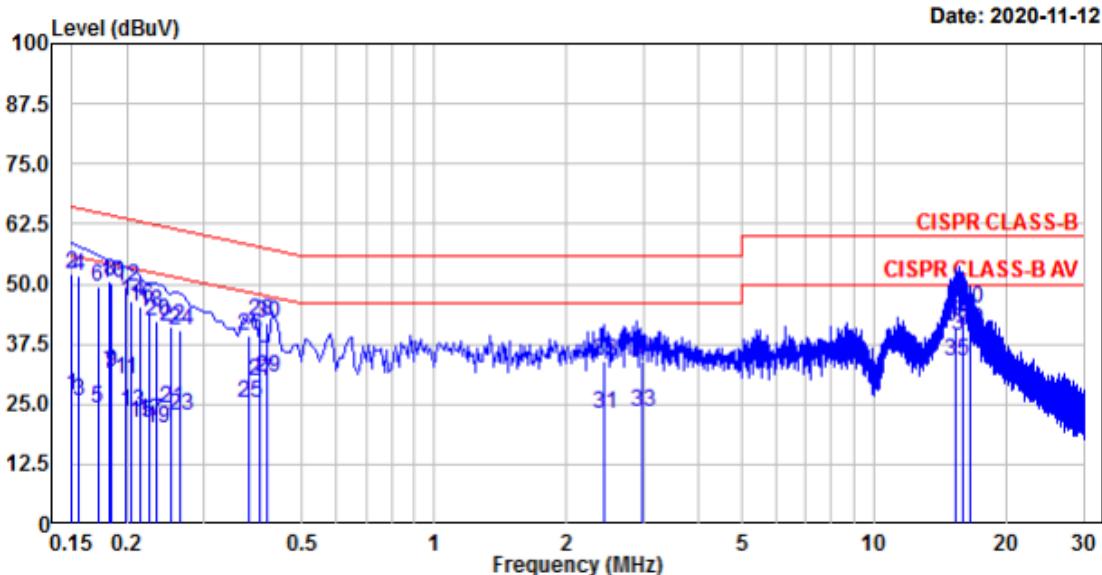

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2021-09-06
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2021-03-20
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2021-03-20
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2021-09-06
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2021-09-06
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2021-09-06
7		RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2021-09-06
8		RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2021-03-20
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2022-08-04
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2022-03-18
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2022-03-18
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2021-03-20
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2021-03-20
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2021-03-20
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2021-09-06
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2021-09-06
20		Moduleation Analyzer	8901B	3749A05878	HP	1 year	2021-09-06
21		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2021-09-06
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2021-03-18
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2021-09-06
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2021-03-18
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2021-03-18
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2021-03-18
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2021-03-18
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2021-03-18
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2021-03-18
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2021-03-18
31	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2021-02-26