

FCC PART 15E TEST REPORT FOR CERTIFICATION

On Behalf of

Funai Electric R & D (Shenzhen) Co., Ltd.

Wi-Fi Module

U9W44

FCC ID: 2AU3BU9W44

Prepared for : Funai Electric R & D (Shenzhen) Co., Ltd.

B303 Technology Building II, 1057 Nanhai Road, Nanshan
District, Shenzhen, China 518067

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F23229

Date of Test : Nov.13 ~ 24, 2023

Date of Report : Dec.08, 2023

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test	6
2.2. Feature of Equipment Under Test	7
2.3. Test Information.....	9
2.4. Tested Supporting System Details	11
2.5. Block diagram of connection between the EUT and simulators.....	11
2.6. Test Facility.....	12
2.7. Measurement Uncertainty (95% confidence levels, k=2).....	12
3. POWER LINE CONDUCTED EMISSION TEST	13
3.1. Test Equipments.....	13
3.2. Block Diagram of Test Setup	13
3.3. Power Line Conducted Emission Test Limits.....	13
3.4. Configuration of EUT on Test	14
3.5. Operating Condition of EUT.....	14
3.6. Test Procedure.....	14
3.7. Power Line Conducted Emission Test Results	14
4. RADIATED EMISSION TEST	16
4.1. Test Equipments.....	16
4.2. Block Diagram of Test Setup	17
4.3. Radiated Emission Limits	18
4.4. EUT Configuration on Test.....	19
4.5. Operating Condition of EUT.....	19
4.6. Test Procedure.....	19
4.7. Radiated Emission Test Results.....	21
5. Band Edge Compliance Test.....	68
5.1. Test Equipments.....	68
5.2. Limit	68
5.3. Test Procedure	68
5.4. Test Results	68
6. 6dB & 26dB & 99% Occupied Bandwidth Test.....	93
6.1. Test Equipments.....	93
6.2. Limit	93
6.3. Test Procedure.....	93
6.4. Test Results	94
7. OUTPUT POWER TEST	104
7.1. Test Equipments.....	104
7.2. Limit	104
7.3. Test Procedure.....	104
7.4. Test Results	105
8. SPECTRAL DENSITY TEST.....	117
8.1. Test Equipments.....	117
8.2. Limit	117
8.3. Test Procedure.....	117
8.4. Test Results	118
9. FREQUENCY STABILITY MEASUREMENT.....	124
9.1. Test Equipments.....	124
9.2. Limit	124



9.3. Test Procedure..... 124

9.4. Test Result..... 125

10. ANTENNA REQUIREMENT..... 129

10.1. Standard Applicable 129

10.2. Antenna Connected Construction 129

11. DEVIATION TO TEST SPECIFICATIONS..... 130

Appendix A. Setup Photographs

Appendix B. Photographs of EUT

TEST REPORT

Applicant : Funai Electric R & D (Shenzhen) Co., Ltd.
Manufacturer : Funai Electric R & D (Shenzhen) Co., Ltd.
Product : Wi-Fi Module
FCC ID : 2AU3BU9W44
(A) Model No. : U9W44
(B) Test Voltage : DC 3.3V From PC Input AC 120V/60Hz

Tested for comply with:
FCC CFR47 Part 15 Subpart E

Test procedure used:
ANSI C63.10: 2020
KDB 789033 D02 General UNII Test Procedures New Rules v01r04

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart E requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. government.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test : Nov.13 ~ 24, 2023 Report of date: Dec.08, 2023

Prepared by : Jasmine Ning Reviewed by : Thomas Chen
Jasmine Ning / Assistant Thomas Chen / Assistant Manager



Approved & Authorized Signer : Sunny Lu
Sunny Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 FCC Part 15: 15.407(b)(6)	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205 FCC Part 15.407(b)	PASS
Band Edge Compliance	FCC Part 15: 15.407(b) FCC Part 15.205	PASS
6dB&26dB&99% Bandwidth Test	FCC Part 15: 15.407(e)	PASS
Output Power Test	FCC Part 15: 15.407(a)(5)	PASS
Equivalent Isotropic Radiated Power Test	FCC Part 15: 15.407(h)(1)	N/A
Power Spectral Density Test	FCC Part 15: 15.407(a)	PASS
Frequency Stability	FCC Part 15: 15.407(a)	PASS
Antenna requirement	FCC Part 15: 15.407(g)	PASS
N/A is an abbreviation for Not Applicable		
Note 1: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.		

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	Funai Electric R & D (Shenzhen) Co., Ltd.
Applicant Address	B303 Technology Building II, 1057 Nanhai Road, Nanshan District, Shenzhen, China 518067
Manufacturer	Funai Electric R & D (Shenzhen) Co., Ltd.
Manufacturer Address	B303 Technology Building II, 1057 Nanhai Road, Nanshan District, Shenzhen, China 518067
Factory	Funai (Thailand) Company Limited
Factory Address	835 Moo18, Pakchong-Lumsompung Road, Tambon, Chantuek, Amphur Pakchong, Nakhon Ratchasima 30130, Thailand
Product	Wi-Fi Module
Model No.	U9W44
FCC ID	2AU3BU9W44
Sample Type	Prototype production
Date of Receipt	Nov.06,2023
Date of Test	Nov.13 ~ 24, 2023
Remark: This report only for WIFI 5GHz.	

2.2.Feature of Equipment Under Test

Product Feature & Specification		
Product	Wi-Fi Module	
Model No.	U9W44	
Radio	IEEE802.11 a/b/g/n/ac	
Power Source	☐ Commercial Power	AC 100~240 V
	☒ External Power Source	DC 3.3V
	☐ Li-ion Battery	DC V
	☐ UM battery	DC V
Bluetooth		
Radio	BDR +EDR; BLE	
Frequency Range	2402-2480MHz	
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK	
Data Rate	1Mbps, 2Mbps, 3Mbps	
Quantity of Channels	79/40	
Channel Separation	1MHz/2MHz	
2.4GHz Wi-Fi		
Support Modes	802.11b/g/n20/n40	
Frequency Range	2412-2462MHz	
Type of Modulation	802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK	
Data Rate	802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps	
Channel Separation	5MHz	
5GHz Wi-Fi		
Support Modes	802.11a/n20/n40/ac20/ac40/ac80	
Frequency Range	5180-5240MHz, 5745-5825MHz	
Type of Modulation	802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM 802.11ac (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM	
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 867Mbps	
Channel Separation	5MHz	

Antenna System	
Antenna Peak Gain & Type of Antenna	Bluetooth (2.402-2.480GHz) Antenna
	Antenna Type : External PCB Antenna
	Antenna Gain: -0.42dBi max
	Wi-Fi 2.4GHz Antenna
	Antenna Type : Embedded Pattern Antennas (Antenna A/B)
	Antenna Gain: -3.77dBi max (Antenna A)
	-1.15dBi max (Antenna B)
	Wi-Fi U-NII-1 Band (5.15-5.25GHz) Antenna
	Antenna Type : Embedded Pattern Antennas(Antenna A/B)
	Antenna Gain: 1.91dBi max (Antenna A)
	-2.55dBi max (Antenna B)
	Wi-Fi U-NII-3 Band (5.725-5.85GHz) Antenna
	Antenna Type : PCB Antennas (Antenna A/B)
	Antenna Gain: 3.12dBi max (Antenna A)
	0.38dBi max (Antenna B)

2.3.Test Information

A special test software(QATool_Dbg.exe) was used to control EUT work in TX mode, and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information					
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)	Power setting	
				ANT A	ANT B
IEEE 802.11a	6	CH36	5180	22	22
	6	CH40	5200	22	22
	6	CH48	5240	22	22
	6	CH52	5260	22	22
	6	CH60	5300	22	22
	6	CH64	5320	22	22
	6	CH100	5500	22	22
	6	CH120	5600	22	22
	6	CH140	5700	22	22
	6	CH149	5745	22	22
	6	CH157	5785	22	22
	6	CH165	5825	22	22
IEEE 802.11nHT20	MCS0	CH36	5180	22	22
	MCS0	CH40	5200	22	22
	MCS0	CH48	5240	22	22
	MCS0	CH52	5260	22	22
	MCS0	CH60	5300	22	22
	MCS0	CH64	5320	22	22
	MCS0	CH100	5500	22	22
	MCS0	CH120	5600	22	22
	MCS0	CH140	5700	22	22
	MCS0	CH149	5745	22	22
	MCS0	CH157	5785	22	22
	MCS0	CH165	5825	22	22
IEEE 802.11nHT40	MCS0	CH38	5190	22	22
	MCS0	CH46	5230	22	22
	MCS0	CH54	5270	22	22
	MCS0	CH62	5310	22	22
	MCS0	CH102	5510	22	22
	MCS0	CH118	5590	22	22
	MCS0	CH134	5670	22	22
	MCS0	CH151	5755	22	22
	MCS0	CH159	5795	22	22

IEEE 802.11acVHT20	MCS0	CH36	5180	22	22
	MCS0	CH40	5200	22	22
	MCS0	CH48	5240	22	22
	MCS0	CH52	5260	22	22
	MCS0	CH60	5300	22	22
	MCS0	CH64	5320	22	22
	MCS0	CH100	5500	22	22
	MCS0	CH120	5600	22	22
	MCS0	CH140	5700	22	22
	MCS0	CH149	5745	22	22
	MCS0	CH157	5785	22	22
	MCS0	CH165	5825	22	22
IEEE 802.11acVHT40	MCS0	CH38	5190	22	22
	MCS0	CH46	5230	22	22
	MCS0	CH54	5270	22	22
	MCS0	CH62	5310	22	22
	MCS0	CH102	5510	22	22
	MCS0	CH118	5590	22	22
	MCS0	CH134	5670	22	22
	MCS0	CH151	5755	22	22
	MCS0	CH159	5795	22	22
IEEE 802.11acVHT80	MCS0	CH42	5210	22	22
	MCS0	CH58	5290	22	22
	MCS0	CH106	5530	22	22
	MCS0	CH122	5610	22	22
	MCS0	CH138	5690	22	22
	MCS0	CH155	5775	22	22


Note 1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

Note: 2. This device support MIMO & SISO, after evaluated output power, we found that MOMO power have the worst emissions than SISO, so the other test items are reported with MIMO mode. Test compliance with KDB 662911 D01 Multiple Transmitter Output v02r01.

2.4. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	acer	ZOW	N/A
		Power Cord(3C): Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: Lite-On, M/N: PA-1900-32 Data Cable: Shielded, Undetectable, 4.0m(Bond one ferrite core)			

2.5. Block diagram of connection between the EUT and simulators



(EUT: Wi-Fi Module)

2.6. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Certificated by ISED, Canada
Company Number: 5183A
CAB identifier: CN0034
Valid Date: Mar.31, 2024

Certificated by FCC, USA
Designation No.: CN5022
Valid Date: Mar.31, 2024

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2024

2.7. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	$\pm 2.6\text{dB}(150\text{kHz to } 30\text{MHz})$
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: H})$
	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: V})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: H})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: V})$
Uncertainty for Radiation Emission test in 3m chamber	$\pm 4.0\text{dB}(1\sim 6\text{GHz, Distance: } 3\text{m})$
	$\pm 4.0\text{dB}(6\sim 40\text{GHz, Distance: } 3\text{m})$
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB} (30\text{MHz}\sim 1000\text{MHz})$
	$\pm 3.3\text{dB} (1\text{GHz}\sim 26.5\text{MHz})$
Uncertainty for Power density test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 4.6\%$
Uncertainty for DC power test	$\pm 0.1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^{\circ}\text{C}$
	$\pm 3\%$


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.01,23	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.25,23	1 Year
4.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1628-5	Apr.01,23	1 Year
5.	RF Cable	Eastsheep	RG223	190424	Sep.15,23	1Year
6.	Terminator	Hubersuhner	50Ω	No.1	Apr.02,23	1 Year
7.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

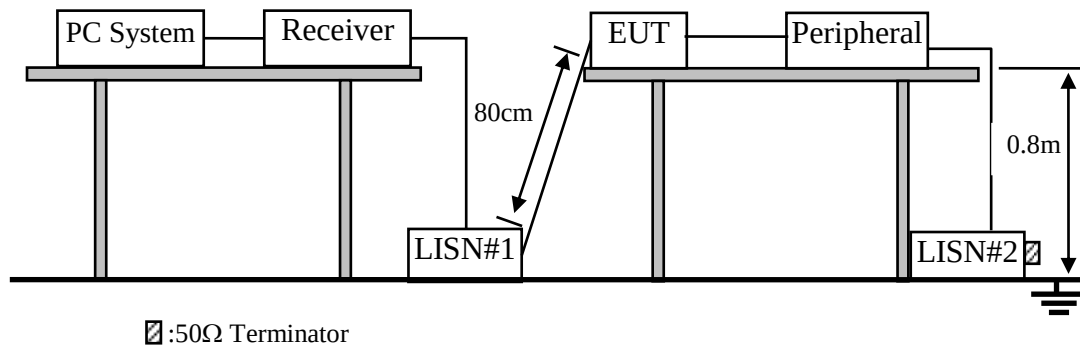

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes: 1. * Decreasing linearly with logarithm of frequency.
 2. The lower limits shall apply at the transition frequencies.
 3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB) + Reading (Receiver) (dBμV)

3.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1.Wi-Fi Module (EUT)

Model No. : U9W44

Serial No. : N/A

3.4.2.Support Equipment: As Tested Supporting System Details, in Section 2.4.

3.5.Operating Condition of EUT

3.5.1.Setup the EUT and simulator as shown as Section 3.2.

3.5.2.Turn on the power of all equipments.

3.5.3.PC run test software to control EUT work in Tx mode.

3.6.Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.7.Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

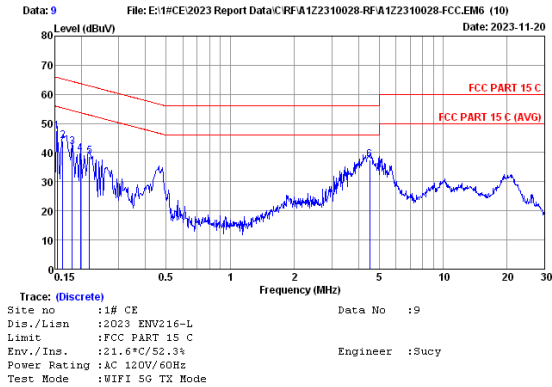

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	9.62	0.01	37.46	47.09	65.78	18.69	QP
2	0.163	9.62	0.01	34.25	43.88	65.30	21.42	QP
3	0.182	9.62	0.01	32.24	41.87	64.42	22.55	QP
4	0.198	9.62	0.01	30.07	39.70	63.71	24.01	QP
5	0.219	9.62	0.01	29.11	38.74	62.88	24.14	QP
6	4.525	9.79	0.06	27.75	37.60	56.00	18.40	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

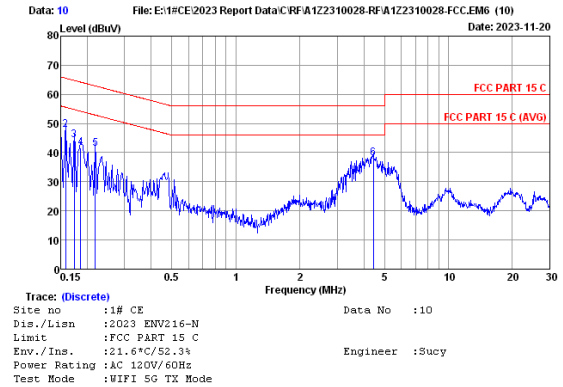

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.69	0.01	35.48	45.18	66.00	20.82	QP
2	0.158	9.69	0.01	38.10	47.80	65.56	17.76	QP
3	0.174	9.69	0.01	34.64	44.34	64.77	20.43	QP
4	0.186	9.70	0.01	31.90	41.61	64.20	22.59	QP
5	0.219	9.70	0.01	31.62	41.33	62.88	21.55	QP
6	4.430	9.21	0.06	28.68	37.95	56.00	18.05	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipments

4.1.1. For frequency range 30 MHz ~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3 Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	103670	Jun.25,23	1 Year
4.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	429	Oct.10,23	1 Year
5.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.20,23	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.02,23	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Apr.01,23	1 Year
8.	Broadband Amplifier	SCHWARZBECK	BBV9744	00259	Jun.25,23	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


4.1.2. For frequency range 1GHz~40GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	3 Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.01,23	1 Year
4.	Amplifier	EMCI	EMC0518A45S E	980965	Aug.25,23	1 Year
5.	RF Cable	Shanghai chao yu	SFT205-NMSM- 10.00M	689241	Aug.25,23	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.23,23	1 Year


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

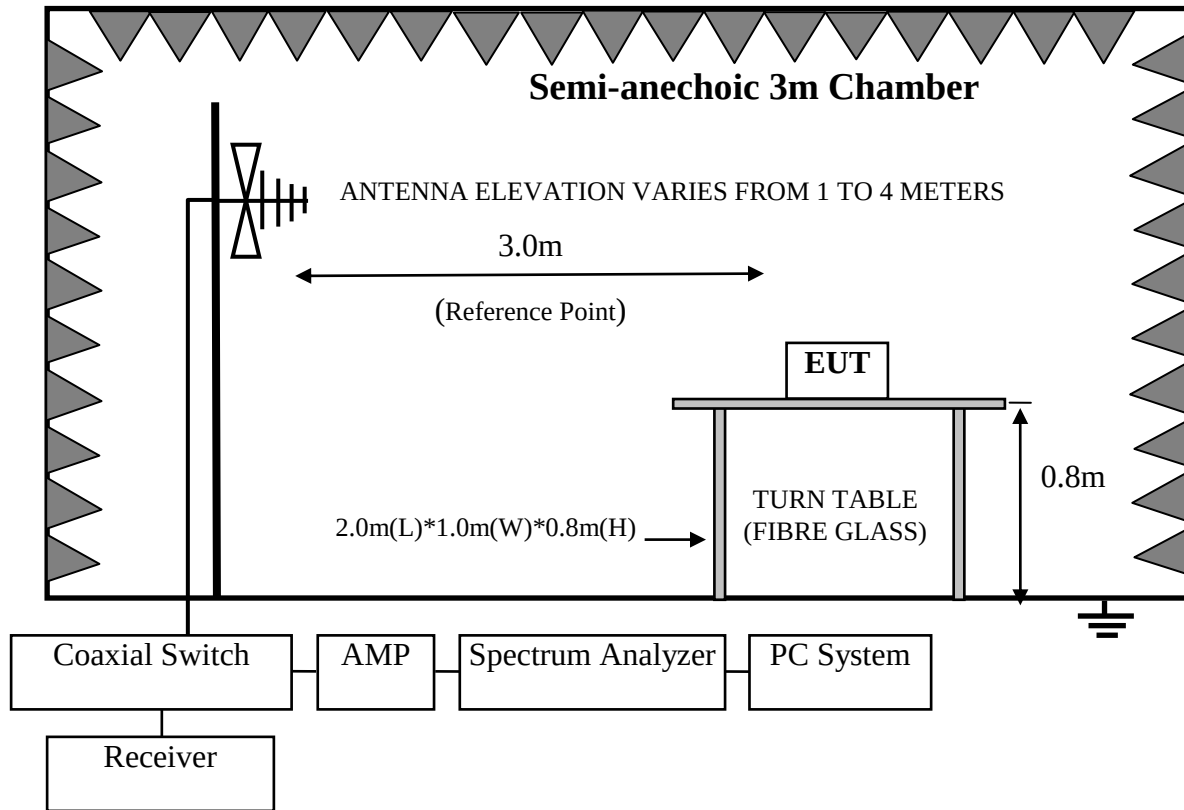

For frequency range 1GHz-40GHz

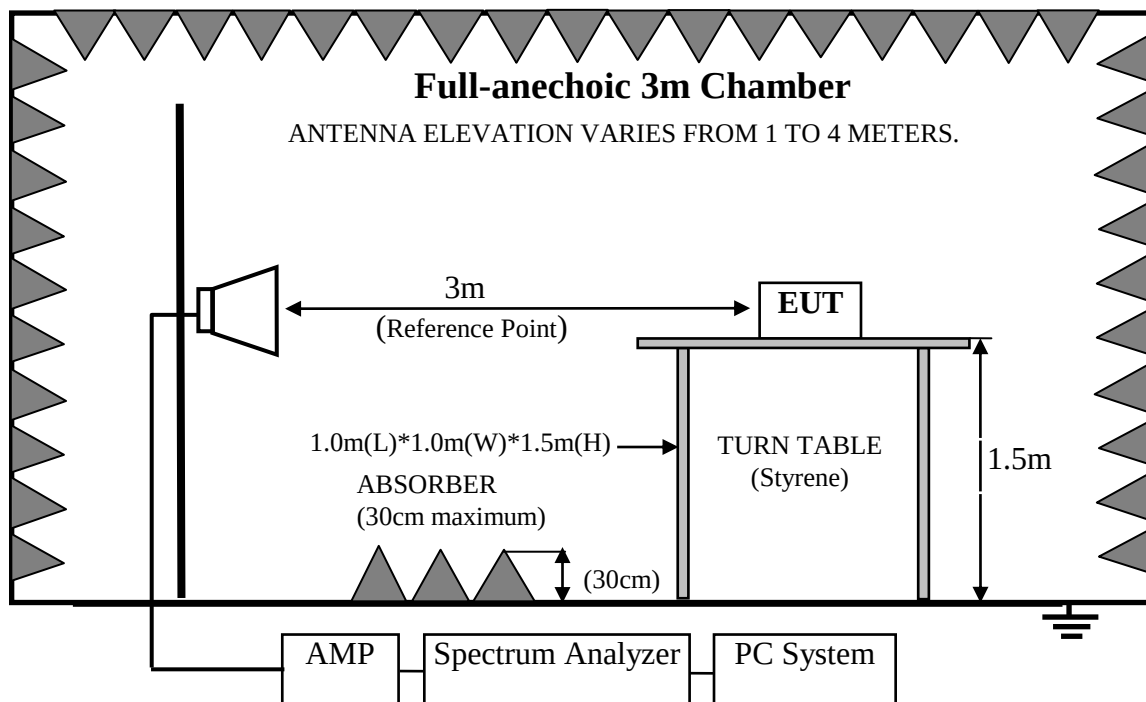

4.3.Radiated Emission Limits

For transmitters operating in the 5.15-5.25 GHz; 5.25-5.35GHz; 5.47-5.725GHz, 5.725-5.850GHz band: all emissions outside of those band shall not exceed an EIRP of -27 dBm/MHz. Unwanted emissions below 1 GHz and those emissions appearing within 15.205 restricted frequency bands must comply with the general field strength limits set forth in Section 15.209

4.3.1.15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remarks : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2)Emission Level ($\text{dB}\mu\text{V/m}$) = Reading (Receiver) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) + Cable Loss (dB)(Below 1000MHz)

Emission Level ($\text{dB}\mu\text{V/m}$) = Reading (Spectrum) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(Above 1000MHz)

(3) The smaller limit shall apply at the cross point between two frequency bands.

(4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2.15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

4.4.1.Wi-Fi Module (EUT)

Model No. : U9W44

Serial No. : N/A

4.4.2.Support Equipment: As Tested Supporting System Details, in Section 2.4.

4.5.Operating Condition of EUT

4.5.1.Setup the EUT and simulator as shown as Section 4.2.

4.5.2.Turn on the power of all equipments.

4.5.3.Let EUT work in Tx mode.

4.6.Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

Frequency above 30MHz:

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it.EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test.

For emissions below 1GHz and those emissions appearing within 15.205 restricted frequency bands use below procedure:

The bandwidth of the EMI test receiver (R&S ESR3) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

Maximum Peak emission levels are measured by setting the analyzer as follows:

- (a) RBW = 1 MHz.
- (b) VBW $\geq$ 3 MHz.
- (c) Detector = Peak.
- (d) Sweep time = auto.
- (e) Trace mode = max hold.
- (f) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

Maximum Average emission levels are measured by setting the analyzer as follows:

- (a) RBW = 1 MHz.
- (b) VBW $\geq$ 3 MHz.
- (c) Detector = power averaging (rms), if $\text{span}/(\# \text{ of points in sweep}) \leq \text{RBW}/2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (d) Averaging type = power averaging (rms)
As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
- (e) Sweep time = auto.
- (f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—rather than turning on and off with the transmit cycle, at least 100 traces shall be averaged.)
- (g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, a correction factor shall be added to the measurement results prior to comparing to the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - If power averaging (rms) mode was used in step (iv) above, the correction factor is $10 \log (1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB must be added to the measured emission levels.
 - If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log (1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB must be added to the measured emission levels.
 - If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

For the emissions above 1GHz and not appearing within 15.205 restricted frequency bands use below procedure:

- (1).The maximum emission at 3m distance was measured and recorded with receive antenna in both vertical and horizontal by rotating the turntable and by lowering the receive antenna.
- (2).The EUT was then removed and replaced with a substitution antenna in the same position and the substitution antenna must have the same polarization with the receive antenna.
- (3). A signal which have the same frequency obtained in step 2 was fed to the substitution, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver, the level of the signal generator was adjusted until the measured field strength level in step 2 was obtained, recorded the level of the signal generator.
- (4).Repeated step 4 with both antenna polarizations
- (5).The spurious emissions is equal to the power supplied by the signal generator and corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna. or use procedure (6).
- (6). Per KDB789033 clause H 2)d).if the test distance is 3m,the EIRP(dBm)=E(dBuv/m)-95.2
Get the result of all unwanted emission outside the restricted band is less than the -27dBm/MHz.
We had checked frequency range that is 30MHz to 10th harmonic (40GHz) and no any emissions were found from 18GHz to 40GHz, so the radiated emission from 18GHz to 40GHz were not record.

4.7.Radiated Emission Test Results

PASS.


All the emissions from 30MHz to 1 GHz were comply with 15.209 limits.

All other emission comply with 15.407 (b)(1) requirements.

Note: The emissions (9kHz~30MHz) not reported for there is no emission be found.


Duty cycle

11 a

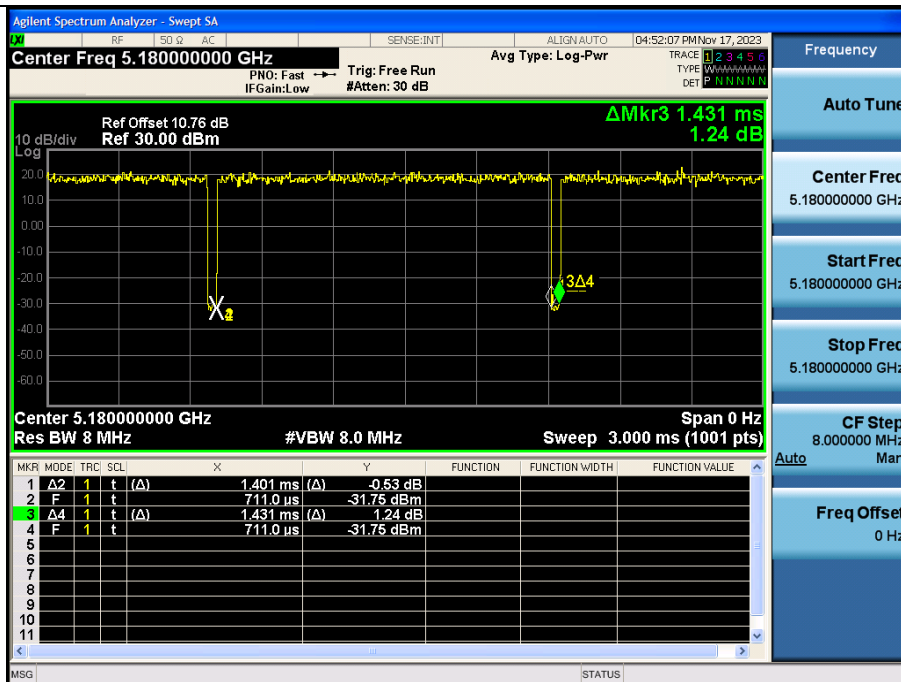


Note: The duty cycle factor is 0.11.

11n HT20

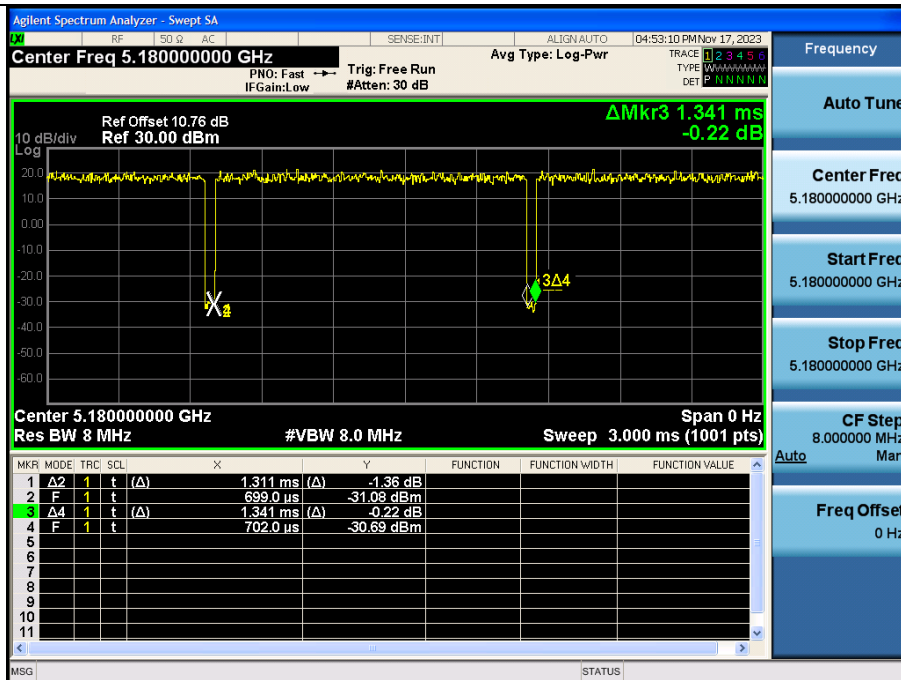


Note: The duty cycle factor is 0.13.

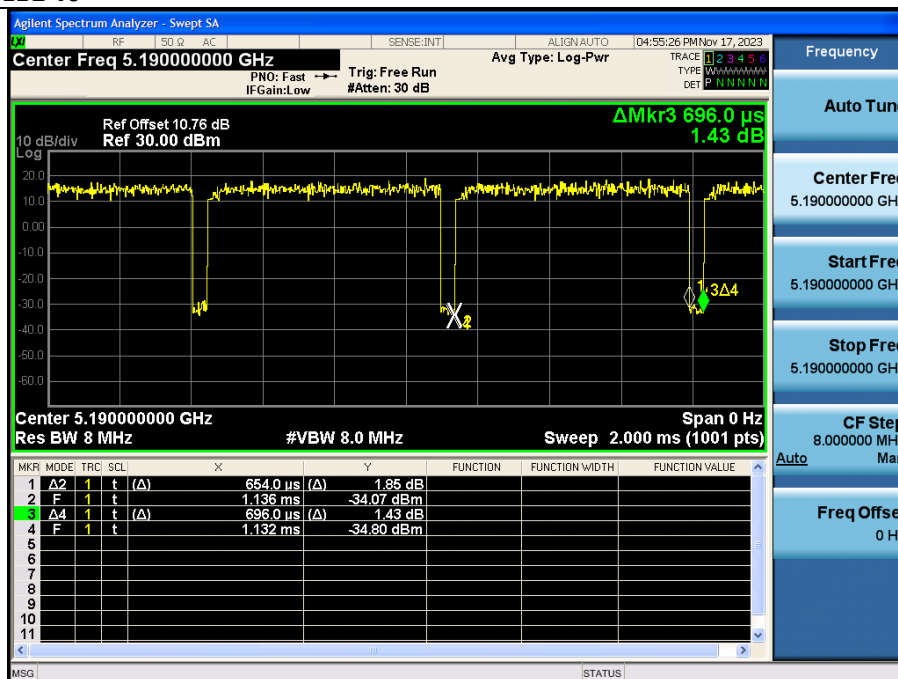11n HT40


Note: The duty cycle factor is 0.23.

11ac VHT20

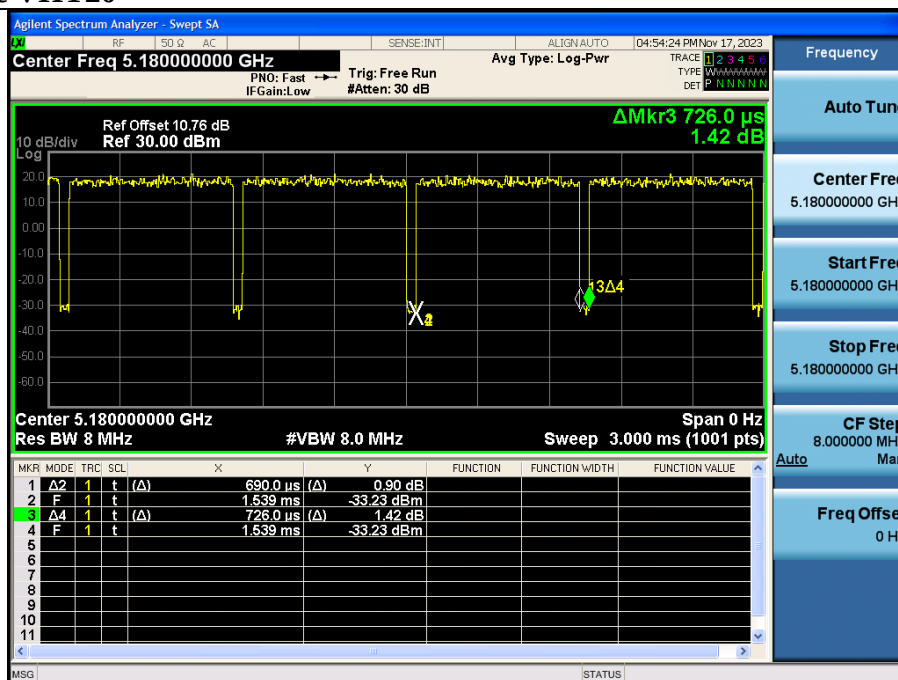


Note: The duty cycle factor is 0.12.

11ac VHT40

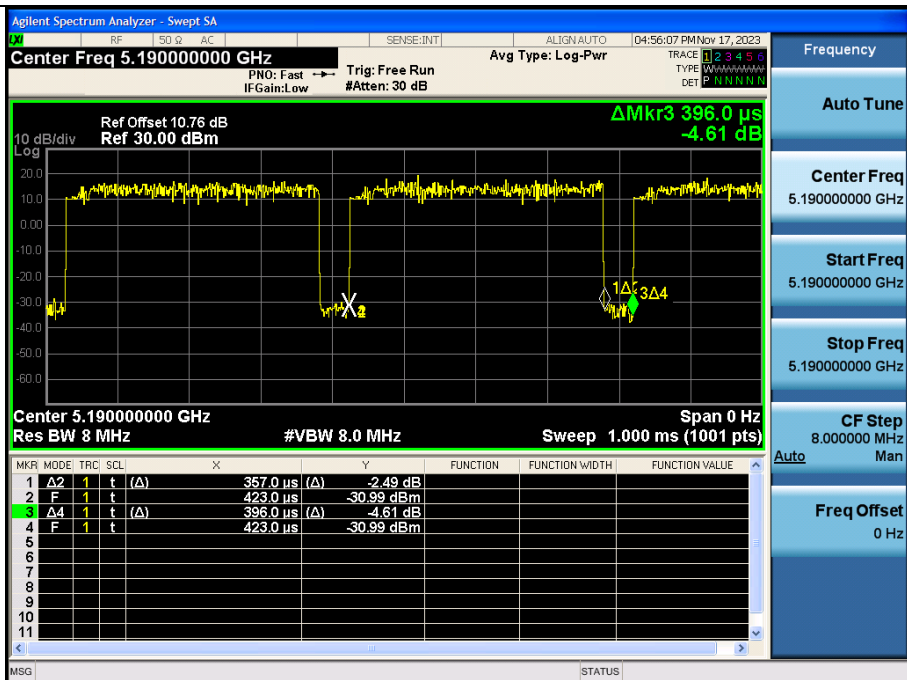



Note: The duty cycle factor is 0.23.

11ac VHT80

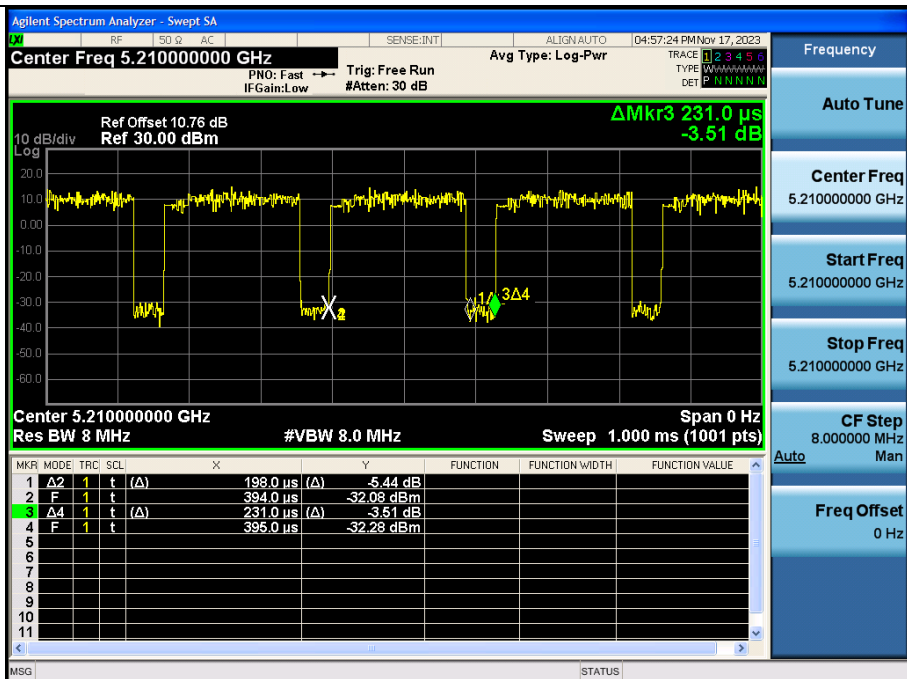

Note: The duty cycle factor is 0.46.

Frequency: 30MHz~1GHz

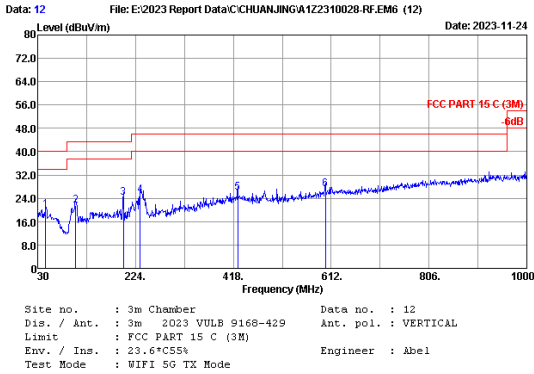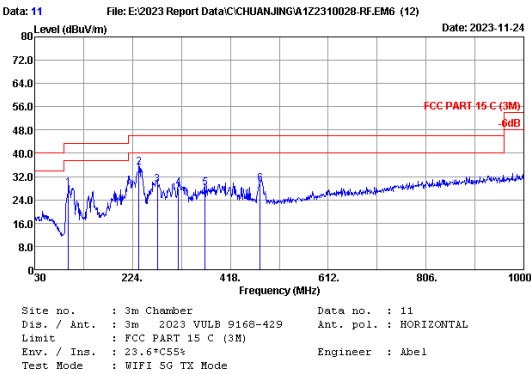


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	96.930	14.69	0.86	12.50	28.05	43.50	15.45	QP
2	236.610	17.23	1.30	16.73	35.26	46.00	10.74	QP
3	273.470	18.74	1.37	9.01	29.12	46.00	16.88	QP
4	315.180	19.90	1.45	6.75	28.10	46.00	17.90	QP
5	367.560	20.90	1.56	5.50	27.96	46.00	18.04	QP
6	477.170	23.29	1.78	4.39	29.46	46.00	16.54	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	45.520	19.60	0.61	0.00	20.21	40.00	19.79	QP
2	105.660	16.17	0.89	4.48	21.54	43.50	21.96	QP
3	199.750	16.02	1.16	6.93	24.11	43.50	19.39	QP
4	233.700	16.92	1.30	7.02	25.24	46.00	20.76	QP
5	426.730	22.53	1.68	1.91	26.12	46.00	19.88	QP
6	600.360	25.81	2.05	-0.75	27.11	46.00	18.89	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz U-NII-1 Band:

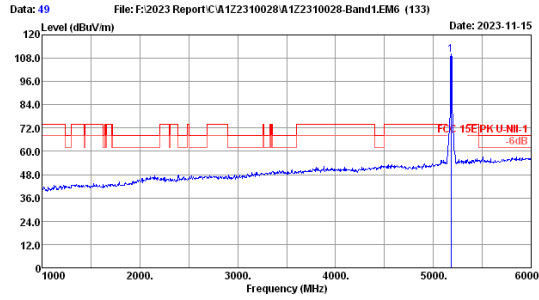

Site no. : 3m Chamber Data no. : 49
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E PK U-NII-1
Env. / Ins. : 23.2°C/50.1% Engineer : nier
Test Mode : WIFI 5G 11a 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	4.11	104.27	30.98	109.90	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

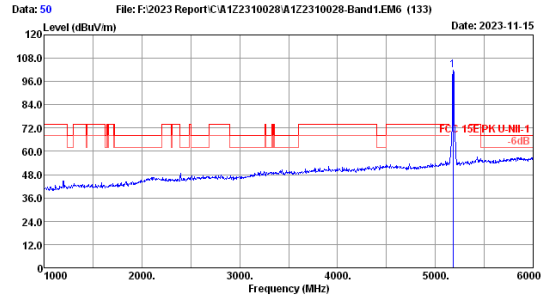


Site no. : 3m Chamber Data no. : 50
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E PK U-NII-1
Env. / Ins. : 23.2°C/50.1% Engineer : nier
Test Mode : WIFI 5G 11a 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	4.11	96.04	30.98	101.67	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

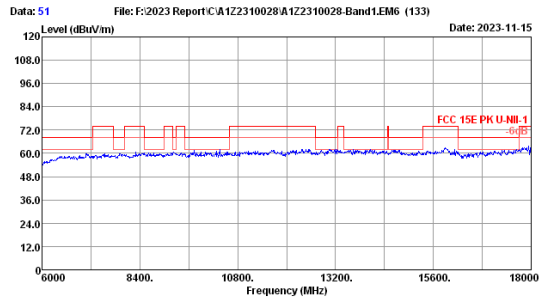


Site no. : 3m Chamber Data no. : 51
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E PK U-NII-1
Env. / Ins. : 23.2°C/50.1% Engineer : nier
Test Mode : WIFI 5G 11a 5180MHz TX

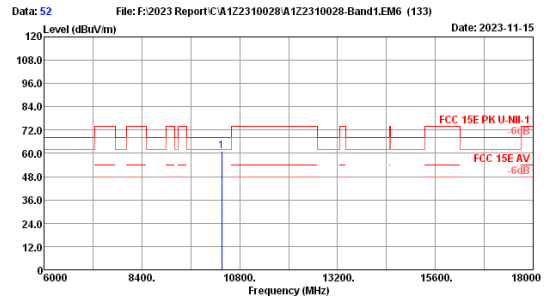


Site no. : 3m Chamber Data no. : 52
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E PK U-NII-1
Env. / Ins. : 23.2°C/50.1% Engineer : nier
Test Mode : WIFI 5G 11a 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.36	5.61	50.34	33.01	61.30	68.20	6.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

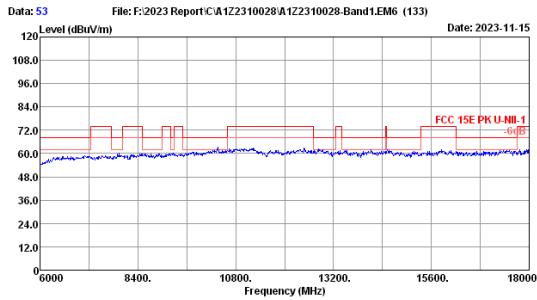


Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5180MHz TX

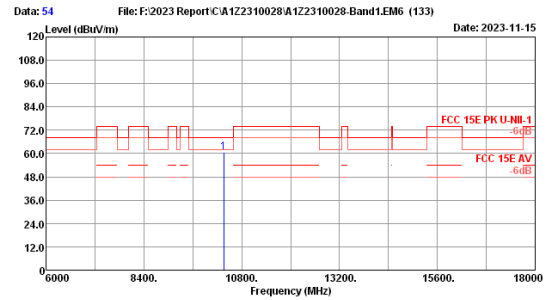

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.36	5.61	49.67	33.01	60.63	68.20	7.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

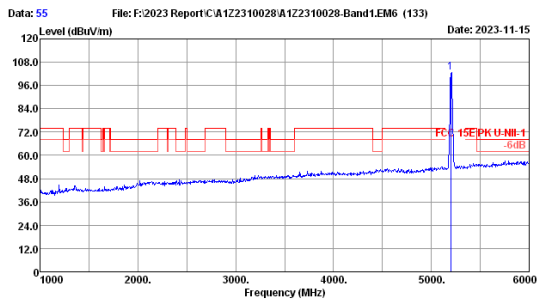

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5200MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	4.11	96.89	30.98	102.52	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

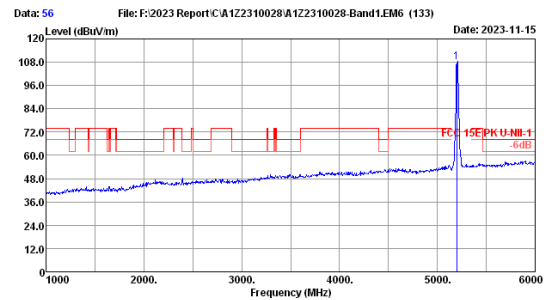

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5200MHz TX



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	4.11	102.36	30.98	107.99	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

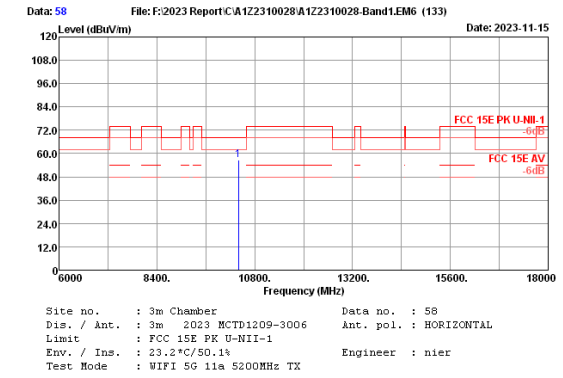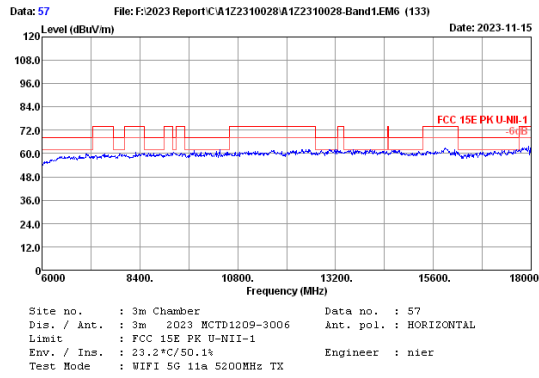


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.40	5.62	45.64	32.98	56.68	68.20	11.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

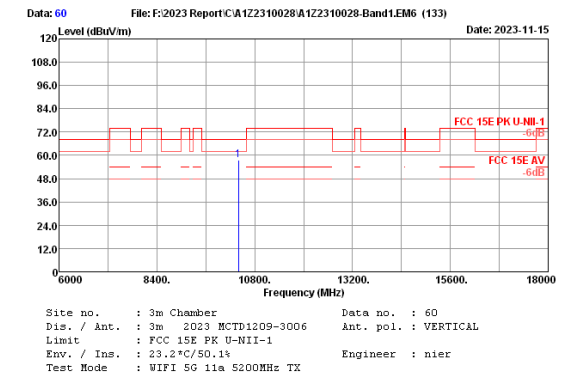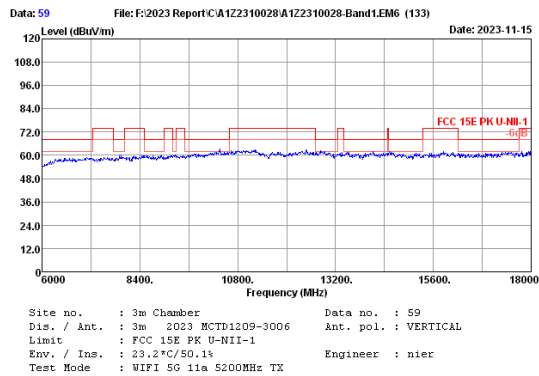

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.40	5.62	46.60	32.98	57.64	68.20	10.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

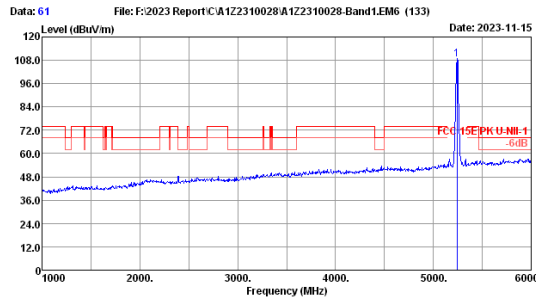

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	4.13	102.72	30.98	108.53	72.00	-	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

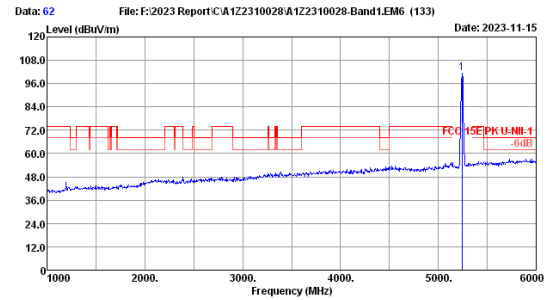


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	4.13	95.39	30.98	101.20	72.00	-	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

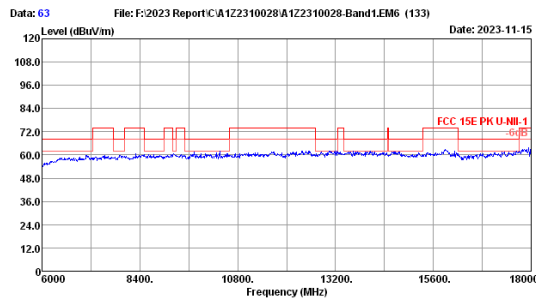



Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5240MHz TX

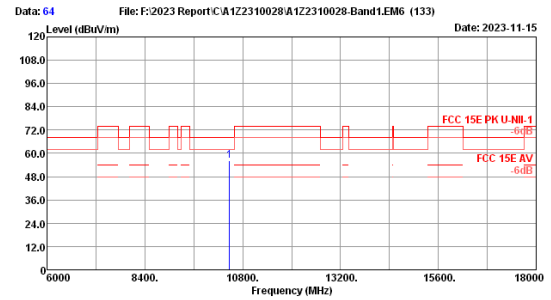

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5240MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.40	5.65	45.01	32.92	56.14	68.20	12.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

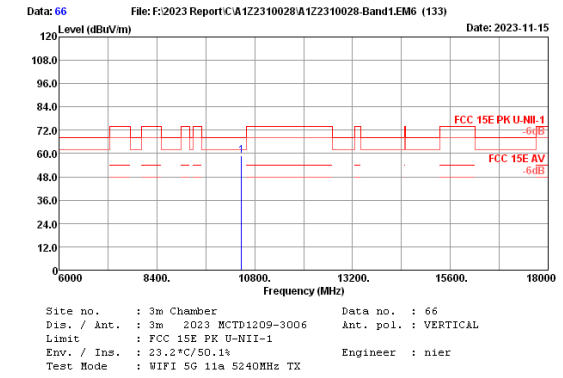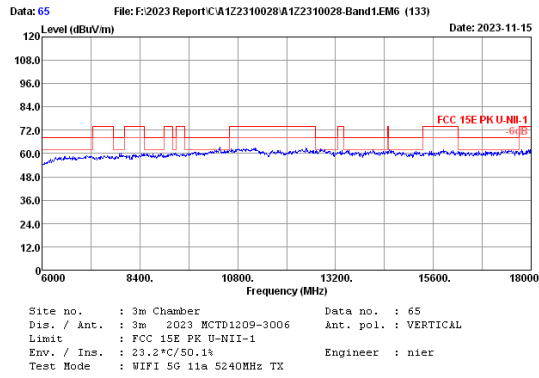


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.40	5.65	47.77	32.92	58.90	68.20	9.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

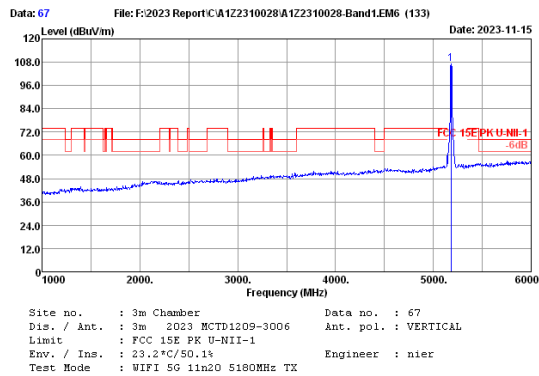


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	4.11	101.38	30.98	107.01	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

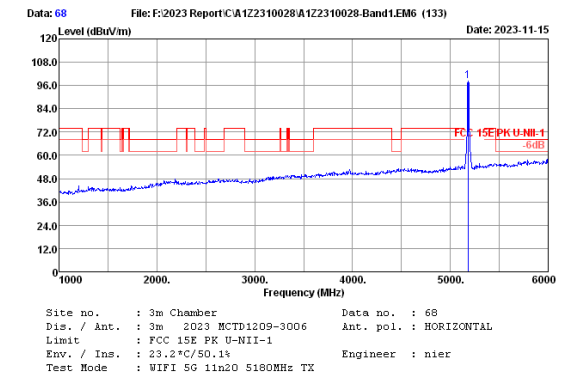


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	4.11	92.53	30.98	98.16	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

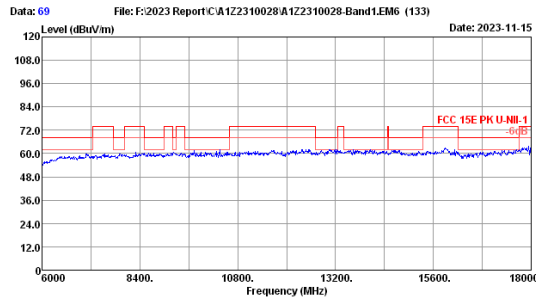


Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5180MHz TX

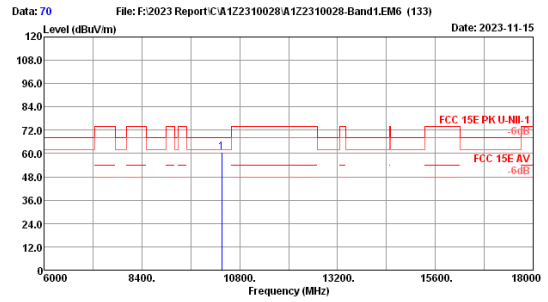


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.36	5.61	49.91	33.01	60.87	68.20	7.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

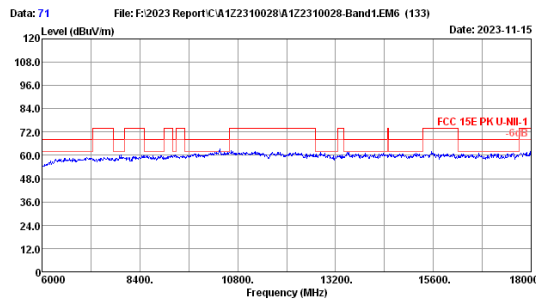


Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5180MHz TX

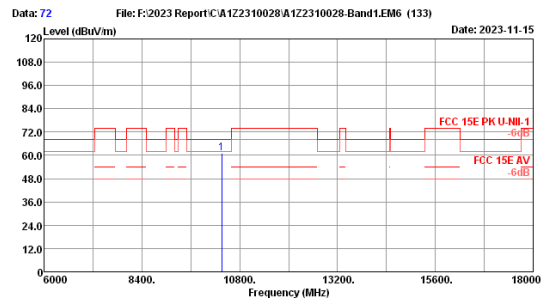

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.36	5.61	50.27	33.01	61.23	68.20	6.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

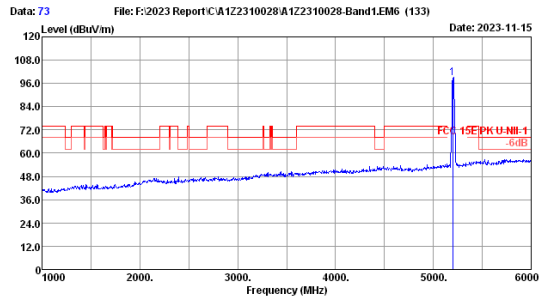

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5200MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	4.11	92.98	30.98	98.61			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

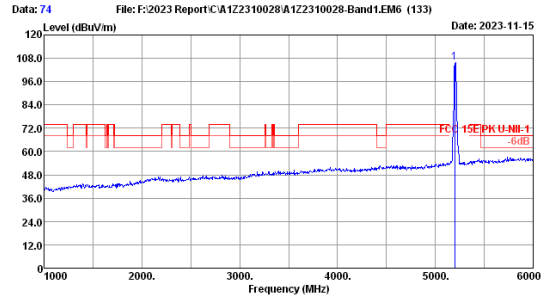


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5200MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	4.11	100.05	30.98	105.68			Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

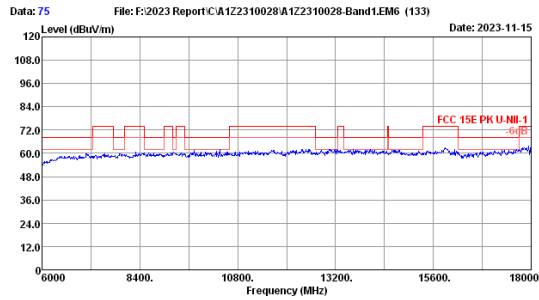


Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5200MHz TX

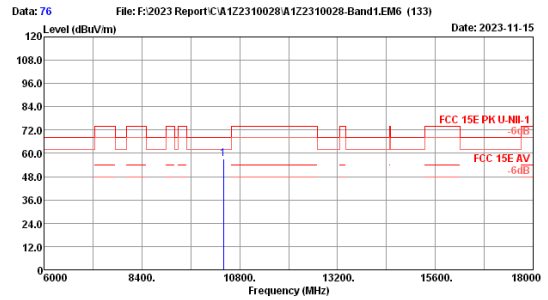


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5200MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.40	5.62	46.07	32.98	57.11	68.20	11.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

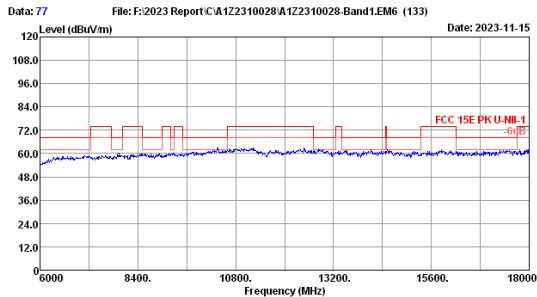


Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5200MHz TX

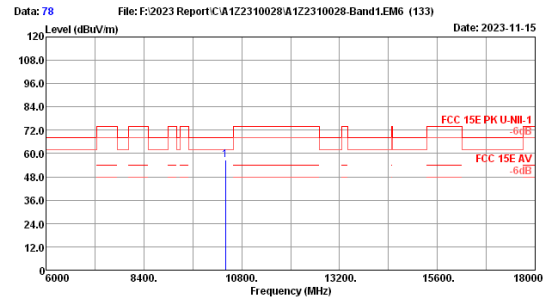

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5200MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.40	5.62	45.59	32.98	56.63	68.20	11.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

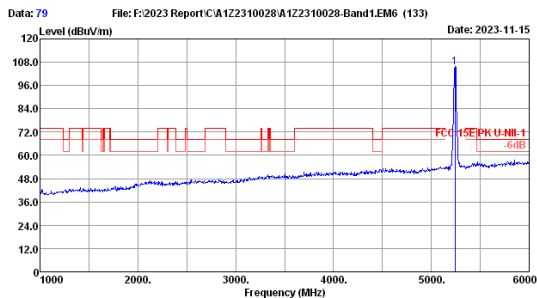

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	4.13	99.78	30.98	105.59	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

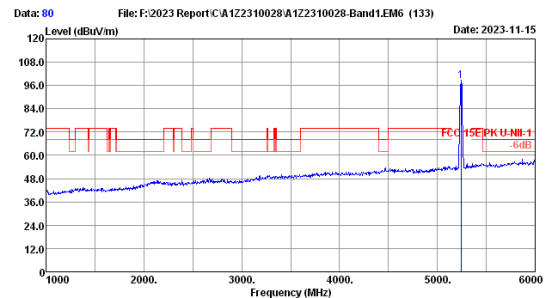

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5240MHz TX



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	4.13	92.63	30.98	98.44	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

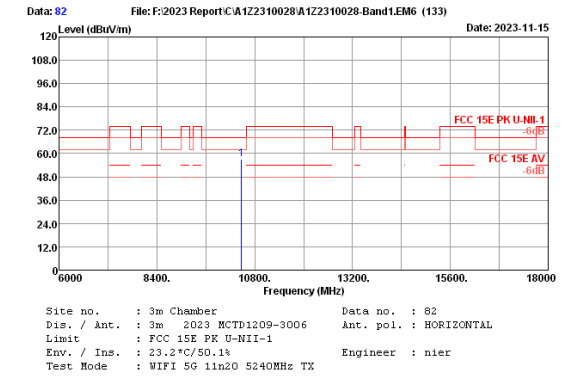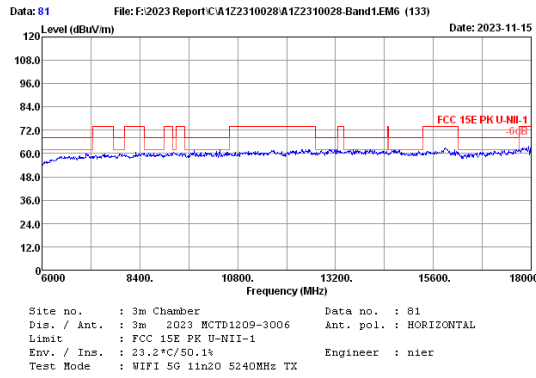


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.40	5.65	46.09	32.92	57.22	68.20	10.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

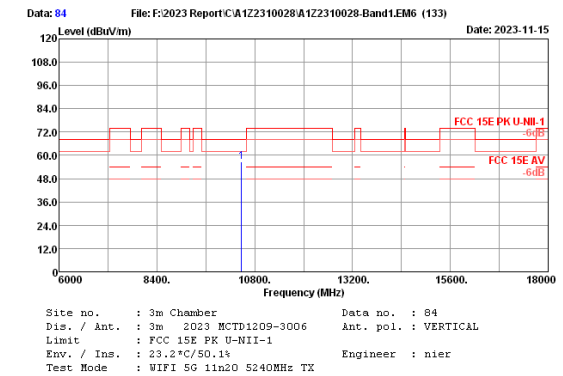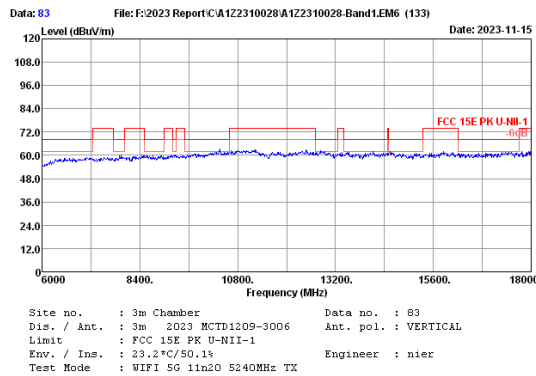

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.40	5.65	45.62	32.92	56.75	68.20	11.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

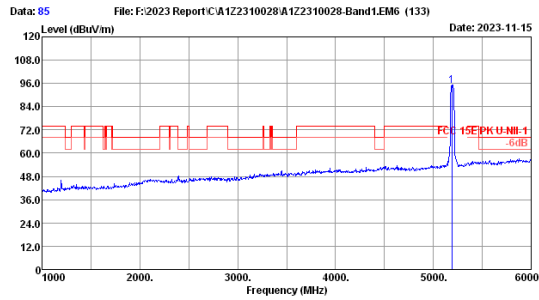

Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.50	4.11	89.28	30.98	94.91	72.0	22.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

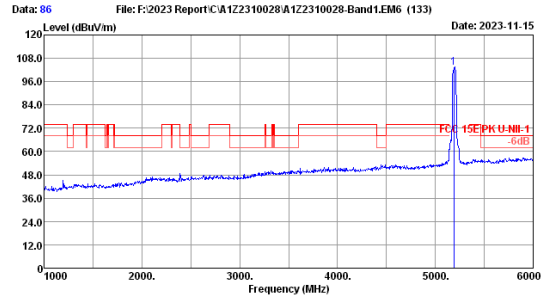


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.50	4.11	97.46	30.98	103.09	72.0	31.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

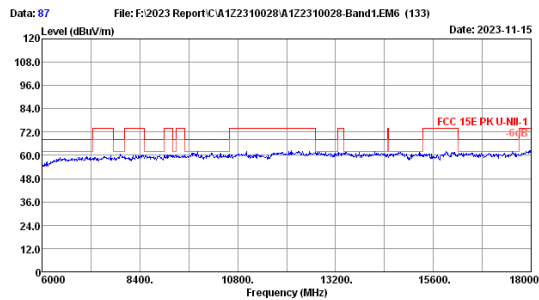



Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5190MHz TX

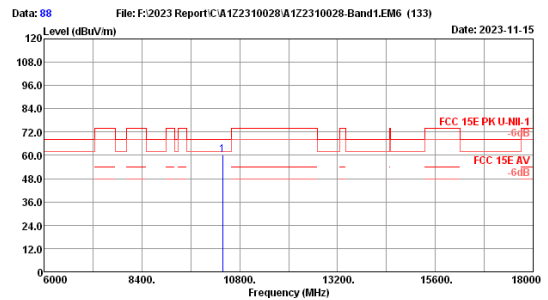

Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5190MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10380.00	38.38	5.62	49.43	33.00	60.43	68.20	7.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

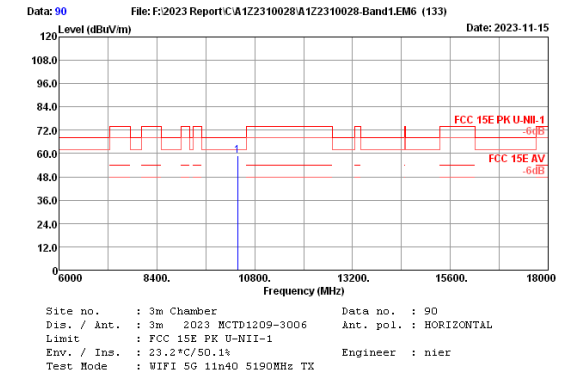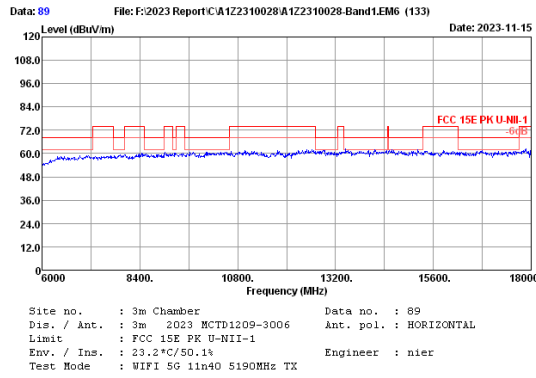


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10380.00	38.38	5.62	47.79	33.00	58.79	68.20	9.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

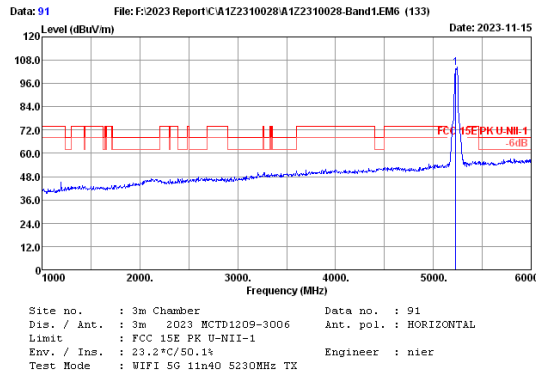


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.62	4.13	98.28	30.98	104.05	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

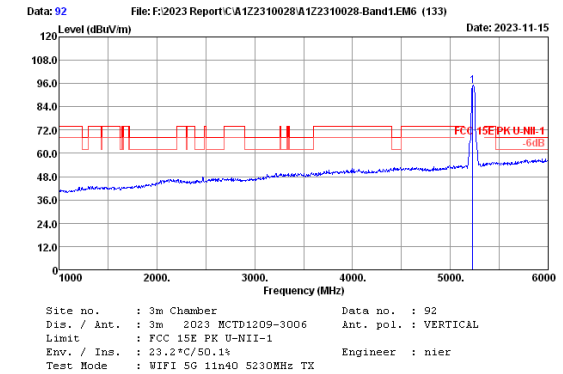


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.62	4.13	88.84	30.98	94.61	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

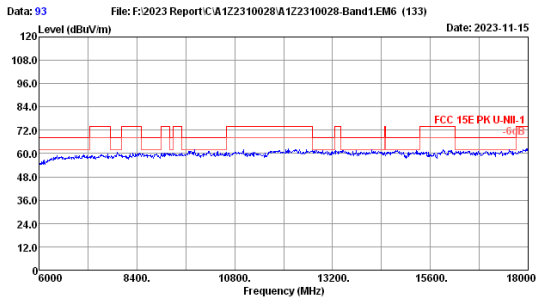


Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5230MHz TX

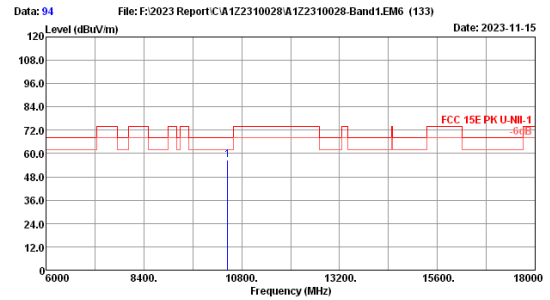


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10460.00	38.40	5.64	45.49	32.93	56.60	68.20	11.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

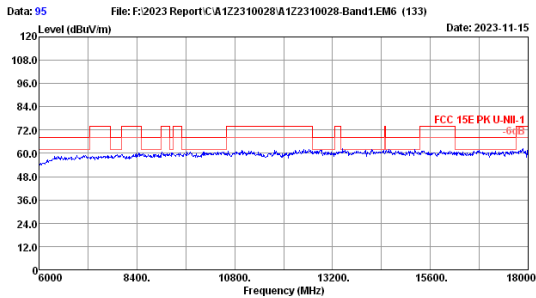


Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5230MHz TX

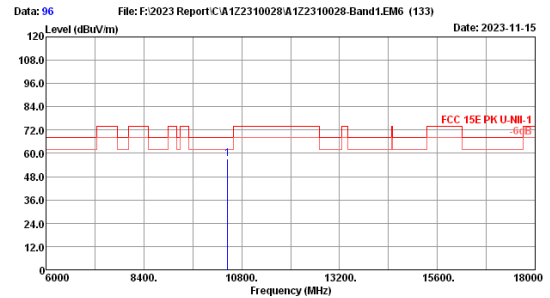

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10460.00	38.40	5.64	45.79	32.93	56.90	68.20	11.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

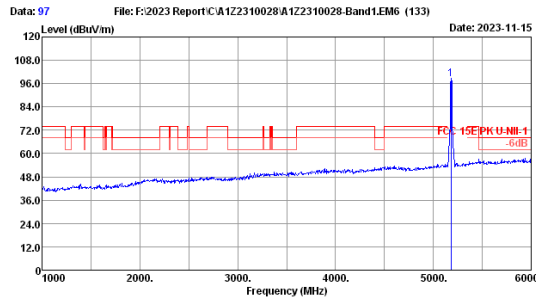

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	4.11	92.75	30.98	98.38	72.00	-	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

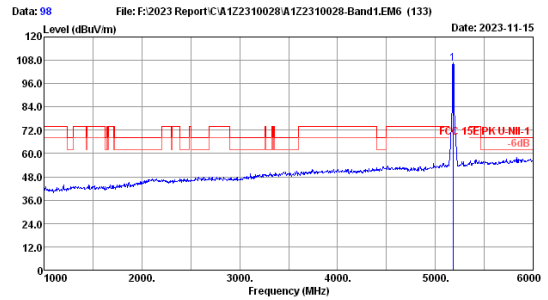


Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	4.11	100.73	30.98	106.36	72.00	-	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

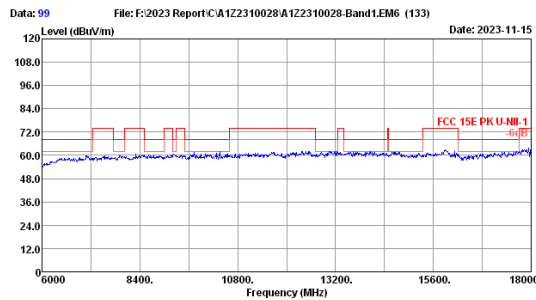



Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5180MHz TX

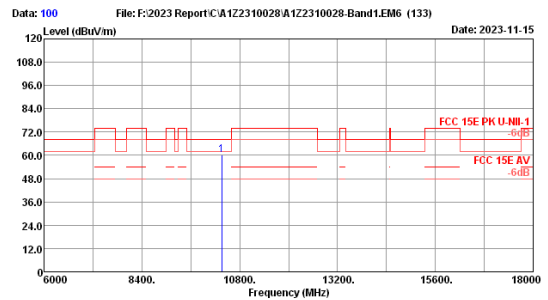

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5180MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.36	5.61	49.15	33.01	60.11	68.20	8.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

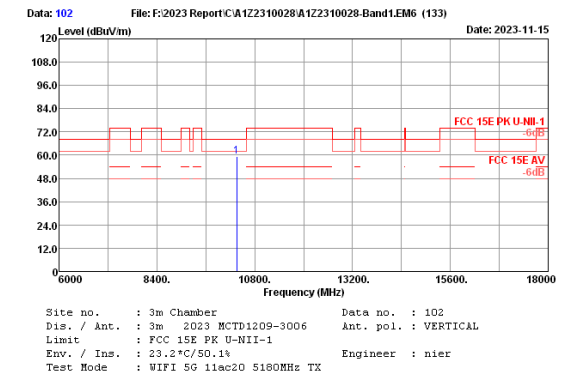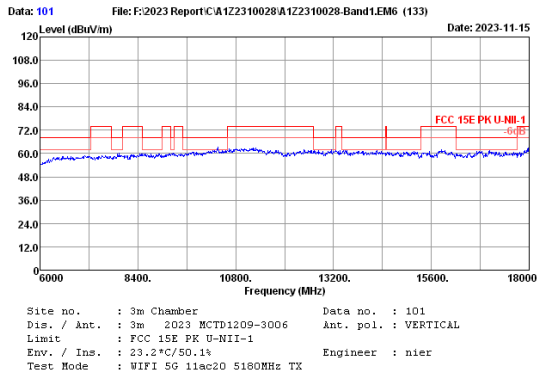


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.36	5.61	48.57	33.01	59.53	68.20	8.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

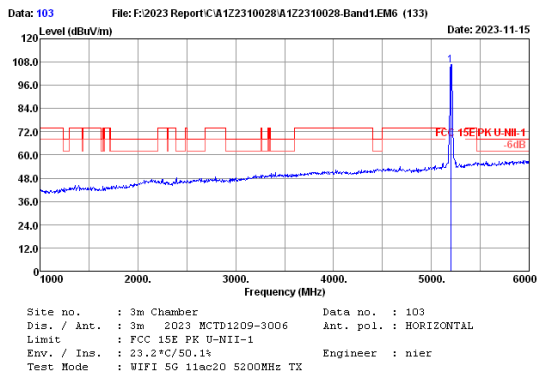



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	4.11	100.71	30.98	106.34	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

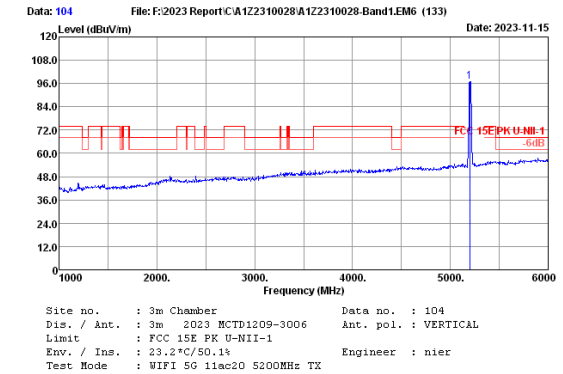



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	4.11	91.18	30.98	96.81	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

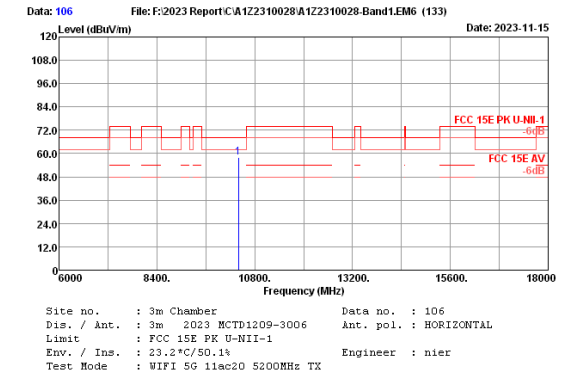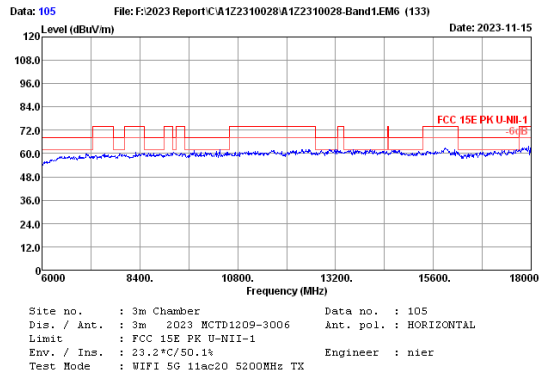


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.40	5.62	46.76	32.98	57.80	68.20	10.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

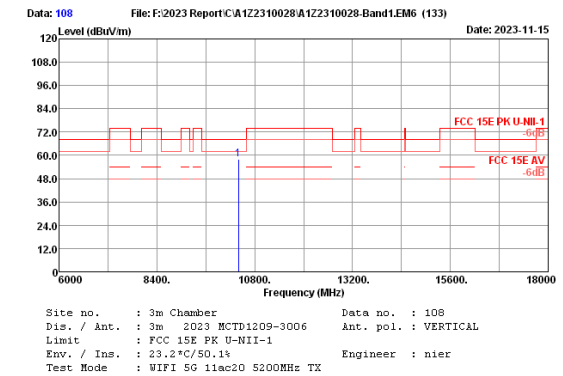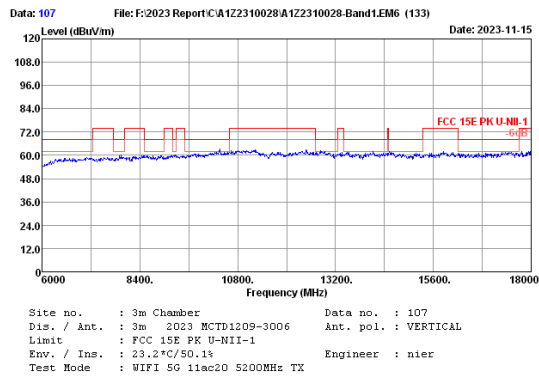

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.40	5.62	47.03	32.98	58.07	68.20	10.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

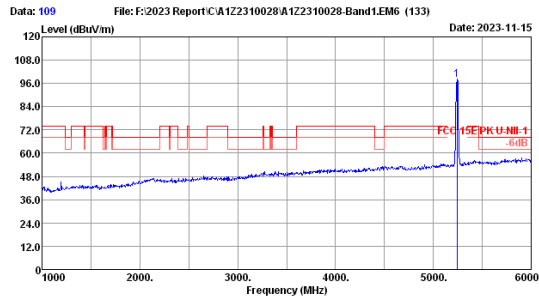

Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	4.13	92.13	30.98	97.94	60.0	37.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

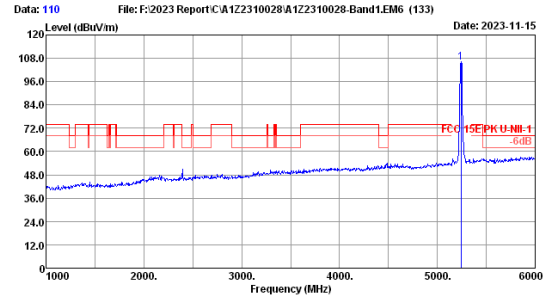


Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	4.13	99.99	30.98	105.80	60.0	45.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

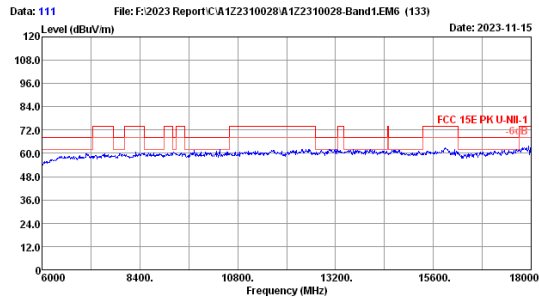



Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5240MHz TX

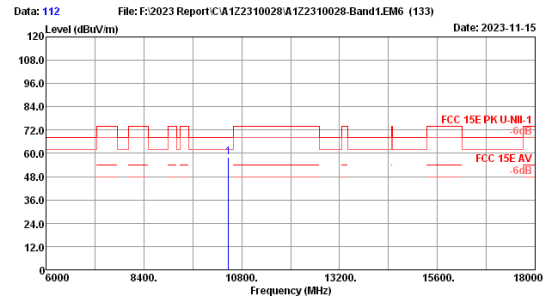

Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5240MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.40	5.65	46.69	32.92	57.82	60.0	2.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

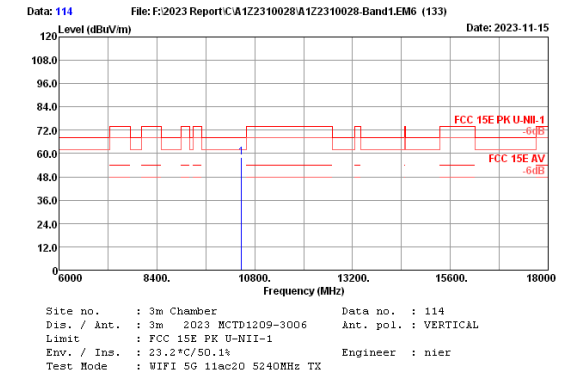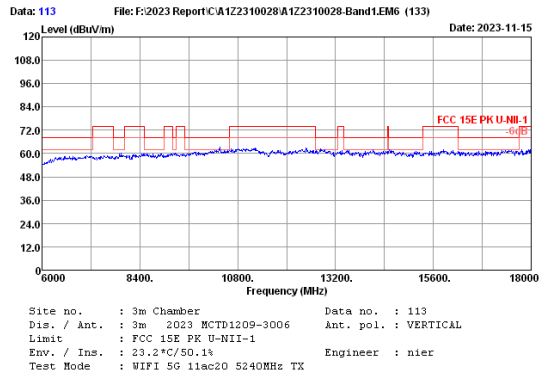


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.40	5.65	46.81	32.92	57.94	68.20	10.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

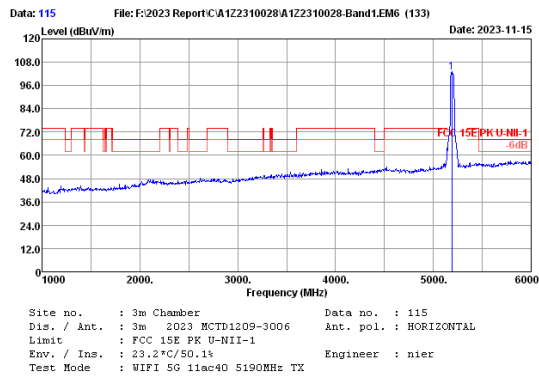


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.50	4.11	97.06	30.98	102.69	102.69	0.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

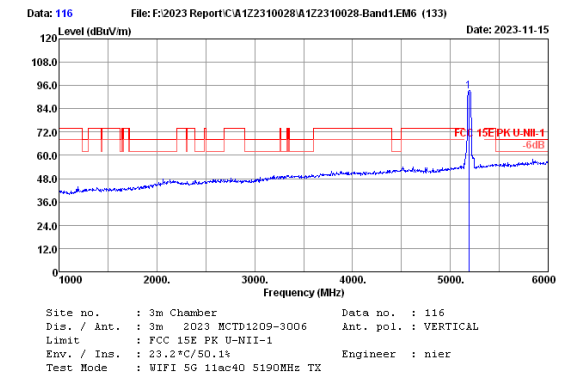


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.50	4.11	87.52	30.98	93.15	93.15	0.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

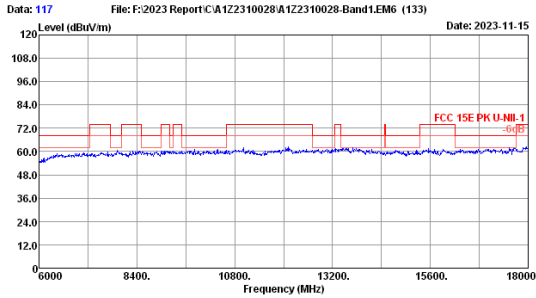


Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5190MHz TX

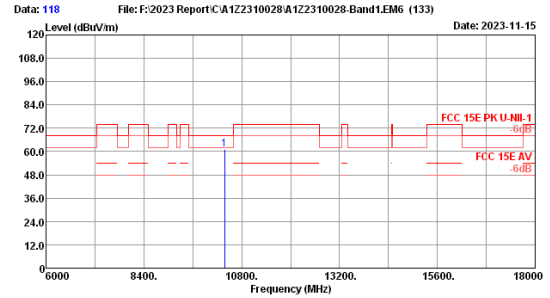


Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10380.00	38.38	5.62	50.13	33.00	61.13	68.20	7.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

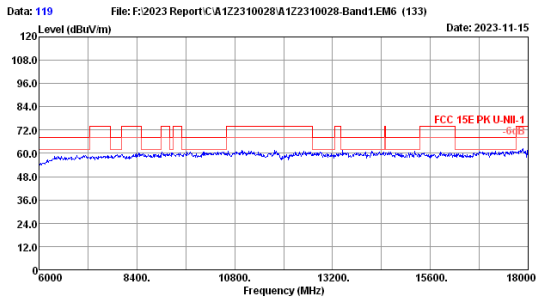


Site no. : 3m Chamber Data no. : 119
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5190MHz TX

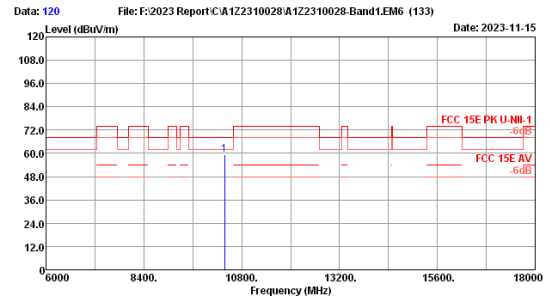

Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10380.00	38.38	5.62	48.17	33.00	59.17	68.20	9.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

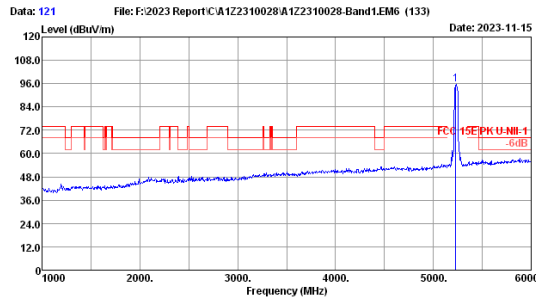

Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.62	4.13	89.71	30.98	95.48	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

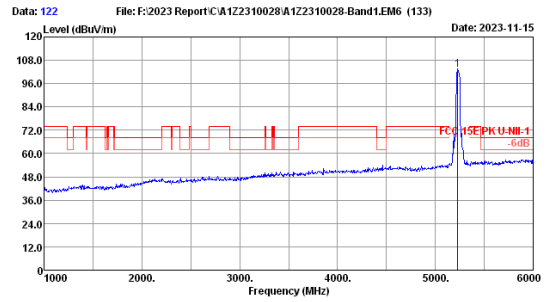


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.62	4.13	97.51	30.98	103.28	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

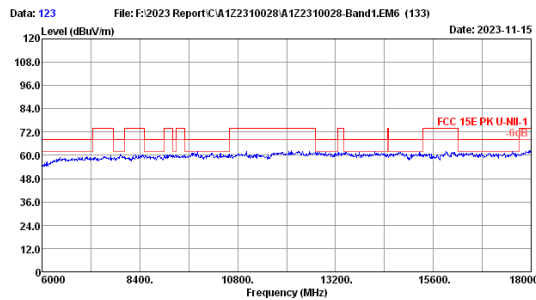



Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5230MHz TX

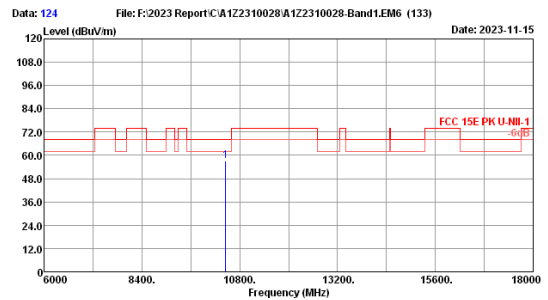

Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5230MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10460.00	38.40	5.64	46.13	32.93	57.24	68.20	10.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

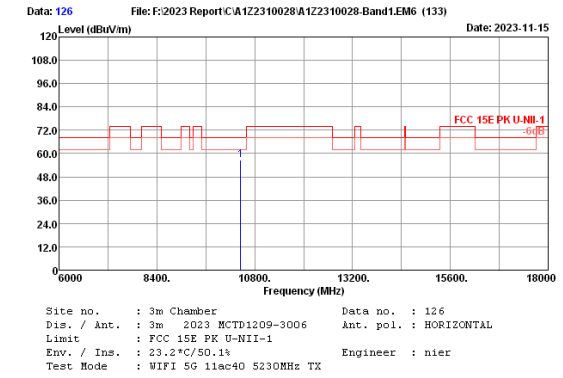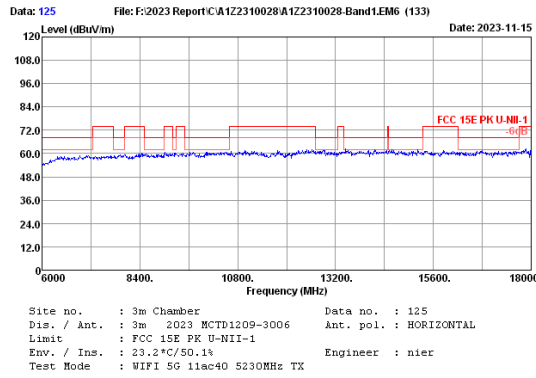


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10460.00	38.40	5.64	45.46	32.93	56.57	68.20	11.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

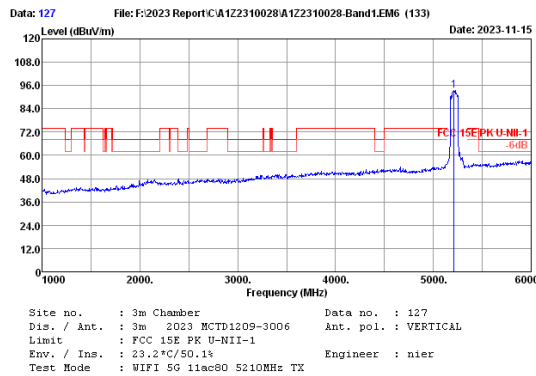



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	32.54	4.12	87.53	30.98	93.21	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

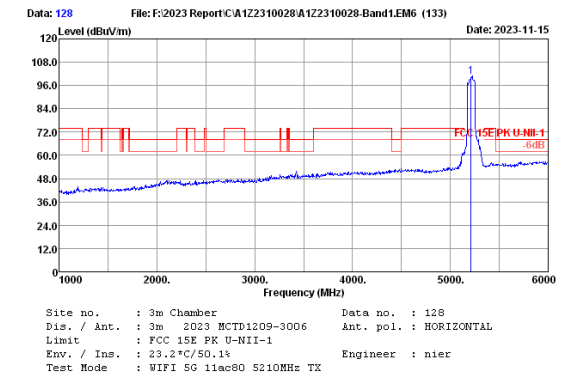



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	32.54	4.12	94.91	30.98	100.59	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

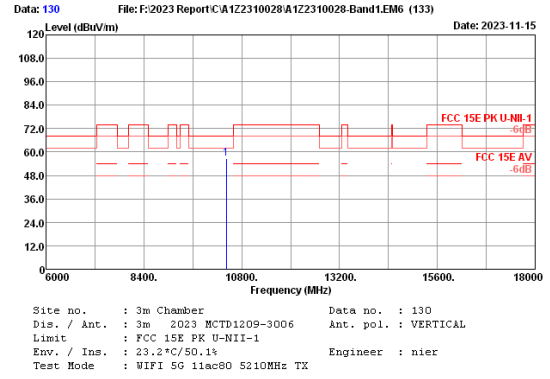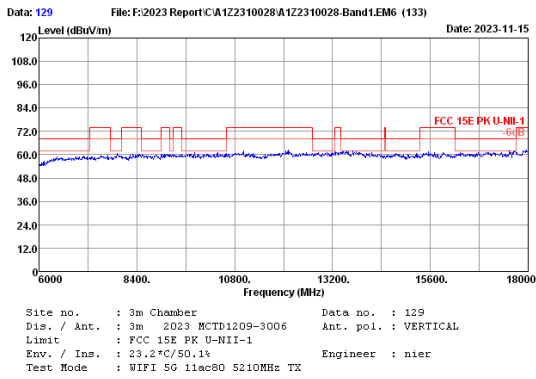

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10420.00	38.40	5.63	45.51	32.96	56.58	68.20	11.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

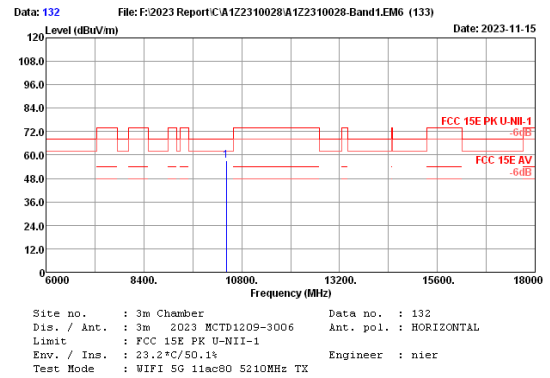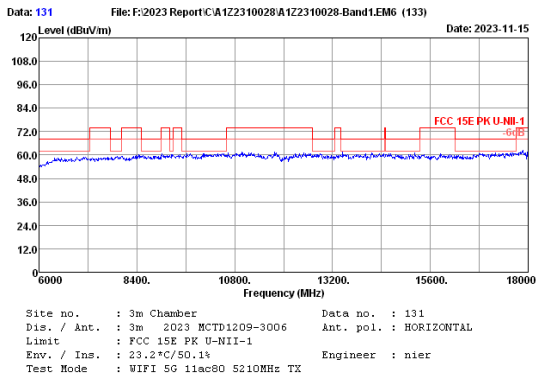

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10420.00	38.40	5.63	46.17	32.96	57.24	68.20	10.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.


U-NII-3 Band:

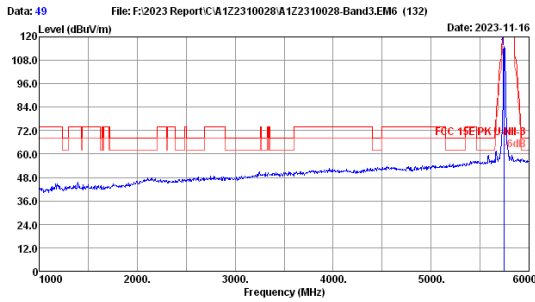

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	4.34	107.45	30.93	114.44			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

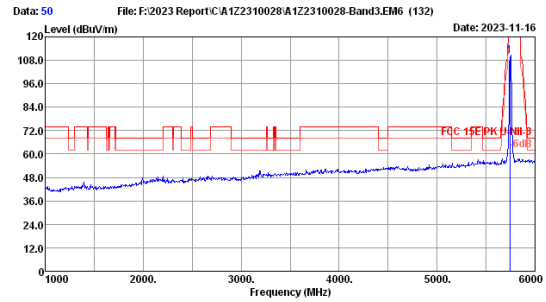


Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	4.34	103.27	30.93	110.26			Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

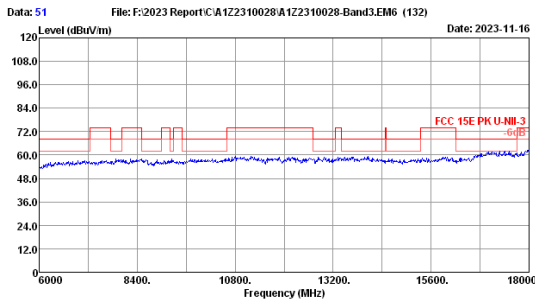



Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5745MHz TX

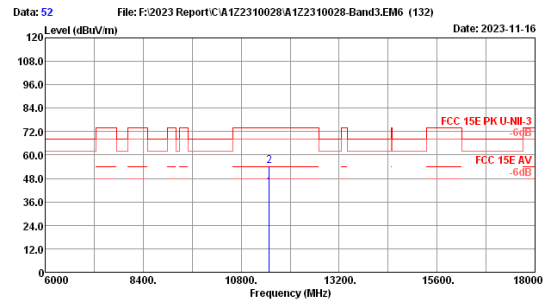

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5745MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.59	5.91	31.53	32.60	43.43	54.00	10.57	Average
2	11490.00	38.59	5.91	42.77	32.60	54.67	74.00	19.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

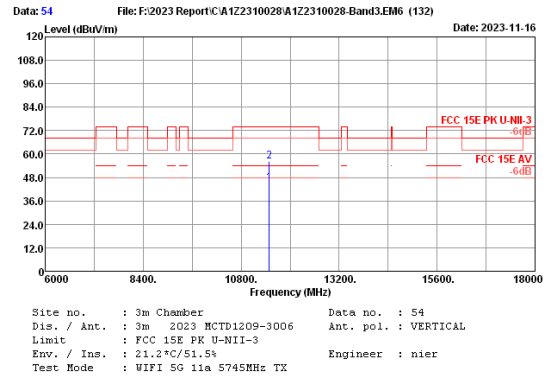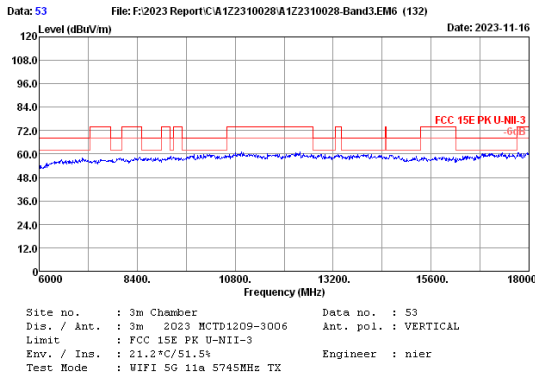


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.59	5.91	33.29	32.60	45.19	54.00	8.81	Average
2	11490.00	38.59	5.91	44.45	32.60	56.35	74.00	17.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

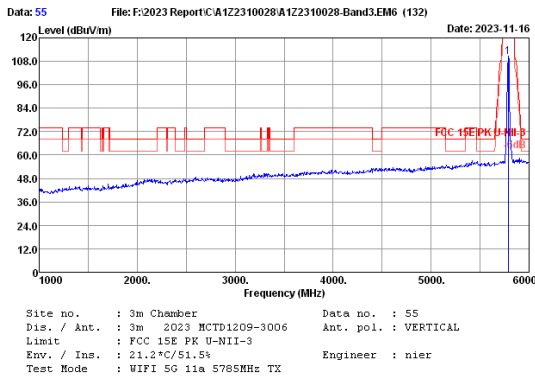



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	4.36	103.03	30.92	110.07	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

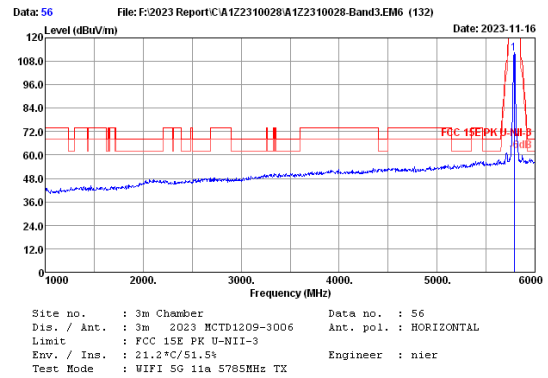



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	4.36	104.81	30.92	111.85	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

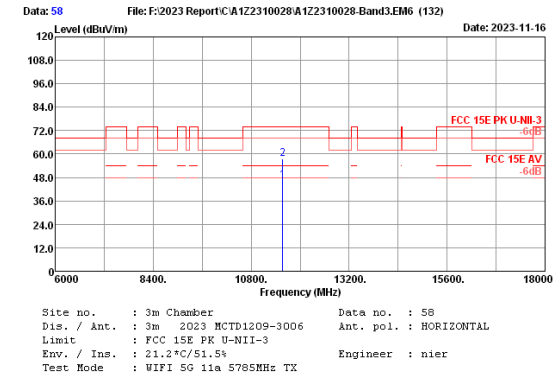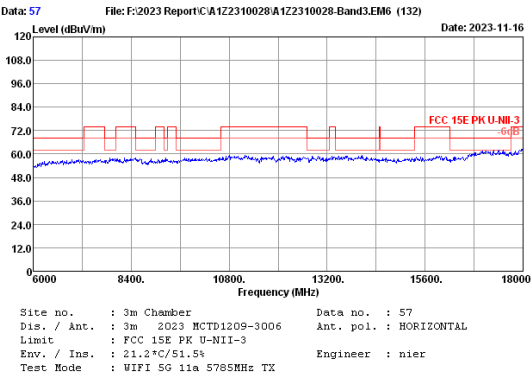


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.60	5.92	34.56	32.61	46.47	54.00	7.53	Average
2	11570.00	38.60	5.92	45.54	32.61	57.45	74.00	16.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

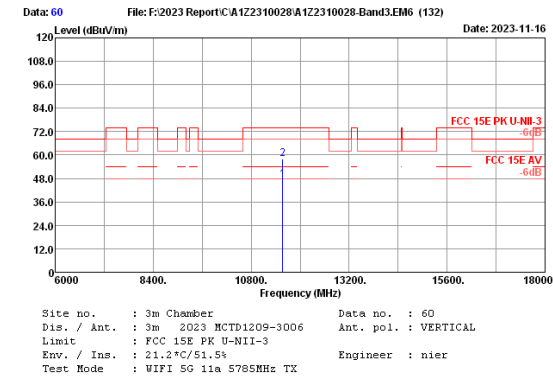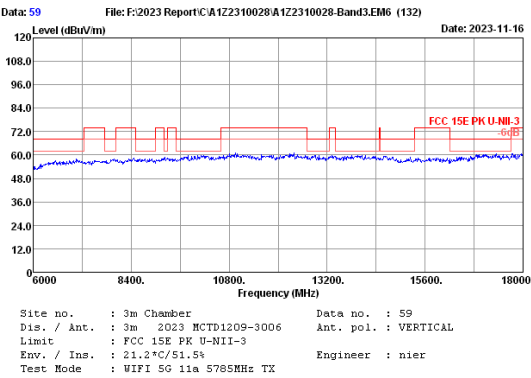

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.60	5.92	35.26	32.61	47.17	54.00	6.83	Average
2	11570.00	38.60	5.92	46.03	32.61	57.94	74.00	16.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

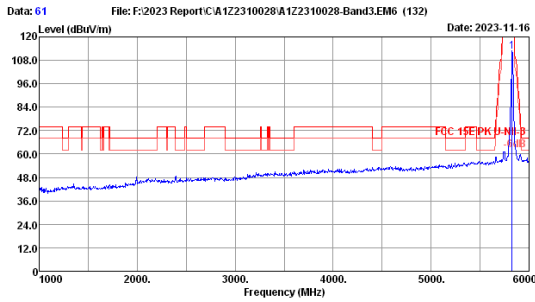

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	4.38	105.39	30.92	112.45	72.00	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

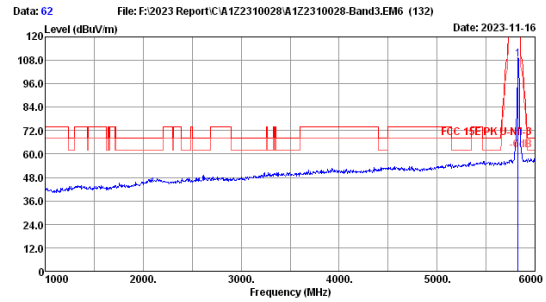


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	4.38	101.59	30.92	108.65	72.00	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

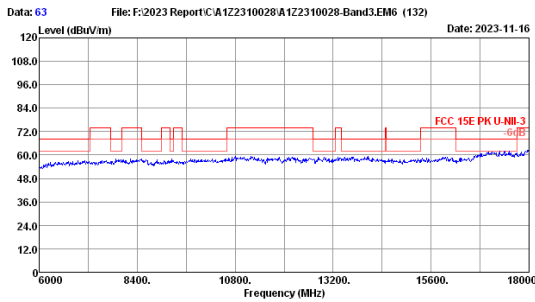



Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5825MHz TX

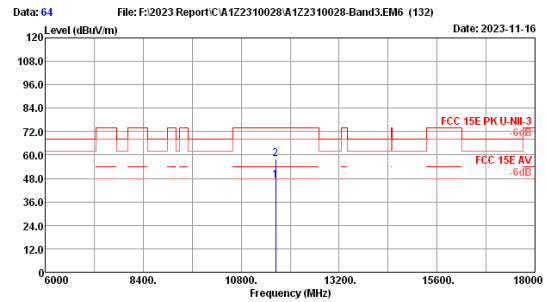

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5825MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.55	5.94	35.08	32.63	46.94	54.00	7.06	Average
2	11650.00	38.55	5.94	46.29	32.63	58.15	74.00	15.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

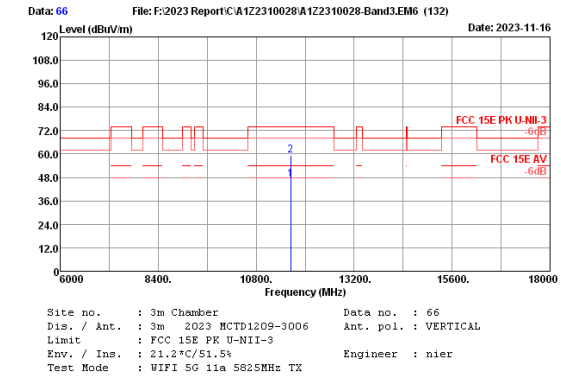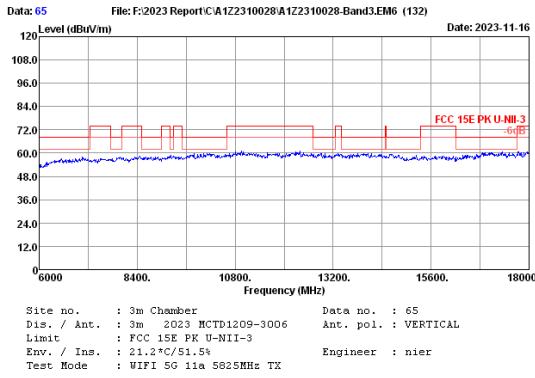


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.55	5.94	35.02	32.63	46.88	54.00	7.12	Average
2	11650.00	38.55	5.94	47.27	32.63	59.13	74.00	14.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

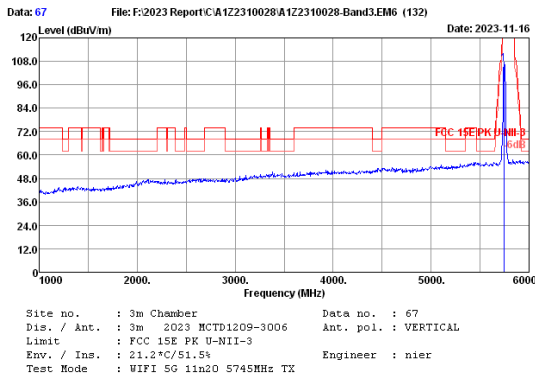



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	4.34	99.82	30.93	106.81	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

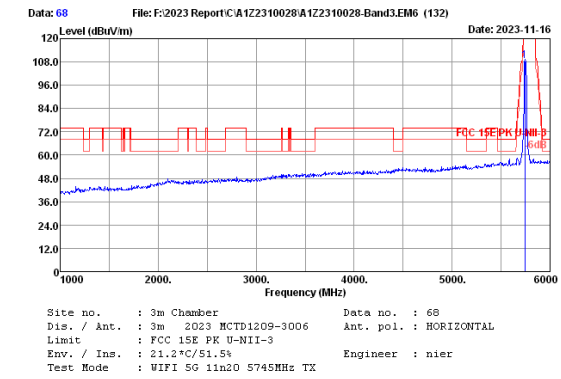



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	4.34	101.59	30.93	106.58	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

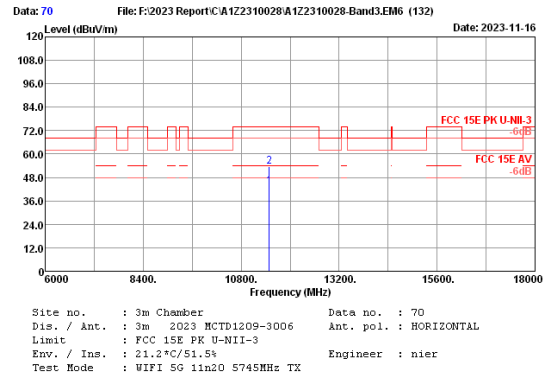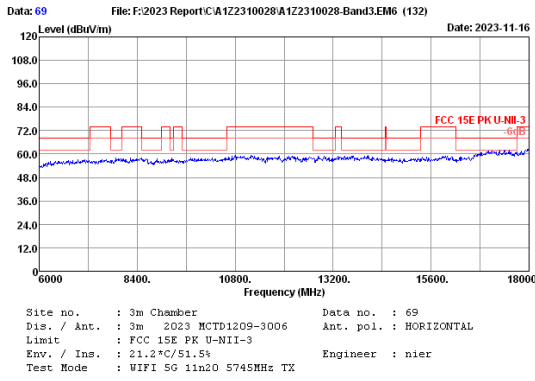


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.59	5.91	31.67	32.60	43.57	54.00	10.43	Average
2	11490.00	38.59	5.91	41.79	32.60	53.69	74.00	20.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

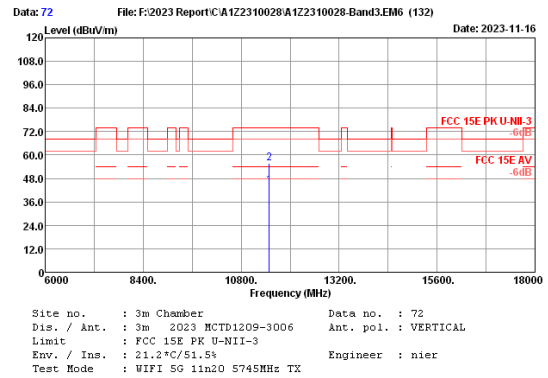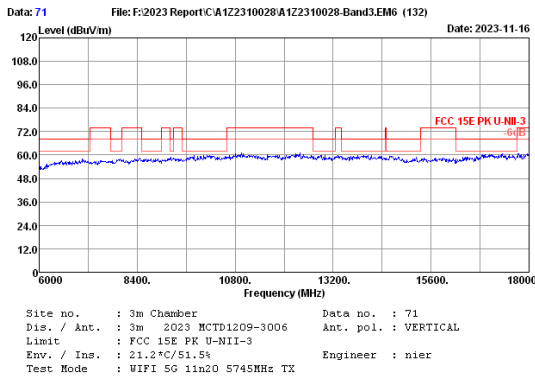


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.59	5.91	32.59	32.60	44.49	54.00	9.51	Average
2	11490.00	38.59	5.91	43.98	32.60	55.88	74.00	18.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

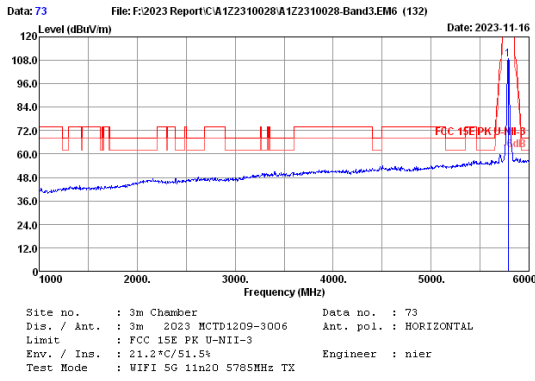



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	4.36	101.36	30.92	108.40	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

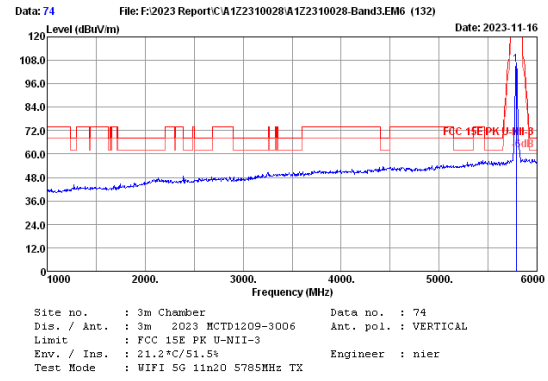



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	4.36	98.82	30.92	105.86	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

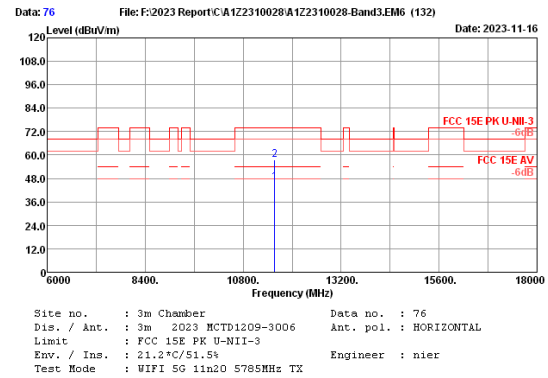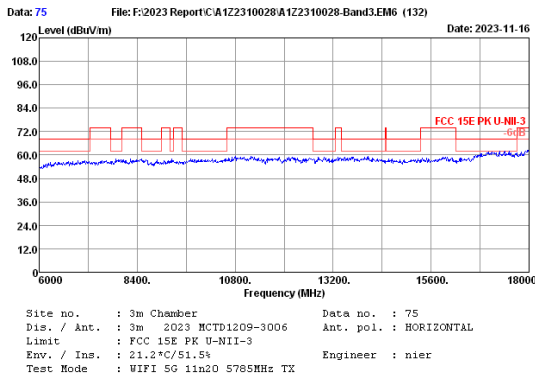


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.60	5.92	34.26	32.61	46.17	54.00	7.83	Average
2	11570.00	38.60	5.92	45.76	32.61	57.67	74.00	16.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

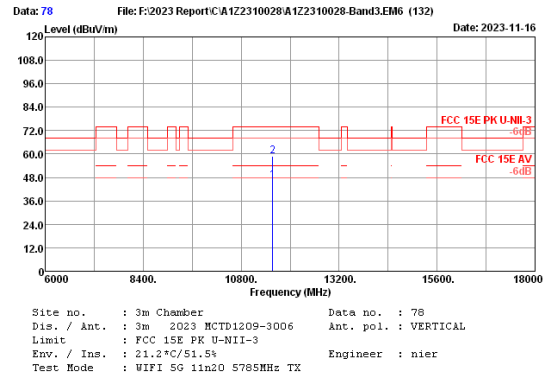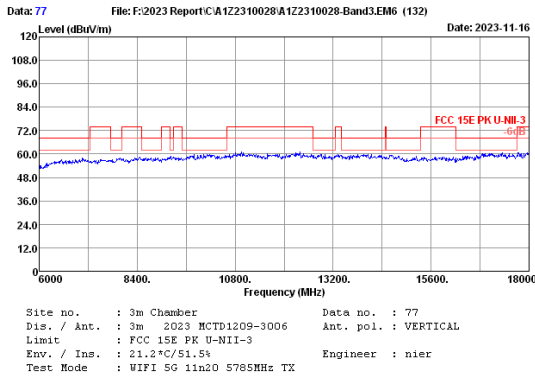


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.60	5.92	34.63	32.61	46.54	54.00	7.46	Average
2	11570.00	38.60	5.92	47.13	32.61	59.04	74.00	14.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

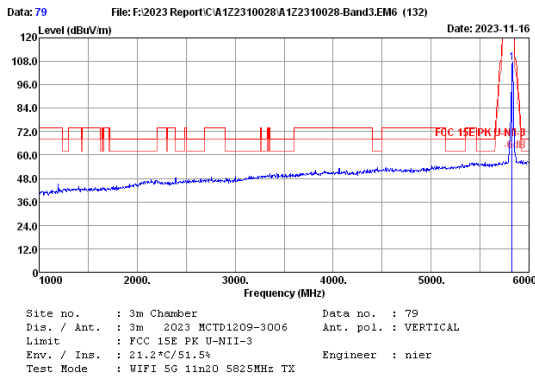



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	4.38	100.09	30.92	107.15	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

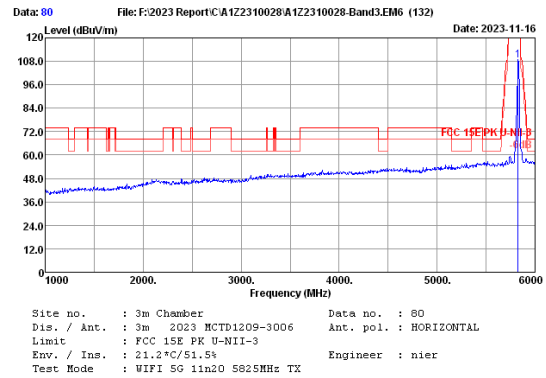



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	4.38	101.28	30.92	108.34	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

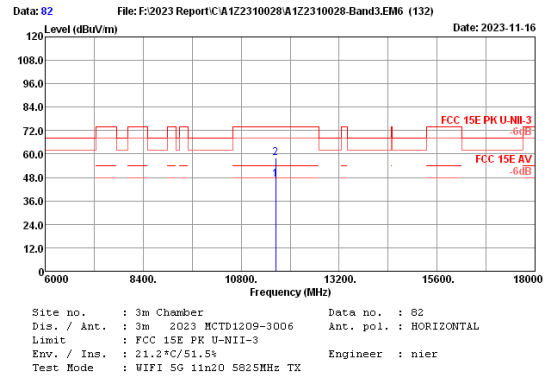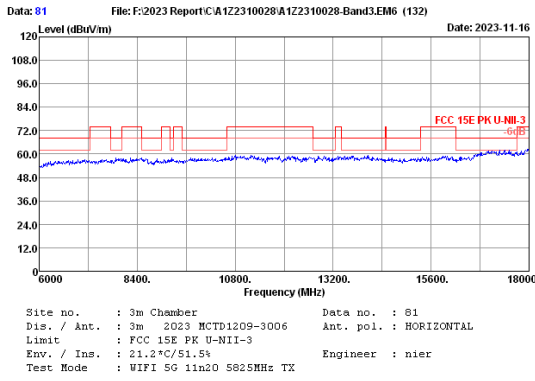


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.55	5.94	34.94	32.63	46.80	54.00	7.20	Average
2	11650.00	38.55	5.94	46.29	32.63	56.15	74.00	15.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

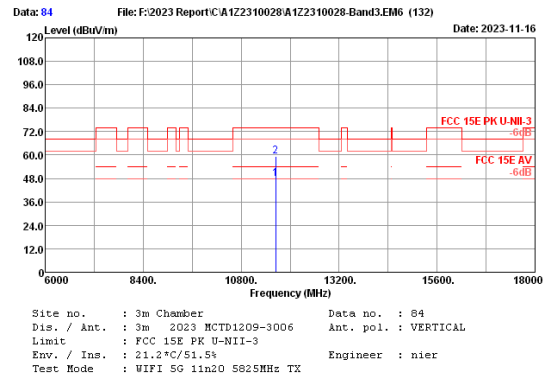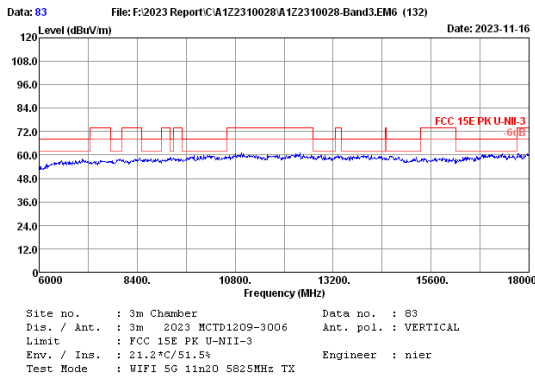


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.55	5.94	35.79	32.63	47.65	54.00	6.35	Average
2	11650.00	38.55	5.94	47.27	32.63	59.13	74.00	14.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

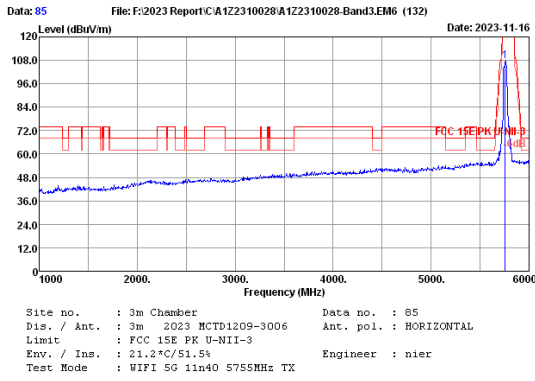



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.60	4.35	100.50	30.92	107.53	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

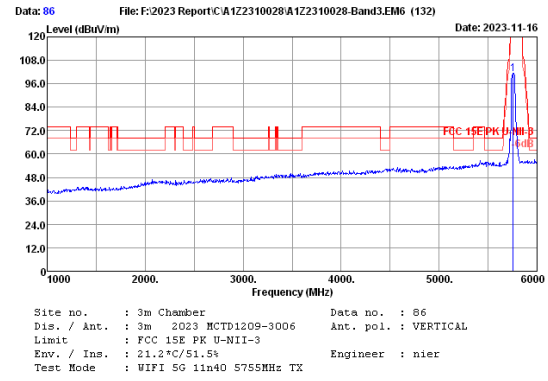



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.60	4.35	99.85	30.92	100.88	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

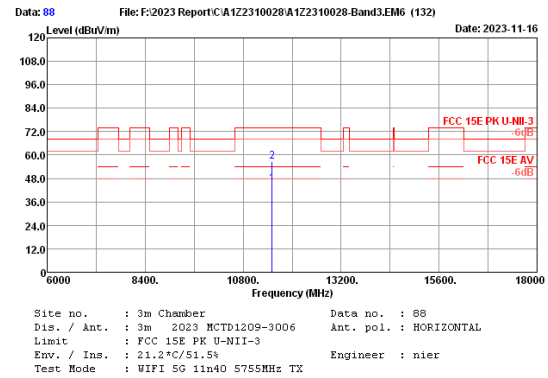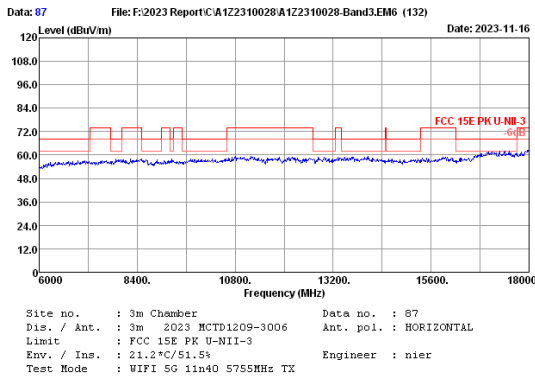


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.60	5.91	33.27	32.60	45.18	54.00	8.82	Average
2	11510.00	38.60	5.91	44.86	32.60	56.77	74.00	17.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

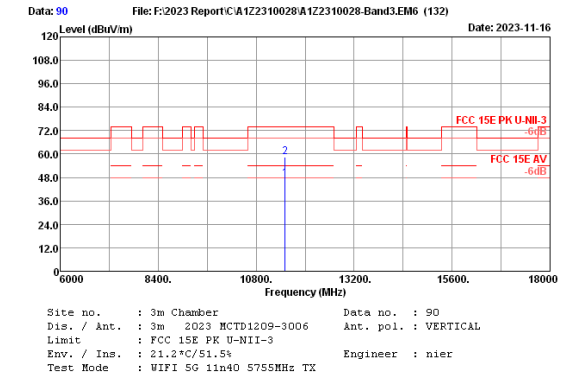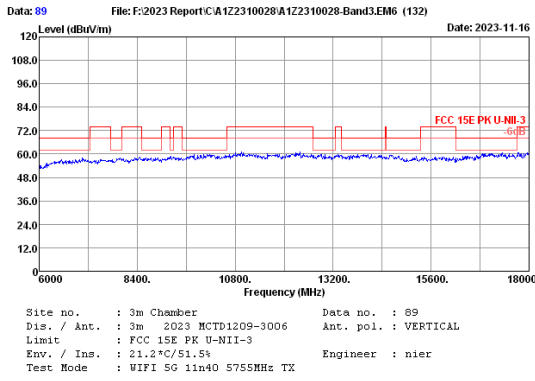


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.60	5.91	35.29	32.60	47.20	54.00	6.80	Average
2	11510.00	38.60	5.91	46.71	32.60	58.62	74.00	15.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

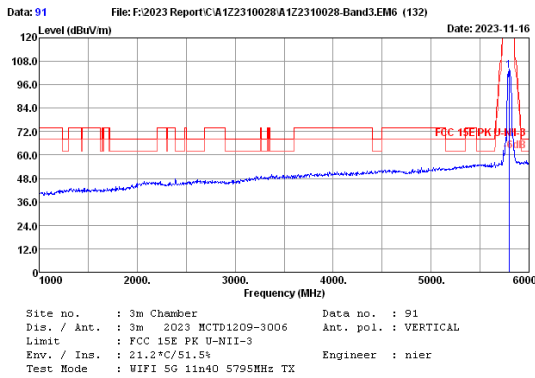


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.60	4.36	96.23	30.92	103.27	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

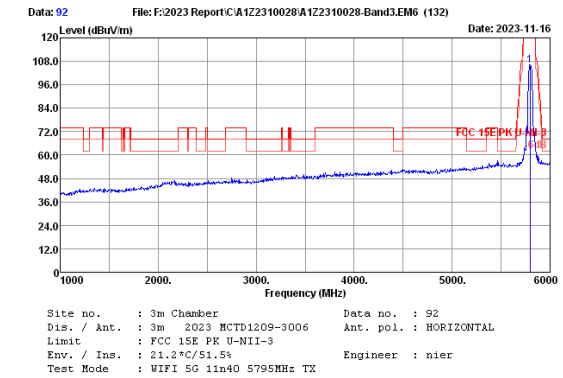


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.60	4.36	98.79	30.92	105.83	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

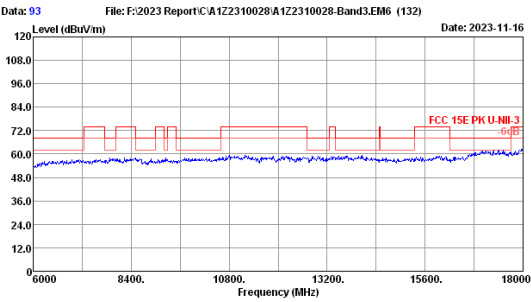


Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5795MHz TX

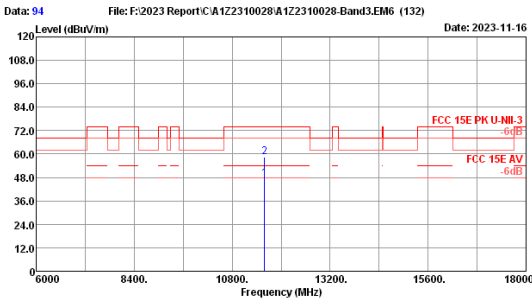


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.60	5.93	35.26	32.62	47.17	54.00	6.83	Average
2	11590.00	38.60	5.93	46.34	32.62	56.25	74.00	15.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

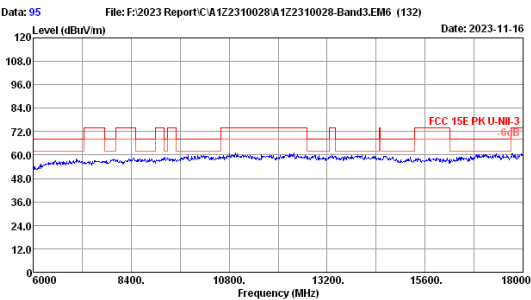


Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5795MHz TX

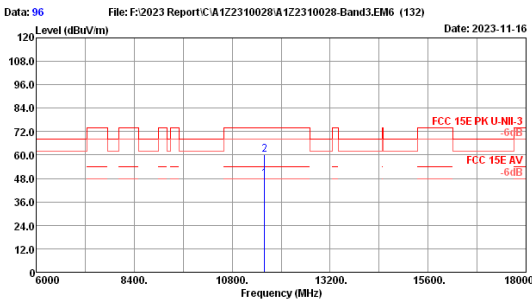

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.60	5.93	35.98	32.62	47.89	54.00	6.11	Average
2	11590.00	38.60	5.93	48.10	32.62	60.01	74.00	13.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

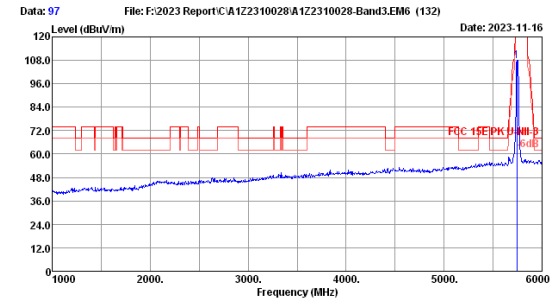

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	4.34	100.58	30.93	107.57	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

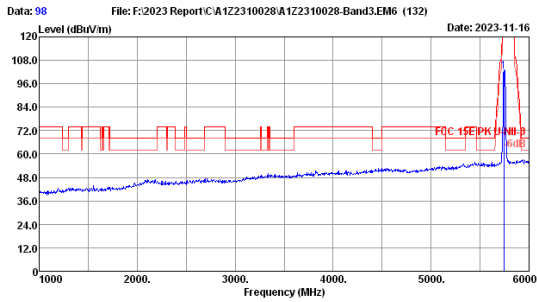


Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	4.34	95.48	30.93	102.47	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

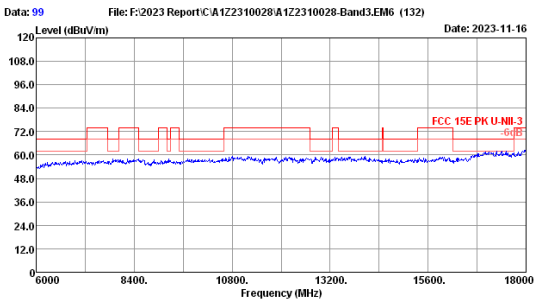


Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5745MHz TX

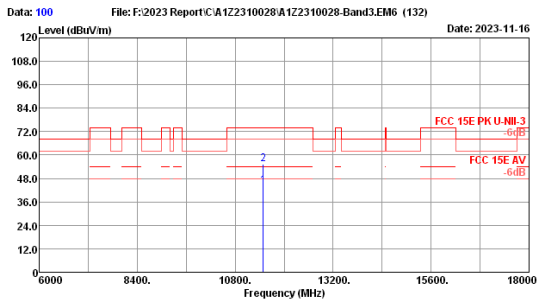


Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.59	5.91	32.19	32.60	44.09	54.00	9.91	Average
2	11490.00	38.59	5.91	43.57	32.60	55.47	74.00	18.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

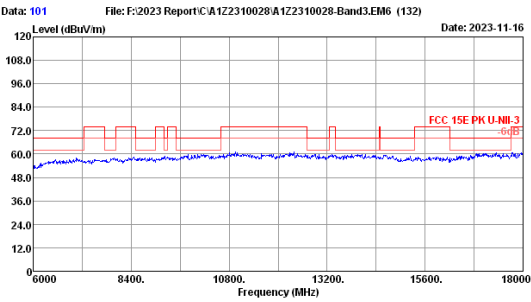


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5745MHz TX

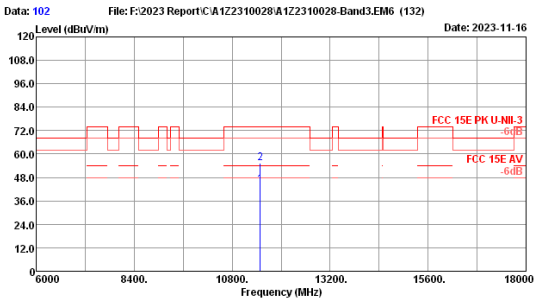

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.59	5.91	32.56	32.60	44.46	54.00	9.54	Average
2	11490.00	38.59	5.91	43.59	32.60	55.49	74.00	18.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

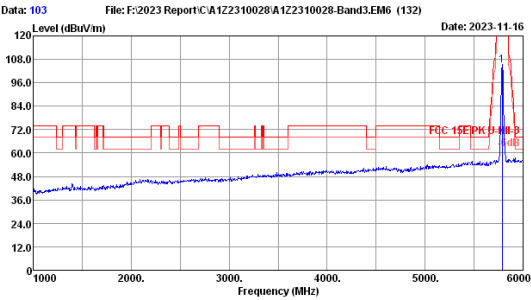

Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	4.36	97.87	30.92	104.91	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

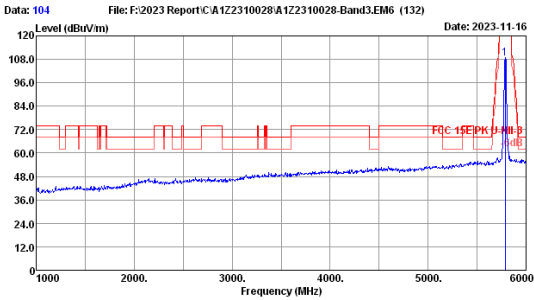

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5785MHz TX



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	4.36	101.40	30.92	108.44	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

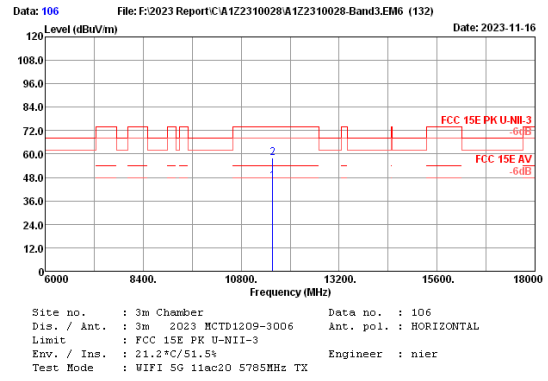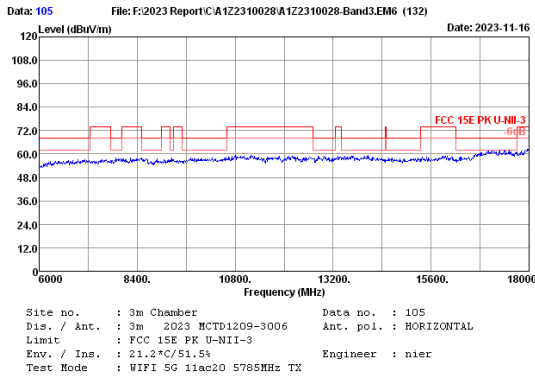


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.60	5.92	34.13	32.61	46.04	54.00	7.96	Average
2	11570.00	38.60	5.92	45.91	32.61	57.82	74.00	16.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

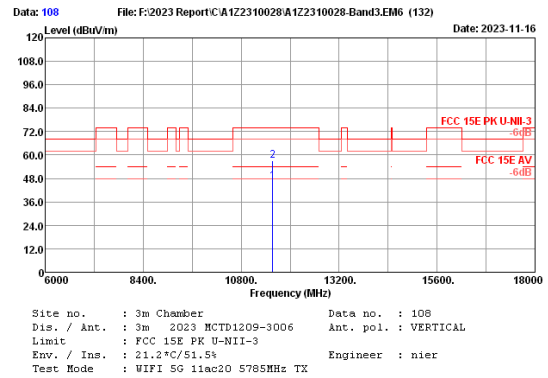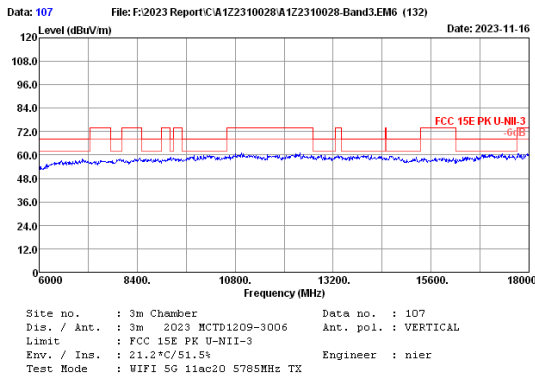


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.60	5.92	34.57	32.61	46.48	54.00	7.52	Average
2	11570.00	38.60	5.92	45.30	32.61	57.21	74.00	16.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

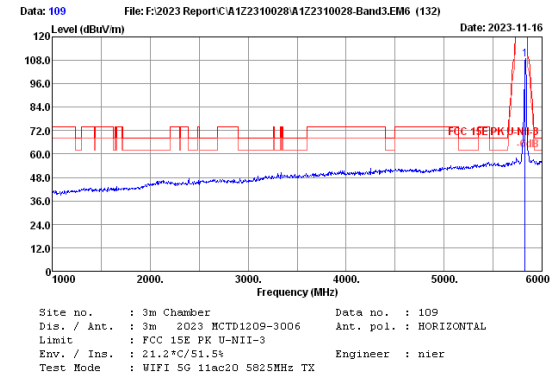


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	4.38	101.24	30.92	108.30	48.00	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

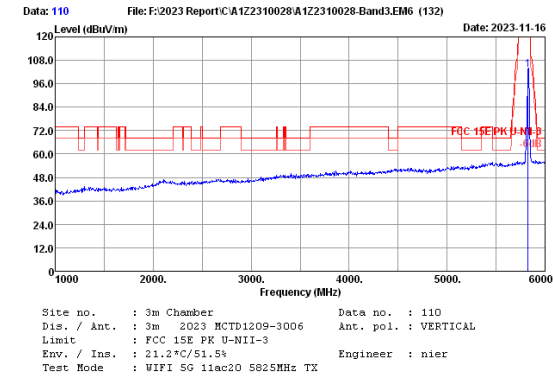


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	4.38	96.16	30.92	103.22	48.00	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

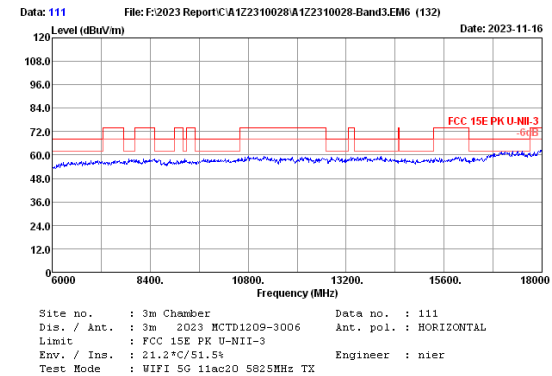



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.55	5.94	34.94	32.63	46.80	54.00	7.20	Average
2	11650.00	38.55	5.94	46.29	32.63	58.15	74.00	15.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

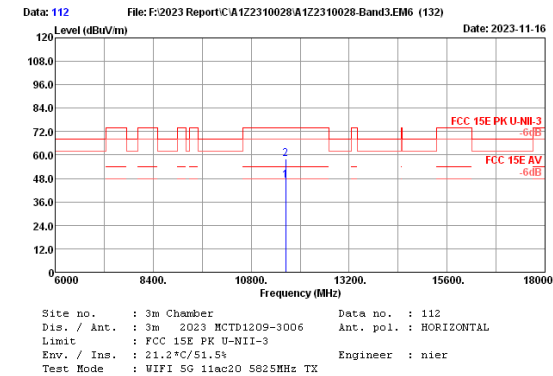


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.55	5.94	34.94	32.63	46.80	54.00	7.20	Average
2	11650.00	38.55	5.94	46.29	32.63	58.15	74.00	15.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

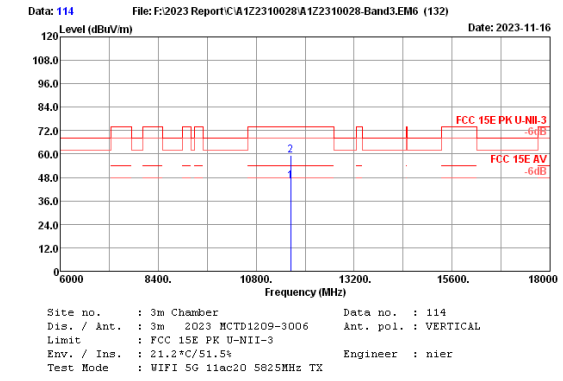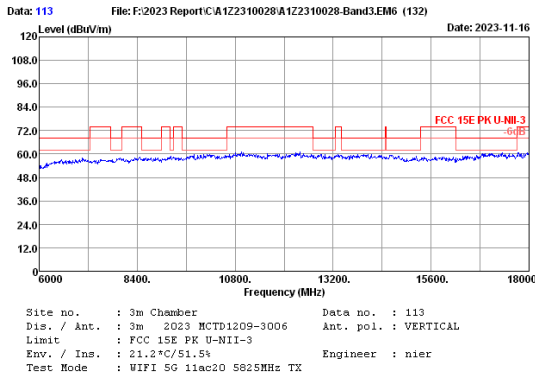


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.55	5.94	34.06	32.63	45.92	54.00	8.08	Average
2	11650.00	38.55	5.94	47.27	32.63	59.13	74.00	14.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

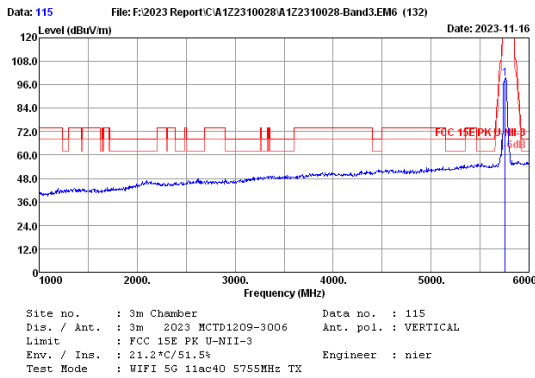



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.60	4.35	92.01	30.92	99.04	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

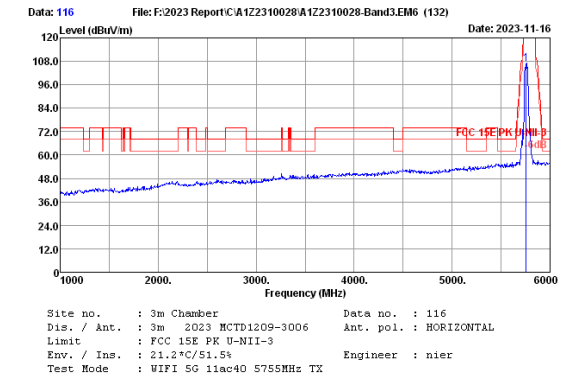



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.60	4.35	99.60	30.92	106.63	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

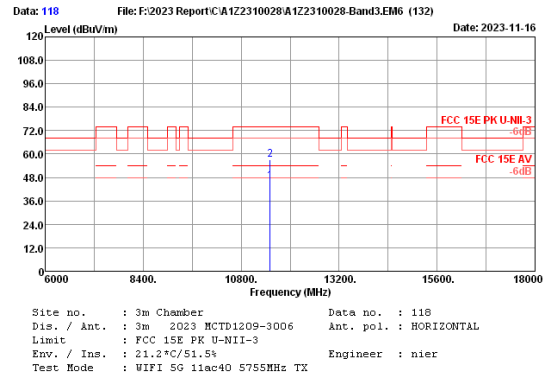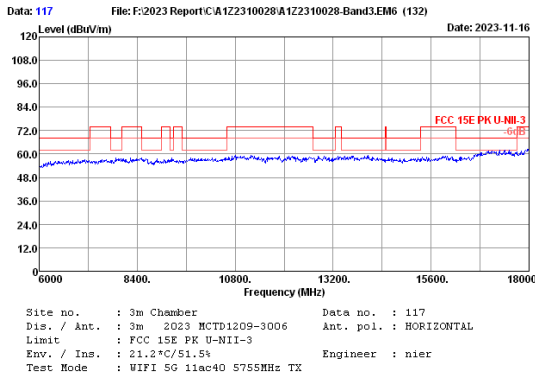


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.60	5.91	34.18	32.60	46.09	54.00	7.91	Average
2	11510.00	38.60	5.91	45.23	32.60	57.14	74.00	16.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

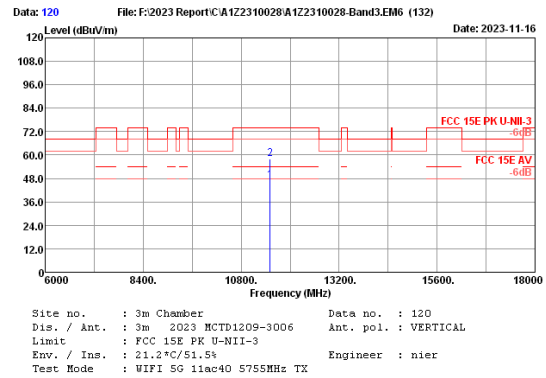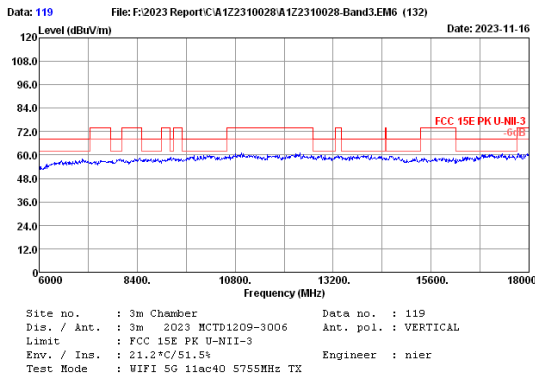


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.60	5.91	34.82	32.60	46.73	54.00	7.27	Average
2	11510.00	38.60	5.91	45.96	32.60	57.87	74.00	16.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

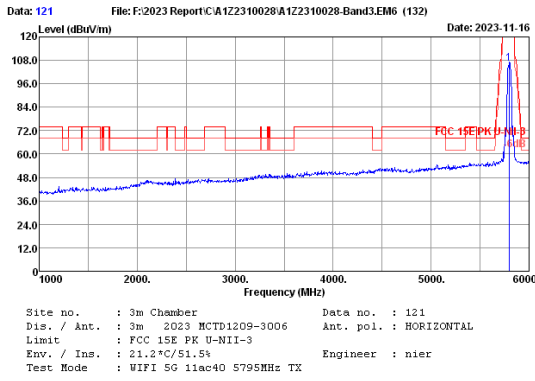



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.60	4.36	99.30	30.92	106.34	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

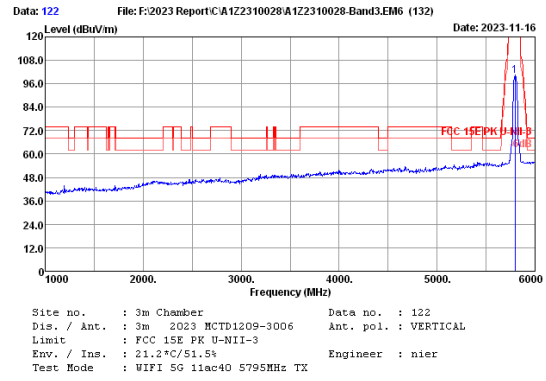



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.60	4.36	92.89	30.92	99.93	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

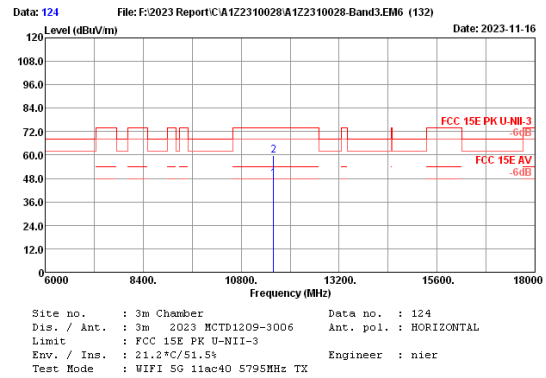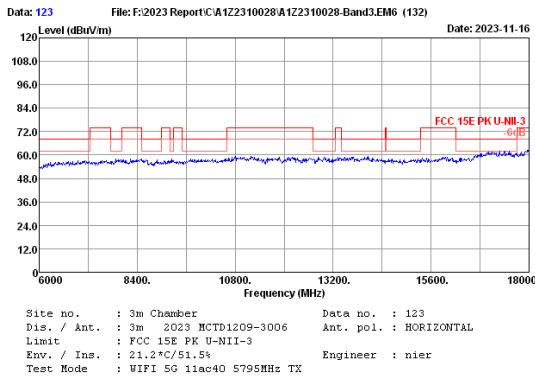


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.60	5.93	35.93	32.62	47.84	54.00	6.16	Average
2	11590.00	38.60	5.93	47.71	32.62	59.62	74.00	14.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

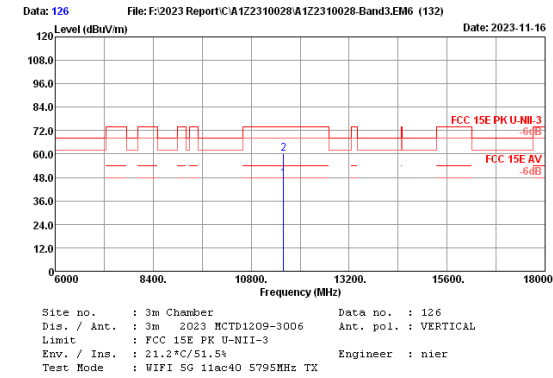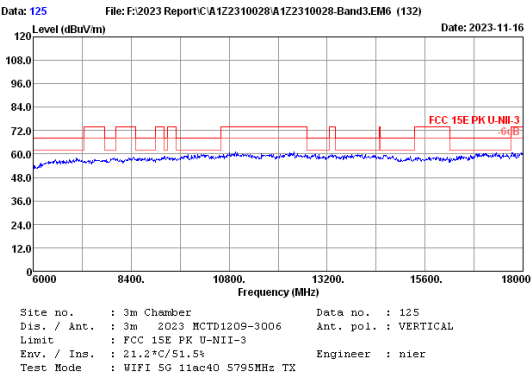


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.60	5.93	35.67	32.62	47.58	54.00	6.42	Average
2	11590.00	38.60	5.93	48.27	32.62	60.18	74.00	13.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

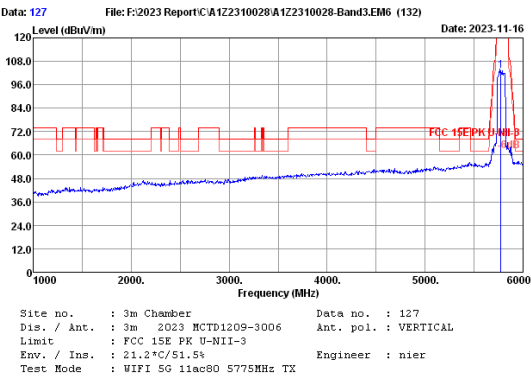



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.60	4.36	96.32	30.92	103.36	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

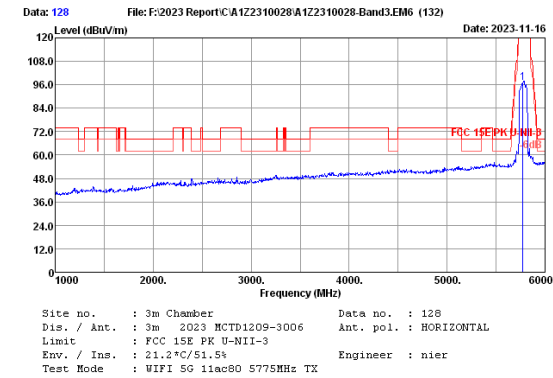



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.60	4.36	90.06	30.92	97.10	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

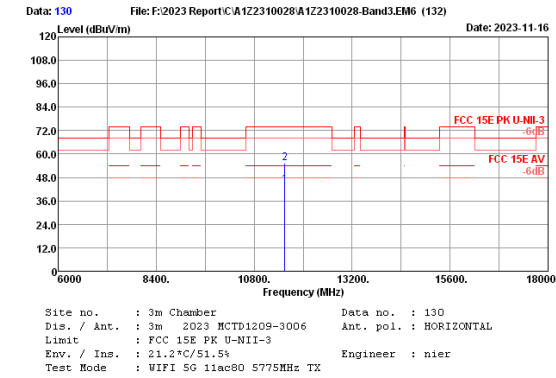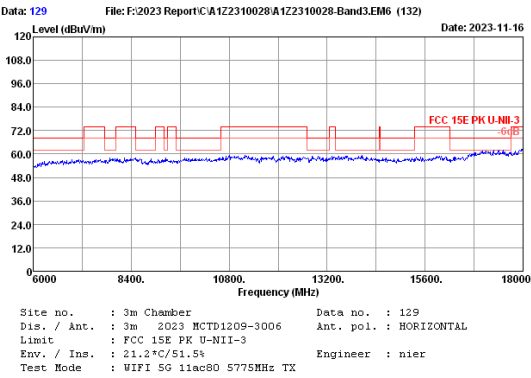

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.00	38.60	5.92	32.58	32.61	44.49	54.00	9.51	Average
2	11550.00	38.60	5.92	43.45	32.61	55.36	74.00	18.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

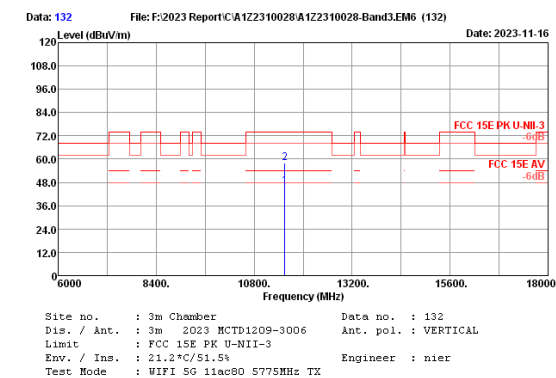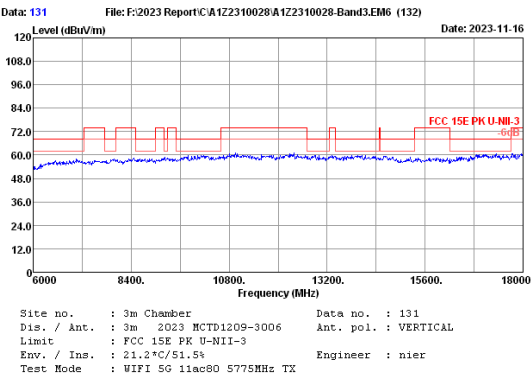

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.00	38.60	5.92	34.29	32.61	46.20	54.00	7.80	Average
2	11550.00	38.60	5.92	45.95	32.61	57.86	74.00	16.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

5. Band Edge Compliance Test

5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	3 Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.01,23	1 Year
4.	Amplifier	EMCI	EMC0518A45S E	980965	Aug.25,23	1 Year
5.	RF Cable	Shanghai chao yu	SFT205-NMSM- 10.00M	689241	Aug.25,23	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.23,23	1 Year

Note: N/A means Not applicable.

5.2. Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz,

All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the band 5470-5725MHz, Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.3. Test Procedure


Use the test method described in ANSI C63.10 clause 6.10:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO
5. Per KDB789033 clause H 2)d).if the test distance is 3m, the EIRP(dBm)=E(dBuV/m)-95.2
Get the final compare with limit.

5.4. Test Results

Pass (The testing data was attached in the next pages.)


U-NII-1 Band:

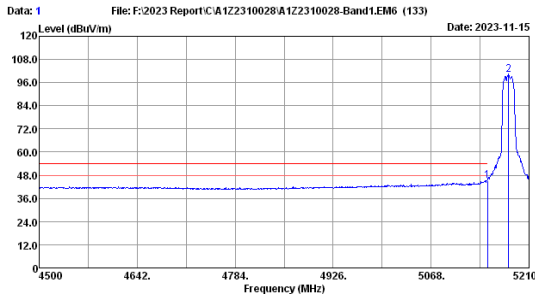

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	39.59	30.99	45.19	54.00	8.81	Average
2	5180.18	32.50	4.11	94.36	30.98	99.99	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

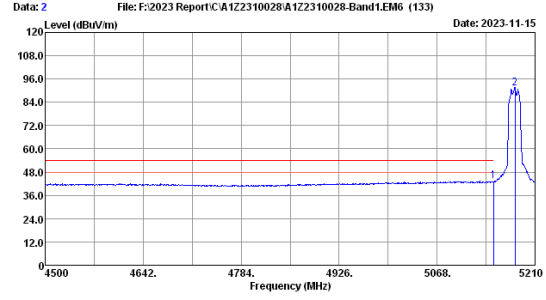

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	37.69	30.99	43.29	54.00	10.71	Average
2	5180.89	32.50	4.11	85.62	30.98	91.25	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

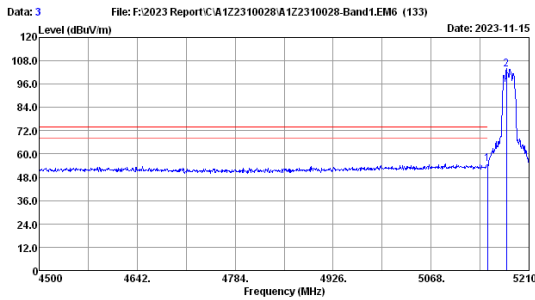

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	49.34	30.99	54.94	74.00	19.06	Peak
2	5177.34	32.50	4.10	97.95	30.98	103.57	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

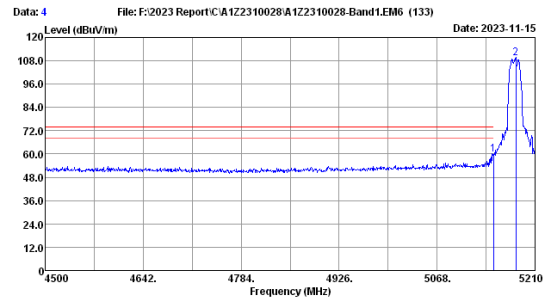

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	54.07	30.99	59.67	74.00	14.33	Peak
2	5182.31	32.50	4.11	103.63	30.98	109.26	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

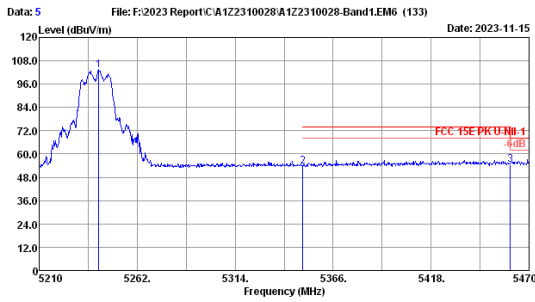

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.72	32.67	4.13	97.53	30.98	103.35	60.20	20.29	Peak
2	5350.00	33.30	4.18	47.20	30.97	53.71	54.00	13.75	Peak
3	5460.00	34.02	4.22	47.16	30.95	54.45	54.00	13.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

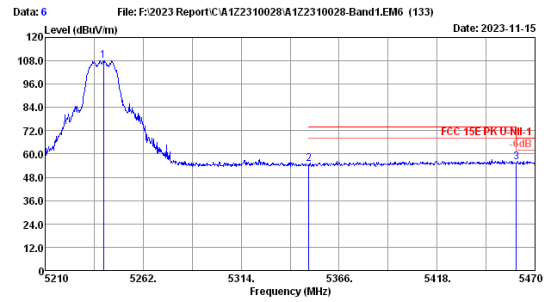

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.94	32.66	4.13	102.05	30.98	107.86	60.20	19.23	Peak
2	5350.00	33.30	4.18	48.26	30.97	54.77	54.00	12.41	Peak
3	5460.00	34.02	4.22	48.50	30.95	55.79	54.00	12.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

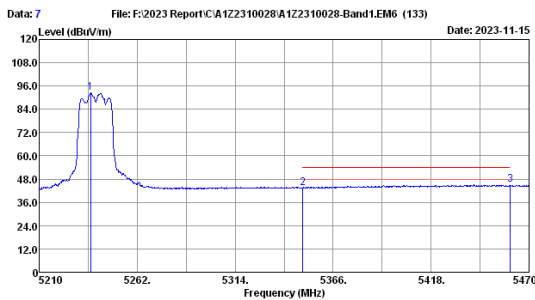

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5237.30	32.65	4.13	86.53	30.98	92.33	54.00	10.51	Average
2	5350.00	33.30	4.18	36.98	30.97	43.49	54.00	8.95	Average
3	5460.00	34.02	4.22	37.76	30.95	45.05	54.00	8.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

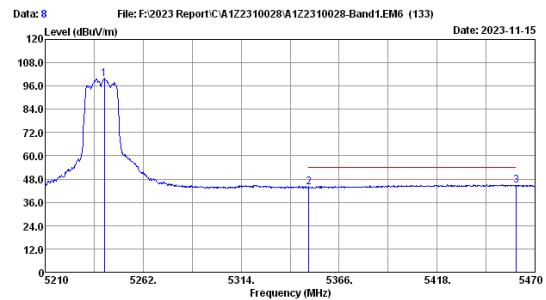

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11a 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.46	32.67	4.13	93.78	30.98	99.60	54.00	10.24	Average
2	5350.00	33.30	4.18	37.25	30.97	43.76	54.00	9.12	Average
3	5460.00	34.02	4.22	37.59	30.95	44.88	54.00	9.12	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

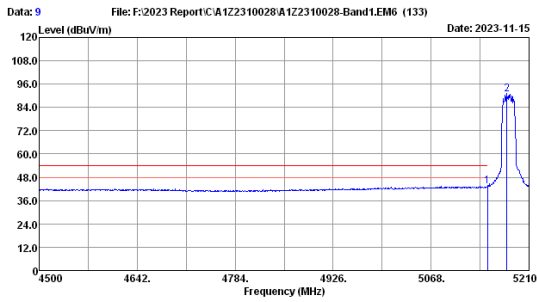

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	37.99	30.99	43.59	54.00	10.41	Average
2	5178.05	32.50	4.10	65.15	30.98	90.77	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

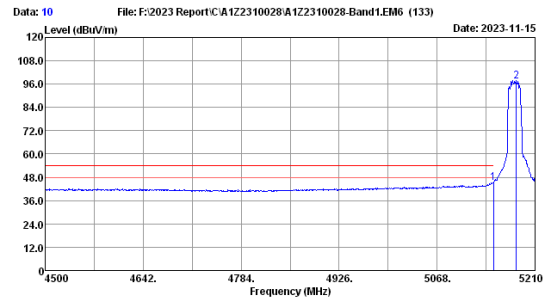

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	39.72	30.99	45.32	54.00	8.68	Average
2	5183.02	32.50	4.11	91.81	30.98	97.44	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

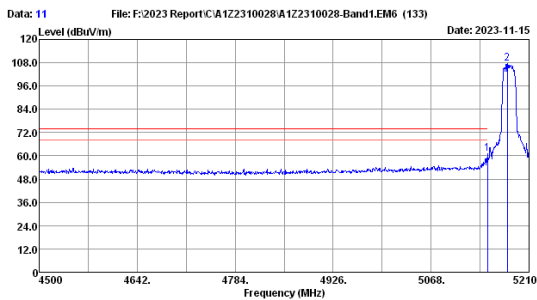

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	55.37	30.99	60.97	74.00	13.03	Peak
2	5178.76	32.50	4.11	101.81	30.98	107.44	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

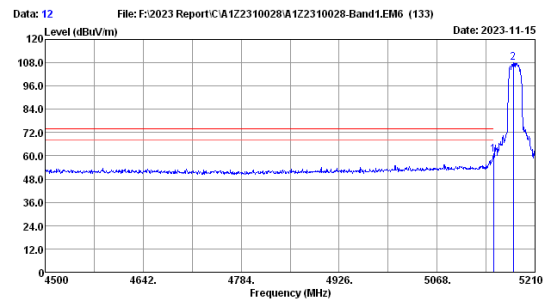

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	54.90	30.99	60.50	74.00	13.50	Peak
2	5178.76	32.50	4.11	102.26	30.98	107.89	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

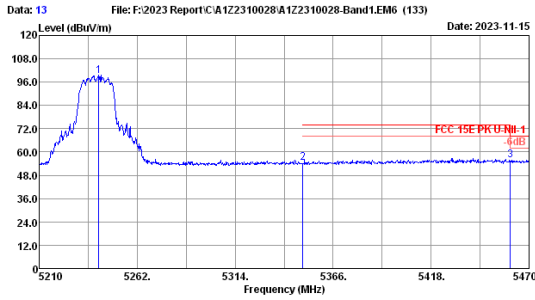

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.72	32.67	4.13	93.53	30.98	99.35	60.20	19.71	Peak
2	5350.00	33.30	4.18	47.78	30.97	54.29	54.00	19.71	Peak
3	5460.00	34.02	4.22	48.54	30.95	55.83	54.00	12.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

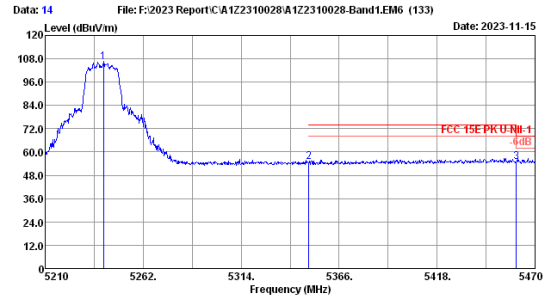

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.94	32.66	4.13	100.40	30.98	106.21	60.20	19.28	Peak
2	5350.00	33.30	4.18	48.21	30.97	54.72	54.00	19.28	Peak
3	5460.00	34.02	4.22	47.82	30.95	55.11	54.00	13.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

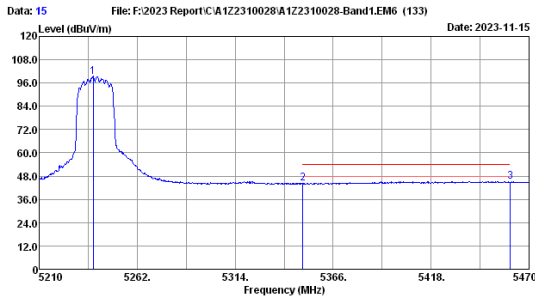

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.60	32.65	4.13	93.50	30.98	99.30	54.00	9.80	Average
2	5350.00	33.30	4.18	37.69	30.97	44.20	54.00	8.80	Average
3	5460.00	34.02	4.22	37.91	30.95	45.20	54.00	8.80	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

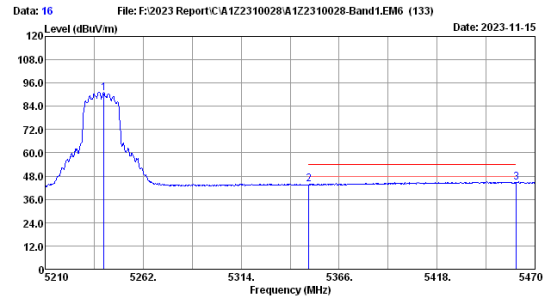

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.20	32.66	4.13	85.18	30.98	90.99	54.00	10.06	Average
2	5350.00	33.30	4.18	37.43	30.97	43.94	54.00	9.47	Average
3	5460.00	34.02	4.22	37.24	30.95	44.53	54.00	9.47	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

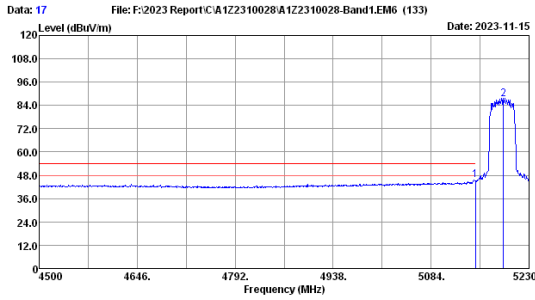

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	39.79	30.99	45.39	54.00	8.61	Average
2	5192.04	32.50	4.11	61.70	30.98	87.33	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

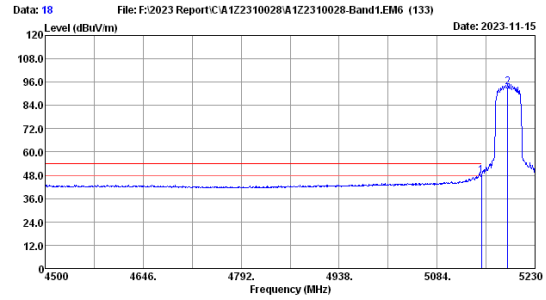

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	42.31	30.99	47.91	54.00	6.09	Average
2	5192.04	32.50	4.11	87.91	30.98	93.54	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

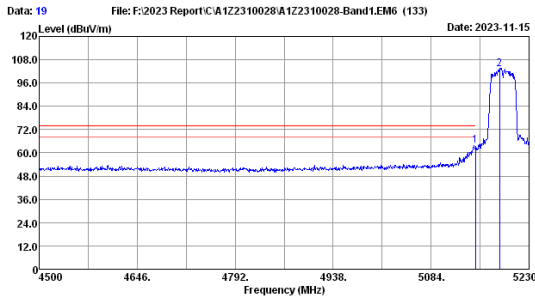

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	58.00	30.99	63.60	74.00	10.40	Peak
2	5192.04	32.50	4.11	97.76	30.98	103.39	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

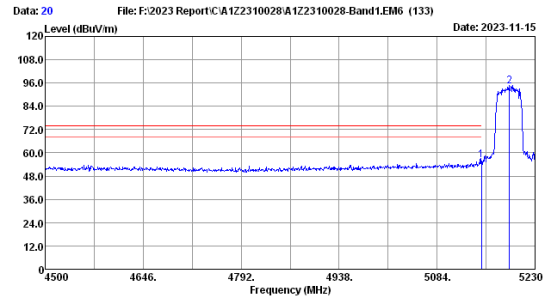

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	50.73	30.99	56.33	74.00	17.67	Peak
2	5192.04	32.50	4.11	88.78	30.98	94.41	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

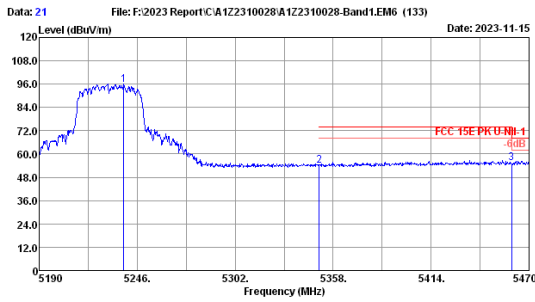

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.44	32.65	4.13	90.05	30.98	95.85	---	---	Peak
2	5350.00	33.30	4.18	47.59	30.97	54.10	74.00	19.90	Peak
3	5460.00	34.02	4.22	47.86	30.95	55.15	68.20	13.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

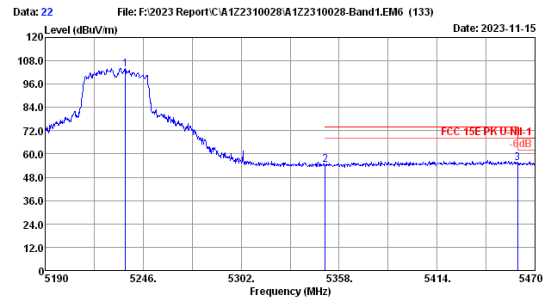

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5235.92	32.64	4.13	98.02	30.98	103.81	---	---	Peak
2	5350.00	33.30	4.18	47.96	30.97	54.47	74.00	19.53	Peak
3	5460.00	34.02	4.22	48.01	30.95	55.30	68.20	12.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

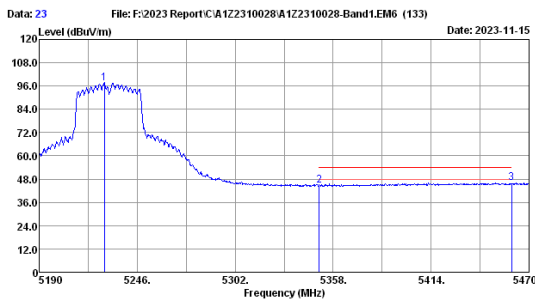

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5227.24	32.61	4.13	91.56	30.98	97.32	---	---	Average
2	5350.00	33.30	4.18	38.30	30.97	44.81	54.00	9.19	Average
3	5460.00	34.02	4.22	38.89	30.95	46.18	54.00	7.82	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

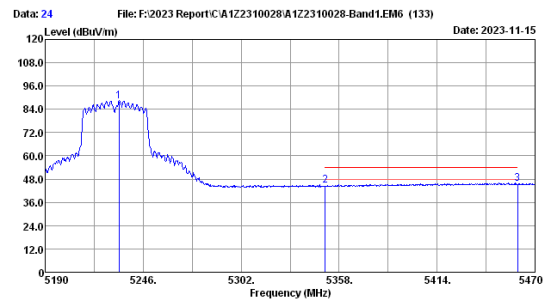

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11n40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.28	32.63	4.13	82.32	30.98	86.10	---	---	Average
2	5350.00	33.30	4.18	38.20	30.97	44.71	54.00	9.29	Average
3	5460.00	34.02	4.22	38.29	30.95	45.58	54.00	8.42	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

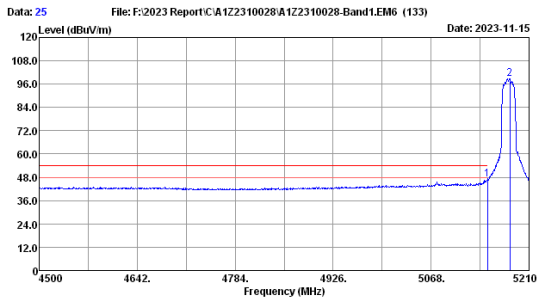

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	41.17	30.99	46.77	54.00	7.23	Average
2	5182.31	32.50	4.11	92.95	30.98	98.58	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

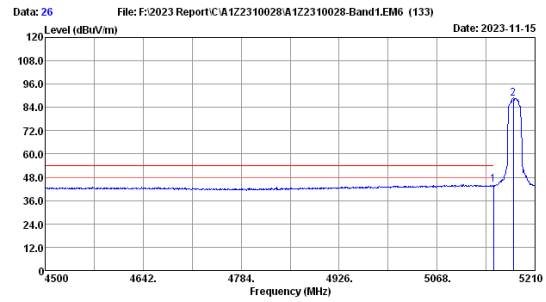

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	38.74	30.99	44.34	54.00	9.66	Average
2	5178.76	32.50	4.11	83.12	30.98	88.75	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

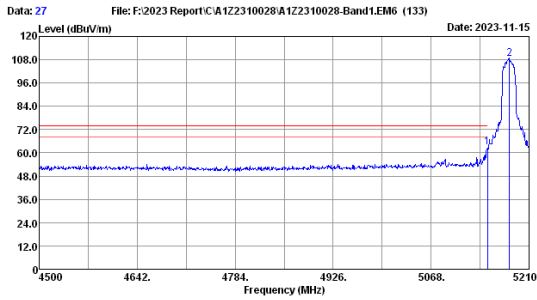

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	57.38	30.99	62.98	74.00	11.02	Peak
2	5181.60	32.50	4.11	102.82	30.98	108.45	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

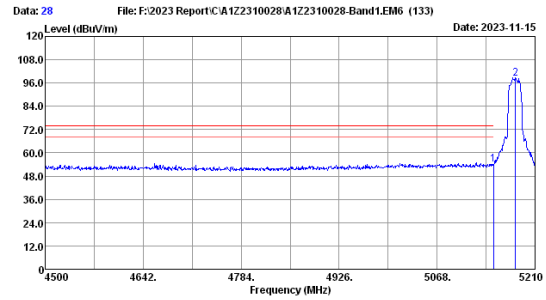

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5180MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	48.27	30.99	53.87	74.00	20.13	Peak
2	5181.60	32.50	4.11	92.73	30.98	98.36	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

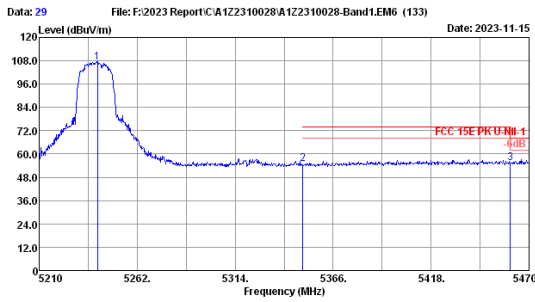

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.94	32.66	4.13	101.35	30.98	107.16	74.00	19.30	Peak
2	5350.00	33.30	4.18	48.19	30.97	54.70	74.00	18.79	Peak
3	5460.00	34.02	4.22	47.90	30.95	55.19	68.20	13.01	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

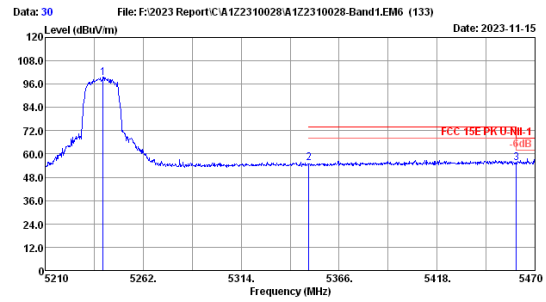

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.68	32.66	4.13	93.31	30.98	99.12	74.00	18.79	Peak
2	5350.00	33.30	4.18	48.70	30.97	55.21	74.00	18.79	Peak
3	5460.00	34.02	4.22	48.16	30.95	55.45	68.20	12.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

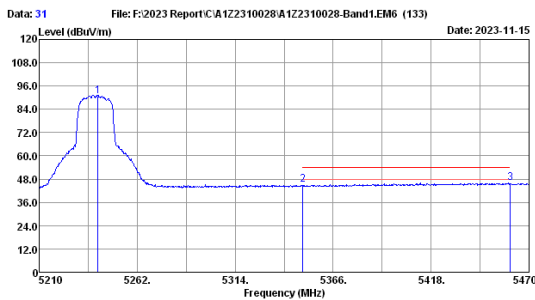

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.20	32.66	4.13	85.06	30.98	90.87	54.00	8.72	Average
2	5350.00	33.30	4.18	38.77	30.97	45.28	54.00	8.72	Average
3	5460.00	34.02	4.22	38.92	30.95	46.21	54.00	7.79	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

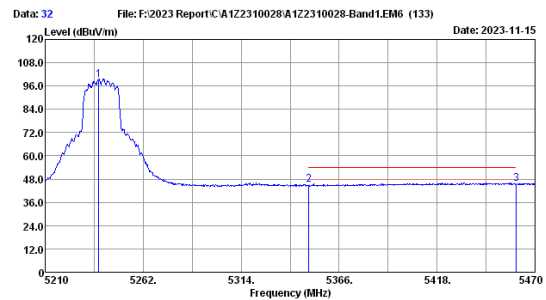

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5240MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.34	32.65	4.13	93.44	30.98	99.24	54.00	8.74	Average
2	5350.00	33.30	4.18	38.75	30.97	45.26	54.00	8.74	Average
3	5460.00	34.02	4.22	38.39	30.95	45.68	54.00	8.32	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

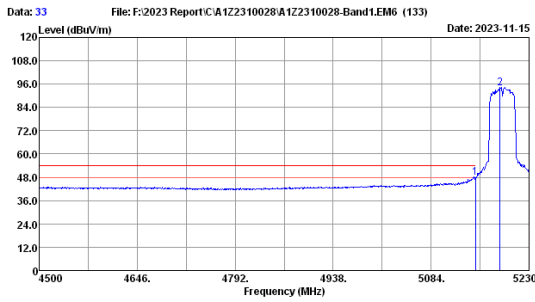

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	42.01	30.99	47.61	54.00	6.39	Average
2	5156.93	32.50	4.11	88.45	30.98	94.08	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

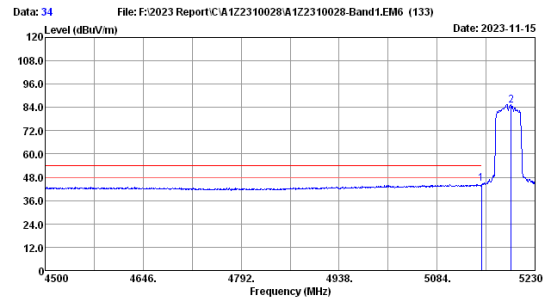

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	38.98	30.99	44.58	54.00	9.42	Average
2	5194.23	32.50	4.11	79.44	30.98	85.07	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

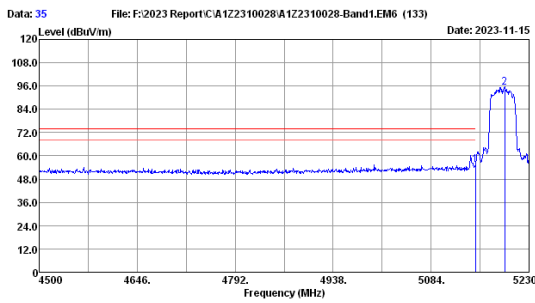

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	49.78	30.99	55.38	74.00	18.62	Peak
2	5193.50	32.50	4.11	89.50	30.98	95.13	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

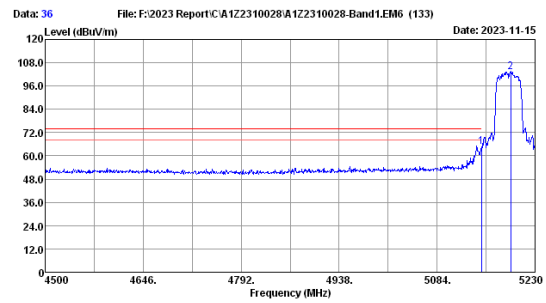

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5190MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	58.84	30.99	64.44	74.00	9.56	Peak
2	5193.50	32.50	4.11	97.50	30.98	103.13	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

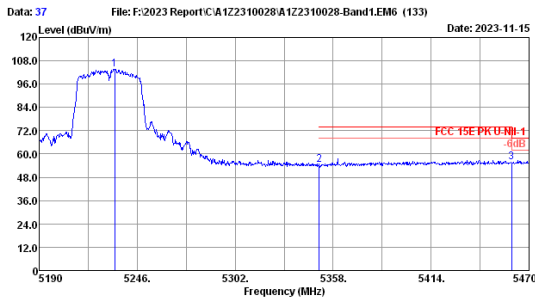

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5233.12	32.63	4.13	97.66	30.98	103.44	---	---	Peak
2	5350.00	33.30	4.18	48.16	30.97	54.67	74.00	19.33	Peak
3	5460.00	34.02	4.22	48.46	30.95	55.75	68.20	12.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

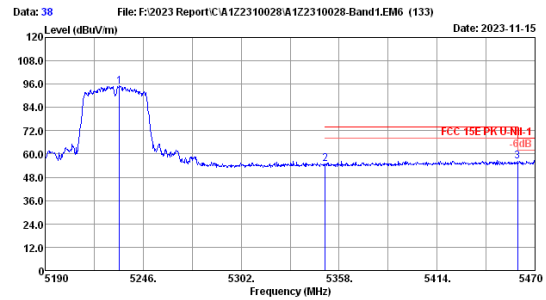

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.56	32.63	4.13	88.92	30.98	94.70	---	---	Peak
2	5350.00	33.30	4.18	48.36	30.97	54.87	74.00	19.13	Peak
3	5460.00	34.02	4.22	48.83	30.95	56.12	68.20	12.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

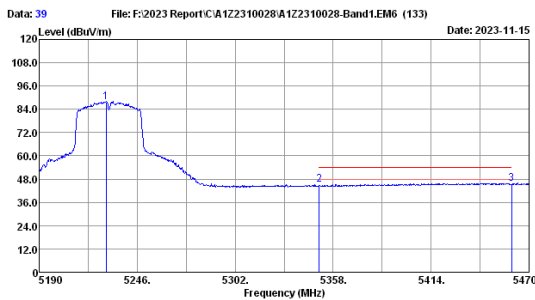

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5228.36	32.61	4.13	81.86	30.98	87.62	---	---	Average
2	5350.00	33.30	4.18	38.52	30.97	45.03	54.00	8.97	Average
3	5460.00	34.02	4.22	38.48	30.95	45.77	54.00	8.23	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

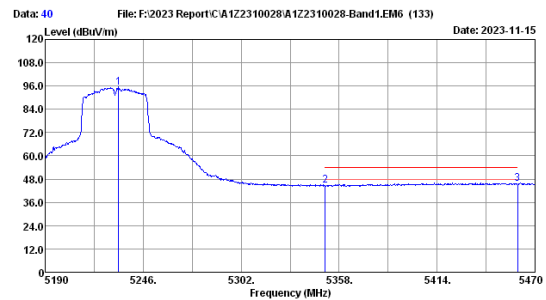

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5230MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.00	32.63	4.13	89.45	30.98	95.23	---	---	Average
2	5350.00	33.30	4.18	38.43	30.97	44.94	54.00	9.06	Average
3	5460.00	34.02	4.22	38.50	30.95	45.79	54.00	8.21	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

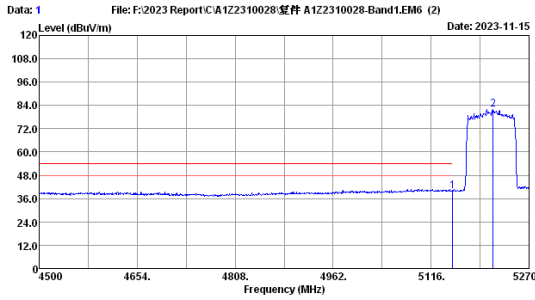

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5210MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	34.24	30.99	39.84	54.00	14.16	Average
2	5219.79	32.56	4.12	76.43	30.98	82.13	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

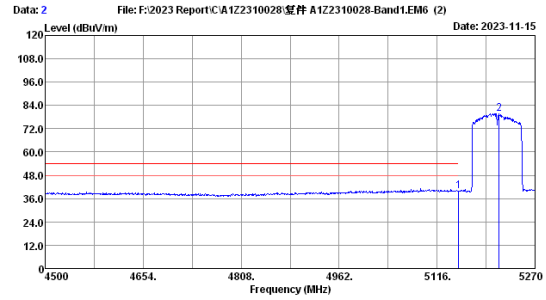

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5210MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	34.31	30.99	39.91	54.00	14.09	Average
2	5219.79	32.56	4.12	74.22	30.98	79.92	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

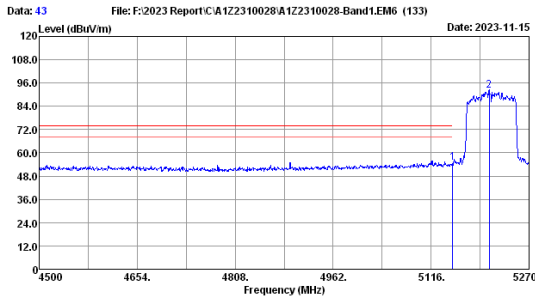

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5210MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	49.22	30.99	54.82	74.00	19.18	Peak
2	5207.63	32.53	4.12	86.34	30.98	92.01	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

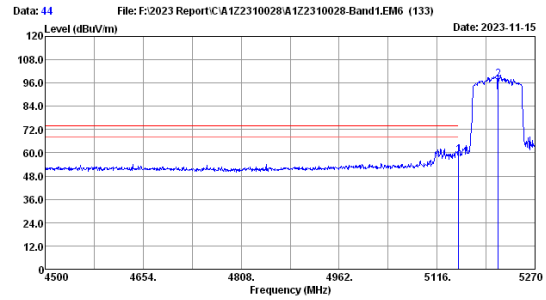

Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5210MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	4.09	53.30	30.99	58.90	74.00	15.10	Peak
2	5212.25	32.55	4.12	92.26	30.98	97.95	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

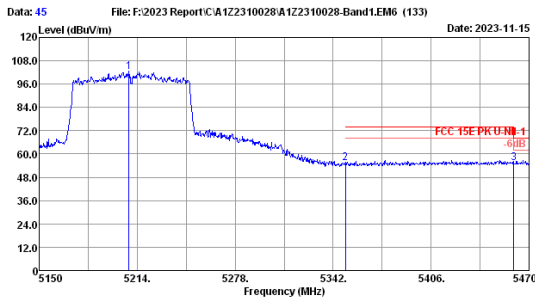

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5210MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5208.56	32.53	4.12	96.57	30.98	102.24	-----	-----	Peak
2	5350.00	33.30	4.18	48.83	30.97	55.94	74.00	18.66	Peak
3	5460.00	34.02	4.22	48.13	30.95	55.42	68.20	12.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

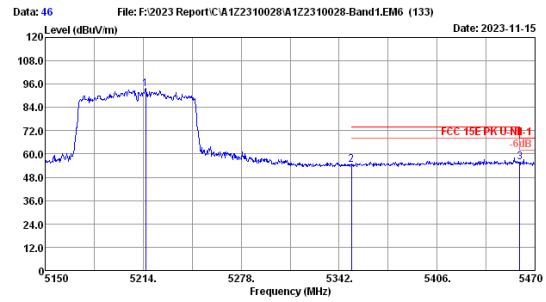

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5210MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5215.60	32.56	4.12	87.84	30.98	93.54	-----	-----	Peak
2	5350.00	33.30	4.18	47.78	30.97	54.29	74.00	19.71	Peak
3	5460.00	34.02	4.22	48.56	30.95	55.85	68.20	12.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

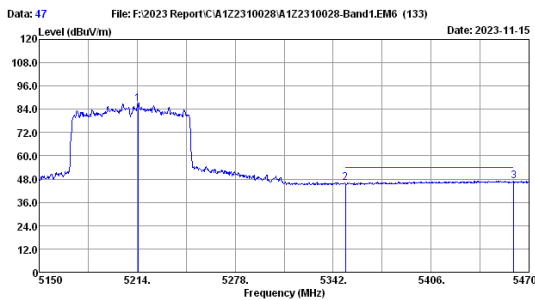

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5210MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5214.64	32.56	4.12	81.25	30.98	86.95	-----	-----	Average
2	5350.00	33.30	4.18	39.48	30.97	45.99	54.00	8.01	Average
3	5460.00	34.02	4.22	39.56	30.95	46.85	54.00	7.15	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

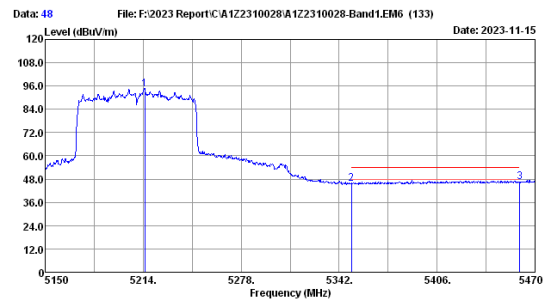


Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 23.2°C/50.1% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5210MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5214.96	32.56	4.12	88.73	30.98	94.43	-----	-----	Average
2	5350.00	33.30	4.18	39.28	30.97	45.79	54.00	8.21	Average
3	5460.00	34.02	4.22	39.26	30.95	46.55	54.00	7.45	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

U-NII-3 Band:

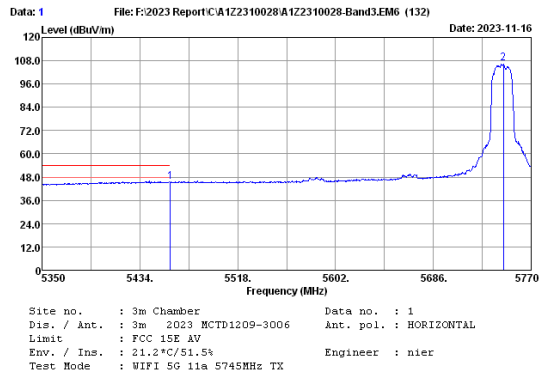


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	38.38	30.95	45.67	54.00	8.33	Average
2	5746.06	33.58	4.34	99.75	30.93	106.74	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

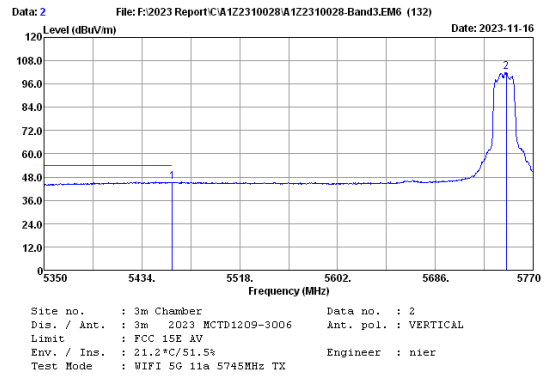


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	38.18	30.95	45.47	54.00	8.53	Average
2	5746.90	33.59	4.34	95.40	30.93	102.40	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

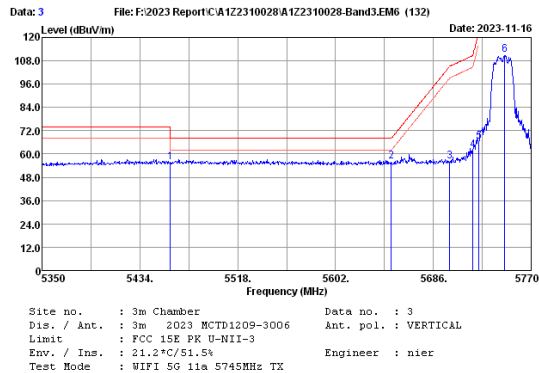


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	48.57	30.95	55.86	68.20	12.34	Peak
2	5650.00	33.20	4.30	49.52	30.93	56.09	68.20	12.11	Peak
3	5700.00	33.40	4.32	49.37	30.93	56.16	105.20	49.04	Peak
4	5720.00	33.48	4.33	55.26	30.93	62.14	110.80	48.66	Peak
5	5725.00	33.50	4.33	59.35	30.93	66.25	122.80	56.55	Peak
6	5747.32	33.59	4.34	104.09	30.93	111.09	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

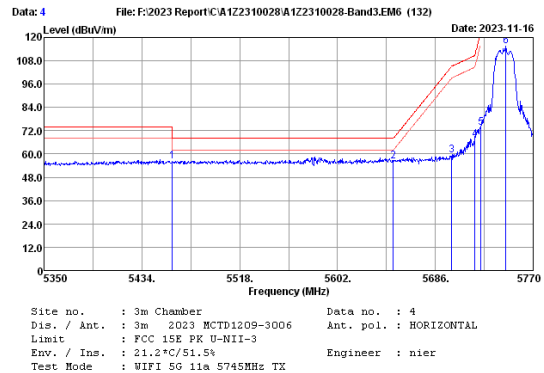

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.04	34.02	4.22	48.97	30.95	56.26	68.20	11.94	Peak
2	5650.00	33.20	4.30	49.86	30.93	56.49	68.20	11.77	Peak
3	5700.00	33.40	4.32	52.71	30.93	59.50	105.20	45.70	Peak
4	5720.00	33.48	4.33	60.53	30.93	67.41	110.80	43.39	Peak
5	5725.00	33.50	4.33	66.72	30.93	73.62	122.80	49.18	Peak
6	5746.48	33.59	4.34	108.66	30.93	115.66	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

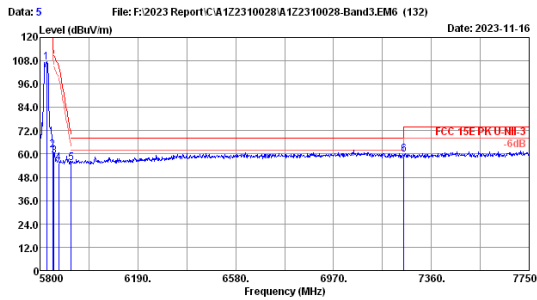

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5827.30	33.60	4.38	100.08	30.92	107.14	-----	-----	Peak
2	5850.00	33.60	4.39	54.75	30.91	61.83	122.20	60.37	Peak
3	5855.00	33.59	4.39	51.87	30.91	58.94	110.80	51.86	Peak
4	5875.00	33.55	4.40	48.36	30.91	55.40	105.20	49.80	Peak
5	5925.00	33.45	4.42	48.44	30.91	55.40	68.20	12.80	Peak
6	7250.00	36.70	4.81	49.85	31.67	59.69	68.20	8.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

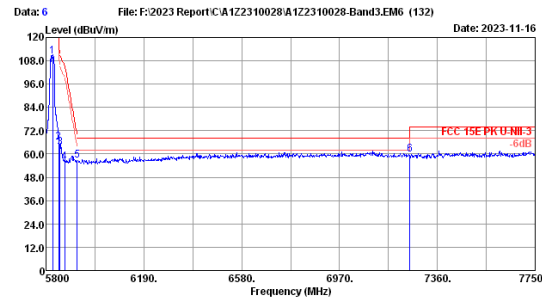

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5827.30	33.60	4.38	103.41	30.92	110.47	-----	-----	Peak
2	5850.00	33.60	4.39	59.05	30.91	66.13	122.20	56.07	Peak
3	5855.00	33.59	4.39	56.25	30.91	63.32	110.80	47.48	Peak
4	5875.00	33.55	4.40	48.69	30.91	55.73	105.20	49.47	Peak
5	5925.00	33.45	4.42	49.53	30.91	56.49	68.20	11.71	Peak
6	7250.00	36.70	4.81	49.77	31.67	59.61	68.20	8.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

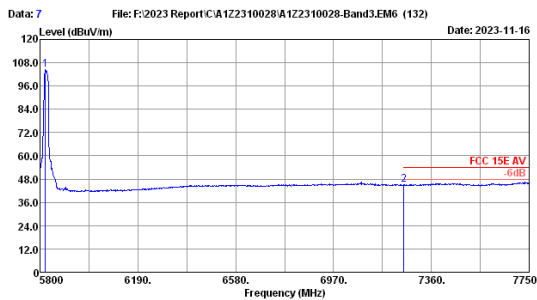

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.45	33.60	4.38	97.44	30.92	104.50	-----	-----	Average
2	7250.00	36.70	4.81	35.28	31.67	45.12	54.00	8.88	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

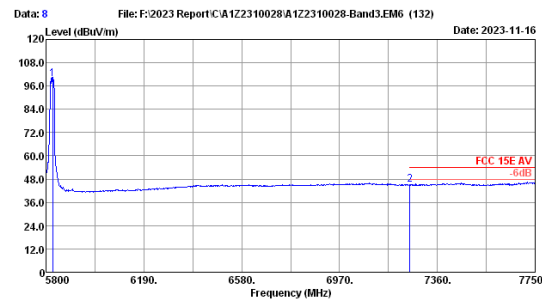

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5827.30	33.60	4.38	92.70	30.92	99.76	-----	-----	Average
2	7250.00	36.70	4.81	35.12	31.67	44.96	54.00	9.04	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

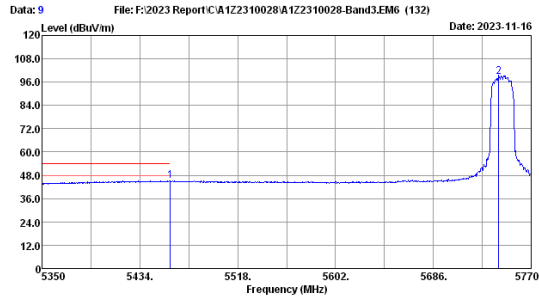

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	37.90	30.95	45.19	54.00	8.81	Average
2	5742.28	33.57	4.34	91.88	30.93	98.86	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

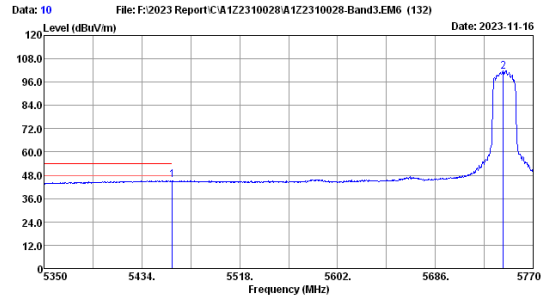

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	38.10	30.95	45.39	54.00	8.61	Average
2	5744.38	33.58	4.34	94.38	30.93	101.37	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

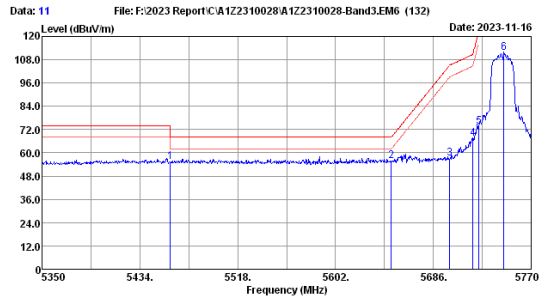

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	47.90	30.95	55.19	68.20	13.01	Peak
2	5650.00	33.20	4.30	49.36	30.93	55.93	68.20	12.27	Peak
3	5700.00	33.40	4.32	50.22	30.93	57.01	105.20	48.19	Peak
4	5720.00	33.48	4.33	60.38	30.93	67.26	110.80	43.54	Peak
5	5725.00	33.50	4.33	66.43	30.93	73.33	122.80	49.47	Peak
6	5746.48	33.59	4.34	104.45	30.93	111.45	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

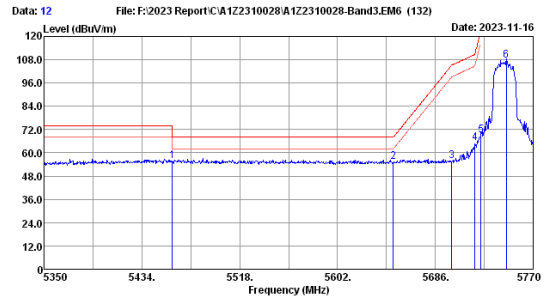

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	48.60	30.95	55.89	68.20	12.31	Peak
2	5650.00	33.20	4.30	48.94	30.93	55.51	68.20	12.69	Peak
3	5700.00	33.40	4.32	49.10	30.93	55.89	105.20	49.31	Peak
4	5720.00	33.48	4.33	58.10	30.93	64.98	110.80	45.82	Peak
5	5725.00	33.50	4.33	62.22	30.93	69.12	122.80	53.68	Peak
6	5746.90	33.59	4.34	100.80	30.93	107.80	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

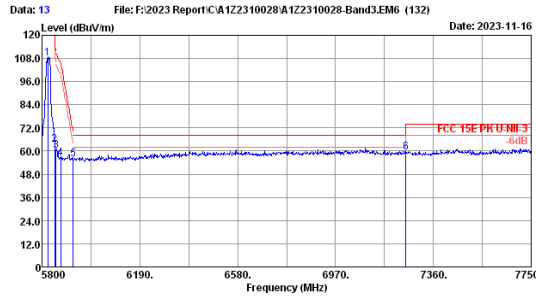

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.40	33.60	4.38	101.10	30.92	108.16	-----	-----	Peak
2	5850.00	33.60	4.39	56.33	30.91	63.41	122.20	58.79	Peak
3	5855.00	33.59	4.39	53.12	30.91	60.19	110.80	50.61	Peak
4	5875.00	33.55	4.40	49.19	30.91	56.23	105.20	48.97	Peak
5	5925.00	33.45	4.42	48.64	30.91	55.60	68.20	12.60	Peak
6	7250.00	36.70	4.81	49.57	31.67	59.41	68.20	8.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

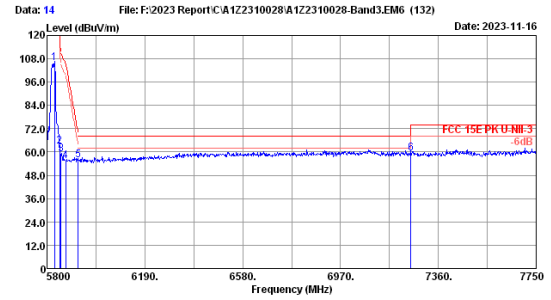

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5829.25	33.60	4.38	98.89	30.92	105.95	-----	-----	Peak
2	5850.00	33.60	4.39	55.75	30.91	62.83	122.20	59.37	Peak
3	5855.00	33.59	4.39	51.95	30.91	59.02	110.80	51.76	Peak
4	5875.00	33.55	4.40	48.51	30.91	55.55	105.20	49.65	Peak
5	5925.00	33.45	4.42	48.90	30.91	55.86	68.20	12.34	Peak
6	7250.00	36.70	4.81	49.46	31.67	59.30	68.20	8.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

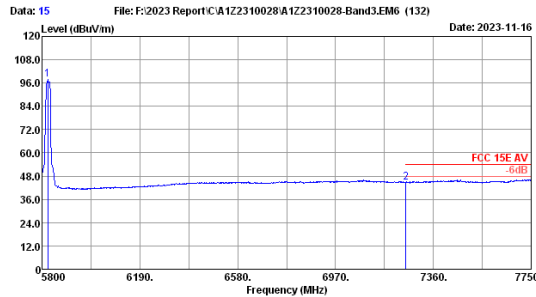

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.40	33.60	4.38	90.79	30.92	97.85	-----	-----	Average
2	7250.00	36.70	4.81	34.95	31.67	44.79	54.00	9.21	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

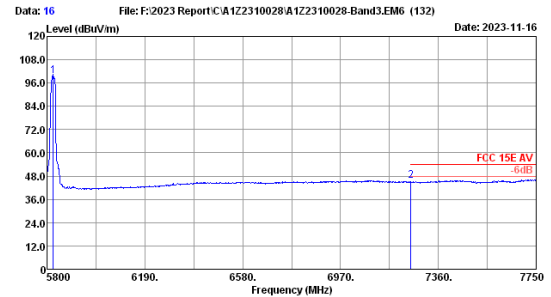

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.35	33.60	4.38	92.76	30.92	99.82	-----	-----	Average
2	7250.00	36.70	4.81	35.56	31.67	45.40	54.00	8.60	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

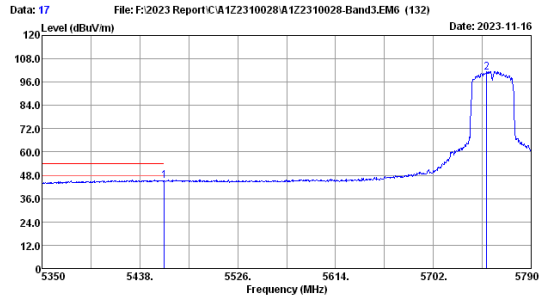

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	37.84	30.95	45.13	54.00	8.87	Average
2	5749.96	33.60	4.34	93.95	30.93	100.96	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

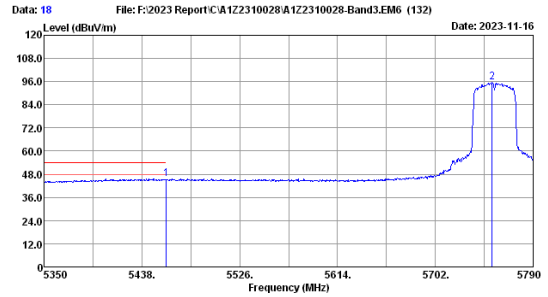

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	38.25	30.95	45.54	54.00	8.46	Average
2	5753.04	33.60	4.35	88.53	30.92	95.56	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

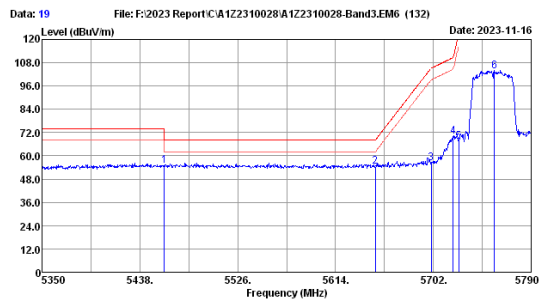

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	47.64	30.95	54.93	68.20	13.27	Peak
2	5650.00	33.20	4.30	47.94	30.93	54.51	68.20	13.69	Peak
3	5700.00	33.40	4.32	49.30	30.93	56.09	105.20	49.11	Peak
4	5720.00	33.48	4.33	62.89	30.93	69.77	110.80	41.03	Peak
5	5725.00	33.50	4.33	60.32	30.93	67.22	122.80	55.58	Peak
6	5757.00	33.60	4.35	96.60	30.92	103.63	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

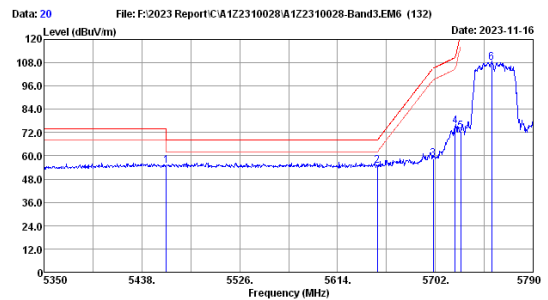

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	47.59	30.95	54.88	68.20	13.32	Peak
2	5650.00	33.20	4.30	48.51	30.93	55.08	68.20	13.12	Peak
3	5700.00	33.40	4.32	51.70	30.93	58.49	105.20	46.71	Peak
4	5720.00	33.48	4.33	68.51	30.93	75.39	110.80	35.41	Peak
5	5725.00	33.50	4.33	65.76	30.93	72.66	122.80	50.14	Peak
6	5752.60	33.60	4.35	101.06	30.92	108.09	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

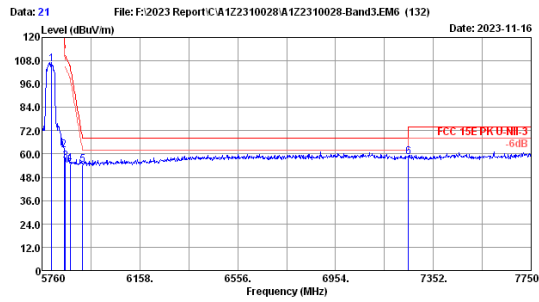

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5799.80	33.60	4.37	99.28	30.92	105.33	-----	-----	Peak
2	5850.00	33.60	4.39	55.09	30.91	62.17	122.20	60.03	Peak
3	5855.00	33.59	4.39	49.28	30.91	56.35	110.80	54.45	Peak
4	5875.00	33.55	4.40	47.98	30.91	55.02	105.20	50.18	Peak
5	5925.00	33.45	4.42	47.72	30.91	54.68	68.20	13.52	Peak
6	7250.00	36.70	4.81	48.39	31.67	58.23	68.20	9.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

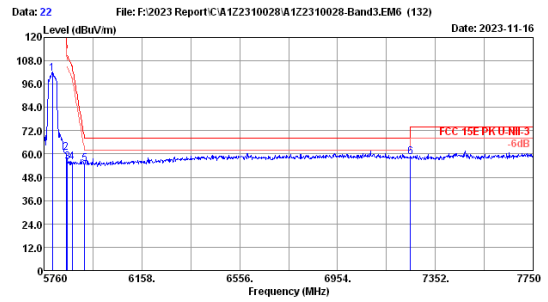

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5799.83	33.60	4.36	94.39	30.92	101.43	-----	-----	Peak
2	5850.00	33.60	4.39	53.46	30.91	60.54	122.20	61.66	Peak
3	5855.00	33.59	4.39	48.52	30.91	55.59	110.80	55.21	Peak
4	5875.00	33.55	4.40	48.60	30.91	55.64	105.20	49.56	Peak
5	5925.00	33.45	4.42	47.76	30.91	54.72	68.20	13.48	Peak
6	7250.00	36.70	4.81	48.54	31.67	58.38	68.20	9.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

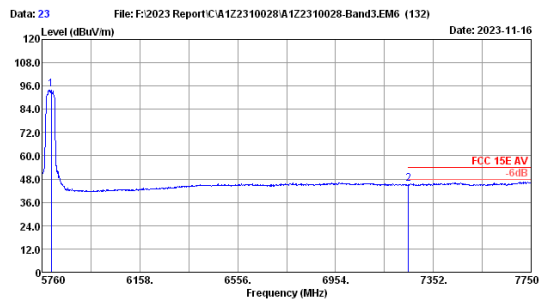

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5797.81	33.60	4.37	87.26	30.92	94.31	-----	-----	Average
2	7250.00	36.70	4.81	35.76	31.67	45.60	54.00	8.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

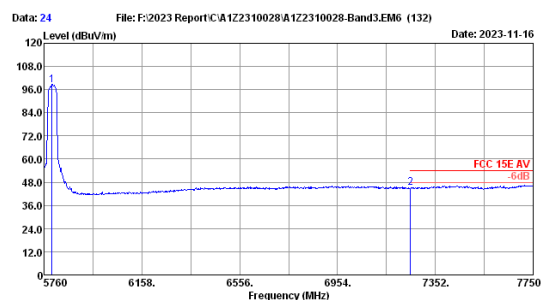

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11n40 5795MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5791.84	33.60	4.36	91.22	30.92	98.26	-----	-----	Average
2	7250.00	36.70	4.81	35.24	31.67	45.08	54.00	8.92	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

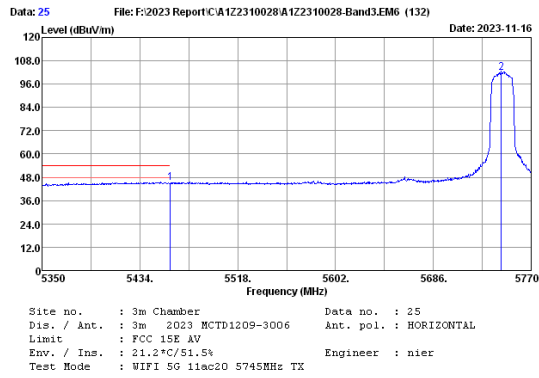


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	37.86	30.95	45.15	54.00	8.85	Average
2	5744.38	33.58	4.34	94.90	30.93	101.89	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

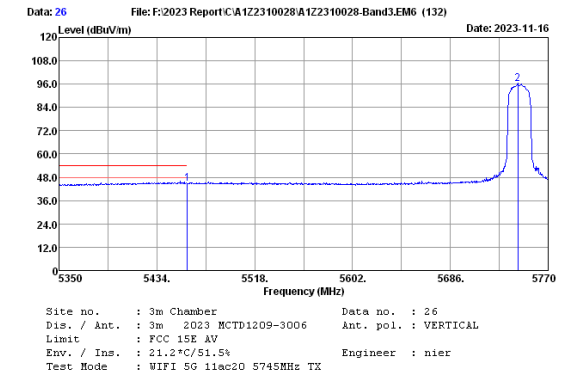


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	37.45	30.95	44.74	54.00	9.26	Average
2	5743.96	33.58	4.34	88.88	30.93	95.87	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

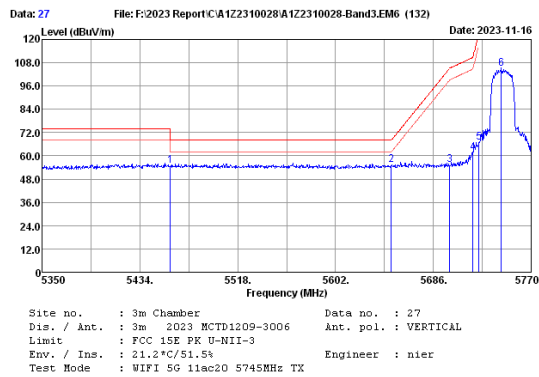


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	47.41	30.95	54.70	68.20	13.50	Peak
2	5650.00	33.20	4.30	48.74	30.93	55.31	68.20	12.89	Peak
3	5700.00	33.40	4.32	48.62	30.93	55.41	105.20	49.79	Peak
4	5720.00	33.48	4.33	54.68	30.93	61.56	110.80	49.24	Peak
5	5725.00	33.50	4.33	60.11	30.93	67.01	122.80	55.79	Peak
6	5743.38	33.58	4.34	97.82	30.93	104.81	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

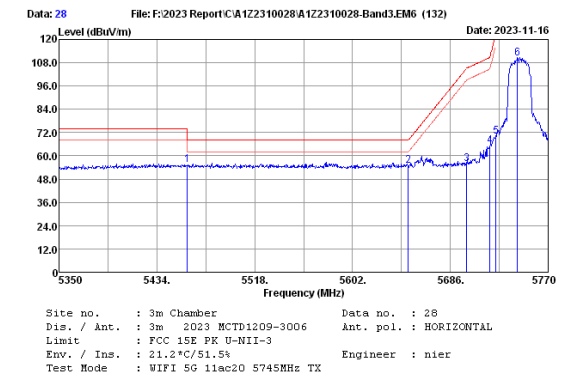

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	48.07	30.95	55.36	68.20	12.84	Peak
2	5650.00	33.20	4.30	48.25	30.93	54.82	68.20	13.38	Peak
3	5700.00	33.40	4.32	48.86	30.93	55.65	105.20	49.55	Peak
4	5720.00	33.48	4.33	58.26	30.93	65.14	110.80	45.66	Peak
5	5725.00	33.50	4.33	63.09	30.93	69.99	122.80	52.81	Peak
6	5743.54	33.57	4.34	103.09	30.93	110.07	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

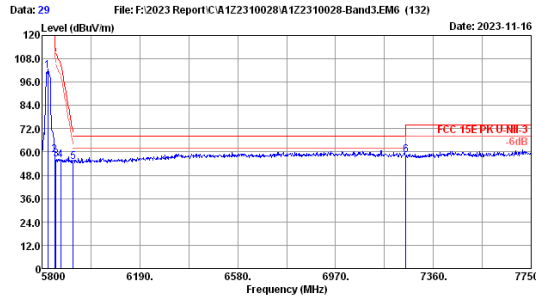

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.40	33.60	4.38	94.80	30.92	101.86	-----	-----	Peak
2	5850.00	33.60	4.39	51.34	30.91	58.42	122.20	63.78	Peak
3	5855.00	33.59	4.39	49.22	30.91	56.29	110.80	54.51	Peak
4	5875.00	33.55	4.40	48.63	30.91	55.67	105.20	49.53	Peak
5	5925.00	33.45	4.42	47.91	30.91	54.87	68.20	13.33	Peak
6	7250.00	36.70	4.81	48.80	31.67	58.64	68.20	9.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

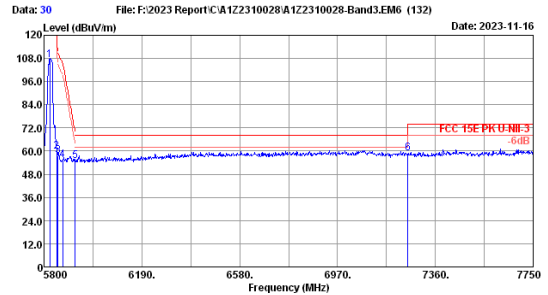

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.40	33.60	4.38	100.19	30.92	107.25	-----	-----	Peak
2	5850.00	33.60	4.39	52.74	30.91	59.82	122.20	62.38	Peak
3	5855.00	33.59	4.39	50.54	30.91	57.61	110.80	53.19	Peak
4	5875.00	33.55	4.40	48.32	30.91	55.36	105.20	49.84	Peak
5	5925.00	33.45	4.42	47.95	30.91	54.91	68.20	13.29	Peak
6	7250.00	36.70	4.81	49.03	31.67	58.87	68.20	9.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

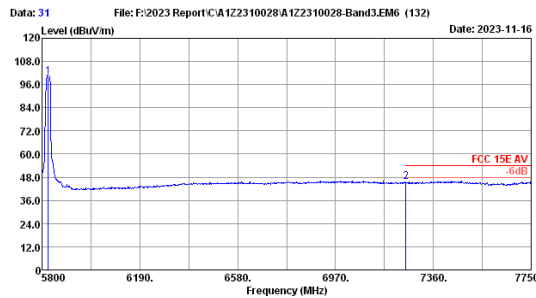

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.35	33.60	4.38	93.13	30.92	100.19	-----	-----	Average
2	7250.00	36.70	4.81	35.71	31.67	45.55	54.00	8.45	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

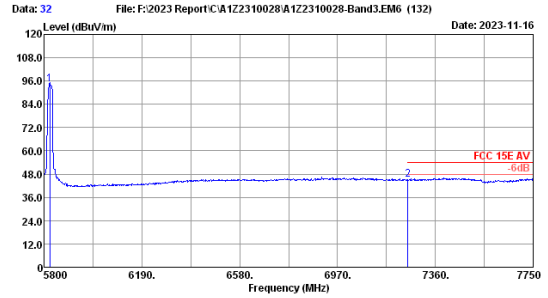

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac20 5825MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.40	33.60	4.38	87.44	30.92	94.50	-----	-----	Average
2	7250.00	36.70	4.81	35.40	31.67	45.24	54.00	8.76	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

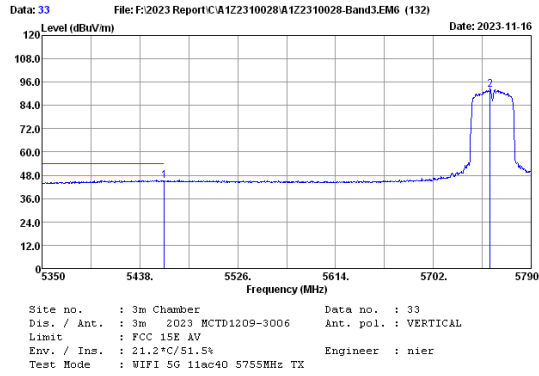


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	38.01	30.95	45.30	54.00	8.70	Average
2	5753.04	33.60	4.35	85.12	30.92	92.15	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

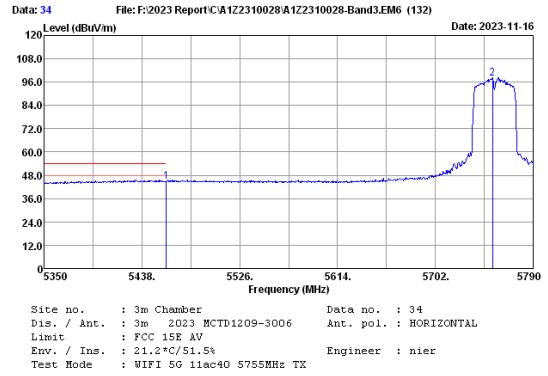


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	37.56	30.95	44.85	54.00	9.15	Average
2	5753.48	33.60	4.35	90.67	30.92	97.70	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

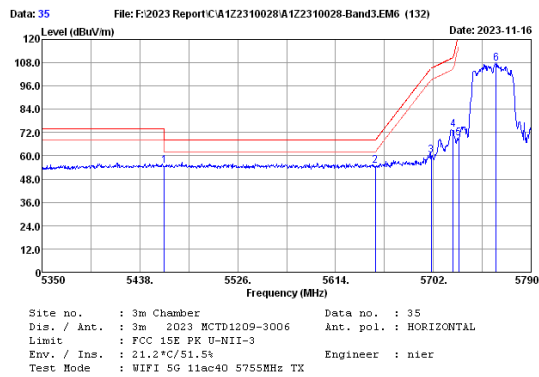


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	47.75	30.95	55.04	68.20	13.16	Peak
2	5650.00	33.20	4.30	48.36	30.93	54.93	68.20	13.27	Peak
3	5700.00	33.40	4.32	53.32	30.93	60.11	105.20	45.09	Peak
4	5720.00	33.48	4.33	66.46	30.93	73.34	110.80	37.46	Peak
5	5725.00	33.50	4.33	62.27	30.93	69.17	122.80	53.63	Peak
6	5758.32	33.60	4.35	100.36	30.92	107.39	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

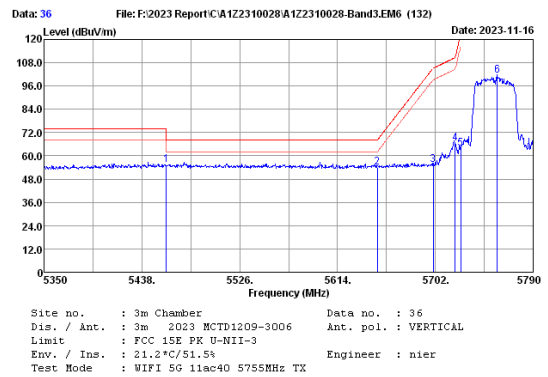

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	47.94	30.95	55.23	68.20	12.97	Peak
2	5650.00	33.20	4.30	47.60	30.93	54.17	68.20	14.03	Peak
3	5700.00	33.40	4.32	48.72	30.93	55.51	105.20	49.69	Peak
4	5720.00	33.48	4.33	59.36	30.93	66.24	110.80	44.56	Peak
5	5725.00	33.50	4.33	56.65	30.93	63.55	122.80	59.25	Peak
6	5757.88	33.60	4.35	94.16	30.92	101.19	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

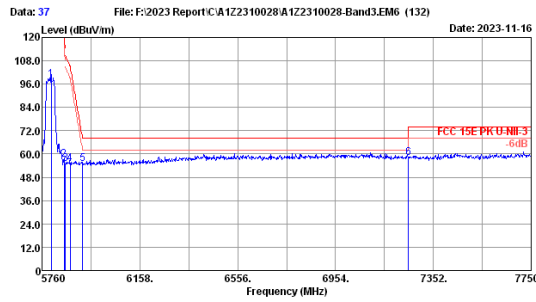

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5797.81	33.60	4.37	91.31	30.92	96.36	122.20	65.05	Peak
2	5850.00	33.60	4.39	50.07	30.91	57.15	110.80	55.83	Peak
3	5855.00	33.59	4.39	47.90	30.91	54.97	105.20	50.50	Peak
4	5875.00	33.55	4.40	47.66	30.91	54.70	68.20	13.09	Peak
5	5925.00	33.45	4.42	48.15	30.91	55.11	68.20	10.01	Peak
6	7250.00	36.70	4.81	48.35	31.67	58.19			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

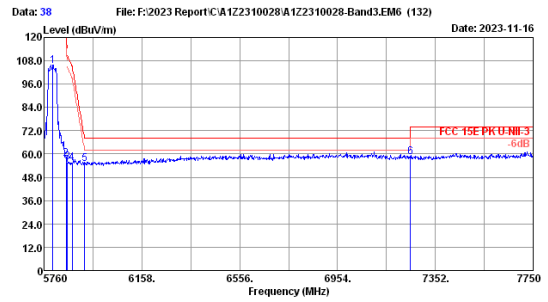

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.82	33.60	4.36	98.30	30.92	105.34	122.20	64.56	Peak
2	5850.00	33.60	4.39	50.56	30.91	57.64	110.80	55.14	Peak
3	5855.00	33.59	4.39	48.59	30.91	55.66	105.20	49.76	Peak
4	5875.00	33.55	4.40	48.40	30.91	55.44	68.20	13.24	Peak
5	5925.00	33.45	4.42	48.00	30.91	54.96	68.20	9.66	Peak
6	7250.00	36.70	4.81	48.70	31.67	58.54			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

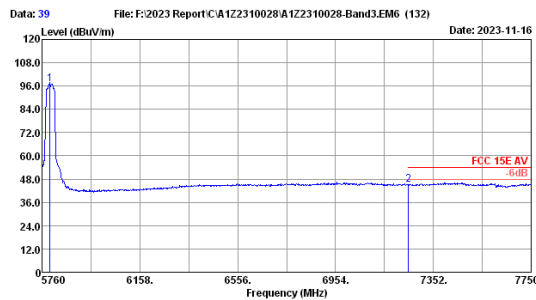

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5791.84	33.60	4.36	90.04	30.92	97.08	122.20	65.05	Average
2	7250.00	36.70	4.81	35.42	31.67	45.26	54.00	8.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

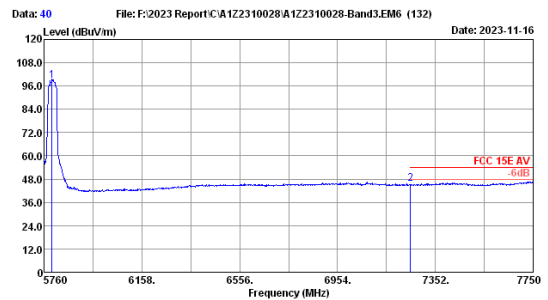

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5791.84	33.60	4.36	91.78	30.92	98.82	122.20	64.56	Average
2	7250.00	36.70	4.81	35.60	31.67	45.44	54.00	8.56	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

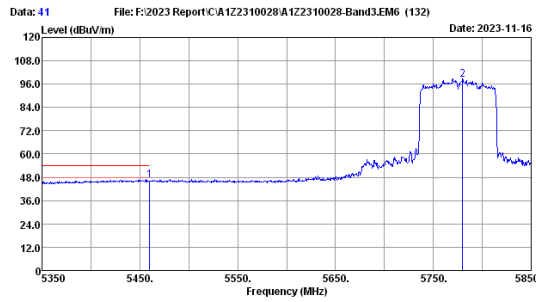

Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5775MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	39.22	30.95	46.51	54.00	7.49	Average
2	5780.00	33.60	4.36	91.23	30.92	98.27	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

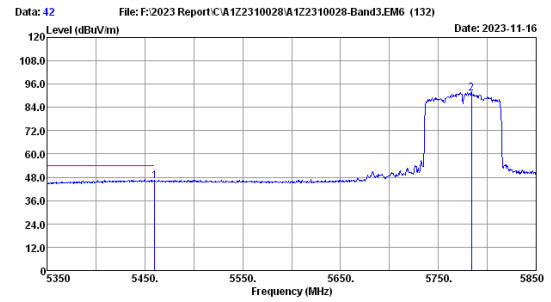

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5775MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	38.67	30.95	45.96	54.00	8.04	Average
2	5784.00	33.60	4.36	84.26	30.92	91.30	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

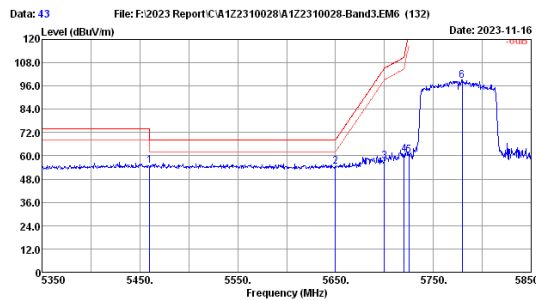

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5775MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	47.71	30.95	55.00	68.20	13.20	Peak
2	5650.00	33.20	4.30	48.09	30.93	54.66	68.20	13.54	Peak
3	5700.00	33.40	4.32	50.54	30.93	57.33	105.20	47.87	Peak
4	5720.00	33.48	4.33	53.58	30.93	60.46	110.80	50.34	Peak
5	5725.00	33.50	4.33	53.33	30.93	60.23	122.80	62.57	Peak
6	5778.50	33.60	4.36	91.69	30.92	98.73	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

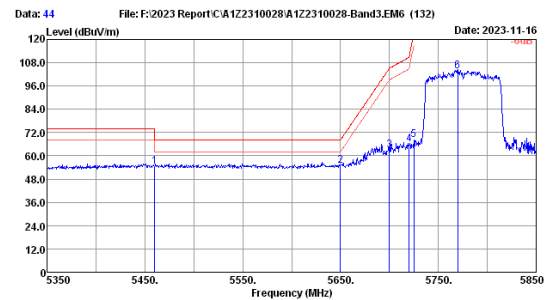

Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11ac80 5775MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	4.22	47.22	30.95	54.51	68.20	13.69	Peak
2	5650.00	33.20	4.30	48.35	30.93	54.92	68.20	13.28	Peak
3	5700.00	33.40	4.32	56.15	30.93	62.94	105.20	42.26	Peak
4	5720.00	33.48	4.33	59.07	30.93	65.95	110.80	44.85	Peak
5	5725.00	33.50	4.33	61.33	30.93	68.23	122.80	54.57	Peak
6	5770.00	33.60	4.35	96.68	30.92	103.71	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

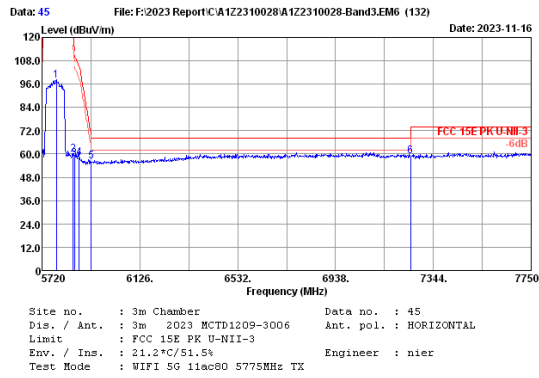


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5778.87	33.60	4.36	90.83	30.92	97.87	122.20	24.33	Peak
2	5850.00	33.60	4.39	52.66	30.91	59.74	110.80	51.06	Peak
3	5855.00	33.59	4.39	50.66	30.91	57.73	110.80	53.07	Peak
4	5875.00	33.55	4.40	50.75	30.91	57.79	105.20	47.41	Peak
5	5925.00	33.45	4.42	49.07	30.91	56.03	68.20	12.17	Peak
6	7250.00	36.70	4.81	48.86	31.67	58.70	68.20	9.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

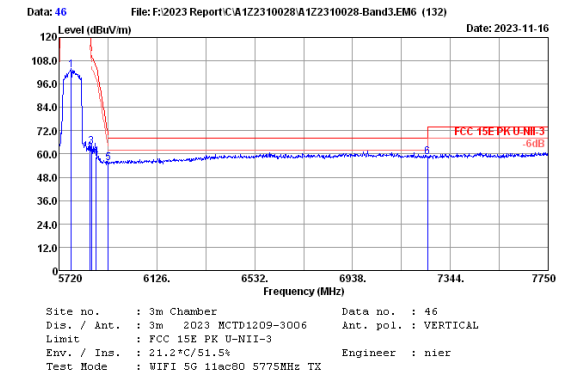


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5778.75	33.60	4.35	96.20	30.92	103.23	122.20	19.03	Peak
2	5850.00	33.60	4.39	53.10	30.91	60.18	110.80	50.62	Peak
3	5855.00	33.59	4.39	56.52	30.91	63.59	110.80	47.21	Peak
4	5875.00	33.55	4.40	51.62	30.91	58.66	105.20	46.54	Peak
5	5925.00	33.45	4.42	48.60	30.91	55.56	68.20	12.64	Peak
6	7250.00	36.70	4.81	48.48	31.67	58.32	68.20	9.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

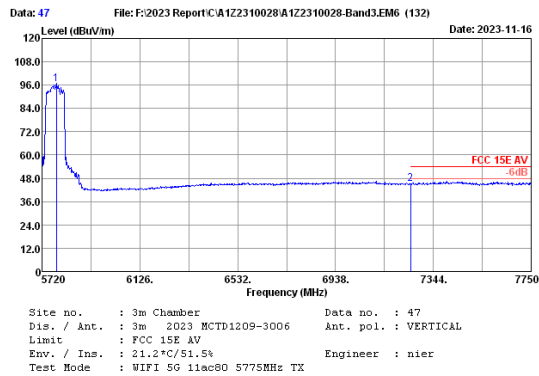

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5778.87	33.60	4.36	89.30	30.92	96.34	54.00	42.34	Average
2	7250.00	36.70	4.81	35.53	31.67	45.37	54.00	8.63	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

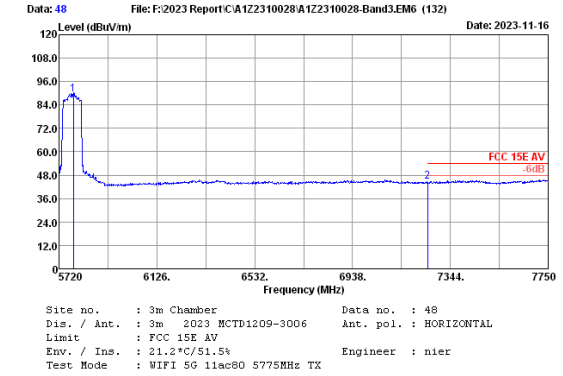

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5778.87	33.60	4.36	82.50	30.92	89.54	54.00	35.54	Average
2	7250.00	36.70	4.81	34.96	31.67	44.80	54.00	9.20	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

6. 6dB & 26dB & 99% Occupied Bandwidth Test

6.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.01,23	1 Year
2.	Attenuator	Agilent	8491B	MY39269201	Apr.02,23	1 Year
3.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	505238/6	Apr.02,23	1 Year

6.2. Limit

6dB Bandwidth should be not less than 500kHz

6.3. Test Procedure

26dB Bandwidth:

Use the test method described in ANSI C63.10 clause 12.4.1:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6dB Bandwidth:

Use the test method described in 789033 D02 v02r01:

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) ≥ 3 RBW.
- Detector = Peak.
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied bandwidth:

Use the test method described in ANSI C63.10 Section 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.4. Test Results

**U-NII-1 Band:
26dB bandwidth**

EUT: Wi-Fi Module		
M/N: U9W44		
Test date: 2023-11-17~23	Pressure: 103.4±1.0 kpa	Humidity: 51.4±3.0%
Tested by: lili	Test site: RF site	Temperature: 22.4±0.6 °C

Test Mode	Frequency (MHz)	26dB Bandwidth(MHz)		Limit (MHz)
		ANTA	ANTB	
11a	5180	20.10	20.02	N/A
	5200	20.53	20.42	
	5240	20.76	20.08	
11n HT20	5180	20.19	20.23	N/A
	5200	20.40	20.54	
	5240	20.32	20.35	
11n HT40	5190	40.34	39.82	N/A
	5230	44.43	40.96	
11ac VHT20	5180	20.31	20.07	N/A
	5200	20.33	20.92	
	5240	20.65	20.33	
11ac VHT40	5190	40.50	40.19	N/A
	5230	41.88	40.59	
11ac VHT80	5210	80.79	80.46	N/A
Conclusion: PASS				

99% Occupied bandwidth:

Test Mode	Frequency (MHz)	99% Bandwidth(MHz)		Limit (MHz)
		ANTA	ANTB	
11a	5180	16.552	16.471	N/A
	5200	16.567	16.550	
	5240	16.672	16.554	
11n HT20	5180	17.589	17.583	N/A
	5200	17.631	17.674	
	5240	17.672	17.639	
11n HT40	5190	36.140	35.988	N/A
	5230	36.169	36.190	
11ac VHT20	5180	17.572	17.584	N/A
	5200	17.631	17.656	
	5240	17.688	17.632	
11ac VHT40	5190	36.001	35.999	N/A
	5230	36.146	36.048	
11ac VHT80	5210	75.410	75.217	N/A
Conclusion: PASS				

U-NII-3 Band:

EUT: Wi-Fi Module		
M/N: U9W44		
Test date: 2023-11-17	Pressure: 103.4±1.0 kpa	Humidity: 51.4±3.0%
Tested by: lili	Test site: RF site	Temperature: 22.4±0.6 °C

6dB bandwidth

Test Mode	CH	6dB Bandwidth (MHz)		Limit (KHz)
		ANTA	ANTB	
11a	5745	15.15	15.11	≥ 500
	5785	15.16	15.14	
	5825	15.17	15.14	
11n20	5745	14.77	15.09	≥ 500
	5785	15.08	16.30	
	5825	15.16	15.72	
11n40	5755	35.13	33.87	≥ 500
	5795	35.19	35.15	
11ac20	5745	15.15	15.10	≥ 500
	5785	15.16	15.14	
	5825	15.15	15.10	
11ac40	5755	35.16	35.19	≥ 500
	5795	35.17	35.21	
11ac80	5775	75.27	75.27	≥ 500
Conclusion: PASS				

26dB bandwidth

Test Mode	Frequency (MHz)	26dB Bandwidth(MHz)		Limit (KHz)
		ANTA	ANTB	
11a	5745	19.96	19.70	N/A
	5785	19.80	19.79	
	5825	20.17	19.92	
11n HT20	5745	20.53	20.09	N/A
	5785	20.21	20.03	
	5825	20.11	20.01	
11n HT40	5755	41.10	40.31	N/A
	5795	40.83	39.82	
11ac VHT20	5745	20.07	19.97	N/A
	5785	20.21	19.93	
	5825	20.61	20.23	
11ac VHT40	5755	40.92	39.85	N/A
	5795	40.64	40.55	
11ac VHT80	5775	80.19	80.26	N/A
Conclusion: PASS				

99% Occupied bandwidth:

Test Mode	Frequency (MHz)	99% Bandwidth(MHz)		Limit (MHz)
		ANTA	ANTB	
11a	5745	16.485	16.445	N/A
	5785	16.499	16.454	
	5825	16.570	16.461	
11n HT20	5745	17.620	17.602	N/A
	5785	17.596	17.607	
	5825	17.602	17.580	
11n HT40	5755	36.075	36.146	N/A
	5795	36.102	36.037	
11ac VHT20	5745	17.590	17.592	N/A
	5785	17.574	17.617	
	5825	17.616	17.609	
11ac VHT40	5755	36.093	36.038	N/A
	5795	36.172	36.064	
11ac VHT80	5775	75.467	75.262	N/A
Conclusion: PASS				