

## TEST REPORT

*For*

**Bluetooth Earphones**

**MODEL No.: ERSTE-BTEARBUDS**

**FCC ID: 2AU6S-STEBT**

**IC: 25701-STEBT**

**Trade Mark:Saf-T-Ear®**

**REPORT NO:ES191115004W**

**ISSUE DATE: December 19, 2019**

*Prepared for*

**LUCID AUDIO**

**14301 FAA BLVD, FT WORTH, TX 76155, USA**

*Prepared by*

**EMTEK(SHENZHEN) CO., LTD.**

**Bldg 69, Majialong Industry Zone, NanshanDistrict, Shenzhen,  
Guangdong, China  
TEL: 86-755-26954280  
FAX: 86-755-26954282**

## Table of Contents

1	TEST RESULT CERTIFICATION .....	3
2	GENERAL INFORMATION .....	4
2.1	EUT TECHNICAL DESCRIPTION.....	4
3	SUMMARY OF TEST RESULT.....	5
4	TEST METHODOLOGY .....	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
4.2	MEASUREMENT EQUIPMENT USED .....	6
4.3	DESCRIPTION OF TEST MODES .....	7
5	FACILITIES AND ACCREDITATIONS .....	8
5.1	FACILITIES .....	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS .....	8
5.3	TEST SOFTWARE .....	8
6	TEST SYSTEM UNCERTAINTY .....	9
7	SETUP OF EQUIPMENT UNDER TEST.....	10
7.1	RADIO FREQUENCY TEST SETUP 1 .....	10
7.2	RADIO FREQUENCY TEST SETUP 2 .....	10
7.3	CONDUCTED EMISSION TEST SETUP .....	11
7.4	SUPPORT EQUIPMENT .....	12
8	FREQUENCY HOPPING SYSTEM REQUIREMENTS .....	13
8.1	STANDARD APPLICABLE .....	13
8.2	EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	13
8.3	EQUAL HOPPING FREQUENCY USE .....	14
8.4	FREQUENCY HOPPING SYSTEM.....	14
9	TEST REQUIREMENTS.....	15
9.1	20DB BANDWIDTH .....	15
9.2	CARRIER FREQUENCY SEPARATION.....	21
9.3	NUMBER OF HOPPING FREQUENCIES .....	27
9.4	AVERAGE TIME OF OCCUPANCY (DWELL TIME).....	29
9.5	MAXIMUM PEAK CONDUCTED OUTPUT POWER .....	32
9.6	CONDUCTED SPURIOUS EMISSION .....	38
9.7	RADIATED SPURIOUS EMISSION.....	45
9.8	CONDUCTED EMISSION TEST.....	58
9.9	ANTENNA APPLICATION.....	59

## 1 TEST RESULT CERTIFICATION

Applicant:	LUCID AUDIO 14301 FAA BLVD, FT WORTH, TX 76155, USA
Manufacture:	NINGBO HONGSHUO ELECTRONICS & APPLIANCE CO., LTD Zhangqi Industry Zone, Cixi Ningbo, Zhejiang, China
Product Description:	Bluetooth Earphones
Model Number:	ERSTE-BTEARBUDS
Trade Mark:	Saf-T-Ear®
File Number:	ES191115004W
Date of Test:	November 15 to December 11, 2019

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 2018, Subpart J FCC 47 CFR Part 15 2018, Subpart C IC RSS-GEN, Issue 5, March 2019 IC RSS-247 Issue 2, February 2017.	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 2018 & IC RSS-GEN, Issue 5 March 2019 and Part 15.247 2018 & IC RSS-247 Issue 2, February 2017.

The test results of this report relate only to the tested sample identified in this report.

Date of Test :

November 15 to December 11, 2019

*Abel Wu*

Prepared by:

*Abel Wu* /Editor

*Joe Xia*

Reviewer:

*Joe Xia* /Supervisor



Approve & Authorized Signer :

*Lisa Wang* /Manager

## 2 GENERAL INFORMATION

### 2.1 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>Product Name</b>	Bluetooth Earphones
<b>Model number</b>	ERSTE-BTEARBUDS
<b>Device Type</b>	Adaptive Frequency Hopping (non-LBT based) (Bluetooth V4.0 Signal mode)
<b>Data Rate</b>	1 Mbps for GFSK modulation 2 Mbps for pi/4-DQPSK modulation 3 Mbps for 8DPSK modulation
<b>Modulation</b>	GFSK modulation (1Mbps) pi/4-DQPSK modulation (2Mbps) 8DPSK modulation (3Mbps)
<b>Operating Frequency Range</b>	2402-2480MHz
<b>Number of Channels</b>	79 channels
<b>Max Transmit Power</b>	3.64 dBm
<b>Antenna Type</b>	PCB Antenna
<b>Gain</b>	2dBi
<b>Power supply</b>	DC 3.7V
<b>Temperature Range</b>	-40°C ~ +85°C
<b>Product SW/HW version</b>	V1.0
<b>Radio SW/HW version</b>	V1.0
<b>Test SW Version</b>	V2.5.8

**Note:** for more details, please refer to the User's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
FCC Part 15.247(a)(1) RSS-247 Clause 5.1(a)	20dB Bandwidth	PASS	
RSS-Gen 6.7	99% Occupied Bandwidth	PASS	
FCC Part 15.247(a)(1) RSS-247 Clause 5.1(b)	Carrier Frequency Separation	PASS	
FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)	Number of Hopping Frequencies	PASS	
FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)	Average Time of Occupancy (Dwell Time)	PASS	
FCC Part 15.247(b)(1) RSS-247 Clause 5.4(b)	Maximum Peak Conducted Output Power	PASS	
FCC Part 15.247(d) RSS-247 Clause 5.5	Conducted Spurious Emissions	PASS	
FCC Part 15.247(d) & FCC Part 15.205 RSS-Gen Clause 8.9 8.10	Radiated Spurious Emissions	PASS	
FCC Part 15.207(a) RSS-Gen Clause 8.8	Conducted Emission	PASS	
FCC Part 15.247(b)(4) and Part 15.203 RSS-Gen Clause 6.8	Antenna Application	PASS	
NOTE1:N/A (Not Applicable)			

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AU6S-STEBT filing to comply with Section 15.247 of the FCC Part 15, Subpart C.

This submittal(s) (test report) is intended for IC: 25701-STEBT filing to comply with RSS 247 Clause 5 of the IC.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

IC RSS-GEN, Issue 5, March 2019

IC RSS-247 Issue 2, February 2017

FCC KDB 558074 D01 15.247 Meas Guidance V05r02

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/18/2019	May 17, 2020
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/18/2019	May 17, 2020
50Ω Coaxial Switch	Anritsu	MP59B	M20531	05/18/2019	May 17, 2020

#### 4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 19, 2019	May 18, 2020
Pre-Amplifier	HP	8447F	2944A07999	May 18, 2019	May 17, 2020
Bilog Antenna	Schwarzbeck	VULB9163	142	May 18, 2019	May 17, 2020
Loop Antenna	ARA	PLA-1030/B	1029	May 18, 2019	May 17, 2020
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 19, 2019	May 18, 2020
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 18, 2019	May 17, 2020
Cable	Schwarzbeck	AK9513	ACRX1	May 19, 2019	May 18, 2020
Cable	Rosenberger	N/A	FP2RX2	May 19, 2019	May 18, 2020
Cable	Schwarzbeck	AK9513	CRPX1	May 19, 2019	May 18, 2020
Cable	Schwarzbeck	AK9513	CRRX2	May 19, 2019	May 18, 2020

#### 4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 19, 2019	May 18, 2020

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for Bluetooth GFSK modulation; 2Mbps for Bluetooth pi/4-DQPSK modulation; 3Mbps for Bluetooth 8DPSK modulation) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth V4.0

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	...	...
1	2403	40	2442	76	2478
2	2404	41	2443	77	2479
...	...	...	...	78	2480

Note:  $fc = 2402\text{MHz} + (k-1) \times 1\text{MHz}$  k=1 to 79

Test Frequency and channel for Bluetooth V4.0

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

Note: The test software is CSR BlueSuite 2.5.8, gain of external amplifier is set 255 and internal amplifier is set 25.

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

#### Site Description

EMC Lab. : Accredited by CNAS, 2018.11.30

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with  
CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2016.5.19

The Laboratory has been assessed according to the requirements  
ISO/IEC 17025.

Accredited by FCC, August 06, 2018

The certificate is valid until August 07, 2020

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA, August 08, 2018

The certificate is valid until August 31, 2020

The Certificate Number is 4321.01.

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0008.

Name of Firm : EMTEK (SHENZHEN) CO., LTD.

Site Location : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China

### 5.3 TEST SOFTWARE

Item Software

Conducted Emission : EMTEK(Ver.CON-03A1)-Shenzhen

Radiated Emission : EMTEK(Ver.RA-03A1)-Shenzhen

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	$\pm 0.5 \text{ }^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

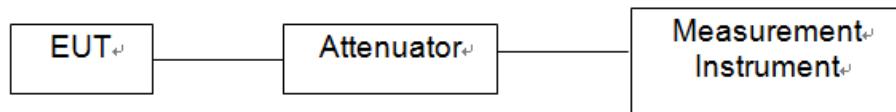

### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

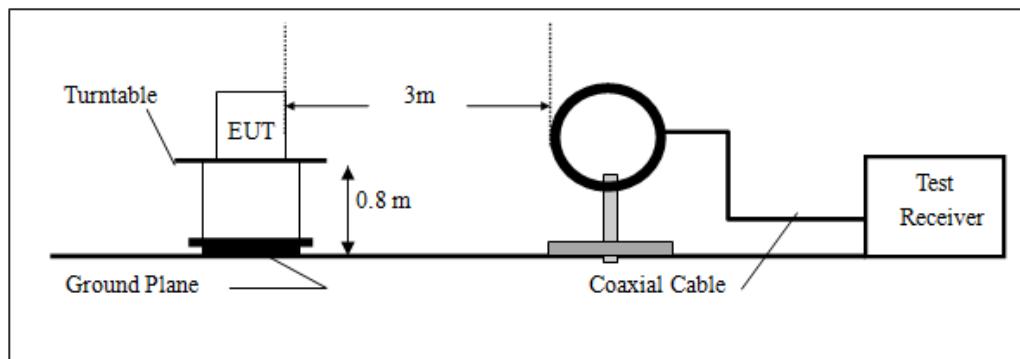

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

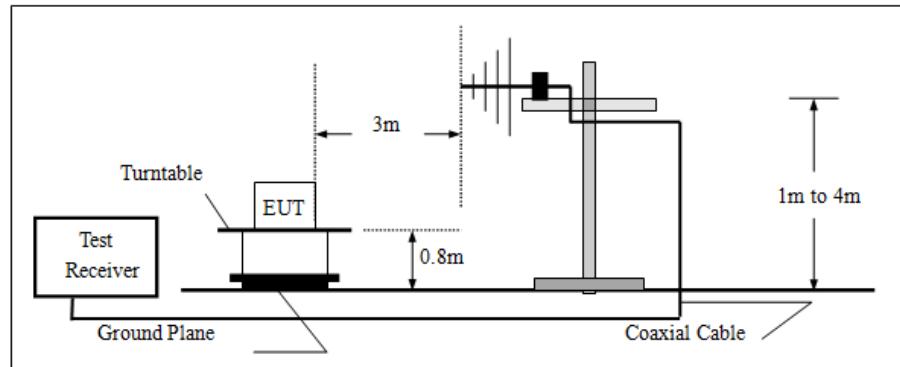

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

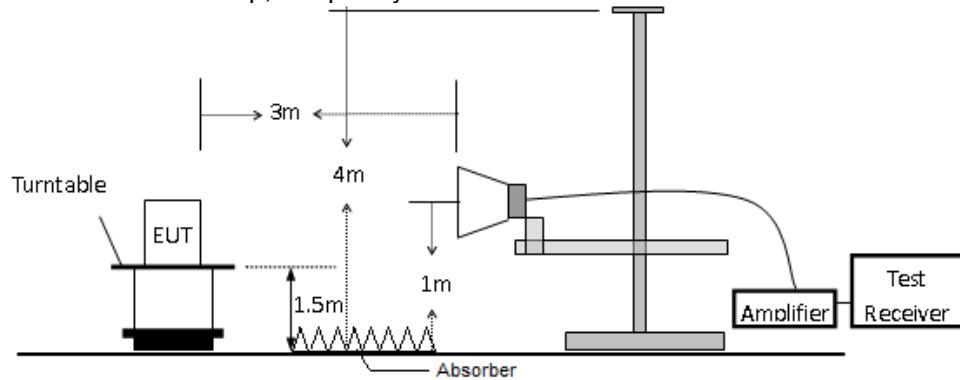


### 7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Game fitness board) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

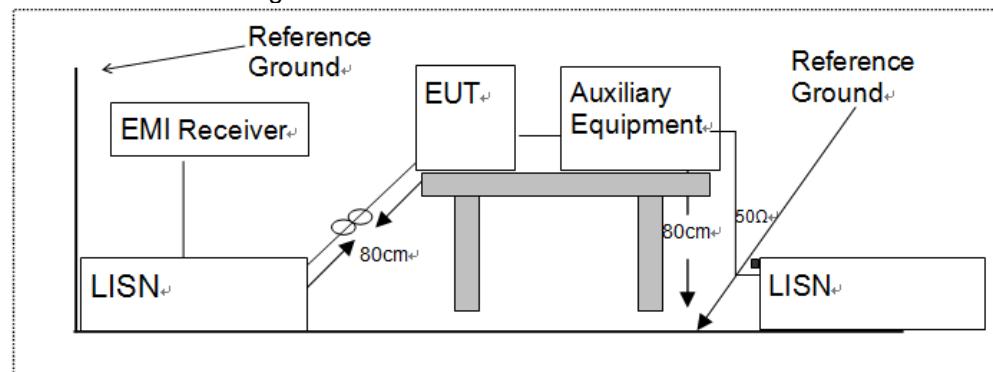

#### 7.4 SUPPORT EQUIPMENT

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
iPhone	Apple	iPhone 5C/A1526	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

### 8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- (g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
- (h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


### 8.2 EUT Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence:  $2^9 - 1 = 524$  bits

Longest sequence of zeros: 8 (non-inverted signal)

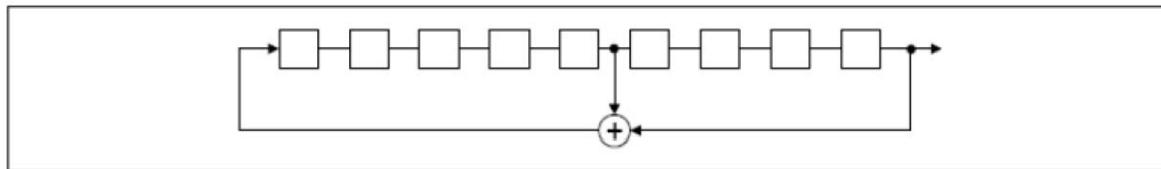

*Linear Feedback Shift Register for Generation of the PRBS sequence*

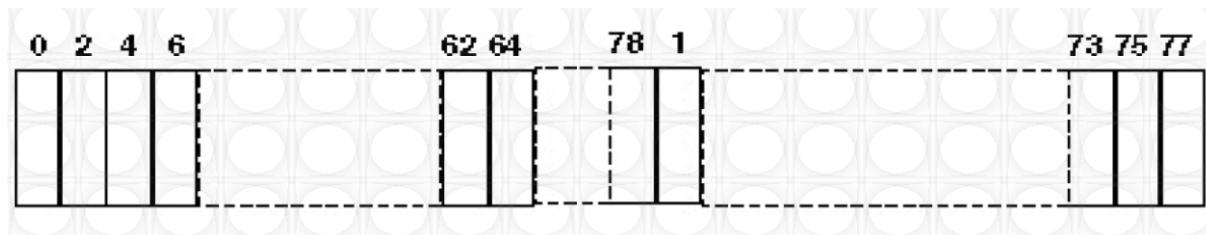

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53

Each Frequency used equally on the average by each transmitter

### 8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

## 9 TEST REQUIREMENTS

### 9.1 20DB BANDWIDTH

#### 9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1), RSS-247 Clause 5.1(a), 558074 D01 15.247 Meas Guidance V05r02

#### 9.1.2 Conformance Limit

No limit requirement.

#### 9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 9.1.4 Test Procedure

The EUT was operating inBluetooth V4.0 and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz. OBW for 99% BANDWIDTH

Set the video bandwidth (VBW) =100kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdeltafunction, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.



If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.



Measure and record the results in the test report.



### Test Results

Temperature:	24°C	Test Date:	Nov 28, 2019
Humidity:	53 %	Test By:	XW


Modulation Mode	Channel Number	Channel Frequency (MHz)	20dB Bandwidth (kHz)	2/3 of 20dB Bandwidth (kHz)	99% Bandwidth(KHz)
GFSK	0	2402	926.0	617.3	846.4
	39	2441	859.3	572.9	825.5
	78	2480	894.2	596.1	838.7
pi/4-DQPSK	0	2402	1196	797.3	1171.9
	39	2441	1216	810.7	1181.6
	78	2480	1211	807.3	1175.4
8DPSK	0	2402	1206	804.0	1153.2
	39	2441	1214	809.3	1159.4
	78	2480	1211	807.3	1160.6

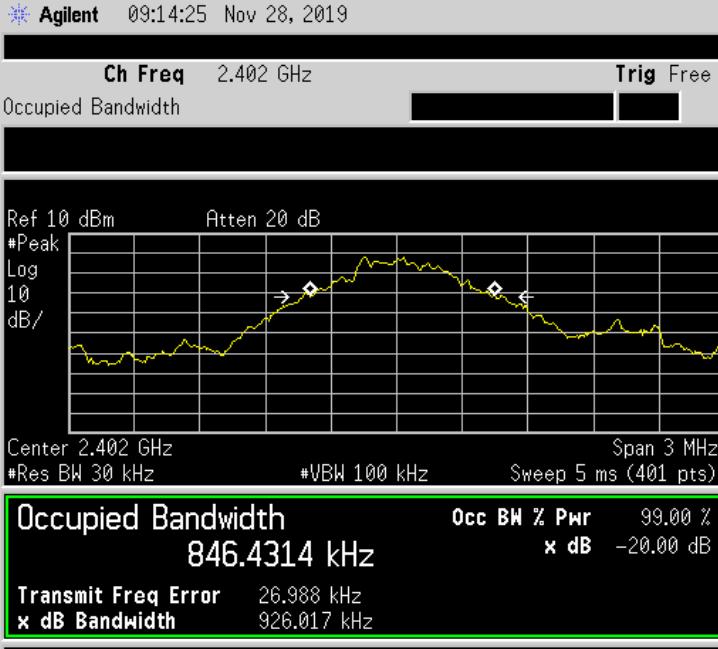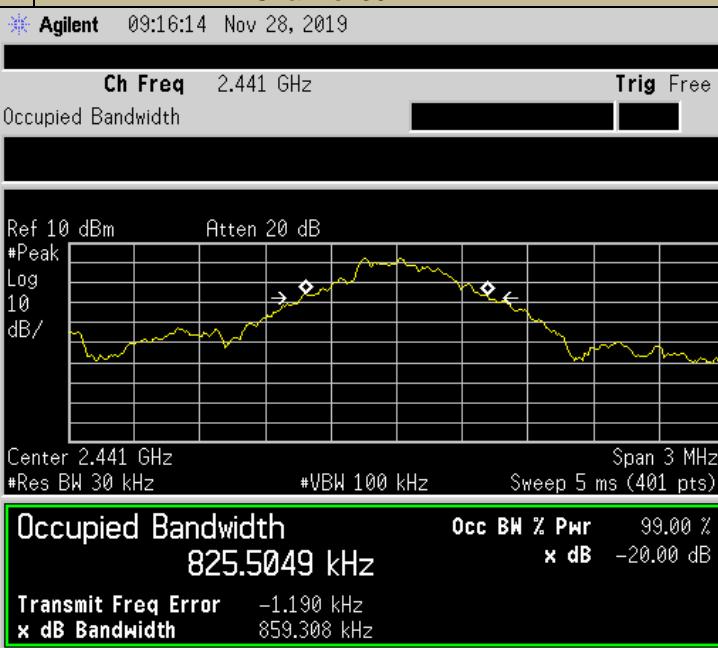Test Model	20dB Bandwidth and 99% Bandwidth													
	Channel 0: 2402MHz													
	GFSKModulation													
	<p>Agilent 09:14:25 Nov 28, 2019</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p>  <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>846.4314 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>26.988 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>926.017 kHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	846.4314 kHz	x dB	-20.00 dB	Transmit Freq Error	26.988 kHz		x dB Bandwidth	926.017 kHz		<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.4020000 GHz</p> <p><b>Start Freq</b> 2.40050000 GHz</p> <p><b>Stop Freq</b> 2.40350000 GHz</p> <p><b>CF Step</b> 300.000000 kHz <u>Auto</u> <u>Man</u></p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> <u>On</u> <u>Off</u></p> <p><b>Scale Type</b> <u>Log</u> <u>Lin</u></p>
Occupied Bandwidth	Occ BW % Pwr	99.00 %												
846.4314 kHz	x dB	-20.00 dB												
Transmit Freq Error	26.988 kHz													
x dB Bandwidth	926.017 kHz													
	<p>20dB Bandwidth and 99% Bandwidth</p> <p>Channel 39: 2441MHz</p> <p>GFSKModulation</p> <p>Agilent 09:16:14 Nov 28, 2019</p> <p>Ch Freq 2.441 GHz Trig Free</p> <p>Occupied Bandwidth</p>  <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>825.5049 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-1.190 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>859.308 kHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	825.5049 kHz	x dB	-20.00 dB	Transmit Freq Error	-1.190 kHz		x dB Bandwidth	859.308 kHz		<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.4410000 GHz</p> <p><b>Start Freq</b> 2.43950000 GHz</p> <p><b>Stop Freq</b> 2.44250000 GHz</p> <p><b>CF Step</b> 300.000000 kHz <u>Auto</u> <u>Man</u></p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> <u>On</u> <u>Off</u></p> <p><b>Scale Type</b> <u>Log</u> <u>Lin</u></p>
Occupied Bandwidth	Occ BW % Pwr	99.00 %												
825.5049 kHz	x dB	-20.00 dB												
Transmit Freq Error	-1.190 kHz													
x dB Bandwidth	859.308 kHz													

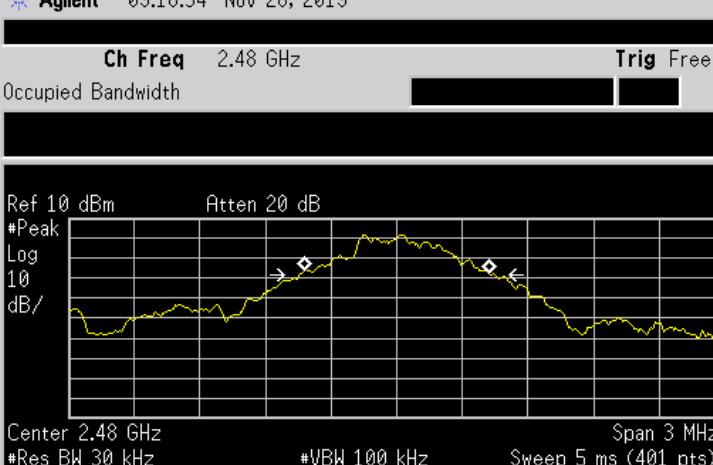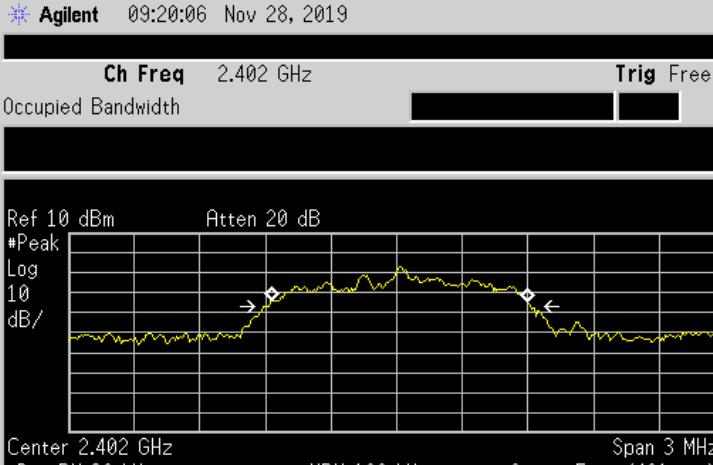Test Model	20dB Bandwidth and 99% Bandwidth													
	Channel 78: 2480MHz													
	GFSKModulation													
	<p>Agilent 09:18:34 Nov 28, 2019</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p>  <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>838.7168 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-1.024 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>894.197 kHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	838.7168 kHz	x dB	-20.00 dB	Transmit Freq Error	-1.024 kHz		x dB Bandwidth	894.197 kHz		<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.4800000 GHz</p> <p><b>Start Freq</b> 2.47850000 GHz</p> <p><b>Stop Freq</b> 2.48150000 GHz</p> <p><b>CF Step</b> 300.000000 kHz <u>Auto</u> <u>Man</u></p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> <u>On</u> <u>Off</u></p> <p><b>Scale Type</b> <u>Log</u> <u>Lin</u></p>
Occupied Bandwidth	Occ BW % Pwr	99.00 %												
838.7168 kHz	x dB	-20.00 dB												
Transmit Freq Error	-1.024 kHz													
x dB Bandwidth	894.197 kHz													
	<p>20dB Bandwidth and 99% Bandwidth</p> <p>Channel 0: 2402MHz</p> <p>pi/4-DQPSKModulation</p> <p>Agilent 09:20:06 Nov 28, 2019</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p>  <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>1.1719 MHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>13.014 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.196 MHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	1.1719 MHz	x dB	-20.00 dB	Transmit Freq Error	13.014 kHz		x dB Bandwidth	1.196 MHz		<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.40200000 GHz</p> <p><b>Start Freq</b> 2.40050000 GHz</p> <p><b>Stop Freq</b> 2.40350000 GHz</p> <p><b>CF Step</b> 300.000000 kHz <u>Auto</u> <u>Man</u></p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> <u>On</u> <u>Off</u></p> <p><b>Scale Type</b> <u>Log</u> <u>Lin</u></p>
Occupied Bandwidth	Occ BW % Pwr	99.00 %												
1.1719 MHz	x dB	-20.00 dB												
Transmit Freq Error	13.014 kHz													
x dB Bandwidth	1.196 MHz													

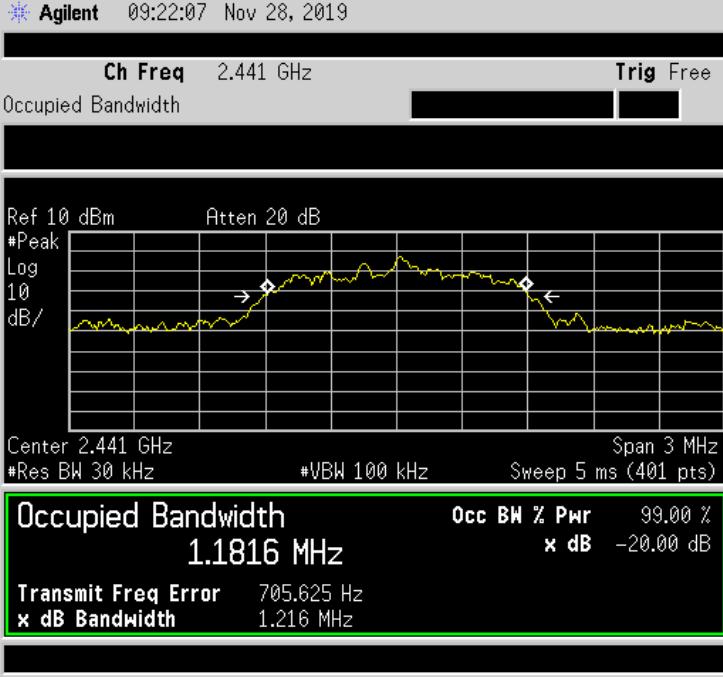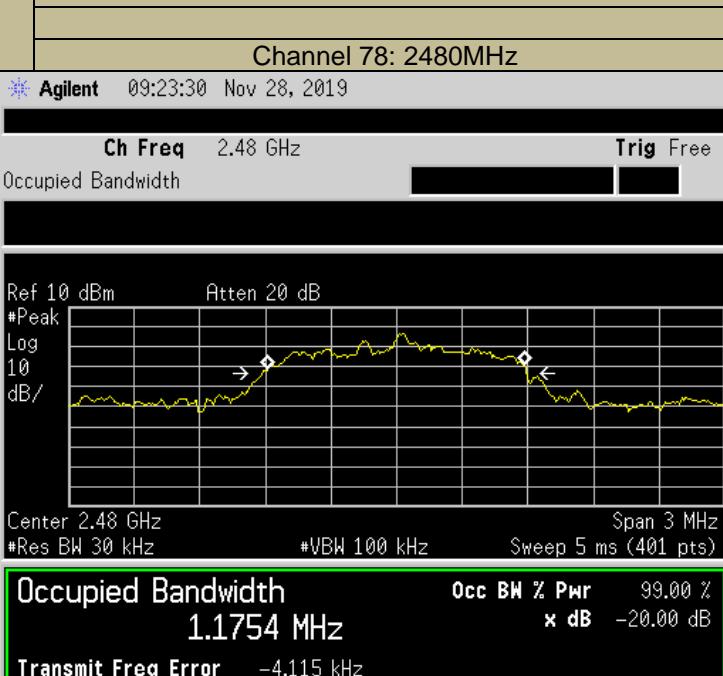Test Model	20dB Bandwidth and 99% Bandwidth		pi/4-DQPSKModulation	
	Channel 39: 2441MHz			
	<p>Agilent 09:22:07 Nov 28, 2019</p> <p>Ch Freq 2.441 GHz Trig Free</p> <p>Occupied Bandwidth</p>  <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 30 kHz *VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % 1.1816 MHz x dB -20.00 dB</p> <p>Transmit Freq Error 705.625 Hz x dB Bandwidth 1.216 MHz</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.44100000 GHz</p> <p><b>Start Freq</b> 2.43950000 GHz</p> <p><b>Stop Freq</b> 2.44250000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>		
	<p>20dB Bandwidth and 99% Bandwidth</p> <p>Channel 78: 2480MHz</p> <p>pi/4-DQPSKModulation</p> <p>Agilent 09:23:30 Nov 28, 2019</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p>  <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 30 kHz *VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % 1.1754 MHz x dB -20.00 dB</p> <p>Transmit Freq Error -4.115 kHz x dB Bandwidth 1.211 MHz</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.48000000 GHz</p> <p><b>Start Freq</b> 2.47850000 GHz</p> <p><b>Stop Freq</b> 2.48150000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>		

Test Model	20dB Bandwidth and 99% Bandwidth	
	Channel 0: 2402MHz	8DPSKModulation
	Agilent 09:25:02 Nov 28, 2019	
	<p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.1532 MHz</p> <p>Transmit Freq Error 20.740 kHz x dB Bandwidth 1.206 MHz</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.40200000 GHz</p> <p><b>Start Freq</b> 2.40050000 GHz</p> <p><b>Stop Freq</b> 2.40350000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>
	20dB Bandwidth and 99% Bandwidth	
	Channel 39: 2441MHz	8DPSKModulation
	<p>Agilent 09:26:25 Nov 28, 2019</p> <p>Ch Freq 2.441 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.1594 MHz</p> <p>Transmit Freq Error 13.534 kHz x dB Bandwidth 1.214 MHz</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.44100000 GHz</p> <p><b>Start Freq</b> 2.43950000 GHz</p> <p><b>Stop Freq</b> 2.44250000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>

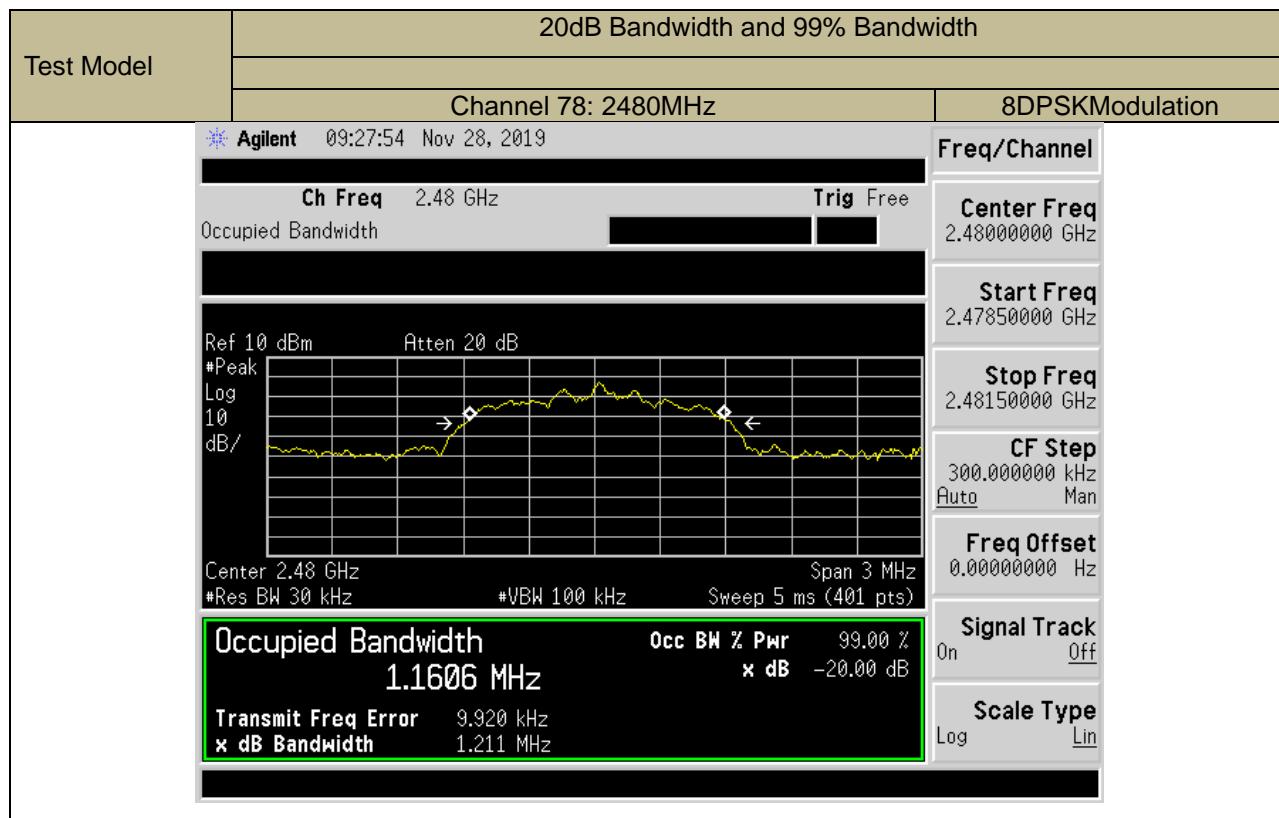

## 9.2 CARRIER FREQUENCY SEPARATION

### 9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1), RSS-247 Clause 5.1(b), 558074 D01 15.247 Meas Guidance V05r02

### 9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.2.4 Test Procedure

- According to FCC Part 15.247(a)(1) and RSS-247 Clause 5.1(b)

The EUT must have its hopping function enabled. Use the following spectrum analyzers settings:

Set the RBW = 100kHz. Set VBW = 300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


## Test Results


Temperature:	24°C	Test Date:	Nov 28, 2019
Humidity:	53 %	Test By:	XW


Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
GFSK	0	2402	1005	>617.3	>PASS
	39	2441	1005	>572.9	PASS
	78	2480	1005	>596.1	PASS
pi/4-DQPSK	0	2402	997.5	>797.3	PASS
	39	2441	1005	>810.7	PASS
	78	2480	1012.5	>807.3	PASS
8DPSK	0	2402	997.5	>804.0	PASS
	39	2441	997.5	>809.3	PASS
	78	2480	1005	>807.3	PASS
Note: Limit = 20dB bandwidth * 2/3, if it is greater than 25kHz and the output power is less than 125mW (21dBm).					

Test Model	Carrier Frequency Separation		GFSKModulation	
	Channel 0: 2402MHz			
		<div style="display: flex; justify-content: space-between;"> <div style="flex: 1;"> <a href="#">Peak Search</a>  <a href="#">Meas Tools</a>  <a href="#">Next Peak</a>  <a href="#">Next Pk Right</a>  <a href="#">Next Pk Left</a>  <a href="#">Min Search</a>  <a href="#">Pk-Pk Search</a>  <a href="#">More</a> </div> <div style="flex: 1; text-align: right;"> 1 of 2 </div> </div>		
		<div style="display: flex; justify-content: space-between;"> <div style="flex: 1;"> <a href="#">Peak Search</a>  <a href="#">Meas Tools</a>  <a href="#">Next Peak</a>  <a href="#">Next Pk Right</a>  <a href="#">Next Pk Left</a>  <a href="#">Min Search</a>  <a href="#">Pk-Pk Search</a>  <a href="#">More</a> </div> <div style="flex: 1; text-align: right;"> 1 of 2 </div> </div>		

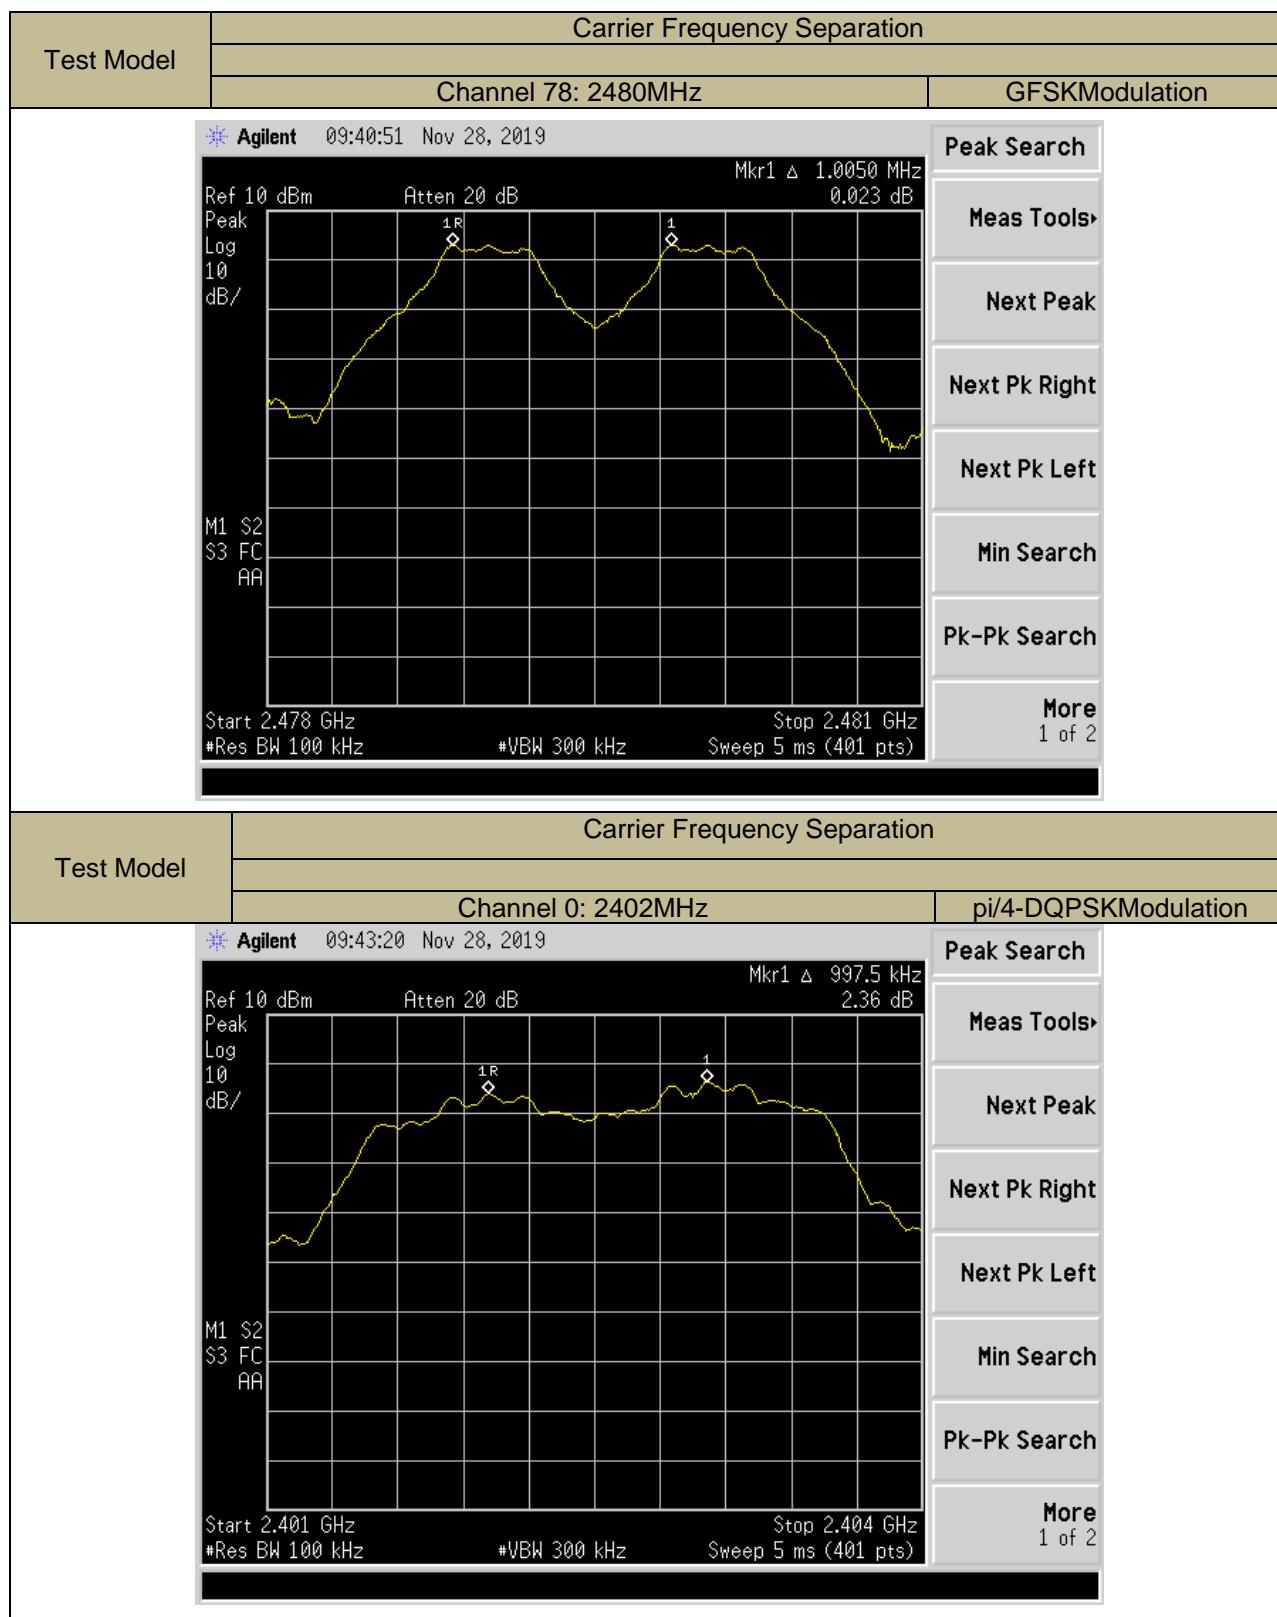

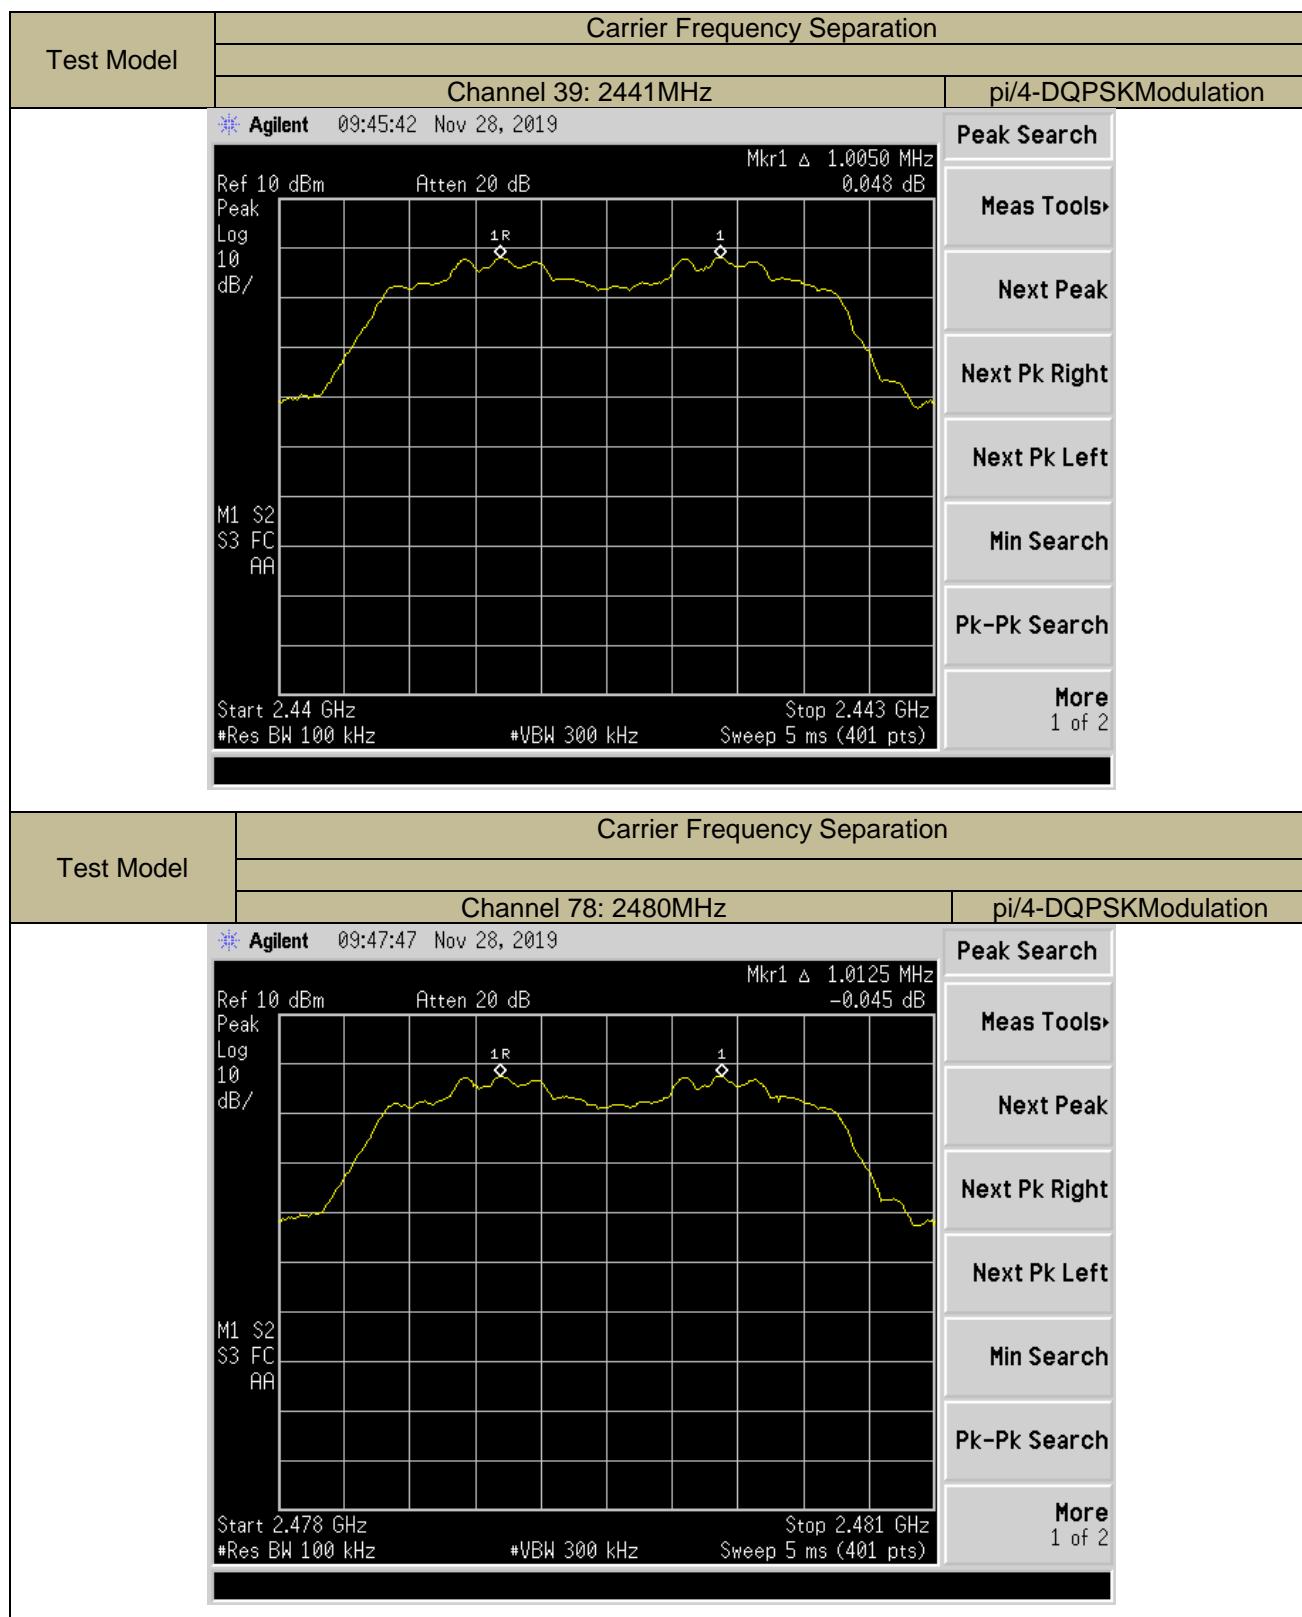

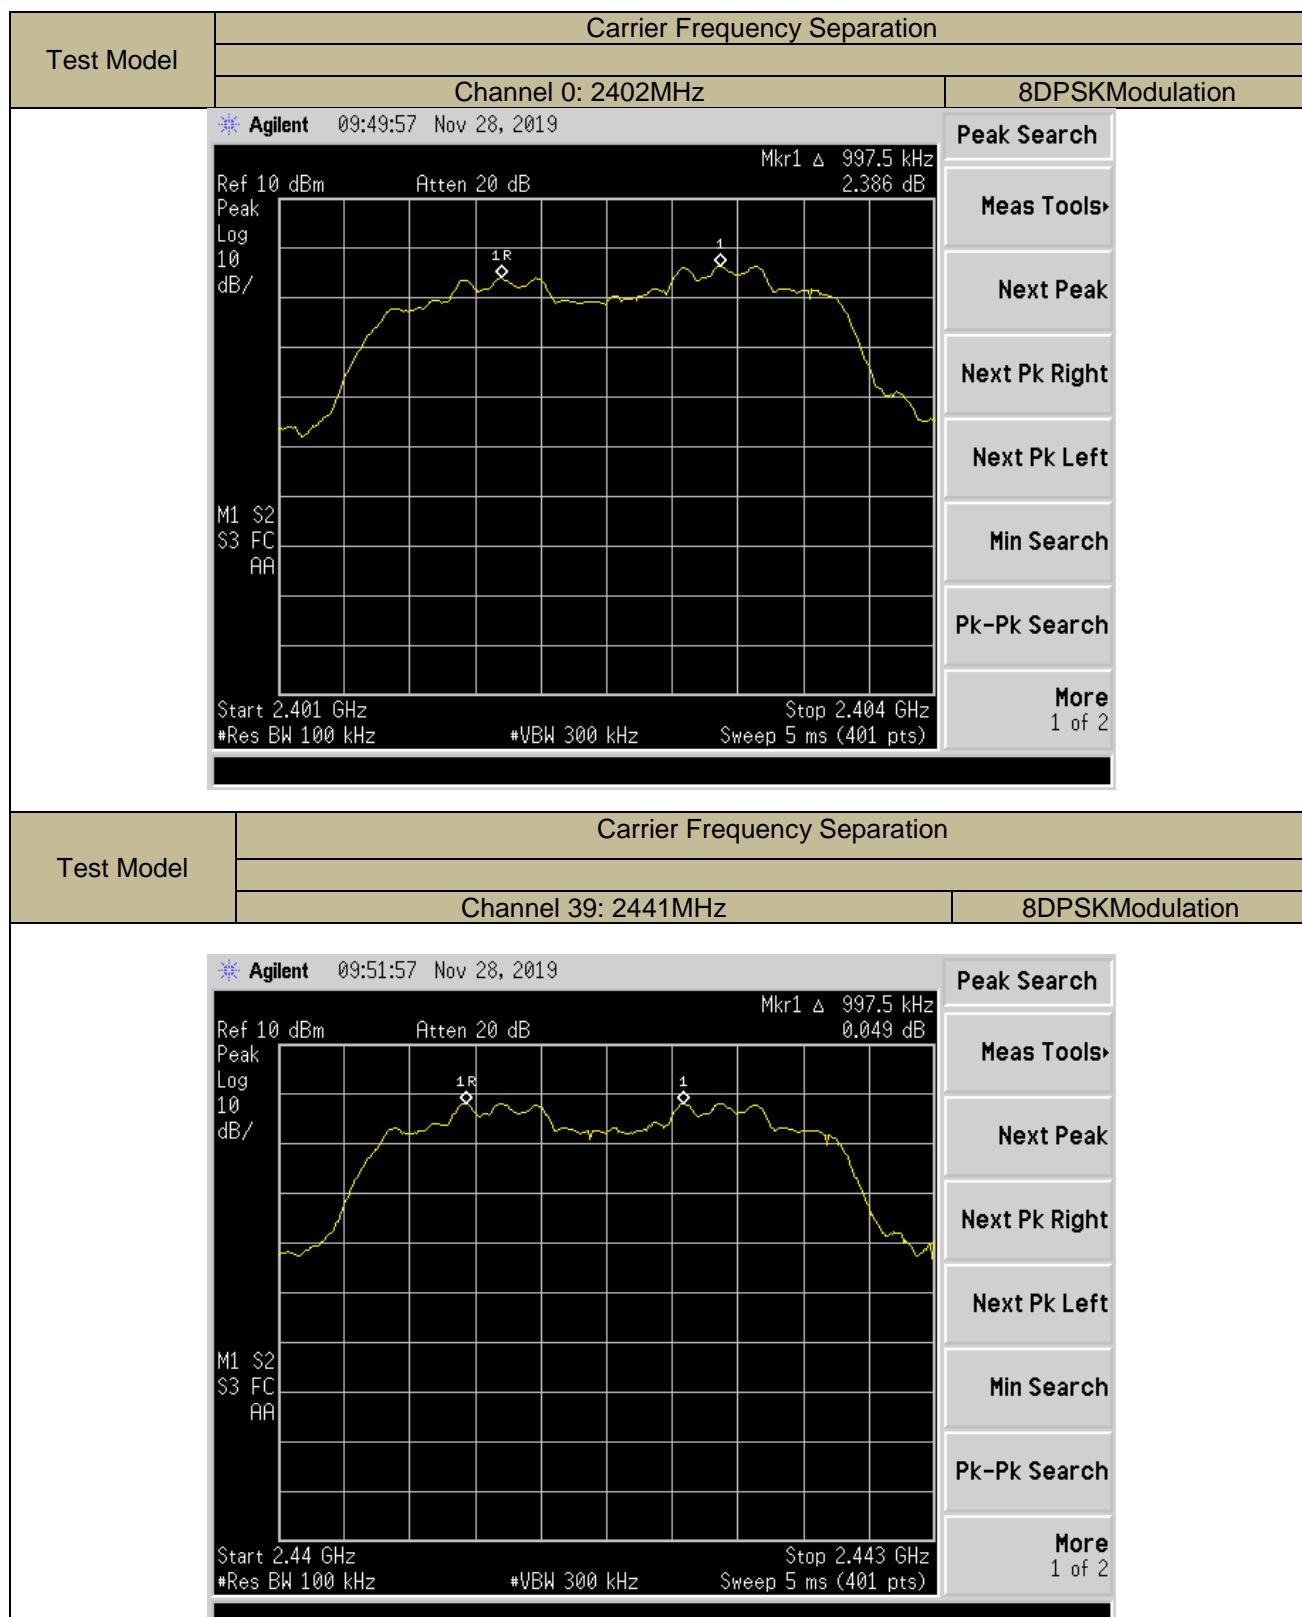

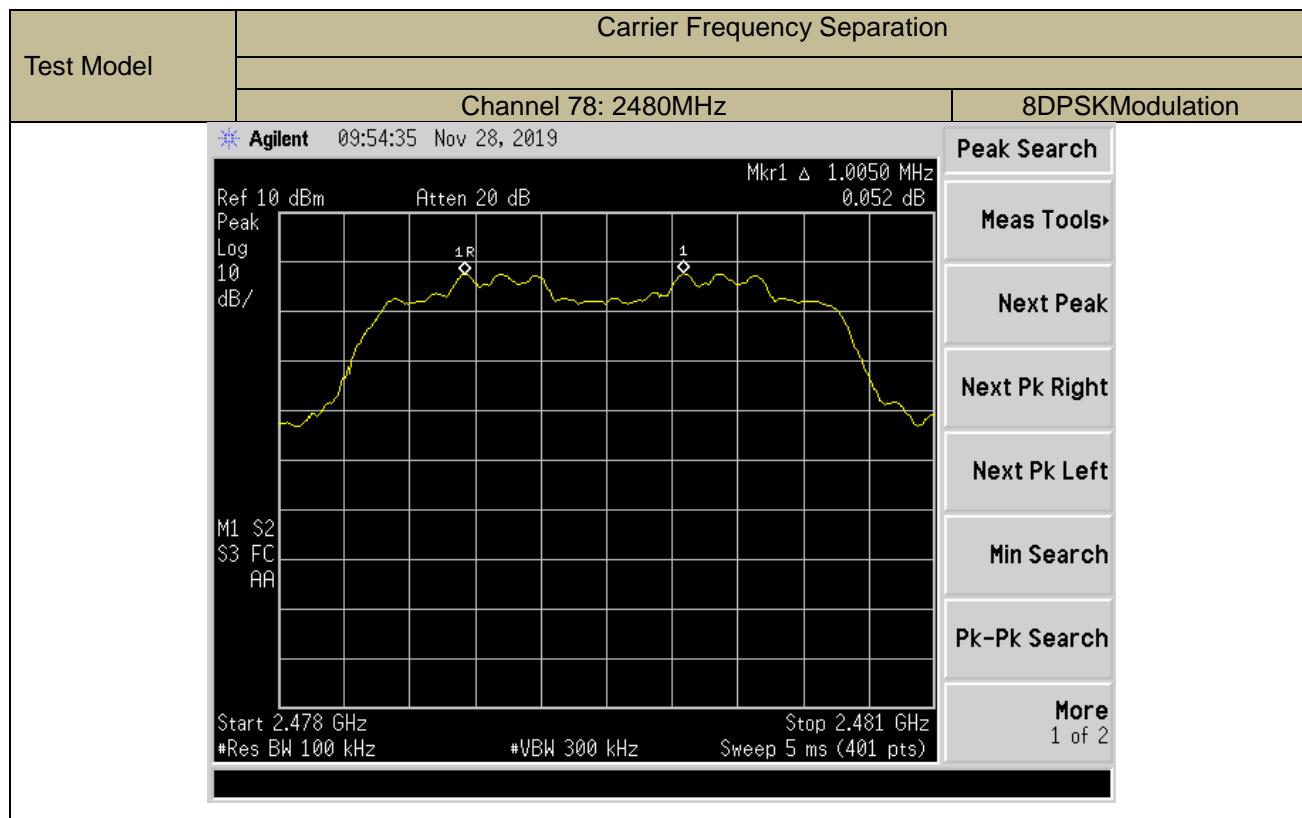

### 9.3 NUMBER OF HOPPING FREQUENCIES

#### 9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii), RSS-247 Clause 5.1(d), 558074 D01 15.247 Meas Guidance V05r02

#### 9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

#### 9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 9.3.4 Test Procedure

- According to FCC Part15.247(a)(1)(iii) and RSS-247 Clause 5.1(d)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. It may prove necessary to break the span up to sections, inorder to clearly show all of the hopping frequencies.

#### Test Results

Temperature:	24°C	Test Date:	Nov 28, 2019
Humidity:	53 %	Test By:	XW

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
2402-2480 (GFSK)	79	>15

Note: Both BR & EDR mode has same result .

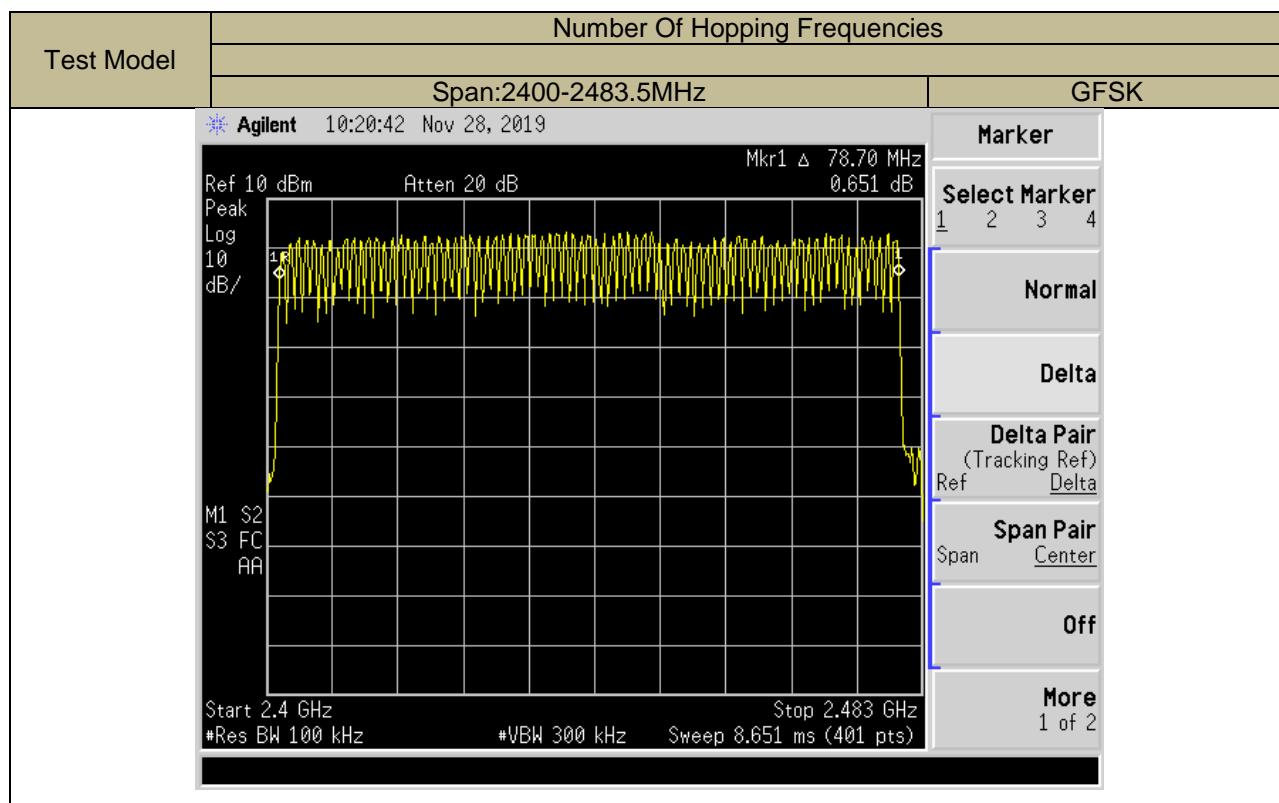

## 9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

### 9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii), RSS-247 Clause 5.1(d), 558074 D01 15.247 Meas Guidance V05r02

### 9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the averagetime of occupancy on any channel shall not be greater than 0.4s within a period of 0.4smultiplied by the number of hopping channels employed.

### 9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.4.4 Test Procedure

■ According to FCC Part15.247(a)(1)(iii) and RSS-247 Clause 5.1(d)

The EUT must have its hopping function enabled. Use the following spectrum analyzersettings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value

varies with different modes of operation (e.g., data rate, modulation format, etc.),

repeat this test for each variation. The limit is specified in one of the subparagraphsof this Section.

### 9.4.5 Test Results

Temperature:	24°C	Test Date:	Nov 28, 2019
Humidity:	53 %	Test By:	XW


Modulation Mode	Channel Number	Packet type	Pluse width (ms)	DwellTime (ms)	Limit (ms)	Verdict
GFSK	0	DH1	0.425	136.00	<400	PASS
	0	DH3	1.68	268.80	<400	PASS
	0	DH5	2.92	311.47	<400	PASS


Note1: DwellTime(DH1)=PW\*(1600/2/79)\*31.6

DwellTime(DH3)=PW\*(1600/4/79)\*31.6

DwellTime(DH5)=PW\*(1600/6/79)\*31.6

Note2: Bluetooth (GFSK, pi/4-DQPSK, 8DPSK)mode have been tested, and the worst results has been recorded on the follow page.

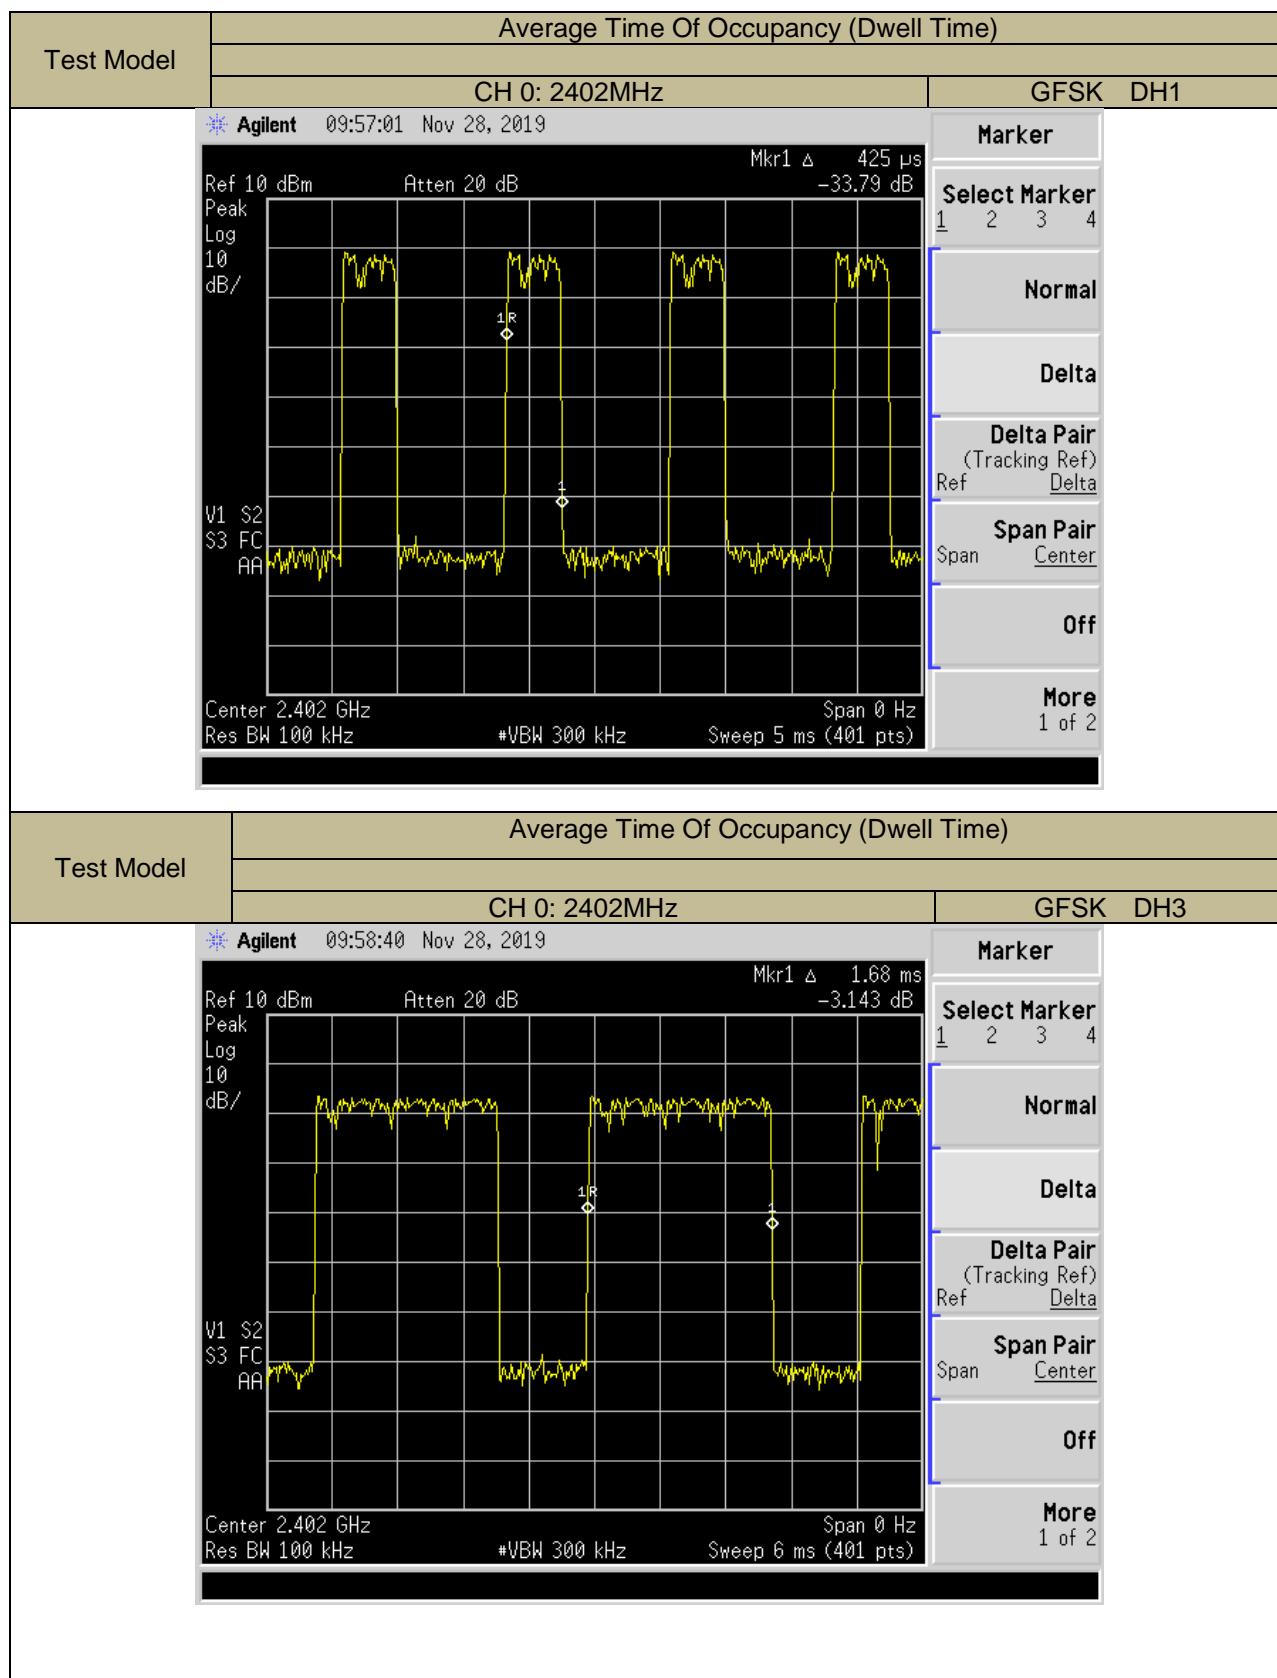

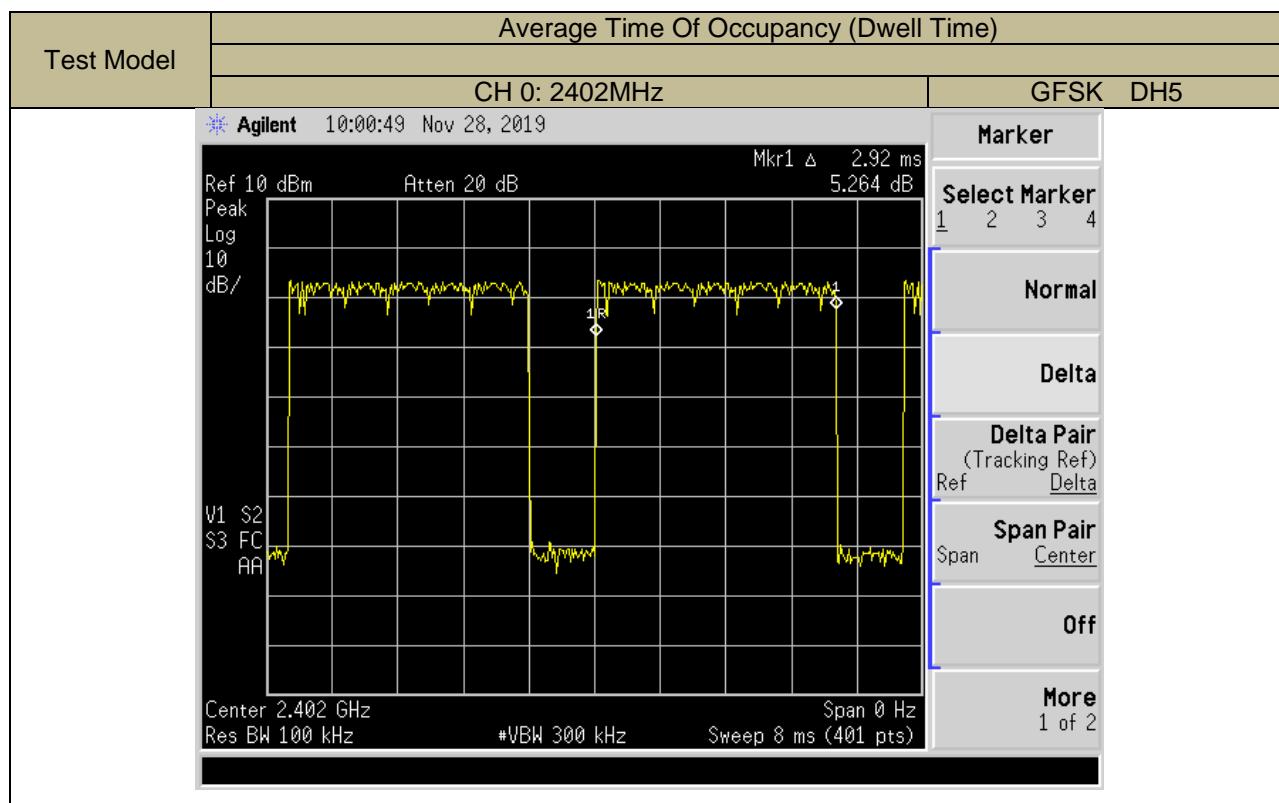

## 9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1), RSS-247 Clause 5.4(b), 558074 D01 15.247 Meas Guidance V05r02

### 9.5.2 Conformance Limit

The maxFor frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.5.4 Test Procedure

- According to FCC Part15.247(b)(1) and RSS-247 Clause 5.4(b)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel(about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured(about 3MHz)

Set VBW  $\geq$  RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold



Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emissionto determine the peak amplitude level.



### Test Results



Temperature:	24°C	Test Date:	Nov 28, 2019
Humidity:	53 %	Test By:	XW



Operation Mode	Channel Number	Channel Frequency (MHz)	MeasurementLevel (dBm)	Limit (dBm)	Verdict
GFSK	0	2402	-0.056	21	PASS
	39	2441	3.64	21	PASS
	78	2480	3.255	21	PASS
pi/4-DQPSK	0	2402	-3.694	21	PASS
	39	2441	0.375	21	PASS
	78	2480	-0.16	21	PASS
8DPSK	0	2402	-3.175	21	PASS
	39	2441	0.987	21	PASS
	78	2480	0.393	21	PASS


Note:N/A

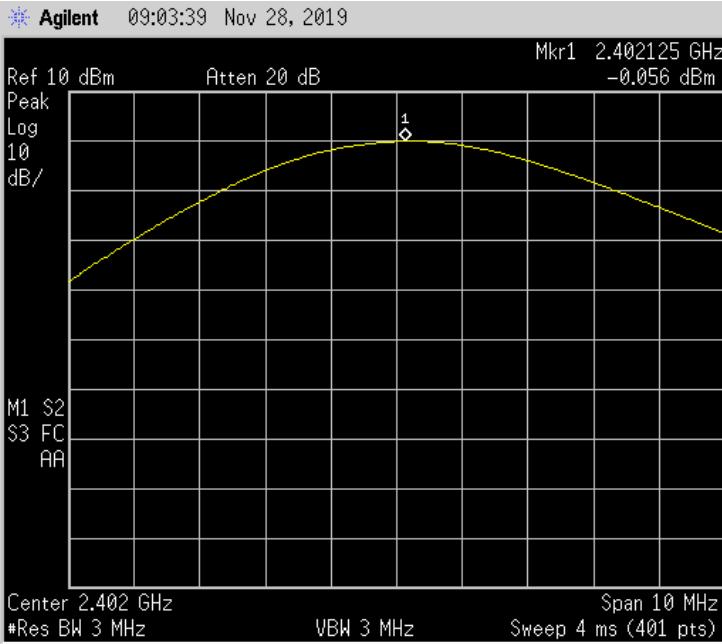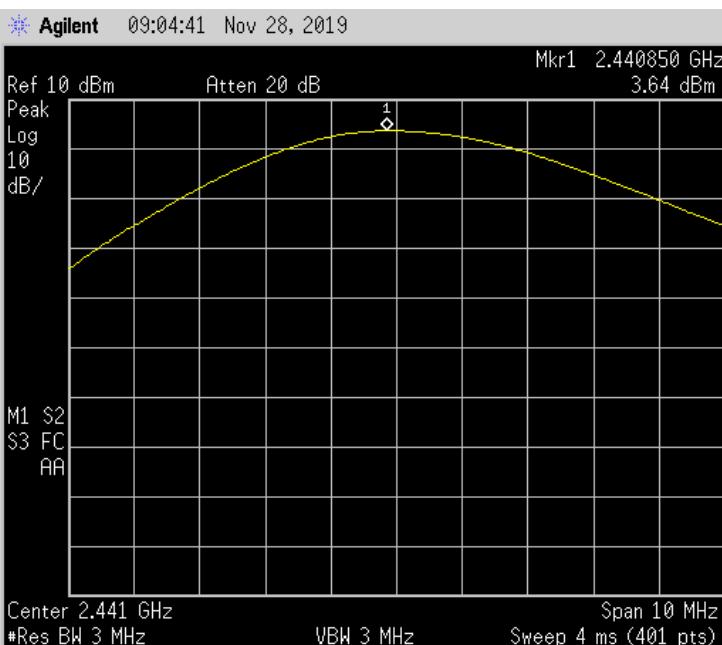Test Model	Maximum PeakConducted Output Power		
	Channel 0: 2402MHz		GFSK
	 <p>Agilent 09:03:39 Nov 28, 2019</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.402125 GHz -0.056 dBm</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402 GHz #Res BW 3 MHz VBW 3 MHz Span 10 MHz Sweep 4 ms (401 pts)</p> <p>Peak Search</p> <p>Meas Tools</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p>		
Test Model	Maximum PeakConducted Output Power		
	Channel 39: 2441MHz		GFSK
	 <p>Agilent 09:04:41 Nov 28, 2019</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.440850 GHz 3.64 dBm</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.441 GHz #Res BW 3 MHz VBW 3 MHz Span 10 MHz Sweep 4 ms (401 pts)</p> <p>Peak Search</p> <p>Meas Tools</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p>		

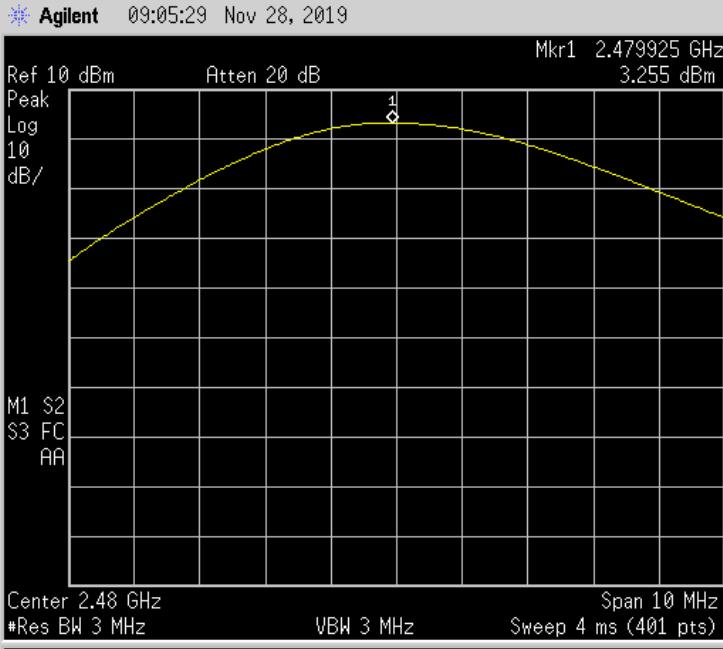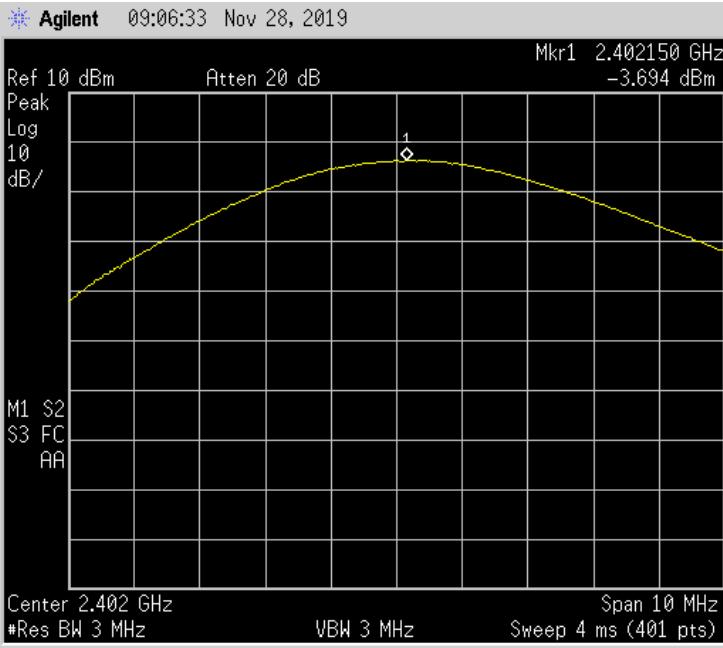Test Model	Maximum PeakConducted Output Power		
	Channel 78: 2480MHz		GFSK
	 <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Agilent 09:05:29 Nov 28, 2019</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.479925 GHz 3.255 dBm</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.48 GHz #Res BW 3 MHz VBW 3 MHz Span 10 MHz Sweep 4 ms (401 pts)</p> </div> <div style="flex: 1; border: 1px solid #ccc; padding: 5px; margin-left: 10px;"> <p>Peak Search</p> <p>Meas Tools</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p> </div> </div>		
Test Model	Maximum PeakConducted Output Power		
	Channel 0: 2402MHz		pi/4-DQPSK
	 <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Agilent 09:06:33 Nov 28, 2019</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.402150 GHz -3.694 dBm</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402 GHz #Res BW 3 MHz VBW 3 MHz Span 10 MHz Sweep 4 ms (401 pts)</p> </div> <div style="flex: 1; border: 1px solid #ccc; padding: 5px; margin-left: 10px;"> <p>Peak Search</p> <p>Meas Tools</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p> </div> </div>		

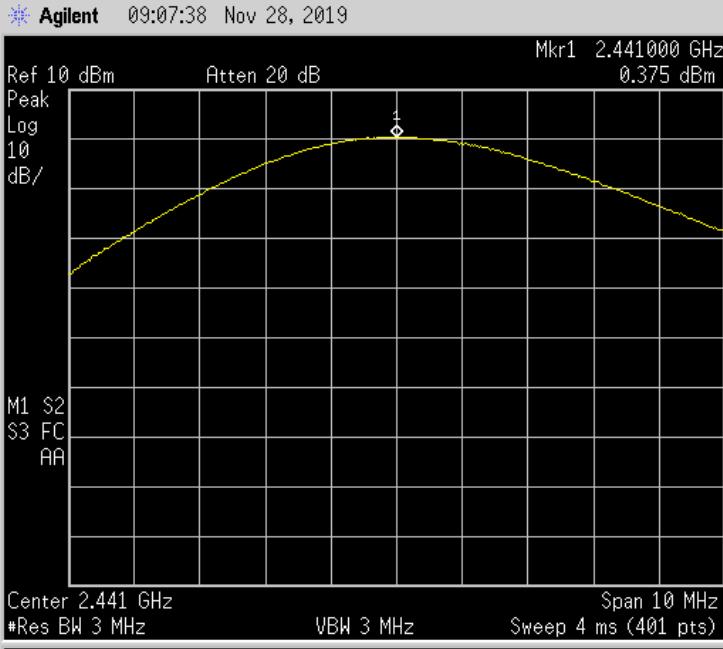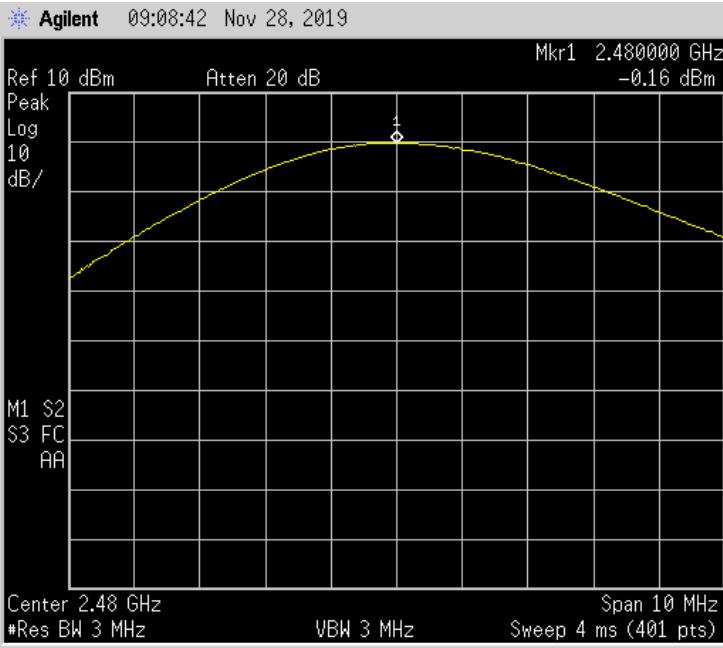Test Model	Maximum PeakConducted Output Power		
	Channel 39: 2441MHz		pi/4-DQPSK
	 <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <b>Agilent</b> 09:07:38 Nov 28, 2019            Ref 10 dBm Atten 20 dB Mkr1 2.441000 GHz            Peak Log 0.375 dBm            10 dB/            M1 S2            S3 FC            AA         </div> <div style="flex: 1; margin-left: 10px;">           Center 2.441 GHz Mkr1 2.441000 GHz            #Res BW 3 MHz VBW 3 MHz Span 10 MHz            Sweep 4 ms (401 pts)         </div> <div style="flex: 1; border: 1px solid #ccc; padding: 2px; margin-left: 10px;"> <b>Peak Search</b>            Meas Tools&gt;            Next Peak            Next Pk Right            Next Pk Left            Min Search            Pk-Pk Search  <b>More</b>            1 of 2         </div> </div>		
Test Model	Maximum PeakConducted Output Power		
	Channel 78: 2480MHz		pi/4-DQPSK
	 <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <b>Agilent</b> 09:08:42 Nov 28, 2019            Ref 10 dBm Atten 20 dB Mkr1 2.480000 GHz            Peak Log -0.16 dBm            10 dB/            M1 S2            S3 FC            AA         </div> <div style="flex: 1; margin-left: 10px;">           Center 2.48 GHz Mkr1 2.480000 GHz            #Res BW 3 MHz VBW 3 MHz Span 10 MHz            Sweep 4 ms (401 pts)         </div> <div style="flex: 1; border: 1px solid #ccc; padding: 2px; margin-left: 10px;"> <b>Peak Search</b>            Meas Tools&gt;            Next Peak            Next Pk Right            Next Pk Left            Min Search            Pk-Pk Search  <b>More</b>            1 of 2         </div> </div>		

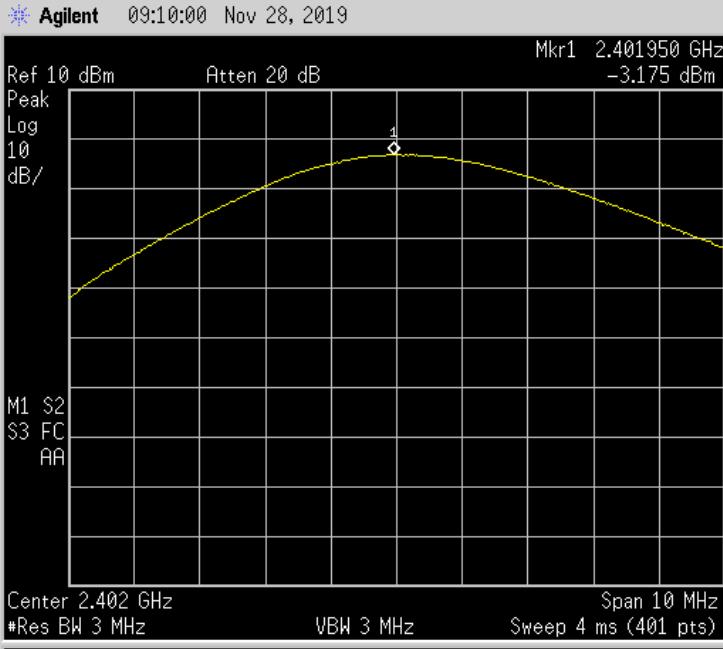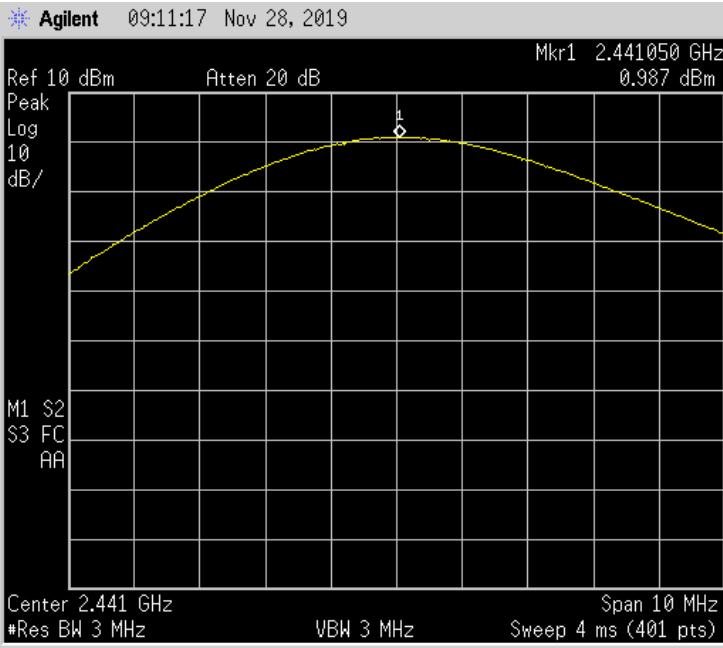Test Model	Maximum PeakConducted Output Power		
	Channel 0: 2402MHz		8DPSK
	 <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Agilent 09:10:00 Nov 28, 2019</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.401950 GHz -3.175 dBm</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402 GHz #Res BW 3 MHz VBW 3 MHz Span 10 MHz Sweep 4 ms (401 pts)</p> </div> <div style="flex: 1; border: 1px solid #ccc; padding: 2px;"> <p>Peak Search</p> <p>Meas Tools</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p> </div> </div>		
Test Model	Maximum PeakConducted Output Power		
	Channel 39: 2441MHz		8DPSK
	 <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Agilent 09:11:17 Nov 28, 2019</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.441050 GHz 0.987 dBm</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.441 GHz #Res BW 3 MHz VBW 3 MHz Span 10 MHz Sweep 4 ms (401 pts)</p> </div> <div style="flex: 1; border: 1px solid #ccc; padding: 2px;"> <p>Peak Search</p> <p>Meas Tools</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p> </div> </div>		

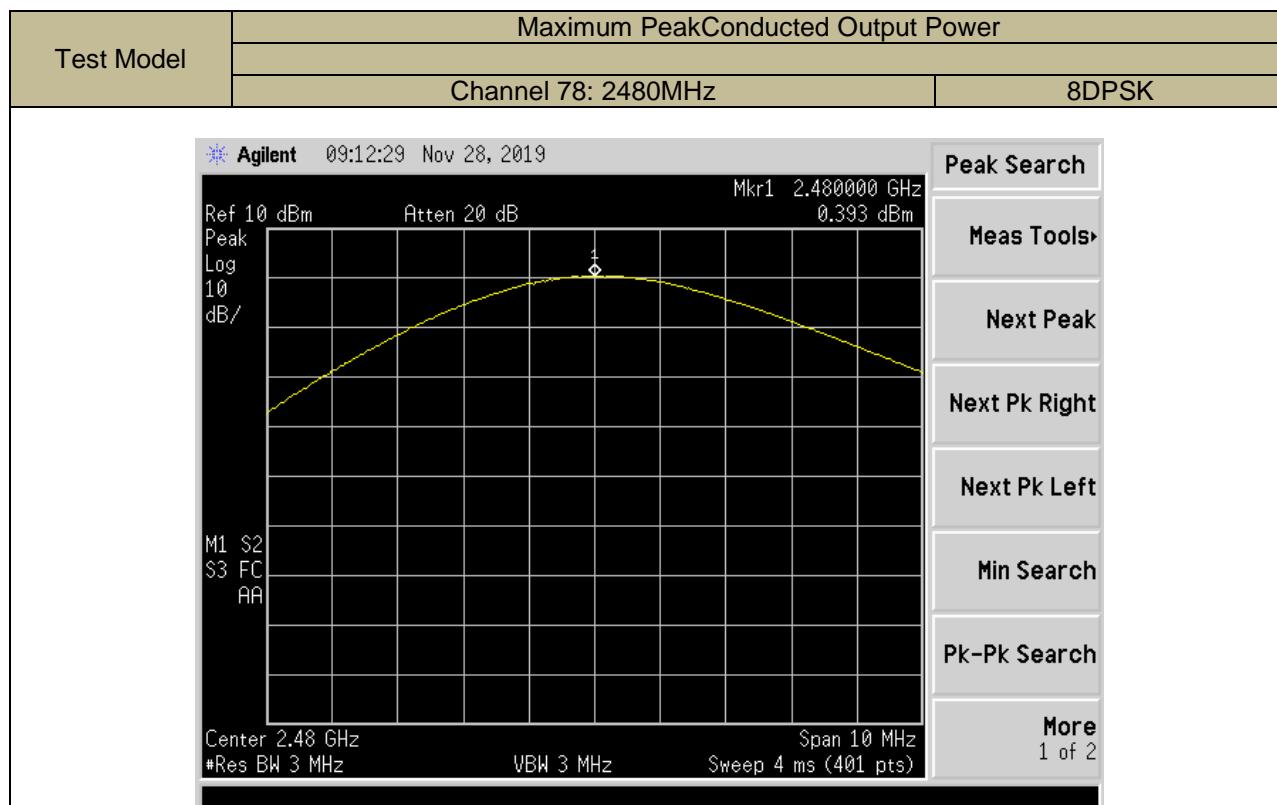

## 9.6 CONDUCTED SUPRIOUS EMISSION

### 9.6.1 Applicable Standard

According to FCC Part 15.247(d), RSS-247 Clause 5.5, 558074 D01 15.247 Meas Guidance V05r02

### 9.6.2 Conformance Limit

According to FCC Part 15.247(d) and RSS-247 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW  $\geq$  3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximumconducedlevel.

Note that the channel found to contain the maximum conducted level can be used to establish the reference level.

#### ■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq$  1% of the span=100kHzSet VBW  $\geq$  RBW

Set Sweep = autoSetDetector function = peakSetTrace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### ■ ConductedSpurious RF Conducted Emission

Use the following spectrum analyzer settings:


Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz).Set RBW = 100 kHzSetVBW $\geq$  RBW


Set Sweep = autoSetDetector function = peakSetTrace = max hold


Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


### 9.6.5 Test Results



Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK)was report as below:

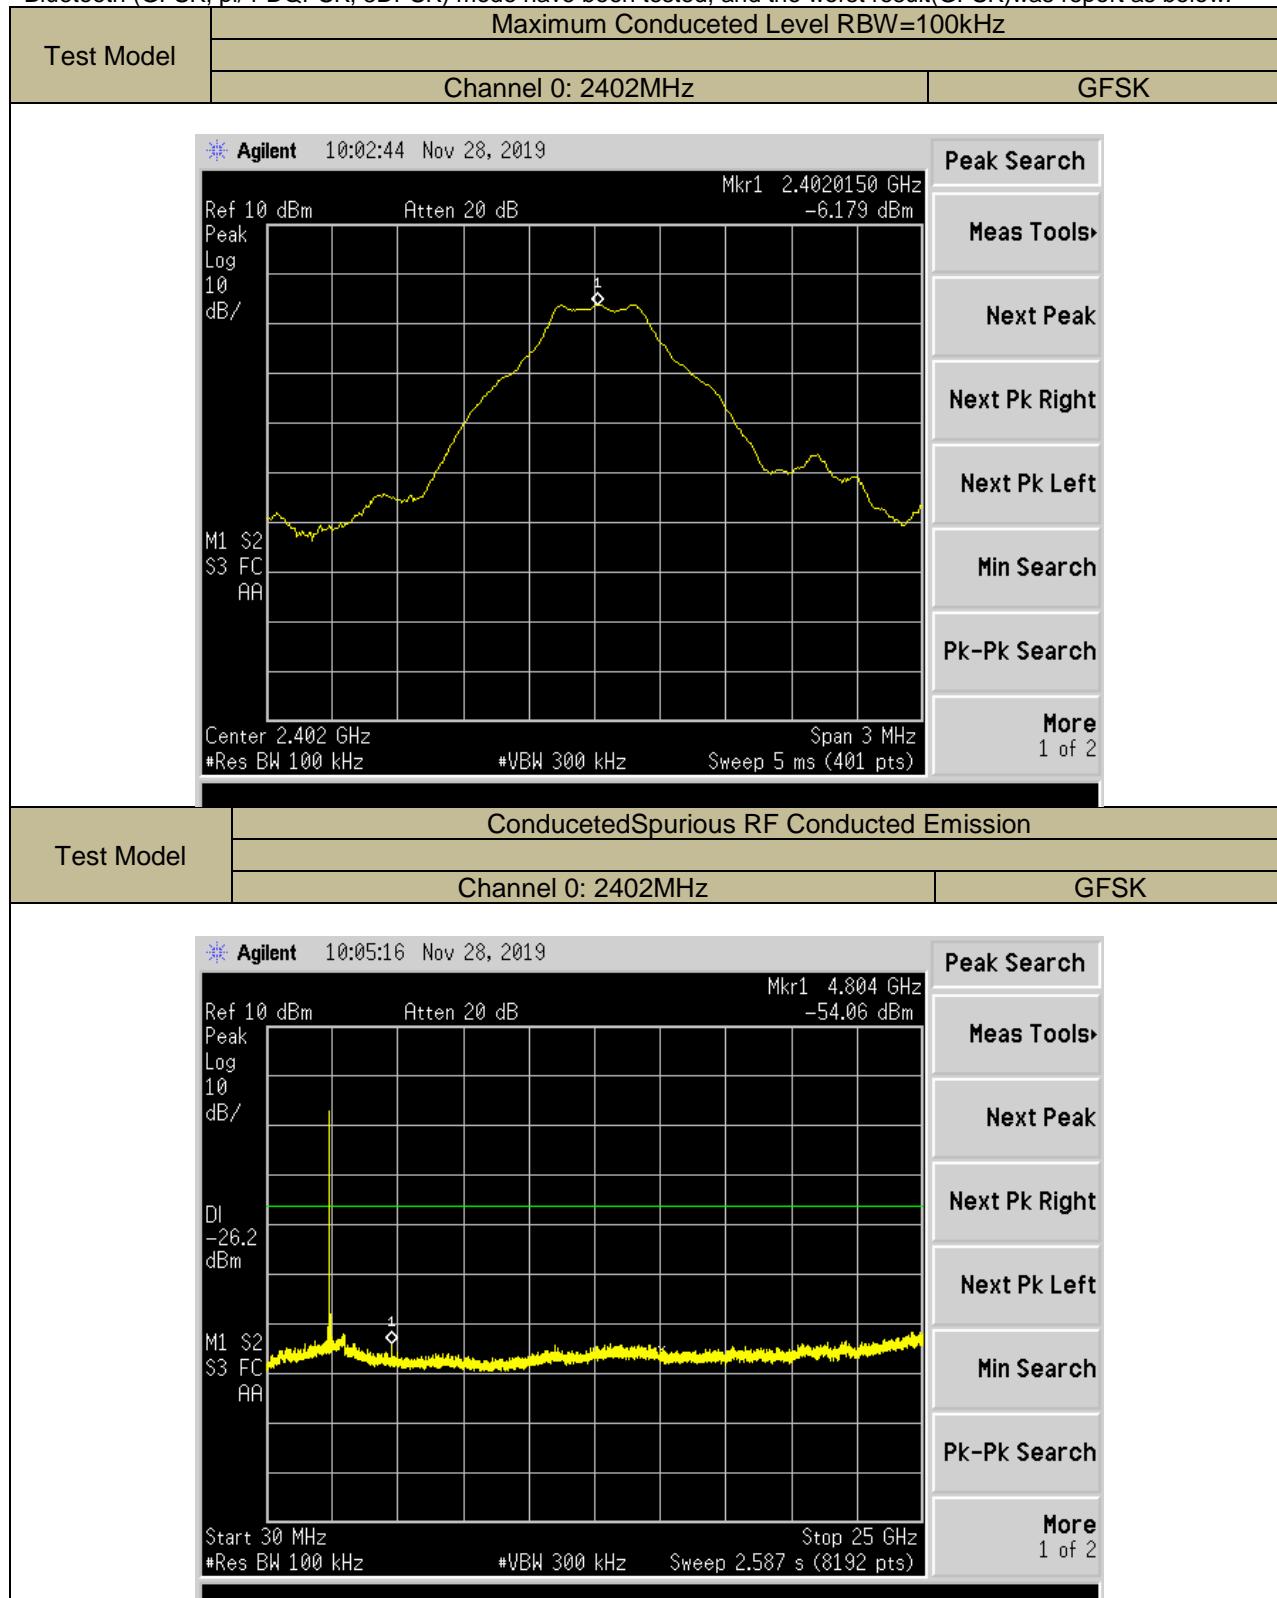


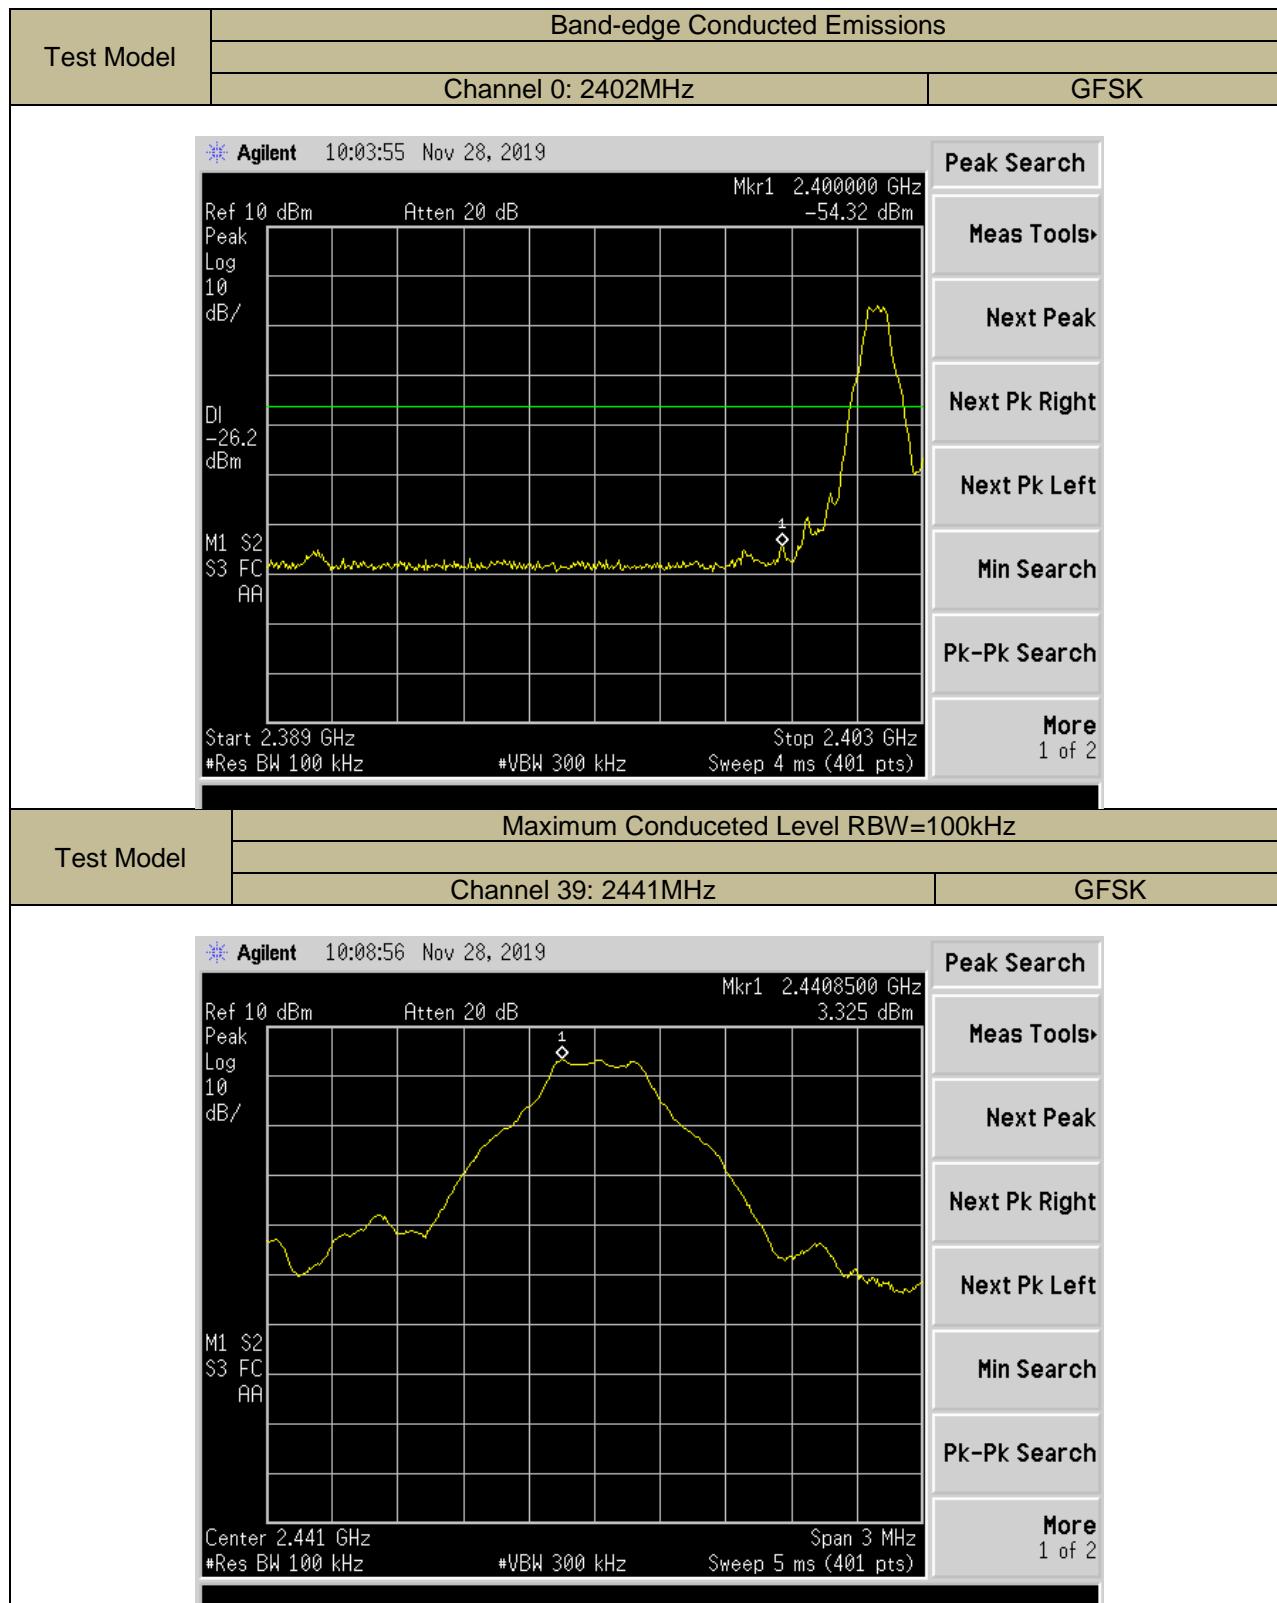

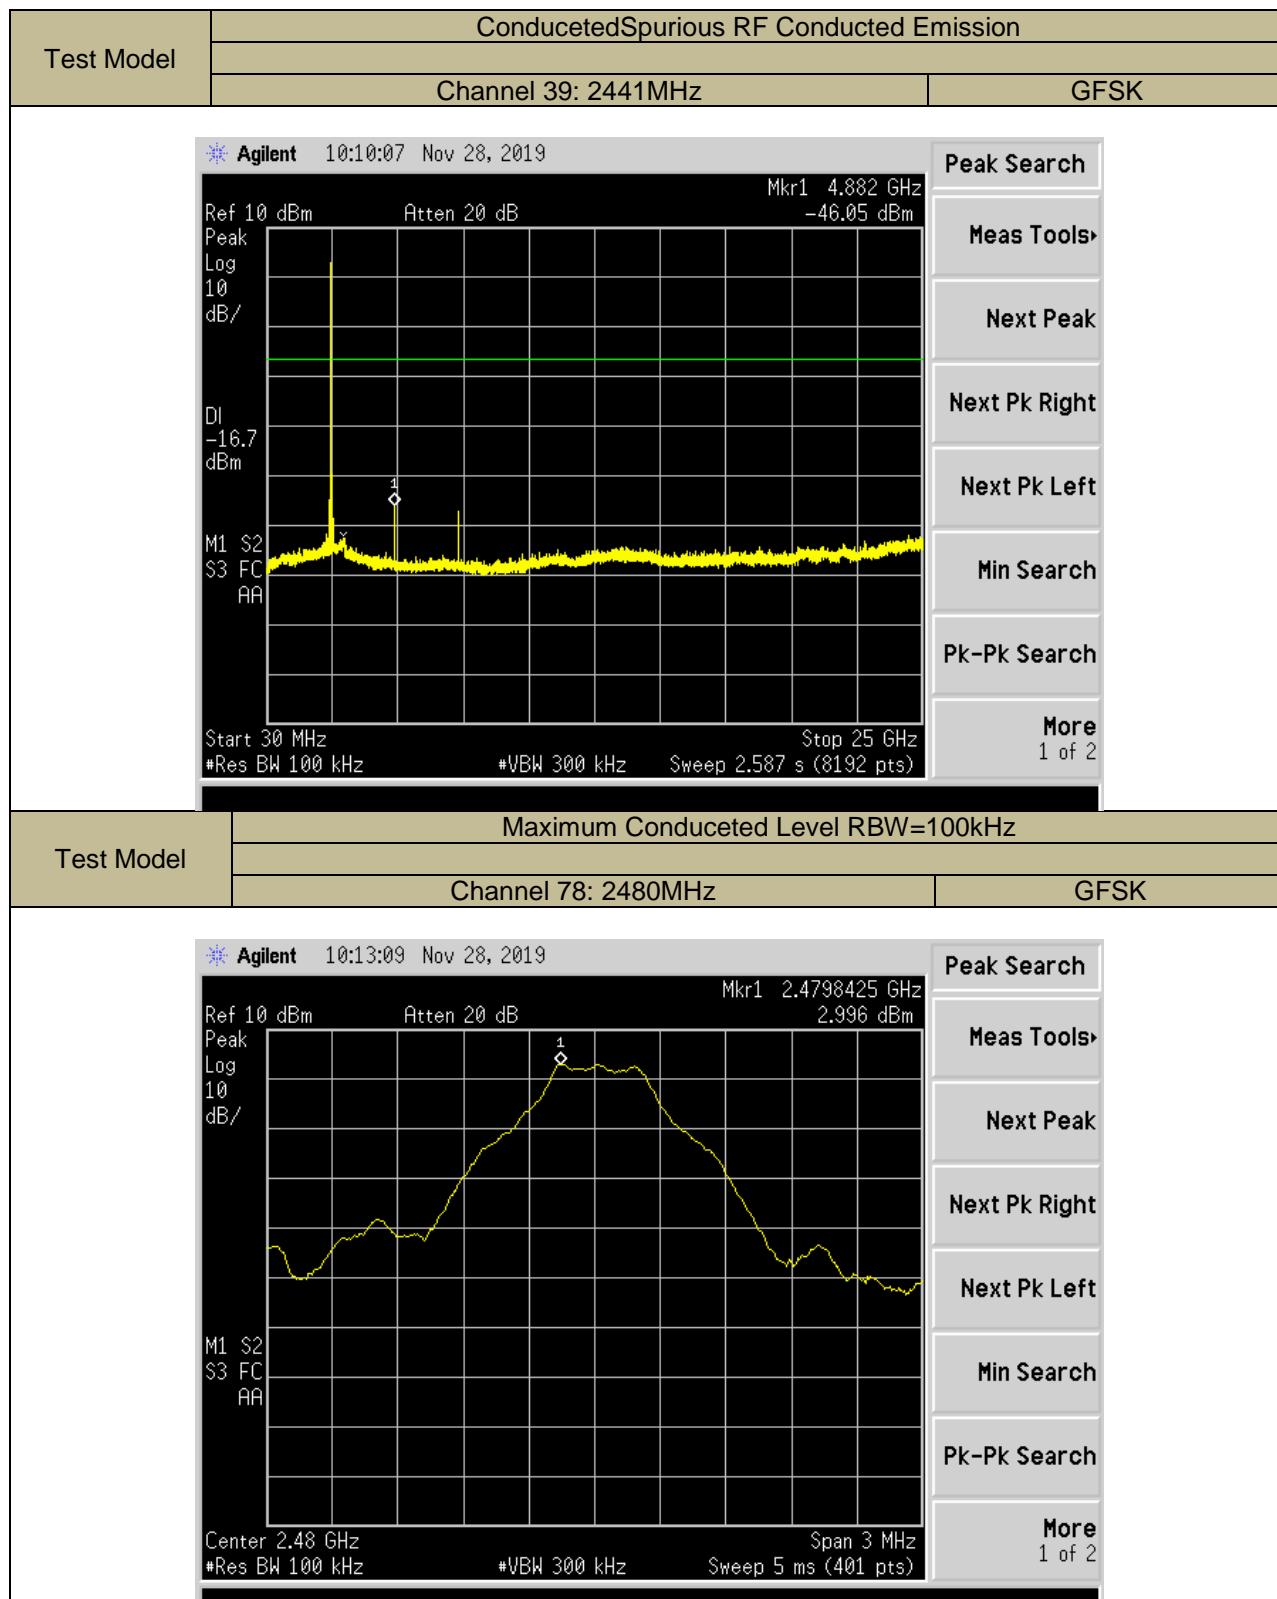

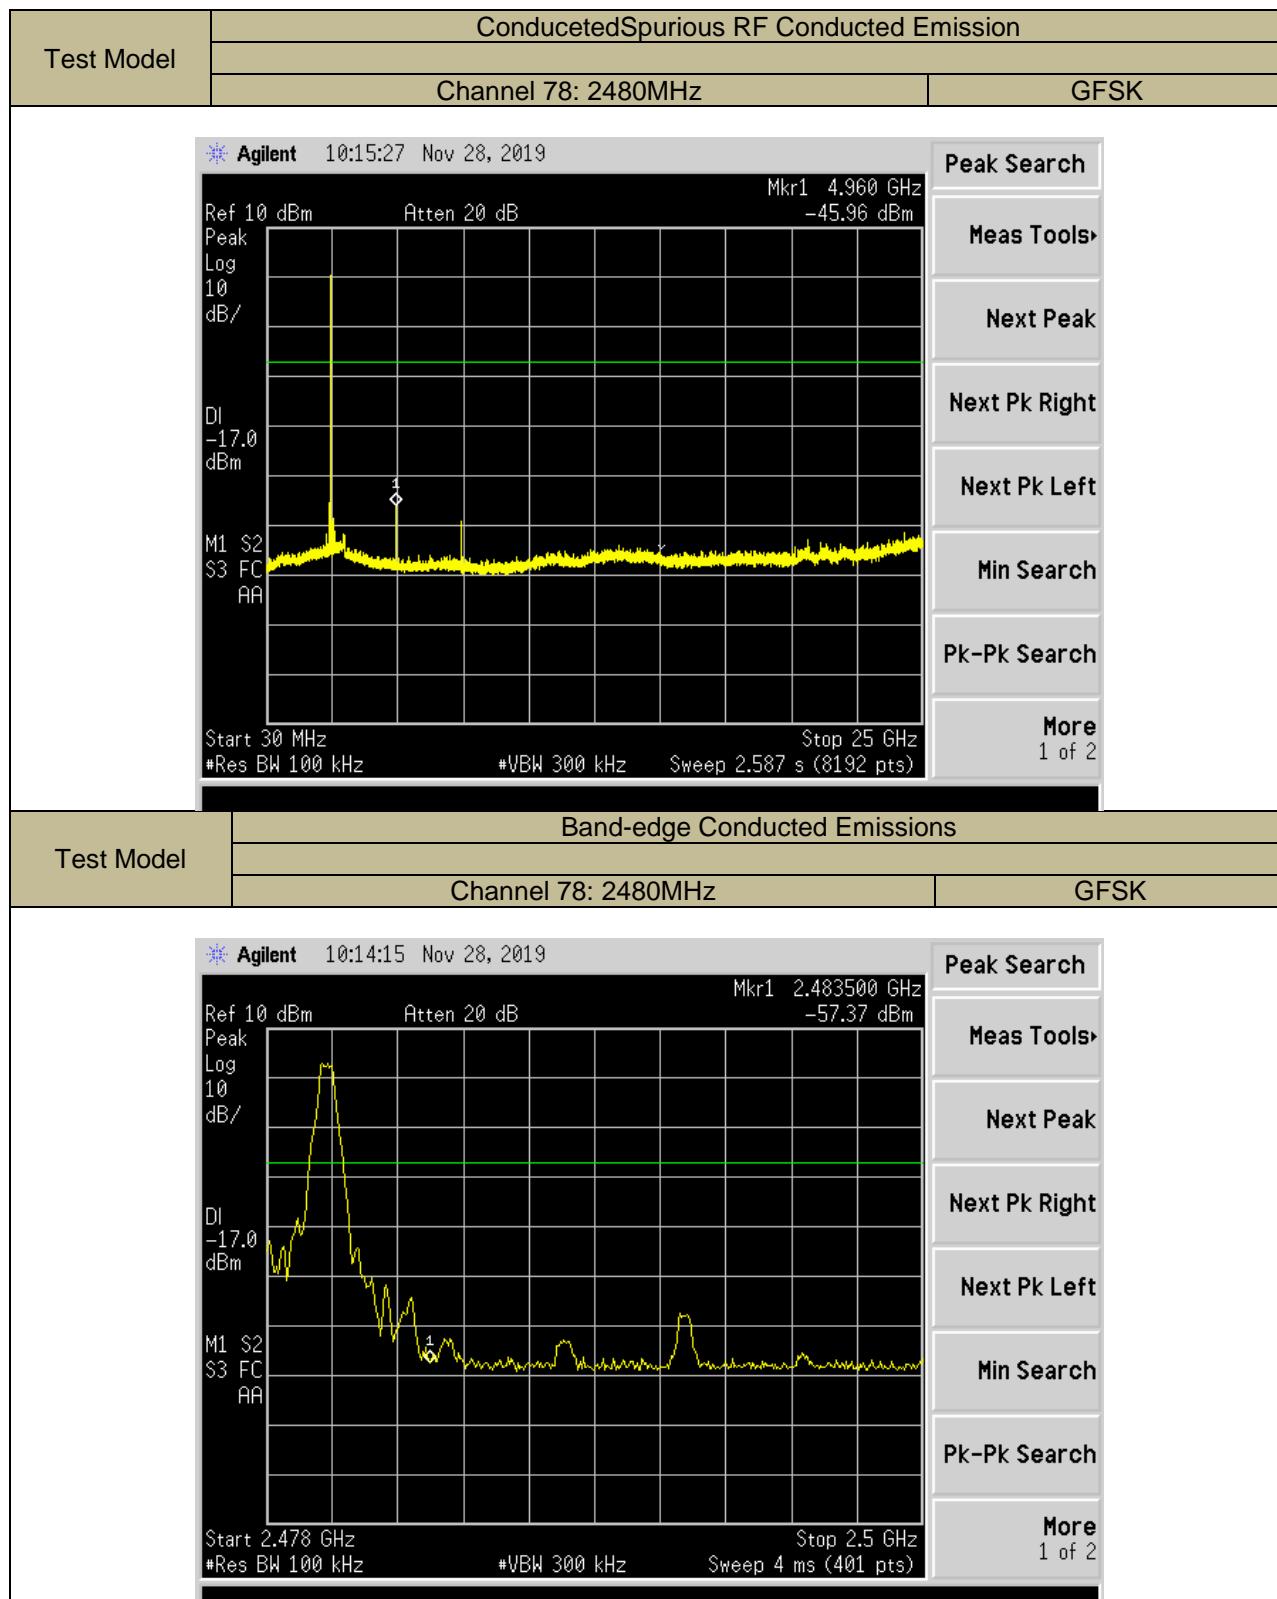

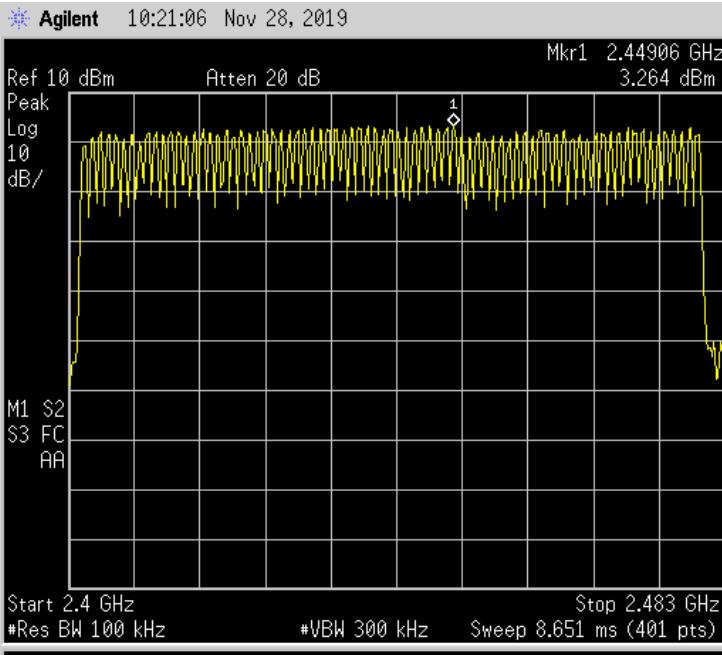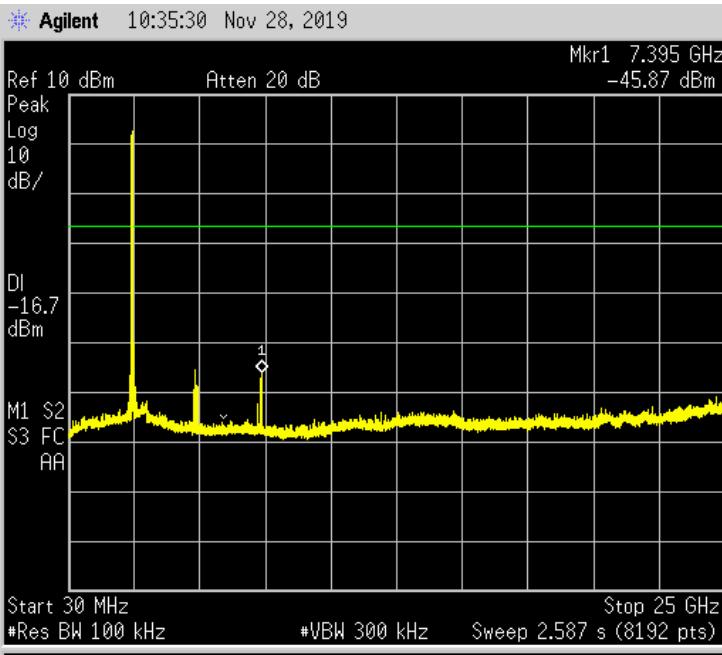Test Model	Maximum Conducted Level RBW=100kHz	
	Hopping Mode	GFSK
 <div style="position: absolute; right: 0; top: 0; background-color: black; color: white; padding: 5px; font-size: small;"> <span>Peak Search</span>  <span>Meas Tools</span>  <span>Next Peak</span>  <span>Next Pk Right</span>  <span>Next Pk Left</span>  <span>Min Search</span>  <span>Pk-Pk Search</span>  <span>More</span>  <span>1 of 2</span> </div>		
<p>Conducted Spurious RF Conducted Emission</p> <p>Hopping Mode</p> <p>GFSK</p>  <div style="position: absolute; right: 0; top: 0; background-color: black; color: white; padding: 5px; font-size: small;"> <span>Peak Search</span>  <span>Meas Tools</span>  <span>Next Peak</span>  <span>Next Pk Right</span>  <span>Next Pk Left</span>  <span>Min Search</span>  <span>Pk-Pk Search</span>  <span>More</span>  <span>1 of 2</span> </div>		

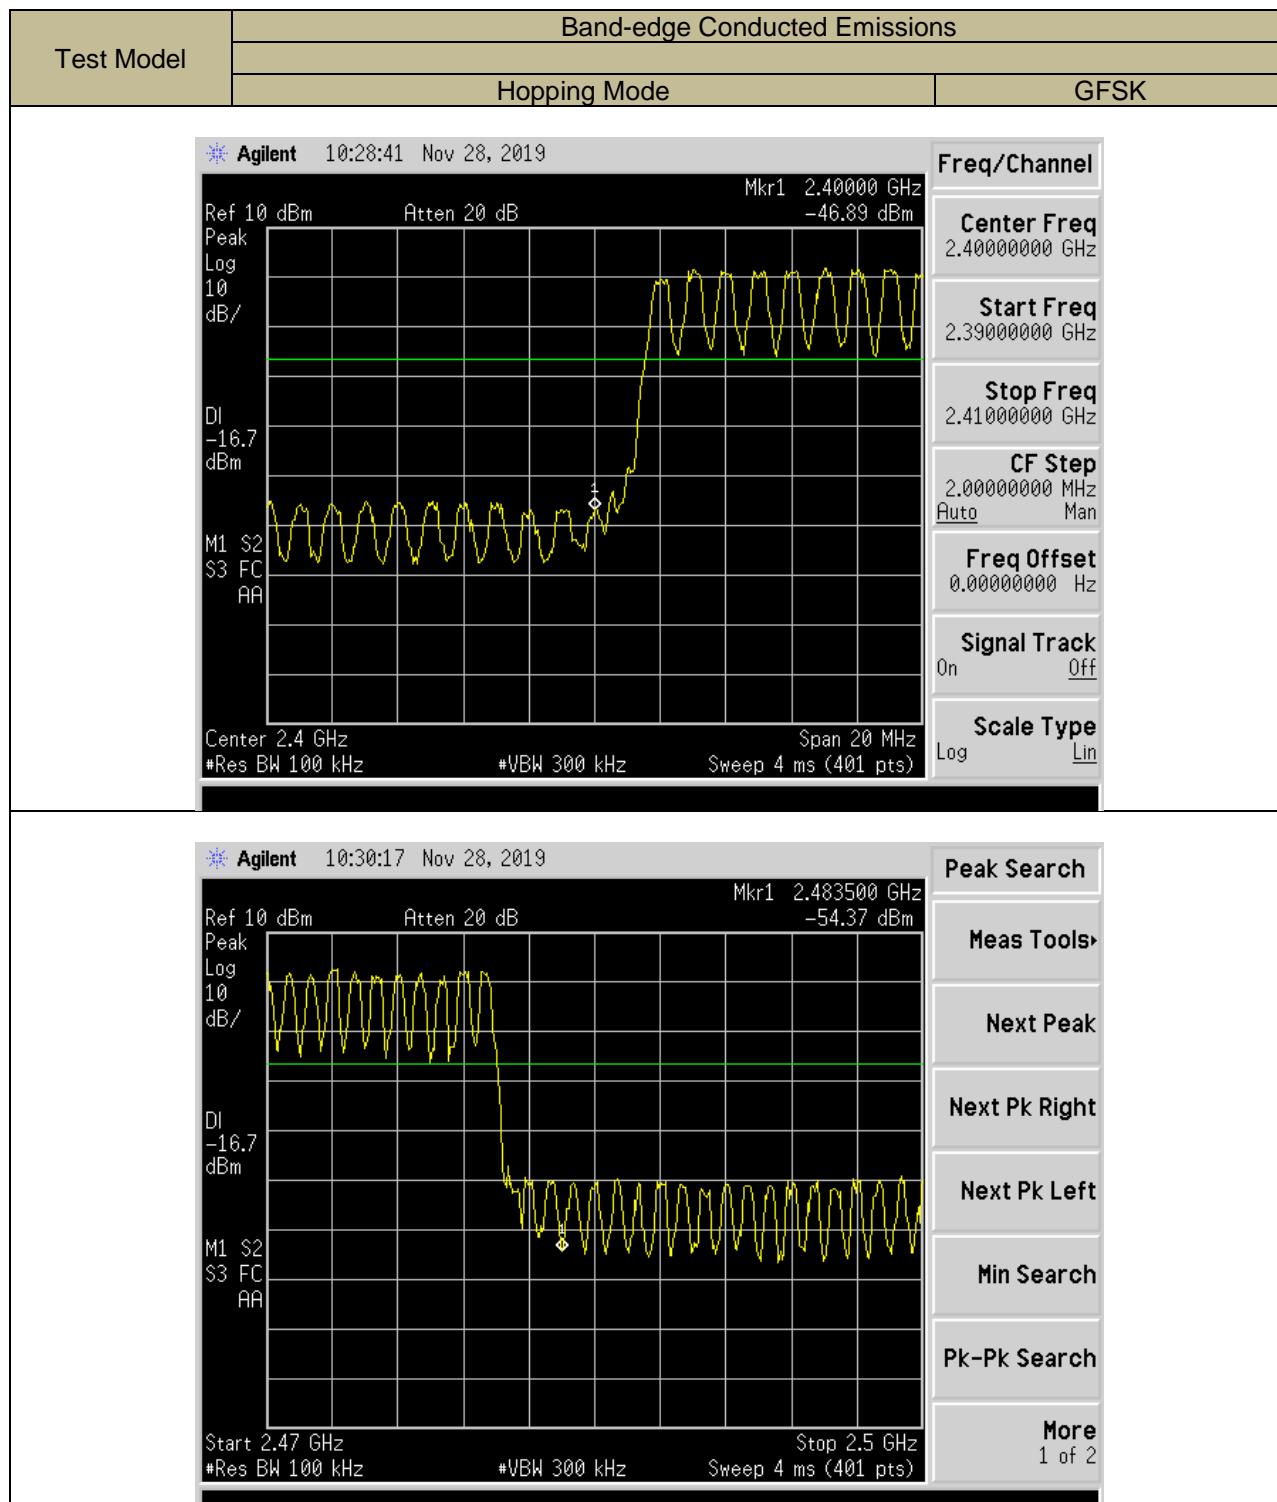

## 9.7 RADIATED SPURIOUS EMISSION

### 9.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.209, RSS-247 Clause 3.3, 558074 D01 15.247 Meas Guidance V05r02

### 9.7.2 Conformance Limit

According to FCC Part 15.247(d) & RSS-Gen Table 6 & Table 7: radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ( $\mu$ V/m)	300
0.490-1.705	24000/F(KHz)	20 log ( $\mu$ V/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz (1GHz to 25GHz), 100 kHz for  $f < 1$  GHz (30MHz to 1GHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 9.7.5 Test Results

#### ■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	29.5 °C	Test Date:	Dec 08, 2019
Humidity:	48 %	Test By:	XW
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})(\text{ dB})$ ;

Limit line=Specific limits(dBuV) + distance extrapolation factor

#### ■ Spurious Emission Above 1GHz(1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result(GFSK)was report as below:

Temperature:	25 °C	Test Date:	Dec 08, 2019
Humidity:	48 %	Test By:	XW
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804.60	V	50.83	35.48	74.00	54.00	-23.17	-18.52
11390.40	V	60.72	38.64	74.00	54.00	-13.28	-15.36
17968.55	V	64.18	40.43	74.00	54.00	-9.82	-13.57
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
5107.20	H	46.52	34.62	74.00	54.00	-27.48	-19.38
11344.50	H	60.03	37.54	74.00	54.00	-13.97	-16.46
17960.90	H	65.17	40.27	74.00	54.00	-8.83	-13.73

Temperature: 25°C      Test Date: Dec 08, 2019  
 Humidity: 48 %      Test By: XW  
 Test mode: GFSK      Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4881.95	V	53.54	36.44	74.00	54.00	-20.46	-17.56
11758.45	V	60.25	37.87	74.00	54.00	-13.75	-16.13
17960.90	V	65.12	40.22	74.00	54.00	-8.88	-13.78
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
4881.95	H	47.92	34.21	74.00	54.00	-26.08	-19.79
11724.45	H	60.35	38.63	74.00	54.00	-13.65	-15.37
17999.15	H	64.86	40.16	74.00	54.00	-9.14	-13.84

Temperature: 25°C      Test Date: Dec 08, 2019  
 Humidity: 48 %      Test By: XW  
 Test mode: GFSK      Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960.15	V	49.00	35.14	74.00	54.00	-25.00	-18.86
7439.60	V	54.15	39.94	74.00	54.00	-19.85	-14.06
15011.40	V	61.66	40.58	74.00	54.00	-12.34	-13.42
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
4960.15	H	47.84	33.61	74.00	54.00	-26.16	-20.39
11408.25	H	59.76	37.46	74.00	54.00	-14.24	-16.54
17951.55	H	64.42	40.09	74.00	54.00	-9.58	-13.91

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (nonhopping , Hopping) mode have been tested, and the worst result(GFSK, nonhopping) was report as below:

Temperature:	18°C	Test Date:	Dec 02, 2019
Humidity:	48 %	Test By:	XW
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2381.120	H	49.31	74	-24.69	35.21	54	-18.79
2316.960	V	48.52	74	-25.48	34.65	54	-19.35

Temperature:	18°C	Test Date:	Dec 02, 2019
Humidity:	48 %	Test By:	XW
Test mode:	GFSK	Frequency:	Channel 78: 2480MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2483.500	H	60.53	74	-13.47	41.28	54	-12.72
2484.441	V	49.19	74	-24.81	34.65	54	-19.35


Temperature:	18°C	Test Date:	Dec 02, 2019
Humidity:	48 %	Test By:	XW
Test mode:	GFSK	Frequency:	Hopping


Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2390.00	H	53.04	74	-20.96	34.86	54	-19.14
2483.50	H	56.77	74	-17.23	33.98	54	-20.02
2390.00	V	53.01	74	-20.99	34.87	54	-19.13
2483.50	V	57.43	74	-16.57	32.98	54	-21.02


**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.


(3) Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

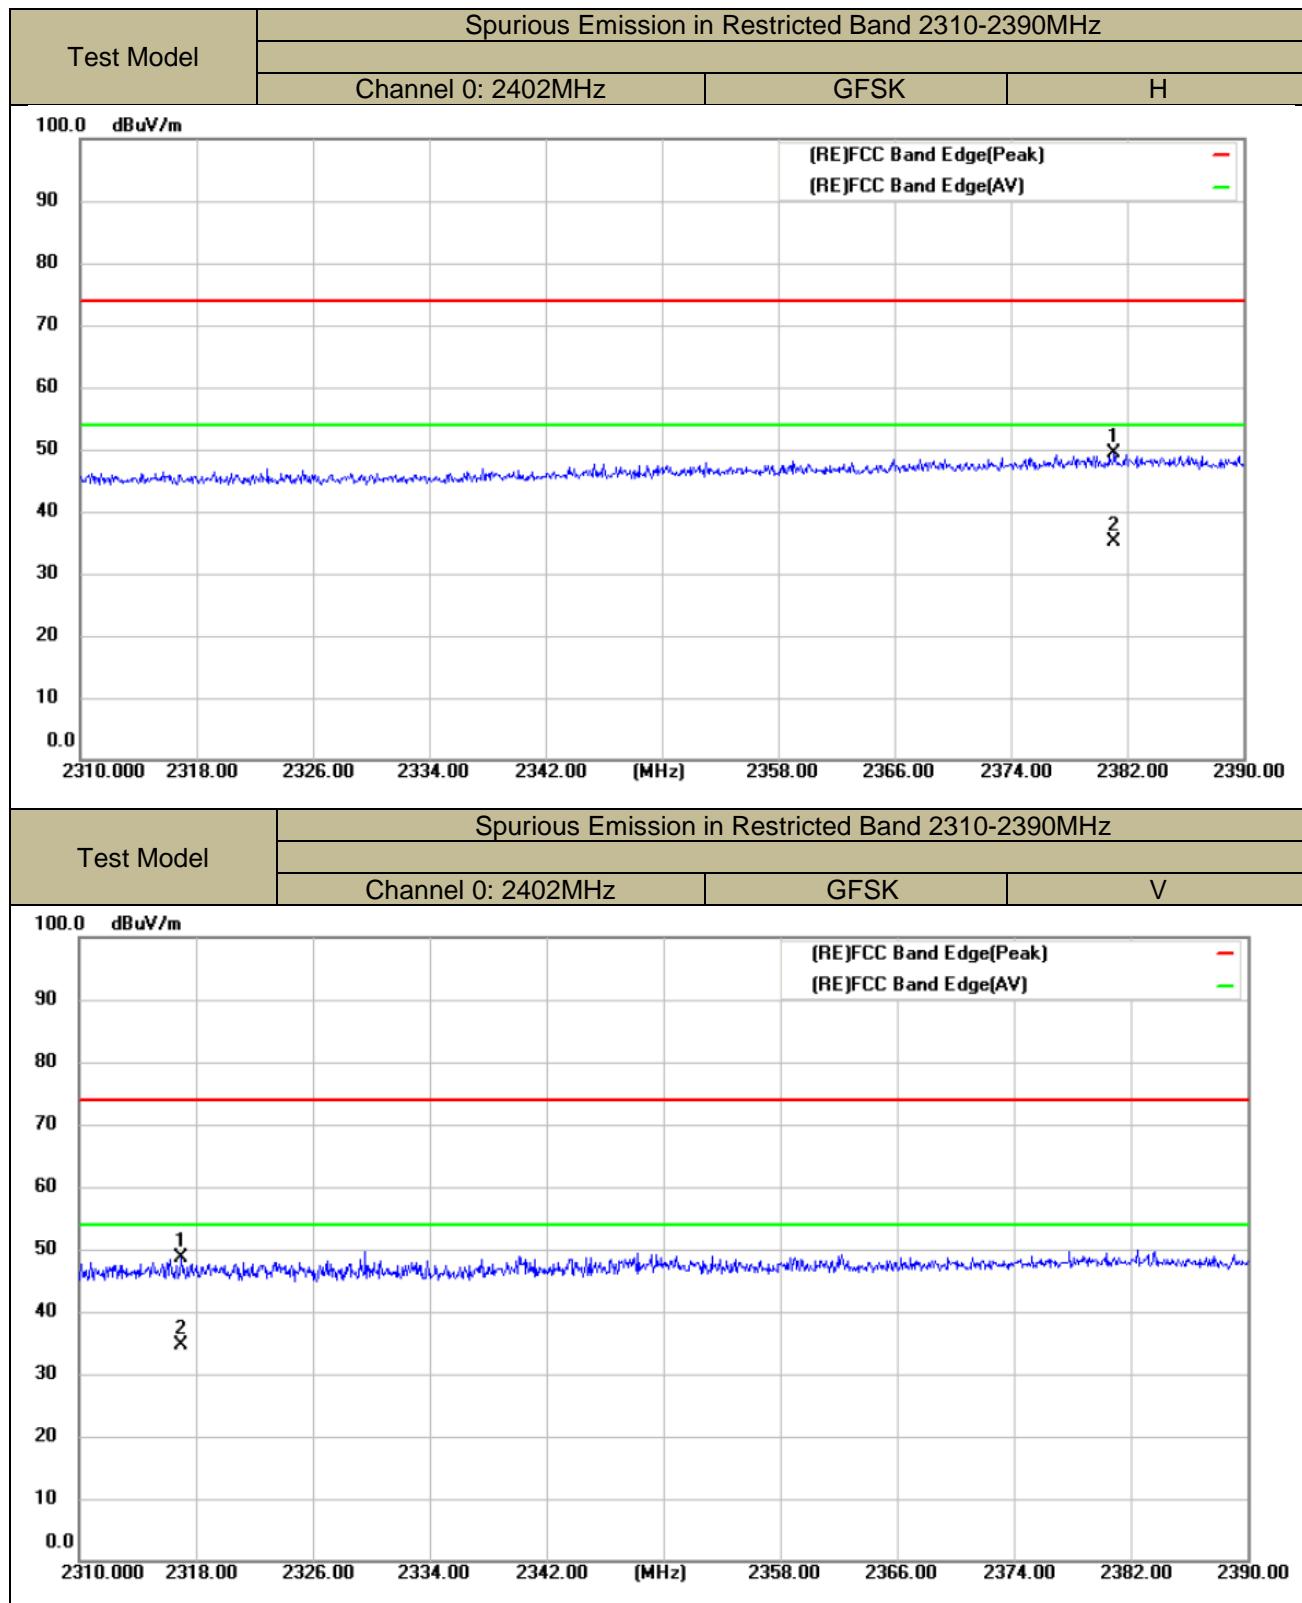

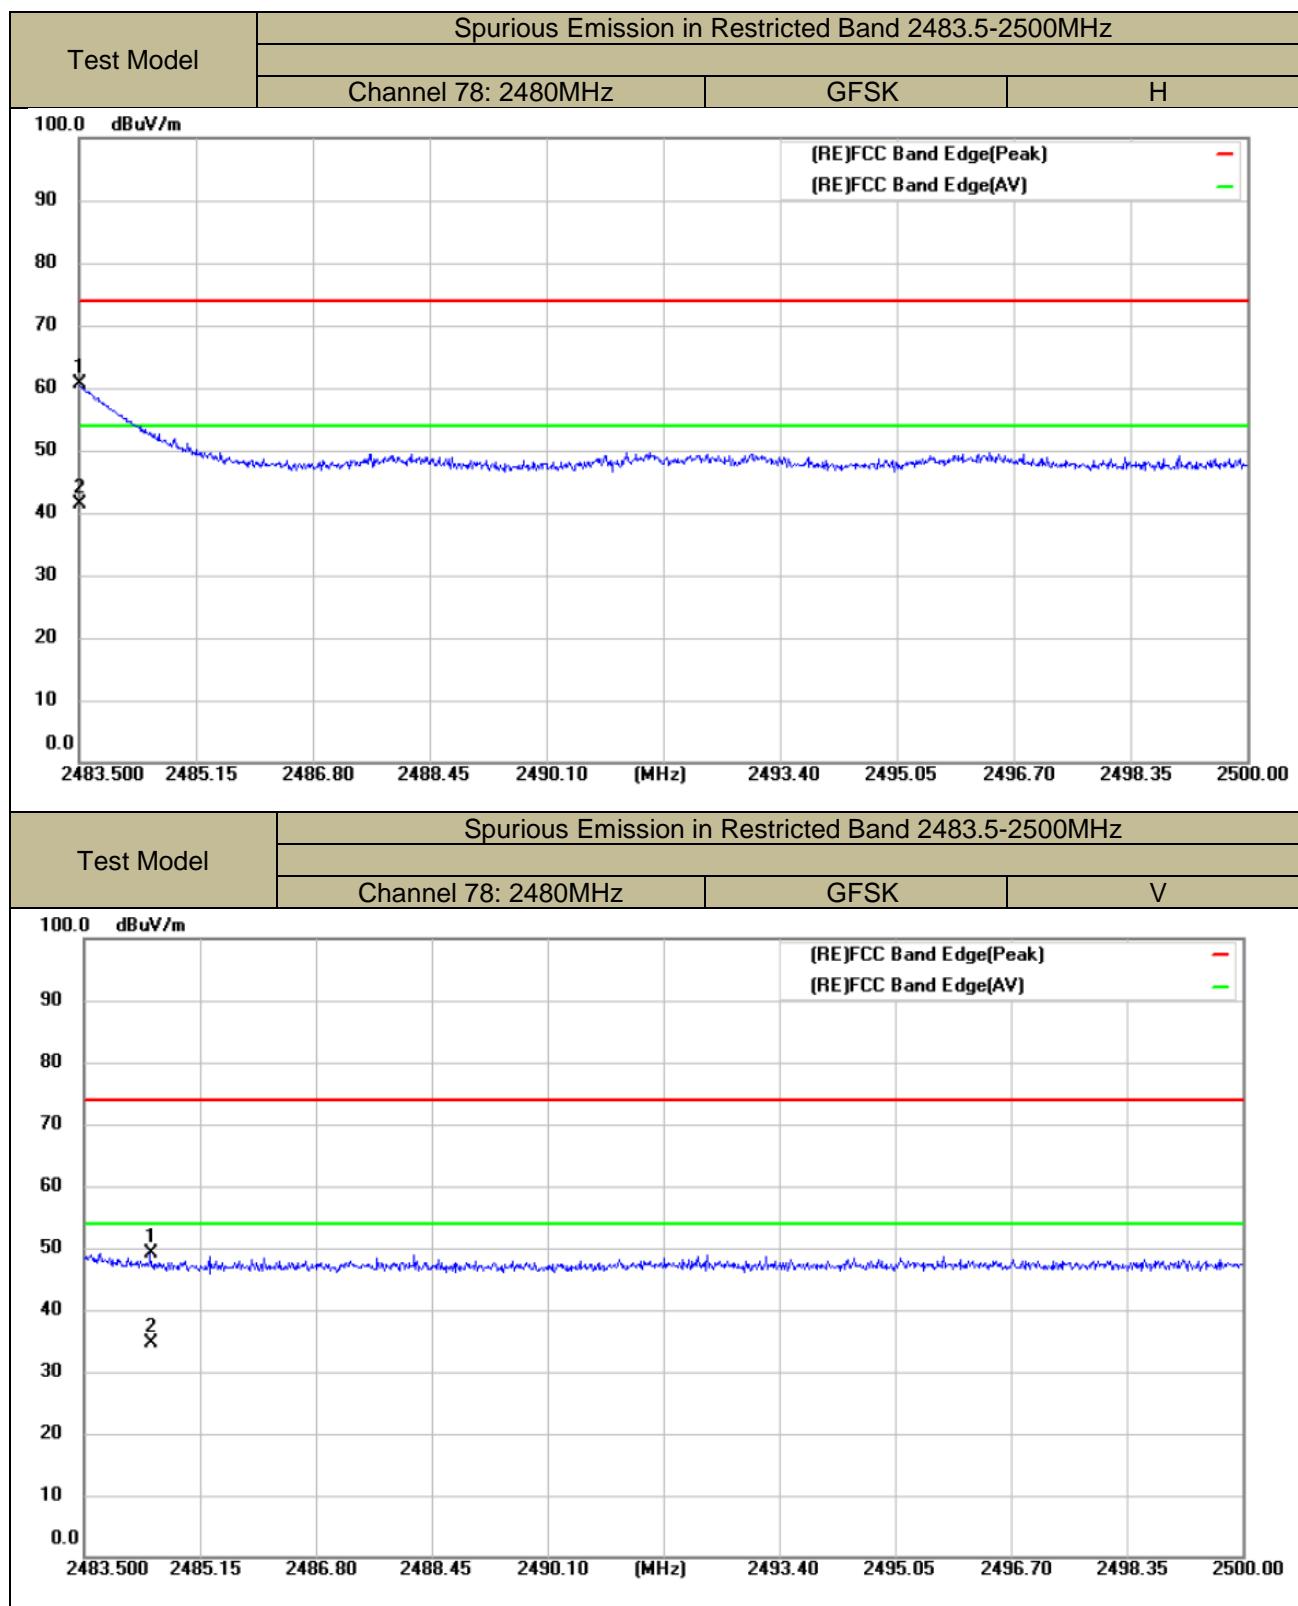

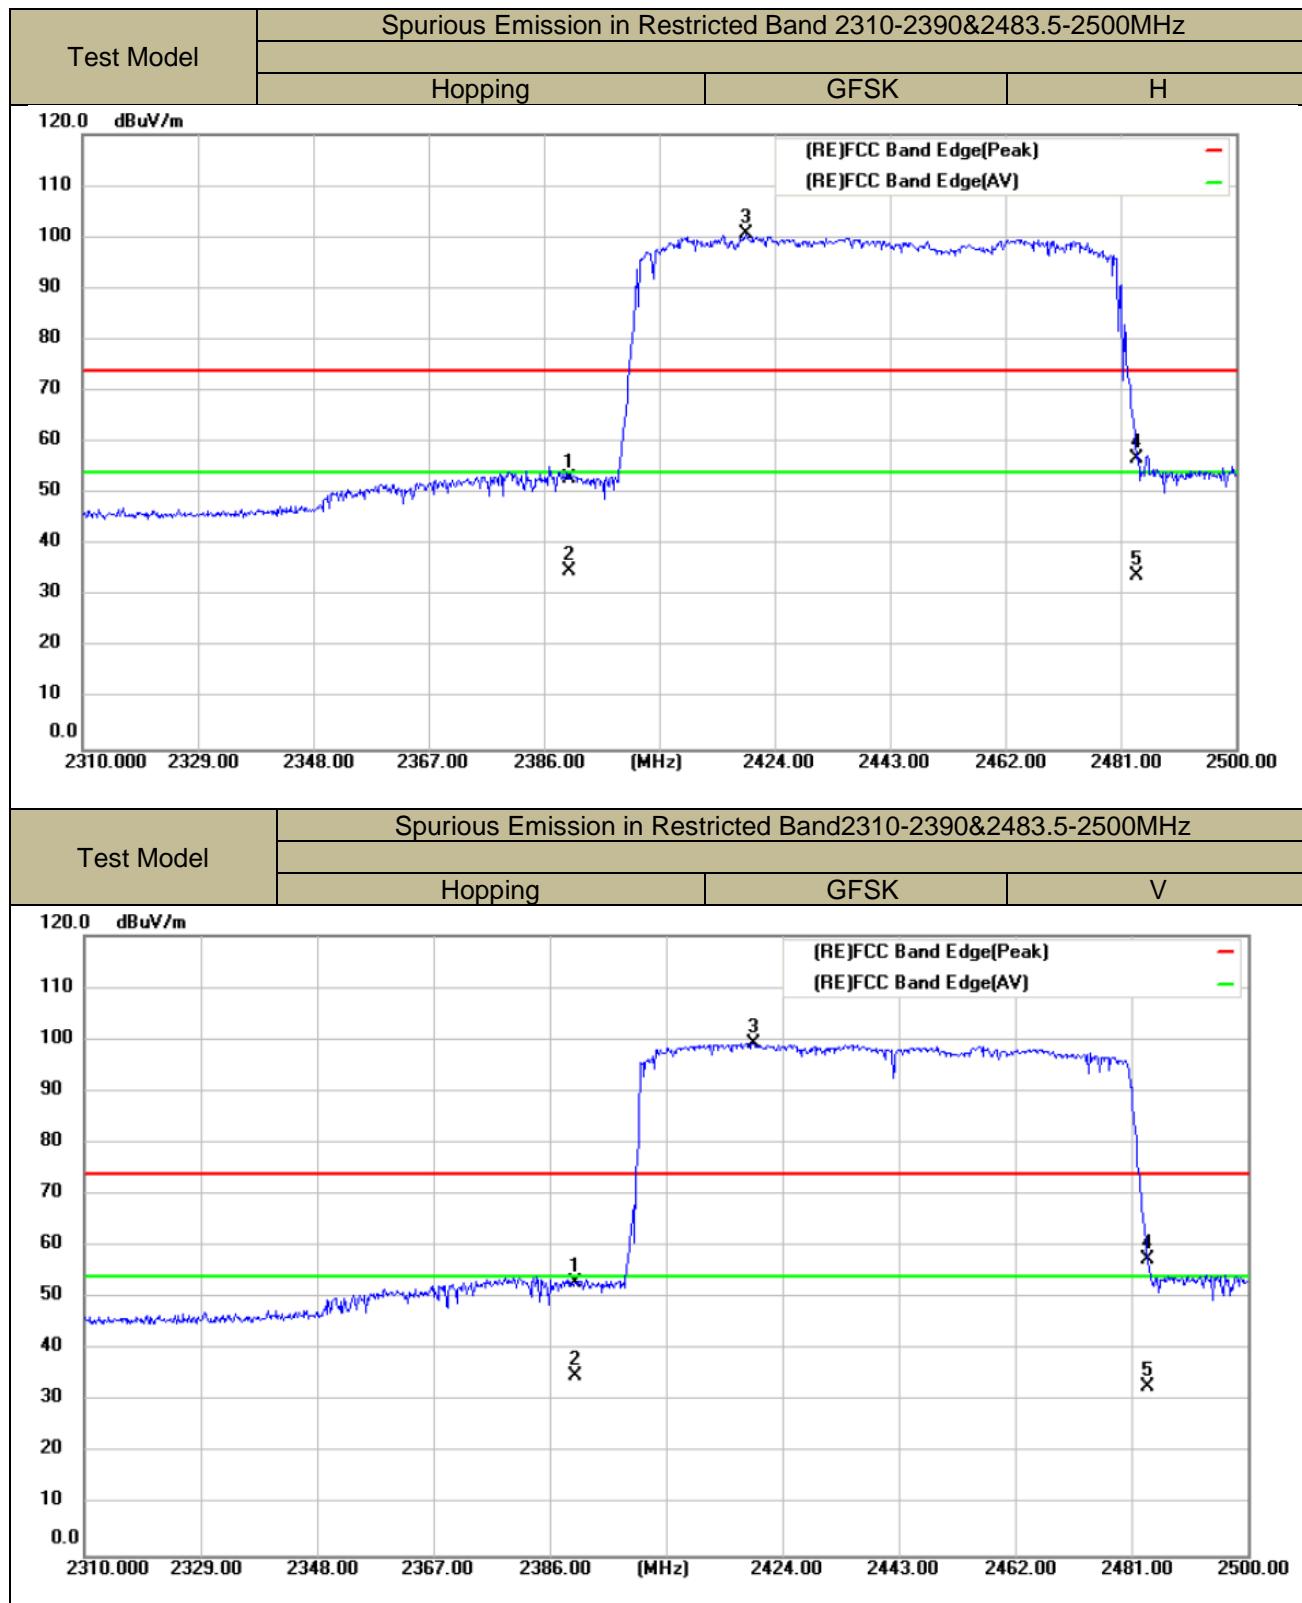


■ Spurious Emission below 1GHz(30MHz to 1GHz)  
Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result recorded was report as below:

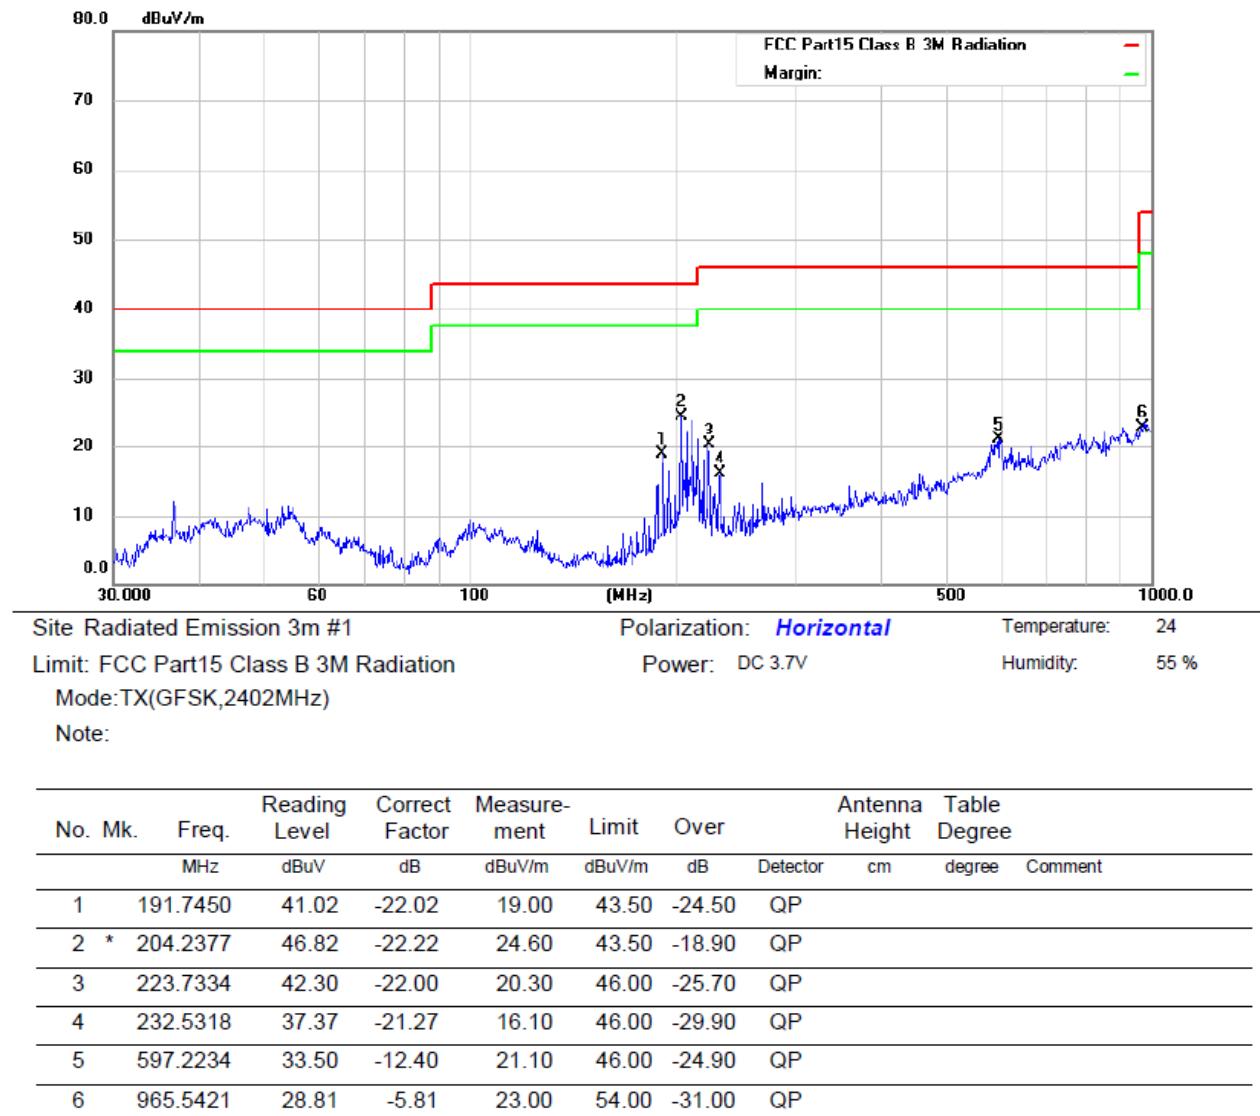


\*:Maximum data    x:Over limit    l:over margin

Operator: Peter

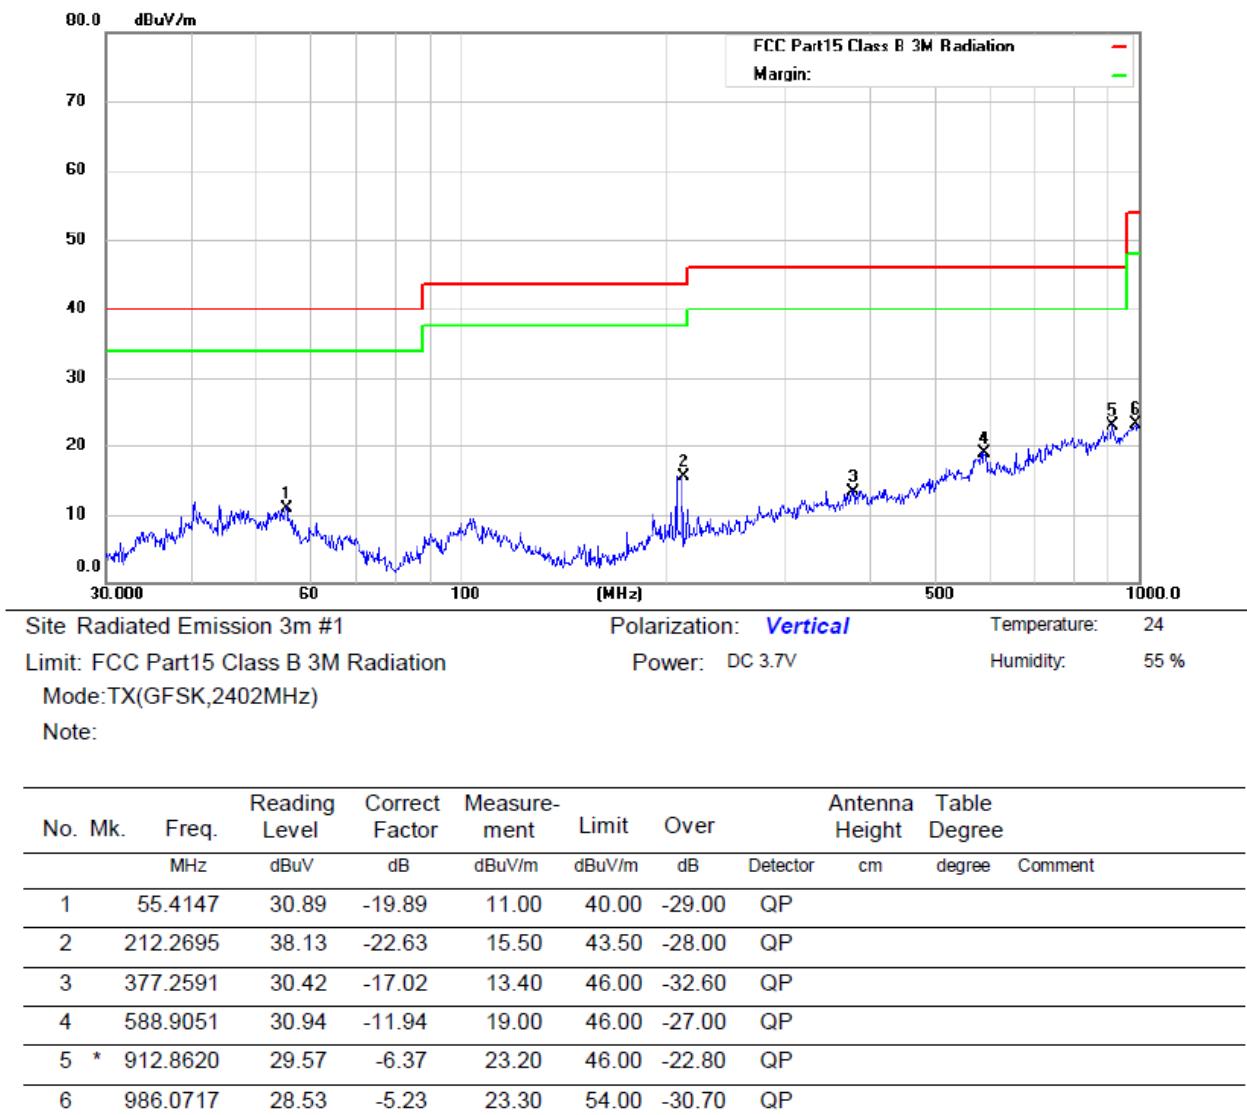


\*:Maximum data   x:Over limit   !:over margin

Operator: Peter

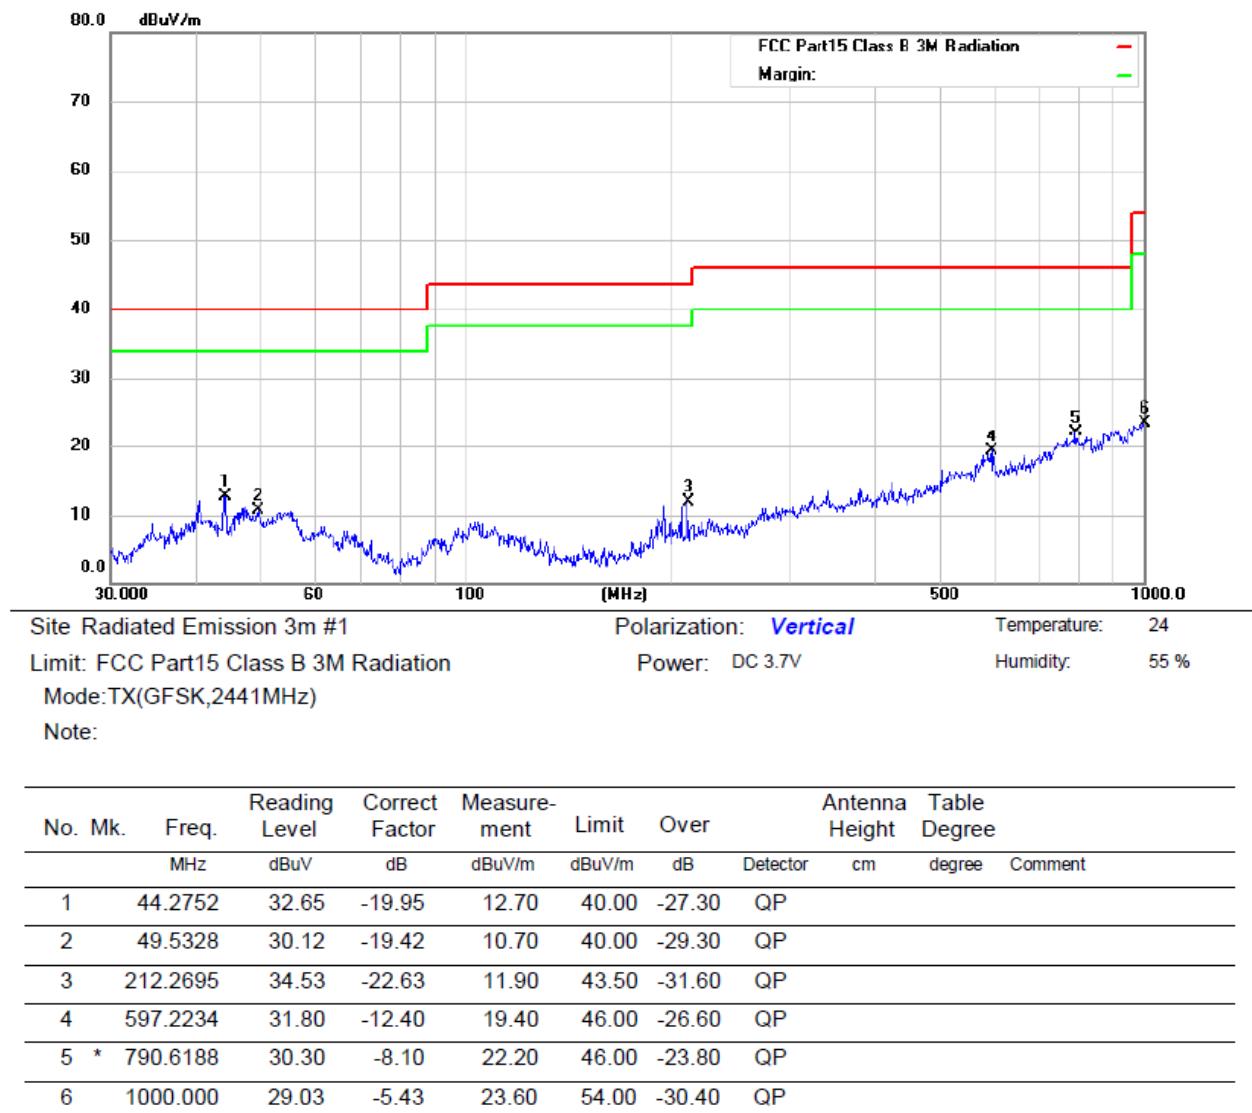


\*:Maximum data x:Over limit !:over margin

Operator: Peter

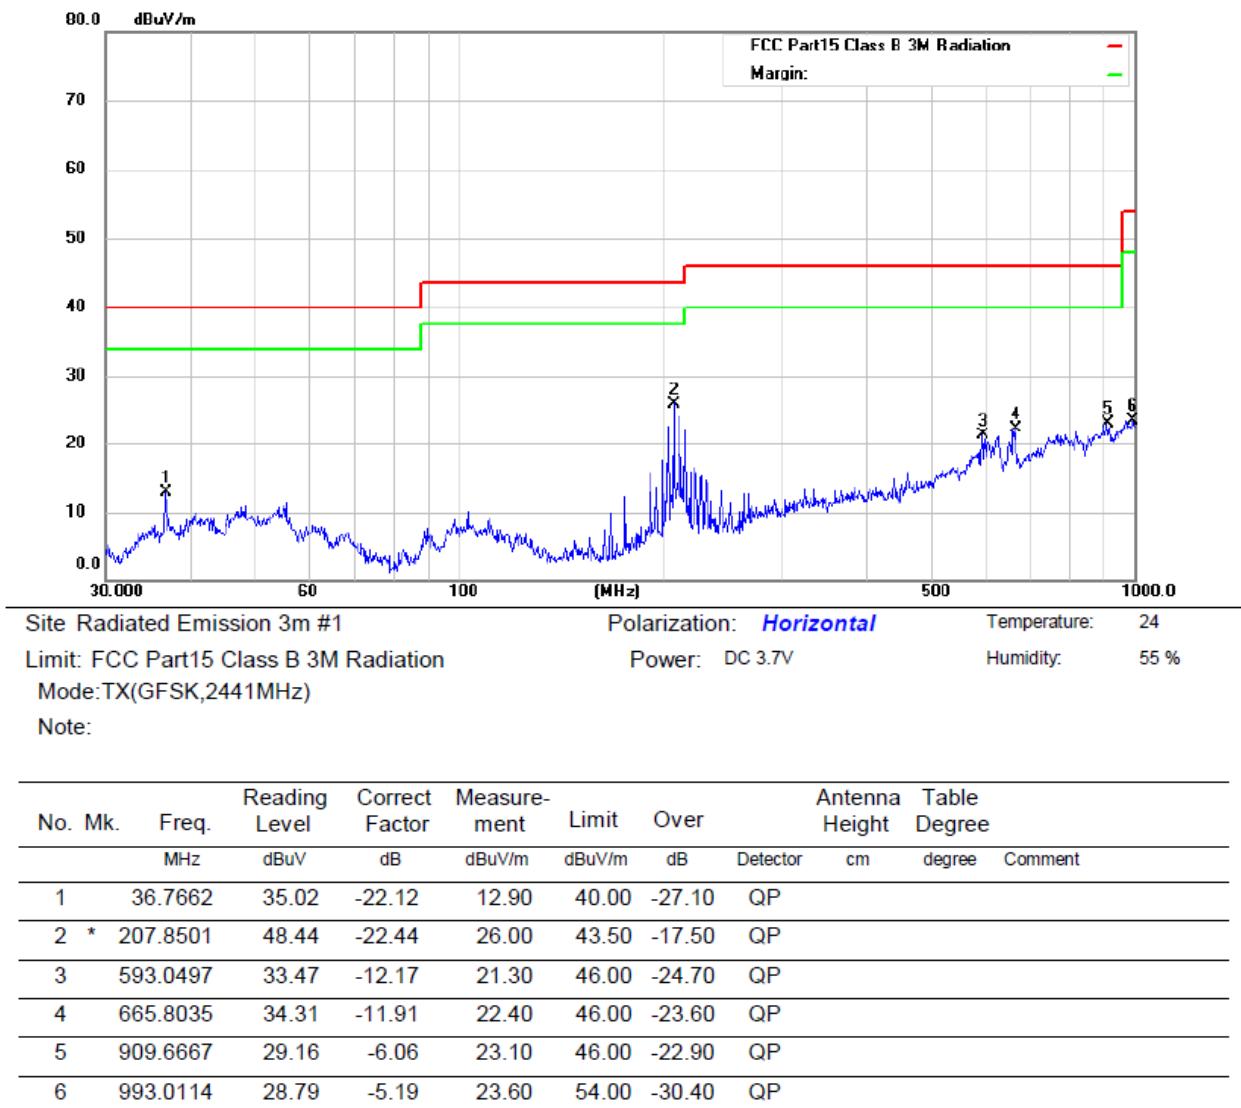

\*:Maximum data    x:Over limit    !:over margin

Operator: Peter

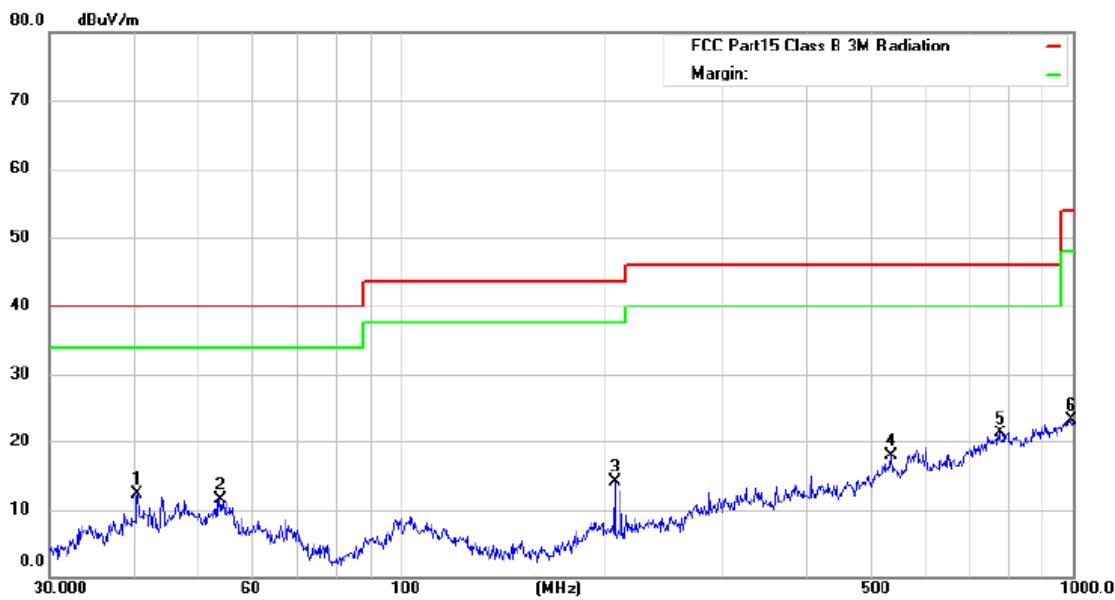

Site Radiated Emission 3m #1

Polarization: **Vertical**

Temperature: 24

Limit: FCC Part15 Class B 3M Radiation

Power: DC 3.7V

Humidity: 55 %


Mode: TX(GFSK,2480MHz)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		40.5591	32.96	-20.56	12.40	40.00	-27.60	QP			
2		53.6932	31.15	-19.55	11.60	40.00	-28.40	QP			
3		207.8501	36.54	-22.44	14.10	43.50	-29.40	QP			
4		535.7073	30.89	-12.99	17.90	46.00	-28.10	QP			
5	*	776.8778	29.44	-8.14	21.30	46.00	-24.70	QP			
6		989.5355	28.50	-5.10	23.40	54.00	-30.60	QP			

\*:Maximum data    x:Over limit    !:over margin

Operator: Peter

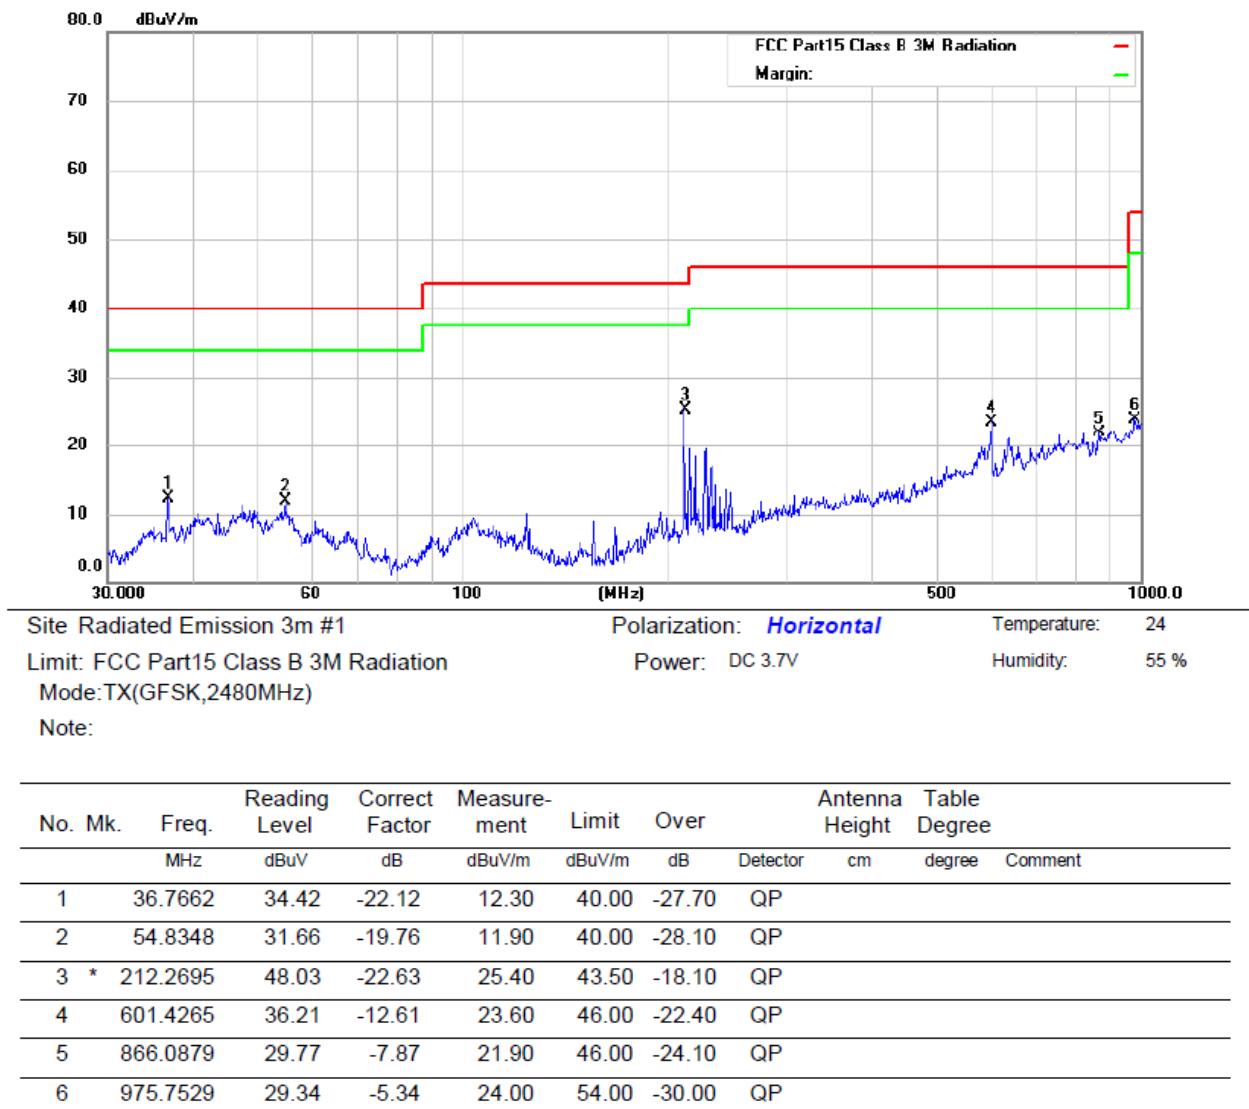

\*:Maximum data    x:Over limit    !:over margin

Operator: Peter

## 9.8 CONDUCTED EMISSION TEST

### 9.8.1 Applicable Standard

According to FCC Part 15.207(a) and RSS-Gen Clause 8.8

### 9.8.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

### 9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 9.8.5 Test Results

N/A.

## 9.9 ANTENNA APPLICATION

### 9.9.1 Antenna Requirement

Standard	Requirement
FCC Part 15.247(b)(4) and Part 15.203 and RSS-Gen Clause 6.8	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.9.2 Result

The EUT'S antenna is PCB antenna. The antenna's gain is 2dbi, and the antenna can't be replaced by the userwhich in accordance to section 15.203, please refer to the photos.

-----The end-----